




For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

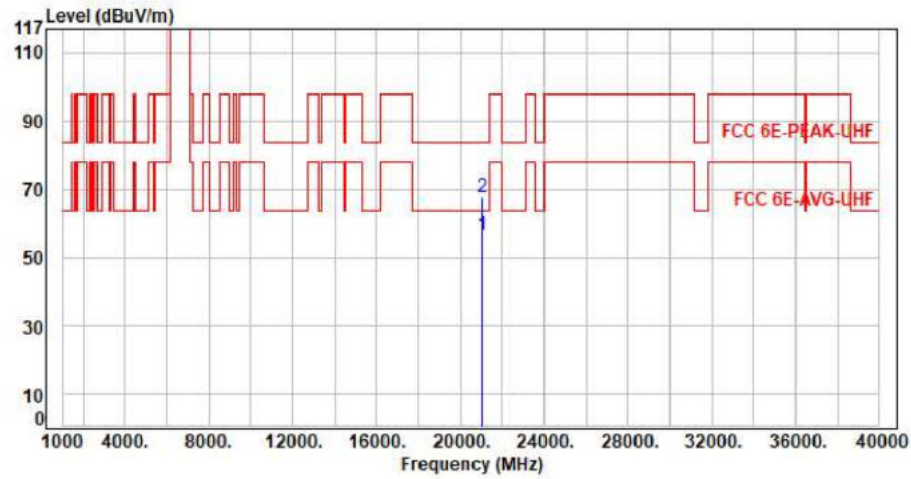


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.98	56.48	63.54	-7.06	Average	150	360	P
2	21045.00	11.50	56.08	67.58	83.54	-15.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

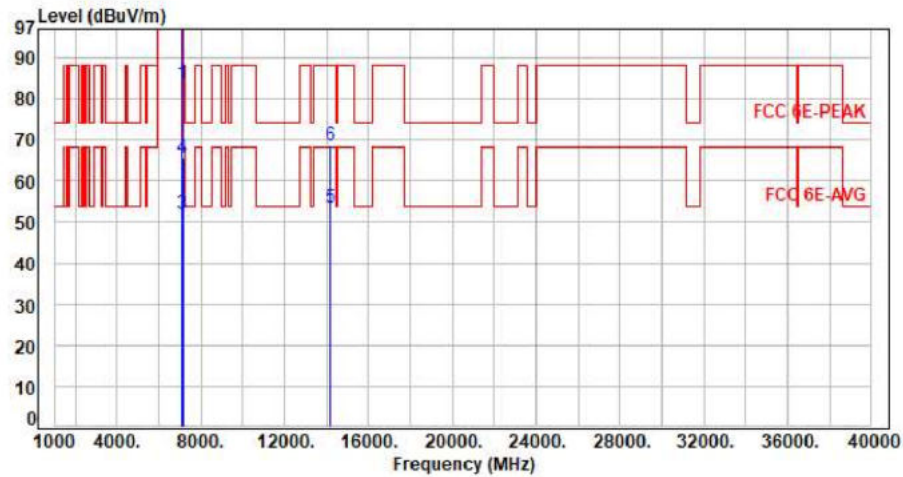


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	73.65	83.61	200.00	-116.39	Average	390	237	P
2	7095.00	9.96	86.92	96.88	200.00	-103.12	Peak	390	237	P
3	7125.00	10.05	41.80	51.85	68.20	-16.35	Average	390	237	P
4	7125.00	10.05	55.56	65.61	88.20	-22.59	Peak	390	237	P
5	14190.00	23.79	29.75	53.54	68.20	-14.66	Average	100	224	P
6	14190.00	23.79	44.78	68.57	88.20	-19.63	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

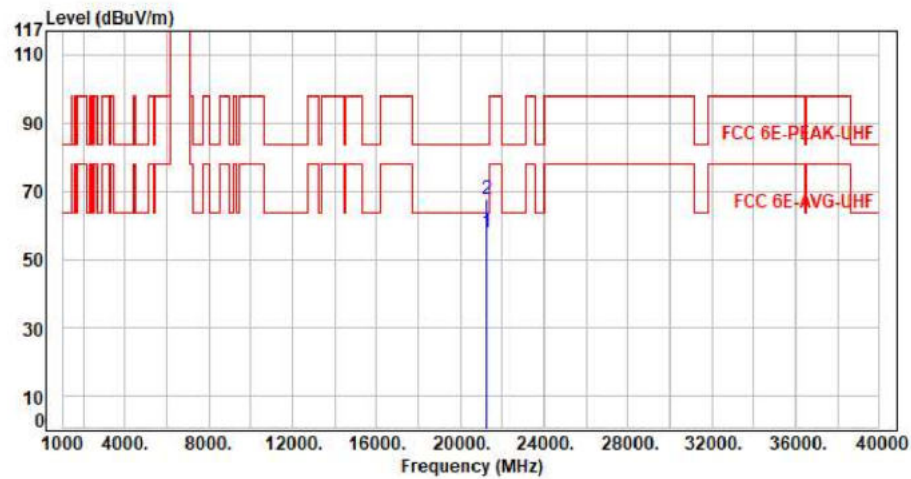


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.89	57.69	63.54	-5.85	Average	150	360	P
2	21285.00	11.80	55.83	67.63	83.54	-15.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

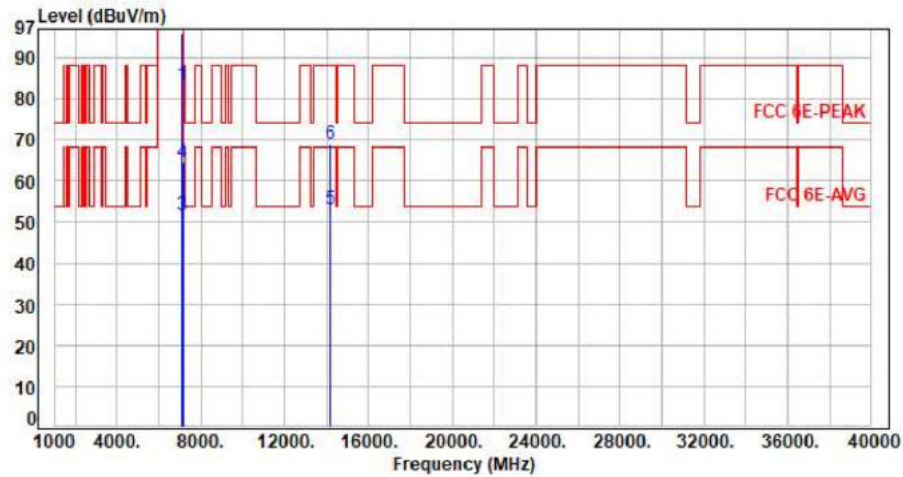


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	73.50	83.46	200.00	-116.54	Average	399	201	P
2	7095.00	9.96	85.96	95.92	200.00	-104.08	Peak	399	201	P
3	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	399	201	P
4	7125.00	10.05	54.33	64.38	88.20	-23.82	Peak	399	201	P
5	14190.00	23.79	29.18	52.97	68.20	-15.23	Average	100	228	P
6	14190.00	23.79	45.18	68.97	88.20	-19.23	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

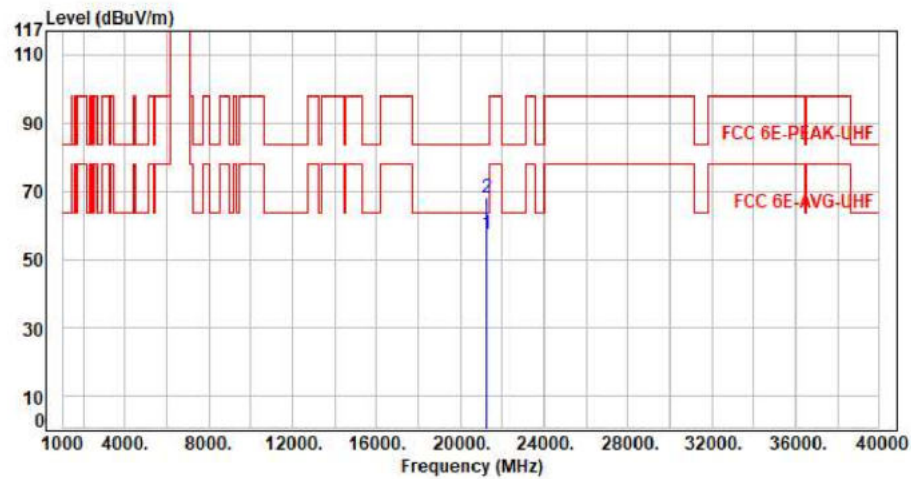


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.73	57.53	63.54	-6.01	Average	150	360	P
2	21285.00	11.80	56.05	67.85	83.54	-15.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

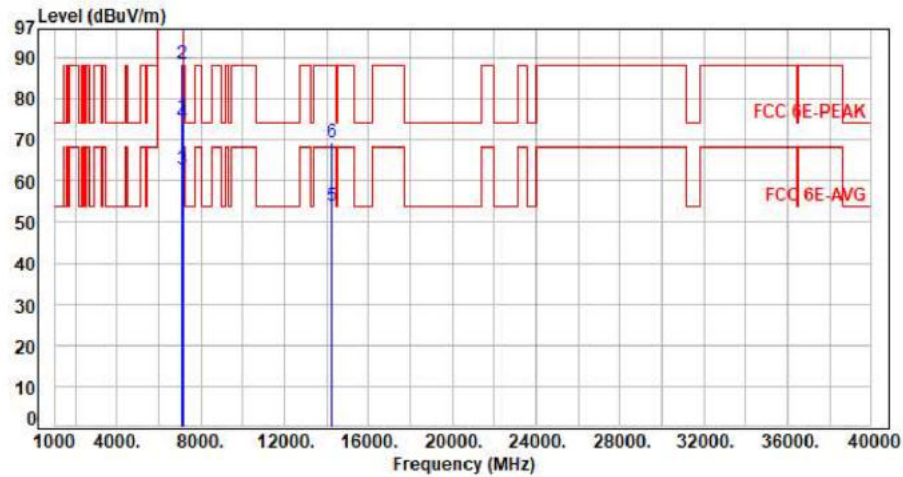


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	65.43	75.45	200.00	-124.55	Average	400	238	P
2	7115.00	10.02	78.36	88.38	200.00	-111.62	Peak	400	238	P
3	7125.00	10.05	52.66	62.71	68.20	-5.49	Average	400	238	P
4	7125.00	10.05	63.94	73.99	88.20	-14.21	Peak	400	238	P
5	14230.00	23.94	29.81	53.75	68.20	-14.45	Average	100	136	P
6	14230.00	23.94	45.22	69.16	88.20	-19.04	Peak	100	136	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

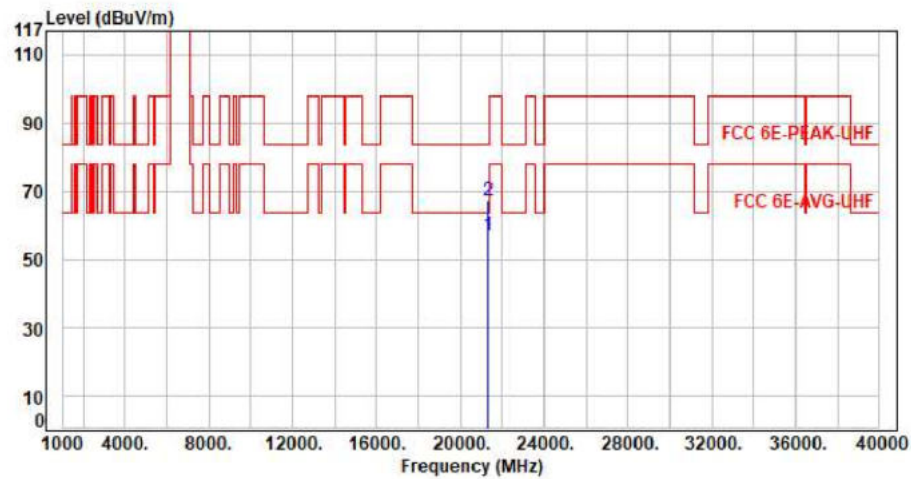


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.62	56.98	63.54	-6.56	Average	150	360	P
2	21345.00	11.36	55.74	67.10	83.54	-16.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

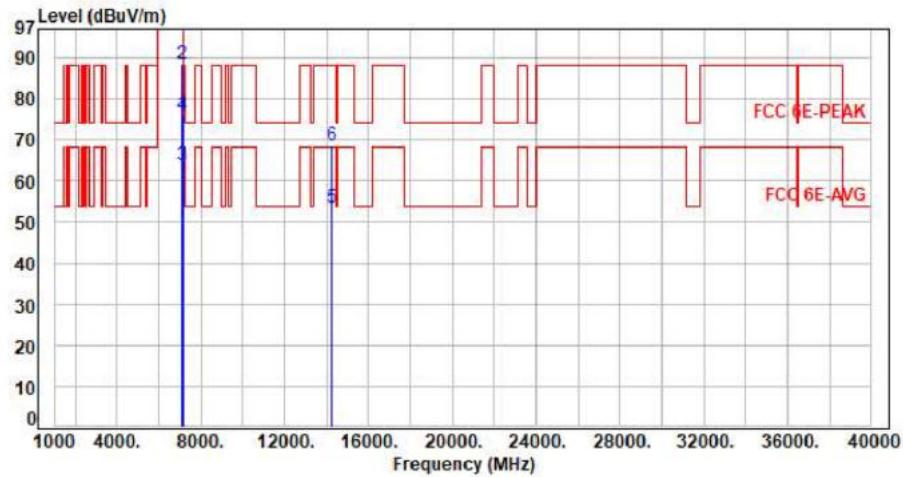


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	66.45	76.47	200.00	-123.53	Average	391	203	P
2	7115.00	10.02	78.50	88.52	200.00	-111.48	Peak	391	203	P
3	7125.00	10.05	53.63	63.68	68.20	-4.52	Average	391	203	P
4	7125.00	10.05	65.89	75.94	88.20	-12.26	Peak	391	203	P
5	14230.00	23.94	29.62	53.56	68.20	-14.64	Average	100	145	P
6	14230.00	23.94	44.72	68.66	88.20	-19.54	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

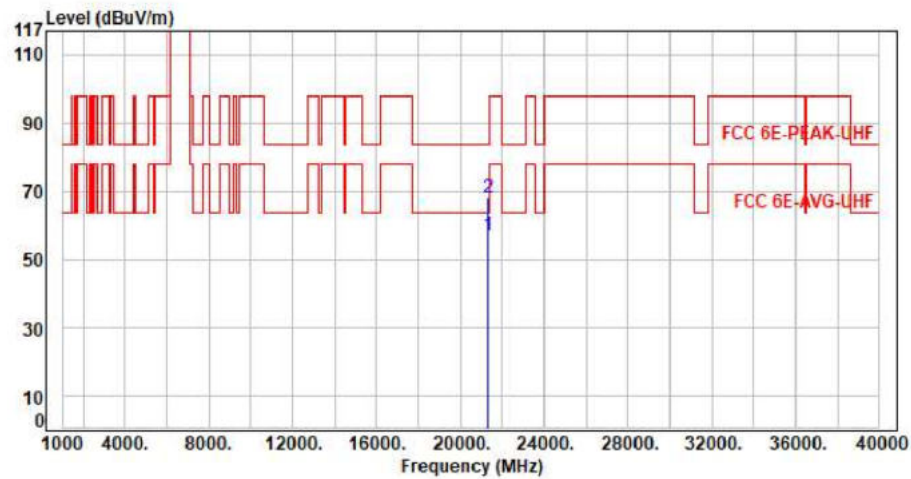

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.62	56.98	63.54	-6.56	Average	150	360	P
2	21345.00	11.36	56.73	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

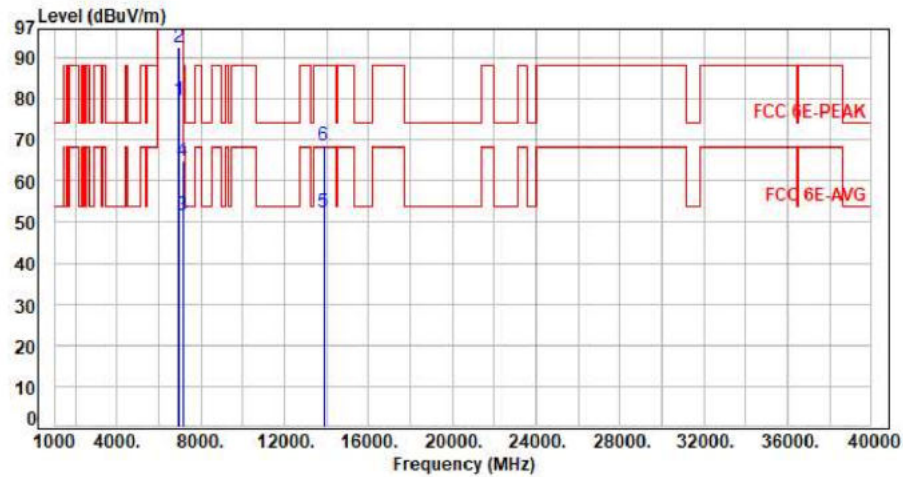


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	69.93	79.54	200.00	-120.46	Average	236	62	P
2	6925.00	9.61	82.99	92.60	200.00	-107.40	Peak	236	62	P
3	7125.00	10.05	41.64	51.69	68.20	-16.51	Average	236	62	P
4	7125.00	10.05	54.73	64.78	88.20	-23.42	Peak	236	62	P
5	13850.00	22.86	29.61	52.47	68.20	-15.73	Average	100	164	P
6	13850.00	22.86	45.87	68.73	88.20	-19.47	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

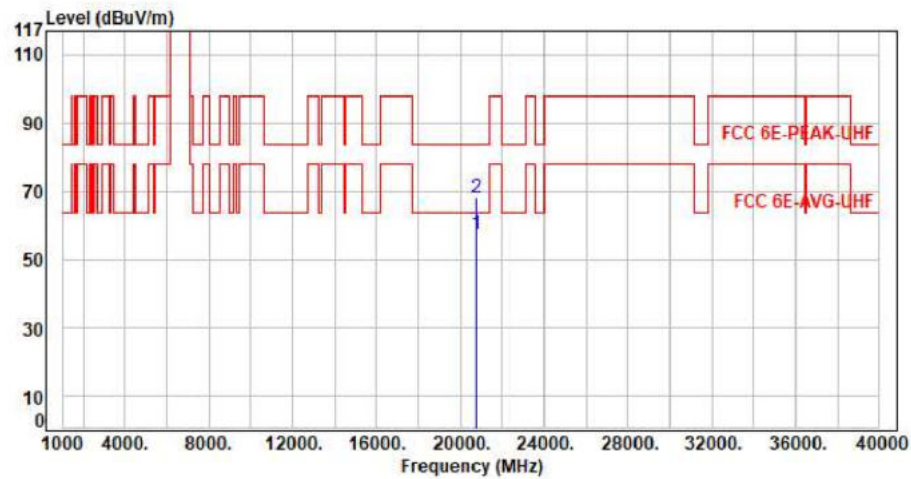


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.85	57.24	63.54	-6.30	Average	150	360	P
2	20775.00	11.39	56.71	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

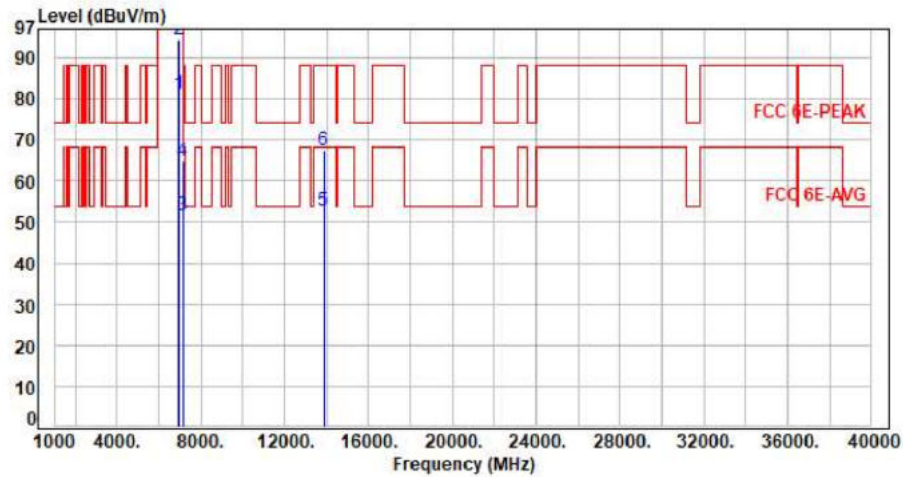


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	71.64	81.25	200.00	-118.75	Average	399	202	P
2	6925.00	9.61	84.78	94.39	200.00	-105.61	Peak	399	202	P
3	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	399	202	P
4	7125.00	10.05	54.84	64.89	88.20	-23.31	Peak	399	202	P
5	13850.00	22.86	29.85	52.71	68.20	-15.49	Average	100	225	P
6	13850.00	22.86	44.62	67.48	88.20	-20.72	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

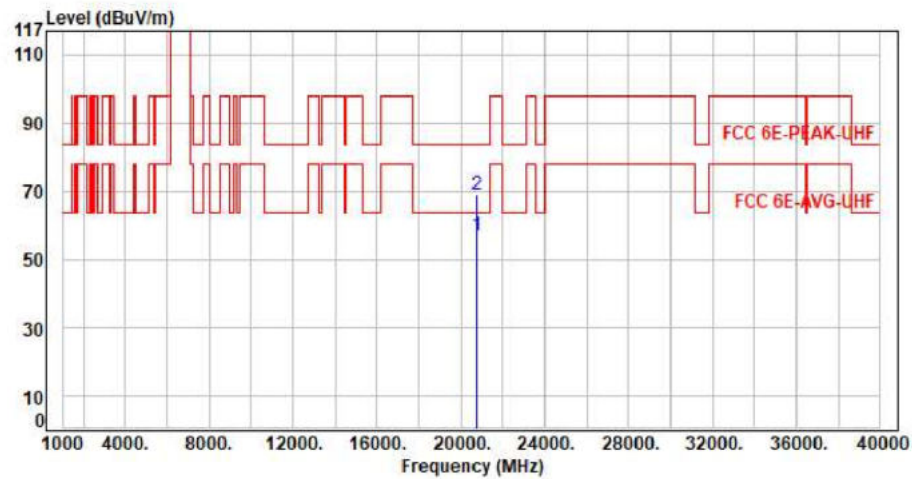


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.77	57.16	63.54	-6.38	Average	150	360	P
2	20775.00	11.39	57.61	69.00	83.54	-14.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

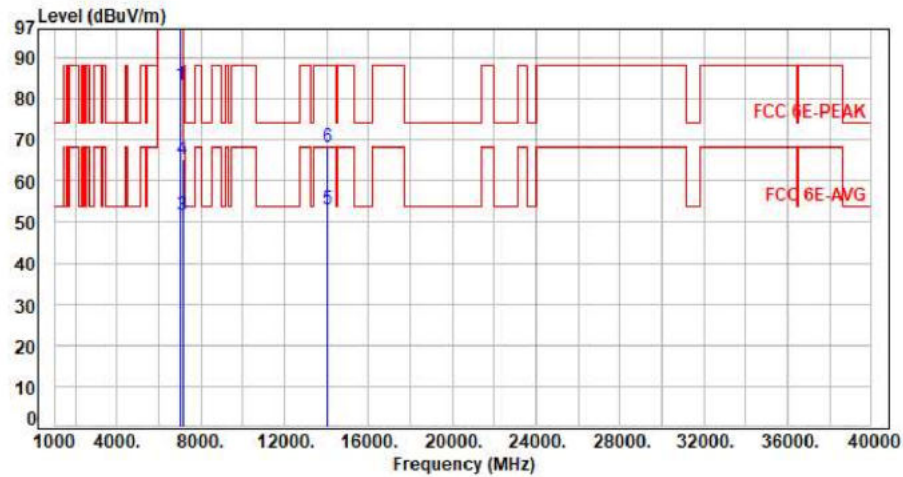


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	73.52	83.17	200.00	-116.83	Average	369	238	P
2	7005.00	9.65	87.20	96.85	200.00	-103.15	Peak	369	238	P
3	7125.00	10.05	41.51	51.56	68.20	-16.64	Average	369	238	P
4	7125.00	10.05	55.06	65.11	88.20	-23.09	Peak	369	238	P
5	14010.00	23.32	29.62	52.94	68.20	-15.26	Average	100	143	P
6	14010.00	23.32	44.79	68.11	88.20	-20.09	Peak	100	143	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

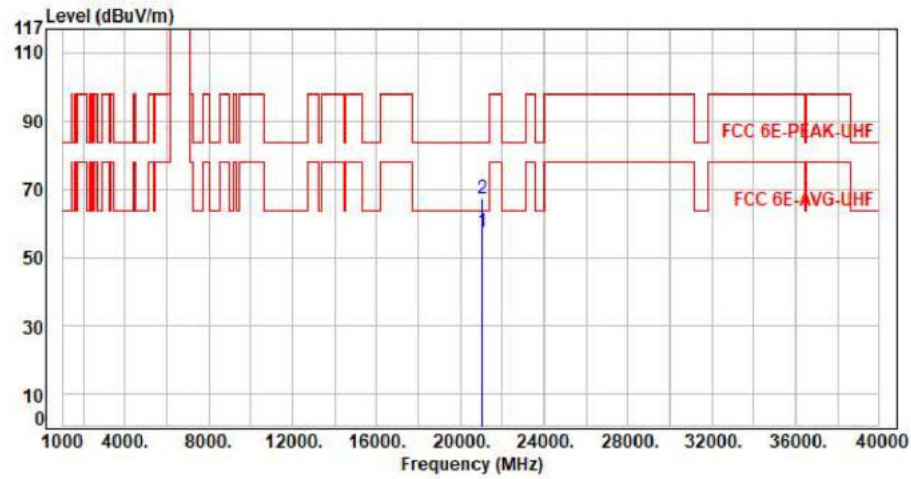


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.92	57.40	63.54	-6.14	Average	150	360	P
2	21015.00	11.48	55.90	67.38	83.54	-16.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

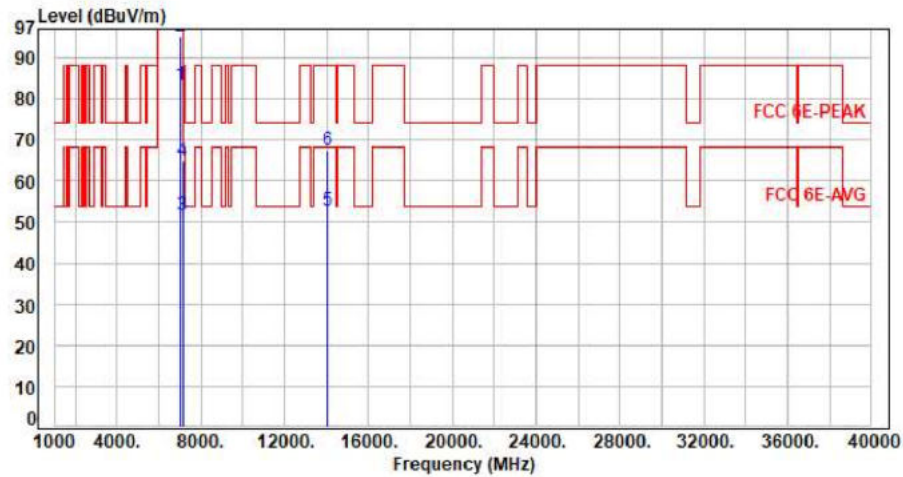


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	73.59	83.24	200.00	-116.76	Average	387	201	P
2	7005.00	9.65	85.67	95.32	200.00	-104.68	Peak	387	201	P
3	7125.00	10.05	41.61	51.66	68.20	-16.54	Average	387	201	P
4	7125.00	10.05	54.84	64.89	88.20	-23.31	Peak	387	201	P
5	14010.00	23.32	29.58	52.90	68.20	-15.30	Average	100	221	P
6	14010.00	23.32	44.29	67.61	88.20	-20.59	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

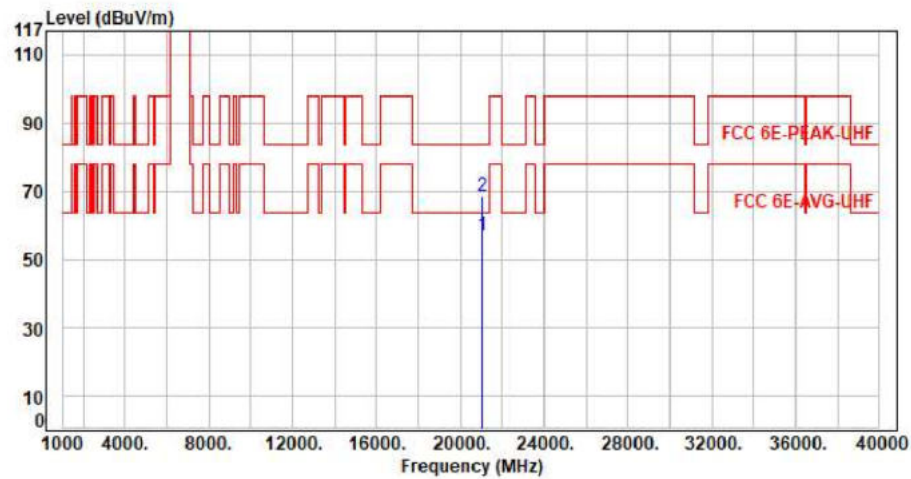


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.57	57.05	63.54	-6.49	Average	150	360	P
2	21015.00	11.48	56.91	68.39	83.54	-15.15	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

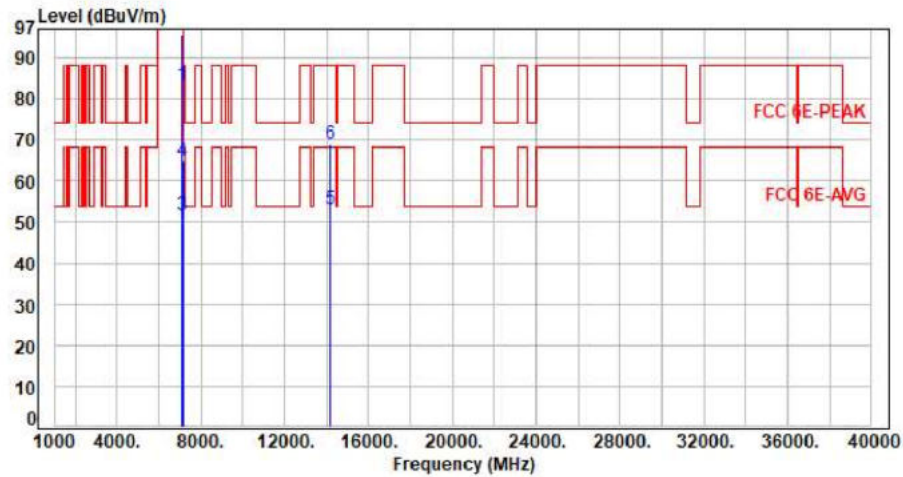


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	73.36	83.27	200.00	-116.73	Average	387	238	P
2	7085.00	9.91	85.70	95.61	200.00	-104.39	Peak	387	238	P
3	7125.00	10.05	41.54	51.59	68.20	-16.61	Average	387	238	P
4	7125.00	10.05	54.96	65.01	88.20	-23.19	Peak	387	238	P
5	14170.00	23.72	29.31	53.03	68.20	-15.17	Average	100	196	P
6	14170.00	23.72	45.26	68.98	88.20	-19.22	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

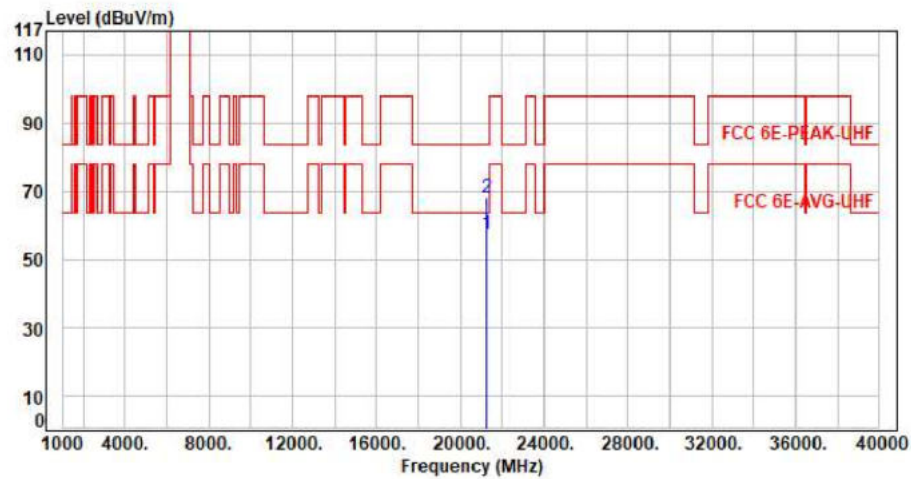


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.75	57.59	63.54	-5.95	Average	150	360	P
2	21255.00	11.84	56.09	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

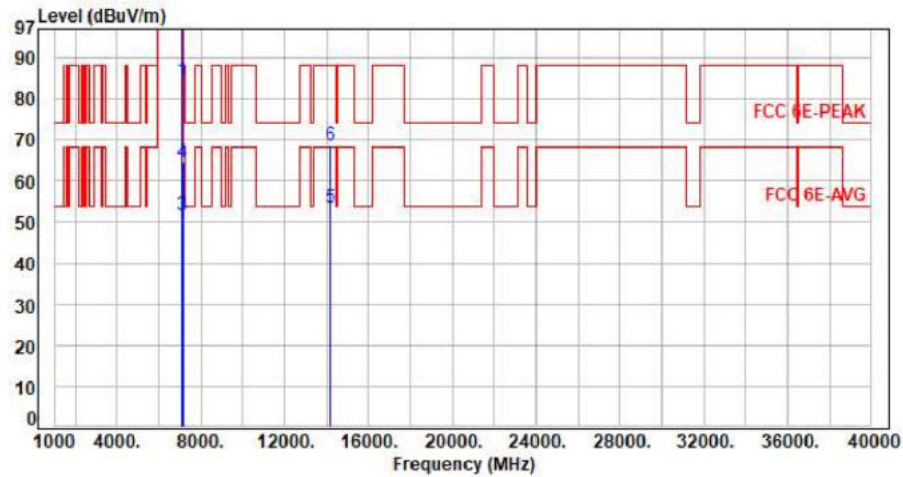


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	74.45	84.36	200.00	-115.64	Average	399	201	P
2	7085.00	9.91	87.71	97.62	200.00	-102.38	Peak	399	201	P
3	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	399	201	P
4	7125.00	10.05	54.59	64.64	88.20	-23.56	Peak	399	201	P
5	14170.00	23.72	29.63	53.35	68.20	-14.85	Average	100	176	P
6	14170.00	23.72	44.82	68.54	88.20	-19.66	Peak	100	176	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

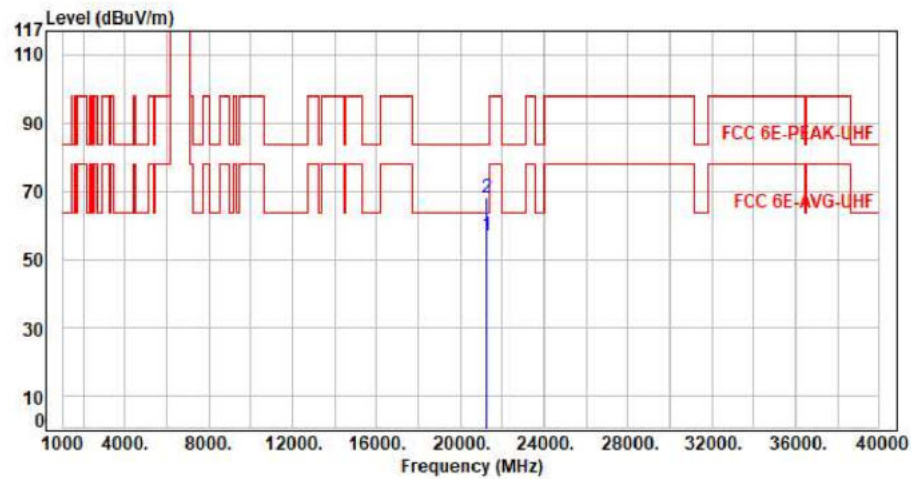


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.08	56.92	63.54	-6.62	Average	150	360	P
2	21255.00	11.84	56.01	67.85	83.54	-15.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

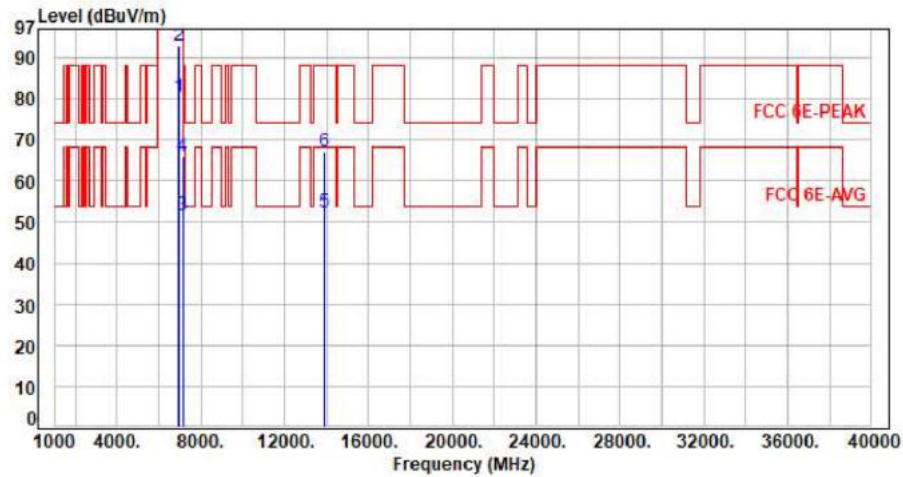


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	70.70	80.32	200.00	-119.68	Average	280	61	P
2	6945.00	9.62	83.50	93.12	200.00	-106.88	Peak	280	61	P
3	7125.00	10.05	41.67	51.72	68.20	-16.48	Average	280	61	P
4	7125.00	10.05	55.98	66.03	88.20	-22.17	Peak	280	61	P
5	13890.00	22.95	29.44	52.39	68.20	-15.81	Average	100	255	P
6	13890.00	22.95	44.09	67.04	88.20	-21.16	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

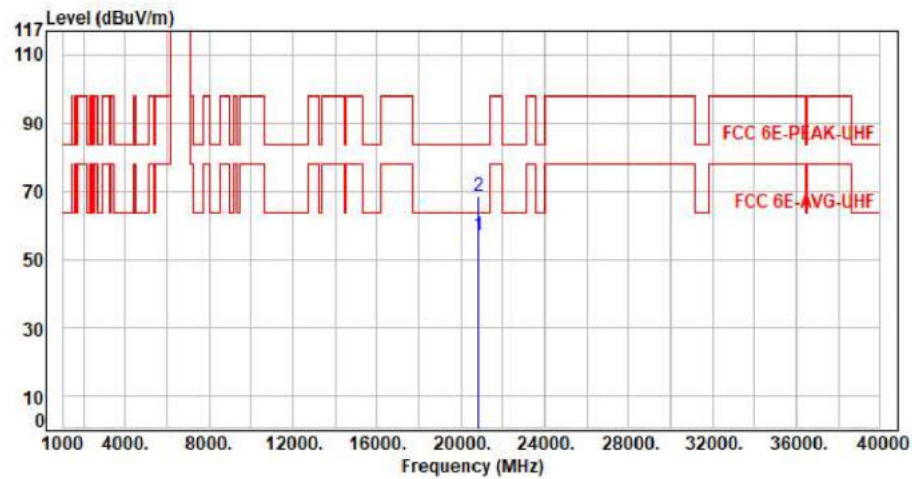


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.41	56.81	63.54	-6.73	Average	150	360	P
2	20835.00	11.40	56.95	68.35	83.54	-15.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

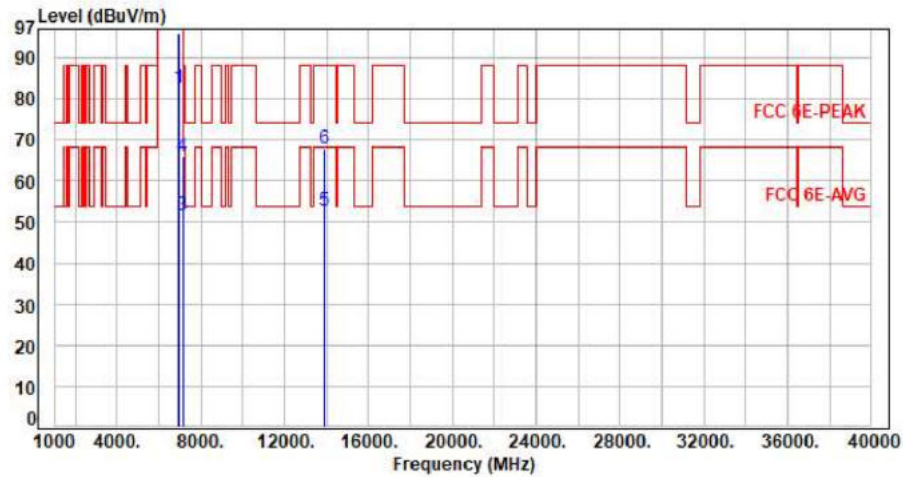


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	72.90	82.52	200.00	-117.48	Average	400	203	P
2	6945.00	9.62	86.29	95.91	200.00	-104.09	Peak	400	203	P
3	7125.00	10.05	41.56	51.61	68.20	-16.59	Average	400	203	P
4	7125.00	10.05	55.91	65.96	88.20	-22.24	Peak	400	203	P
5	13890.00	22.95	29.63	52.58	68.20	-15.62	Average	100	212	P
6	13890.00	22.95	44.79	67.74	88.20	-20.46	Peak	100	212	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

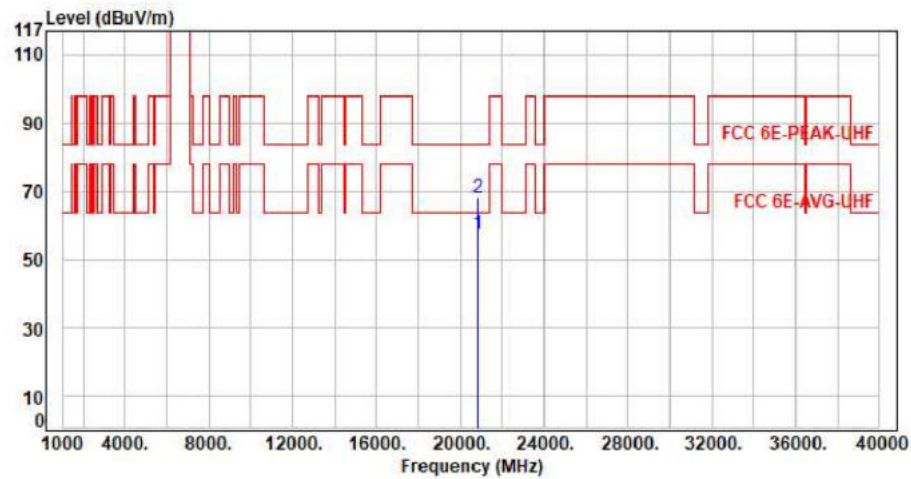


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.78	57.18	63.54	-6.36	Average	150	360	P
2	20835.00	11.40	56.64	68.04	83.54	-15.50	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

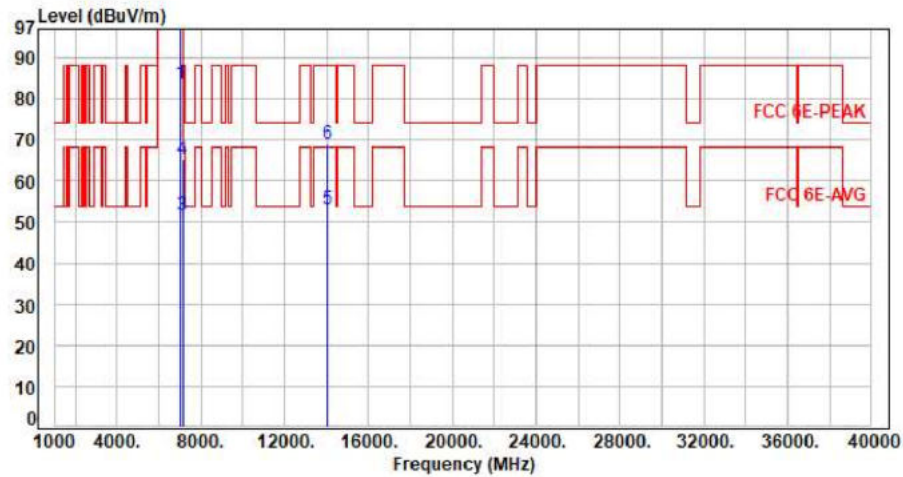


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	74.09	83.80	200.00	-116.20	Average	384	237	P
2	7025.00	9.71	87.14	96.85	200.00	-103.15	Peak	384	237	P
3	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	384	237	P
4	7125.00	10.05	55.09	65.14	88.20	-23.06	Peak	384	237	P
5	14050.00	23.47	29.66	53.13	68.20	-15.07	Average	100	138	P
6	14050.00	23.47	45.61	69.08	88.20	-19.12	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

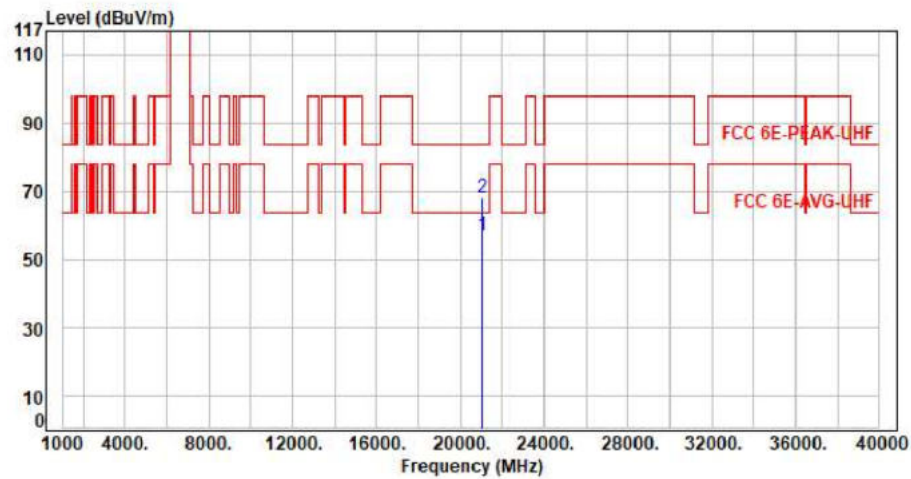


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.56	57.08	63.54	-6.46	Average	150	360	P
2	21075.00	11.52	56.41	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

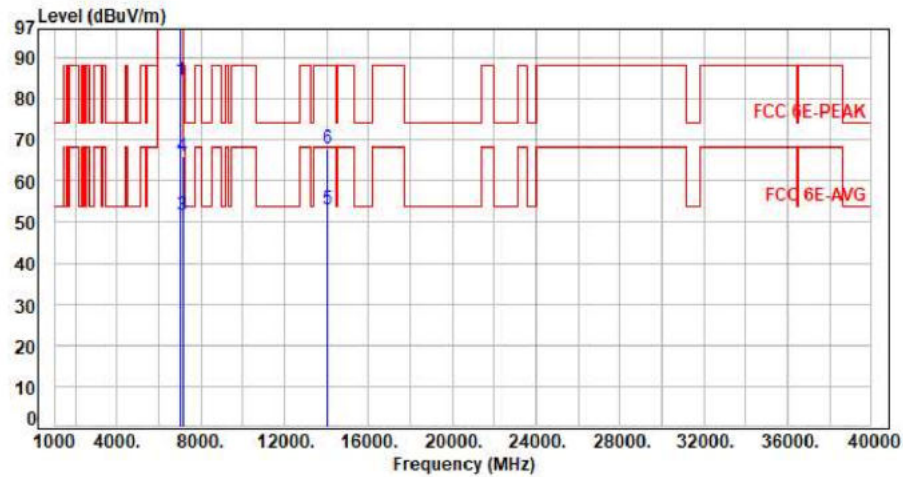


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	74.61	84.32	200.00	-115.68	Average	375	200	P
2	7025.00	9.71	87.27	96.98	200.00	-103.02	Peak	375	200	P
3	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	375	200	P
4	7125.00	10.05	55.91	65.96	88.20	-22.24	Peak	375	200	P
5	14050.00	23.47	29.61	53.08	68.20	-15.12	Average	100	142	P
6	14050.00	23.47	44.58	68.05	88.20	-20.15	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

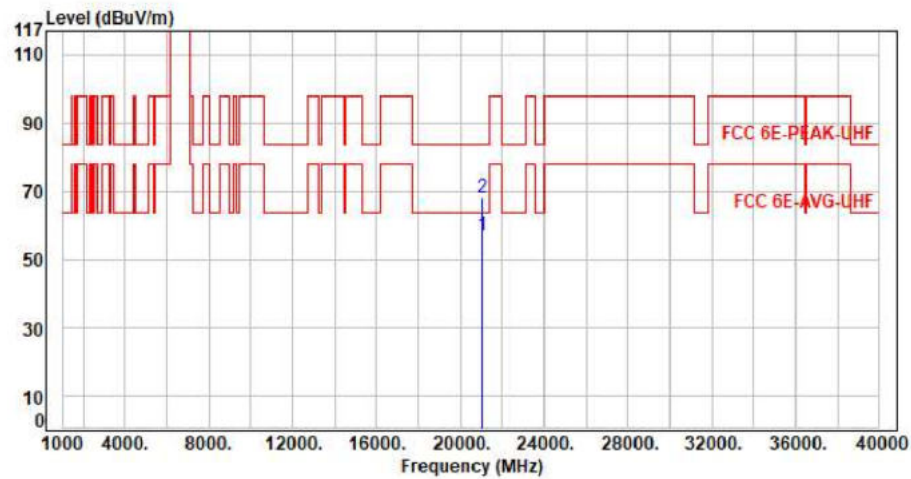


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.29	56.81	63.54	-6.73	Average	150	360	P
2	21075.00	11.52	56.48	68.00	83.54	-15.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

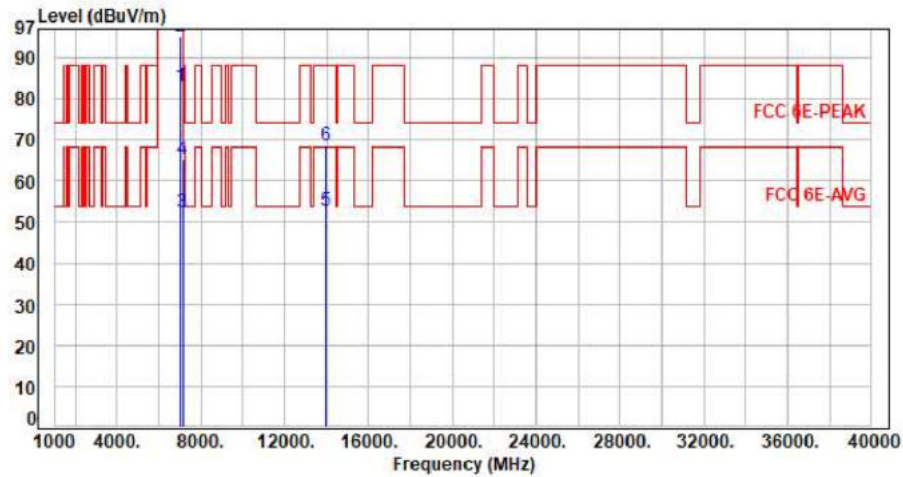


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	73.35	82.98	200.00	-117.02	Average	400	238	P
2	6985.00	9.63	85.47	95.10	200.00	-104.90	Peak	400	238	P
3	7125.00	10.05	42.18	52.23	68.20	-15.97	Average	400	238	P
4	7125.00	10.05	55.07	65.12	88.20	-23.08	Peak	400	238	P
5	13970.00	23.15	29.55	52.70	68.20	-15.50	Average	100	344	P
6	13970.00	23.15	45.56	68.71	88.20	-19.49	Peak	100	344	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

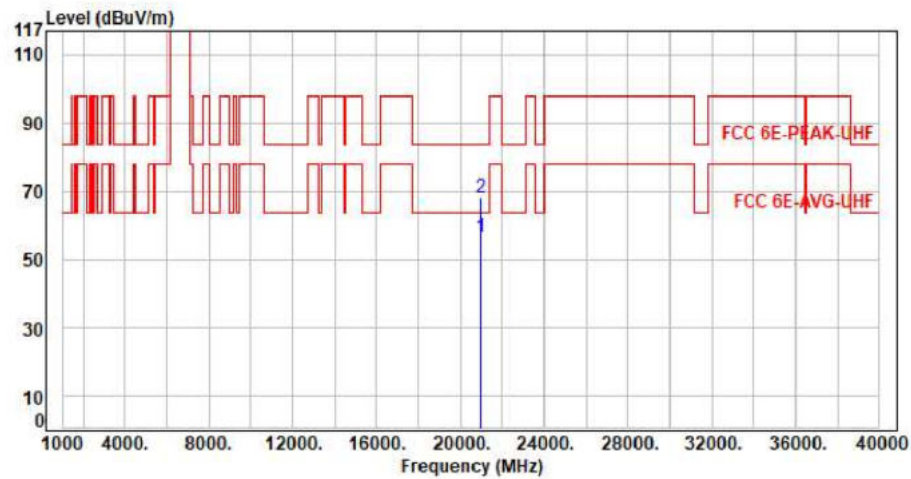


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.01	56.49	63.54	-7.05	Average	150	360	P
2	20955.00	11.48	56.43	67.91	83.54	-15.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

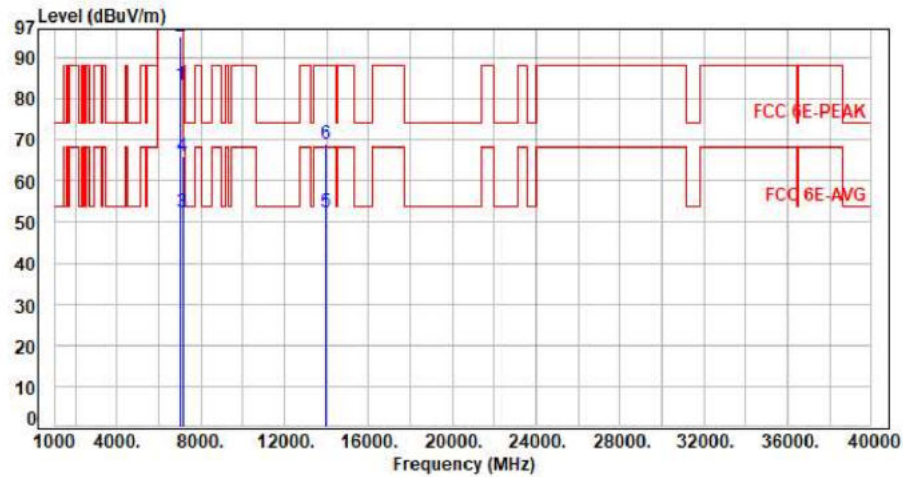


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	73.76	83.39	200.00	-116.61	Average	376	201	P
2	6985.00	9.63	85.36	94.99	200.00	-105.01	Peak	376	201	P
3	7125.00	10.05	42.37	52.42	68.20	-15.78	Average	376	201	P
4	7125.00	10.05	55.90	65.95	88.20	-22.25	Peak	376	201	P
5	13970.00	23.15	29.38	52.53	68.20	-15.67	Average	100	116	P
6	13970.00	23.15	45.83	68.98	88.20	-19.22	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

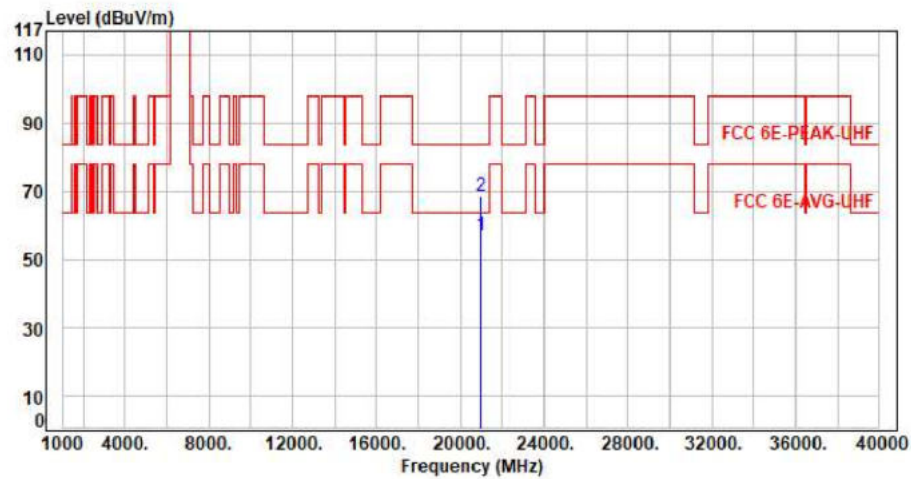


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.47	56.95	63.54	-6.59	Average	150	360	P
2	20955.00	11.48	56.85	68.33	83.54	-15.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

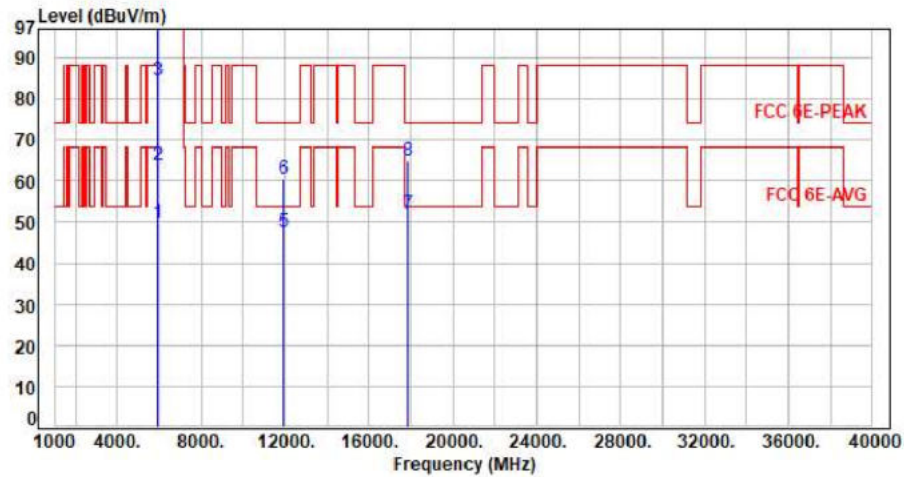

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.29	49.95	68.20	-18.25	Average	372	321	P
2	5925.00	7.66	56.15	63.81	88.20	-24.39	Peak	372	321	P
3	5955.00	7.68	76.65	84.33	200.00	-115.67	Average	372	321	P
4	5955.00	7.68	89.29	96.97	200.00	-103.03	Peak	372	321	P
5	11910.00	18.06	29.53	47.59	54.00	-6.41	Average	100	124	P
6	11910.00	18.06	42.56	60.62	74.00	-13.38	Peak	100	124	P
7	17865.00	27.77	24.37	52.14	54.00	-1.86	Average	100	194	P
8	17865.00	27.77	37.06	64.83	74.00	-9.17	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

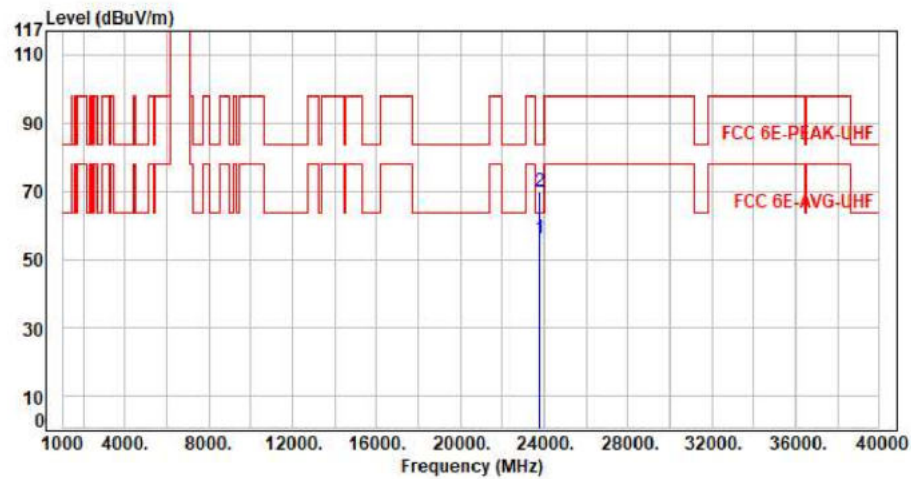


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.87	56.06	63.54	-7.48	Average	150	360	P
2	23820.00	11.19	58.76	69.95	83.54	-13.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

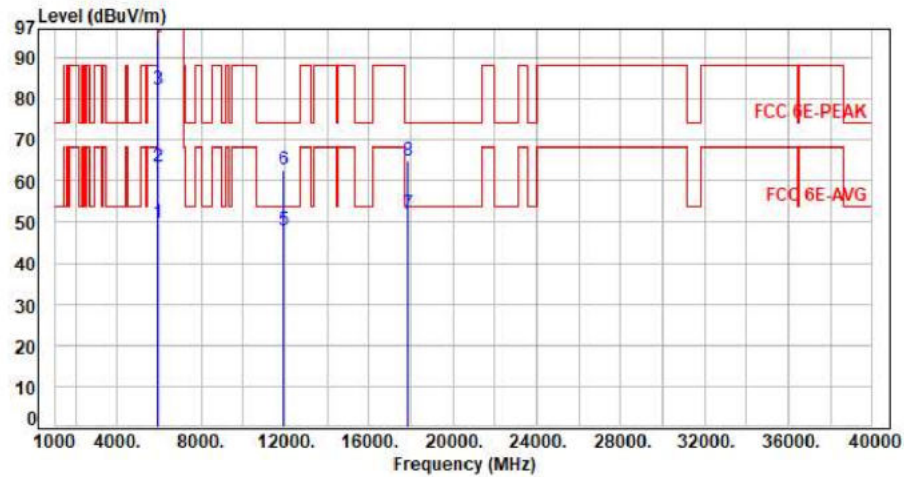


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.21	49.87	68.20	-18.33	Average	392	72	P
2	5925.00	7.66	55.77	63.43	88.20	-24.77	Peak	392	72	P
3	5955.00	7.68	74.59	82.27	200.00	-117.73	Average	392	72	P
4	5955.00	7.68	86.99	94.67	200.00	-105.33	Peak	392	72	P
5	11910.00	18.06	29.81	47.87	54.00	-6.13	Average	100	232	P
6	11910.00	18.06	44.61	62.67	74.00	-11.33	Peak	100	232	P
7	17865.00	27.77	24.26	52.03	54.00	-1.97	Average	100	247	P
8	17865.00	27.77	37.17	64.94	74.00	-9.06	Peak	100	247	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

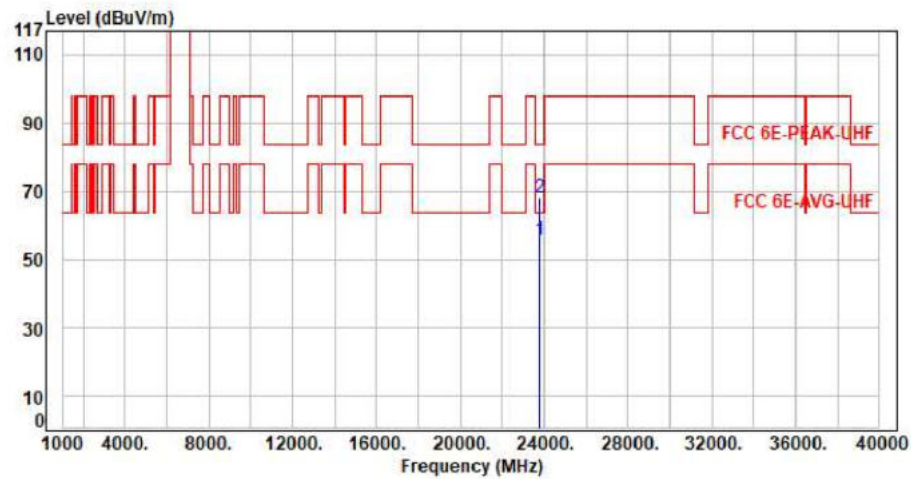


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.48	55.67	63.54	-7.87	Average	150	360	P
2	23820.00	11.19	56.74	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

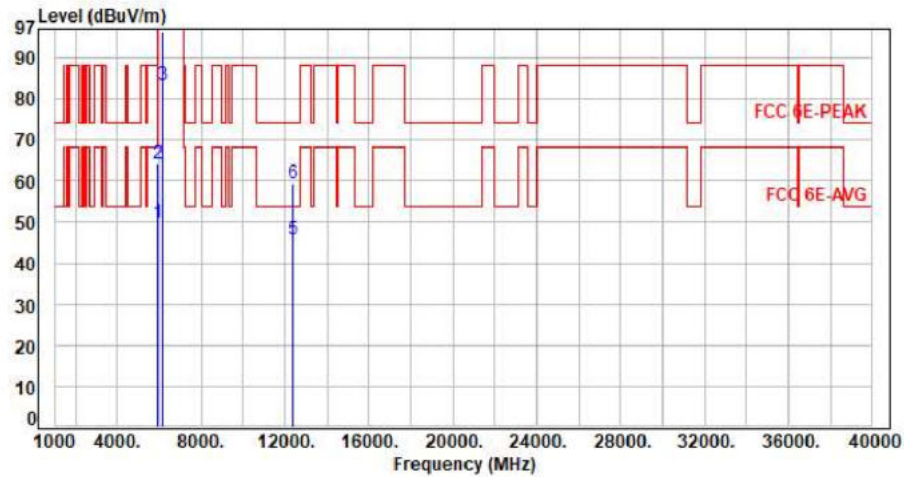


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	328	319	P
2	5925.00	7.66	56.48	64.14	88.20	-24.06	Peak	328	319	P
3	6175.00	8.35	74.82	83.17	200.00	-116.83	Average	328	319	P
4	6175.00	8.35	87.93	96.28	200.00	-103.72	Peak	328	319	P
5	12350.00	17.76	28.09	45.85	54.00	-8.15	Average	100	127	P
6	12350.00	17.76	41.52	59.28	74.00	-14.72	Peak	100	127	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

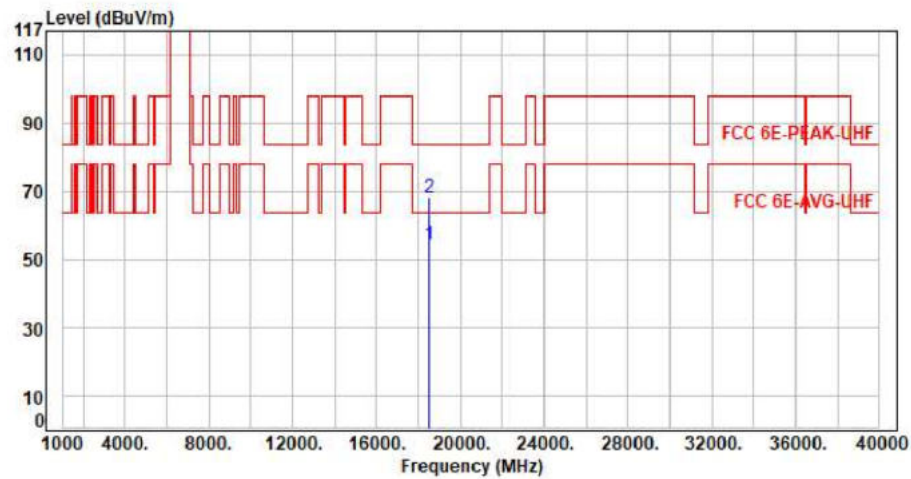


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	43.87	54.42	63.54	-9.12	Average	150	360	P
2	18525.00	10.55	57.44	67.99	83.54	-15.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

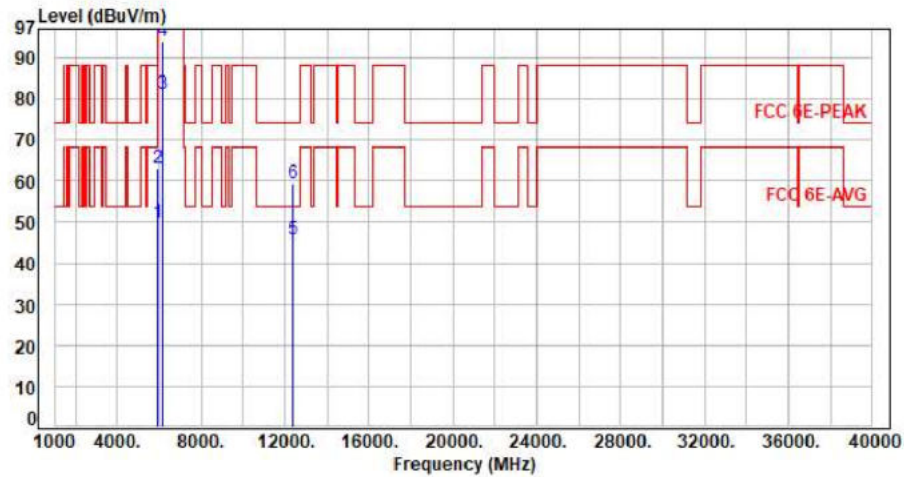


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.14	49.80	68.20	-18.40	Average	328	75	P
2	5925.00	7.66	55.48	63.14	88.20	-25.06	Peak	328	75	P
3	6175.00	8.35	72.63	80.98	200.00	-119.02	Average	328	75	P
4	6175.00	8.35	85.55	93.90	200.00	-106.10	Peak	328	75	P
5	12350.00	17.76	27.95	45.71	54.00	-8.29	Average	100	234	P
6	12350.00	17.76	41.49	59.25	74.00	-14.75	Peak	100	234	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

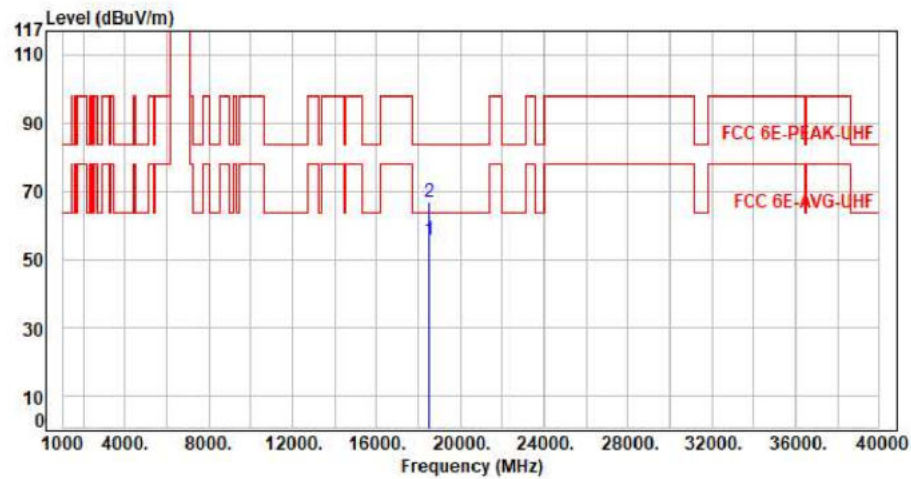


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	45.01	55.56	63.54	-7.98	Average	150	360	P
2	18525.00	10.55	56.01	66.56	83.54	-16.98	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

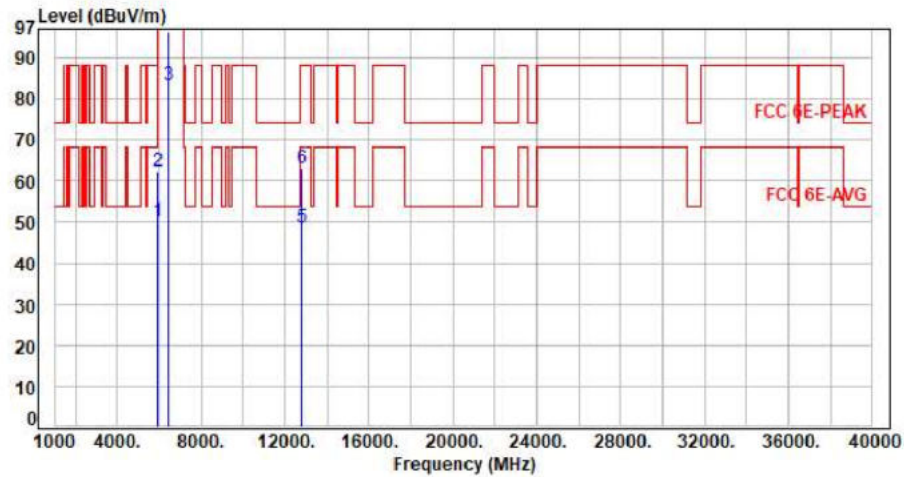


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.41	50.07	68.20	-18.13	Average	321	323	P
2	5925.00	7.66	54.67	62.33	88.20	-25.87	Peak	321	323	P
3	6415.00	8.34	74.95	83.29	200.00	-116.71	Average	321	323	P
4	6415.00	8.34	88.04	96.38	200.00	-103.62	Peak	321	323	P
5	12830.00	18.92	29.87	48.79	68.20	-19.41	Average	100	221	P
6	12830.00	18.92	44.21	63.13	88.20	-25.07	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

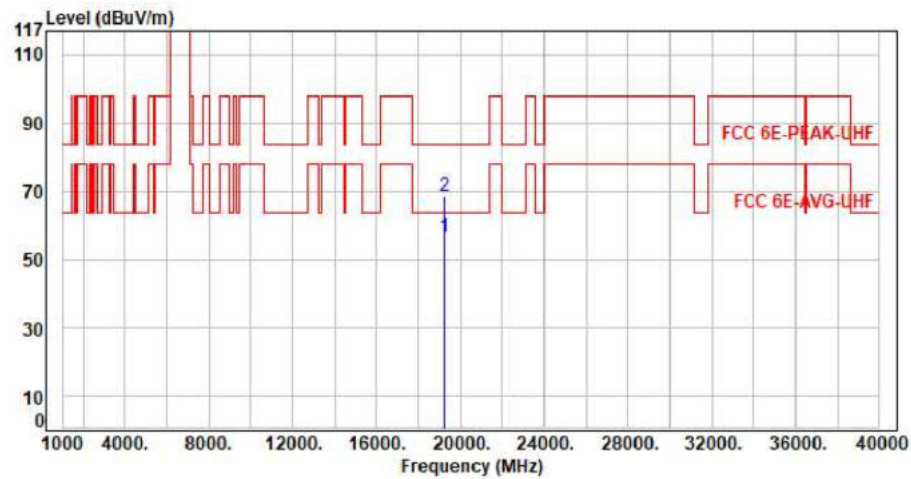


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.07	56.44	63.54	-7.10	Average	150	360	P
2	19245.00	11.37	57.24	68.61	83.54	-14.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

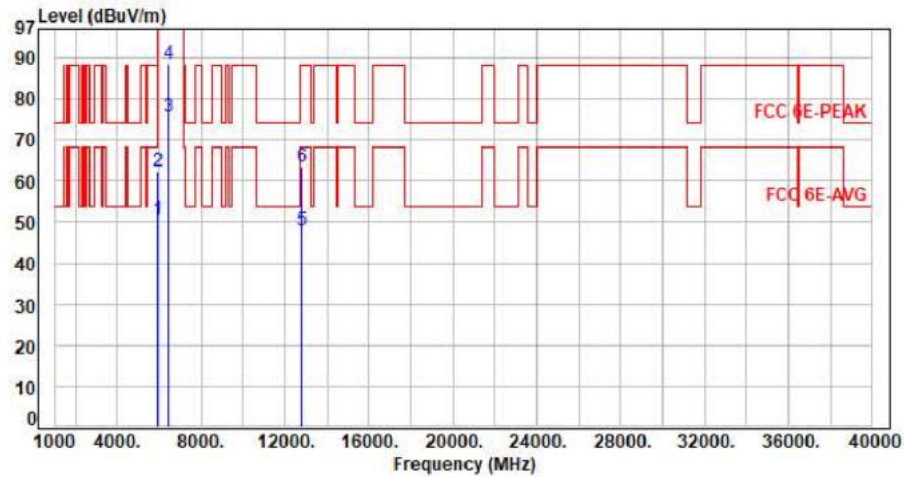


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.76	50.42	68.20	-17.78	Average	100	67	P
2	5925.00	7.66	54.67	62.33	88.20	-25.87	Peak	100	67	P
3	6415.00	8.34	67.32	75.66	200.00	-124.34	Average	100	67	P
4	6415.00	8.34	80.03	88.37	200.00	-111.63	Peak	100	67	P
5	12830.00	18.92	29.11	48.03	68.20	-20.17	Average	100	225	P
6	12830.00	18.92	44.69	63.61	88.20	-24.59	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

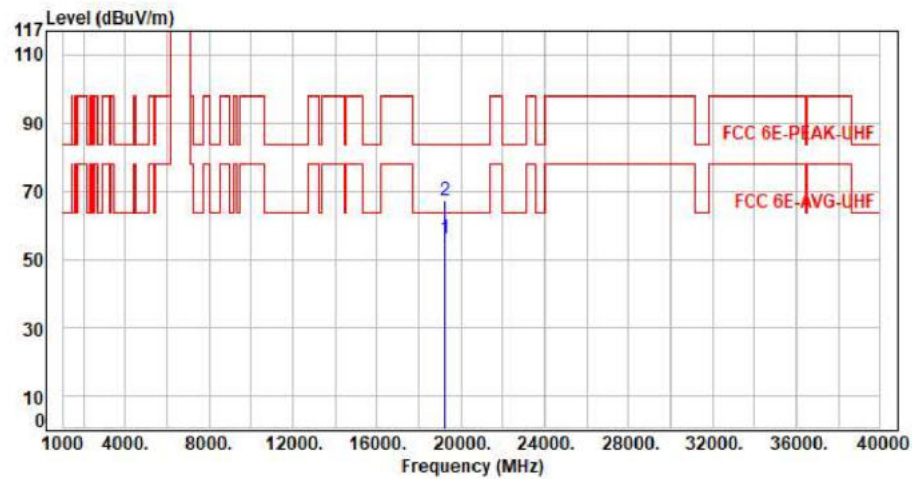


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	44.52	55.89	63.54	-7.65	Average	150	360	P
2	19245.00	11.37	55.87	67.24	83.54	-16.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

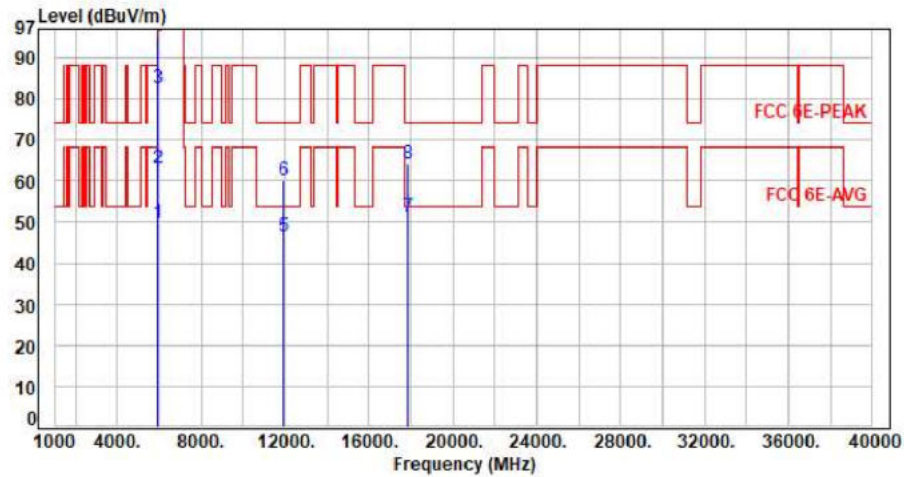

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	394	322	P
2	5925.00	7.66	55.48	63.14	88.20	-25.06	Peak	394	322	P
3	5965.00	7.71	74.83	82.54	200.00	-117.46	Average	394	322	P
4	5965.00	7.71	87.36	95.07	200.00	-104.93	Peak	394	322	P
5	11930.00	18.05	28.26	46.31	54.00	-7.69	Average	100	125	P
6	11930.00	18.05	42.00	60.05	74.00	-13.95	Peak	100	125	P
7	17895.00	27.89	23.32	51.21	54.00	-2.79	Average	100	198	P
8	17895.00	27.89	36.43	64.32	74.00	-9.68	Peak	100	198	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

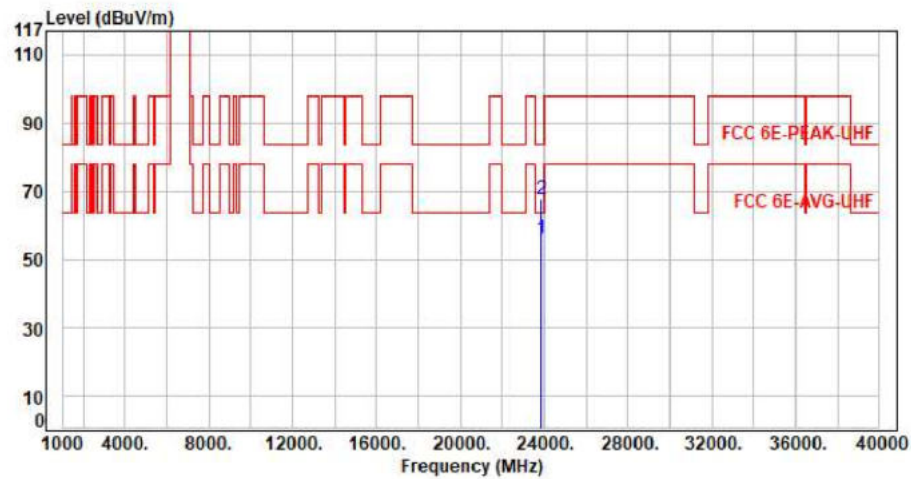


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.76	55.96	63.54	-7.58	Average	150	360	P
2	23860.00	11.20	56.45	67.65	83.54	-15.89	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

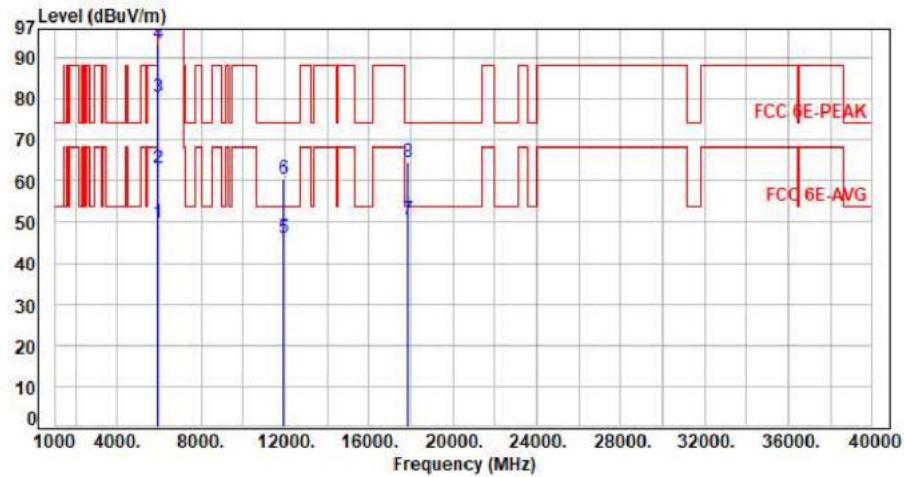

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.03	49.69	68.20	-18.51	Average	319	84	P
2	5925.00	7.66	55.42	63.08	88.20	-25.12	Peak	319	84	P
3	5965.00	7.71	72.68	80.39	200.00	-119.61	Average	319	84	P
4	5965.00	7.71	85.74	93.45	200.00	-106.55	Peak	319	84	P
5	11930.00	18.05	28.13	46.18	54.00	-7.82	Average	100	228	P
6	11930.00	18.05	42.47	60.52	74.00	-13.48	Peak	100	228	P
7	17895.00	27.89	22.78	50.67	54.00	-3.33	Average	100	244	P
8	17895.00	27.89	36.47	64.36	74.00	-9.64	Peak	100	244	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

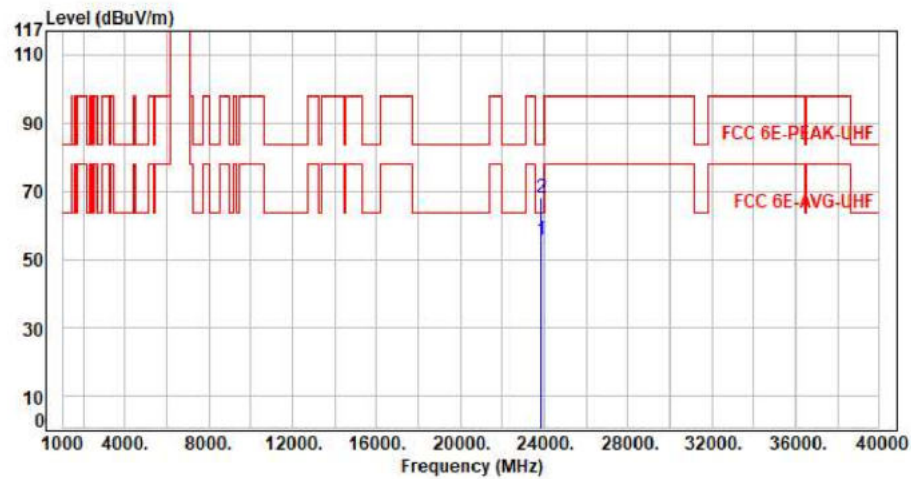

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.29	55.49	63.54	-8.05	Average	150	360	P
2	23860.00	11.20	56.64	67.84	83.54	-15.70	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor