




For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

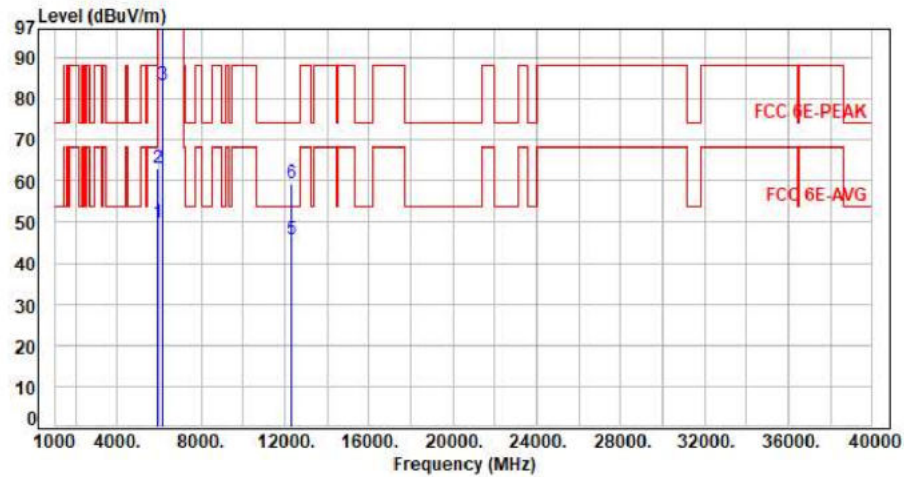


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.21	49.87	68.20	-18.33	Average	311	308	P
2	5925.00	7.66	55.42	63.08	88.20	-25.12	Peak	311	308	P
3	6165.00	8.34	75.18	83.52	200.00	-116.48	Average	311	308	P
4	6165.00	8.34	88.84	97.18	200.00	-102.82	Peak	311	308	P
5	12330.00	17.71	27.96	45.67	54.00	-8.33	Average	100	121	P
6	12330.00	17.71	41.75	59.46	74.00	-14.54	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

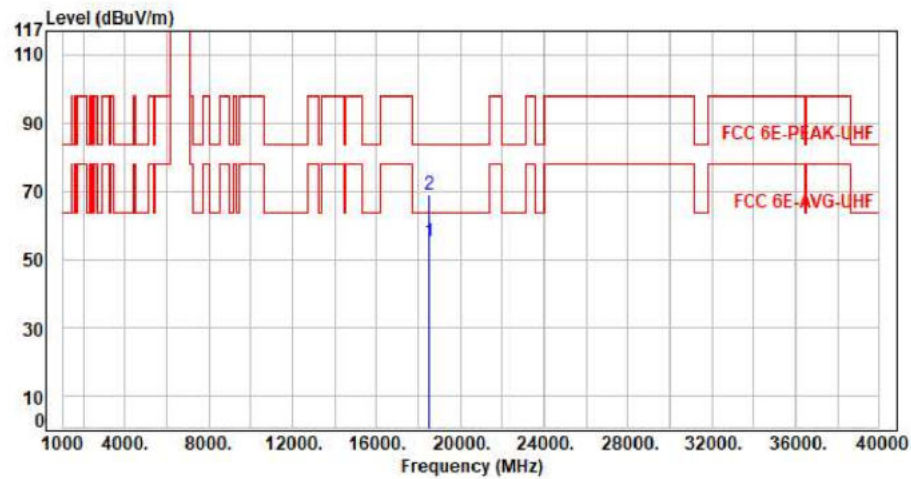


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	44.76	55.17	63.54	-8.37	Average	150	360	P
2	18495.00	10.41	58.54	68.95	83.54	-14.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

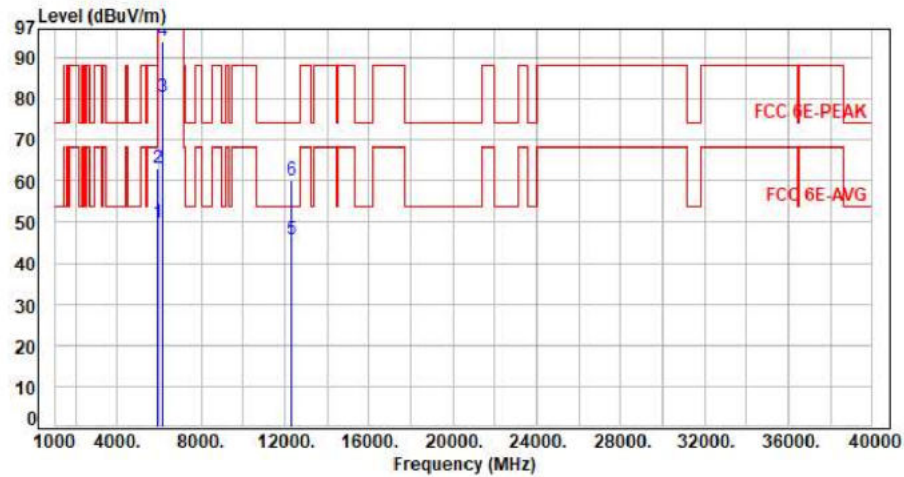


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.29	49.95	68.20	-18.25	Average	394	78	P
2	5925.00	7.66	55.58	63.24	88.20	-24.96	Peak	394	78	P
3	6165.00	8.34	72.13	80.47	200.00	-119.53	Average	394	78	P
4	6165.00	8.34	85.74	94.08	200.00	-105.92	Peak	394	78	P
5	12330.00	17.71	27.86	45.57	54.00	-8.43	Average	100	239	P
6	12330.00	17.71	42.39	60.10	74.00	-13.90	Peak	100	239	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

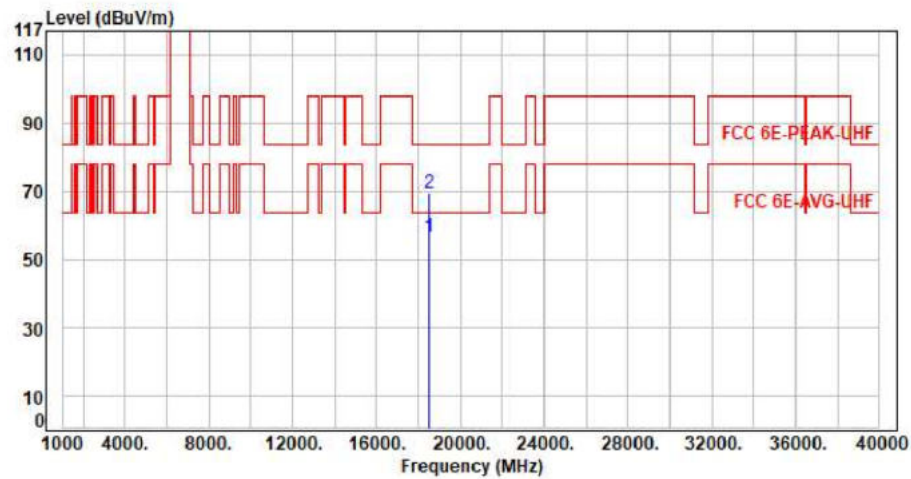


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.21	56.62	63.54	-6.92	Average	150	360	P
2	18495.00	10.41	58.84	69.25	83.54	-14.29	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

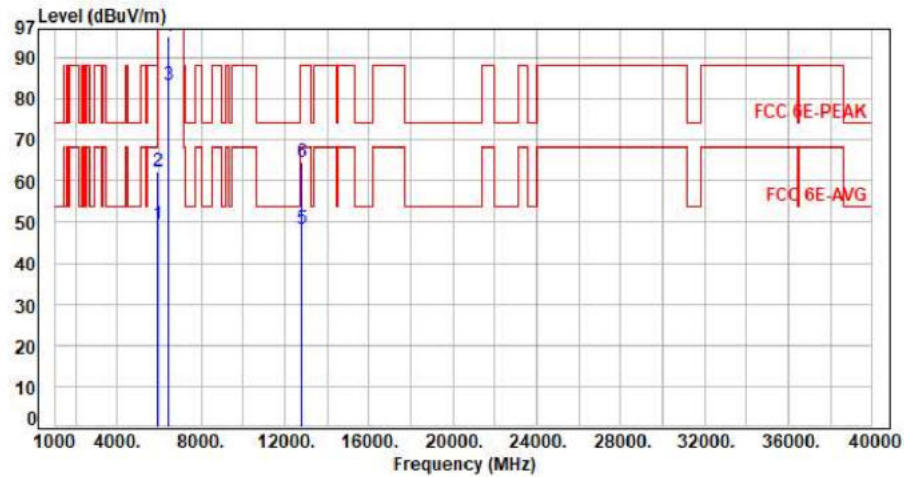


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.78	49.44	68.20	-18.76	Average	289	322	P
2	5925.00	7.66	54.78	62.44	88.20	-25.76	Peak	289	322	P
3	6405.00	8.35	75.04	83.39	200.00	-116.61	Average	289	322	P
4	6405.00	8.35	86.78	95.13	200.00	-104.87	Peak	289	322	P
5	12810.00	18.88	29.44	48.32	68.20	-19.88	Average	100	138	P
6	12810.00	18.88	45.63	64.51	88.20	-23.69	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

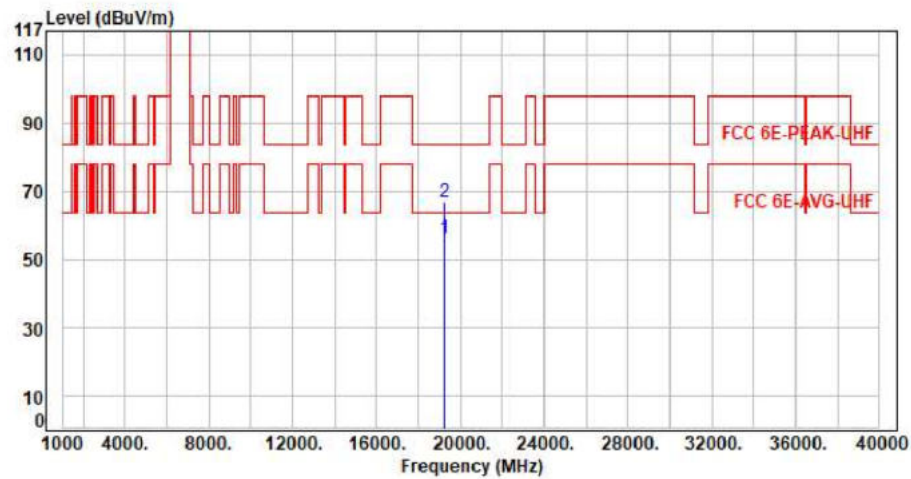


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.69	55.93	63.54	-7.61	Average	150	360	P
2	19215.00	11.24	55.43	66.67	83.54	-16.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

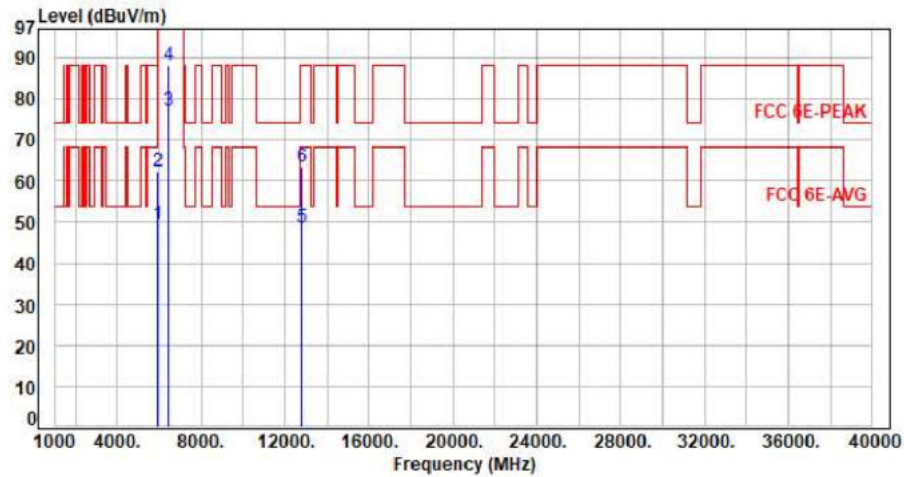


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.91	49.57	68.20	-18.63	Average	396	89	P
2	5925.00	7.66	54.65	62.31	88.20	-25.89	Peak	396	89	P
3	6405.00	8.35	68.67	77.02	200.00	-122.98	Average	396	89	P
4	6405.00	8.35	79.89	88.24	200.00	-111.76	Peak	396	89	P
5	12810.00	18.88	29.87	48.75	68.20	-19.45	Average	100	334	P
6	12810.00	18.88	44.62	63.50	88.20	-24.70	Peak	100	334	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

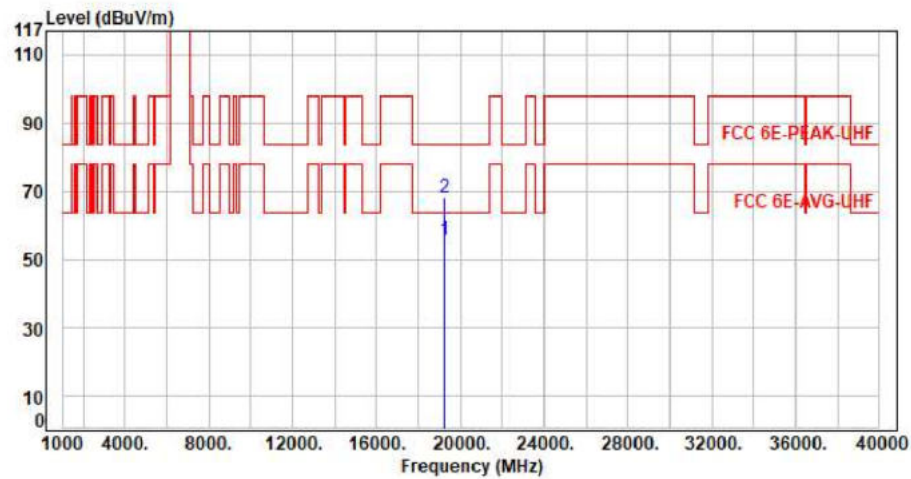


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.25	55.49	63.54	-8.05	Average	150	360	P
2	19215.00	11.24	56.65	67.89	83.54	-15.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

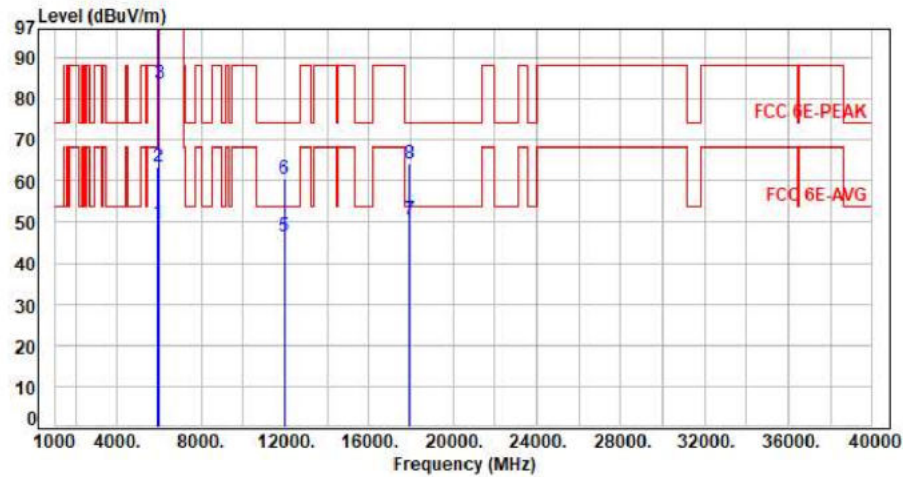


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.25	49.91	68.20	-18.29	Average	369	328	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	369	328	P
3	5985.00	7.75	75.97	83.72	200.00	-116.28	Average	369	328	P
4	5985.00	7.75	89.11	96.86	200.00	-103.14	Peak	369	328	P
5	11970.00	18.02	28.36	46.38	54.00	-7.62	Average	100	125	P
6	11970.00	18.02	42.30	60.32	74.00	-13.68	Peak	100	125	P
7	17955.00	28.04	22.55	50.59	54.00	-3.41	Average	100	196	P
8	17955.00	28.04	36.23	64.27	74.00	-9.73	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

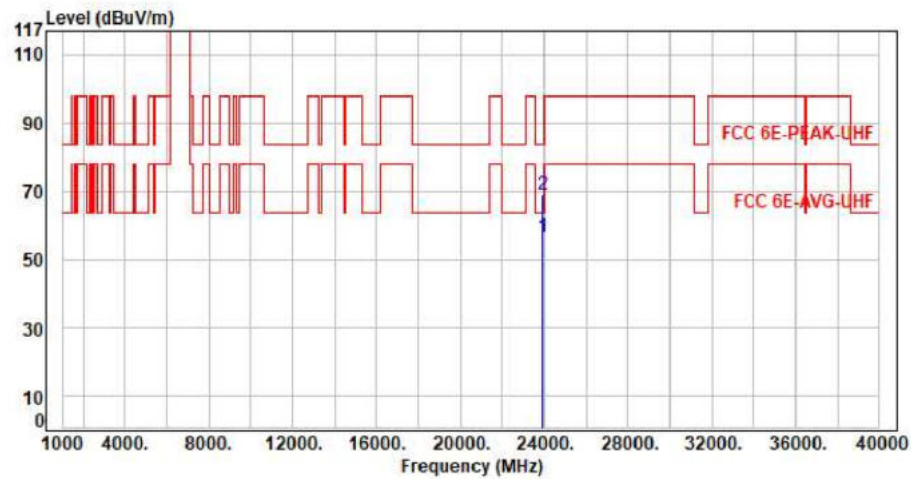


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.18	56.54	63.54	-7.00	Average	150	360	P
2	23940.00	11.36	57.44	68.80	83.54	-14.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

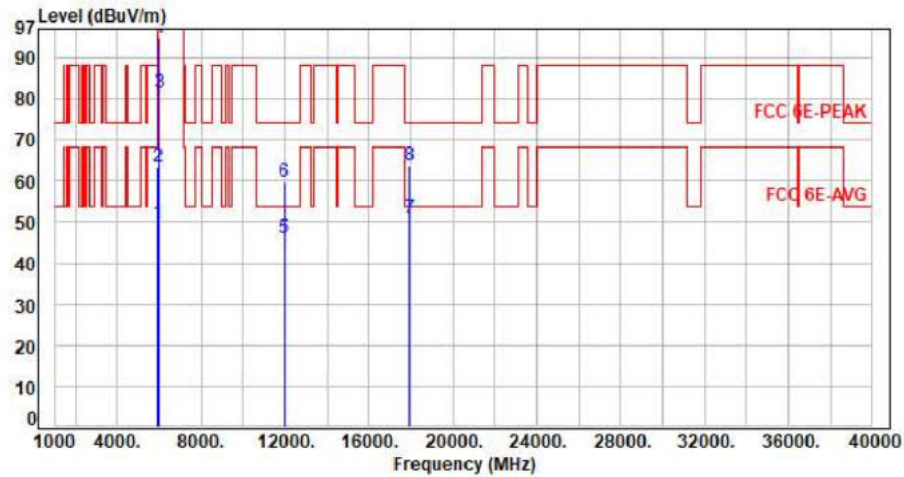

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.20	49.86	68.20	-18.34	Average	389	75	P
2	5925.00	7.66	55.62	63.28	88.20	-24.92	Peak	389	75	P
3	5985.00	7.75	73.59	81.34	200.00	-118.66	Average	389	75	P
4	5985.00	7.75	86.97	94.72	200.00	-105.28	Peak	389	75	P
5	11970.00	18.02	28.09	46.11	54.00	-7.89	Average	100	230	P
6	11970.00	18.02	41.87	59.89	74.00	-14.11	Peak	100	230	P
7	17955.00	28.04	22.79	50.83	54.00	-3.17	Average	100	244	P
8	17955.00	28.04	35.86	63.90	74.00	-10.10	Peak	100	244	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

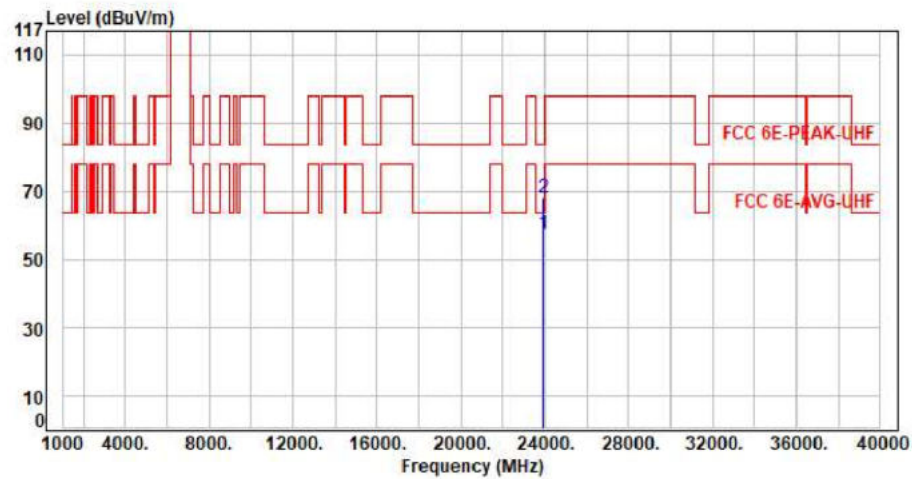


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.93	57.29	63.54	-6.25	Average	150	360	P
2	23940.00	11.36	56.73	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

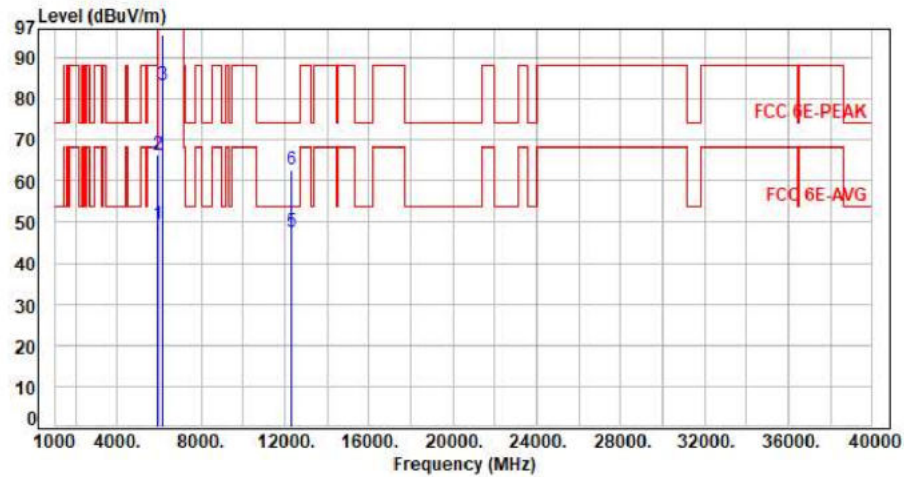


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.93	49.59	68.20	-18.61	Average	285	314	P
2	5925.00	7.66	58.86	66.52	88.20	-21.68	Peak	285	314	P
3	6145.00	8.31	74.97	83.28	200.00	-116.72	Average	285	314	P
4	6145.00	8.31	87.34	95.65	200.00	-104.35	Peak	285	314	P
5	12290.00	17.62	29.79	47.41	54.00	-6.59	Average	100	142	P
6	12290.00	17.62	44.92	62.54	74.00	-11.46	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

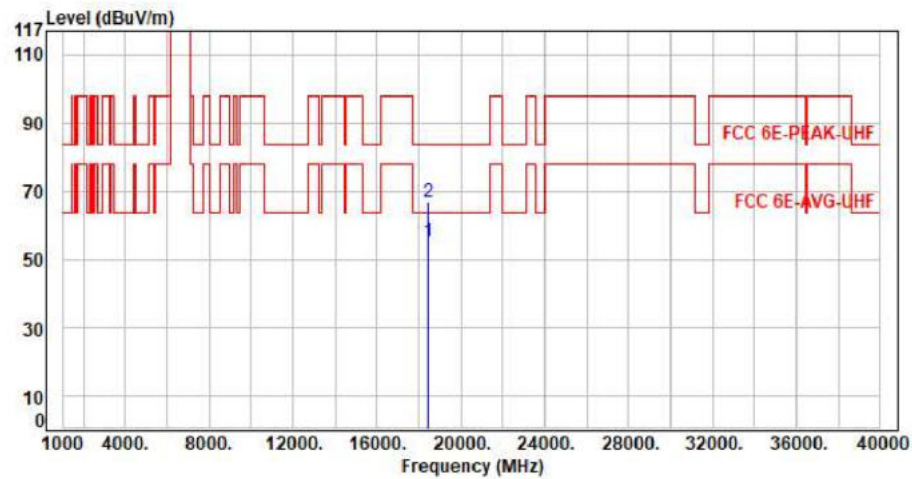


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.98	55.18	63.54	-8.36	Average	150	360	P
2	18435.00	10.20	56.51	66.71	83.54	-16.83	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

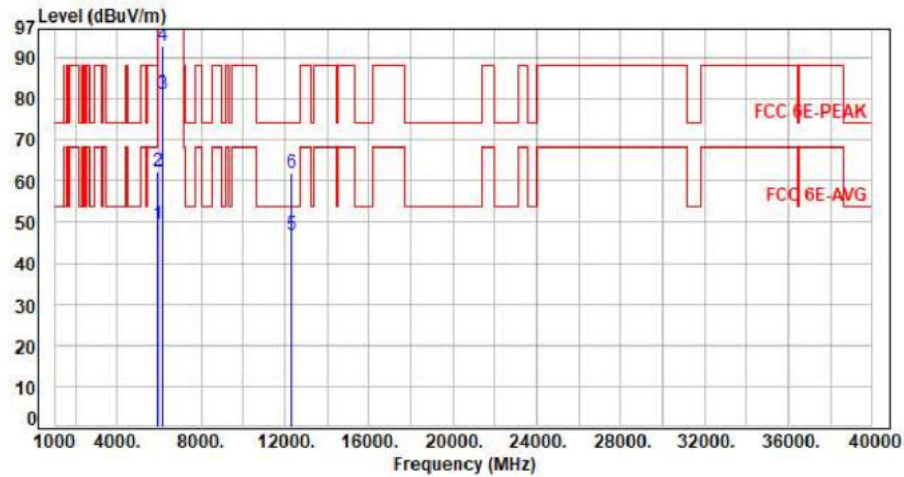


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	357	22	P
2	5925.00	7.66	54.79	62.45	88.20	-25.75	Peak	357	22	P
3	6145.00	8.31	72.93	81.24	200.00	-118.76	Average	357	22	P
4	6145.00	8.31	84.73	93.04	200.00	-106.96	Peak	357	22	P
5	12290.00	17.62	29.07	46.69	54.00	-7.31	Average	100	218	P
6	12290.00	17.62	44.49	62.11	74.00	-11.89	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

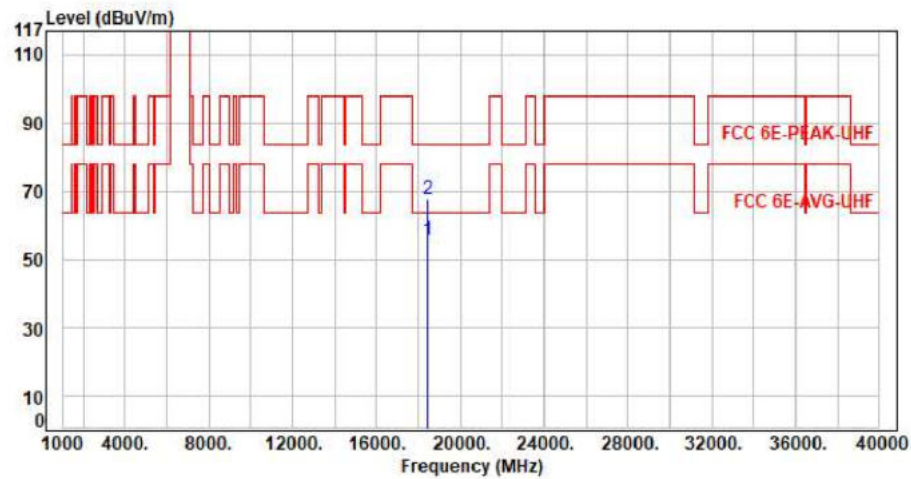


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	45.43	55.63	63.54	-7.91	Average	150	360	P
2	18435.00	10.20	57.20	67.40	83.54	-16.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

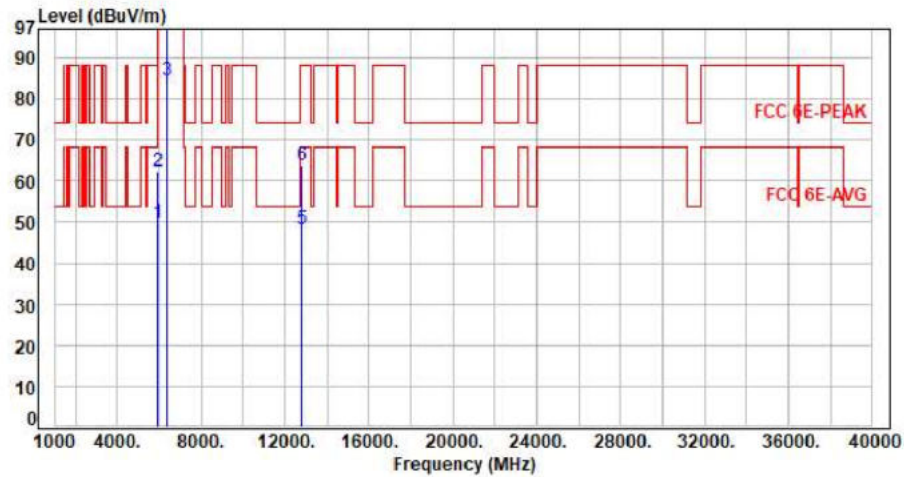


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.95	49.61	68.20	-18.59	Average	325	322	P
2	5925.00	7.66	54.77	62.43	88.20	-25.77	Peak	325	322	P
3	6385.00	8.34	76.14	84.48	200.00	-115.52	Average	325	322	P
4	6385.00	8.34	88.70	97.04	200.00	-102.96	Peak	325	322	P
5	12770.00	18.73	29.70	48.43	68.20	-19.77	Average	100	228	P
6	12770.00	18.73	45.11	63.84	88.20	-24.36	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

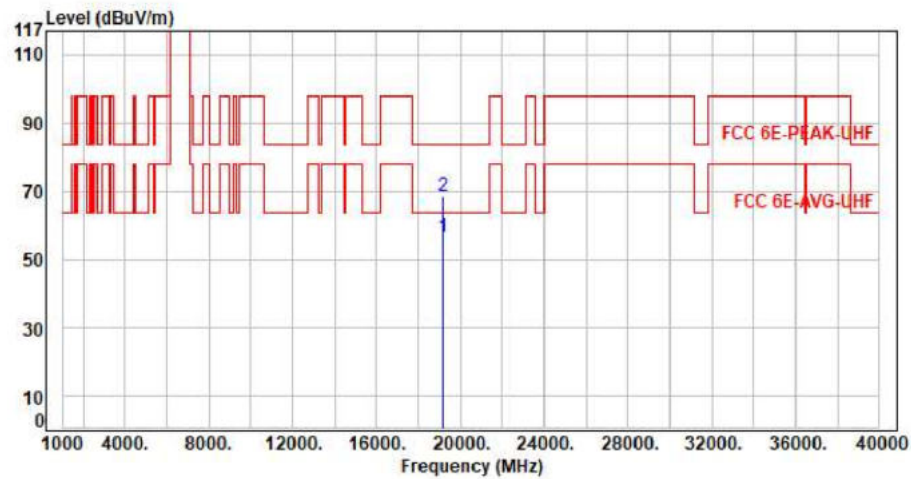


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	45.04	56.38	63.54	-7.16	Average	150	360	P
2	19155.00	11.34	56.97	68.31	83.54	-15.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

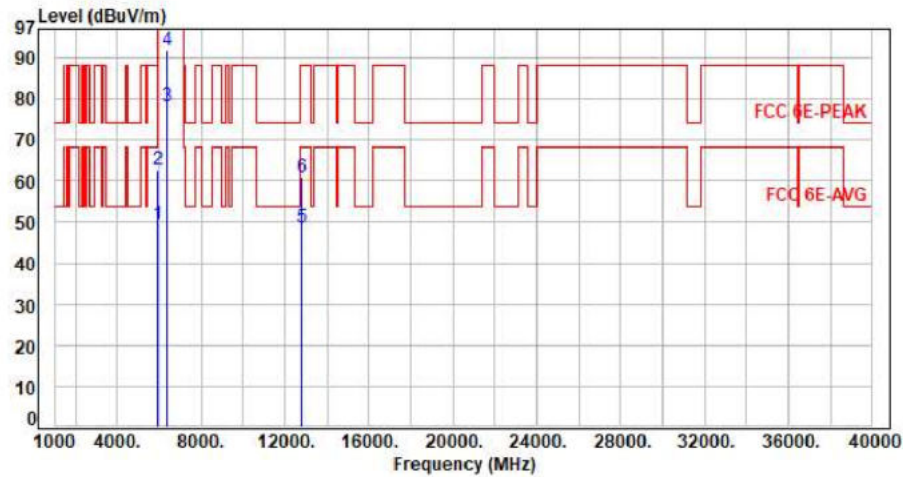


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.92	49.58	68.20	-18.62	Average	390	108	P
2	5925.00	7.66	54.94	62.60	88.20	-25.60	Peak	390	108	P
3	6385.00	8.34	70.01	78.35	200.00	-121.65	Average	390	108	P
4	6385.00	8.34	83.31	91.65	200.00	-108.35	Peak	390	108	P
5	12770.00	18.73	29.88	48.61	68.20	-19.59	Average	100	137	P
6	12770.00	18.73	42.18	60.91	88.20	-27.29	Peak	100	137	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

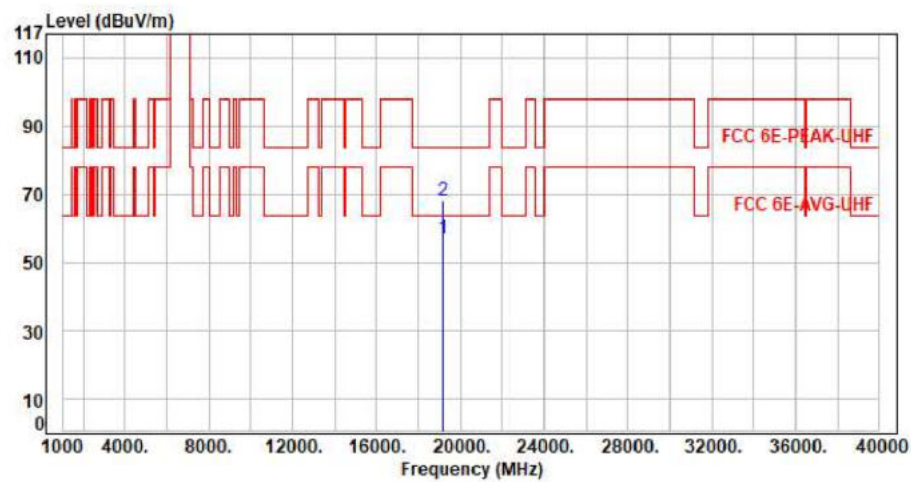

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	45.72	57.06	63.54	-6.48	Average	150	360	P
2	19155.00	11.34	56.85	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

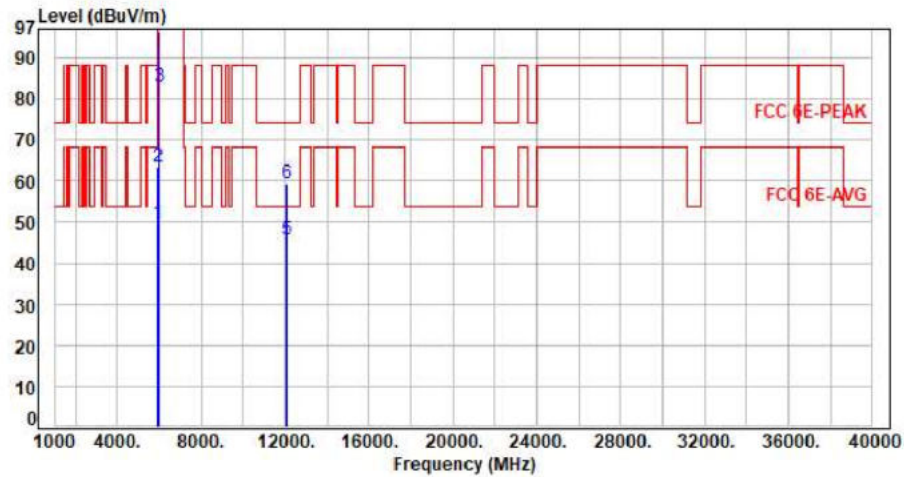


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	389	319	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	389	319	P
3	6025.00	7.91	75.08	82.99	200.00	-117.01	Average	389	319	P
4	6025.00	7.91	88.18	96.09	200.00	-103.91	Peak	389	319	P
5	12050.00	17.81	28.02	45.83	54.00	-8.17	Average	100	128	P
6	12050.00	17.81	41.59	59.40	74.00	-14.60	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

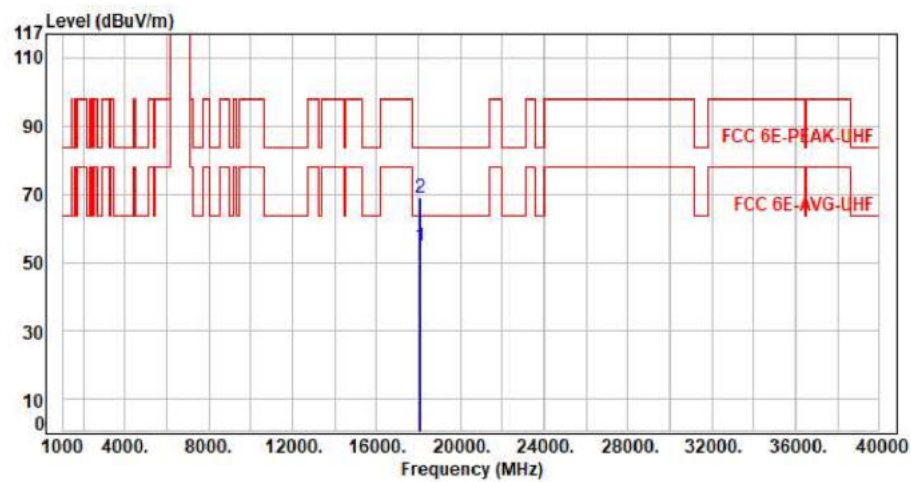

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	44.98	54.88	63.54	-8.66	Average	150	360	P
2	18075.00	9.90	58.87	68.77	83.54	-14.77	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

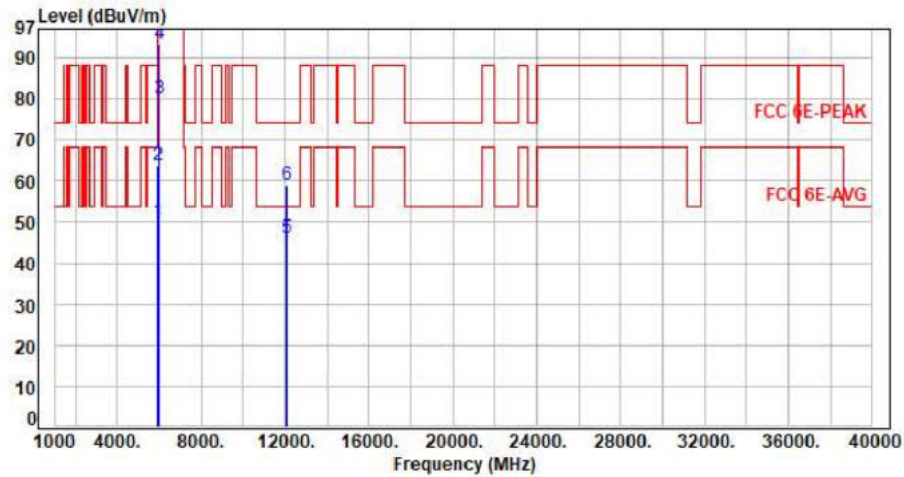


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.47	50.13	68.20	-18.07	Average	393	71	P
2	5925.00	7.66	56.08	63.74	88.20	-24.46	Peak	393	71	P
3	6025.00	7.91	72.10	80.01	200.00	-119.99	Average	393	71	P
4	6025.00	7.91	85.24	93.15	200.00	-106.85	Peak	393	71	P
5	12050.00	17.81	28.33	46.14	54.00	-7.86	Average	100	227	P
6	12050.00	17.81	41.37	59.18	74.00	-14.82	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

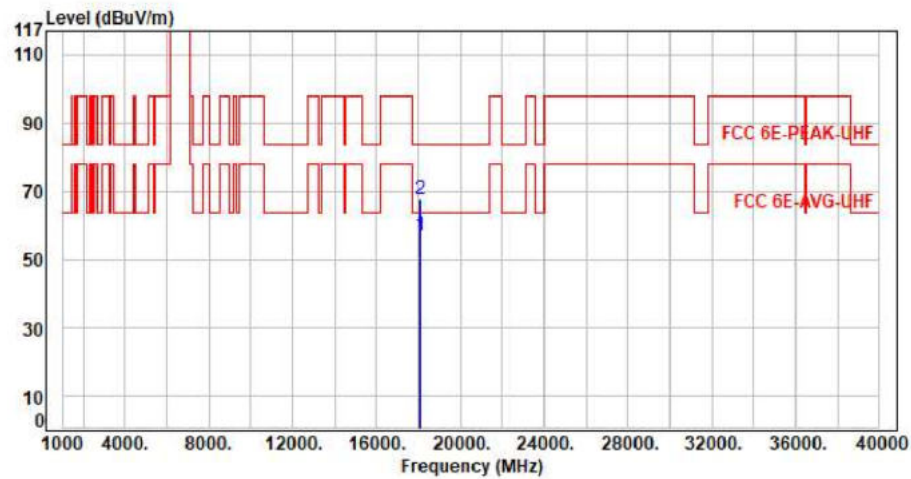

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	47.14	57.04	63.54	-6.50	Average	150	360	P
2	18075.00	9.90	57.77	67.67	83.54	-15.87	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

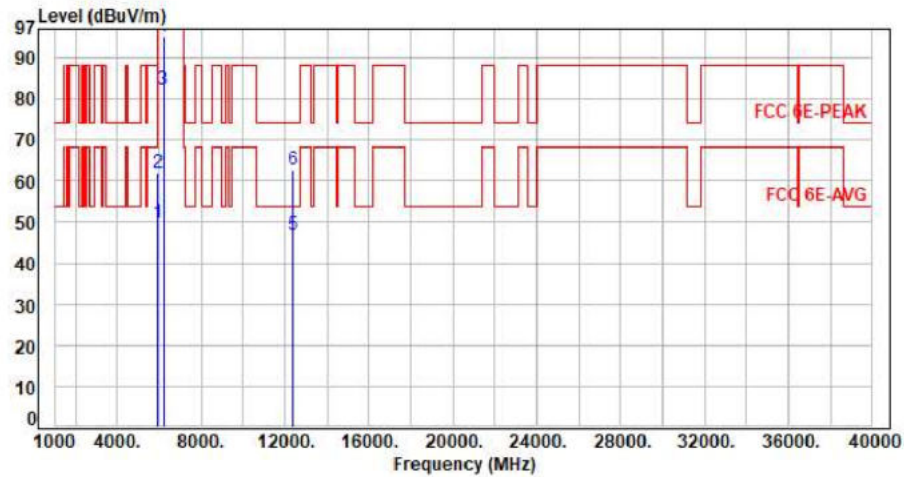


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.96	49.62	68.20	-18.58	Average	400	316	P
2	5925.00	7.66	54.43	62.09	88.20	-26.11	Peak	400	316	P
3	6185.00	8.36	73.92	82.28	200.00	-117.72	Average	400	316	P
4	6185.00	8.36	86.83	95.19	200.00	-104.81	Peak	400	316	P
5	12370.00	17.74	29.18	46.92	54.00	-7.08	Average	100	252	P
6	12370.00	17.74	44.78	62.52	74.00	-11.48	Peak	100	252	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

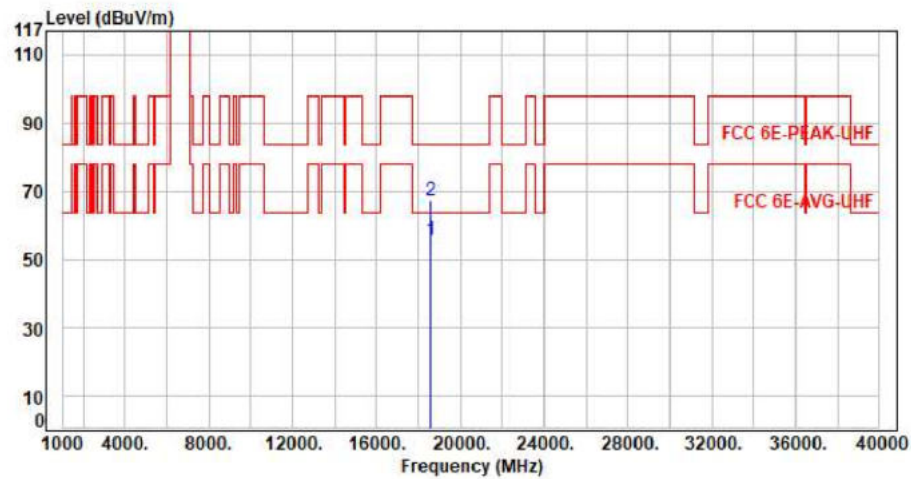

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.08	55.74	63.54	-7.80	Average	150	360	P
2	18555.00	10.66	56.72	67.38	83.54	-16.16	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

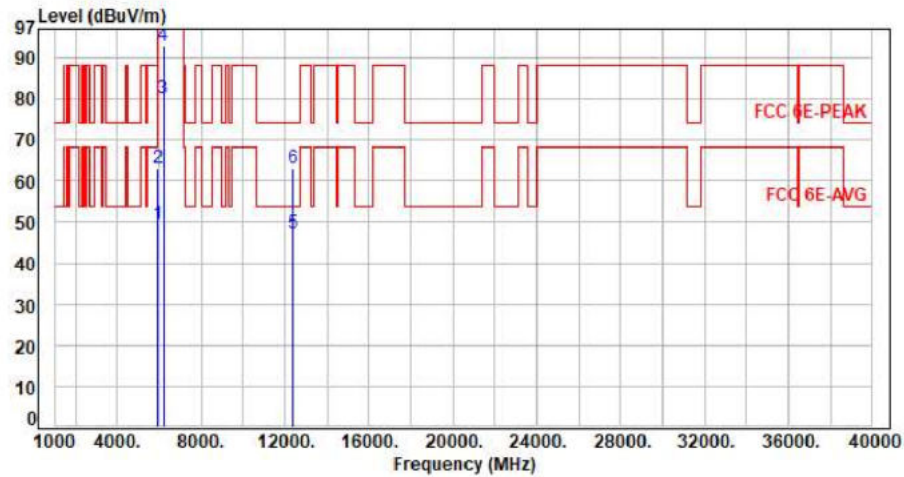

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.86	49.52	68.20	-18.68	Average	400	25	P
2	5925.00	7.66	55.34	63.00	88.20	-25.20	Peak	400	25	P
3	6185.00	8.36	71.67	80.03	200.00	-119.97	Average	400	25	P
4	6185.00	8.36	84.48	92.84	200.00	-107.16	Peak	400	25	P
5	12370.00	17.74	29.30	47.04	54.00	-6.96	Average	100	331	P
6	12370.00	17.74	45.18	62.92	74.00	-11.08	Peak	100	331	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

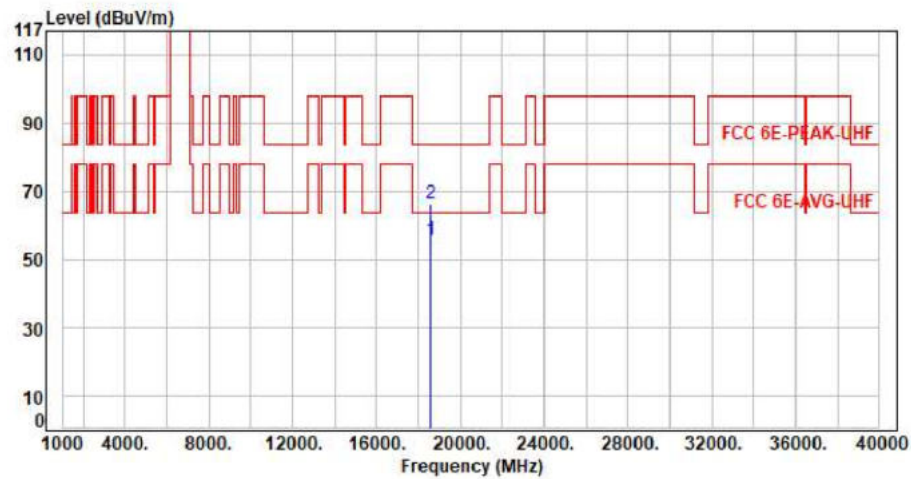


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	44.99	55.65	63.54	-7.89	Average	150	360	P
2	18555.00	10.66	55.62	66.28	83.54	-17.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

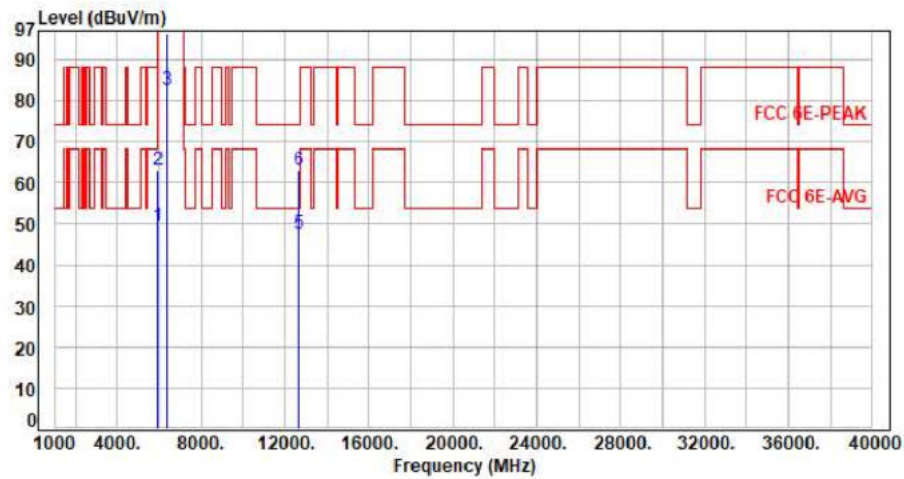


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.90	49.56	68.20	-18.64	Average	325	324	P
2	5925.00	7.66	55.31	62.97	88.20	-25.23	Peak	325	324	P
3	6345.00	8.31	74.20	82.51	200.00	-117.49	Average	325	324	P
4	6345.00	8.31	87.84	96.15	200.00	-103.85	Peak	325	324	P
5	12690.00	18.27	29.42	47.69	54.00	-6.31	Average	100	142	P
6	12690.00	18.27	44.92	63.19	74.00	-10.81	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

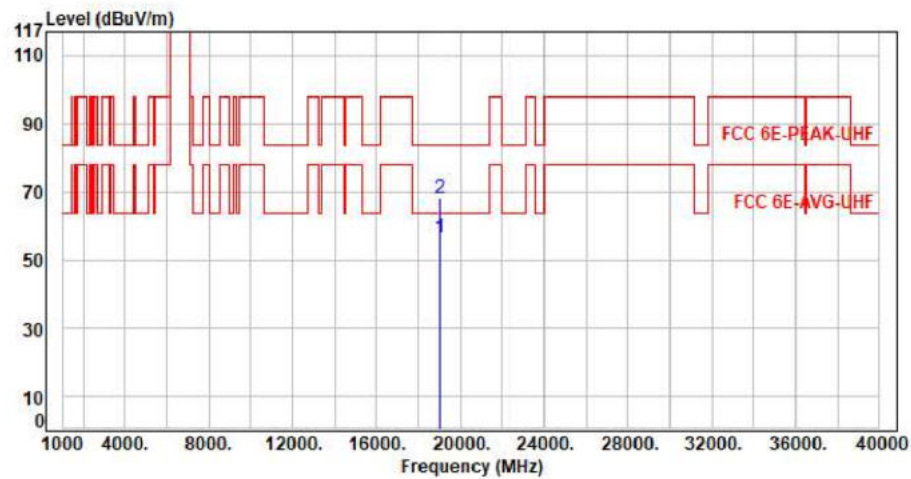


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	45.05	56.46	63.54	-7.08	Average	150	360	P
2	19035.00	11.41	56.76	68.17	83.54	-15.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

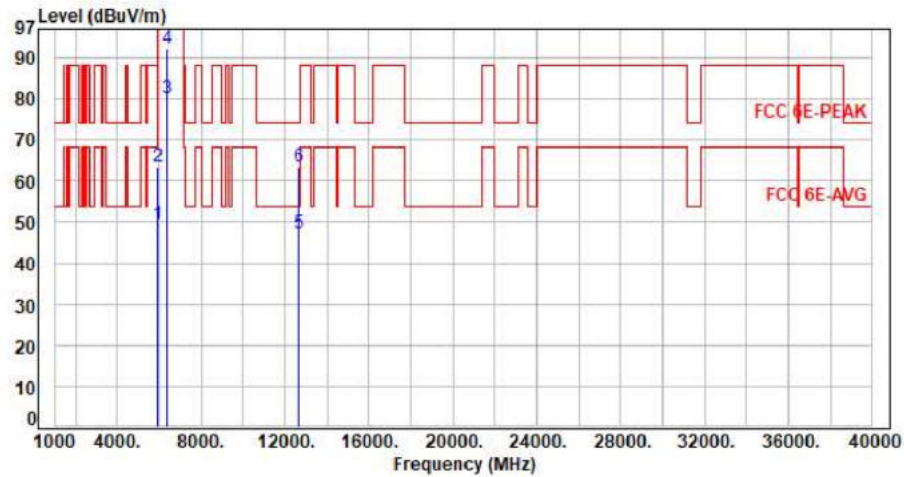

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.80	49.46	68.20	-18.74	Average	383	18	P
2	5925.00	7.66	55.69	63.35	88.20	-24.85	Peak	383	18	P
3	6345.00	8.31	71.60	79.91	200.00	-120.09	Average	383	18	P
4	6345.00	8.31	84.08	92.39	200.00	-107.61	Peak	383	18	P
5	12690.00	18.27	29.08	47.35	54.00	-6.65	Average	100	114	P
6	12690.00	18.27	45.11	63.38	74.00	-10.62	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

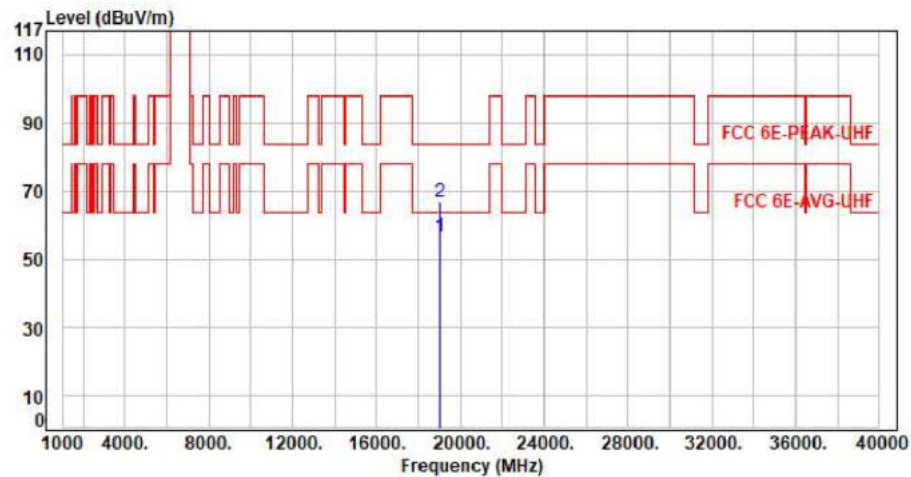

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	45.23	56.64	63.54	-6.90	Average	150	360	P
2	19035.00	11.41	55.37	66.78	83.54	-16.76	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

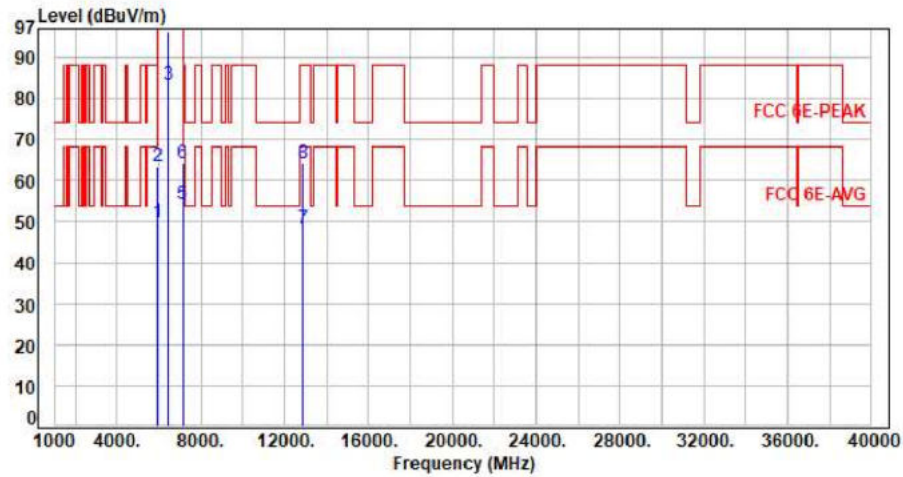

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.02	49.68	68.20	-18.52	Average	335	323	P
2	5925.00	7.66	55.63	63.29	88.20	-24.91	Peak	335	323	P
3	6435.00	8.32	75.03	83.35	200.00	-116.65	Average	335	323	P
4	6435.00	8.32	87.99	96.31	200.00	-103.69	Peak	335	323	P
5	7125.00	10.05	44.08	54.13	68.20	-14.07	Average	335	323	P
6	7125.00	10.05	54.11	64.16	88.20	-24.04	Peak	335	323	P
7	12870.00	19.02	29.13	48.15	68.20	-20.05	Average	100	181	P
8	12870.00	19.02	44.97	63.99	88.20	-24.21	Peak	100	181	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

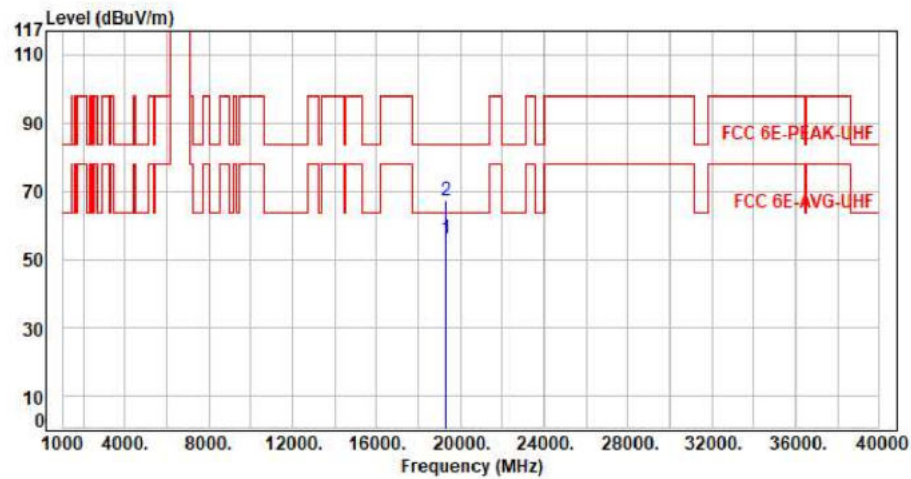


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.36	55.97	63.54	-7.57	Average	150	360	P
2	19305.00	11.61	55.48	67.09	83.54	-16.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

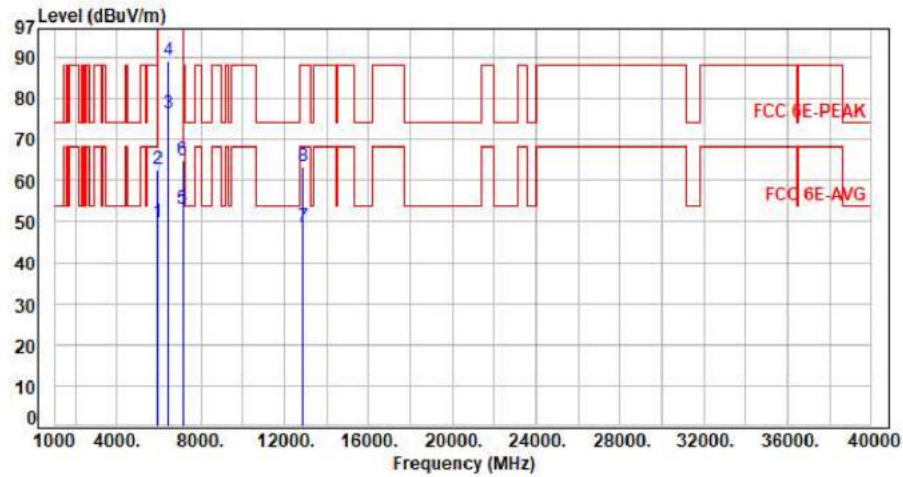

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.99	49.65	68.20	-18.55	Average	100	64	P
2	5925.00	7.66	54.87	62.53	88.20	-25.67	Peak	100	64	P
3	6435.00	8.32	68.18	76.50	200.00	-123.50	Average	100	64	P
4	6435.00	8.32	80.81	89.13	200.00	-110.87	Peak	100	64	P
5	7125.00	10.05	42.96	53.01	68.20	-15.19	Average	100	64	P
6	7125.00	10.05	54.68	64.73	88.20	-23.47	Peak	100	64	P
7	12870.00	19.02	29.75	48.77	68.20	-19.43	Average	100	124	P
8	12870.00	19.02	44.57	63.59	88.20	-24.61	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

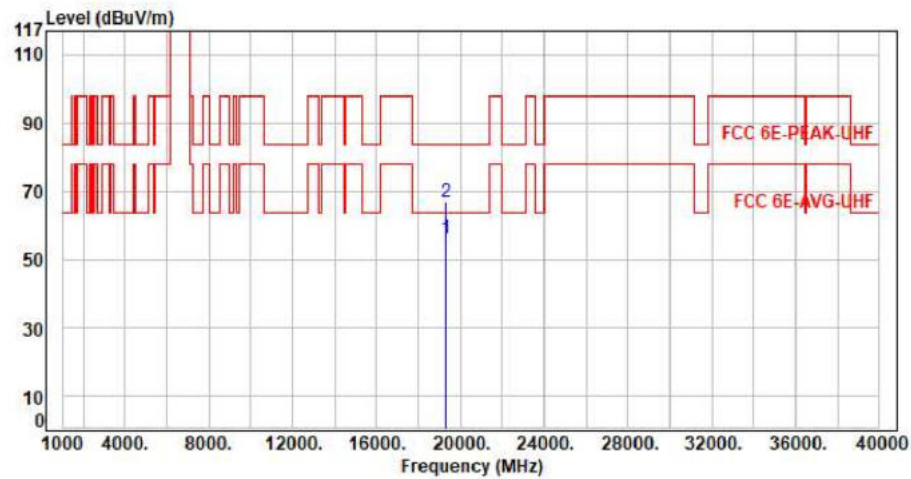


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.49	56.10	63.54	-7.44	Average	150	360	P
2	19305.00	11.61	55.26	66.87	83.54	-16.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

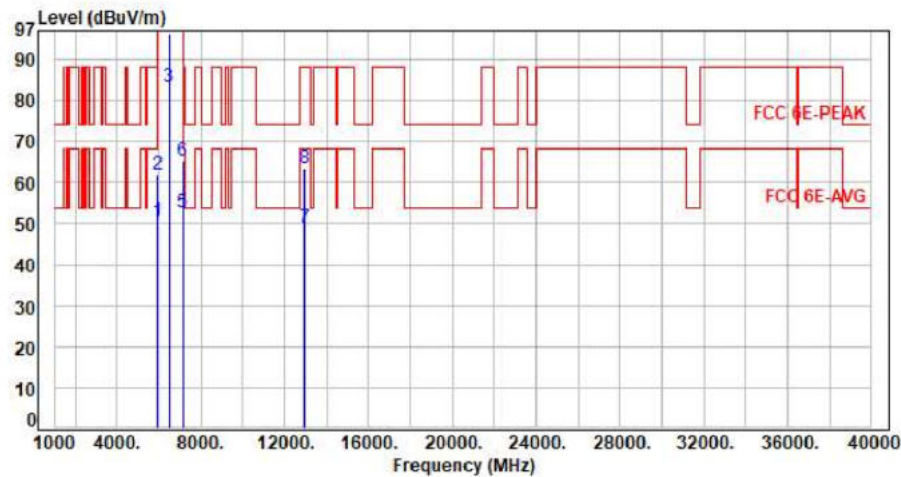

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.71	50.37	68.20	-17.83	Average	348	322	P
2	5925.00	7.66	54.31	61.97	88.20	-26.23	Peak	348	322	P
3	6475.00	8.33	75.14	83.47	200.00	-116.53	Average	348	322	P
4	6475.00	8.33	87.76	96.09	200.00	-103.91	Peak	348	322	P
5	7125.00	10.05	42.60	52.65	68.20	-15.55	Average	348	322	P
6	7125.00	10.05	55.12	65.17	88.20	-23.03	Peak	348	322	P
7	12950.00	19.39	29.58	48.97	68.20	-19.23	Average	100	123	P
8	12950.00	19.39	44.18	63.57	88.20	-24.63	Peak	100	223	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

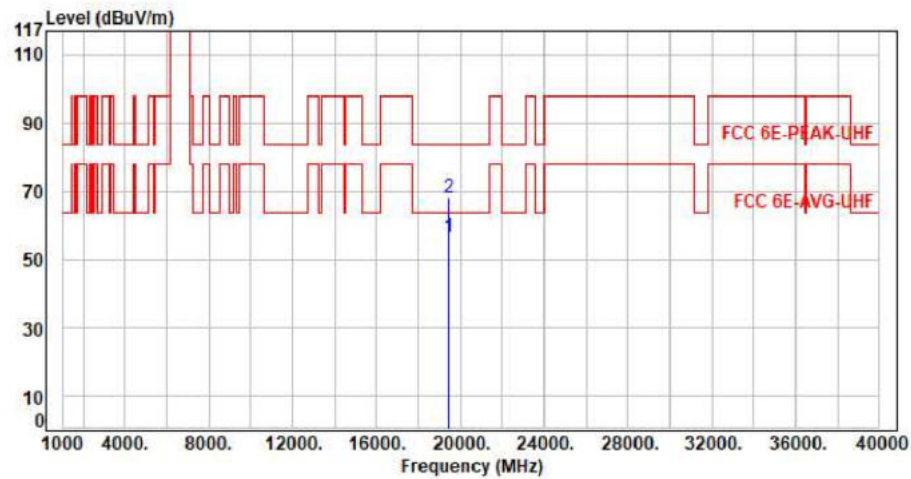


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.72	56.47	63.54	-7.07	Average	150	360	P
2	19425.00	11.75	56.12	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

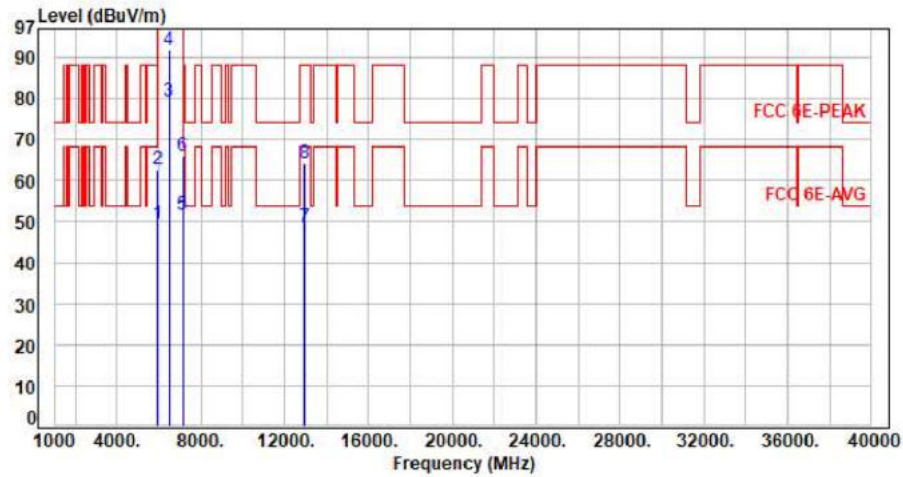

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.80	49.46	68.20	-18.74	Average	379	12	P
2	5925.00	7.66	54.99	62.65	88.20	-25.55	Peak	379	12	P
3	6475.00	8.33	71.04	79.37	200.00	-120.63	Average	379	12	P
4	6475.00	8.33	83.37	91.70	200.00	-108.30	Peak	379	12	P
5	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	379	12	P
6	7125.00	10.05	56.11	66.16	88.20	-22.04	Peak	379	12	P
7	12950.00	19.39	29.18	48.57	68.20	-19.63	Average	100	221	P
8	12950.00	19.39	44.97	64.36	88.20	-23.84	Peak	100	221	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

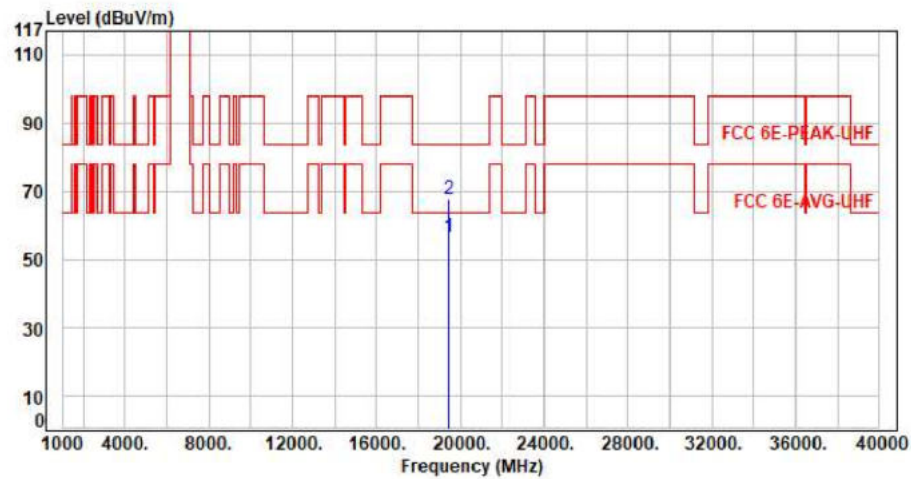


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.95	56.70	63.54	-6.84	Average	150	360	P
2	19425.00	11.75	55.98	67.73	83.54	-15.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

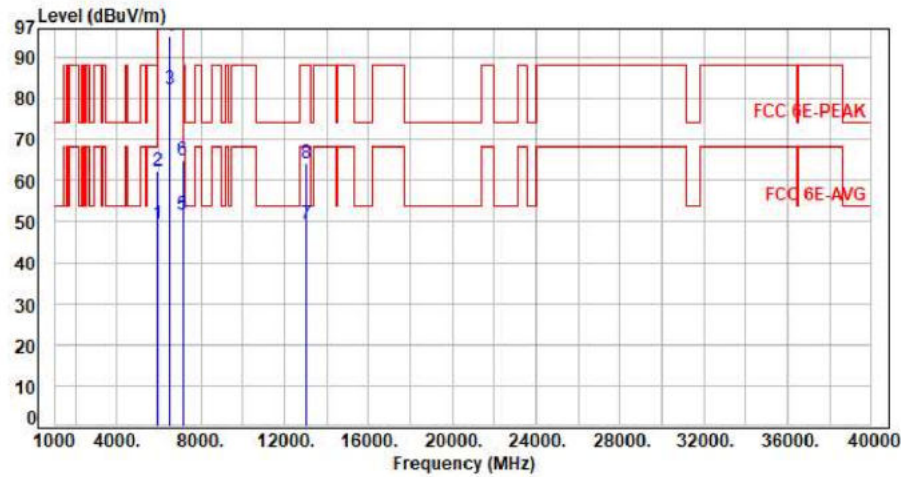

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.90	49.56	68.20	-18.64	Average	344	324	P
2	5925.00	7.66	54.72	62.38	88.20	-25.82	Peak	344	324	P
3	6515.00	8.42	73.85	82.27	200.00	-117.73	Average	344	324	P
4	6515.00	8.42	86.84	95.26	200.00	-104.74	Peak	344	324	P
5	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	344	324	P
6	7125.00	10.05	54.73	64.78	88.20	-23.42	Peak	344	324	P
7	13030.00	19.86	29.66	49.52	68.20	-18.68	Average	100	138	P
8	13030.00	19.86	44.25	64.11	88.20	-24.09	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

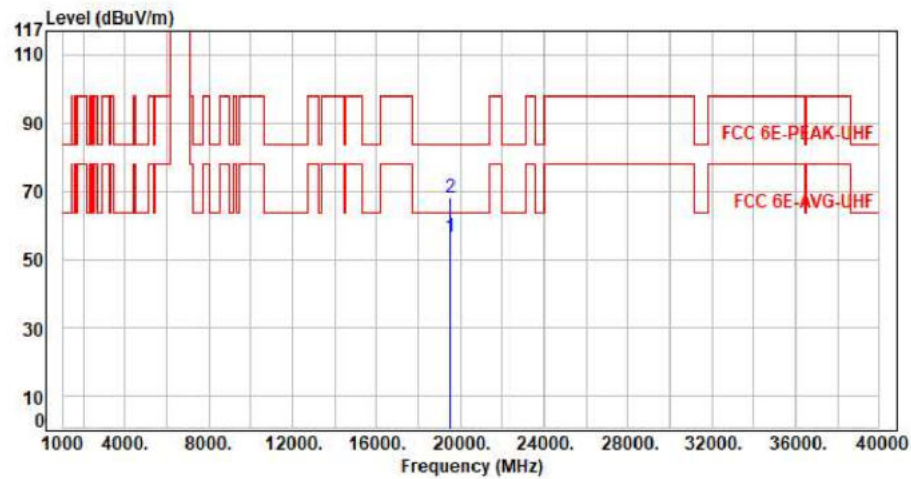


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.52	56.71	63.54	-6.83	Average	150	360	P
2	19545.00	12.19	55.71	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

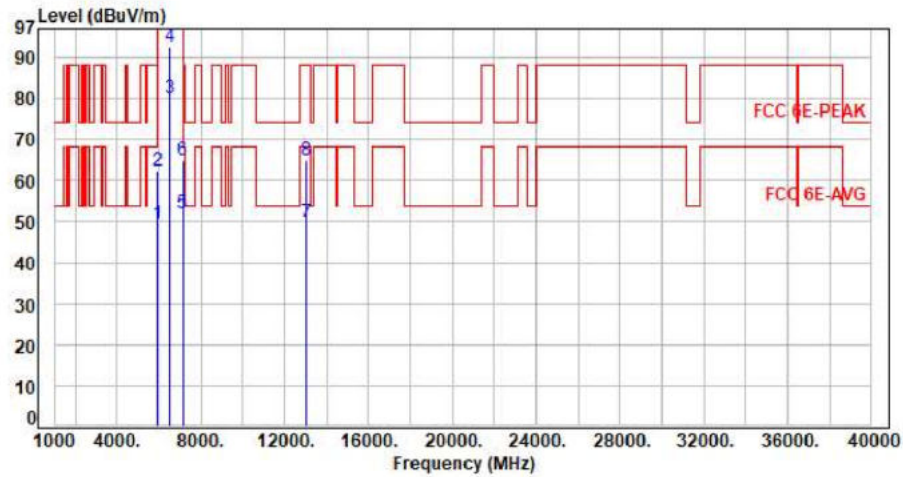

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.85	49.51	68.20	-18.69	Average	341	89	P
2	5925.00	7.66	54.63	62.29	88.20	-25.91	Peak	341	89	P
3	6515.00	8.42	71.76	80.18	200.00	-119.82	Average	341	89	P
4	6515.00	8.42	84.29	92.71	200.00	-107.29	Peak	341	89	P
5	7125.00	10.05	41.80	51.85	68.20	-16.35	Average	341	89	P
6	7125.00	10.05	54.91	64.96	88.20	-23.24	Peak	341	89	P
7	13030.00	19.86	29.76	49.62	68.20	-18.58	Average	100	225	P
8	13030.00	19.86	44.93	64.79	88.20	-23.41	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

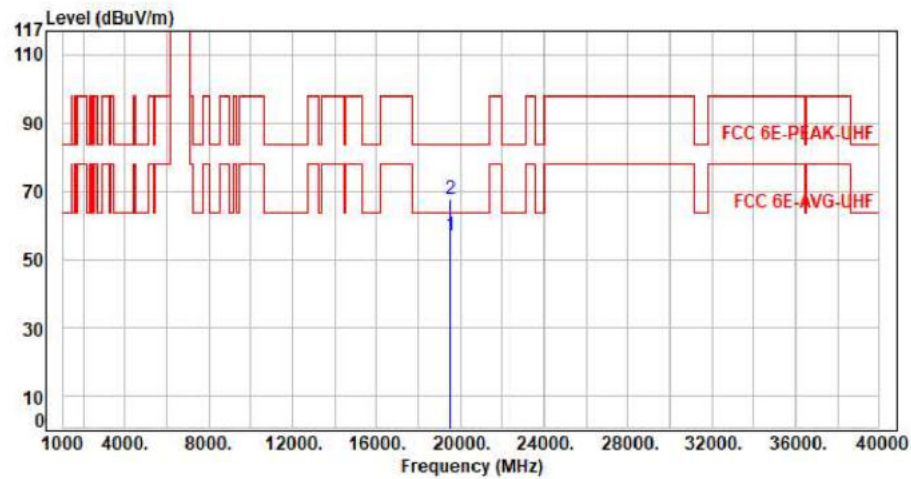


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.54	56.73	63.54	-6.81	Average	150	360	P
2	19545.00	12.19	55.63	67.82	83.54	-15.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

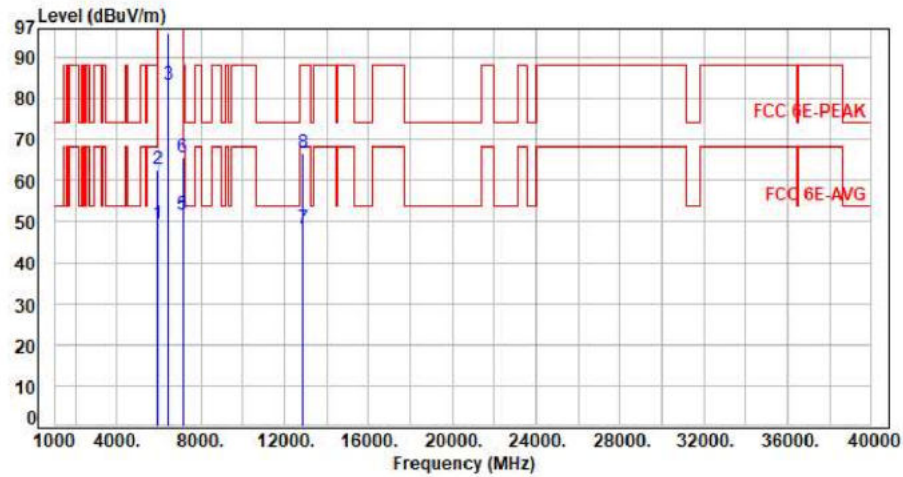


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.85	49.51	68.20	-18.69	Average	331	322	P
2	5925.00	7.66	55.09	62.75	88.20	-25.45	Peak	331	322	P
3	6445.00	8.31	74.89	83.20	200.00	-116.80	Average	331	322	P
4	6445.00	8.31	87.56	95.87	200.00	-104.13	Peak	331	322	P
5	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	331	322	P
6	7125.00	10.05	55.69	65.74	88.20	-22.46	Peak	331	322	P
7	12890.00	19.05	29.19	48.24	68.20	-19.96	Average	100	214	P
8	12890.00	19.05	47.59	66.64	88.20	-21.56	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

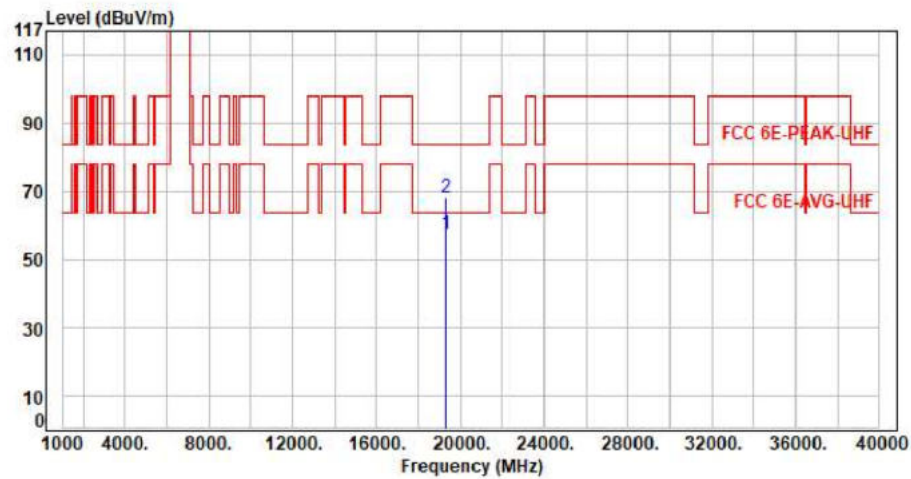


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	45.68	57.30	63.54	-6.24	Average	150	360	P
2	19335.00	11.62	56.66	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

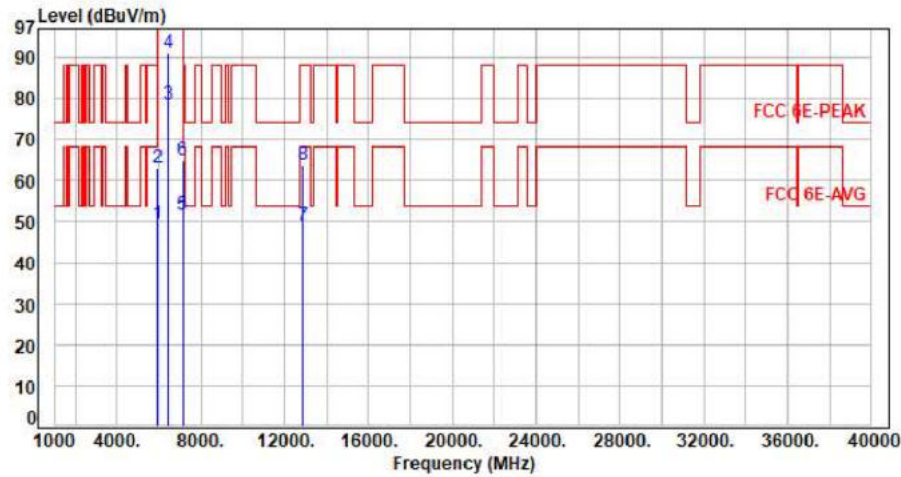

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.82	49.48	68.20	-18.72	Average	344	85	P
2	5925.00	7.66	55.52	63.18	88.20	-25.02	Peak	344	85	P
3	6445.00	8.31	70.08	78.39	200.00	-121.61	Average	344	85	P
4	6445.00	8.31	82.61	90.92	200.00	-109.08	Peak	344	85	P
5	7125.00	10.05	41.62	51.67	68.20	-16.53	Average	344	85	P
6	7125.00	10.05	54.92	64.97	88.20	-23.23	Peak	344	85	P
7	12890.00	19.05	29.88	48.93	68.20	-19.27	Average	100	138	P
8	12890.00	19.05	44.69	63.74	88.20	-24.46	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

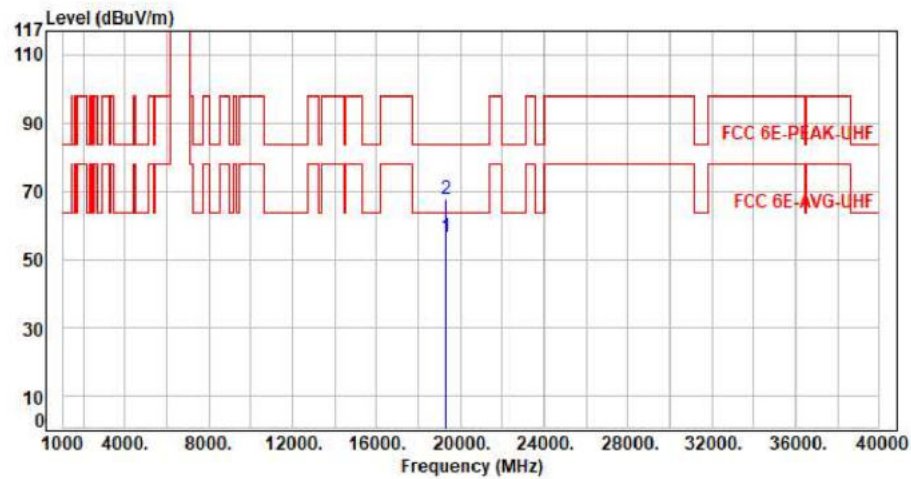


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.83	56.45	63.54	-7.09	Average	150	360	P
2	19335.00	11.62	55.92	67.54	83.54	-16.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

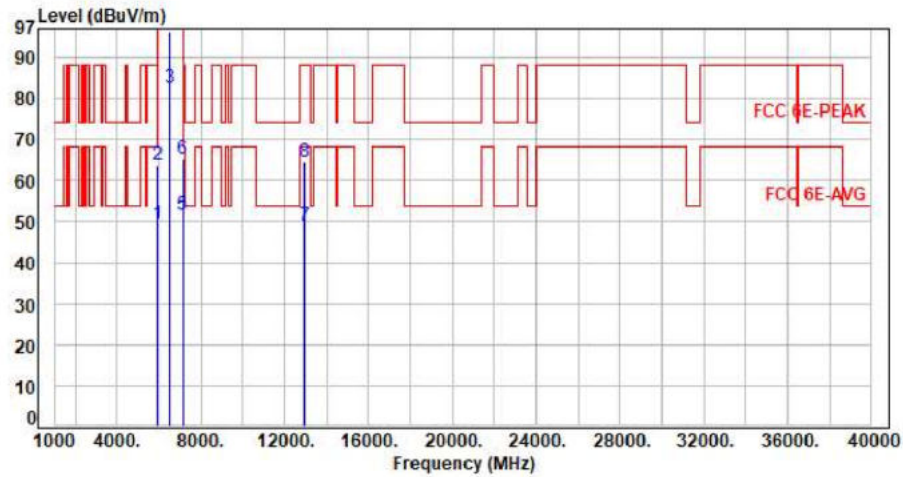

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.75	49.41	68.20	-18.79	Average	329	322	P
2	5925.00	7.66	56.17	63.83	88.20	-24.37	Peak	329	322	P
3	6485.00	8.34	74.43	82.77	200.00	-117.23	Average	329	322	P
4	6485.00	8.34	87.91	96.25	200.00	-103.75	Peak	329	322	P
5	7125.00	10.05	41.68	51.73	68.20	-16.47	Average	329	322	P
6	7125.00	10.05	55.14	65.19	88.20	-23.01	Peak	329	322	P
7	12970.00	19.47	29.46	48.93	68.20	-19.27	Average	100	332	P
8	12970.00	19.47	44.96	64.43	88.20	-23.77	Peak	100	332	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor