




For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

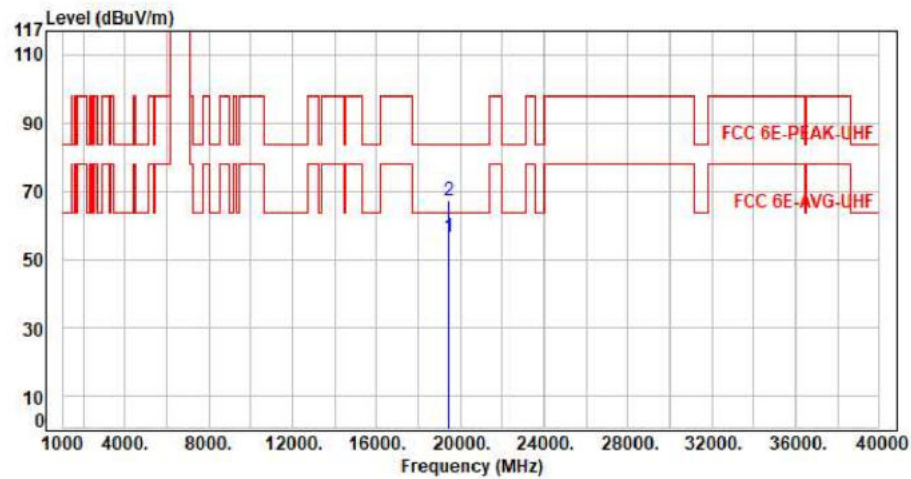


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.78	56.35	63.54	-7.19	Average	150	360	P
2	19455.00	11.57	55.55	67.12	83.54	-16.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

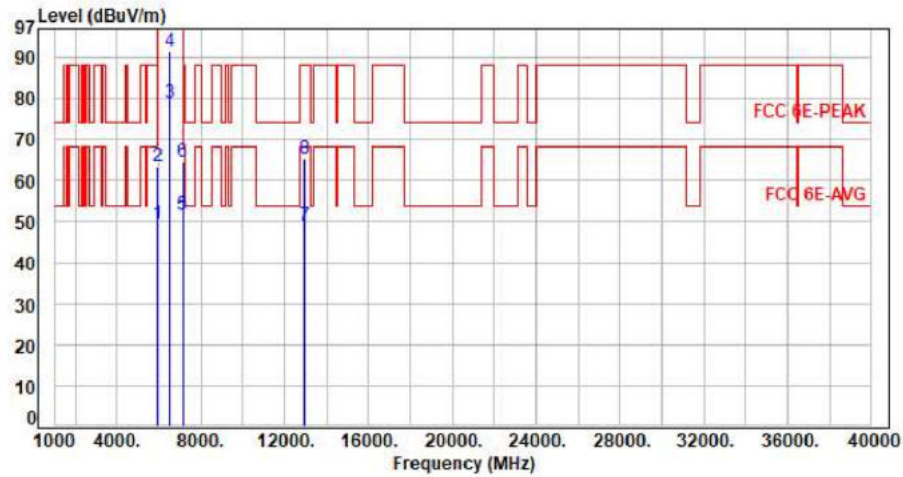

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.81	49.47	68.20	-18.73	Average	371	89	P
2	5925.00	7.66	55.85	63.51	88.20	-24.69	Peak	371	89	P
3	6485.00	8.34	70.56	78.90	200.00	-121.10	Average	371	89	P
4	6485.00	8.34	83.04	91.38	200.00	-108.62	Peak	371	89	P
5	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	371	89	P
6	7125.00	10.05	54.40	64.45	88.20	-23.75	Peak	371	89	P
7	12970.00	19.47	29.47	48.94	68.20	-19.26	Average	100	114	P
8	12970.00	19.47	45.73	65.20	88.20	-23.00	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

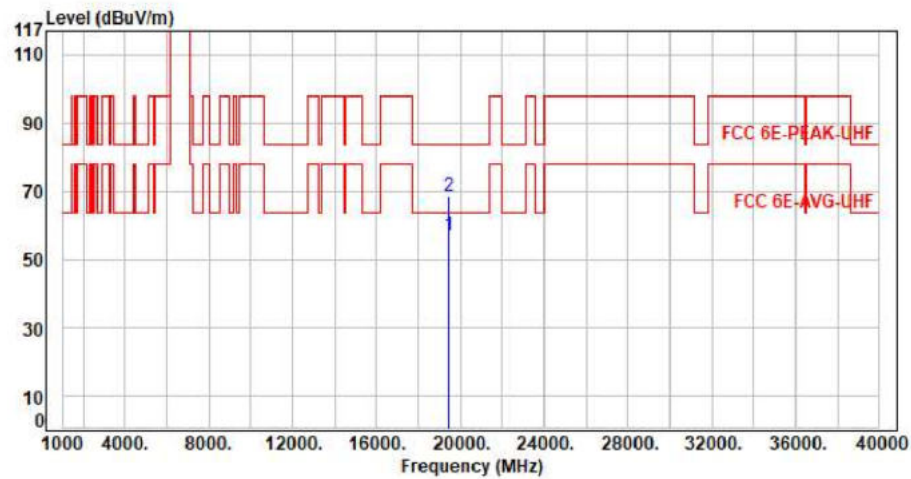


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	45.17	56.74	63.54	-6.80	Average	150	360	P
2	19455.00	11.57	56.83	68.40	83.54	-15.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

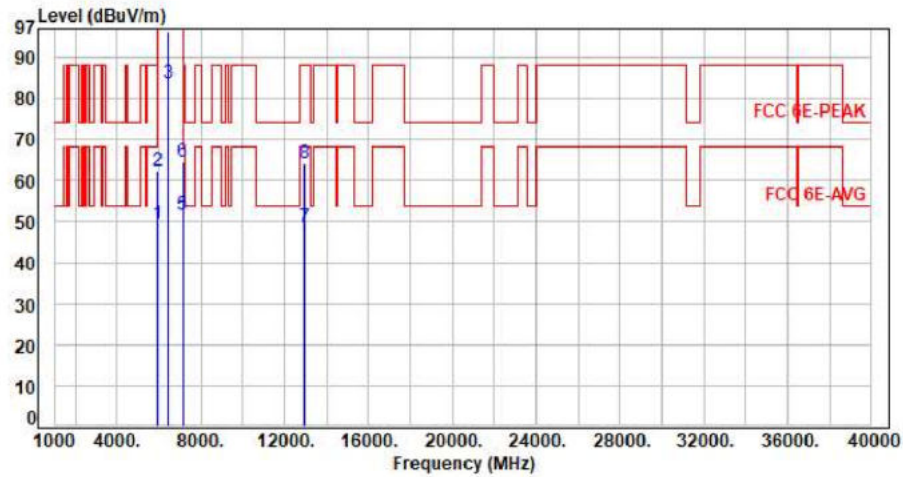

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	348	323	P
2	5925.00	7.66	54.85	62.51	88.20	-25.69	Peak	348	323	P
3	6465.00	8.32	75.39	83.71	200.00	-116.29	Average	348	323	P
4	6465.00	8.32	88.08	96.40	200.00	-103.60	Peak	348	323	P
5	7125.00	10.05	41.67	51.72	68.20	-16.48	Average	348	323	P
6	7125.00	10.05	54.43	64.48	88.20	-23.72	Peak	348	323	P
7	12930.00	19.27	29.38	48.65	68.20	-19.55	Average	100	185	P
8	12930.00	19.27	44.95	64.22	88.20	-23.98	Peak	100	185	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

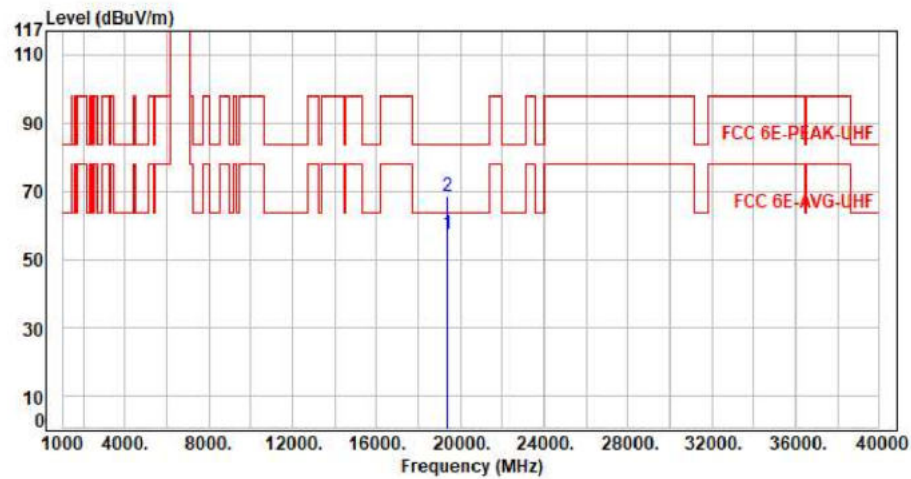


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.37	57.28	63.54	-6.26	Average	150	360	P
2	19395.00	11.91	56.38	68.29	83.54	-15.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

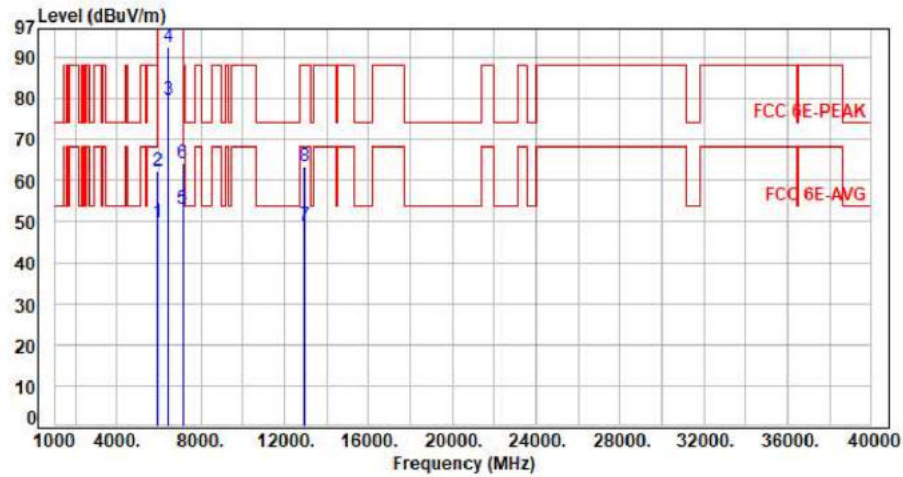

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	356	90	P
2	5925.00	7.66	54.67	62.33	88.20	-25.87	Peak	356	90	P
3	6465.00	8.32	71.17	79.49	200.00	-120.51	Average	356	90	P
4	6465.00	8.32	84.21	92.53	200.00	-107.47	Peak	356	90	P
5	7125.00	10.05	42.92	52.97	68.20	-15.23	Average	356	90	P
6	7125.00	10.05	54.27	64.32	88.20	-23.88	Peak	356	90	P
7	12930.00	19.27	29.91	49.18	68.20	-19.02	Average	100	124	P
8	12930.00	19.27	44.16	63.43	88.20	-24.77	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

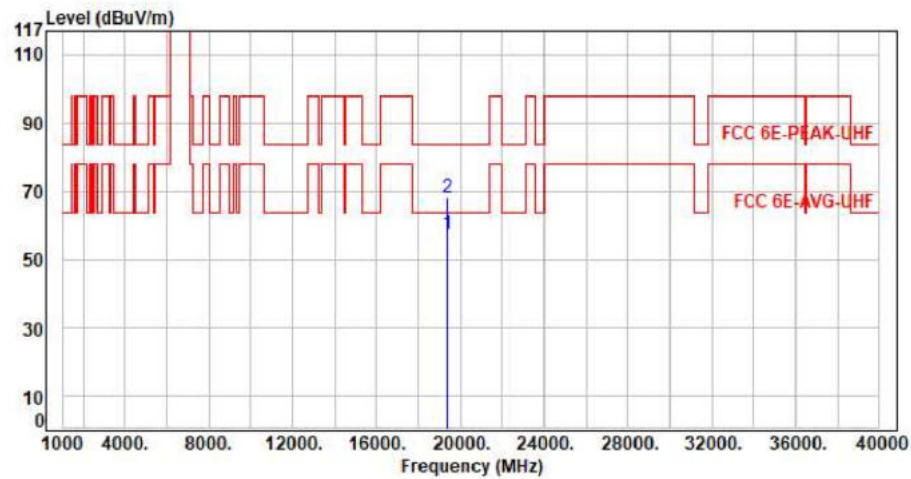


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	45.42	57.33	63.54	-6.21	Average	150	360	P
2	19395.00	11.91	56.07	67.98	83.54	-15.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

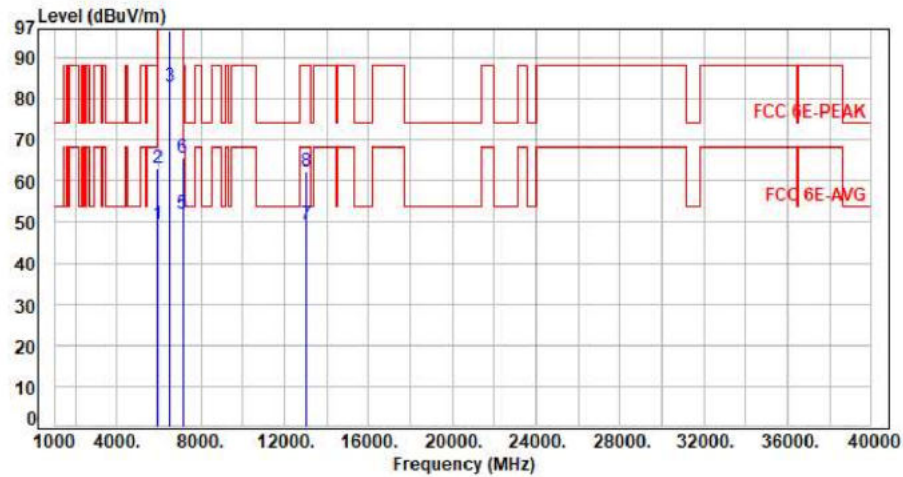


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.90	49.56	68.20	-18.64	Average	316	321	P
2	5925.00	7.66	55.46	63.12	88.20	-25.08	Peak	316	321	P
3	6525.00	8.45	74.50	82.95	200.00	-117.05	Average	316	321	P
4	6525.00	8.45	88.26	96.71	200.00	-103.29	Peak	316	321	P
5	7125.00	10.05	41.86	51.91	68.20	-16.29	Average	316	321	P
6	7125.00	10.05	55.69	65.74	88.20	-22.46	Peak	316	321	P
7	13050.00	20.02	29.58	49.60	68.20	-18.60	Average	100	258	P
8	13050.00	20.02	42.19	62.21	88.20	-25.99	Peak	100	258	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

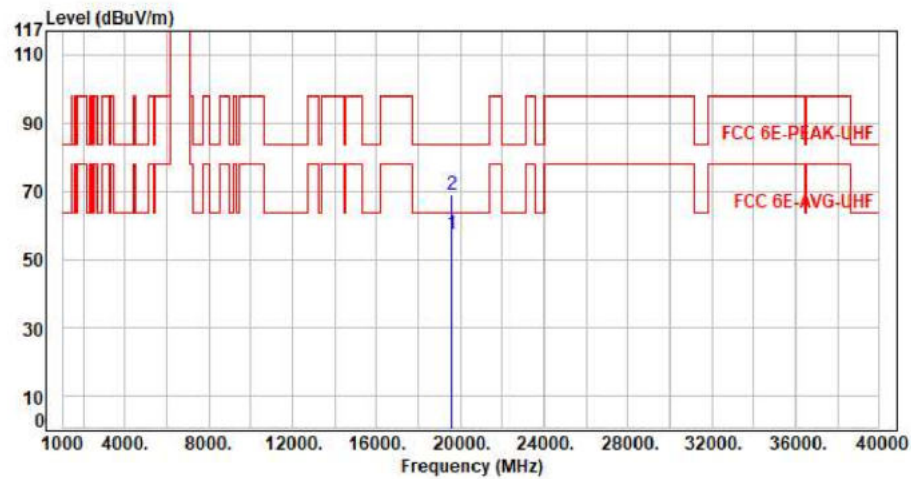


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.19	57.21	63.54	-6.33	Average	150	360	P
2	19575.00	12.02	56.98	69.00	83.54	-14.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

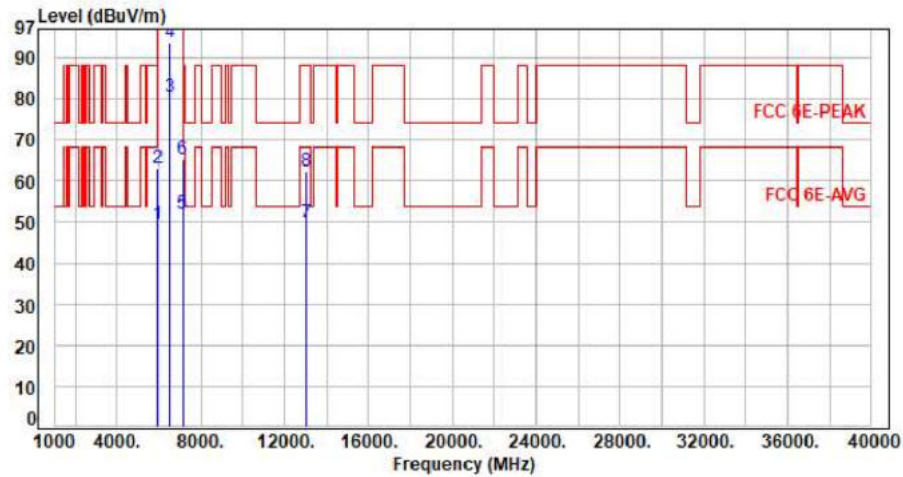


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.86	49.52	68.20	-18.68	Average	342	87	P
2	5925.00	7.66	55.54	63.20	88.20	-25.00	Peak	342	87	P
3	6525.00	8.45	72.00	80.45	200.00	-119.55	Average	342	87	P
4	6525.00	8.45	85.06	93.51	200.00	-106.49	Peak	342	87	P
5	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	342	87	P
6	7125.00	10.05	55.29	65.34	88.20	-22.86	Peak	342	87	P
7	13050.00	20.02	29.61	49.63	68.20	-18.57	Average	100	232	P
8	13050.00	20.02	42.19	62.21	88.20	-25.99	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

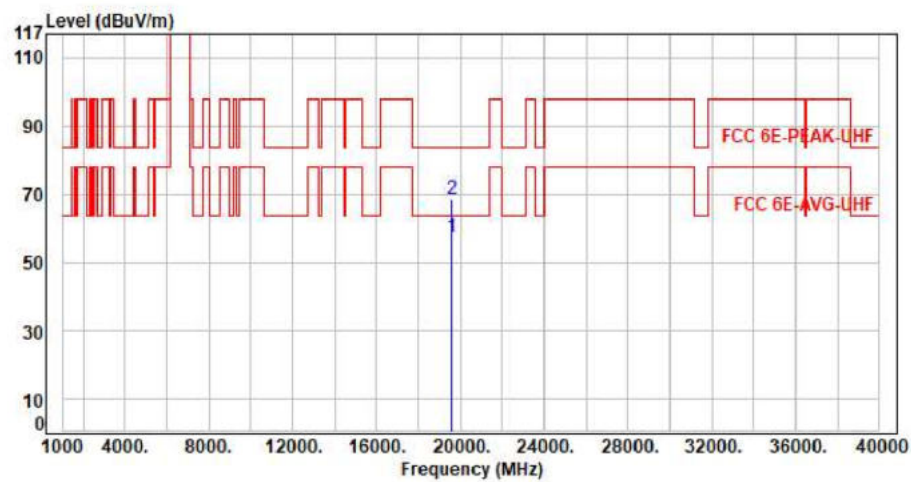

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	45.52	57.54	63.54	-6.00	Average	150	360	P
2	19575.00	12.02	56.62	68.64	83.54	-14.90	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

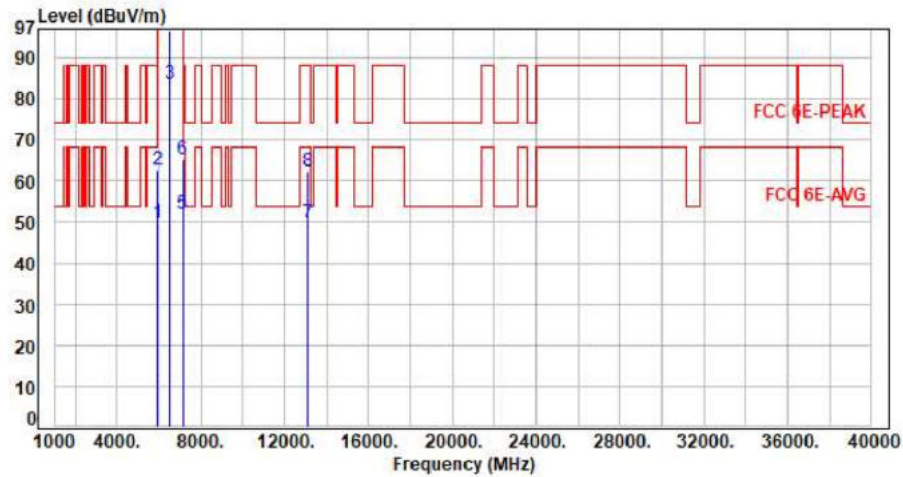


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.99	49.65	68.20	-18.55	Average	309	322	P
2	5925.00	7.66	54.91	62.57	88.20	-25.63	Peak	309	322	P
3	6545.00	8.55	75.30	83.85	200.00	-116.15	Average	309	322	P
4	6545.00	8.55	88.07	96.62	200.00	-103.38	Peak	309	322	P
5	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	309	322	P
6	7125.00	10.05	55.35	65.40	88.20	-22.80	Peak	309	322	P
7	13090.00	20.20	29.41	49.61	68.20	-18.59	Average	100	188	P
8	13090.00	20.20	42.16	62.36	88.20	-25.84	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

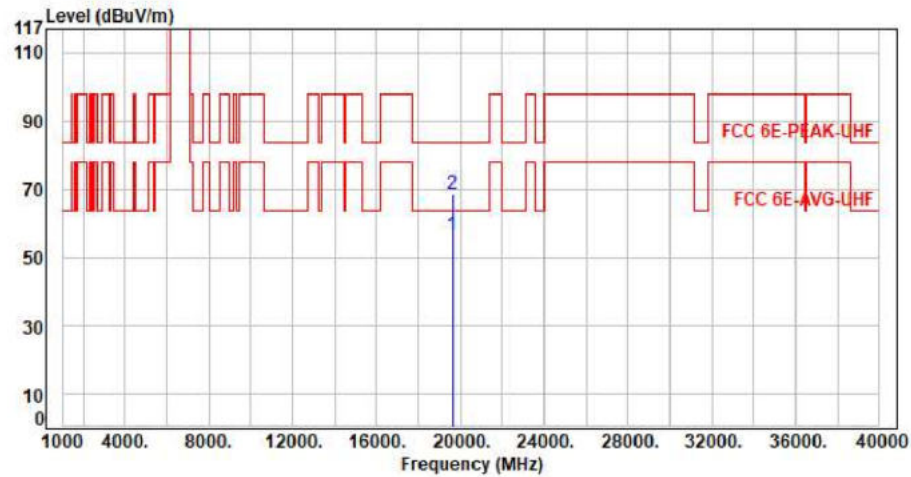


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.92	56.50	63.54	-7.04	Average	150	360	P
2	19635.00	11.58	57.09	68.67	83.54	-14.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

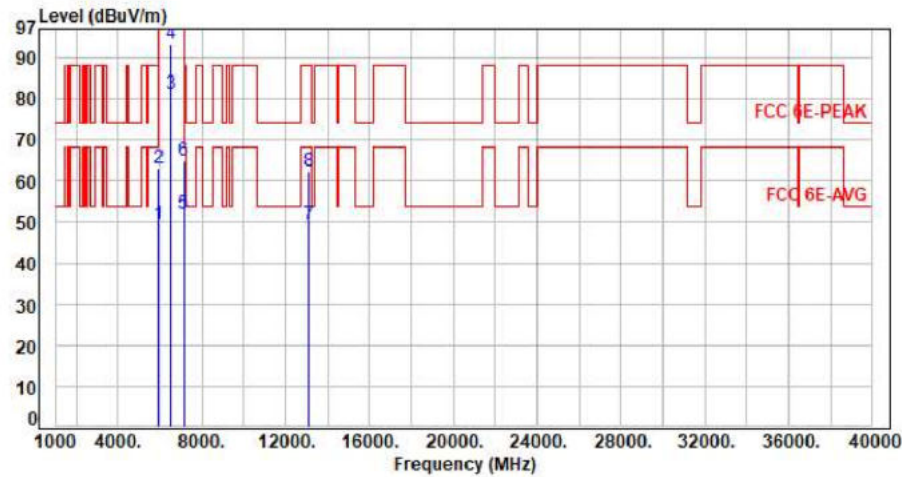

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.89	49.55	68.20	-18.65	Average	354	88	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	354	88	P
3	6545.00	8.55	72.54	81.09	200.00	-118.91	Average	354	88	P
4	6545.00	8.55	84.88	93.43	200.00	-106.57	Peak	354	88	P
5	7125.00	10.05	41.79	51.84	68.20	-16.36	Average	354	88	P
6	7125.00	10.05	54.70	64.75	88.20	-23.45	Peak	354	88	P
7	13090.00	20.20	29.18	49.38	68.20	-18.82	Average	100	224	P
8	13090.00	20.20	42.16	62.36	88.20	-25.84	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

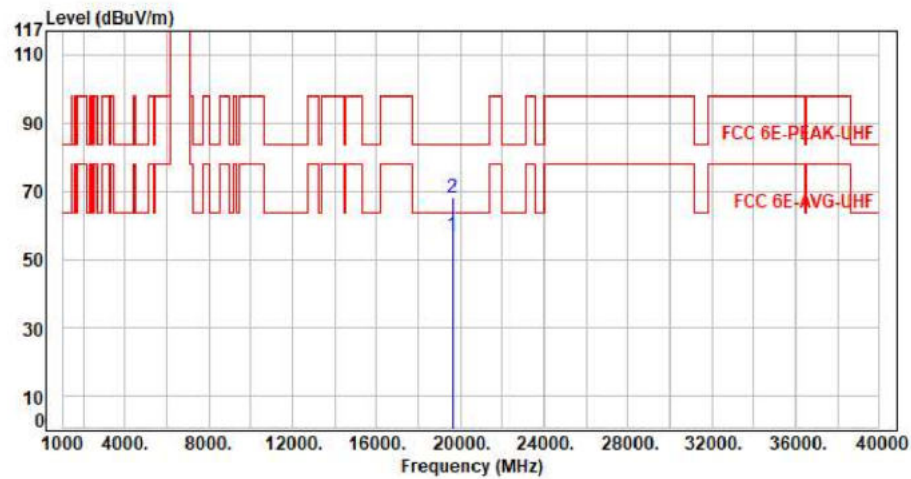


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	45.20	56.78	63.54	-6.76	Average	150	360	P
2	19635.00	11.58	56.39	67.97	83.54	-15.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

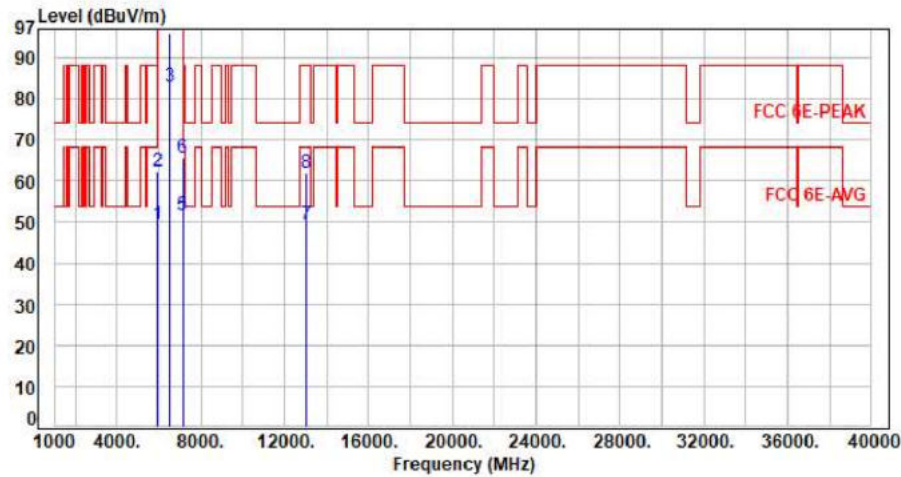

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.94	49.60	68.20	-18.60	Average	316	320	P
2	5925.00	7.66	54.64	62.30	88.20	-25.90	Peak	316	320	P
3	6505.00	8.37	74.52	82.89	200.00	-117.11	Average	316	320	P
4	6505.00	8.37	87.63	96.00	200.00	-104.00	Peak	316	320	P
5	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	316	320	P
6	7125.00	10.05	55.48	65.53	88.20	-22.67	Peak	316	320	P
7	13010.00	19.69	29.60	49.29	68.20	-18.91	Average	100	138	P
8	13010.00	19.69	42.18	61.87	88.20	-26.33	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

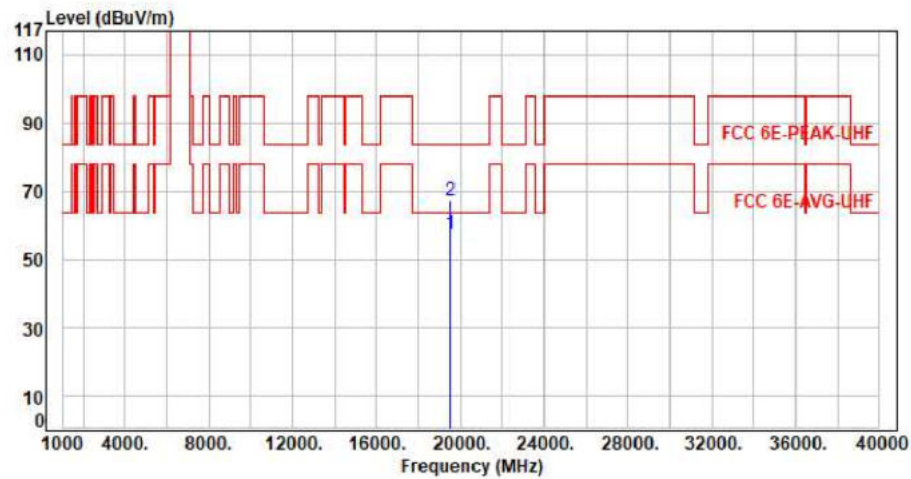


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.68	57.59	63.54	-5.95	Average	150	360	P
2	19515.00	11.91	55.21	67.12	83.54	-16.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

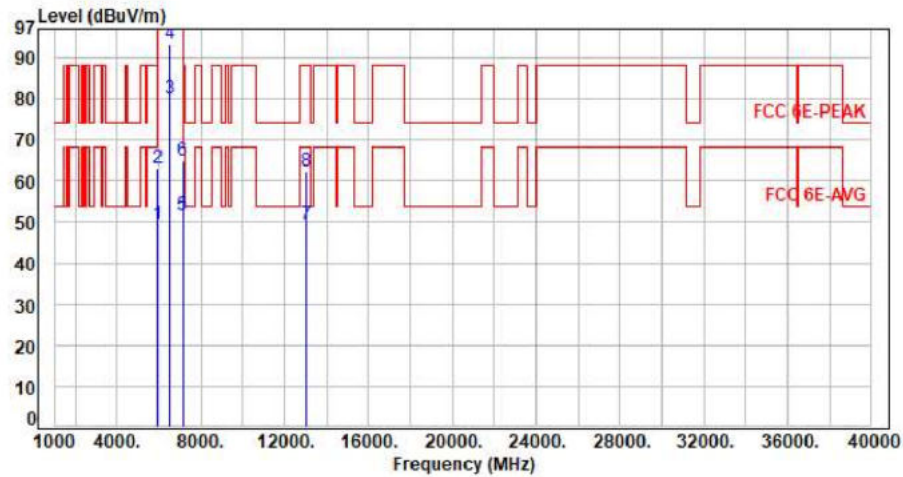


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	364	88	P
2	5925.00	7.66	55.57	63.23	88.20	-24.97	Peak	364	88	P
3	6505.00	8.37	71.77	80.14	200.00	-119.86	Average	364	88	P
4	6505.00	8.37	84.79	93.16	200.00	-106.84	Peak	364	88	P
5	7125.00	10.05	41.73	51.78	68.20	-16.42	Average	364	88	P
6	7125.00	10.05	54.89	64.94	88.20	-23.26	Peak	364	88	P
7	13010.00	19.69	29.63	49.32	68.20	-18.88	Average	100	134	P
8	13010.00	19.69	42.60	62.29	88.20	-25.91	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

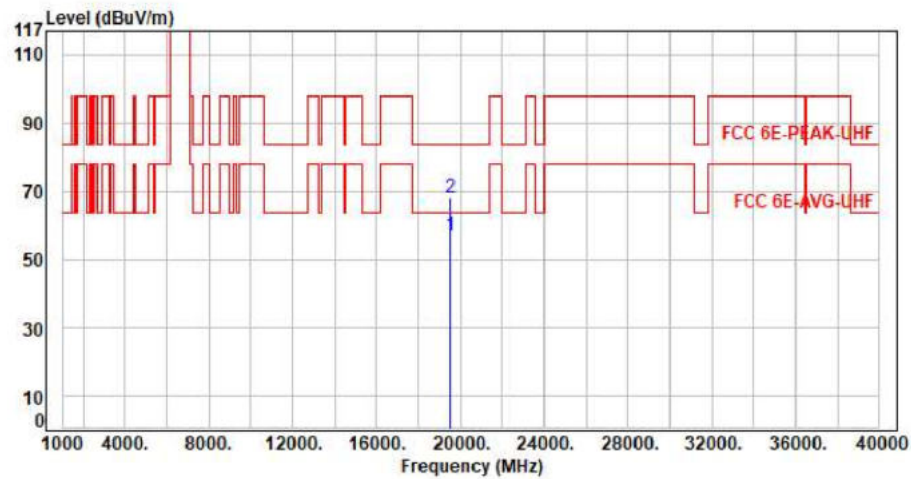


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.18	57.09	63.54	-6.45	Average	150	360	P
2	19515.00	11.91	56.12	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

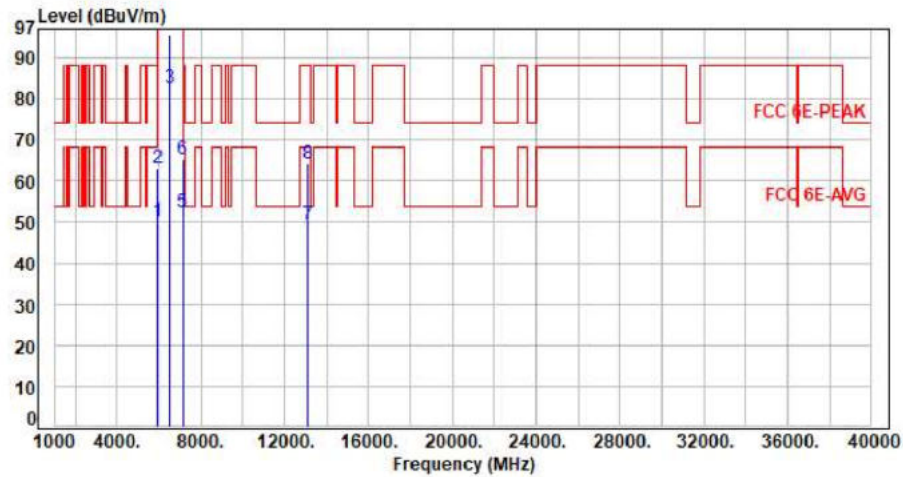


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.61	50.27	68.20	-17.93	Average	325	321	P
2	5925.00	7.66	55.28	62.94	88.20	-25.26	Peak	325	321	P
3	6535.00	8.50	74.22	82.72	200.00	-117.28	Average	325	321	P
4	6535.00	8.50	87.01	95.51	200.00	-104.49	Peak	325	321	P
5	7125.00	10.05	42.14	52.19	68.20	-16.01	Average	325	321	P
6	7125.00	10.05	55.10	65.15	88.20	-23.05	Peak	325	321	P
7	13070.00	20.11	29.14	49.25	68.20	-18.95	Average	100	126	P
8	13070.00	20.11	44.01	64.12	88.20	-24.08	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

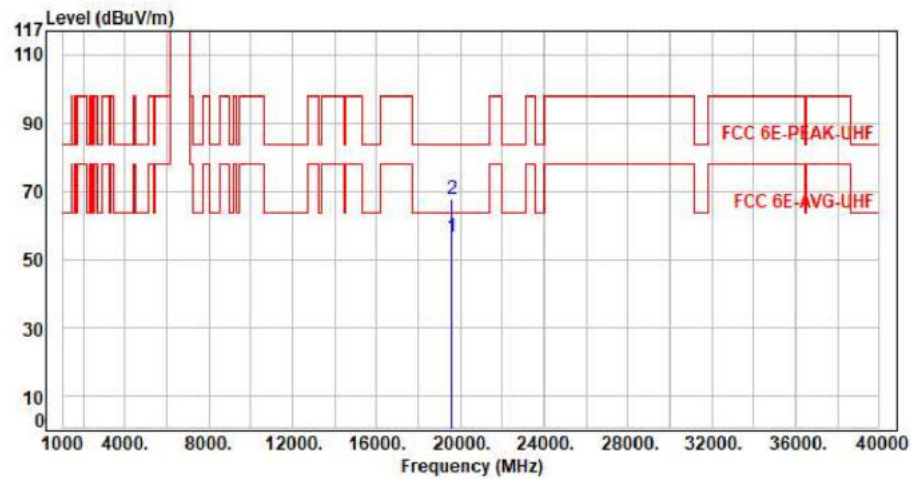


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.55	56.33	63.54	-7.21	Average	150	360	P
2	19605.00	11.78	55.95	67.73	83.54	-15.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

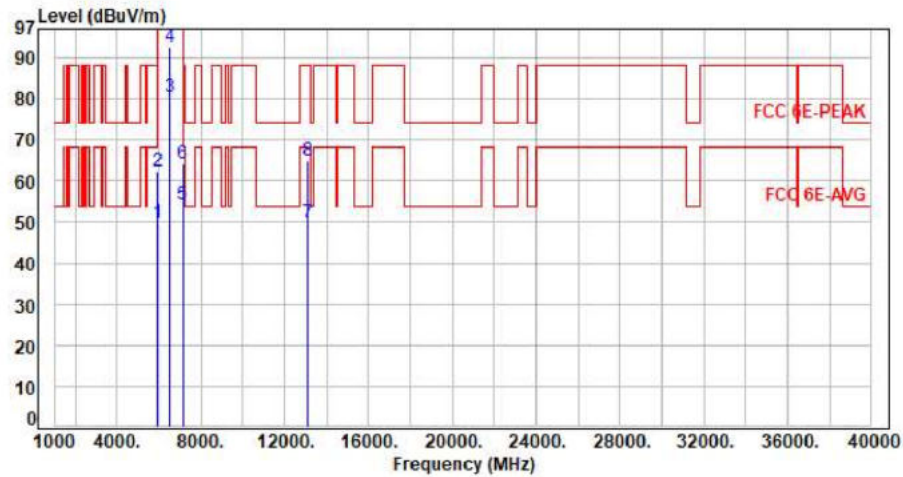


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	352	89	P
2	5925.00	7.66	54.82	62.48	88.20	-25.72	Peak	352	89	P
3	6535.00	8.50	71.77	80.27	200.00	-119.73	Average	352	89	P
4	6535.00	8.50	84.13	92.63	200.00	-107.37	Peak	352	89	P
5	7125.00	10.05	44.25	54.30	68.20	-13.90	Average	352	89	P
6	7125.00	10.05	54.17	64.22	88.20	-23.98	Peak	352	89	P
7	13070.00	20.11	29.77	49.88	68.20	-18.32	Average	100	114	P
8	13070.00	20.11	44.82	64.93	88.20	-23.27	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

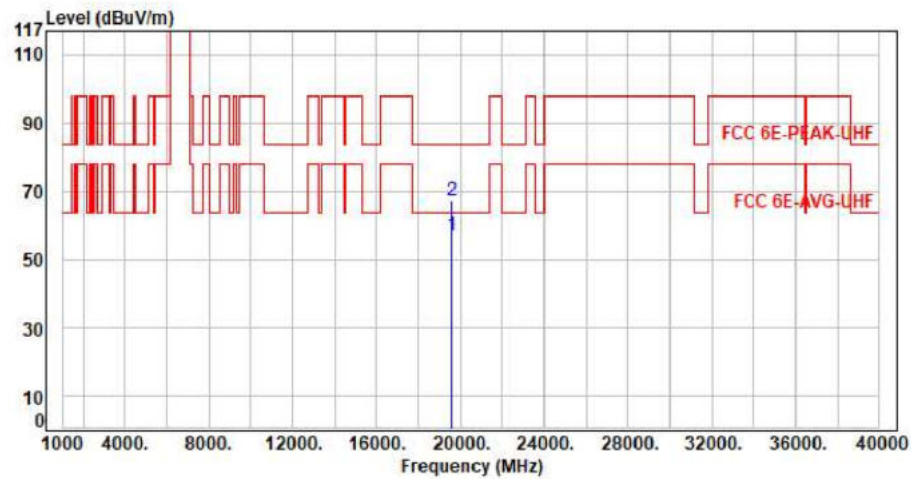


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	45.02	56.80	63.54	-6.74	Average	150	360	P
2	19605.00	11.78	55.39	67.17	83.54	-16.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

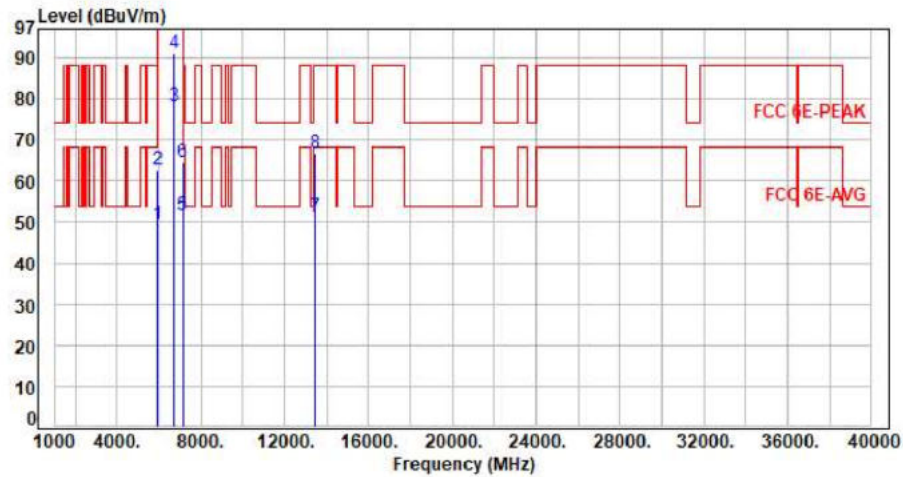

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.91	49.57	68.20	-18.63	Average	367	146	P
2	5925.00	7.66	55.01	62.67	88.20	-25.53	Peak	367	146	P
3	6715.00	9.29	68.94	78.23	200.00	-121.77	Average	367	146	P
4	6715.00	9.29	81.89	91.18	200.00	-108.82	Peak	367	146	P
5	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	367	146	P
6	7125.00	10.05	54.66	64.71	88.20	-23.49	Peak	367	146	P
7	13430.00	21.71	29.69	51.40	68.20	-16.80	Average	100	199	P
8	13430.00	21.71	44.89	66.60	88.20	-21.60	Peak	100	199	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

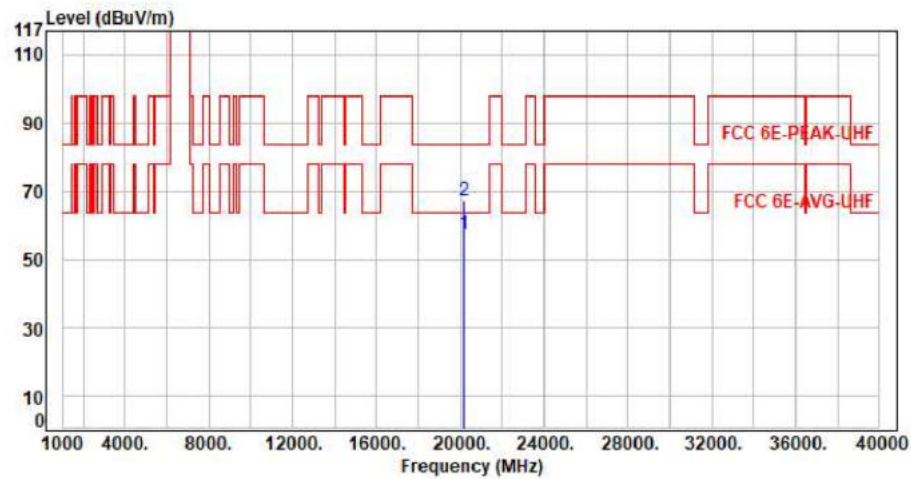


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.74	57.17	63.54	-6.37	Average	150	360	P
2	20145.00	11.43	55.90	67.33	83.54	-16.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

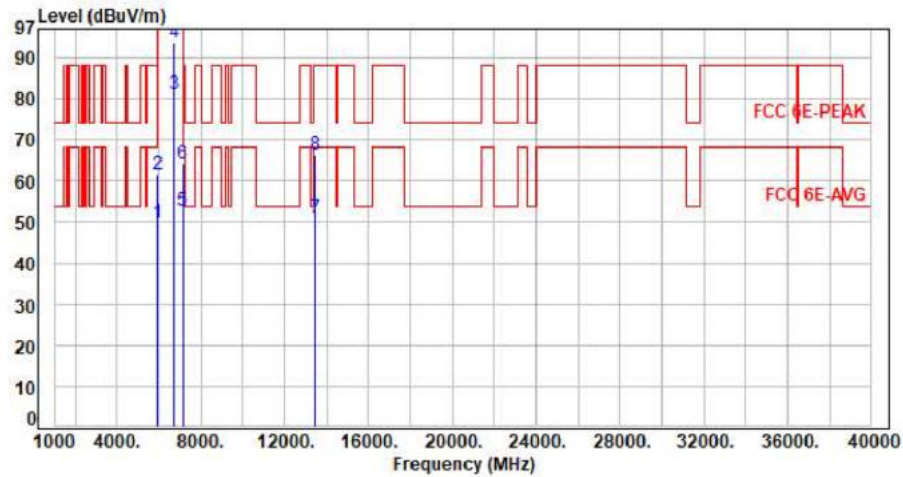

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	400	90	P
2	5925.00	7.66	54.11	61.77	88.20	-26.43	Peak	400	90	P
3	6715.00	9.29	71.87	81.16	200.00	-118.84	Average	400	90	P
4	6715.00	9.29	84.32	93.61	200.00	-106.39	Peak	400	90	P
5	7125.00	10.05	42.85	52.90	68.20	-15.30	Average	400	90	P
6	7125.00	10.05	54.17	64.22	88.20	-23.98	Peak	400	90	P
7	13430.00	21.71	29.32	51.03	68.20	-17.17	Average	100	177	P
8	13430.00	21.71	44.85	66.56	88.20	-21.64	Peak	100	177	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

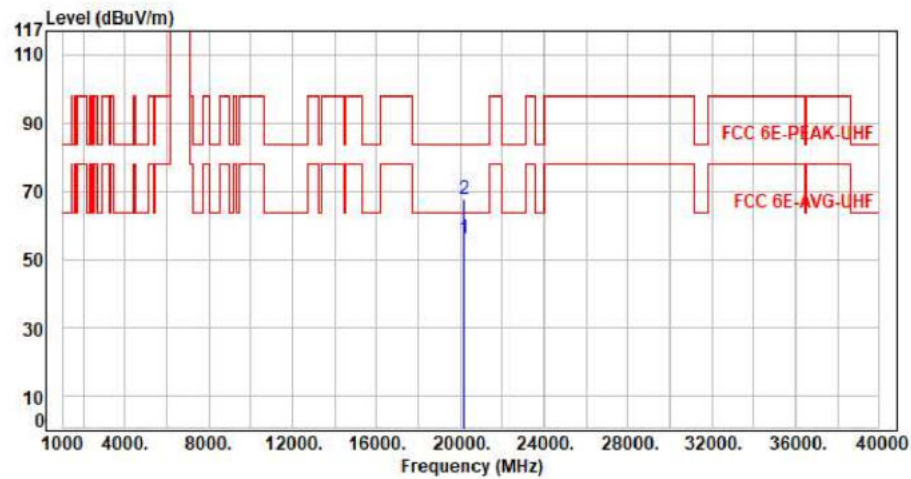


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.67	56.10	63.54	-7.44	Average	150	360	P
2	20145.00	11.43	56.01	67.44	83.54	-16.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

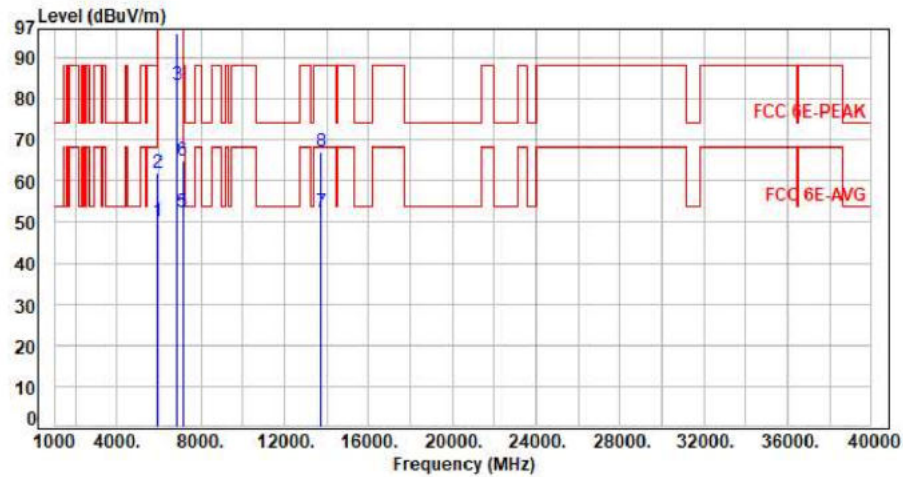


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.61	50.27	68.20	-17.93	Average	311	320	P
2	5925.00	7.66	54.17	61.83	88.20	-26.37	Peak	311	320	P
3	6855.00	9.50	73.71	83.21	200.00	-116.79	Average	311	320	P
4	6855.00	9.50	86.34	95.84	200.00	-104.16	Peak	311	320	P
5	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	311	320	P
6	7125.00	10.05	54.87	64.92	88.20	-23.28	Peak	311	320	P
7	13710.00	22.48	29.72	52.20	68.20	-16.00	Average	100	224	P
8	13710.00	22.48	44.72	67.20	88.20	-21.00	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

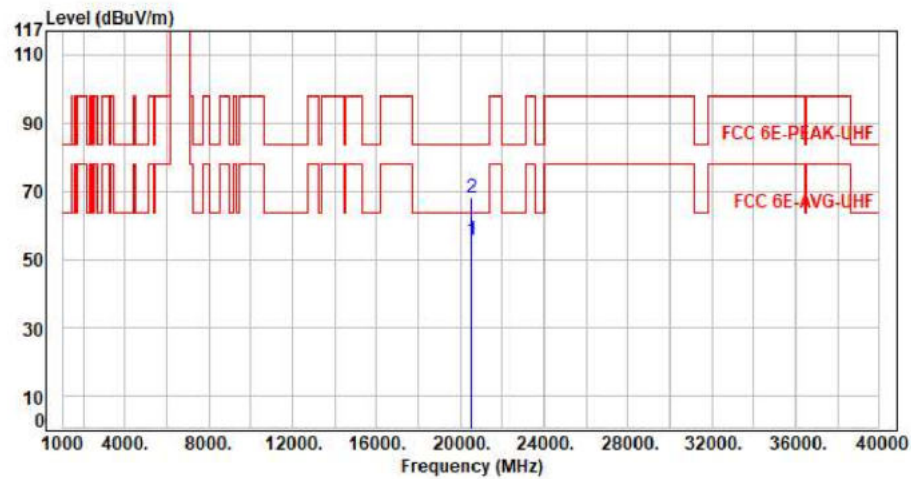


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.38	55.76	63.54	-7.78	Average	150	360	P
2	20565.00	11.38	56.89	68.27	83.54	-15.27	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

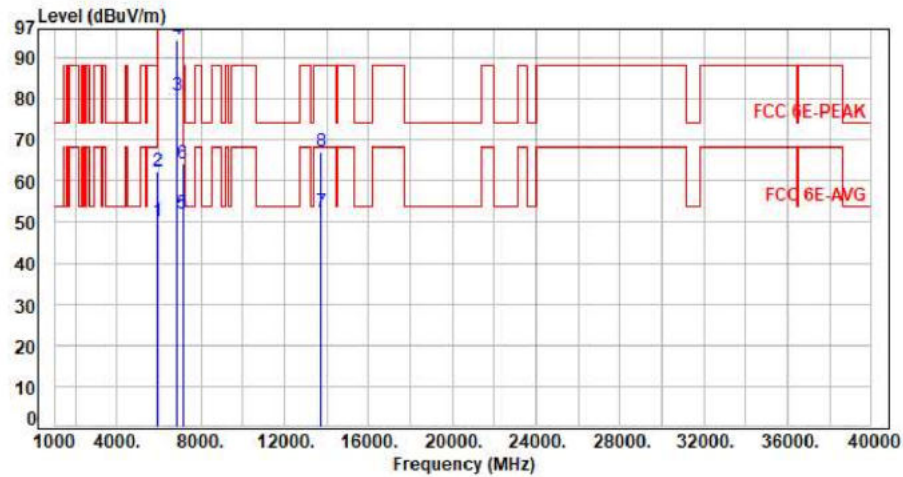

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.68	50.34	68.20	-17.86	Average	400	88	P
2	5925.00	7.66	54.81	62.47	88.20	-25.73	Peak	400	88	P
3	6855.00	9.50	71.32	80.82	200.00	-119.18	Average	400	88	P
4	6855.00	9.50	84.80	94.30	200.00	-105.70	Peak	400	88	P
5	7125.00	10.05	42.10	52.15	68.20	-16.05	Average	400	88	P
6	7125.00	10.05	54.30	64.35	88.20	-23.85	Peak	400	88	P
7	13710.00	22.48	29.81	52.29	68.20	-15.91	Average	100	130	P
8	13710.00	22.48	44.82	67.30	88.20	-20.90	Peak	100	130	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

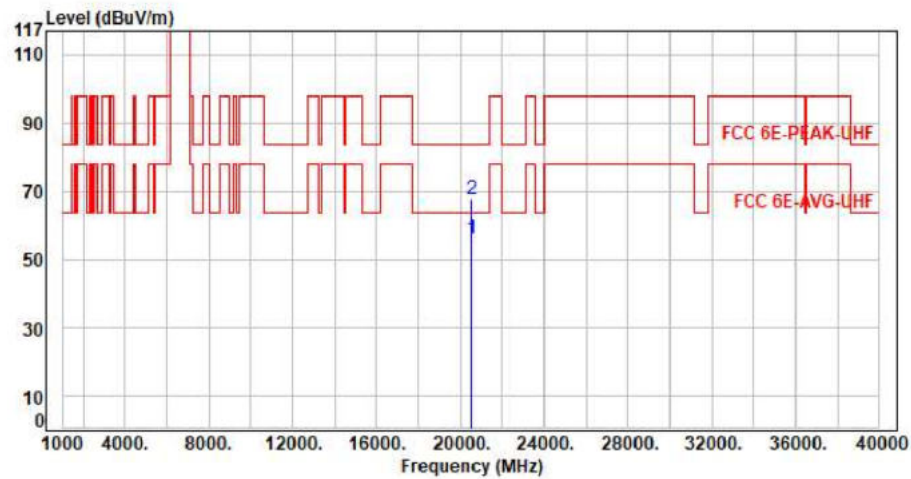


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.69	56.07	63.54	-7.47	Average	150	360	P
2	20565.00	11.38	56.31	67.69	83.54	-15.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

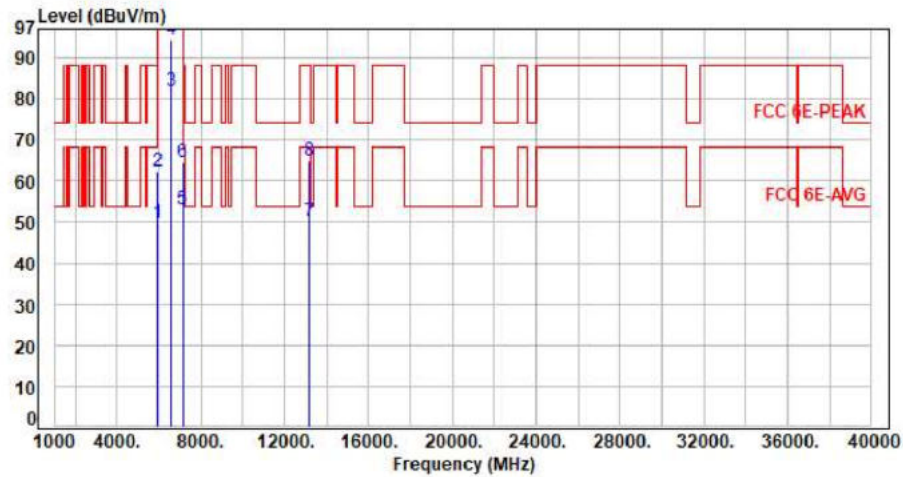


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.19	49.85	68.20	-18.35	Average	360	312	P
2	5925.00	7.66	54.71	62.37	88.20	-25.83	Peak	360	312	P
3	6565.00	8.67	73.26	81.93	200.00	-118.07	Average	360	312	P
4	6565.00	8.67	85.76	94.43	200.00	-105.57	Peak	360	312	P
5	7125.00	10.05	43.05	53.10	68.20	-15.10	Average	360	312	P
6	7125.00	10.05	54.66	64.71	88.20	-23.49	Peak	360	312	P
7	13130.00	20.32	29.76	50.08	68.20	-18.12	Average	100	133	P
8	13130.00	20.32	44.76	65.08	88.20	-23.12	Peak	100	133	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

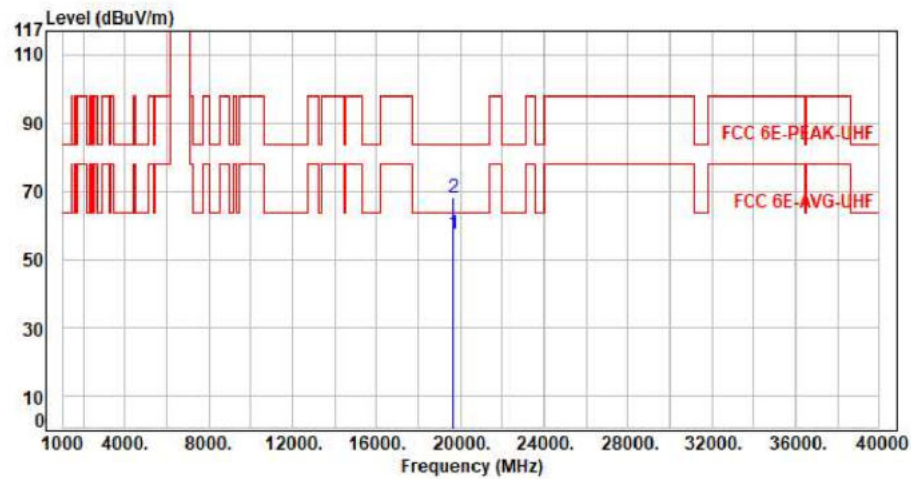


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.85	57.30	63.54	-6.24	Average	150	360	P
2	19695.00	11.45	56.64	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

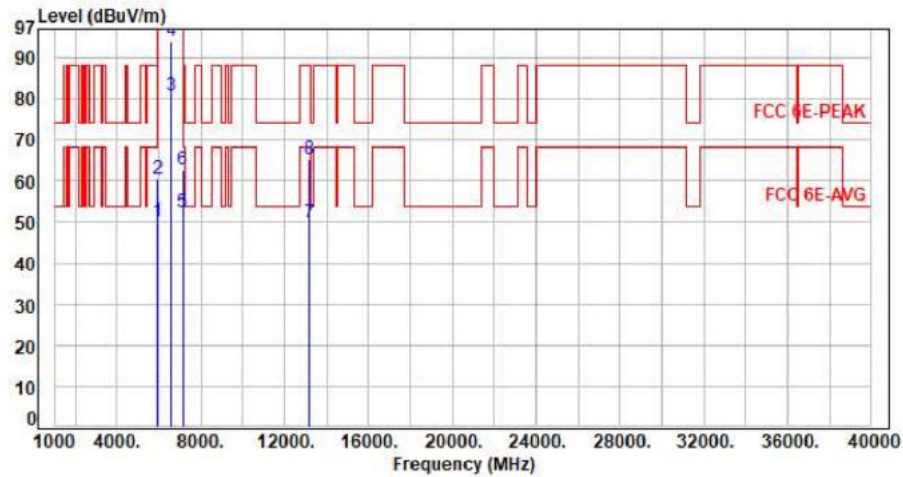

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.43	50.09	68.20	-18.11	Average	365	90	P
2	5925.00	7.66	52.67	60.33	88.20	-27.87	Peak	365	90	P
3	6565.00	8.67	71.99	80.66	200.00	-119.34	Average	365	90	P
4	6565.00	8.67	85.42	94.09	200.00	-105.91	Peak	365	90	P
5	7125.00	10.05	42.16	52.21	68.20	-15.99	Average	365	90	P
6	7125.00	10.05	52.80	62.85	88.20	-25.35	Peak	365	90	P
7	13130.00	20.32	29.50	49.82	68.20	-18.38	Average	100	150	P
8	13130.00	20.32	44.99	65.31	88.20	-22.89	Peak	100	150	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

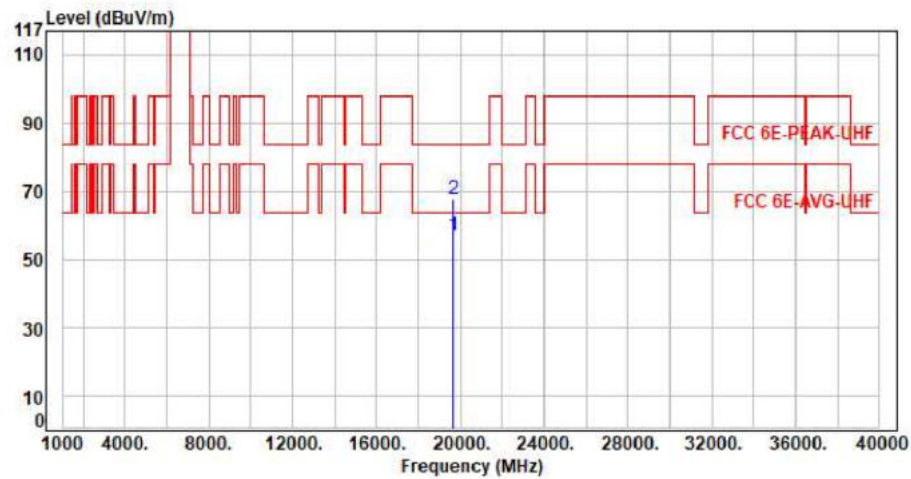


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.42	56.87	63.54	-6.67	Average	150	360	P
2	19695.00	11.45	56.21	67.66	83.54	-15.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

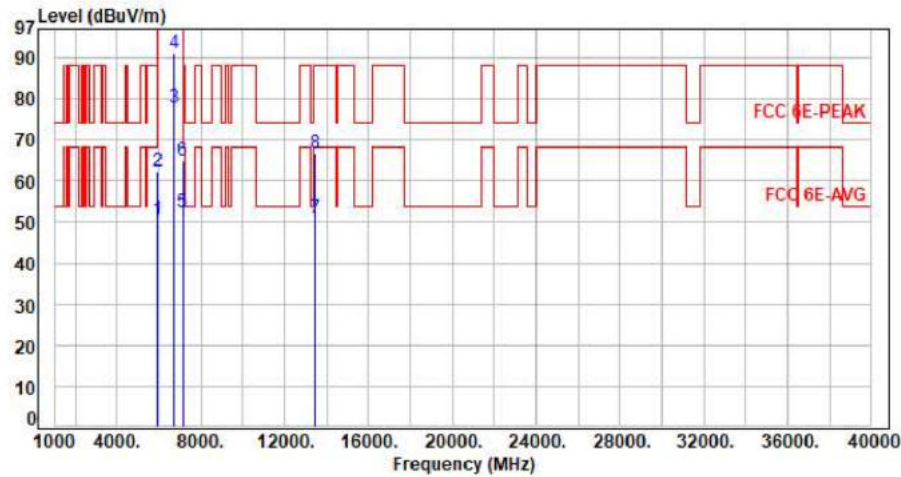


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.75	50.41	68.20	-17.79	Average	354	146	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	354	146	P
3	6725.00	9.33	68.42	77.75	200.00	-122.25	Average	354	146	P
4	6725.00	9.33	81.76	91.09	200.00	-108.91	Peak	354	146	P
5	7125.00	10.05	42.15	52.20	68.20	-16.00	Average	354	146	P
6	7125.00	10.05	54.80	64.85	88.20	-23.35	Peak	354	146	P
7	13450.00	21.80	29.15	50.95	68.20	-17.25	Average	100	176	P
8	13450.00	21.80	44.88	66.68	88.20	-21.52	Peak	100	176	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

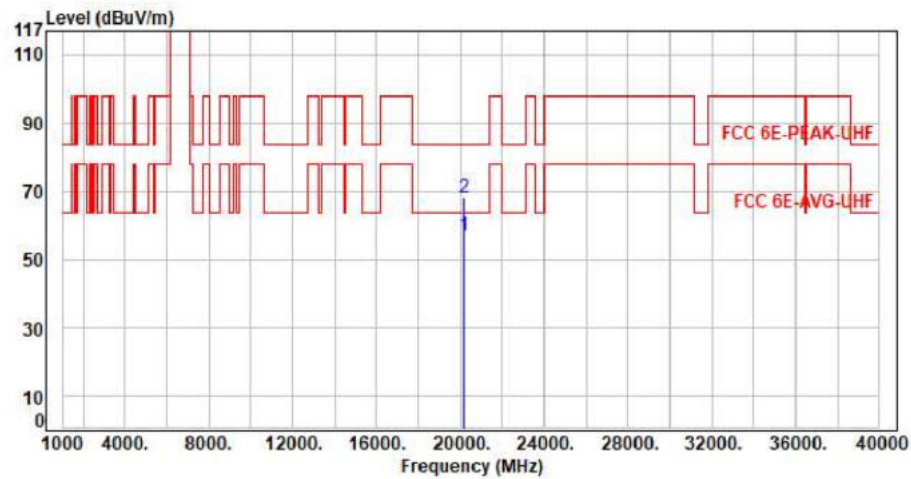


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.33	56.79	63.54	-6.75	Average	150	360	P
2	20175.00	11.46	56.66	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

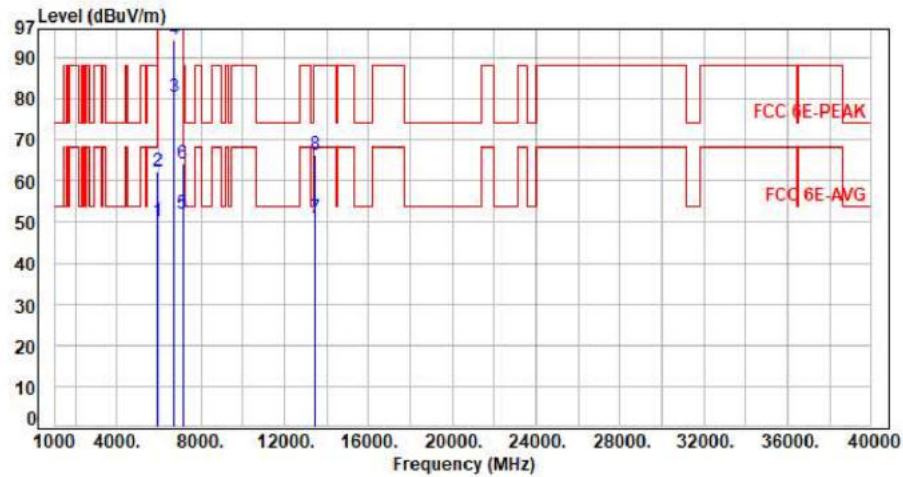


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.62	50.28	68.20	-17.92	Average	394	88	P
2	5925.00	7.66	54.62	62.28	88.20	-25.92	Peak	394	88	P
3	6725.00	9.33	71.23	80.56	200.00	-119.44	Average	394	88	P
4	6725.00	9.33	85.01	94.34	200.00	-105.66	Peak	394	88	P
5	7125.00	10.05	42.12	52.17	68.20	-16.03	Average	394	88	P
6	7125.00	10.05	54.24	64.29	88.20	-23.91	Peak	394	88	P
7	13450.00	21.80	29.23	51.03	68.20	-17.17	Average	100	338	P
8	13450.00	21.80	44.62	66.42	88.20	-21.78	Peak	100	338	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

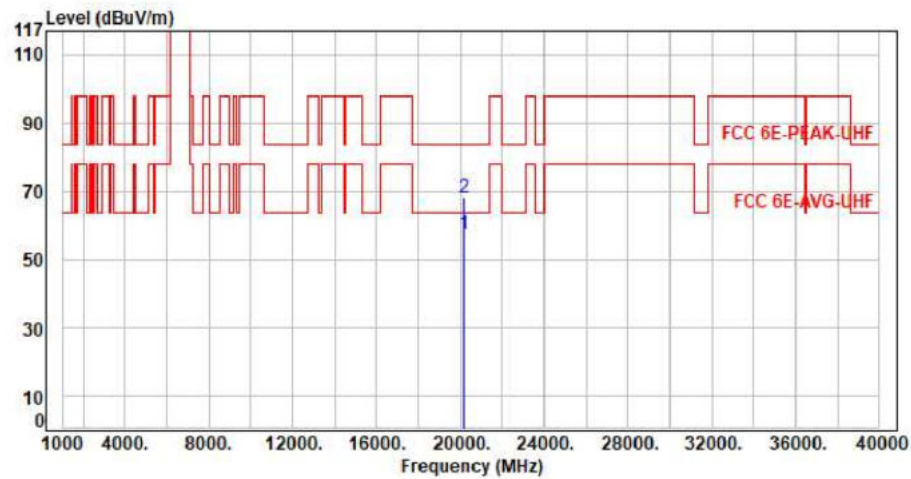


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.76	57.22	63.54	-6.32	Average	150	360	P
2	20175.00	11.46	56.66	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

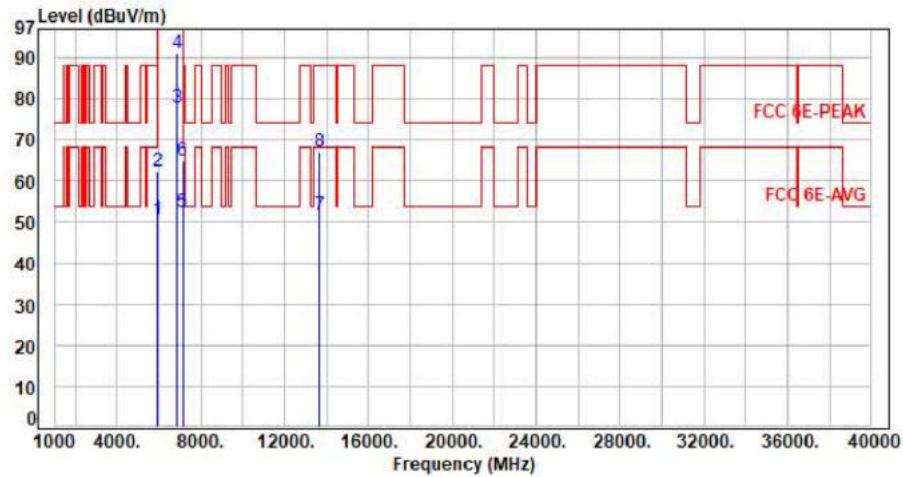


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.93	50.59	68.20	-17.61	Average	400	71	P
2	5925.00	7.66	54.80	62.46	88.20	-25.74	Peak	400	71	P
3	6845.00	9.48	68.20	77.68	200.00	-122.32	Average	400	71	P
4	6845.00	9.48	81.68	91.16	200.00	-108.84	Peak	400	71	P
5	7125.00	10.05	42.37	52.42	68.20	-15.78	Average	400	71	P
6	7125.00	10.05	54.81	64.86	88.20	-23.34	Peak	400	71	P
7	13690.00	22.40	29.20	51.60	68.20	-16.60	Average	100	179	P
8	13690.00	22.40	44.68	67.08	88.20	-21.12	Peak	100	179	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

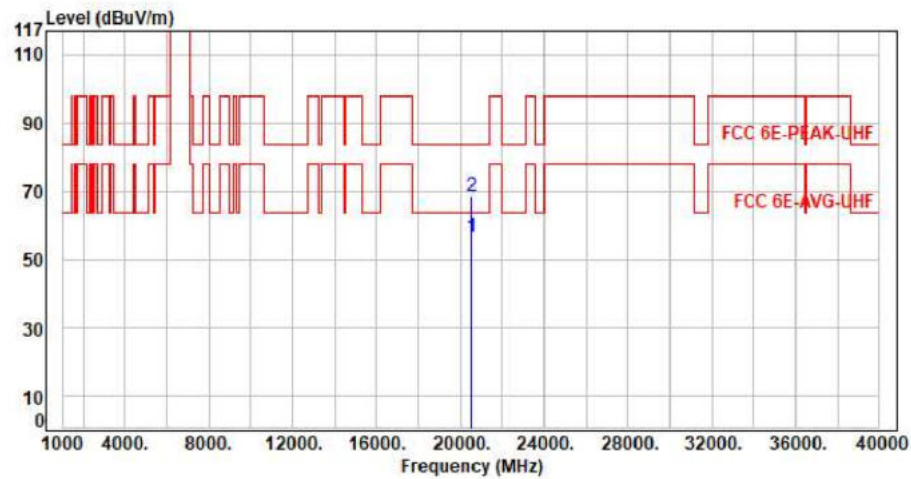


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.99	56.43	63.54	-7.11	Average	150	360	P
2	20535.00	11.44	56.89	68.33	83.54	-15.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

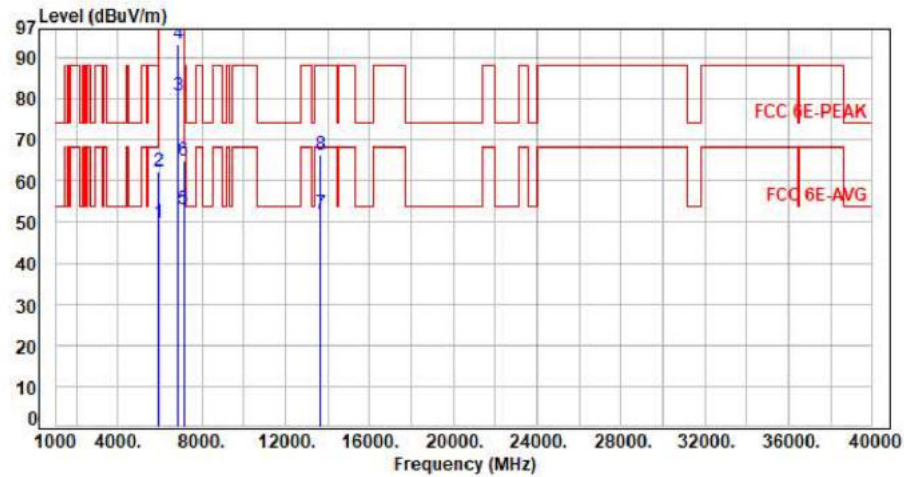

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	397	88	P
2	5925.00	7.66	54.72	62.38	88.20	-25.82	Peak	397	88	P
3	6845.00	9.48	71.14	80.62	200.00	-119.38	Average	397	88	P
4	6845.00	9.48	83.77	93.25	200.00	-106.75	Peak	397	88	P
5	7125.00	10.05	42.98	53.03	68.20	-15.17	Average	397	88	P
6	7125.00	10.05	54.84	64.89	88.20	-23.31	Peak	397	88	P
7	13690.00	22.40	29.77	52.17	68.20	-16.03	Average	100	142	P
8	13690.00	22.40	44.14	66.54	88.20	-21.66	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

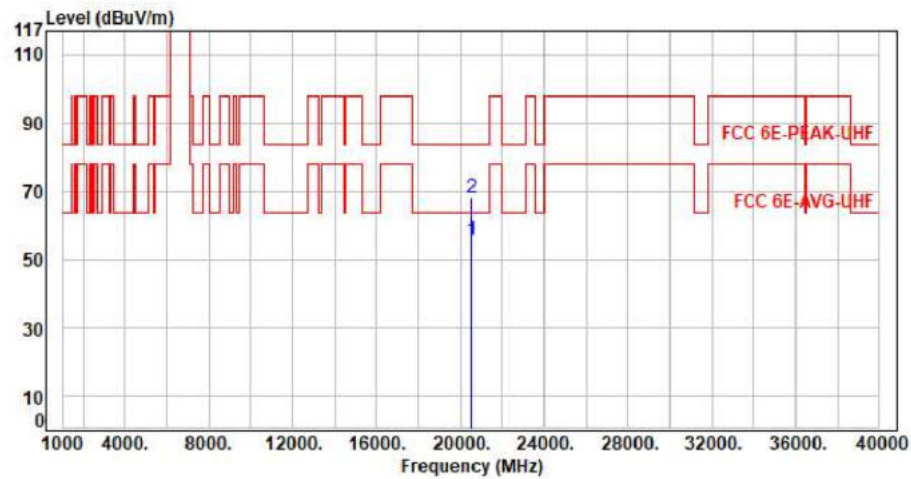


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.32	55.76	63.54	-7.78	Average	150	360	P
2	20535.00	11.44	56.43	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

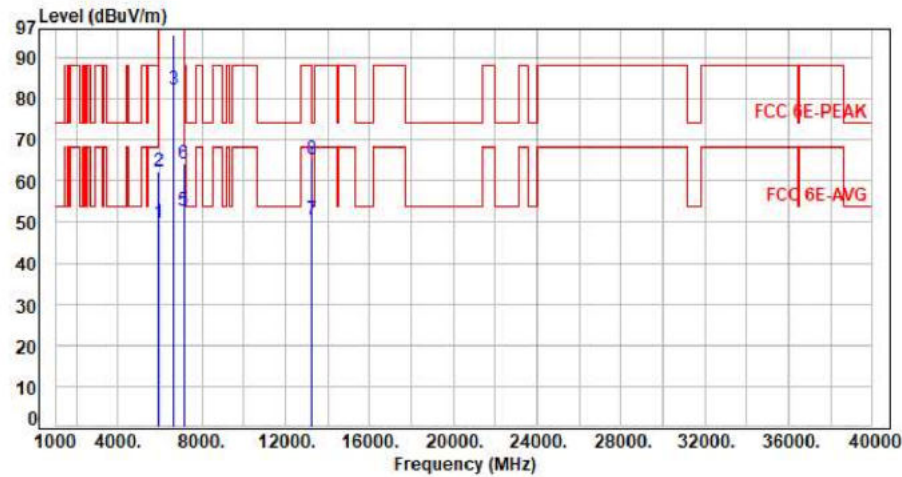

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	398	329	P
2	5925.00	7.66	54.62	62.28	88.20	-25.92	Peak	398	329	P
3	6625.00	8.94	73.40	82.34	200.00	-117.66	Average	398	329	P
4	6625.00	8.94	86.55	95.49	200.00	-104.51	Peak	398	329	P
5	7125.00	10.05	42.84	52.89	68.20	-15.31	Average	398	329	P
6	7125.00	10.05	54.20	64.25	88.20	-23.95	Peak	398	329	P
7	13250.00	21.00	29.56	50.56	54.00	-3.44	Average	100	184	P
8	13250.00	21.00	44.41	65.41	74.00	-8.59	Peak	100	184	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

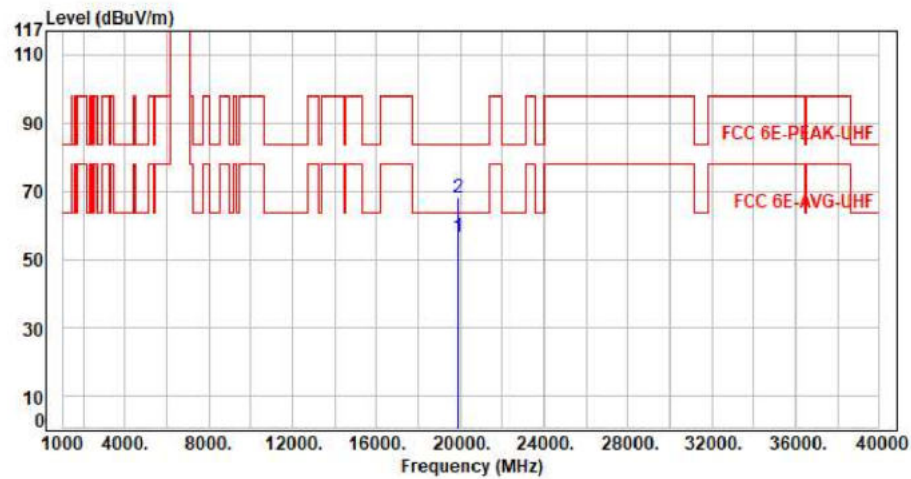

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.62	56.52	63.54	-7.02	Average	150	360	P
2	19875.00	11.90	56.00	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

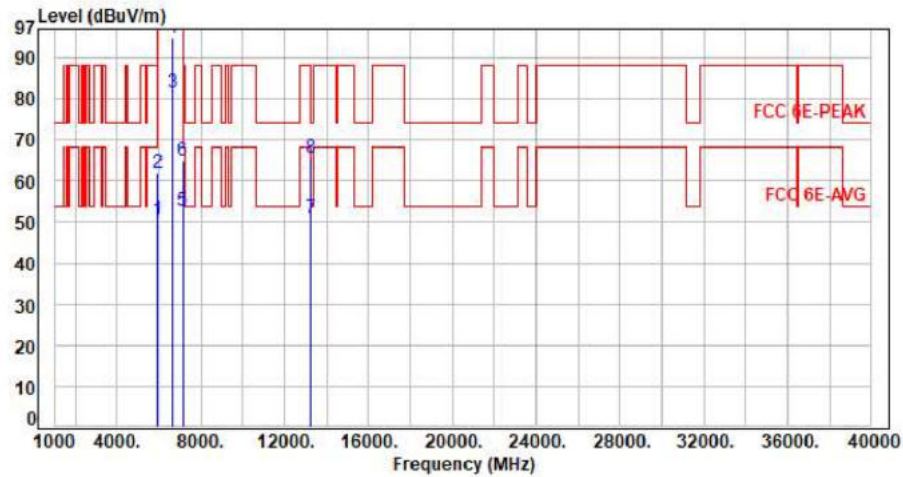

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.82	50.48	68.20	-17.72	Average	392	90	P
2	5925.00	7.66	54.38	62.04	88.20	-26.16	Peak	392	90	P
3	6625.00	8.94	72.44	81.38	200.00	-118.62	Average	392	90	P
4	6625.00	8.94	85.83	94.77	200.00	-105.23	Peak	392	90	P
5	7125.00	10.05	42.87	52.92	68.20	-15.28	Average	392	90	P
6	7125.00	10.05	54.82	64.87	88.20	-23.33	Peak	392	90	P
7	13250.00	21.00	29.84	50.84	54.00	-3.16	Average	100	314	P
8	13250.00	21.00	44.73	65.73	74.00	-8.27	Peak	100	314	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

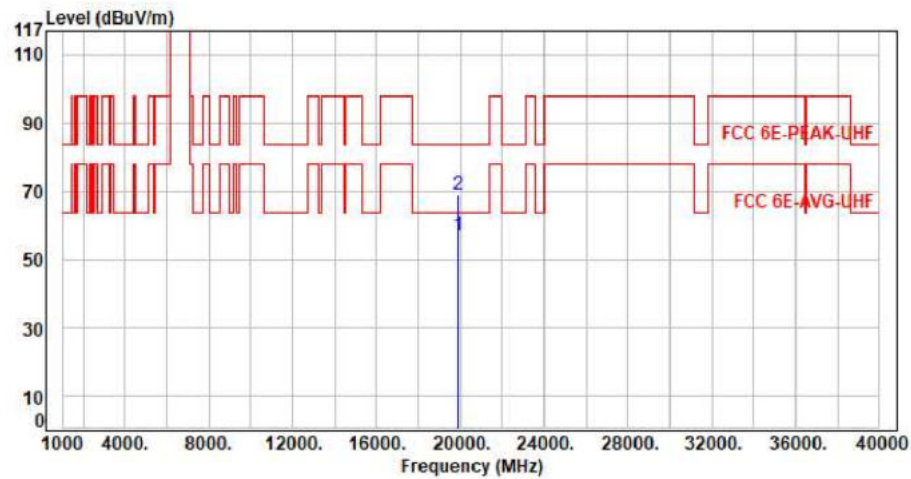


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.09	56.99	63.54	-6.55	Average	150	360	P
2	19875.00	11.90	56.94	68.84	83.54	-14.70	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

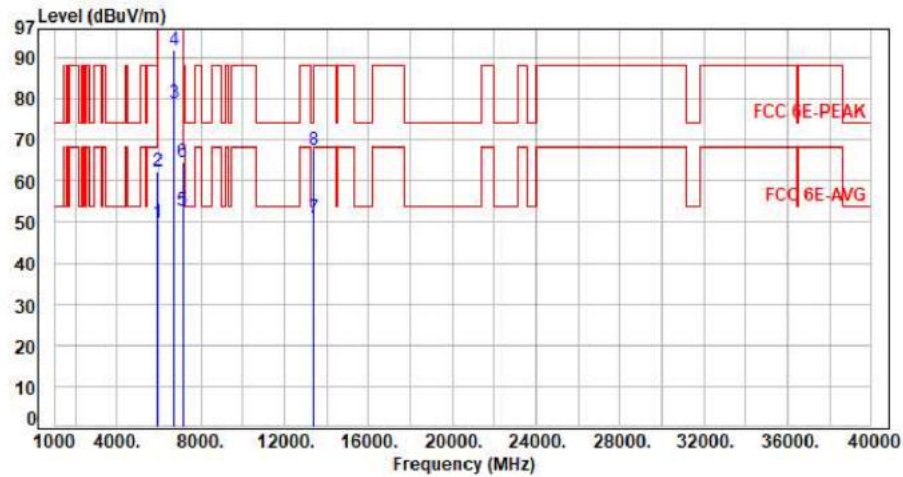


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	398	147	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	398	147	P
3	6705.00	9.25	69.68	78.93	200.00	-121.07	Average	398	147	P
4	6705.00	9.25	82.75	92.00	200.00	-108.00	Peak	398	147	P
5	7125.00	10.05	42.52	52.57	68.20	-15.63	Average	398	147	P
6	7125.00	10.05	54.37	64.42	88.20	-23.78	Peak	398	147	P
7	13410.00	21.62	29.11	50.73	68.20	-17.47	Average	100	137	P
8	13410.00	21.62	45.69	67.31	88.20	-20.89	Peak	100	137	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

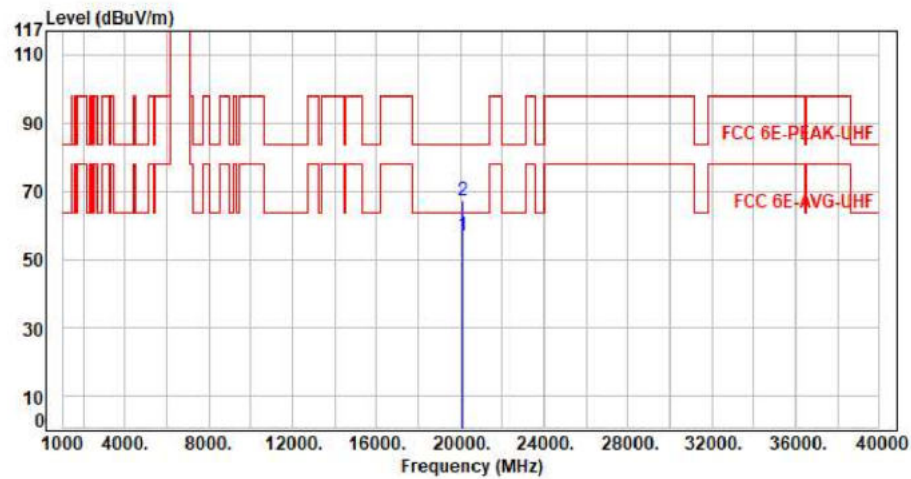

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.66	57.06	63.54	-6.48	Average	150	360	P
2	20115.00	11.40	55.66	67.06	83.54	-16.48	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor