




For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

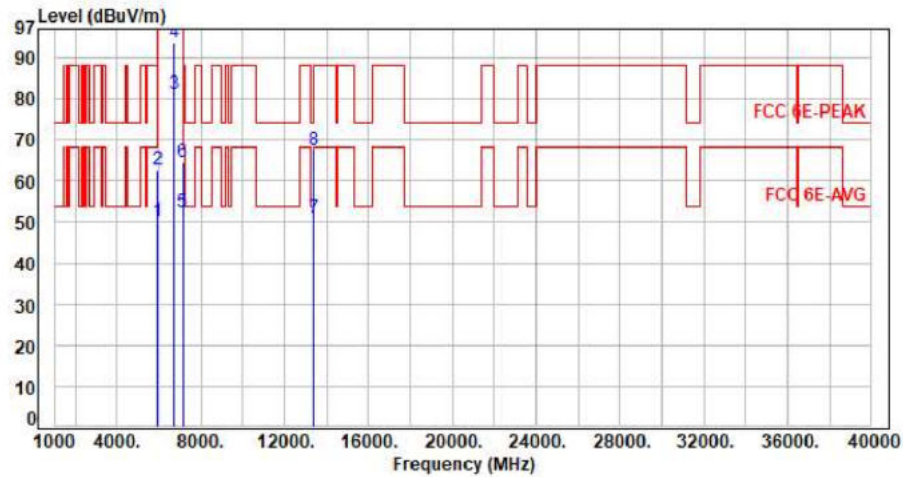


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	400	90	P
2	5925.00	7.66	54.88	62.54	88.20	-25.66	Peak	400	90	P
3	6705.00	9.25	71.78	81.03	200.00	-118.97	Average	400	90	P
4	6705.00	9.25	84.45	93.70	200.00	-106.30	Peak	400	90	P
5	7125.00	10.05	42.30	52.35	68.20	-15.85	Average	400	90	P
6	7125.00	10.05	54.50	64.55	88.20	-23.65	Peak	400	90	P
7	13410.00	21.62	29.30	50.92	68.20	-17.28	Average	100	112	P
8	13410.00	21.62	45.78	67.40	88.20	-20.80	Peak	100	112	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

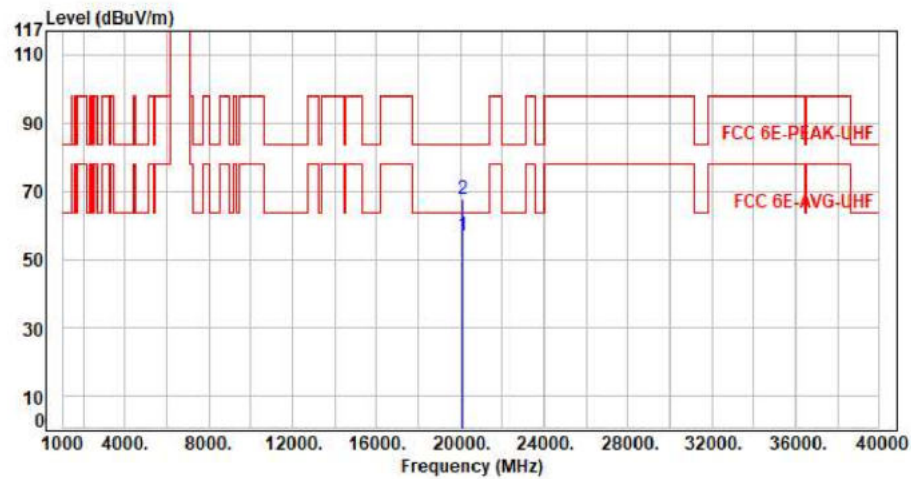


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.57	56.97	63.54	-6.57	Average	150	360	P
2	20115.00	11.40	56.03	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

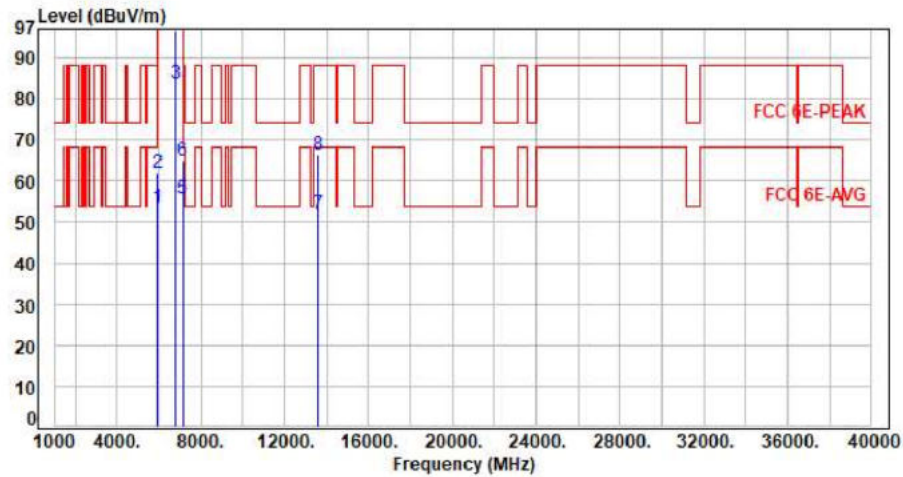

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	45.93	53.59	68.20	-14.61	Average	325	319	P
2	5925.00	7.66	54.24	61.90	88.20	-26.30	Peak	325	319	P
3	6785.00	9.46	74.24	83.70	200.00	-116.30	Average	325	319	P
4	6785.00	9.46	87.24	96.70	200.00	-103.30	Peak	325	319	P
5	7125.00	10.05	45.51	55.56	68.20	-12.64	Average	325	319	P
6	7125.00	10.05	54.98	65.03	88.20	-23.17	Peak	325	319	P
7	13570.00	22.06	29.78	51.84	68.20	-16.36	Average	100	134	P
8	13570.00	22.06	44.29	66.35	88.20	-21.85	Peak	100	134	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

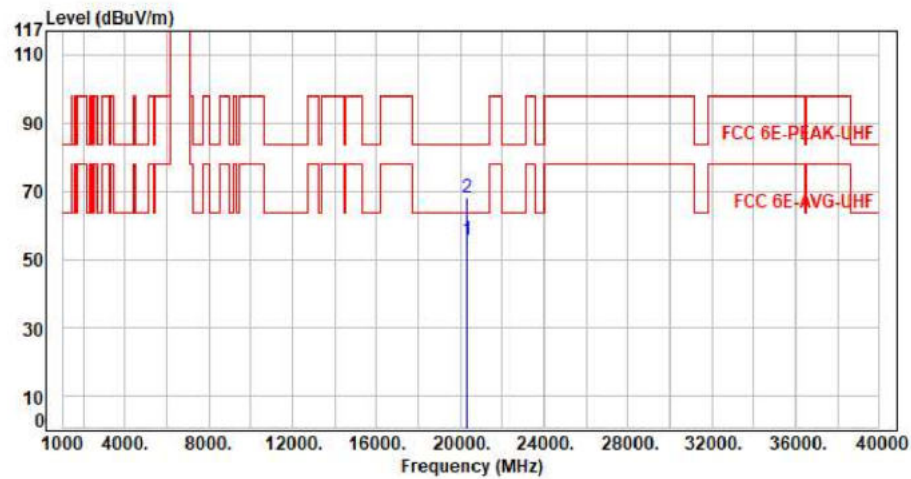


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.45	55.51	63.54	-8.03	Average	150	360	P
2	20355.00	11.06	56.95	68.01	83.54	-15.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

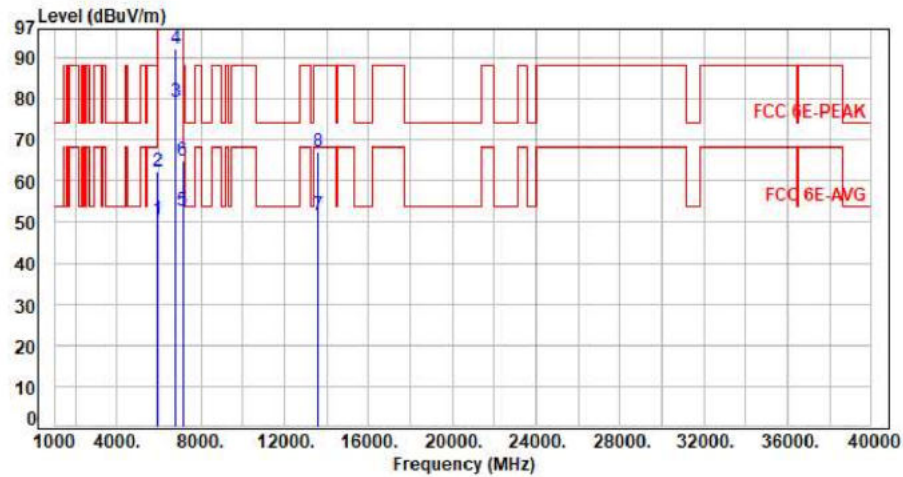

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.87	50.53	68.20	-17.67	Average	369	47	P
2	5925.00	7.66	54.69	62.35	88.20	-25.85	Peak	369	47	P
3	6785.00	9.46	70.00	79.46	200.00	-120.54	Average	369	47	P
4	6785.00	9.46	82.78	92.24	200.00	-107.76	Peak	369	47	P
5	7125.00	10.05	42.70	52.75	68.20	-15.45	Average	369	47	P
6	7125.00	10.05	54.87	64.92	88.20	-23.28	Peak	369	47	P
7	13570.00	22.06	29.67	51.73	68.20	-16.47	Average	100	178	P
8	13570.00	22.06	45.19	67.25	88.20	-20.95	Peak	100	178	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

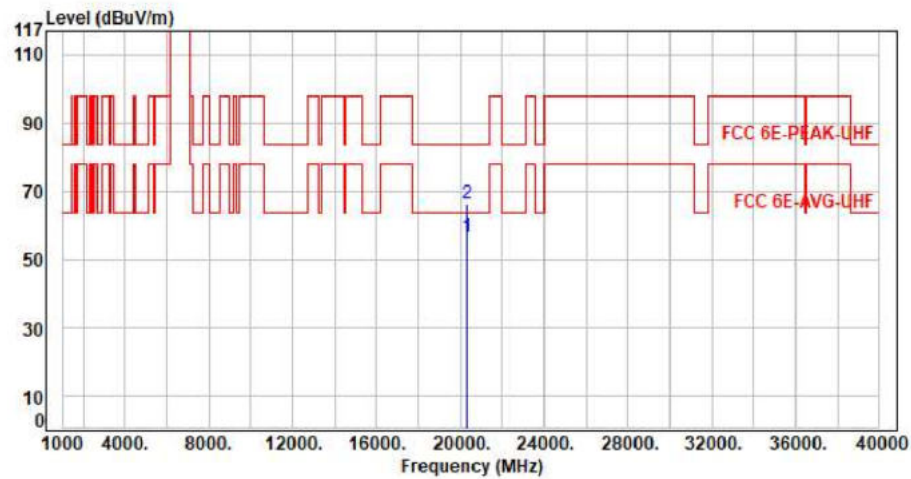


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.31	56.37	63.54	-7.17	Average	150	360	P
2	20355.00	11.06	55.35	66.41	83.54	-17.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

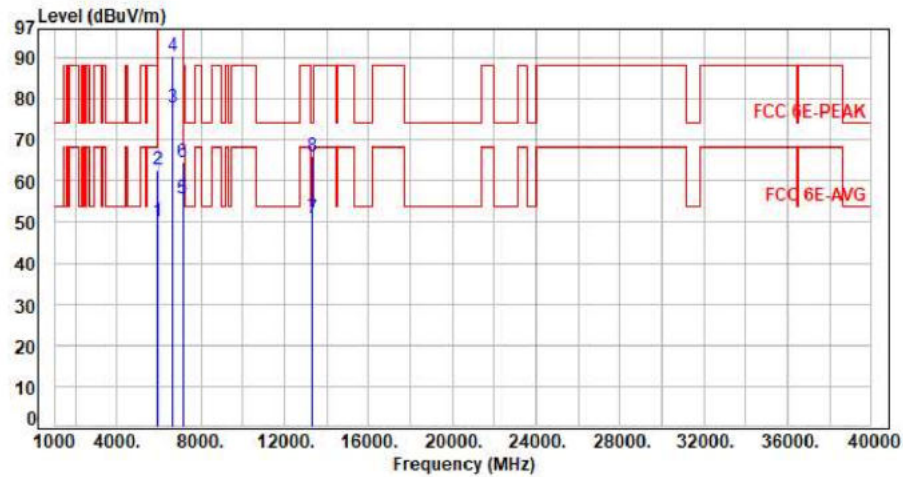

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.62	50.28	68.20	-17.92	Average	351	143	P
2	5925.00	7.66	54.89	62.55	88.20	-25.65	Peak	351	143	P
3	6665.00	9.08	68.73	77.81	200.00	-122.19	Average	351	143	P
4	6665.00	9.08	81.37	90.45	200.00	-109.55	Peak	351	143	P
5	7125.00	10.05	45.54	55.59	68.20	-12.61	Average	351	143	P
6	7125.00	10.05	54.31	64.36	88.20	-23.84	Peak	351	143	P
7	13330.00	21.30	29.74	51.04	54.00	-2.96	Average	100	197	P
8	13330.00	21.30	44.66	65.96	74.00	-8.04	Peak	100	197	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

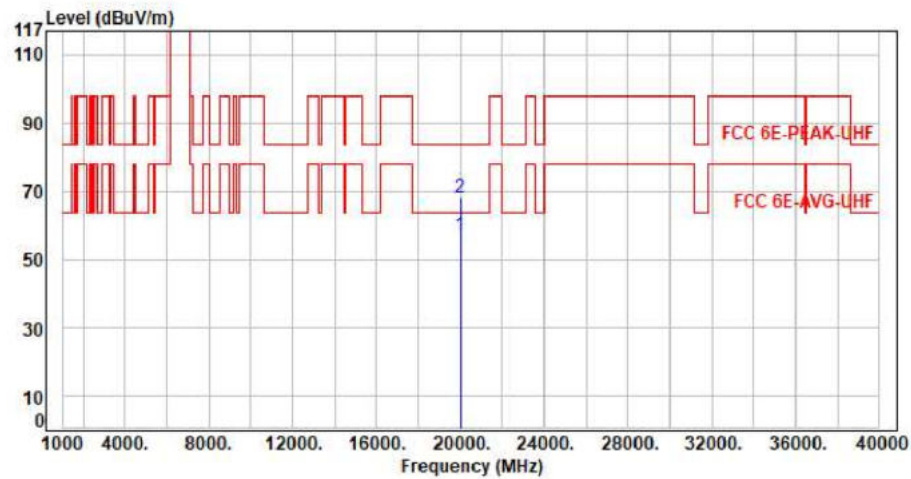


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.28	56.98	63.54	-6.56	Average	150	360	P
2	19995.00	11.70	56.49	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

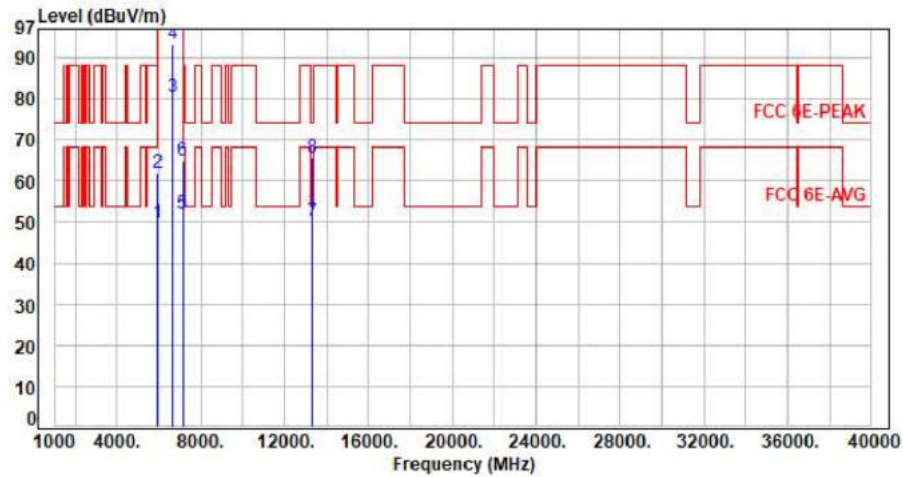


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.19	49.85	68.20	-18.35	Average	400	88	P
2	5925.00	7.66	54.38	62.04	88.20	-26.16	Peak	400	88	P
3	6665.00	9.08	71.32	80.40	200.00	-119.60	Average	400	88	P
4	6665.00	9.08	84.30	93.38	200.00	-106.62	Peak	400	88	P
5	7125.00	10.05	42.09	52.14	68.20	-16.06	Average	400	88	P
6	7125.00	10.05	54.90	64.95	88.20	-23.25	Peak	400	88	P
7	13330.00	21.30	28.74	50.04	54.00	-3.96	Average	100	112	P
8	13330.00	21.30	44.31	65.61	74.00	-8.39	Peak	100	112	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

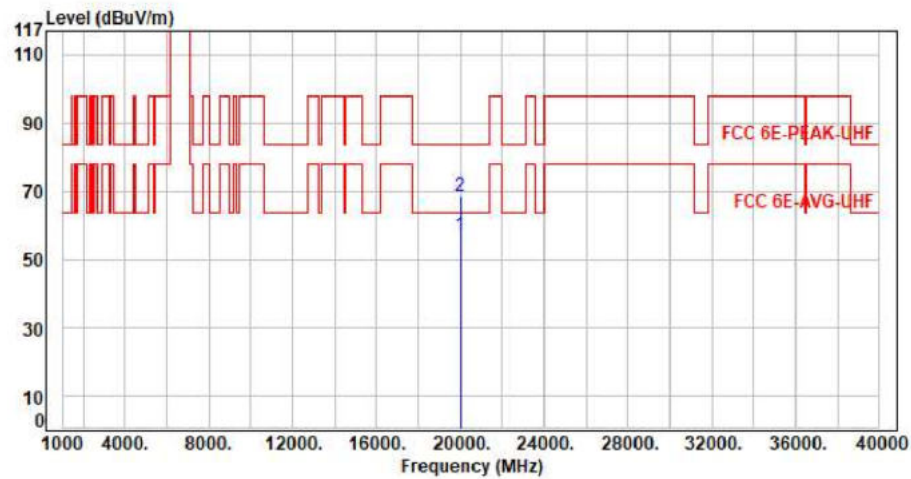


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.25	56.95	63.54	-6.59	Average	150	360	P
2	19995.00	11.70	56.81	68.51	83.54	-15.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

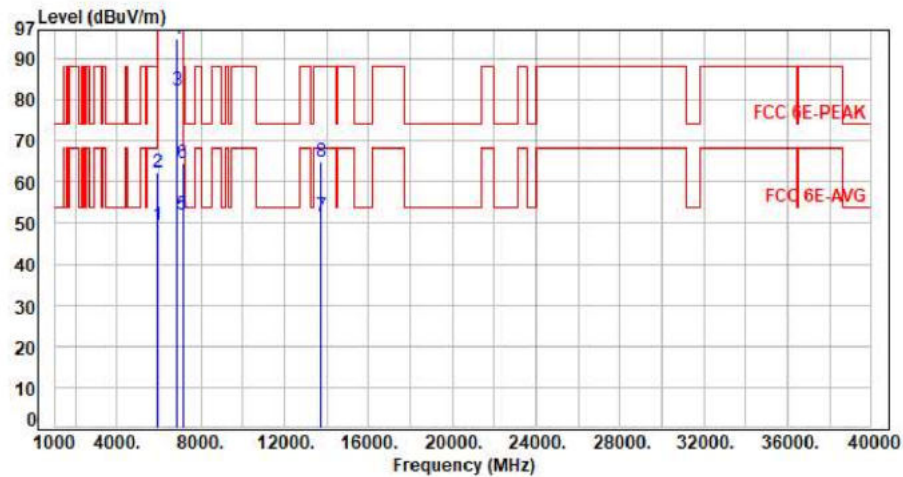


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.92	49.58	68.20	-18.62	Average	279	309	P
2	5925.00	7.66	54.72	62.38	88.20	-25.82	Peak	279	309	P
3	6875.00	9.55	72.65	82.20	200.00	-117.80	Average	279	309	P
4	6875.00	9.55	85.33	94.88	200.00	-105.12	Peak	279	309	P
5	7125.00	10.05	41.86	51.91	68.20	-16.29	Average	279	309	P
6	7125.00	10.05	54.61	64.66	88.20	-23.54	Peak	279	309	P
7	13750.00	22.65	29.14	51.79	68.20	-16.41	Average	100	124	P
8	13750.00	22.65	42.18	64.83	88.20	-23.37	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

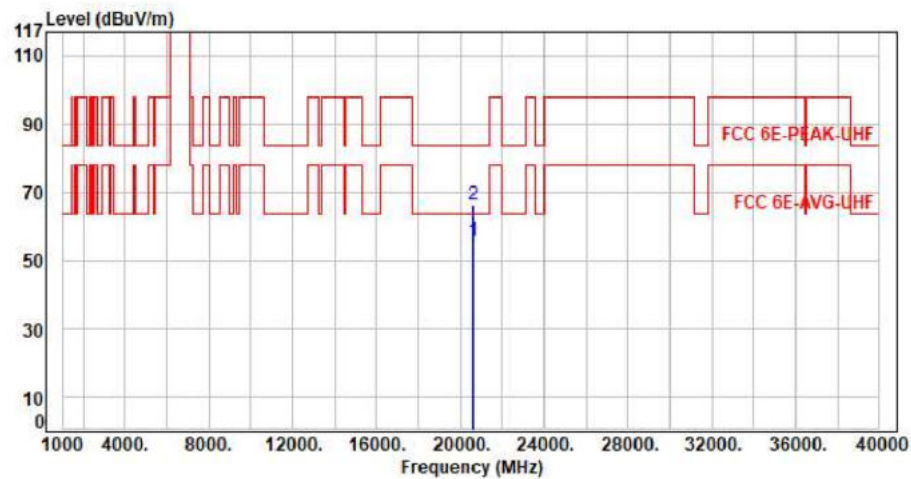


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	44.53	55.67	63.54	-7.87	Average	150	360	P
2	20625.00	11.14	55.19	66.33	83.54	-17.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

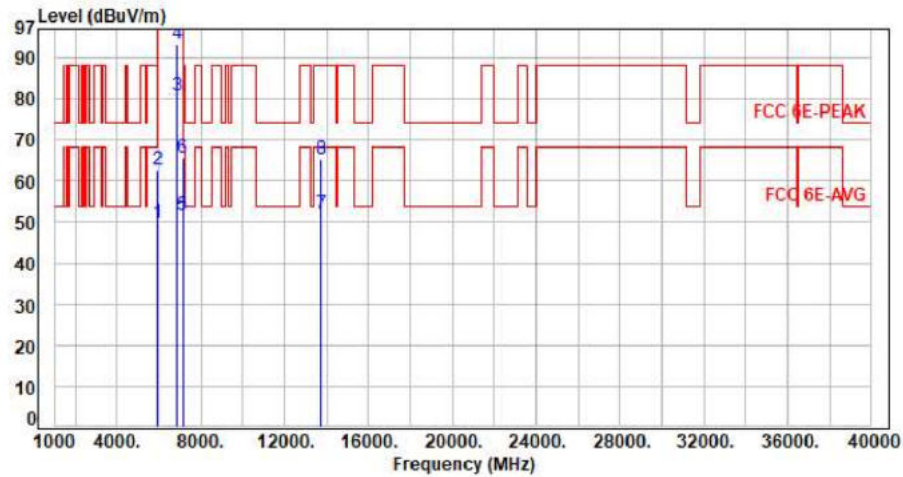


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.95	49.61	68.20	-18.59	Average	398	89	P
2	5925.00	7.66	55.17	62.83	88.20	-25.37	Peak	398	89	P
3	6875.00	9.55	71.31	80.86	200.00	-119.14	Average	398	89	P
4	6875.00	9.55	83.93	93.48	200.00	-106.52	Peak	398	89	P
5	7125.00	10.05	41.72	51.77	68.20	-16.43	Average	398	89	P
6	7125.00	10.05	55.57	65.62	88.20	-22.58	Peak	398	89	P
7	13750.00	22.65	29.44	52.09	68.20	-16.11	Average	100	332	P
8	13750.00	22.65	42.64	65.29	88.20	-22.91	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

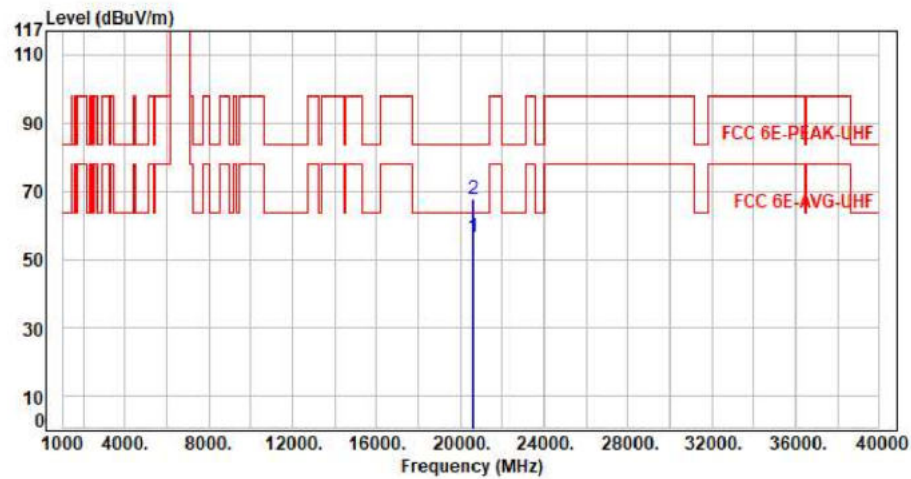

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.45	56.59	63.54	-6.95	Average	150	360	P
2	20625.00	11.14	56.48	67.62	83.54	-15.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

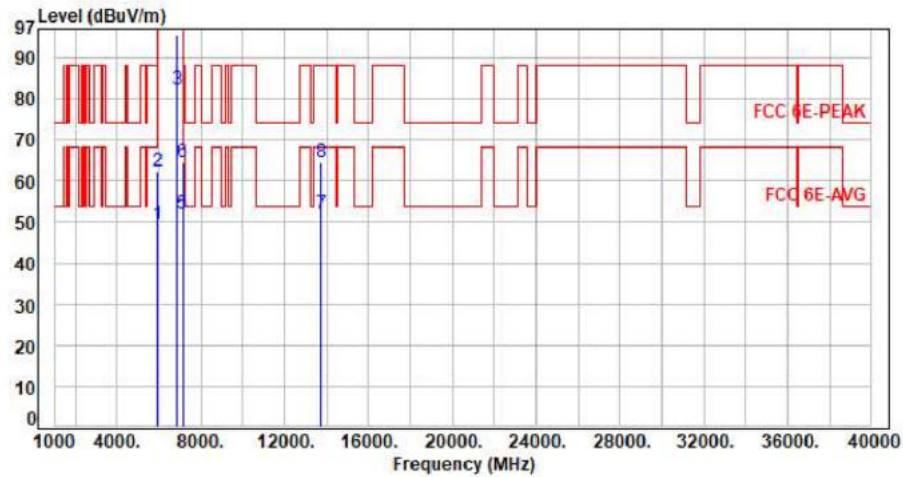


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.91	49.57	68.20	-18.63	Average	271	310	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	271	310	P
3	6885.00	9.56	72.80	82.36	200.00	-117.64	Average	271	310	P
4	6885.00	9.56	85.93	95.49	200.00	-104.51	Peak	271	310	P
5	7125.00	10.05	41.78	51.83	68.20	-16.37	Average	271	310	P
6	7125.00	10.05	54.58	64.63	88.20	-23.57	Peak	271	310	P
7	13770.00	22.69	29.44	52.13	68.20	-16.07	Average	100	225	P
8	13770.00	22.69	41.67	64.36	88.20	-23.84	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

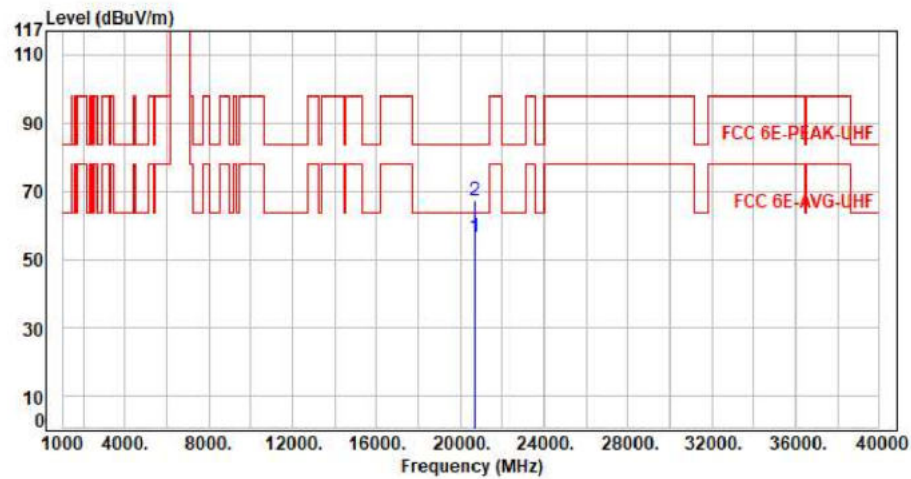


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.31	56.30	63.54	-7.24	Average	150	360	P
2	20655.00	10.99	56.32	67.31	83.54	-16.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

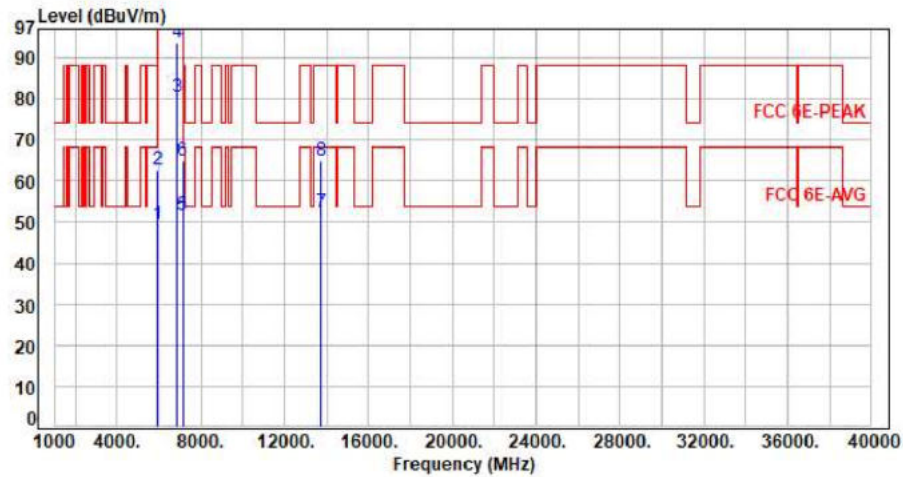


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.91	49.57	68.20	-18.63	Average	88	400	P
2	5925.00	7.66	55.15	62.81	88.20	-25.39	Peak	88	400	P
3	6885.00	9.56	70.76	80.32	200.00	-119.68	Average	88	400	P
4	6885.00	9.56	84.03	93.59	200.00	-106.41	Peak	88	400	P
5	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	88	400	P
6	7125.00	10.05	54.82	64.87	88.20	-23.33	Peak	88	400	P
7	13770.00	22.69	29.74	52.43	68.20	-15.77	Average	100	221	P
8	13770.00	22.69	42.11	64.80	88.20	-23.40	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

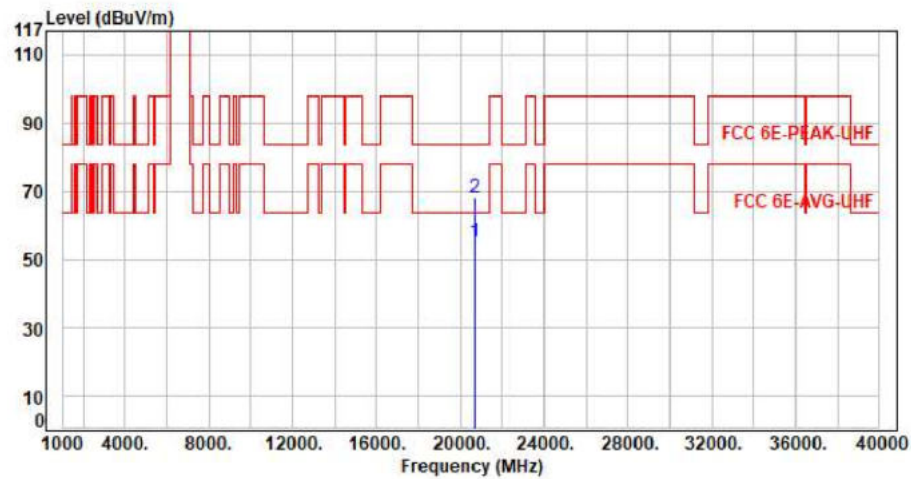


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	44.38	55.37	63.54	-8.17	Average	150	360	P
2	20655.00	10.99	56.91	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

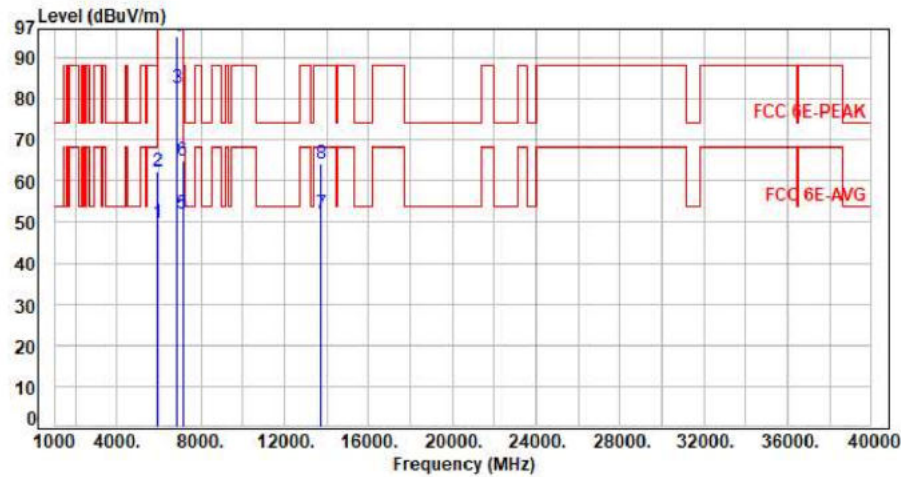

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.95	49.61	68.20	-18.59	Average	285	310	P
2	5925.00	7.66	54.69	62.35	88.20	-25.85	Peak	285	310	P
3	6865.00	9.52	73.28	82.80	200.00	-117.20	Average	285	310	P
4	6865.00	9.52	85.59	95.11	200.00	-104.89	Peak	285	310	P
5	7125.00	10.05	41.79	51.84	68.20	-16.36	Average	285	310	P
6	7125.00	10.05	54.78	64.83	88.20	-23.37	Peak	285	310	P
7	13730.00	22.57	29.41	51.98	68.20	-16.22	Average	100	189	P
8	13730.00	22.57	41.62	64.19	88.20	-24.01	Peak	100	189	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

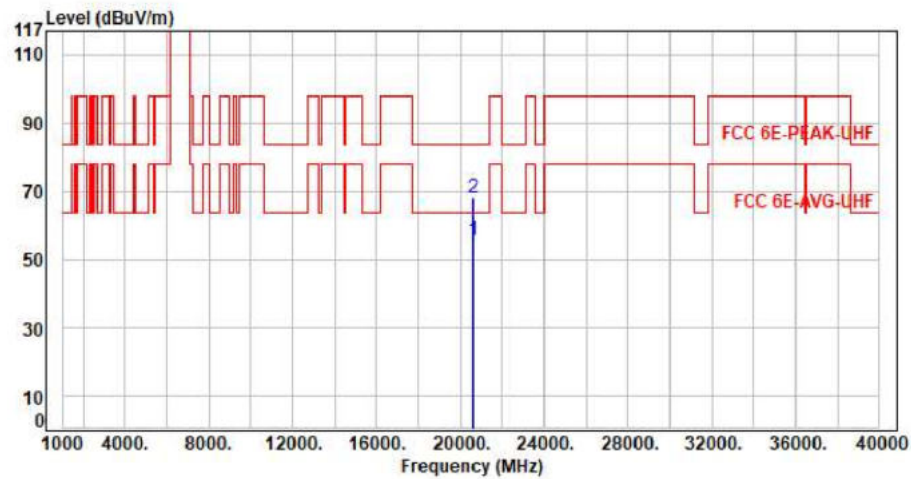


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	44.18	55.49	63.54	-8.05	Average	150	360	P
2	20595.00	11.31	56.59	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

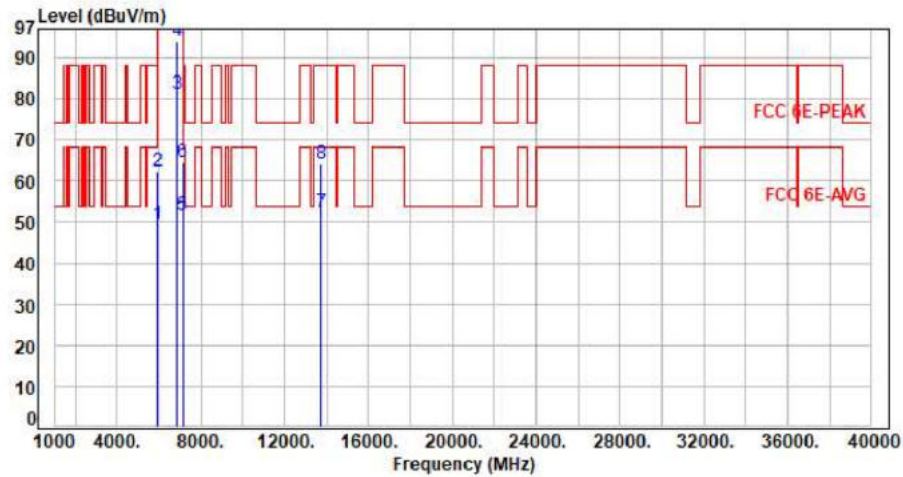


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.88	49.54	68.20	-18.66	Average	399	89	P
2	5925.00	7.66	54.67	62.33	88.20	-25.87	Peak	399	89	P
3	6865.00	9.52	71.54	81.06	200.00	-118.94	Average	399	89	P
4	6865.00	9.52	84.57	94.09	200.00	-105.91	Peak	399	89	P
5	7125.00	10.05	41.73	51.78	68.20	-16.42	Average	399	89	P
6	7125.00	10.05	54.44	64.49	88.20	-23.71	Peak	399	89	P
7	13730.00	22.57	29.74	52.31	68.20	-15.89	Average	100	161	P
8	13730.00	22.57	41.55	64.12	88.20	-24.08	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

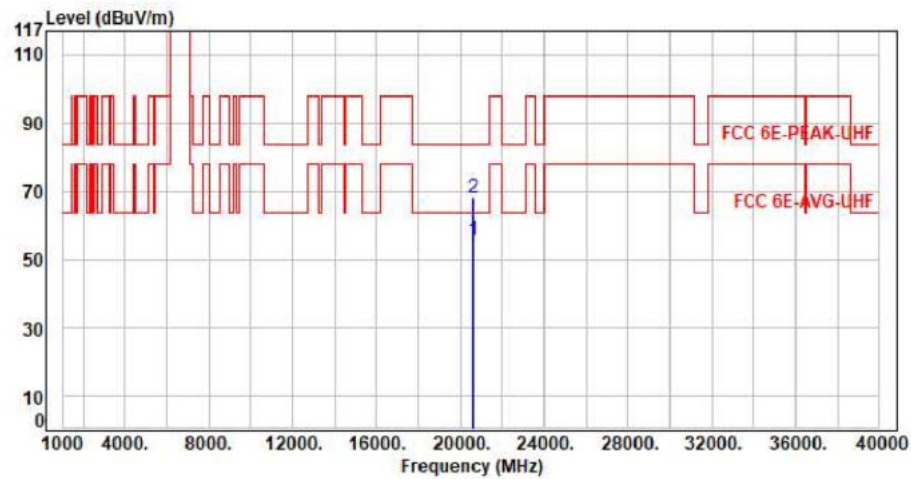

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	44.08	55.39	63.54	-8.15	Average	150	360	P
2	20595.00	11.31	56.97	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

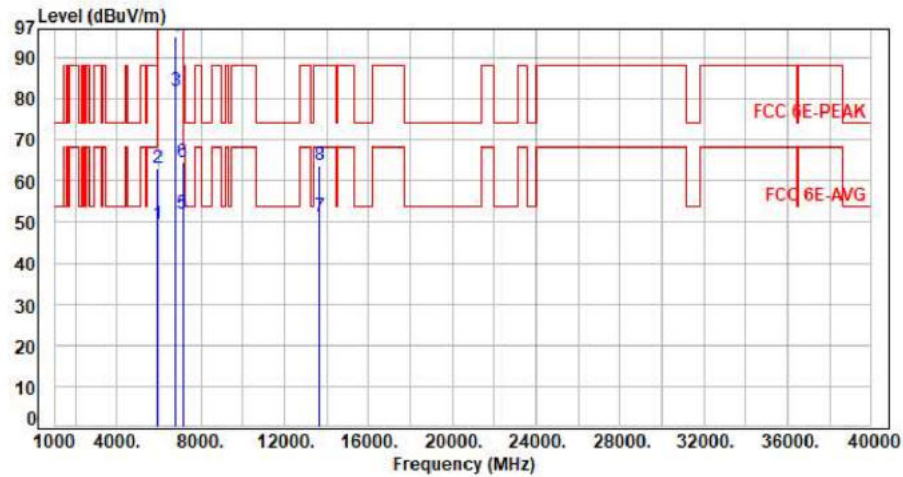

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.87	49.53	68.20	-18.67	Average	276	310	P
2	5925.00	7.66	55.23	62.89	88.20	-25.31	Peak	276	310	P
3	6825.00	9.47	72.56	82.03	200.00	-117.97	Average	276	310	P
4	6825.00	9.47	85.70	95.17	200.00	-104.83	Peak	276	310	P
5	7125.00	10.05	41.83	51.88	68.20	-16.32	Average	276	310	P
6	7125.00	10.05	54.50	64.55	88.20	-23.65	Peak	276	310	P
7	13650.00	22.24	29.19	51.43	68.20	-16.77	Average	100	225	P
8	13650.00	22.24	41.61	63.85	88.20	-24.35	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

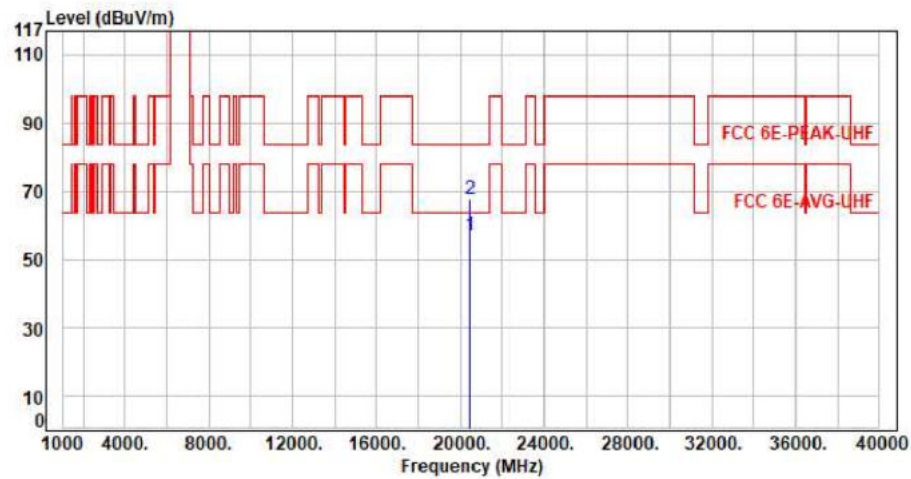


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.57	57.02	63.54	-6.52	Average	150	360	P
2	20475.00	11.45	56.37	67.82	83.54	-15.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

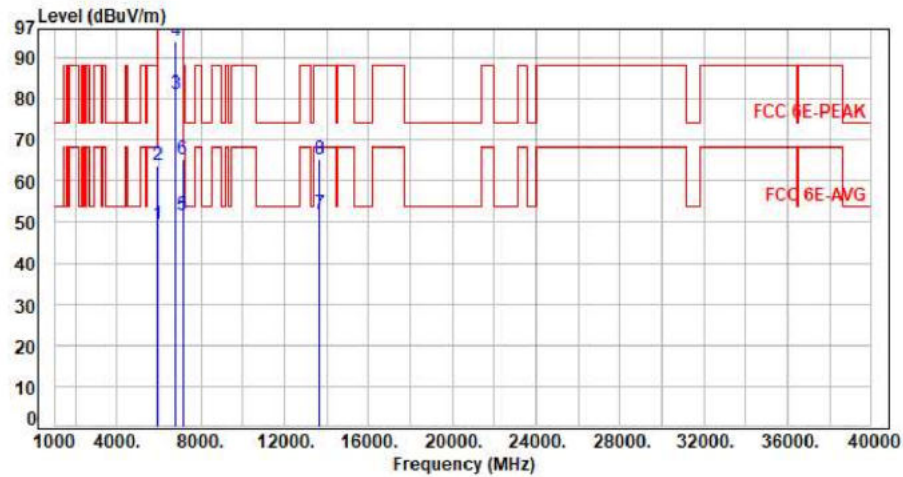

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.86	49.52	68.20	-18.68	Average	379	89	P
2	5925.00	7.66	56.04	63.70	88.20	-24.50	Peak	379	89	P
3	6825.00	9.47	71.76	81.23	200.00	-118.77	Average	379	89	P
4	6825.00	9.47	84.52	93.99	200.00	-106.01	Peak	379	89	P
5	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	379	89	P
6	7125.00	10.05	55.08	65.13	88.20	-23.07	Peak	379	89	P
7	13650.00	22.24	29.71	51.95	68.20	-16.25	Average	100	225	P
8	13650.00	22.24	43.08	65.32	88.20	-22.88	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

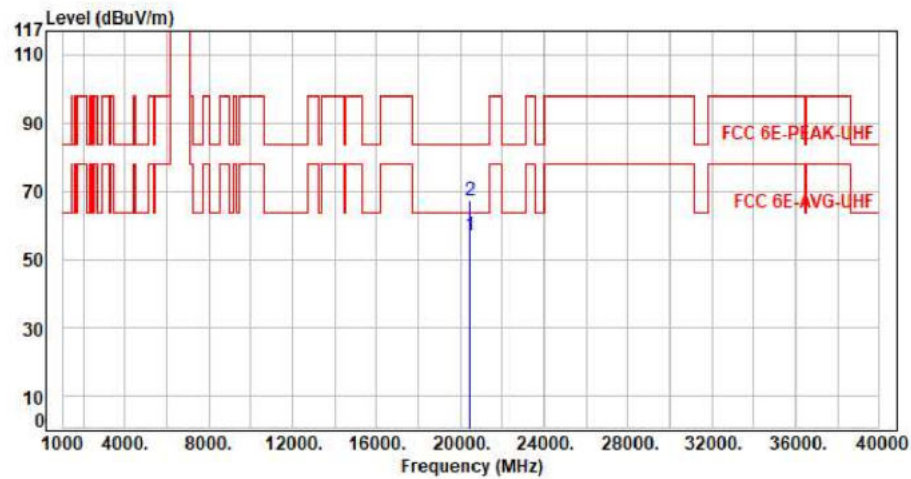


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.58	57.03	63.54	-6.51	Average	150	360	P
2	20475.00	11.45	55.87	67.32	83.54	-16.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

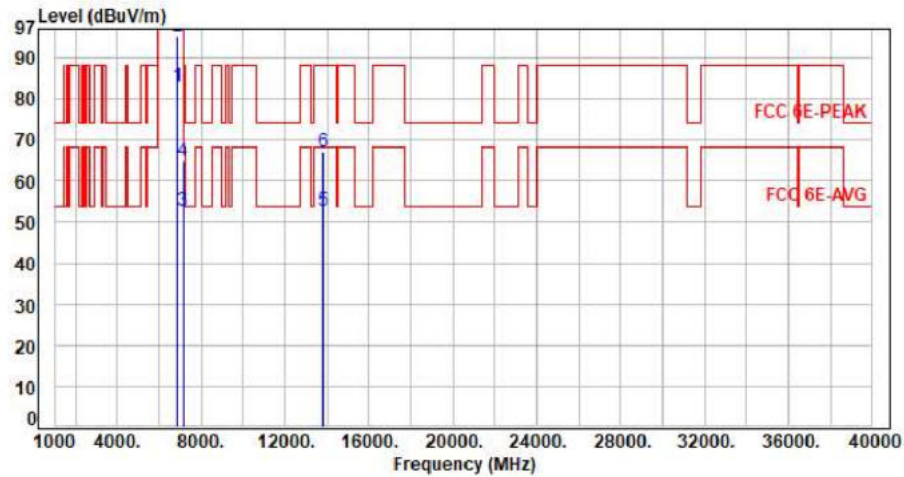


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	73.41	83.00	200.00	-117.00	Average	286	317	P
2	6895.00	9.59	85.49	95.08	200.00	-104.92	Peak	286	317	P
3	7125.00	10.05	42.87	52.92	68.20	-15.28	Average	286	317	P
4	7125.00	10.05	54.68	64.73	88.20	-23.47	Peak	286	317	P
5	13790.00	22.74	29.87	52.61	68.20	-15.59	Average	100	138	P
6	13790.00	22.74	44.24	66.98	88.20	-21.22	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

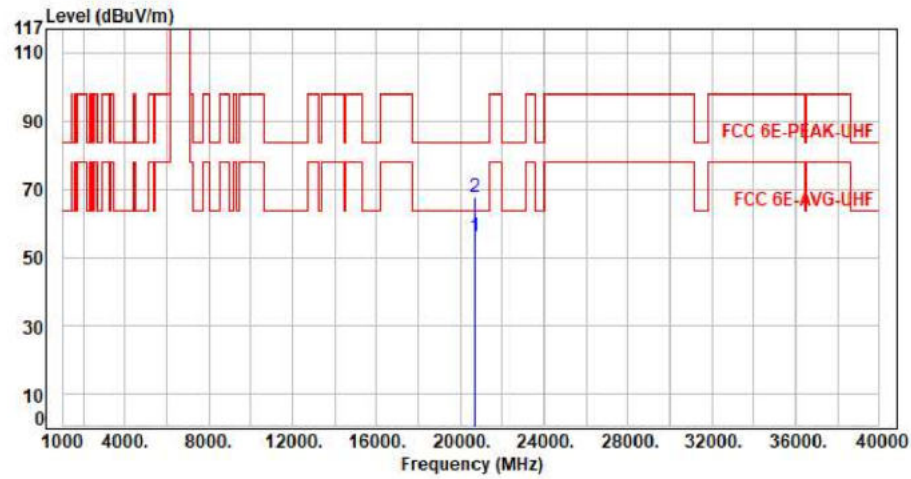


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.21	56.25	63.54	-7.29	Average	150	360	P
2	20685.00	11.04	56.76	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

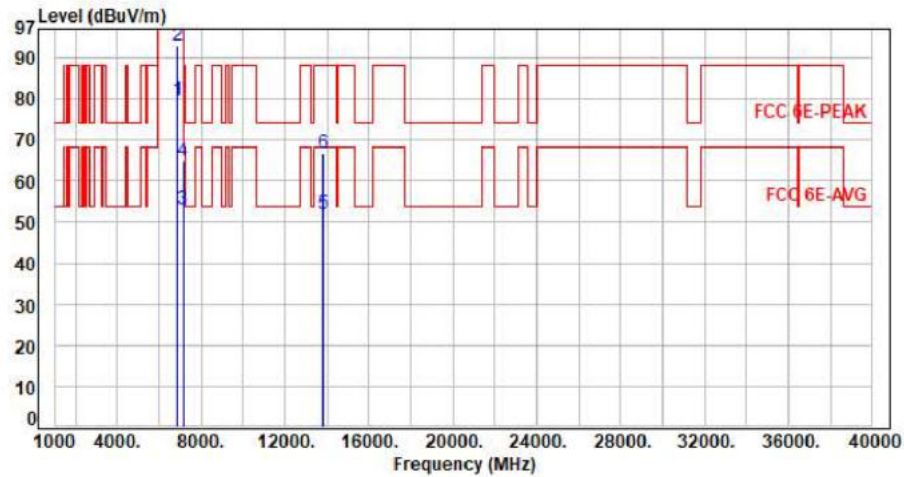


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	70.24	79.83	200.00	-120.17	Average	390	87	P
2	6895.00	9.59	83.45	93.04	200.00	-106.96	Peak	390	87	P
3	7125.00	10.05	43.09	53.14	68.20	-15.06	Average	390	87	P
4	7125.00	10.05	54.72	64.77	88.20	-23.43	Peak	390	87	P
5	13790.00	22.74	29.26	52.00	68.20	-16.20	Average	100	108	P
6	13790.00	22.74	44.08	66.82	88.20	-21.38	Peak	100	108	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

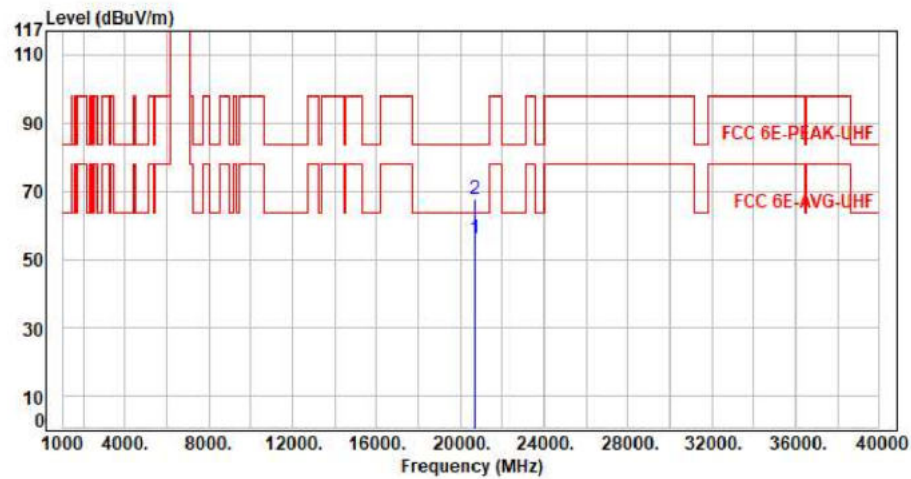


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.85	55.89	63.54	-7.65	Average	150	360	P
2	20685.00	11.04	56.46	67.50	83.54	-16.04	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

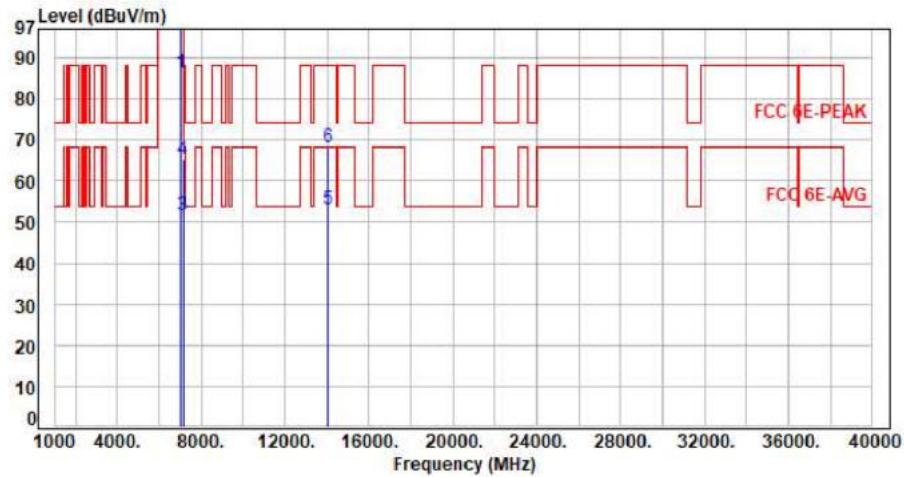


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	76.53	86.21	200.00	-113.79	Average	274	308	P
2	7015.00	9.68	89.96	99.64	200.00	-100.36	Peak	274	308	P
3	7125.00	10.05	41.71	51.76	68.20	-16.44	Average	274	308	P
4	7125.00	10.05	55.37	65.42	88.20	-22.78	Peak	274	308	P
5	14030.00	23.39	29.76	53.15	68.20	-15.05	Average	100	199	P
6	14030.00	23.39	44.96	68.35	88.20	-19.85	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

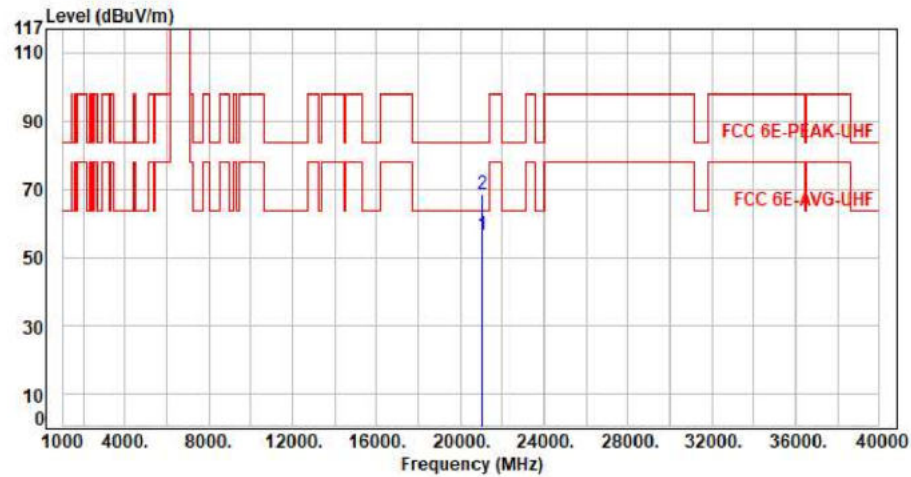


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.02	56.52	63.54	-7.02	Average	150	360	P
2	21045.00	11.50	56.98	68.48	83.54	-15.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

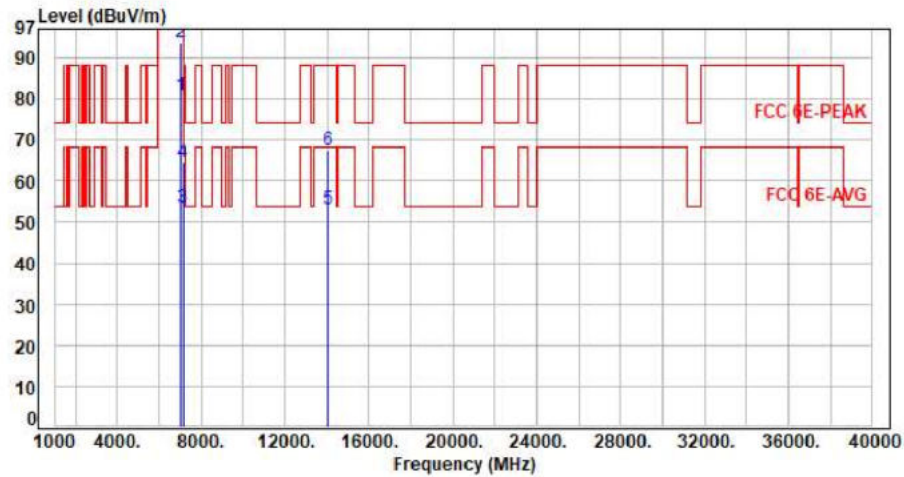


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	70.92	80.60	200.00	-119.40	Average	400	74	P
2	7015.00	9.68	83.91	93.59	200.00	-106.41	Peak	400	74	P
3	7125.00	10.05	43.60	53.65	68.20	-14.55	Average	400	74	P
4	7125.00	10.05	54.60	64.65	88.20	-23.55	Peak	400	74	P
5	14030.00	23.39	29.67	53.06	68.20	-15.14	Average	100	158	P
6	14030.00	23.39	43.99	67.38	88.20	-20.82	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

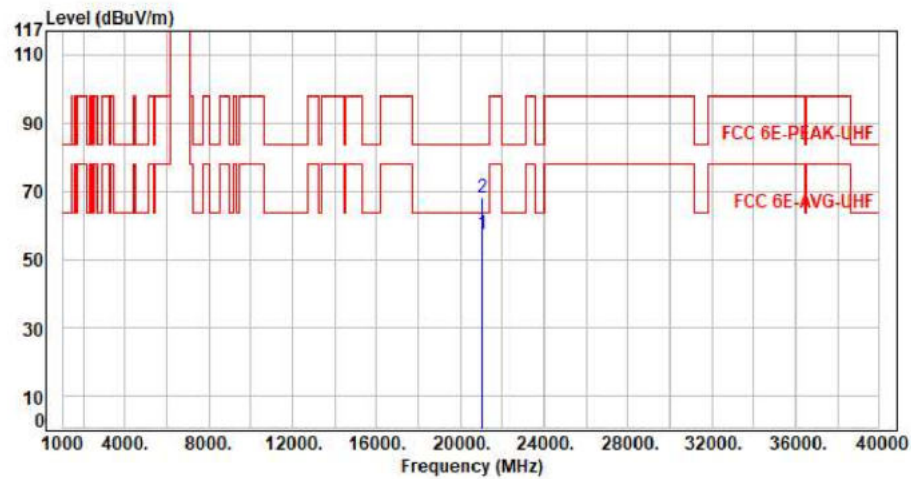


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.78	57.28	63.54	-6.26	Average	150	360	P
2	21045.00	11.50	56.68	68.18	83.54	-15.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

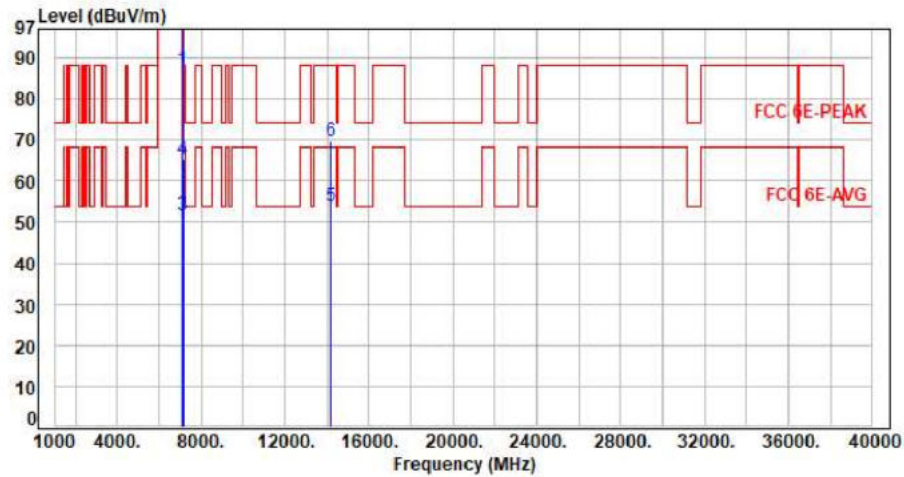


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	77.03	86.99	200.00	-113.01	Average	270	308	P
2	7095.00	9.96	89.96	99.92	200.00	-100.08	Peak	270	308	P
3	7125.00	10.05	41.61	51.66	68.20	-16.54	Average	270	308	P
4	7125.00	10.05	55.30	65.35	88.20	-22.85	Peak	270	308	P
5	14190.00	23.79	30.10	53.89	68.20	-14.31	Average	100	228	P
6	14190.00	23.79	45.87	69.66	88.20	-18.54	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

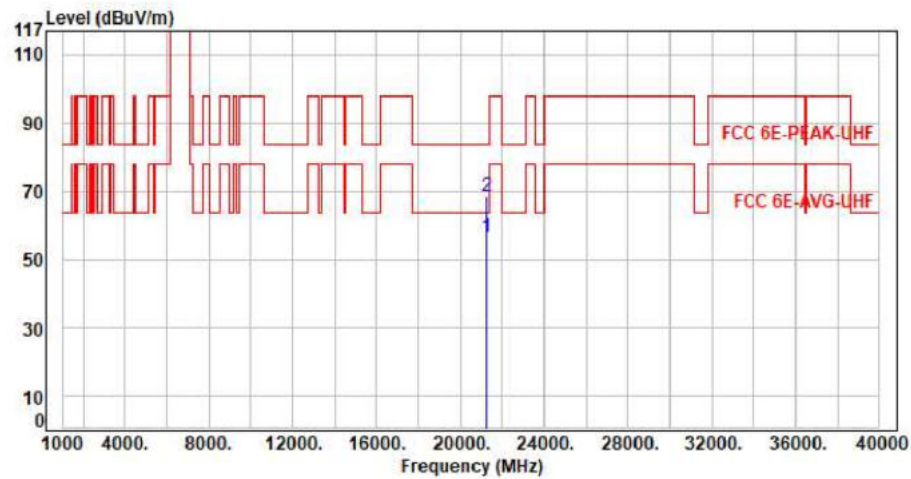


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.79	56.59	63.54	-6.95	Average	150	360	P
2	21285.00	11.80	56.73	68.53	83.54	-15.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

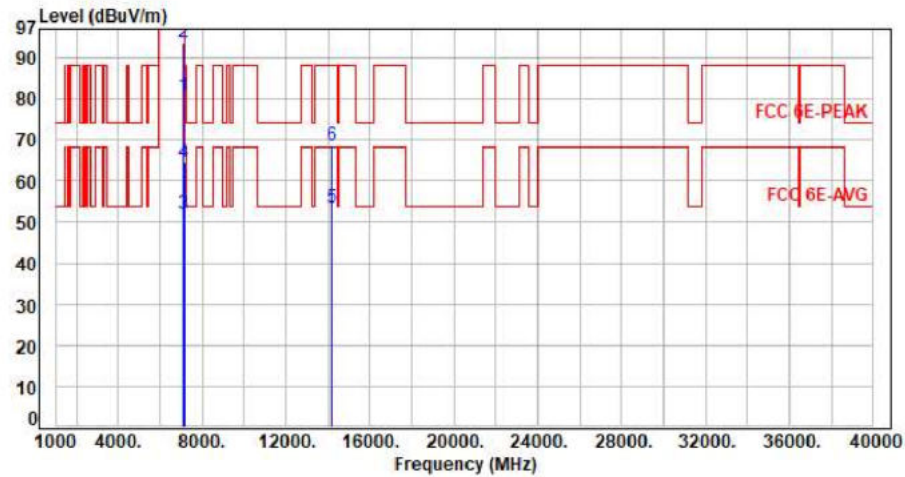


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	70.81	80.77	200.00	-119.23	Average	400	74	P
2	7095.00	9.96	83.78	93.74	200.00	-106.26	Peak	400	74	P
3	7125.00	10.05	42.13	52.18	68.20	-16.02	Average	400	74	P
4	7125.00	10.05	54.65	64.70	88.20	-23.50	Peak	400	74	P
5	14190.00	23.79	29.76	53.55	68.20	-14.65	Average	100	147	P
6	14190.00	23.79	44.98	68.77	88.20	-19.43	Peak	100	147	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

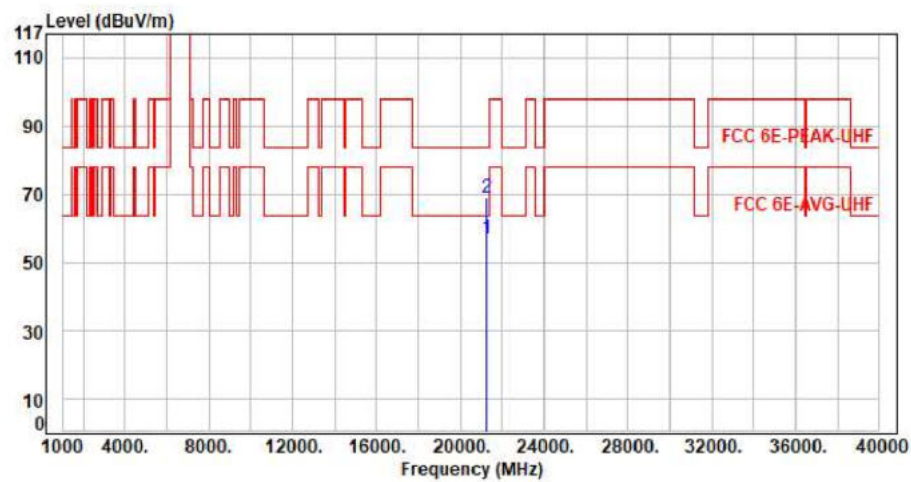

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.93	56.73	63.54	-6.81	Average	150	360	P
2	21285.00	11.80	57.15	68.95	83.54	-14.59	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

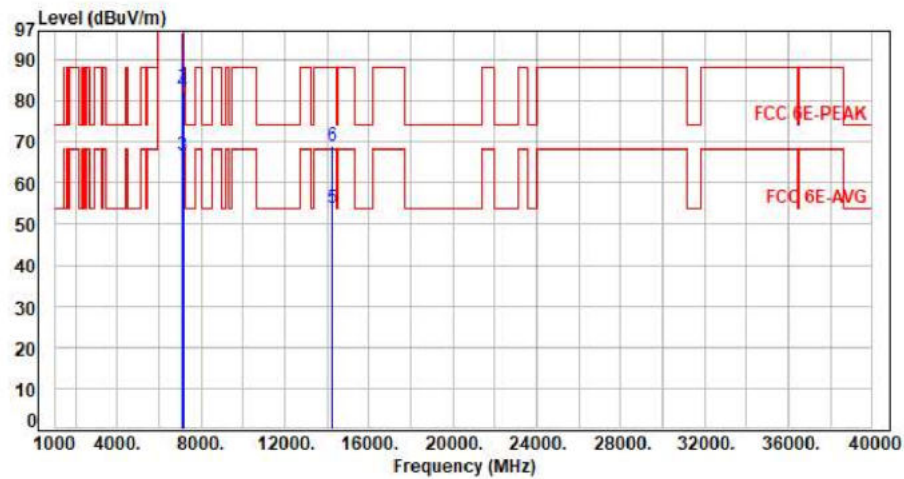


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	73.54	83.56	200.00	-116.44	Average	268	307	P
2	7115.00	10.02	86.55	96.57	200.00	-103.43	Peak	268	307	P
3	7125.00	10.05	56.72	66.77	68.20	-1.43	Average	268	307	P
4	7125.00	10.05	72.14	82.19	88.20	-6.01	Peak	268	307	P
5	14230.00	23.94	29.79	53.73	68.20	-14.47	Average	100	214	P
6	14230.00	23.94	45.09	69.03	88.20	-19.17	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

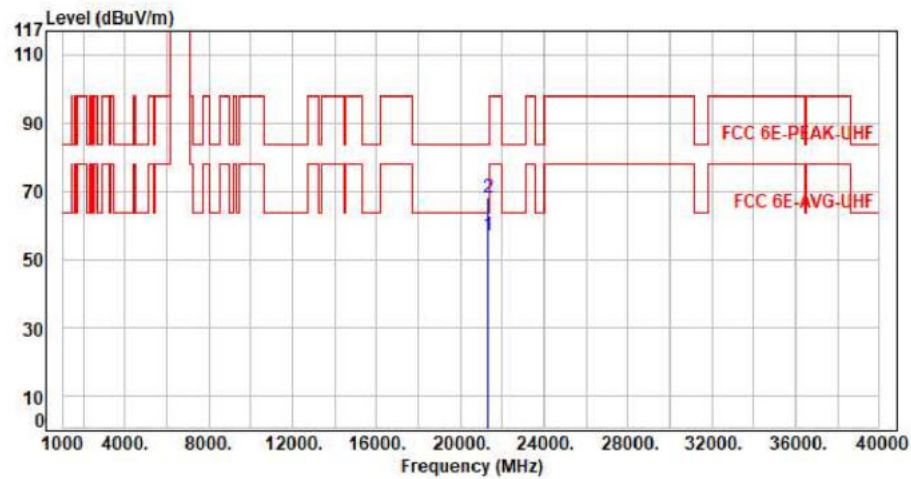


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.52	56.88	63.54	-6.66	Average	150	360	P
2	21345.00	11.36	56.74	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

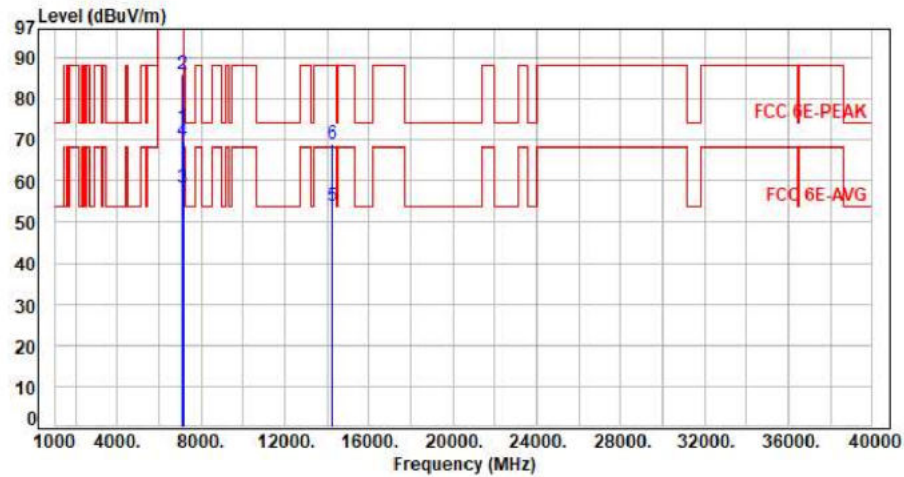


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	63.08	73.10	200.00	-126.90	Average	389	75	P
2	7115.00	10.02	75.78	85.80	200.00	-114.20	Peak	389	75	P
3	7125.00	10.05	48.04	58.09	68.20	-10.11	Average	389	75	P
4	7125.00	10.05	59.49	69.54	88.20	-18.66	Peak	389	75	P
5	14230.00	23.94	29.87	53.81	68.20	-14.39	Average	100	229	P
6	14230.00	23.94	45.04	68.98	88.20	-19.22	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

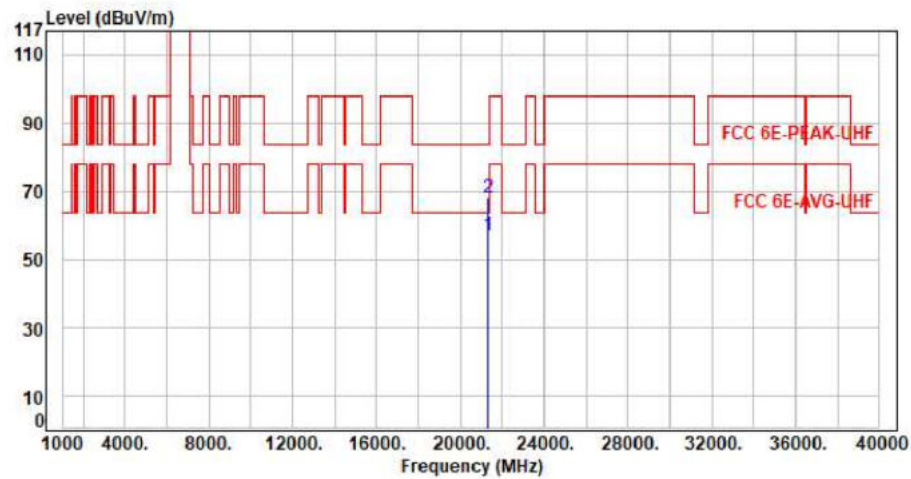


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.42	56.78	63.54	-6.76	Average	150	360	P
2	21345.00	11.36	56.83	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

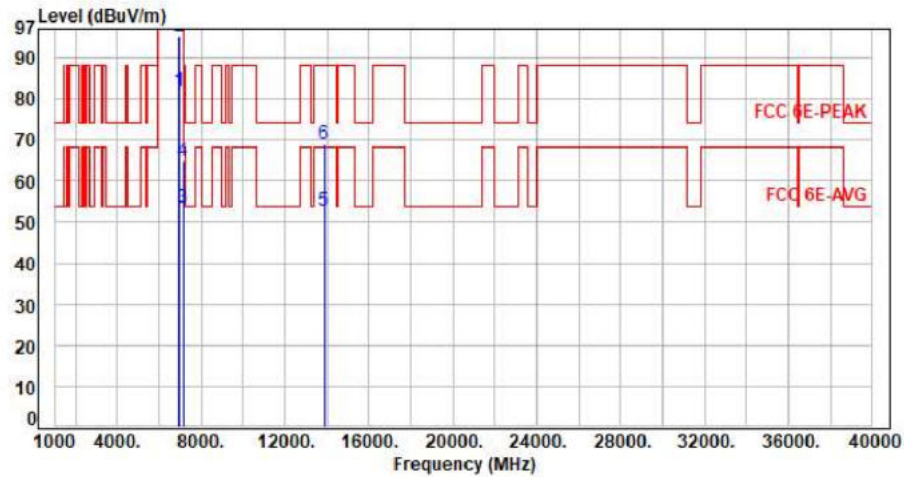


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	72.35	81.96	200.00	-118.04	Average	271	308	P
2	6925.00	9.61	85.59	95.20	200.00	-104.80	Peak	271	308	P
3	7125.00	10.05	43.40	53.45	68.20	-14.75	Average	271	308	P
4	7125.00	10.05	54.68	64.73	88.20	-23.47	Peak	271	308	P
5	13850.00	22.86	29.88	52.74	68.20	-15.46	Average	100	187	P
6	13850.00	22.86	45.96	68.82	88.20	-19.38	Peak	100	187	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

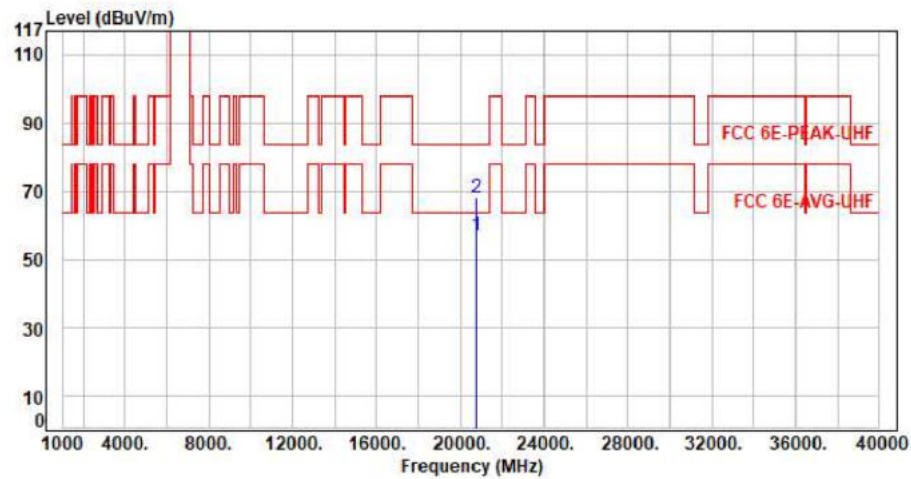


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.55	56.94	63.54	-6.60	Average	150	360	P
2	20775.00	11.39	56.81	68.20	83.54	-15.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

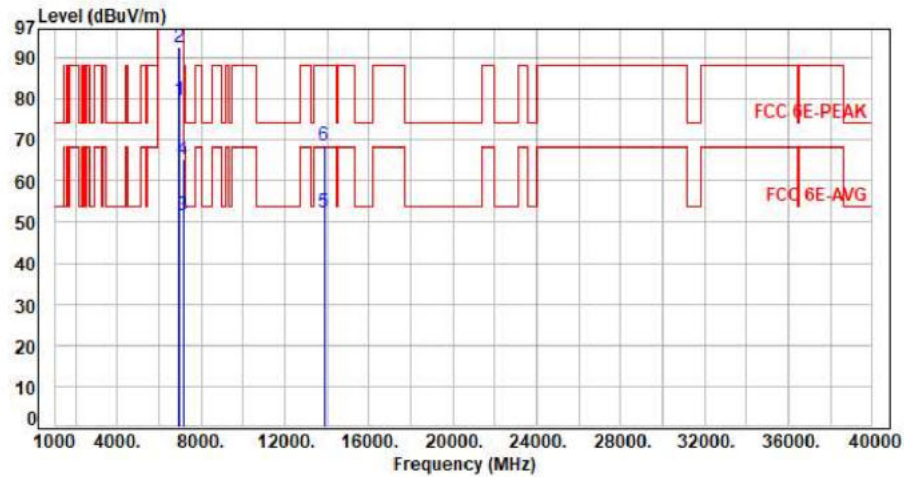


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	70.06	79.67	200.00	-120.33	Average	395	89	P
2	6925.00	9.61	82.88	92.49	200.00	-107.51	Peak	395	89	P
3	7125.00	10.05	41.61	51.66	68.20	-16.54	Average	395	89	P
4	7125.00	10.05	55.20	65.25	88.20	-22.95	Peak	395	89	P
5	13850.00	22.86	29.44	52.30	68.20	-15.90	Average	100	120	P
6	13850.00	22.86	45.61	68.47	88.20	-19.73	Peak	100	120	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

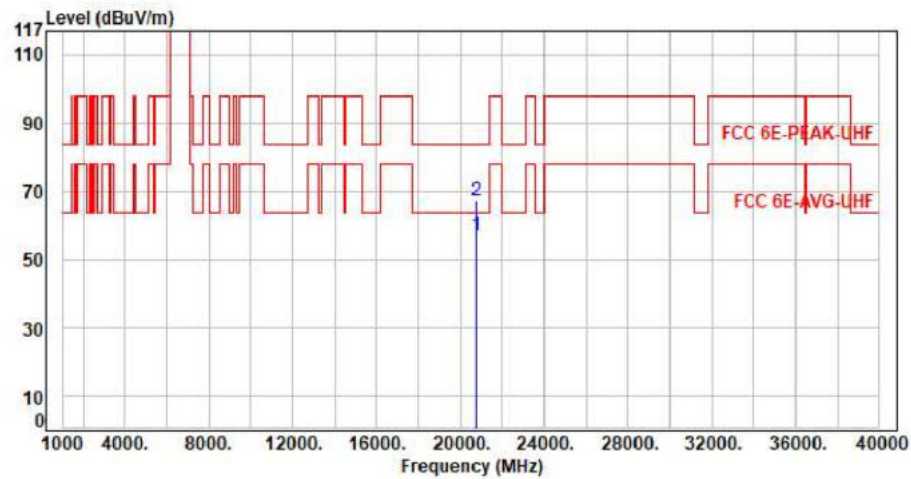

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.47	56.86	63.54	-6.68	Average	150	360	P
2	20775.00	11.39	55.61	67.00	83.54	-16.54	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

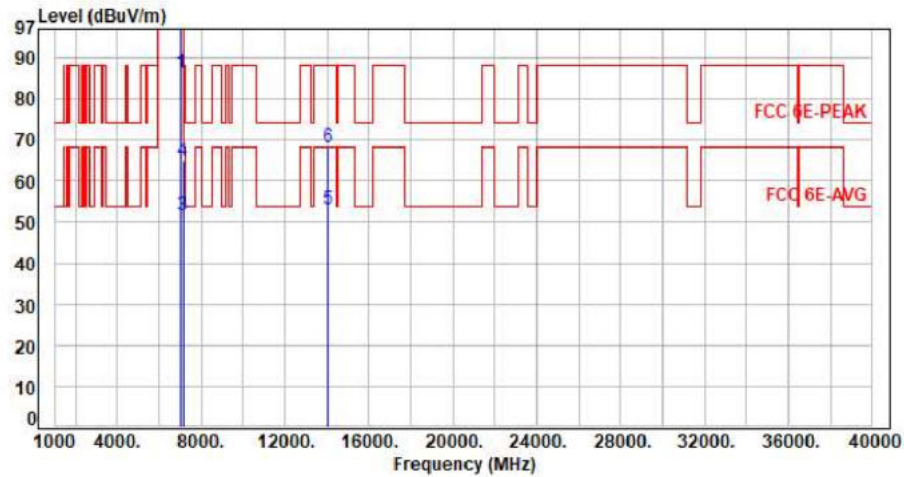


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	76.72	86.37	200.00	-113.63	Average	277	326	P
2	7005.00	9.65	89.57	99.22	200.00	-100.78	Peak	277	326	P
3	7125.00	10.05	41.75	51.80	68.20	-16.40	Average	277	326	P
4	7125.00	10.05	54.93	64.98	88.20	-23.22	Peak	277	326	P
5	14010.00	23.32	29.64	52.96	68.20	-15.24	Average	100	338	P
6	14010.00	23.32	44.91	68.23	88.20	-19.97	Peak	100	338	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

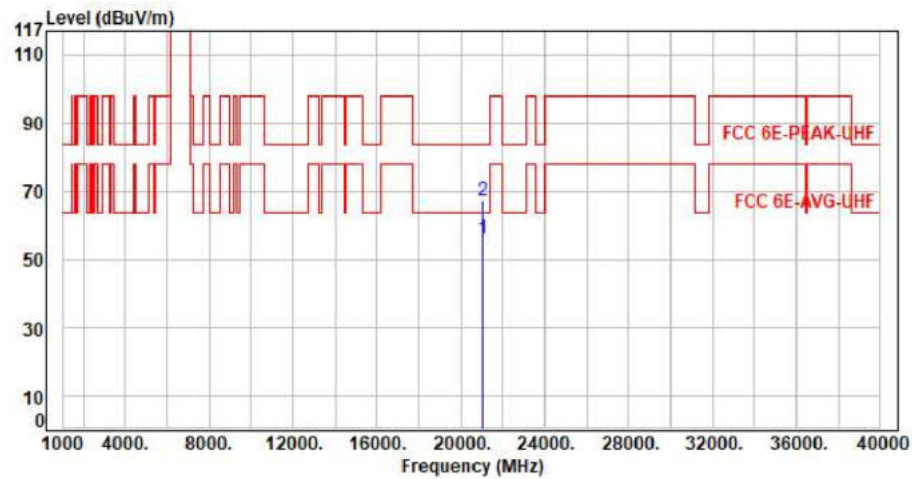


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	44.62	56.10	63.54	-7.44	Average	150	360	P
2	21015.00	11.48	55.80	67.28	83.54	-16.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

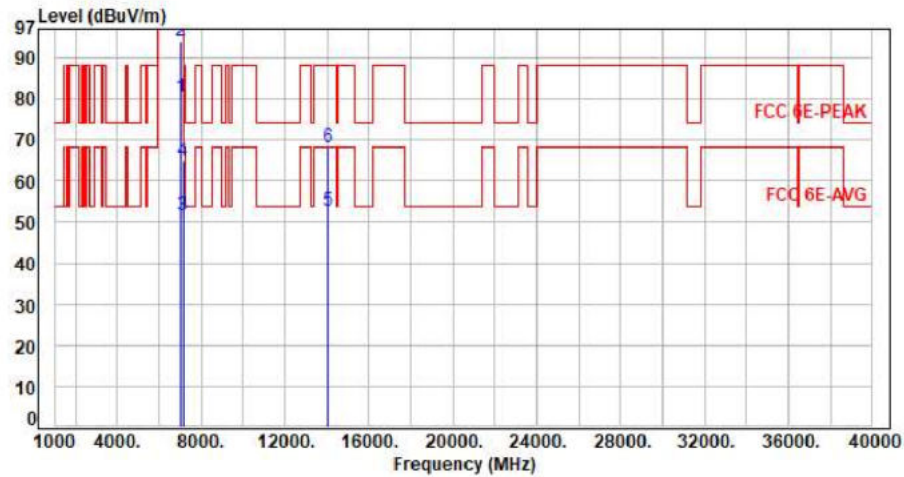

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	70.60	80.25	200.00	-119.75	Average	400	74	P
2	7005.00	9.65	84.25	93.90	200.00	-106.10	Peak	400	74	P
3	7125.00	10.05	41.56	51.61	68.20	-16.59	Average	400	74	P
4	7125.00	10.05	54.97	65.02	88.20	-23.18	Peak	400	74	P
5	14010.00	23.32	29.47	52.79	68.20	-15.41	Average	100	112	P
6	14010.00	23.32	44.87	68.19	88.20	-20.01	Peak	100	112	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor