




For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

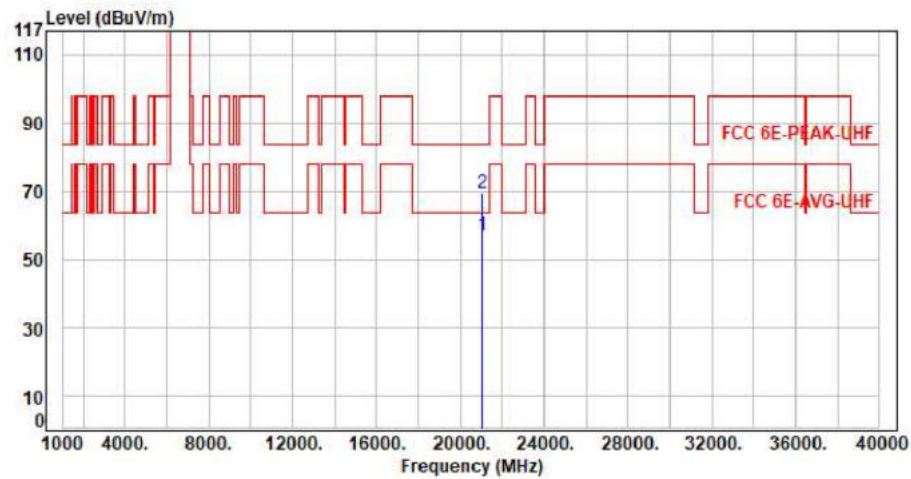


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.27	56.75	63.54	-6.79	Average	150	360	P
2	21015.00	11.48	57.81	69.29	83.54	-14.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

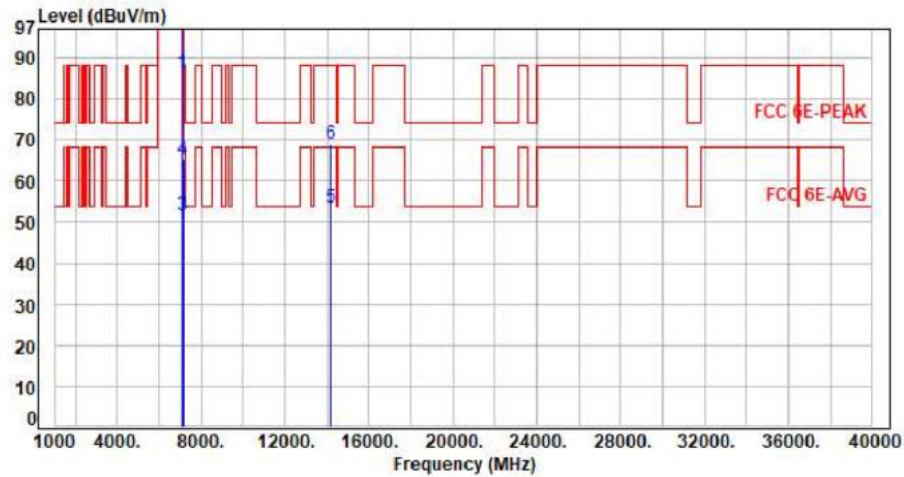


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	76.55	86.46	200.00	-113.54	Average	281	307	P
2	7085.00	9.91	89.37	99.28	200.00	-100.72	Peak	281	307	P
3	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	281	307	P
4	7125.00	10.05	55.09	65.14	88.20	-23.06	Peak	281	307	P
5	14170.00	23.72	29.66	53.38	68.20	-14.82	Average	100	110	P
6	14170.00	23.72	45.10	68.82	88.20	-19.38	Peak	100	110	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

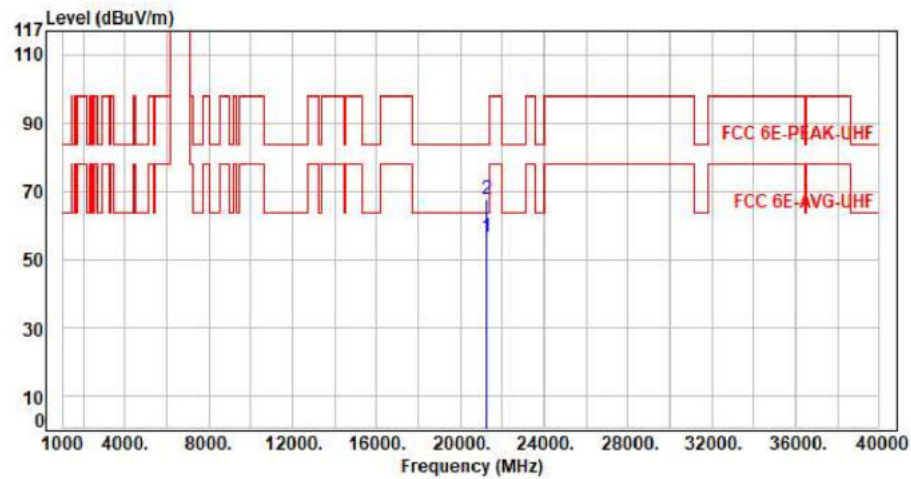


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	44.55	56.39	63.54	-7.15	Average	150	360	P
2	21255.00	11.84	55.99	67.83	83.54	-15.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

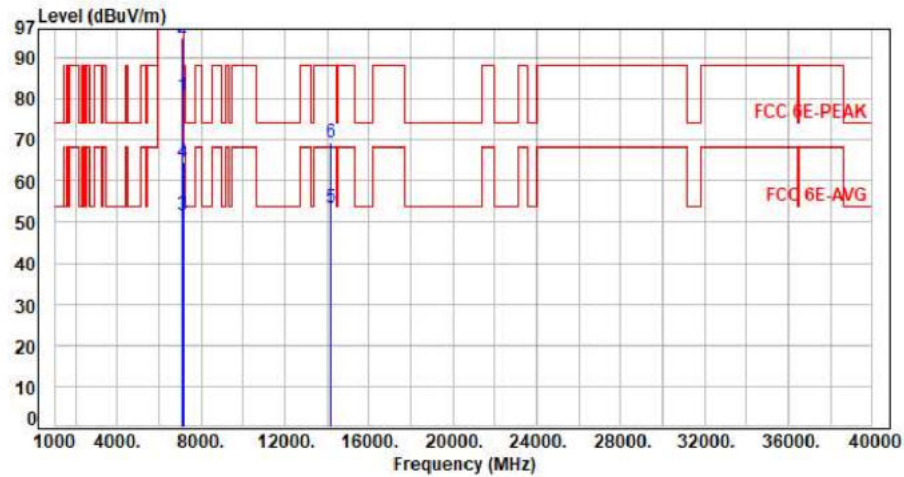


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	70.99	80.90	200.00	-119.10	Average	392	75	P
2	7085.00	9.91	84.93	94.84	200.00	-105.16	Peak	392	75	P
3	7125.00	10.05	41.54	51.59	68.20	-16.61	Average	392	75	P
4	7125.00	10.05	54.55	64.60	88.20	-23.60	Peak	392	75	P
5	14170.00	23.72	29.67	53.39	68.20	-14.81	Average	100	138	P
6	14170.00	23.72	45.61	69.33	88.20	-18.87	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

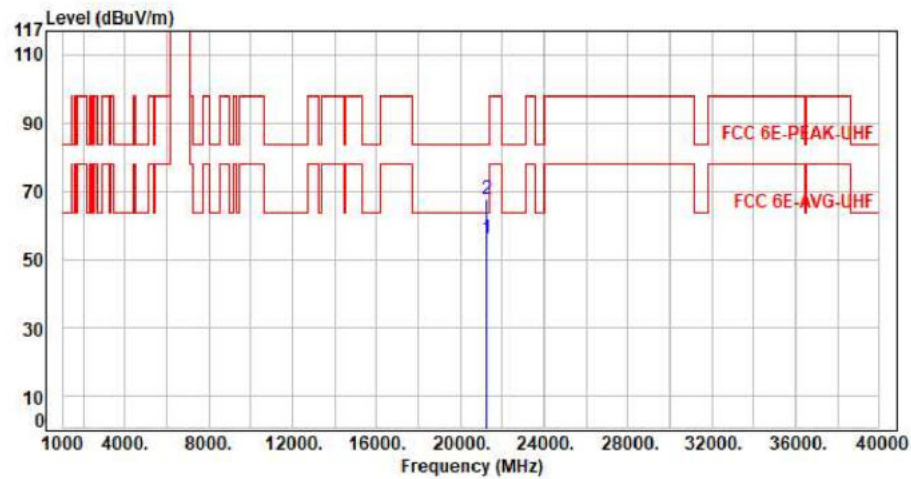


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	44.18	56.02	63.54	-7.52	Average	150	360	P
2	21255.00	11.84	55.91	67.75	83.54	-15.79	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

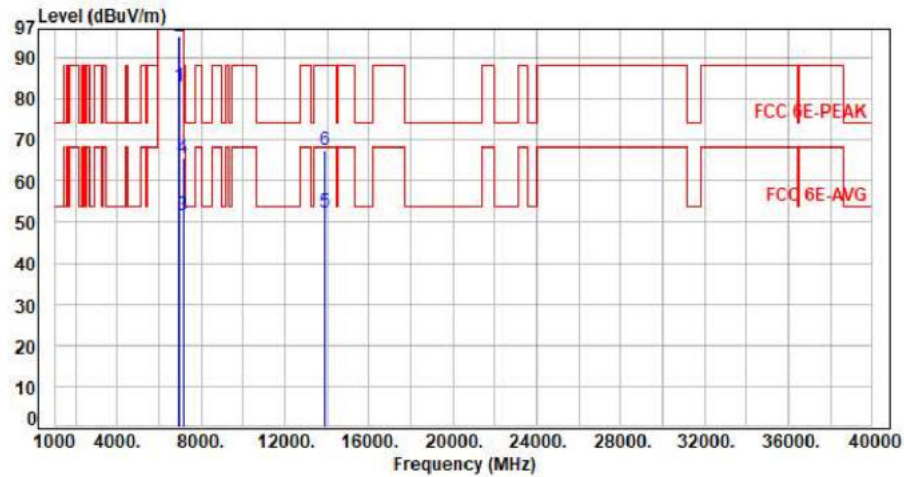


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	73.22	82.84	200.00	-117.16	Average	264	308	P
2	6945.00	9.62	85.72	95.34	200.00	-104.66	Peak	264	308	P
3	7125.00	10.05	41.69	51.74	68.20	-16.46	Average	264	308	P
4	7125.00	10.05	55.61	65.66	88.20	-22.54	Peak	264	308	P
5	13890.00	22.95	29.60	52.55	68.20	-15.65	Average	100	213	P
6	13890.00	22.95	44.55	67.50	88.20	-20.70	Peak	100	213	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

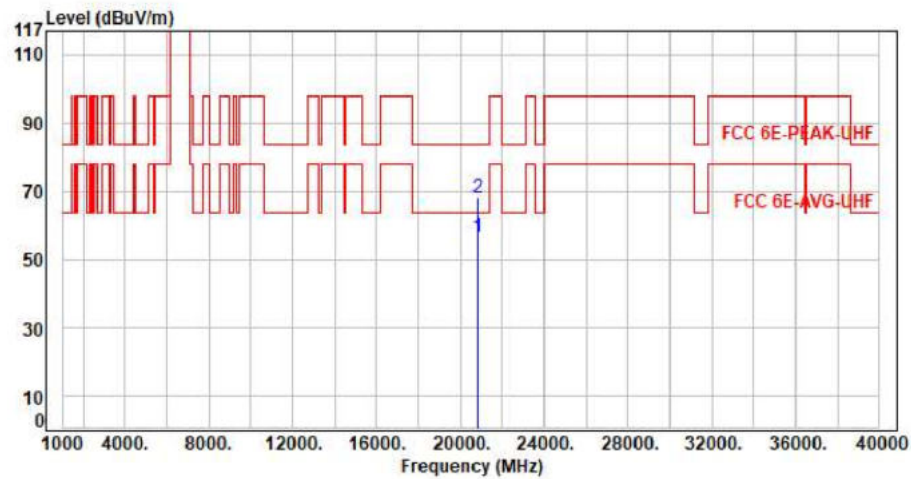

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.21	56.61	63.54	-6.93	Average	150	360	P
2	20835.00	11.40	56.85	68.25	83.54	-15.29	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

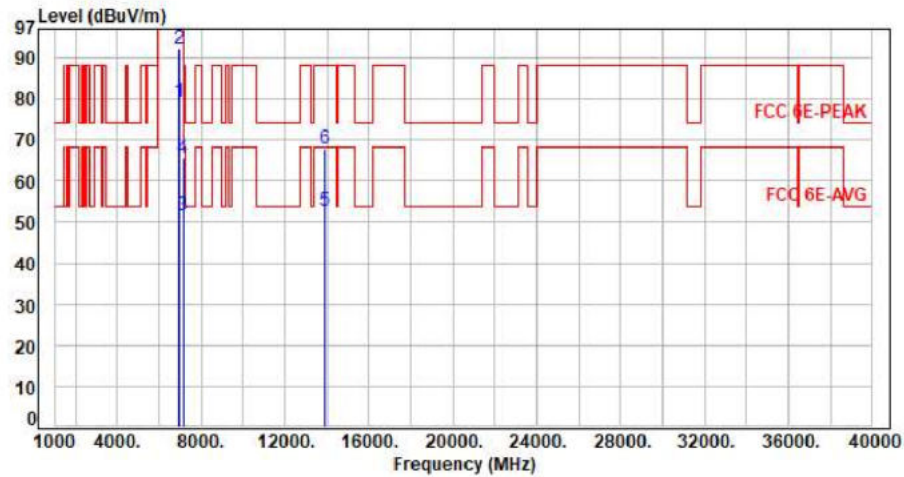


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	69.83	79.45	200.00	-120.55	Average	385	50	P
2	6945.00	9.62	82.57	92.19	200.00	-107.81	Peak	385	50	P
3	7125.00	10.05	41.60	51.65	68.20	-16.55	Average	385	50	P
4	7125.00	10.05	55.46	65.51	88.20	-22.69	Peak	385	50	P
5	13890.00	22.95	29.77	52.72	68.20	-15.48	Average	100	159	P
6	13890.00	22.95	45.06	68.01	88.20	-20.19	Peak	100	159	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

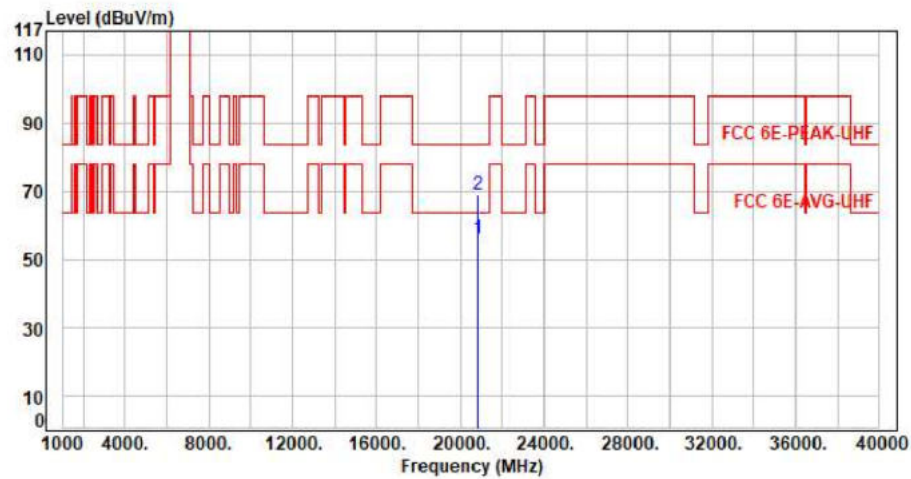


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	44.68	56.08	63.54	-7.46	Average	150	360	P
2	20835.00	11.40	57.54	68.94	83.54	-14.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

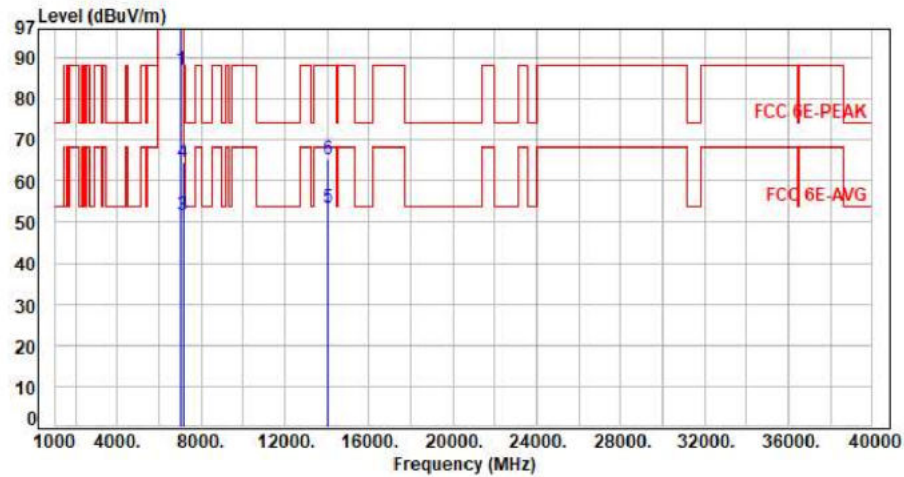


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	77.44	87.15	200.00	-112.85	Average	274	308	P
2	7025.00	9.71	90.13	99.84	200.00	-100.16	Peak	274	308	P
3	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	274	308	P
4	7125.00	10.05	54.61	64.66	88.20	-23.54	Peak	274	308	P
5	14050.00	23.47	29.87	53.34	68.20	-14.86	Average	100	221	P
6	14050.00	23.47	41.63	65.10	88.20	-23.10	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

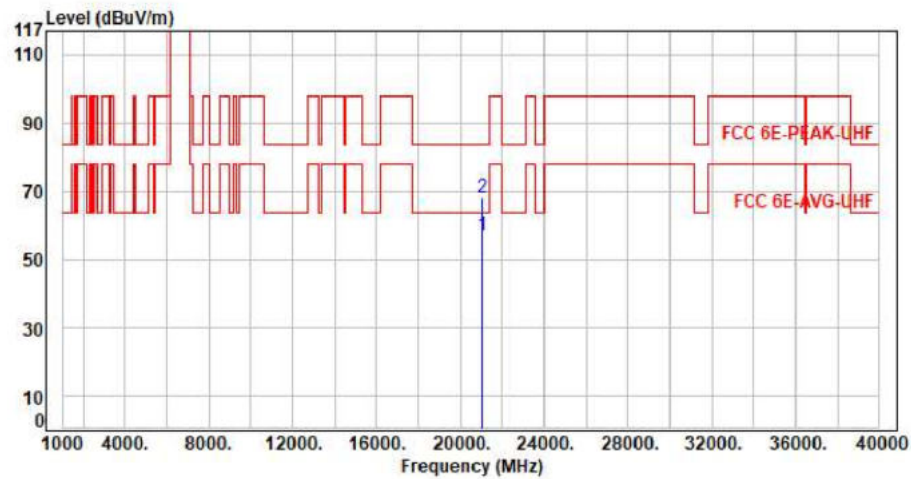


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.36	56.88	63.54	-6.66	Average	150	360	P
2	21075.00	11.52	56.61	68.13	83.54	-15.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

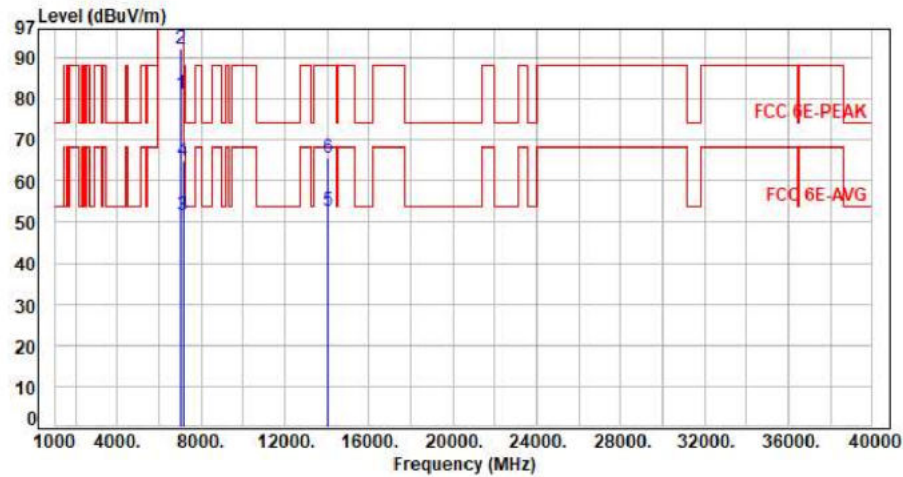


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	71.41	81.12	200.00	-118.88	Average	400	74	P
2	7025.00	9.71	82.63	92.34	200.00	-107.66	Peak	400	74	P
3	7125.00	10.05	41.62	51.67	68.20	-16.53	Average	400	74	P
4	7125.00	10.05	54.89	64.94	88.20	-23.26	Peak	400	74	P
5	14050.00	23.47	29.11	52.58	68.20	-15.62	Average	100	138	P
6	14050.00	23.47	42.11	65.58	88.20	-22.62	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

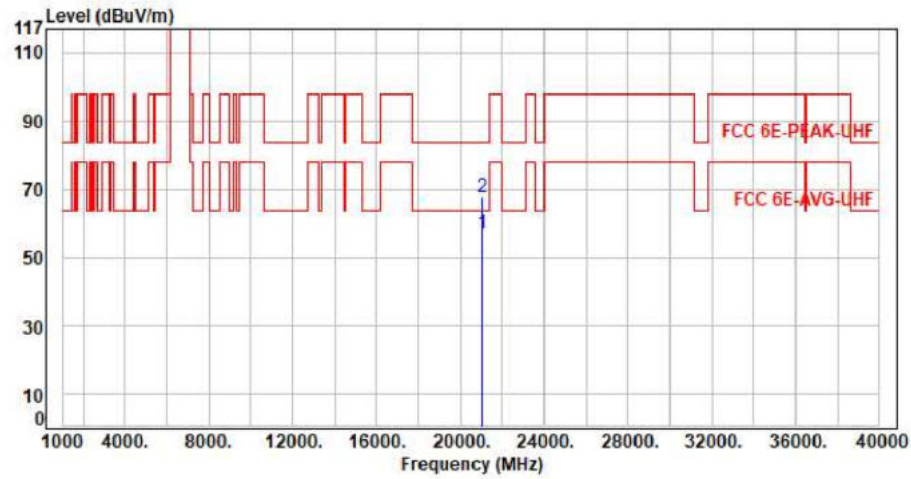


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.39	56.91	63.54	-6.63	Average	150	360	P
2	21075.00	11.52	56.28	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

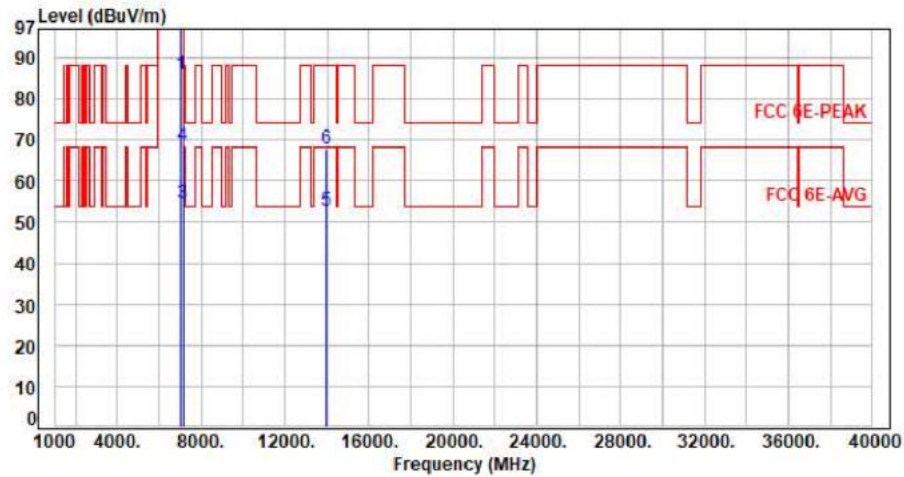


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	76.40	86.03	200.00	-113.97	Average	261	308	P
2	6985.00	9.63	88.59	98.22	200.00	-101.78	Peak	261	308	P
3	7125.00	10.05	44.53	54.58	68.20	-13.62	Average	261	308	P
4	7125.00	10.05	58.71	68.76	88.20	-19.44	Peak	261	308	P
5	13970.00	23.15	29.64	52.79	68.20	-15.41	Average	100	314	P
6	13970.00	23.15	44.70	67.85	88.20	-20.35	Peak	100	314	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

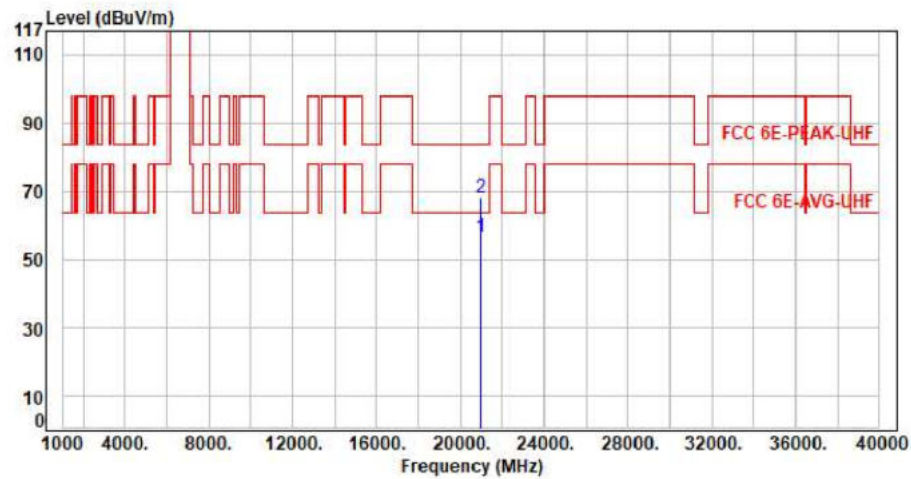


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.91	56.39	63.54	-7.15	Average	150	360	P
2	20955.00	11.48	56.63	68.11	83.54	-15.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

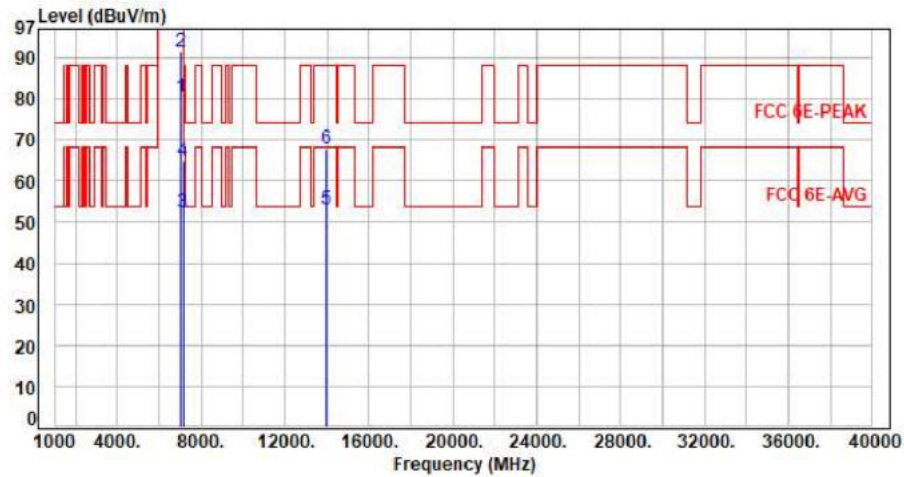


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	70.63	80.26	200.00	-119.74	Average	400	75	P
2	6985.00	9.63	81.91	91.54	200.00	-108.46	Peak	400	75	P
3	7125.00	10.05	42.21	52.26	68.20	-15.94	Average	400	75	P
4	7125.00	10.05	54.88	64.93	88.20	-23.27	Peak	400	75	P
5	13970.00	23.15	29.78	52.93	68.20	-15.27	Average	100	214	P
6	13970.00	23.15	44.59	67.74	88.20	-20.46	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Main

Test Mode : 1TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

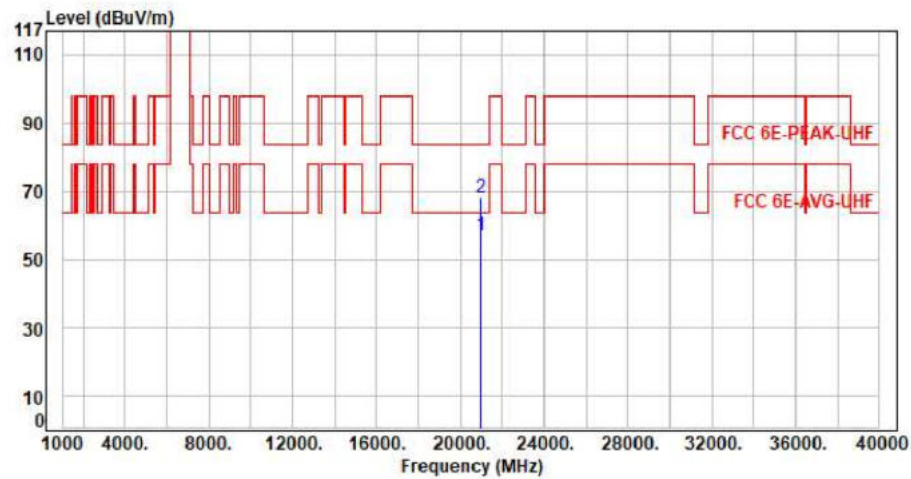


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.57	57.05	63.54	-6.49	Average	150	360	P
2	20955.00	11.48	56.75	68.23	83.54	-15.31	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

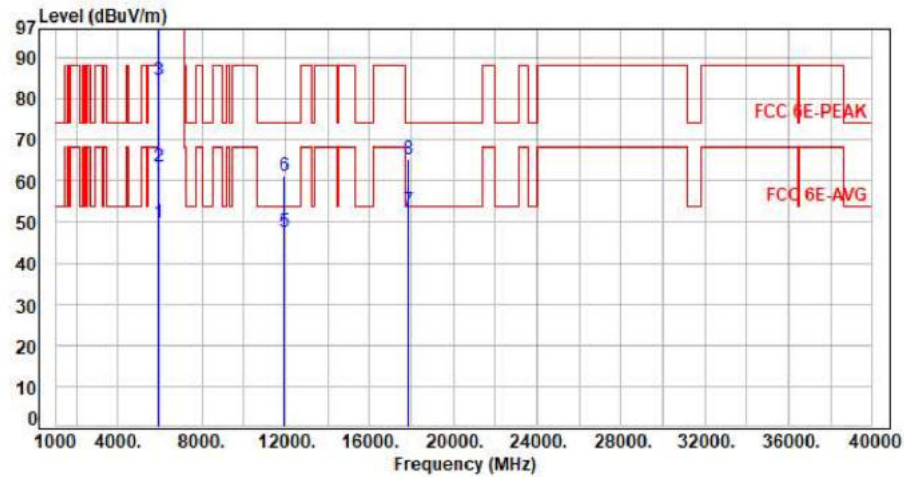

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.25	49.91	68.20	-18.29	Average	363	23	P
2	5925.00	7.66	55.91	63.57	88.20	-24.63	Peak	363	23	P
3	5955.00	7.68	76.80	84.48	200.00	-115.52	Average	363	23	P
4	5955.00	7.68	90.30	97.98	200.00	-102.02	Peak	363	23	P
5	11910.00	18.06	29.35	47.41	54.00	-6.59	Average	100	127	P
6	11910.00	18.06	43.14	61.20	74.00	-12.80	Peak	100	127	P
7	17865.00	27.77	24.81	52.58	54.00	-1.42	Average	100	258	P
8	17865.00	27.77	37.43	65.20	74.00	-8.80	Peak	100	258	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

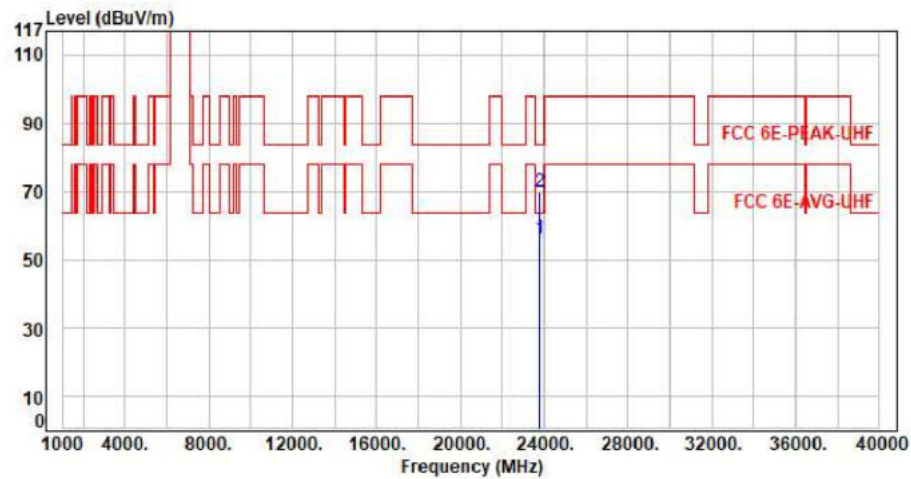


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.97	56.16	63.54	-7.38	Average	150	360	P
2	23820.00	11.19	58.86	70.05	83.54	-13.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

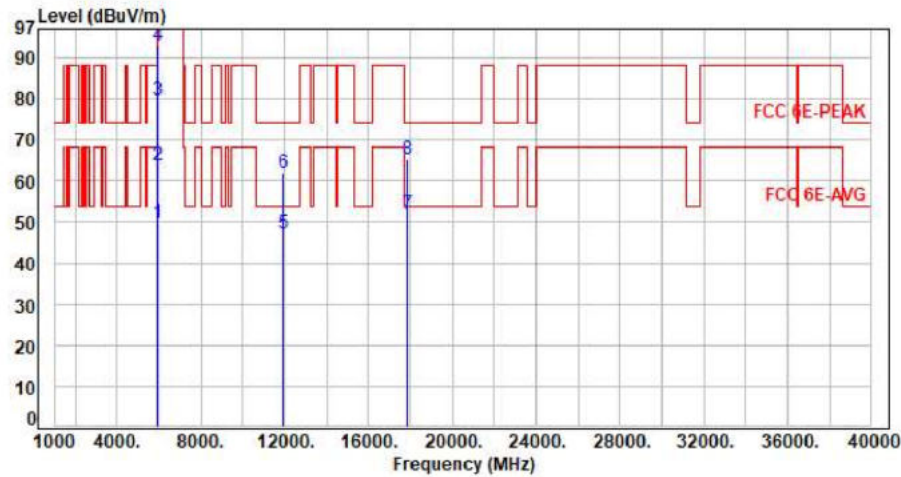


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.14	49.80	68.20	-18.40	Average	397	203	P
2	5925.00	7.66	56.15	63.81	88.20	-24.39	Peak	397	203	P
3	5955.00	7.68	72.12	79.80	200.00	-120.20	Average	397	203	P
4	5955.00	7.68	85.17	92.85	200.00	-107.15	Peak	397	203	P
5	11910.00	18.06	29.32	47.38	54.00	-6.62	Average	100	244	P
6	11910.00	18.06	43.96	62.02	74.00	-11.98	Peak	100	244	P
7	17865.00	27.77	24.15	51.92	54.00	-2.08	Average	100	206	P
8	17865.00	27.77	37.48	65.25	74.00	-8.75	Peak	100	206	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

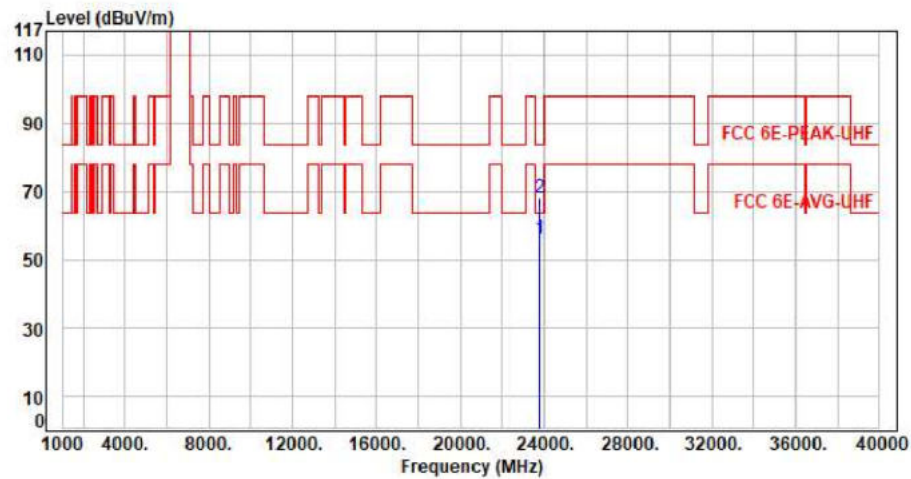


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	45.08	56.27	63.54	-7.27	Average	150	360	P
2	23820.00	11.19	56.84	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

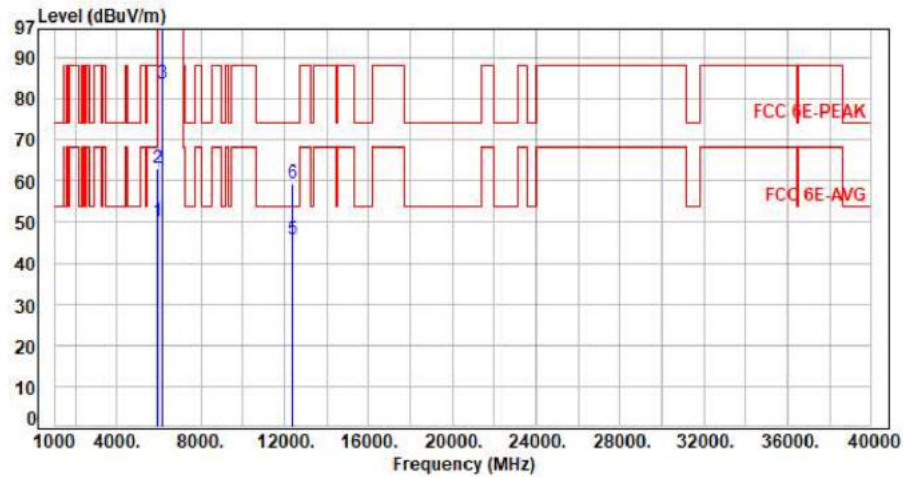


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.44	50.10	68.20	-18.10	Average	366	25	P
2	5925.00	7.66	55.50	63.16	88.20	-25.04	Peak	366	25	P
3	6175.00	8.35	75.48	83.83	200.00	-116.17	Average	366	25	P
4	6175.00	8.35	88.67	97.02	200.00	-102.98	Peak	366	25	P
5	12350.00	17.76	27.96	45.72	54.00	-8.28	Average	100	123	P
6	12350.00	17.76	41.55	59.31	74.00	-14.69	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

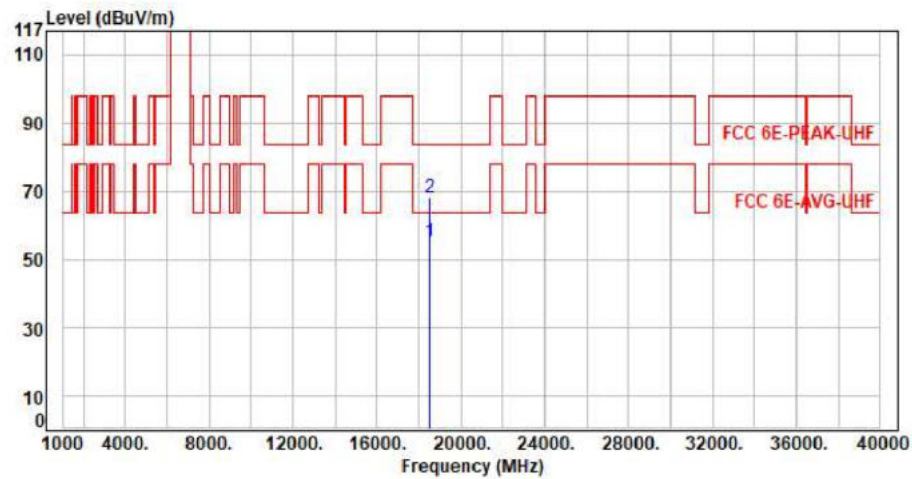


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	44.77	55.32	63.54	-8.22	Average	150	360	P
2	18525.00	10.55	57.34	67.89	83.54	-15.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

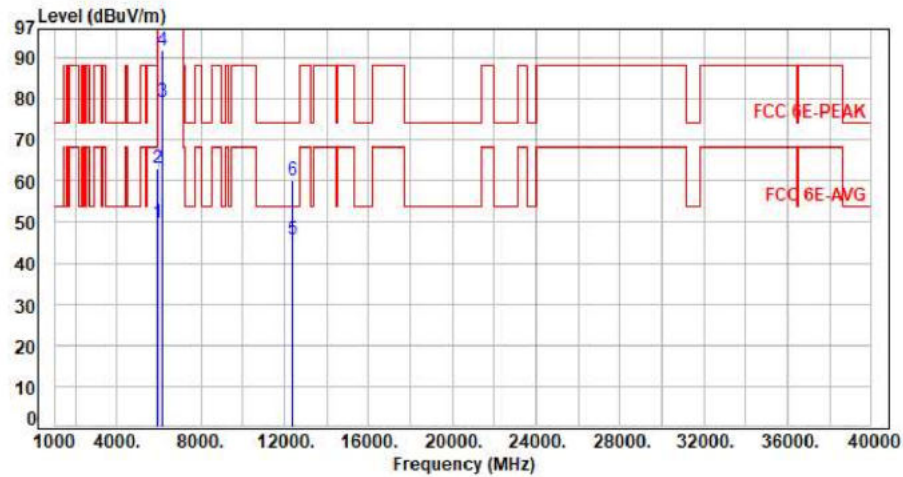


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.28	49.94	68.20	-18.26	Average	400	205	P
2	5925.00	7.66	55.43	63.09	88.20	-25.11	Peak	400	205	P
3	6175.00	8.35	70.83	79.18	200.00	-120.82	Average	400	205	P
4	6175.00	8.35	83.57	91.92	200.00	-108.08	Peak	400	205	P
5	12350.00	17.76	27.95	45.71	54.00	-8.29	Average	100	246	P
6	12350.00	17.76	42.28	60.04	74.00	-13.96	Peak	100	246	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

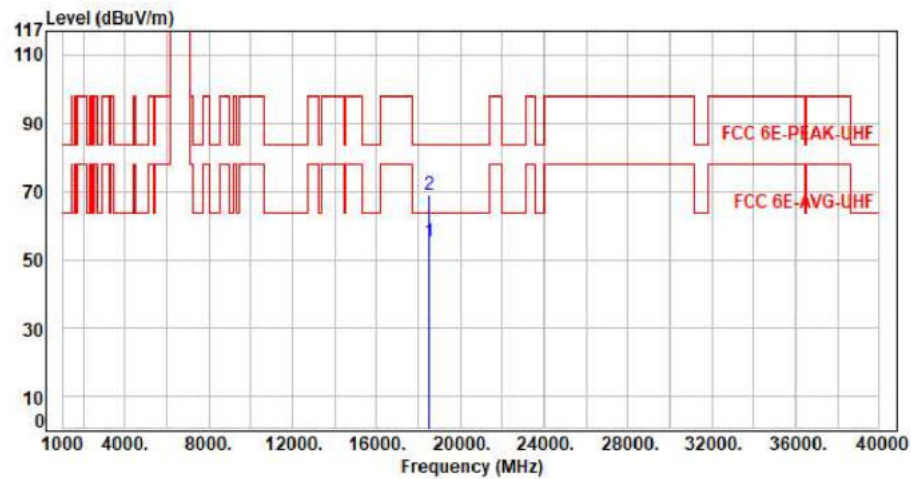


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	44.55	55.10	63.54	-8.44	Average	150	360	P
2	18525.00	10.55	58.61	69.16	83.54	-14.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

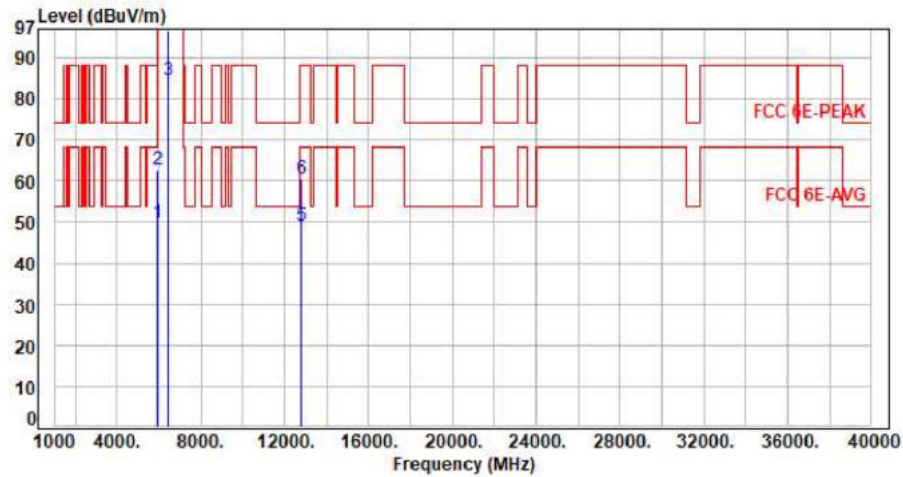


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	360	39	P
2	5925.00	7.66	55.06	62.72	88.20	-25.48	Peak	360	39	P
3	6415.00	8.34	75.97	84.31	200.00	-115.69	Average	360	39	P
4	6415.00	8.34	88.35	96.69	200.00	-103.31	Peak	360	39	P
5	12830.00	18.92	29.98	48.90	68.20	-19.30	Average	100	221	P
6	12830.00	18.92	41.73	60.65	88.20	-27.55	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

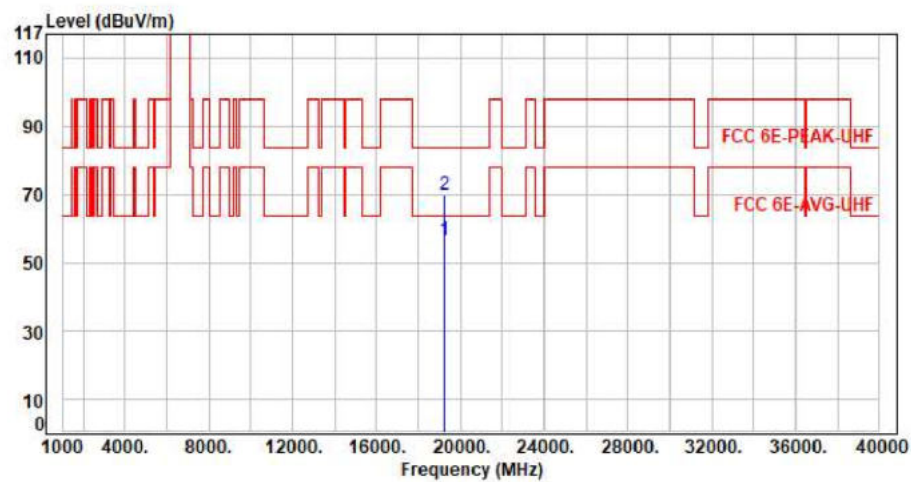


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	44.97	56.34	63.54	-7.20	Average	150	360	P
2	19245.00	11.37	58.44	69.81	83.54	-13.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

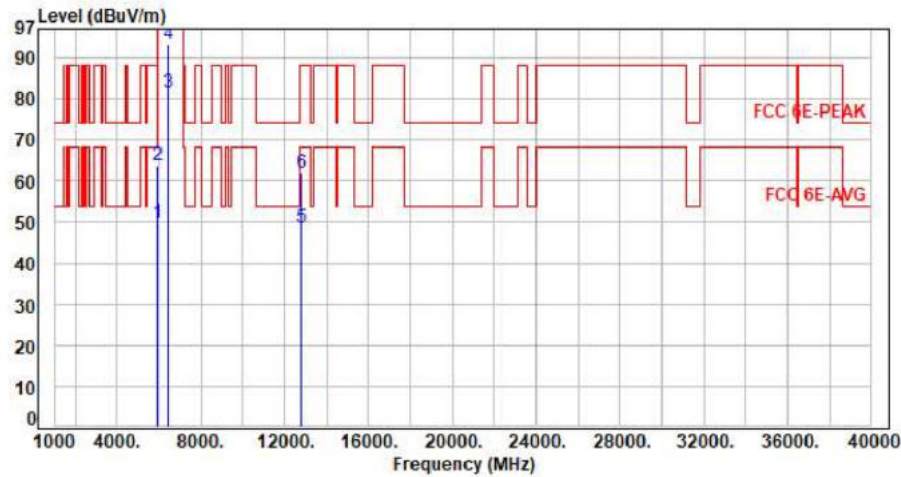


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	388	213	P
2	5925.00	7.66	56.10	63.76	88.20	-24.44	Peak	388	213	P
3	6415.00	8.34	73.03	81.37	200.00	-118.63	Average	388	213	P
4	6415.00	8.34	85.05	93.39	200.00	-106.61	Peak	388	213	P
5	12830.00	18.92	29.64	48.56	68.20	-19.64	Average	100	113	P
6	12830.00	18.92	43.17	62.09	88.20	-26.11	Peak	100	113	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

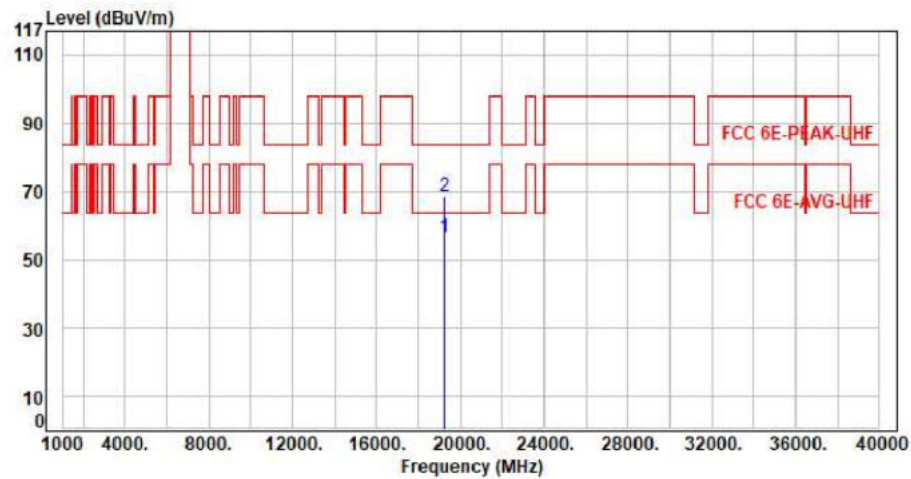


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.32	56.69	63.54	-6.85	Average	150	360	P
2	19245.00	11.37	56.97	68.34	83.54	-15.20	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

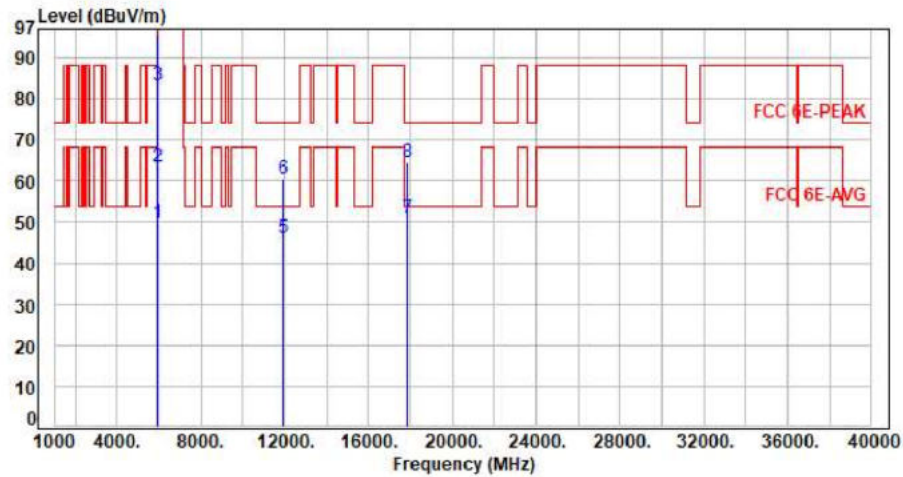


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	364	27	P
2	5925.00	7.66	55.82	63.48	88.20	-24.72	Peak	364	27	P
3	5965.00	7.71	75.52	83.23	200.00	-116.77	Average	364	27	P
4	5965.00	7.71	87.89	95.60	200.00	-104.40	Peak	364	27	P
5	11930.00	18.05	28.12	46.17	54.00	-7.83	Average	100	128	P
6	11930.00	18.05	42.34	60.39	74.00	-13.61	Peak	100	128	P
7	17895.00	27.89	23.12	51.01	54.00	-2.99	Average	100	261	P
8	17895.00	27.89	36.55	64.44	74.00	-9.56	Peak	100	261	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

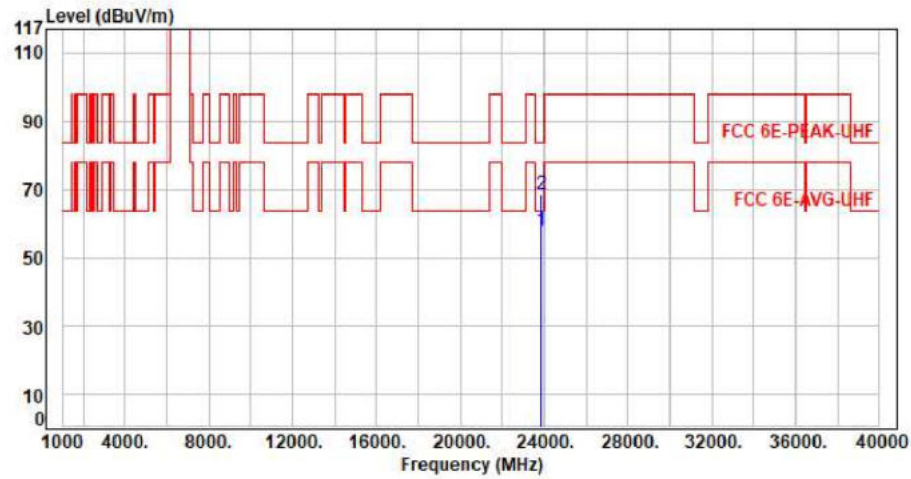


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	46.44	57.64	63.54	-5.90	Average	150	360	P
2	23860.00	11.20	57.25	68.45	83.54	-15.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

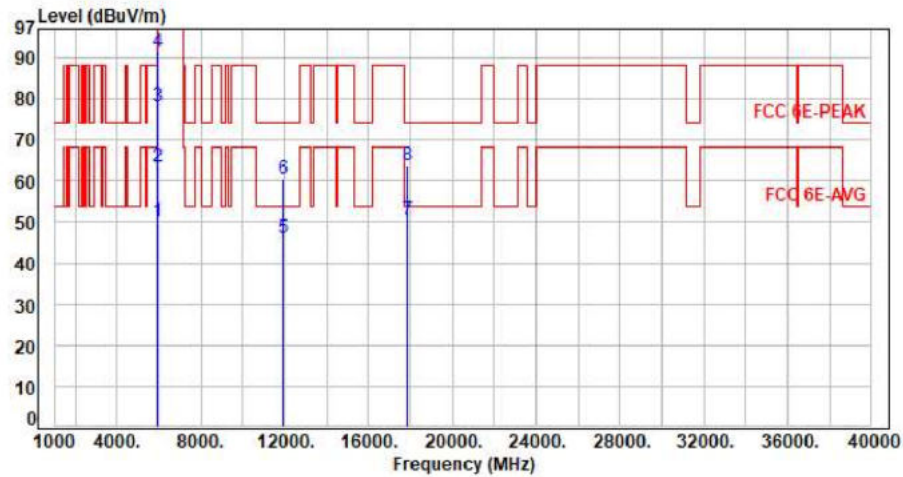

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.33	49.99	68.20	-18.21	Average	400	212	P
2	5925.00	7.66	55.66	63.32	88.20	-24.88	Peak	400	212	P
3	5965.00	7.71	70.63	78.34	200.00	-121.66	Average	400	212	P
4	5965.00	7.71	83.59	91.30	200.00	-108.70	Peak	400	212	P
5	11930.00	18.05	28.04	46.09	54.00	-7.91	Average	100	247	P
6	11930.00	18.05	42.43	60.48	74.00	-13.52	Peak	100	247	P
7	17895.00	27.89	22.58	50.47	54.00	-3.53	Average	100	203	P
8	17895.00	27.89	35.80	63.69	74.00	-10.31	Peak	100	203	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

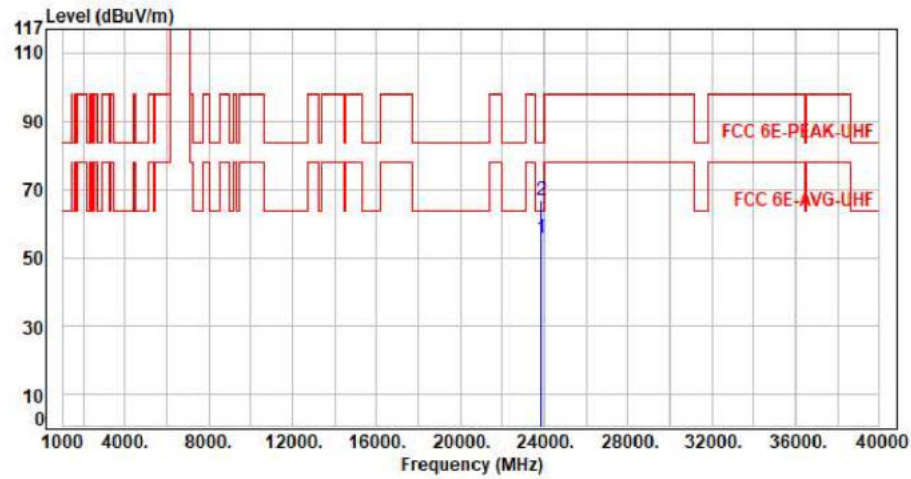


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.49	55.69	63.54	-7.85	Average	150	360	P
2	23860.00	11.20	55.66	66.86	83.54	-16.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

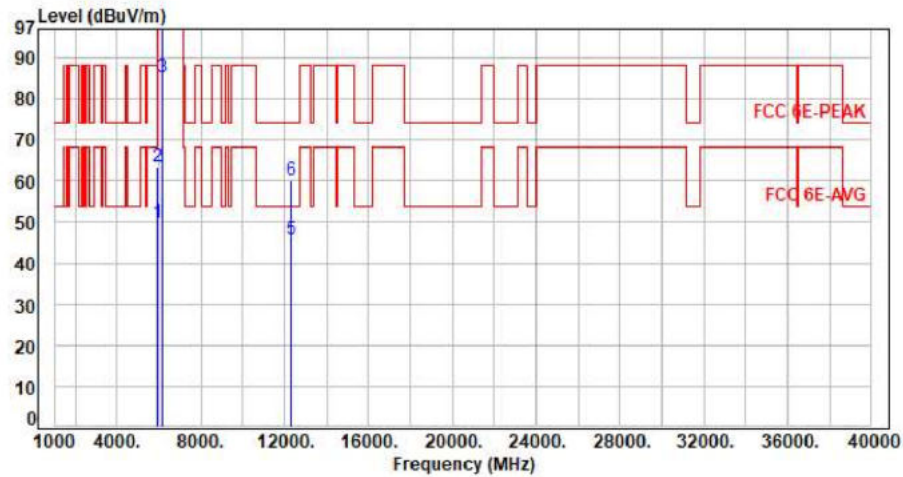


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	372	24	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	372	24	P
3	6165.00	8.34	76.89	85.23	200.00	-114.77	Average	372	24	P
4	6165.00	8.34	90.52	98.86	200.00	-101.14	Peak	372	24	P
5	12330.00	17.71	27.97	45.68	54.00	-8.32	Average	100	128	P
6	12330.00	17.71	42.26	59.97	74.00	-14.03	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

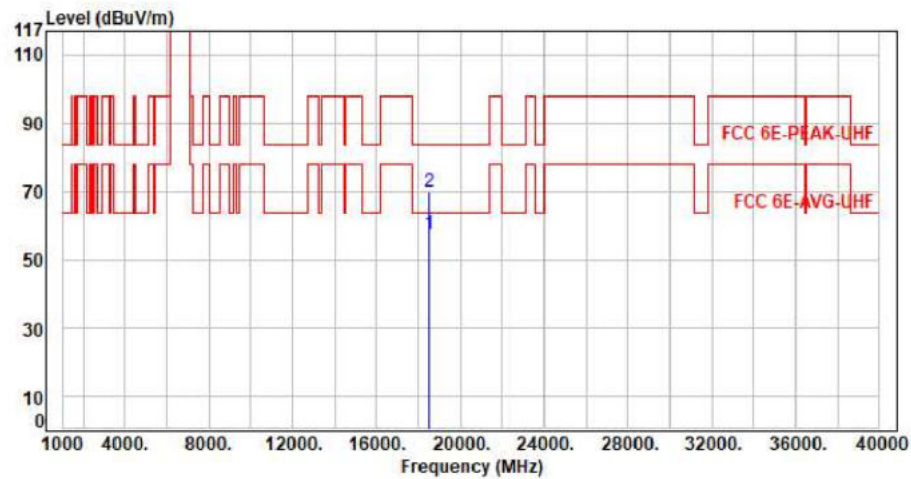

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.81	57.22	63.54	-6.32	Average	150	360	P
2	18495.00	10.41	59.64	70.05	83.54	-13.49	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

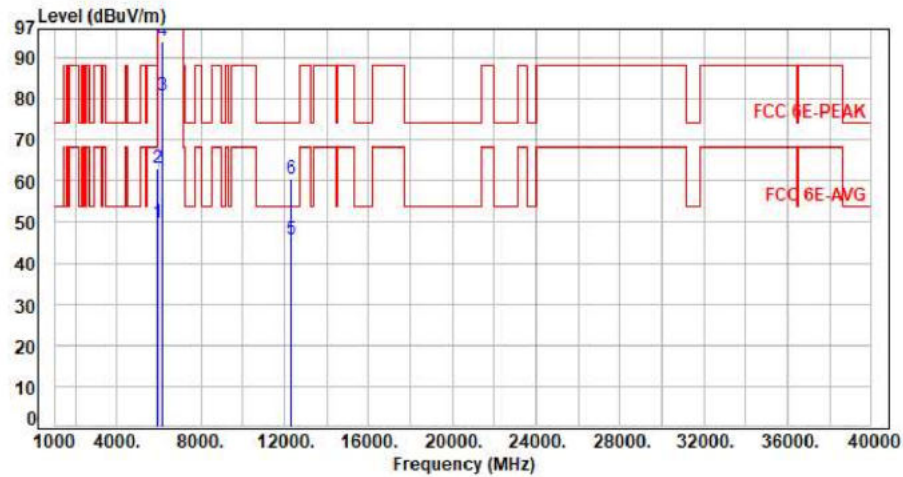


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.31	49.97	68.20	-18.23	Average	400	198	P
2	5925.00	7.66	55.47	63.13	88.20	-25.07	Peak	400	198	P
3	6165.00	8.34	72.34	80.68	200.00	-119.32	Average	400	198	P
4	6165.00	8.34	85.69	94.03	200.00	-105.97	Peak	400	198	P
5	12330.00	17.71	28.08	45.79	54.00	-8.21	Average	100	238	P
6	12330.00	17.71	42.86	60.57	74.00	-13.43	Peak	100	238	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

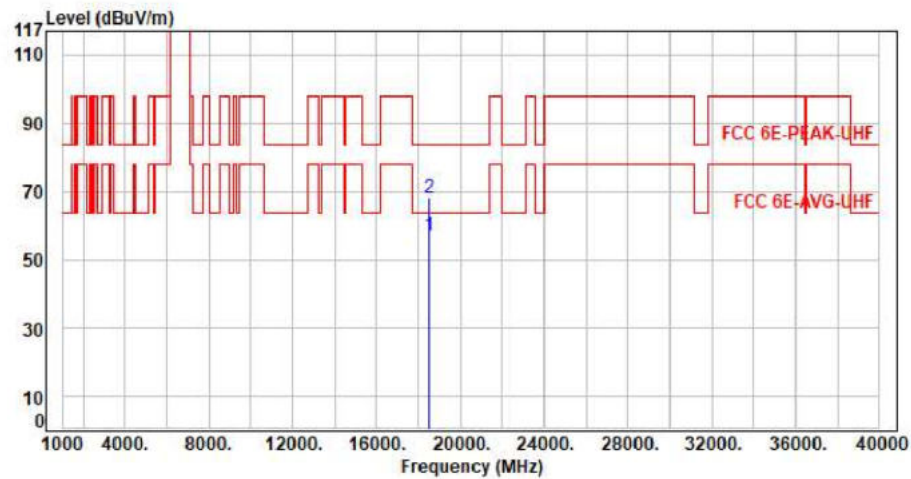


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.61	57.02	63.54	-6.52	Average	150	360	P
2	18495.00	10.41	57.74	68.15	83.54	-15.39	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

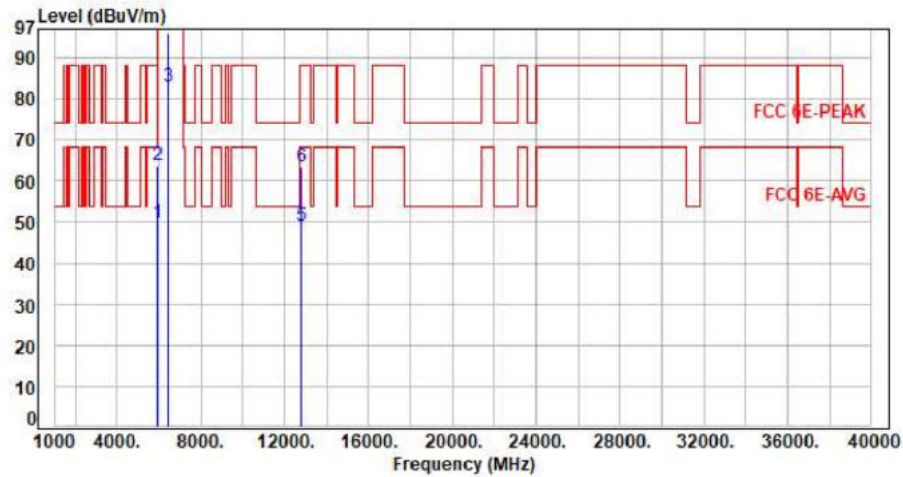


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.24	49.90	68.20	-18.30	Average	283	39	P
2	5925.00	7.66	56.01	63.67	88.20	-24.53	Peak	283	39	P
3	6405.00	8.35	74.78	83.13	200.00	-116.87	Average	283	39	P
4	6405.00	8.35	87.53	95.88	200.00	-104.12	Peak	283	39	P
5	12810.00	18.88	30.33	49.21	68.20	-18.99	Average	100	188	P
6	12810.00	18.88	44.69	63.57	88.20	-24.63	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

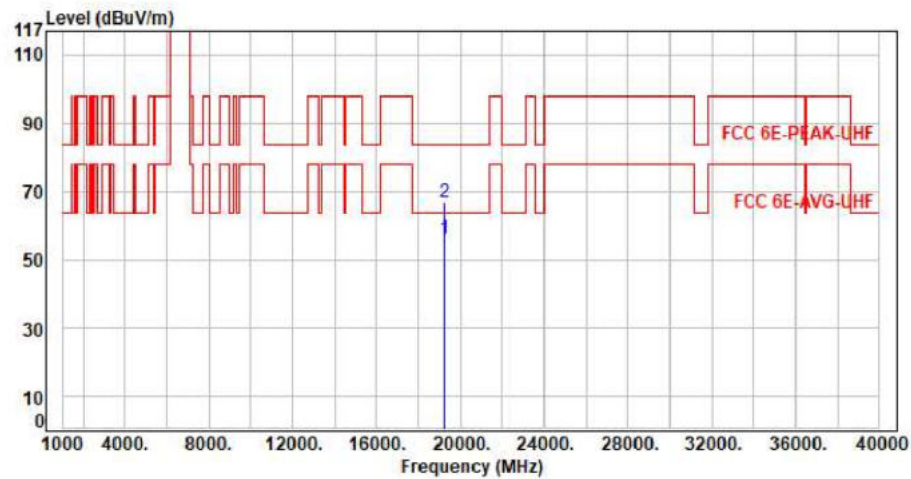


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.69	55.93	63.54	-7.61	Average	150	360	P
2	19215.00	11.24	55.53	66.77	83.54	-16.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

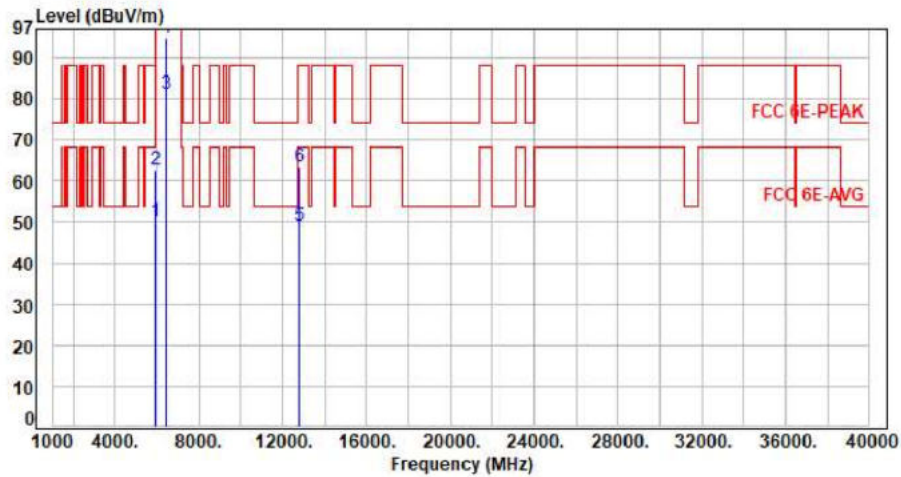


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	381	205	P
2	5925.00	7.66	55.21	62.87	88.20	-25.33	Peak	381	205	P
3	6405.00	8.35	72.94	81.29	200.00	-118.71	Average	381	205	P
4	6405.00	8.35	86.26	94.61	200.00	-105.39	Peak	381	205	P
5	12810.00	18.88	30.18	49.06	68.20	-19.14	Average	100	228	P
6	12810.00	18.88	44.59	63.47	88.20	-24.73	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

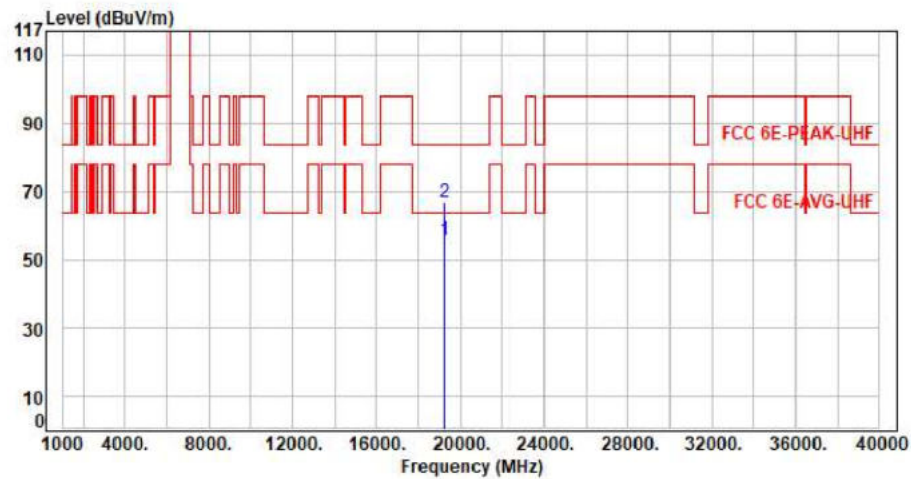


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.45	55.69	63.54	-7.85	Average	150	360	P
2	19215.00	11.24	55.65	66.89	83.54	-16.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

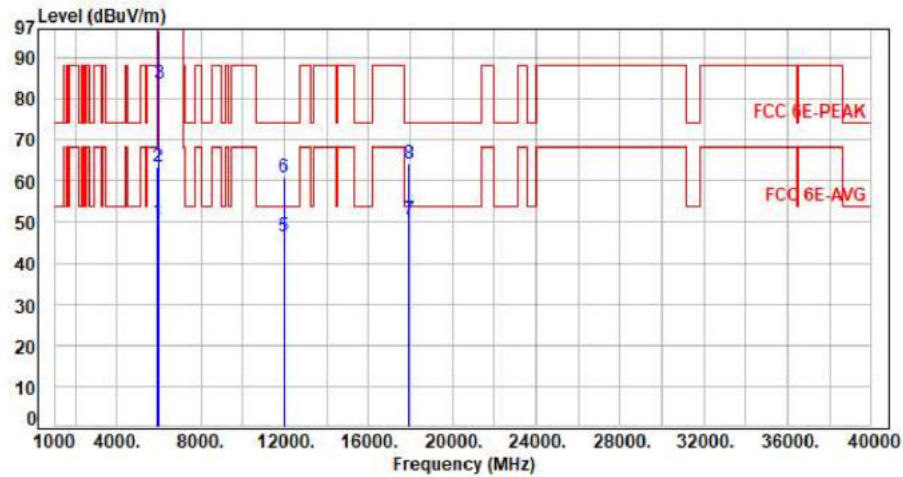

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	364	23	P
2	5925.00	7.66	55.62	63.28	88.20	-24.92	Peak	364	23	P
3	5985.00	7.75	76.04	83.79	200.00	-116.21	Average	364	23	P
4	5985.00	7.75	88.94	96.69	200.00	-103.31	Peak	364	23	P
5	11970.00	18.02	28.38	46.40	54.00	-7.60	Average	100	125	P
6	11970.00	18.02	42.71	60.73	74.00	-13.27	Peak	100	125	P
7	17955.00	28.04	22.54	50.58	54.00	-3.42	Average	100	257	P
8	17955.00	28.04	36.19	64.23	74.00	-9.77	Peak	100	257	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

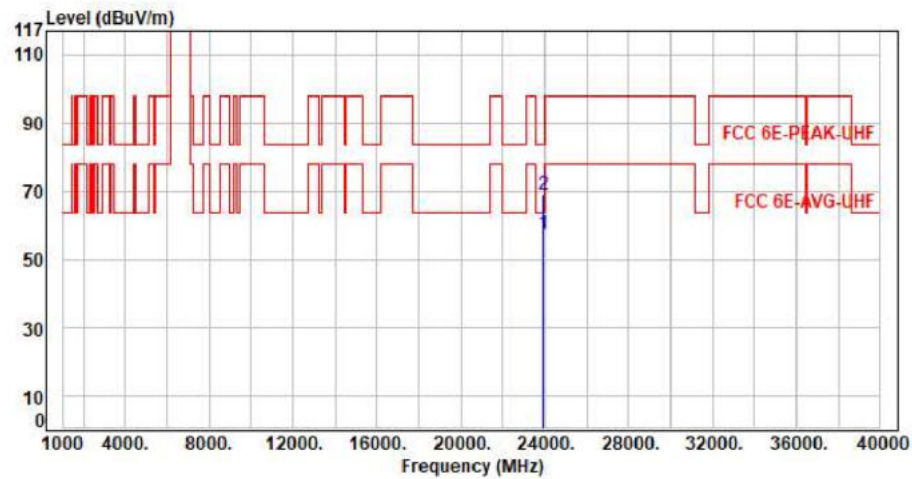


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	46.18	57.54	63.54	-6.00	Average	150	360	P
2	23940.00	11.36	57.64	69.00	83.54	-14.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

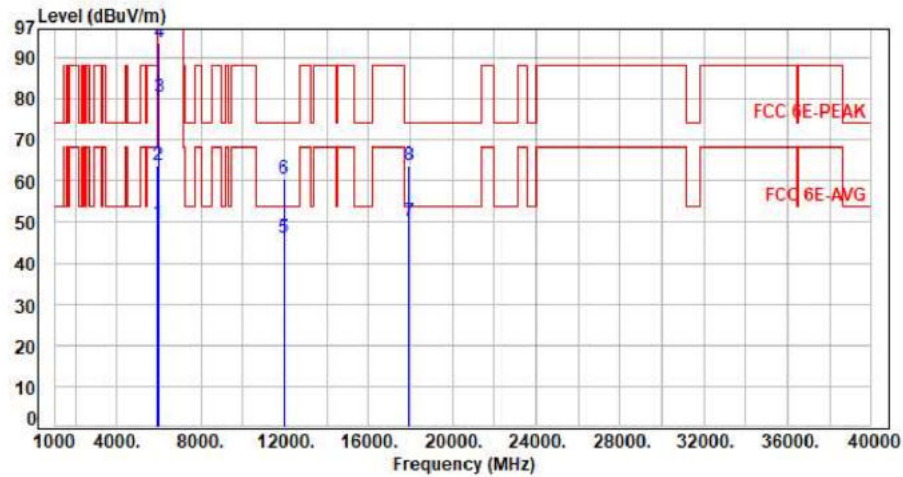

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	394	206	P
2	5925.00	7.66	56.07	63.73	88.20	-24.47	Peak	394	206	P
3	5985.00	7.75	72.72	80.47	200.00	-119.53	Average	394	206	P
4	5985.00	7.75	85.93	93.68	200.00	-106.32	Peak	394	206	P
5	11970.00	18.02	27.94	45.96	54.00	-8.04	Average	100	237	P
6	11970.00	18.02	42.45	60.47	74.00	-13.53	Peak	100	237	P
7	17955.00	28.04	22.28	50.32	54.00	-3.68	Average	100	200	P
8	17955.00	28.04	35.89	63.93	74.00	-10.07	Peak	100	200	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

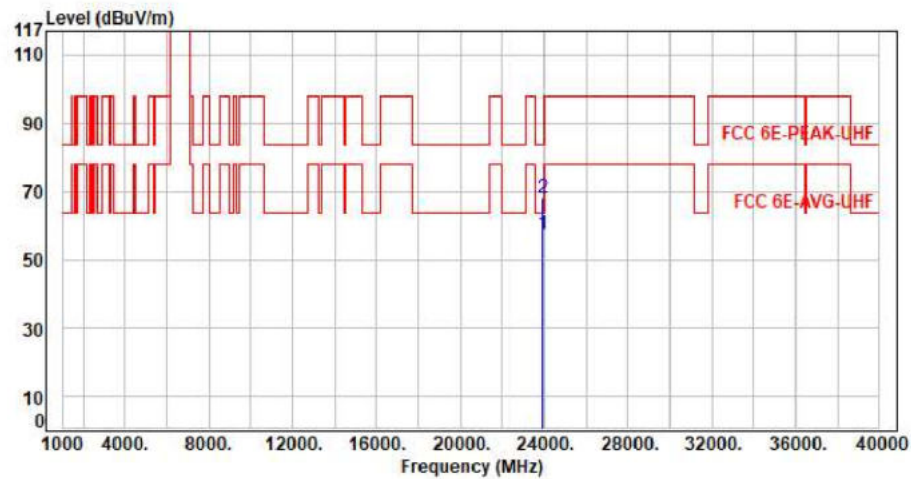


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.93	57.29	63.54	-6.25	Average	150	360	P
2	23940.00	11.36	56.73	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

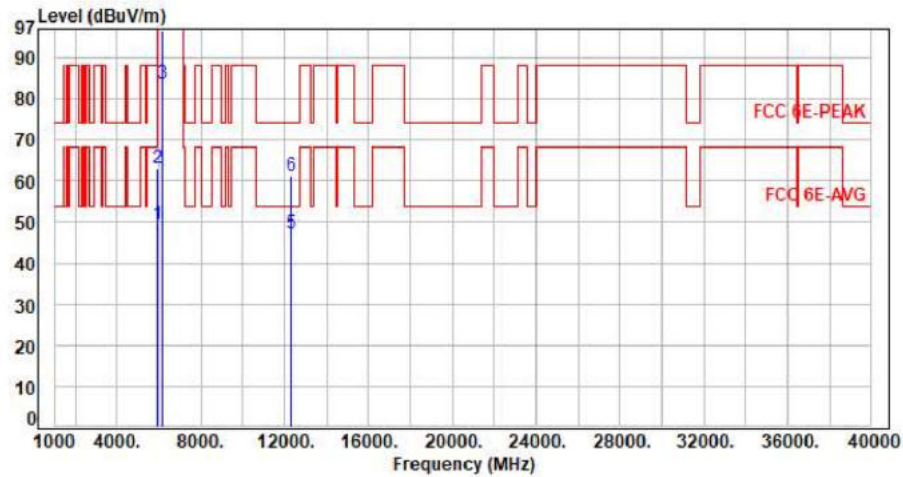


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.93	49.59	68.20	-18.61	Average	304	22	P
2	5925.00	7.66	55.37	63.03	88.20	-25.17	Peak	304	22	P
3	6145.00	8.31	75.39	83.70	200.00	-116.30	Average	304	22	P
4	6145.00	8.31	88.48	96.79	200.00	-103.21	Peak	304	22	P
5	12290.00	17.62	29.54	47.16	54.00	-6.84	Average	100	128	P
6	12290.00	17.62	43.66	61.28	74.00	-12.72	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

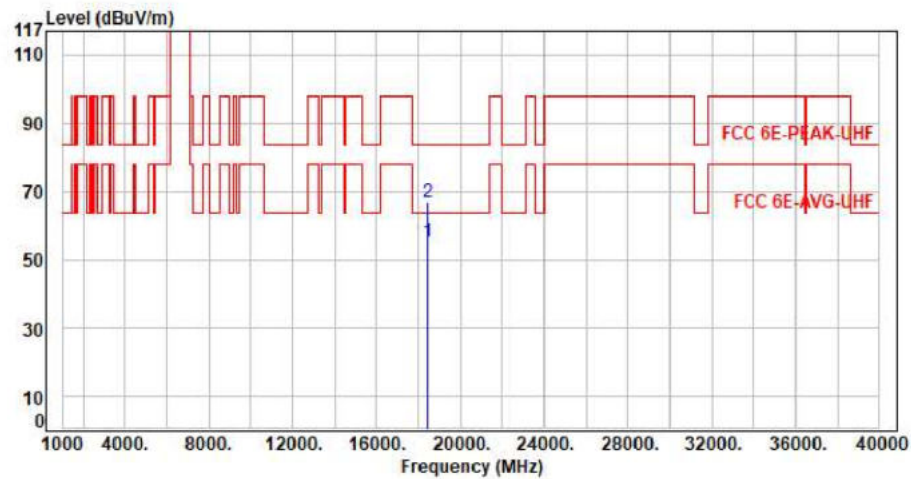


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.98	55.18	63.54	-8.36	Average	150	360	P
2	18435.00	10.20	56.71	66.91	83.54	-16.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

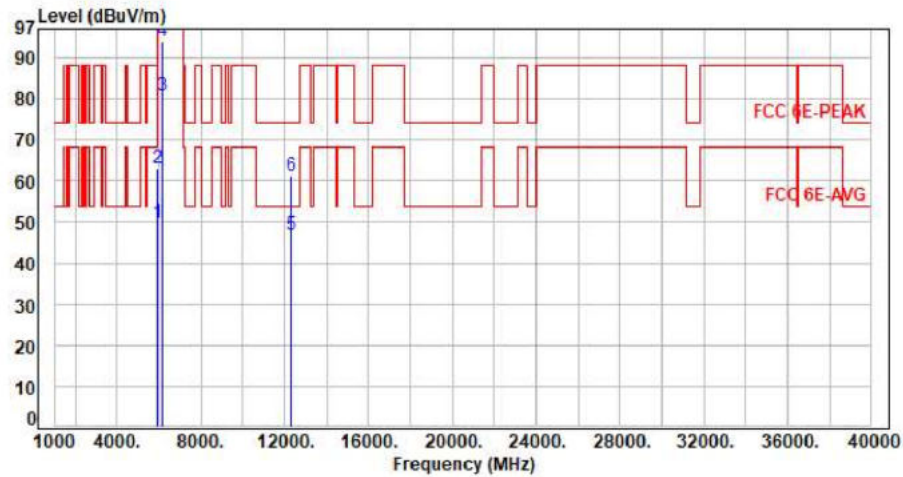


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.95	49.61	68.20	-18.59	Average	388	213	P
2	5925.00	7.66	55.33	62.99	88.20	-25.21	Peak	388	213	P
3	6145.00	8.31	72.48	80.79	200.00	-119.21	Average	388	213	P
4	6145.00	8.31	85.87	94.18	200.00	-105.82	Peak	388	213	P
5	12290.00	17.62	29.32	46.94	54.00	-7.06	Average	100	230	P
6	12290.00	17.62	43.59	61.21	74.00	-12.79	Peak	100	230	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

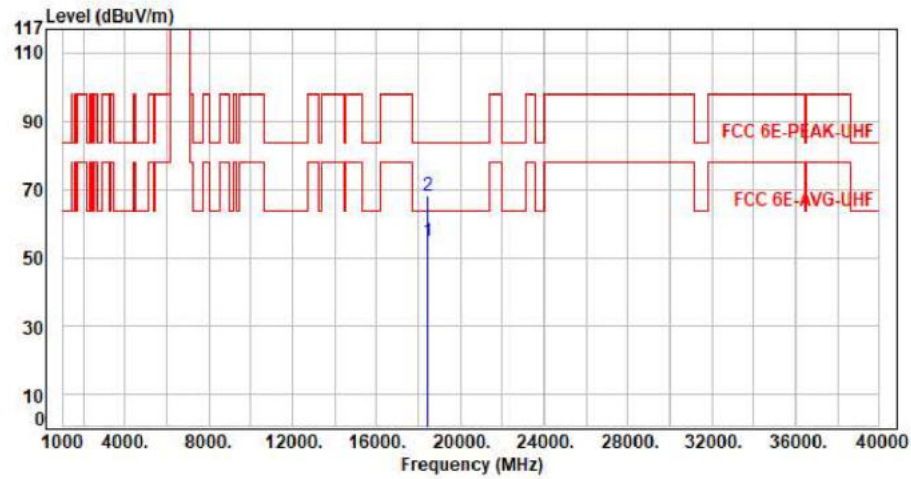

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.33	54.53	63.54	-9.01	Average	150	360	P
2	18435.00	10.20	57.70	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor