




For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

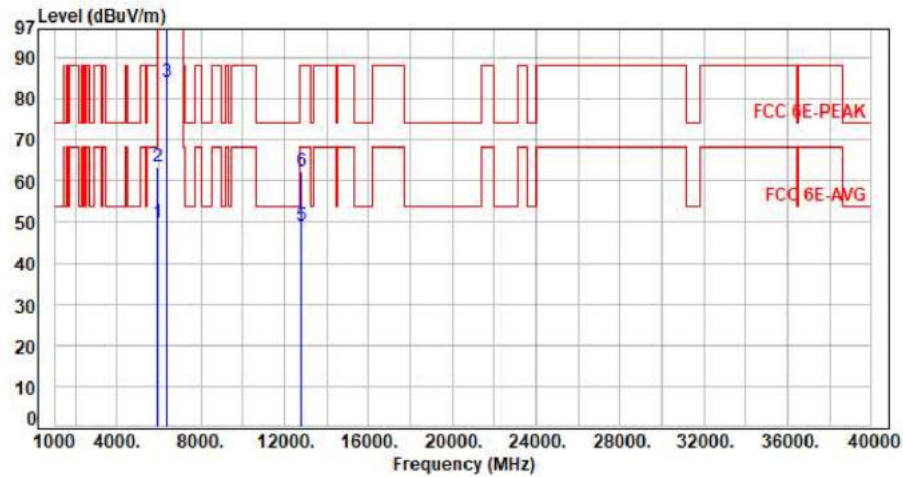


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.11          | 49.77          | 68.20          | -18.43      | Average  | 307         | 39            | P   |
| 2   | 5925.00         | 7.66        | 55.78          | 63.44          | 88.20          | -24.76      | Peak     | 307         | 39            | P   |
| 3   | 6385.00         | 8.34        | 75.73          | 84.07          | 200.00         | -115.93     | Average  | 307         | 39            | P   |
| 4   | 6385.00         | 8.34        | 88.93          | 97.27          | 200.00         | -102.73     | Peak     | 307         | 39            | P   |
| 5   | 12770.00        | 18.73       | 30.17          | 48.90          | 68.20          | -19.30      | Average  | 100         | 226           | P   |
| 6   | 12770.00        | 18.73       | 43.69          | 62.42          | 88.20          | -25.78      | Peak     | 100         | 226           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

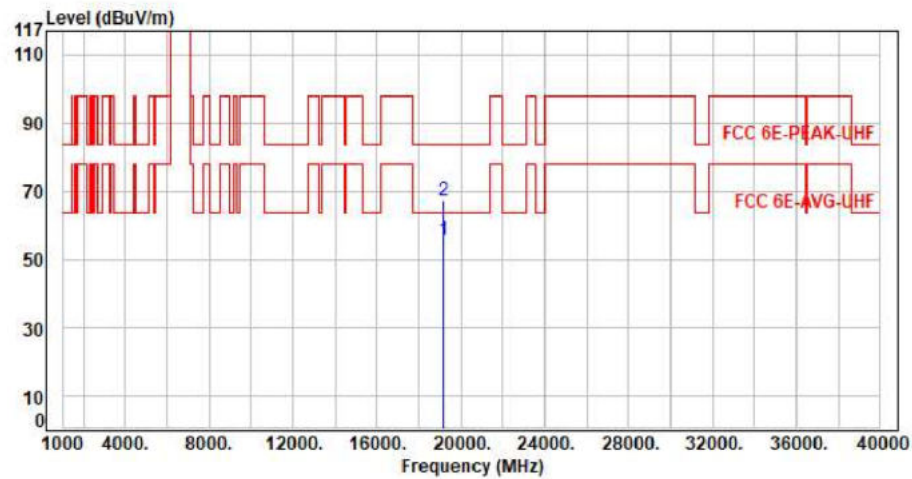


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19155.00           | 11.34          | 44.24             | 55.58             | 63.54             | -7.96          | Average  | 150            | 360              | P   |
| 2   | 19155.00           | 11.34          | 55.77             | 67.11             | 83.54             | -16.43         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

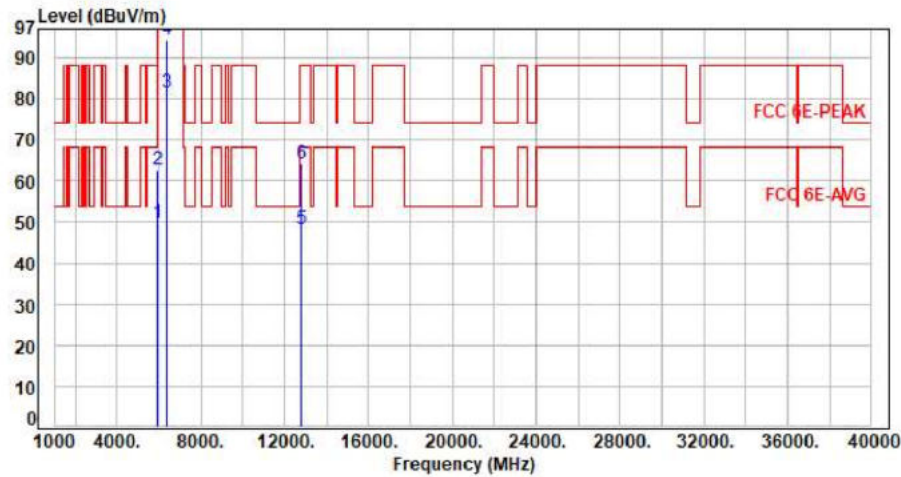


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.07          | 49.73          | 68.20          | -18.47      | Average  | 391         | 290           | P   |
| 2   | 5925.00         | 7.66        | 55.12          | 62.78          | 88.20          | -25.42      | Peak     | 391         | 290           | P   |
| 3   | 6385.00         | 8.34        | 73.05          | 81.39          | 200.00         | -118.61     | Average  | 391         | 290           | P   |
| 4   | 6385.00         | 8.34        | 86.04          | 94.38          | 200.00         | -105.62     | Peak     | 391         | 290           | P   |
| 5   | 12770.00        | 18.73       | 29.64          | 48.37          | 68.20          | -19.83      | Average  | 100         | 126           | P   |
| 6   | 12770.00        | 18.73       | 45.62          | 64.35          | 88.20          | -23.85      | Peak     | 100         | 126           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH87 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

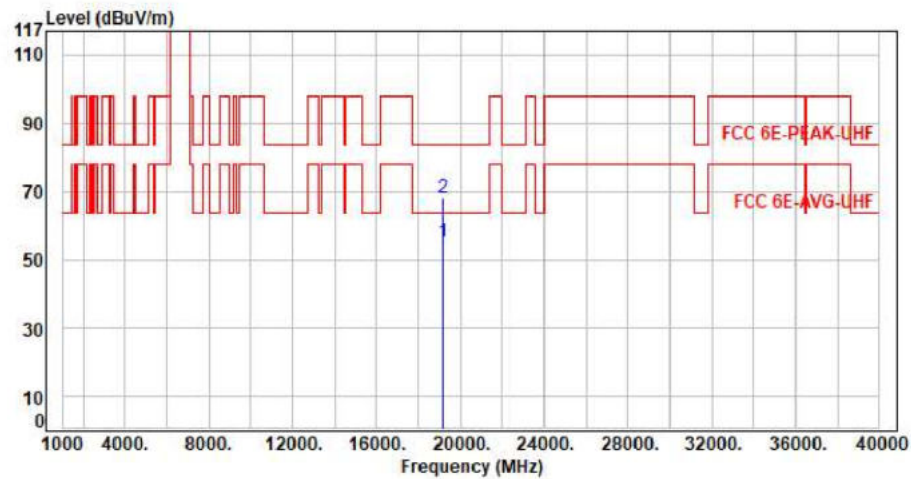


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19155.00           | 11.34          | 44.02             | 55.36             | 63.54             | -8.18          | Average  | 150            | 360              | P   |
| 2   | 19155.00           | 11.34          | 56.95             | 68.29             | 83.54             | -15.25         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

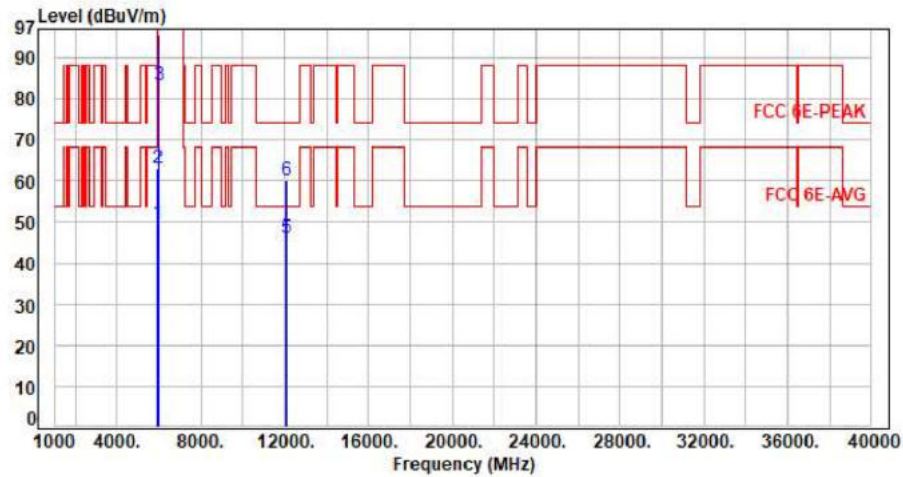


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 41.97             | 49.63             | 68.20             | -18.57         | Average  | 384            | 20               | P   |
| 2   | 5925.00            | 7.66           | 55.38             | 63.04             | 88.20             | -25.16         | Peak     | 384            | 20               | P   |
| 3   | 6025.00            | 7.91           | 75.44             | 83.35             | 200.00            | -116.65        | Average  | 384            | 20               | P   |
| 4   | 6025.00            | 7.91           | 87.58             | 95.49             | 200.00            | -104.51        | Peak     | 384            | 20               | P   |
| 5   | 12050.00           | 17.81          | 28.16             | 45.97             | 54.00             | -8.03          | Average  | 100            | 130              | P   |
| 6   | 12050.00           | 17.81          | 42.42             | 60.23             | 74.00             | -13.77         | Peak     | 100            | 130              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

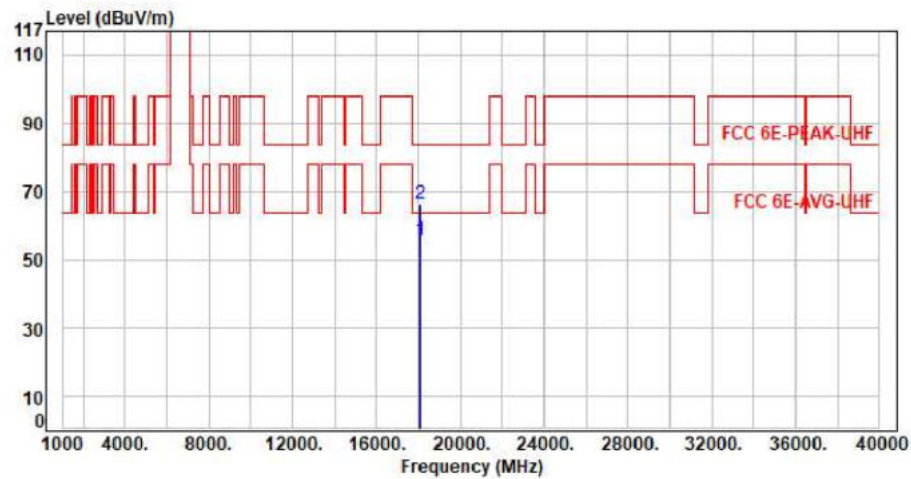


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 18075.00           | 9.90           | 45.58             | 55.48             | 63.54             | -8.06          | Average  | 150            | 360              | P   |
| 2   | 18075.00           | 9.90           | 56.42             | 66.32             | 83.54             | -17.22         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

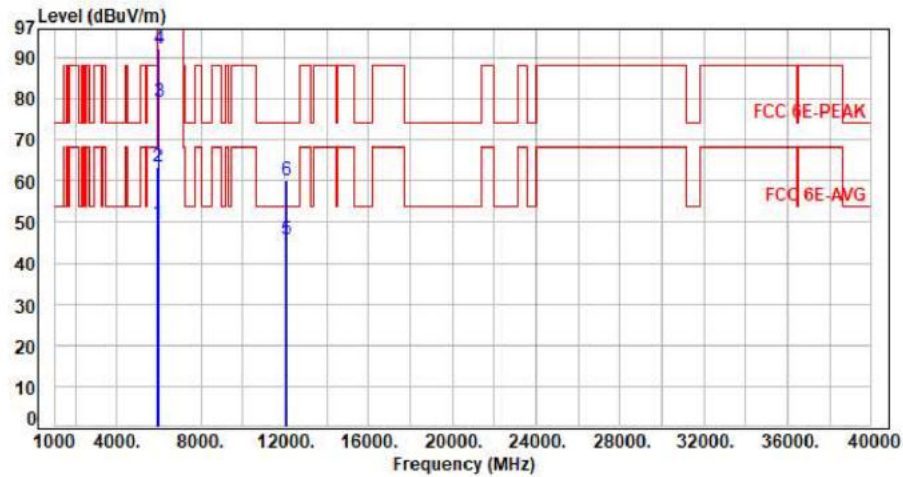


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 42.18             | 49.84             | 68.20             | -18.36         | Average  | 392            | 211              | P   |
| 2   | 5925.00            | 7.66           | 55.60             | 63.26             | 88.20             | -24.94         | Peak     | 392            | 211              | P   |
| 3   | 6025.00            | 7.91           | 71.53             | 79.44             | 200.00            | -120.56        | Average  | 392            | 211              | P   |
| 4   | 6025.00            | 7.91           | 84.28             | 92.19             | 200.00            | -107.81        | Peak     | 392            | 211              | P   |
| 5   | 12050.00           | 17.81          | 27.79             | 45.60             | 54.00             | -8.40          | Average  | 100            | 240              | P   |
| 6   | 12050.00           | 17.81          | 42.26             | 60.07             | 74.00             | -13.93         | Peak     | 100            | 240              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

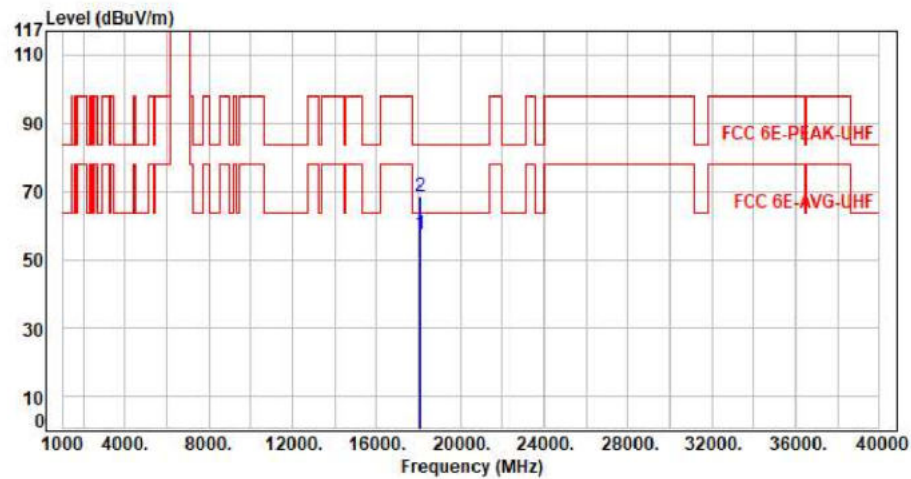


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 18075.00           | 9.90           | 47.44             | 57.34             | 63.54             | -6.20          | Average  | 150            | 360              | P   |
| 2   | 18075.00           | 9.90           | 58.57             | 68.47             | 83.54             | -15.07         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

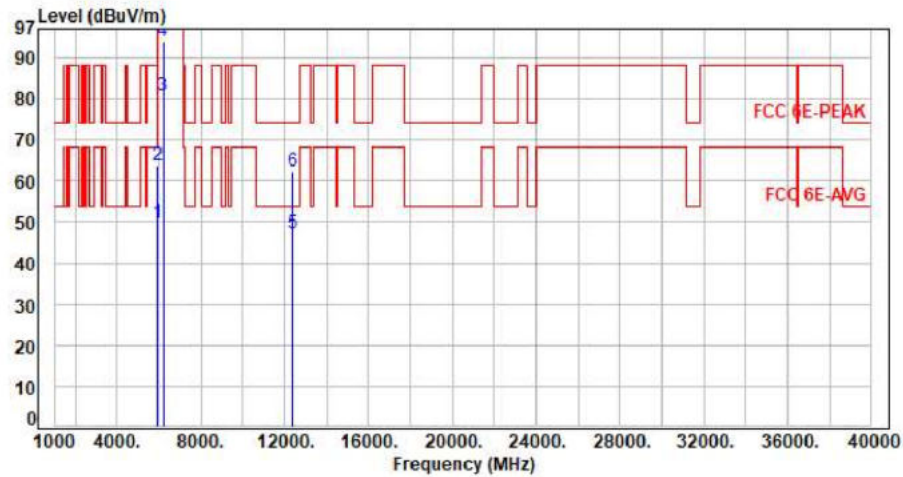


| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.13          | 49.79          | 68.20          | -18.41      | Average  | 272         | 19            | P   |
| 2   | 5925.00         | 7.66        | 56.08          | 63.74          | 88.20          | -24.46      | Peak     | 272         | 19            | P   |
| 3   | 6185.00         | 8.36        | 72.41          | 80.77          | 200.00         | -119.23     | Average  | 272         | 19            | P   |
| 4   | 6185.00         | 8.36        | 85.59          | 93.95          | 200.00         | -106.05     | Peak     | 272         | 19            | P   |
| 5   | 12370.00        | 17.74       | 29.62          | 47.36          | 54.00          | -6.64       | Average  | 100         | 221           | P   |
| 6   | 12370.00        | 17.74       | 44.68          | 62.42          | 74.00          | -11.58      | Peak     | 100         | 221           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

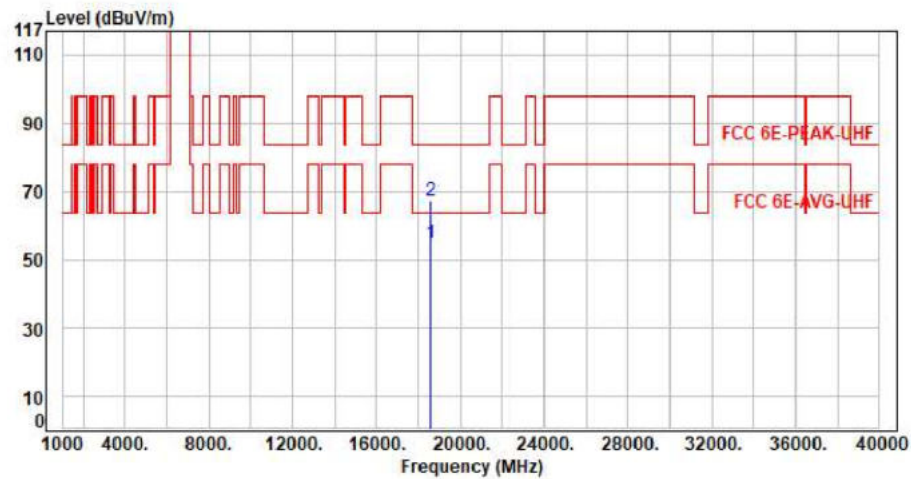


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 18555.00           | 10.66          | 44.28             | 54.94             | 63.54             | -8.60          | Average  | 150            | 360              | P   |
| 2   | 18555.00           | 10.66          | 56.72             | 67.38             | 83.54             | -16.16         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

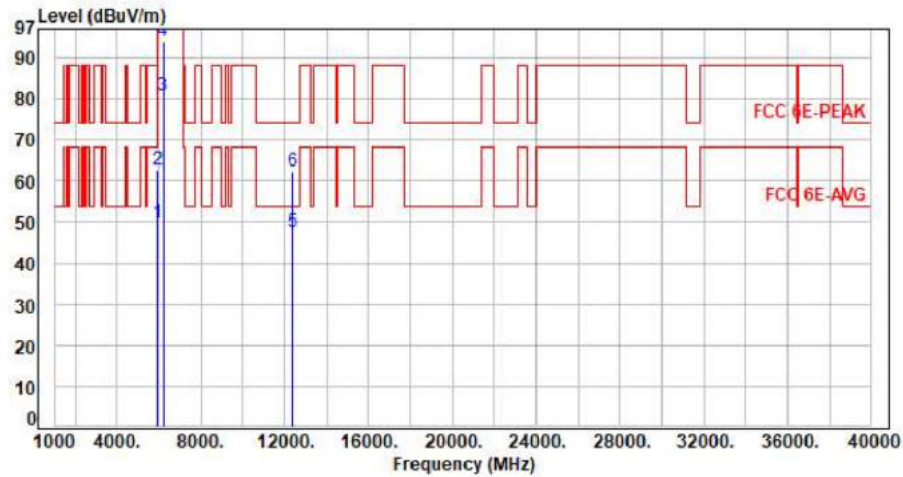


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.24          | 49.90          | 68.20          | -18.30      | Average  | 400         | 209           | P   |
| 2   | 5925.00         | 7.66        | 55.00          | 62.66          | 88.20          | -25.54      | Peak     | 400         | 209           | P   |
| 3   | 6185.00         | 8.36        | 72.58          | 80.94          | 200.00         | -119.06     | Average  | 400         | 209           | P   |
| 4   | 6185.00         | 8.36        | 85.53          | 93.89          | 200.00         | -106.11     | Peak     | 400         | 209           | P   |
| 5   | 12370.00        | 17.74       | 29.67          | 47.41          | 54.00          | -6.59       | Average  | 100         | 134           | P   |
| 6   | 12370.00        | 17.74       | 44.69          | 62.43          | 74.00          | -11.57      | Peak     | 100         | 134           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

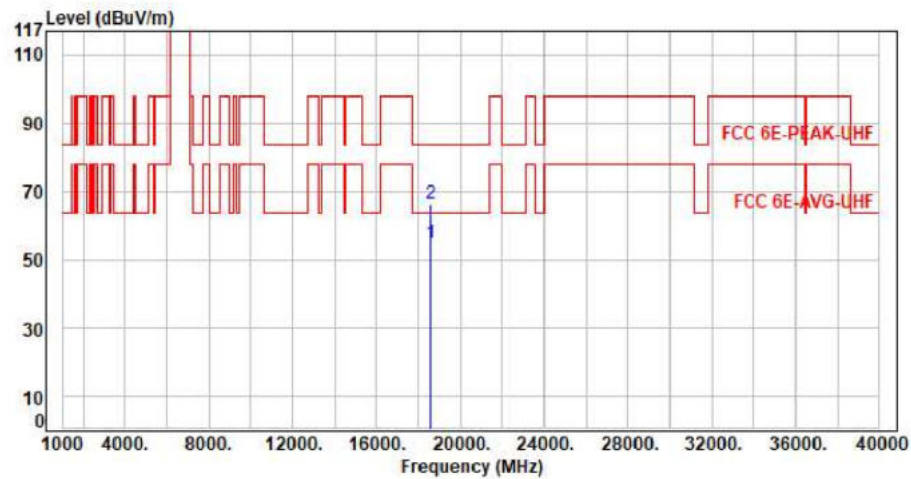


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 18555.00           | 10.66          | 44.09             | 54.75             | 63.54             | -8.79          | Average  | 150            | 360              | P   |
| 2   | 18555.00           | 10.66          | 55.72             | 66.38             | 83.54             | -17.16         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

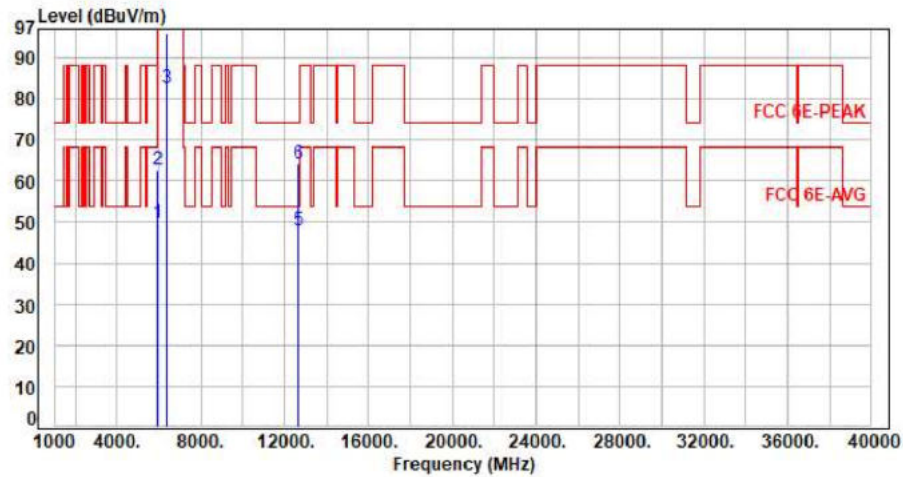


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.15          | 49.81          | 68.20          | -18.39      | Average  | 314         | 39            | P   |
| 2   | 5925.00         | 7.66        | 54.96          | 62.62          | 88.20          | -25.58      | Peak     | 314         | 39            | P   |
| 3   | 6345.00         | 8.31        | 74.43          | 82.74          | 200.00         | -117.26     | Average  | 314         | 39            | P   |
| 4   | 6345.00         | 8.31        | 87.50          | 95.81          | 200.00         | -104.19     | Peak     | 314         | 39            | P   |
| 5   | 12690.00        | 18.27       | 29.58          | 47.85          | 54.00          | -6.15       | Average  | 100         | 221           | P   |
| 6   | 12690.00        | 18.27       | 45.98          | 64.25          | 74.00          | -9.75       | Peak     | 100         | 221           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

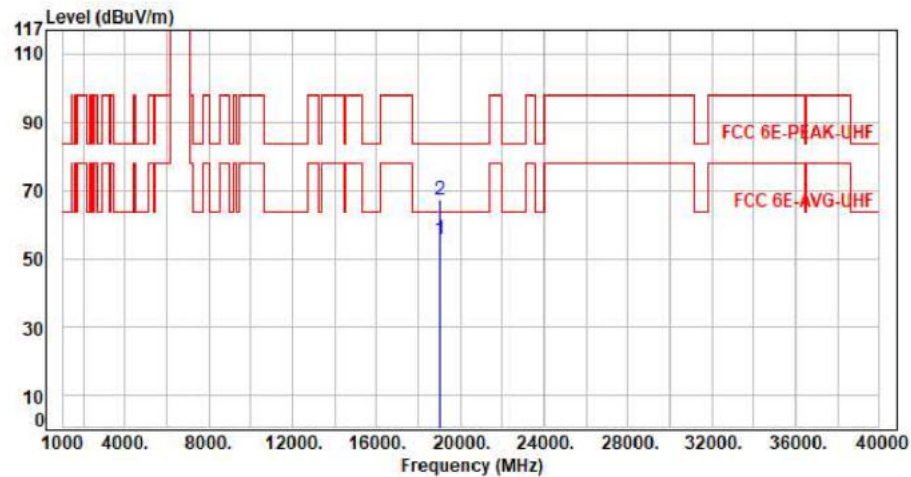


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19035.00           | 11.41          | 44.25             | 55.66             | 63.54             | -7.88          | Average  | 150            | 360              | P   |
| 2   | 19035.00           | 11.41          | 55.76             | 67.17             | 83.54             | -16.37         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

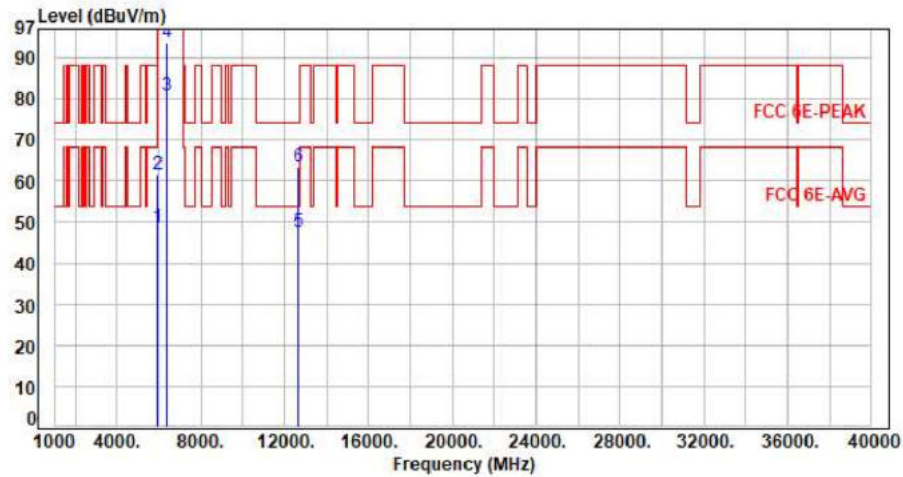


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.15          | 48.81          | 68.20          | -19.39      | Average  | 398         | 202           | P   |
| 2   | 5925.00         | 7.66        | 53.96          | 61.62          | 88.20          | -26.58      | Peak     | 398         | 202           | P   |
| 3   | 6345.00         | 8.31        | 72.43          | 80.74          | 200.00         | -119.26     | Average  | 398         | 202           | P   |
| 4   | 6345.00         | 8.31        | 85.50          | 93.81          | 200.00         | -106.19     | Peak     | 398         | 202           | P   |
| 5   | 12690.00        | 18.27       | 29.45          | 47.72          | 54.00          | -6.28       | Average  | 100         | 113           | P   |
| 6   | 12690.00        | 18.27       | 45.15          | 63.42          | 74.00          | -10.58      | Peak     | 100         | 113           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

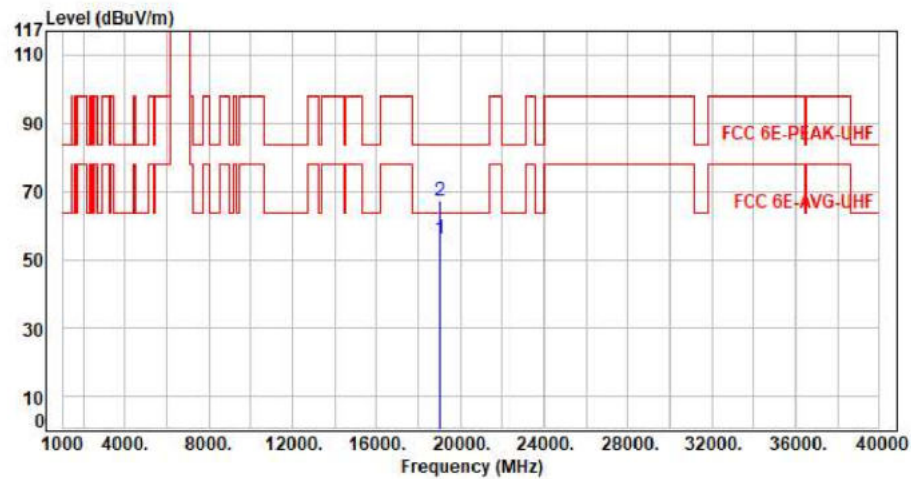


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19035.00           | 11.41          | 44.53             | 55.94             | 63.54             | -7.60          | Average  | 150            | 360              | P   |
| 2   | 19035.00           | 11.41          | 55.67             | 67.08             | 83.54             | -16.46         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

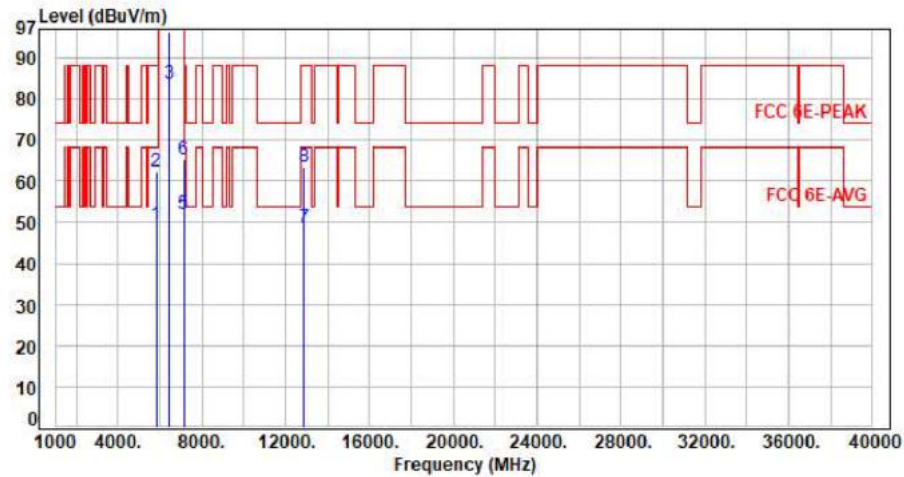

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 7.42        | 42.11          | 49.53          | 68.20          | -18.67      | Average  | 256         | 40            | P   |
| 2   | 5825.00         | 7.42        | 54.99          | 62.41          | 88.20          | -25.79      | Peak     | 256         | 40            | P   |
| 3   | 6435.00         | 8.32        | 75.22          | 83.54          | 200.00         | -116.46     | Average  | 256         | 40            | P   |
| 4   | 6435.00         | 8.32        | 87.89          | 96.21          | 200.00         | -103.79     | Peak     | 256         | 40            | P   |
| 5   | 7125.00         | 10.05       | 42.06          | 52.11          | 68.20          | -16.09      | Average  | 256         | 40            | P   |
| 6   | 7125.00         | 10.05       | 55.16          | 65.21          | 88.20          | -22.99      | Peak     | 256         | 40            | P   |
| 7   | 12870.00        | 19.02       | 29.76          | 48.78          | 68.20          | -19.42      | Average  | 100         | 221           | P   |
| 8   | 12870.00        | 19.02       | 44.57          | 63.59          | 88.20          | -24.61      | Peak     | 100         | 221           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11x20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

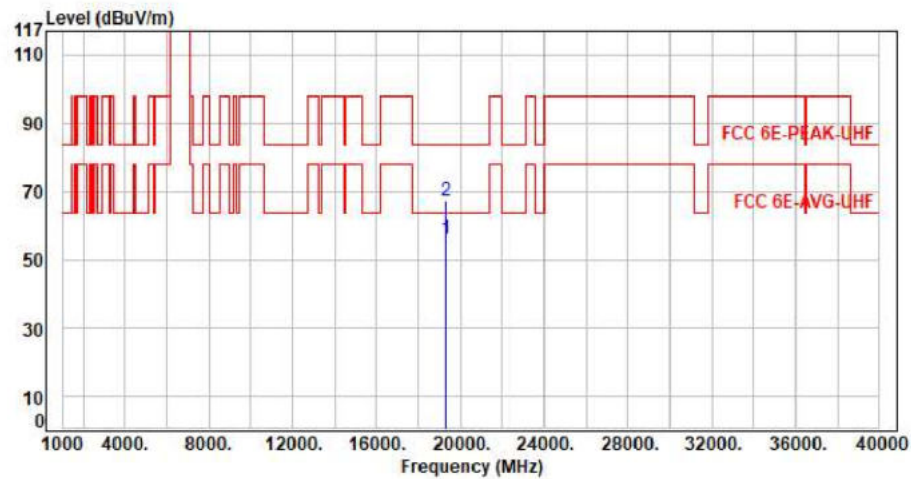


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19305.00           | 11.61          | 44.34             | 55.95             | 63.54             | -7.59          | Average  | 150            | 360              | P   |
| 2   | 19305.00           | 11.61          | 55.48             | 67.09             | 83.54             | -16.45         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

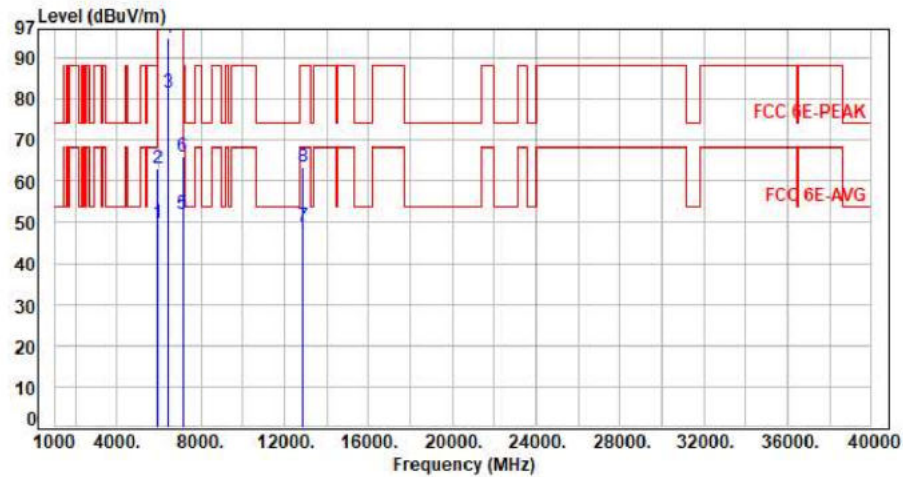

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.20          | 49.86          | 68.20          | -18.34      | Average  | 400         | 217           | P   |
| 2   | 5925.00         | 7.66        | 55.45          | 63.11          | 88.20          | -25.09      | Peak     | 400         | 217           | P   |
| 3   | 6435.00         | 8.32        | 73.17          | 81.49          | 200.00         | -118.51     | Average  | 400         | 217           | P   |
| 4   | 6435.00         | 8.32        | 86.30          | 94.62          | 200.00         | -105.38     | Peak     | 400         | 217           | P   |
| 5   | 7125.00         | 10.05       | 42.06          | 52.11          | 68.20          | -16.09      | Average  | 400         | 217           | P   |
| 6   | 7125.00         | 10.05       | 55.86          | 65.91          | 88.20          | -22.29      | Peak     | 400         | 217           | P   |
| 7   | 12870.00        | 19.02       | 29.94          | 48.96          | 68.20          | -19.24      | Average  | 100         | 114           | P   |
| 8   | 12870.00        | 19.02       | 44.35          | 63.37          | 88.20          | -24.83      | Peak     | 100         | 114           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

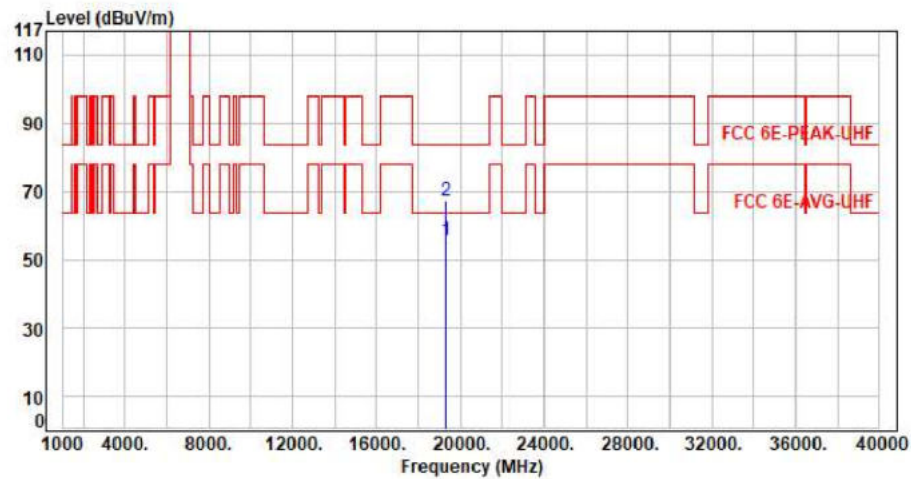


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19305.00           | 11.61          | 44.07             | 55.68             | 63.54             | -7.86          | Average  | 150            | 360              | P   |
| 2   | 19305.00           | 11.61          | 55.36             | 66.97             | 83.54             | -16.57         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

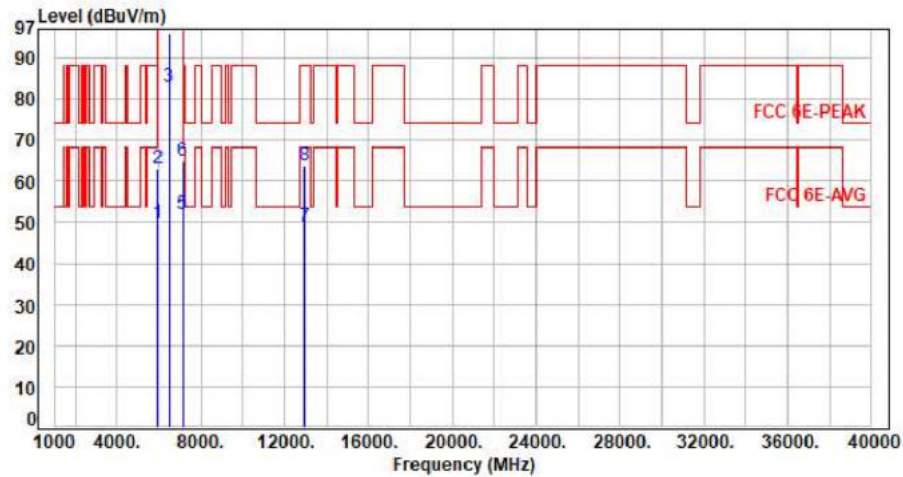


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 42.08             | 49.74             | 68.20             | -18.46         | Average  | 252            | 40               | P   |
| 2   | 5925.00            | 7.66           | 55.49             | 63.15             | 88.20             | -25.05         | Peak     | 252            | 40               | P   |
| 3   | 6475.00            | 8.33           | 74.74             | 83.07             | 200.00            | -116.93        | Average  | 252            | 40               | P   |
| 4   | 6475.00            | 8.33           | 87.58             | 95.91             | 200.00            | -104.09        | Peak     | 252            | 40               | P   |
| 5   | 7125.00            | 10.05          | 41.94             | 51.99             | 68.20             | -16.21         | Average  | 252            | 40               | P   |
| 6   | 7125.00            | 10.05          | 55.01             | 65.06             | 88.20             | -23.14         | Peak     | 252            | 40               | P   |
| 7   | 12950.00           | 19.39          | 29.63             | 49.02             | 68.20             | -19.18         | Average  | 100            | 225              | P   |
| 8   | 12950.00           | 19.39          | 44.59             | 63.98             | 88.20             | -24.22         | Peak     | 100            | 225              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

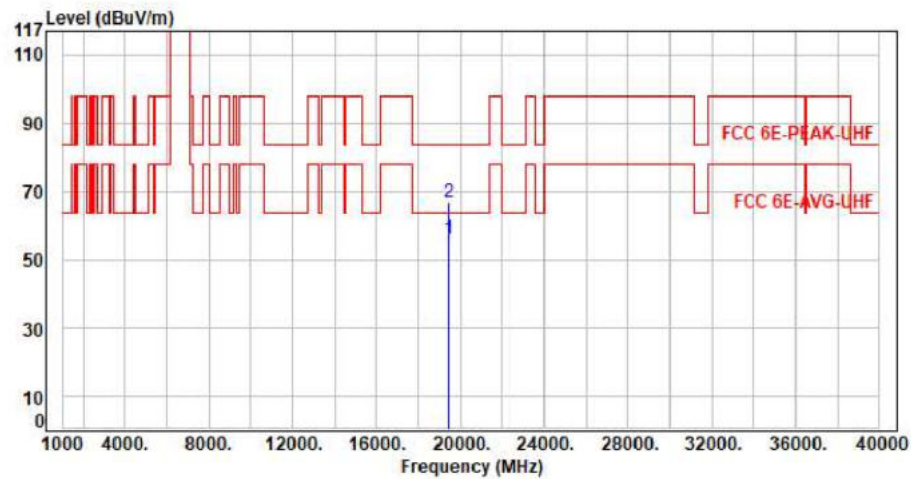


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19425.00           | 11.75          | 44.20             | 55.95             | 63.54             | -7.59          | Average  | 150            | 360              | P   |
| 2   | 19425.00           | 11.75          | 54.92             | 66.67             | 83.54             | -16.87         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

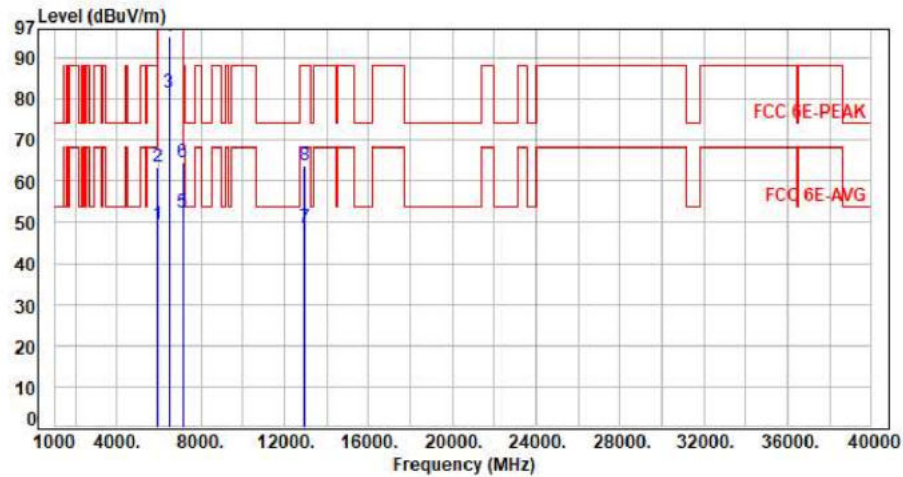

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.58          | 49.24          | 68.20          | -18.96      | Average  | 395         | 213           | P   |
| 2   | 5925.00         | 7.66        | 55.62          | 63.28          | 88.20          | -24.92      | Peak     | 395         | 213           | P   |
| 3   | 6475.00         | 8.33        | 73.36          | 81.69          | 200.00         | -118.31     | Average  | 395         | 213           | P   |
| 4   | 6475.00         | 8.33        | 86.74          | 95.07          | 200.00         | -104.93     | Peak     | 395         | 213           | P   |
| 5   | 7125.00         | 10.05       | 42.17          | 52.22          | 68.20          | -15.98      | Average  | 395         | 213           | P   |
| 6   | 7125.00         | 10.05       | 54.67          | 64.72          | 88.20          | -23.48      | Peak     | 395         | 213           | P   |
| 7   | 12950.00        | 19.39       | 29.18          | 48.57          | 68.20          | -19.63      | Average  | 100         | 112           | P   |
| 8   | 12950.00        | 19.39       | 44.59          | 63.98          | 88.20          | -24.22      | Peak     | 100         | 112           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

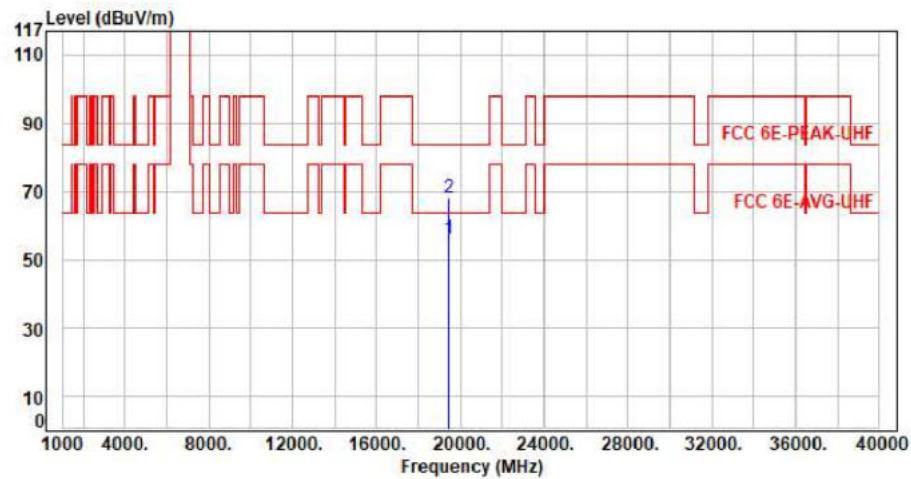


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19425.00           | 11.75          | 44.50             | 56.25             | 63.54             | -7.29          | Average  | 150            | 360              | P   |
| 2   | 19425.00           | 11.75          | 56.28             | 68.03             | 83.54             | -15.51         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

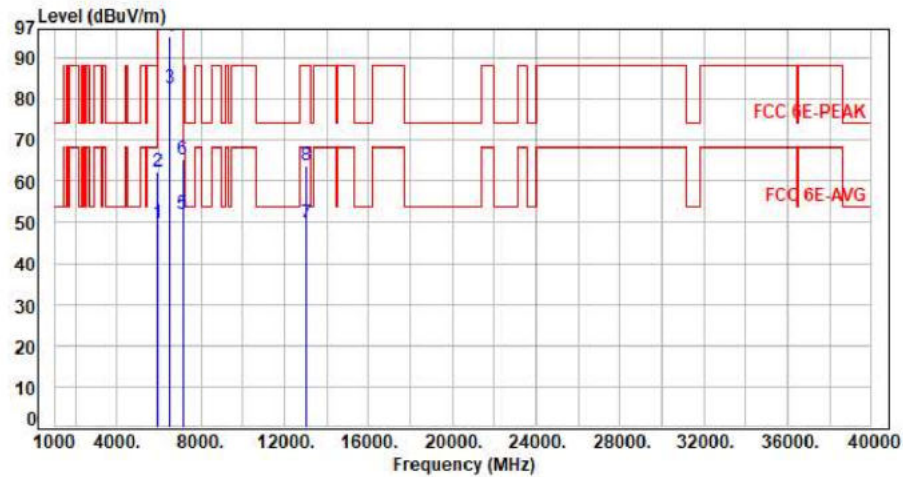

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.08          | 49.74          | 68.20          | -18.46      | Average  | 261         | 41            | P   |
| 2   | 5925.00         | 7.66        | 54.84          | 62.50          | 88.20          | -25.70      | Peak     | 261         | 41            | P   |
| 3   | 6515.00         | 8.42        | 74.03          | 82.45          | 200.00         | -117.55     | Average  | 261         | 41            | P   |
| 4   | 6515.00         | 8.42        | 86.73          | 95.15          | 200.00         | -104.85     | Peak     | 261         | 41            | P   |
| 5   | 7125.00         | 10.05       | 41.93          | 51.98          | 68.20          | -16.22      | Average  | 261         | 41            | P   |
| 6   | 7125.00         | 10.05       | 55.34          | 65.39          | 88.20          | -22.81      | Peak     | 261         | 41            | P   |
| 7   | 13030.00        | 19.86       | 29.98          | 49.84          | 68.20          | -18.36      | Average  | 100         | 226           | P   |
| 8   | 13030.00        | 19.86       | 44.08          | 63.94          | 88.20          | -24.26      | Peak     | 100         | 226           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

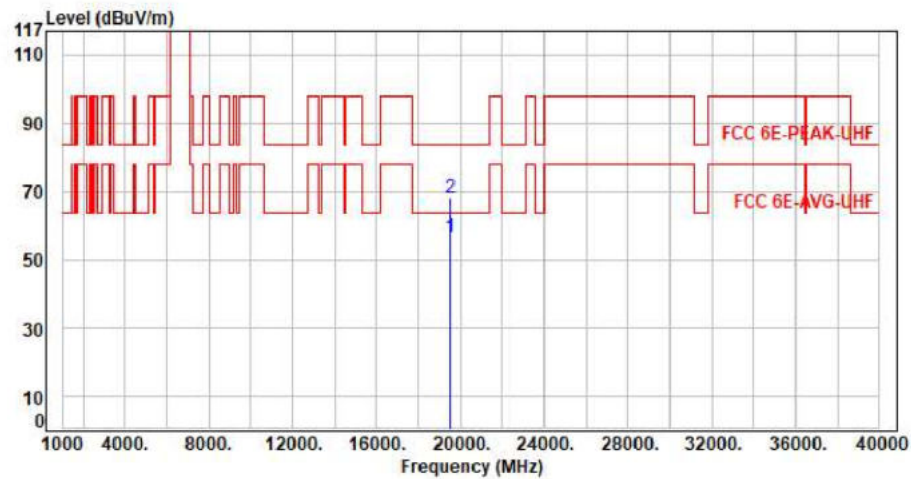


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19545.00           | 12.19          | 44.29             | 56.48             | 63.54             | -7.06          | Average  | 150            | 360              | P   |
| 2   | 19545.00           | 12.19          | 55.71             | 67.90             | 83.54             | -15.64         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

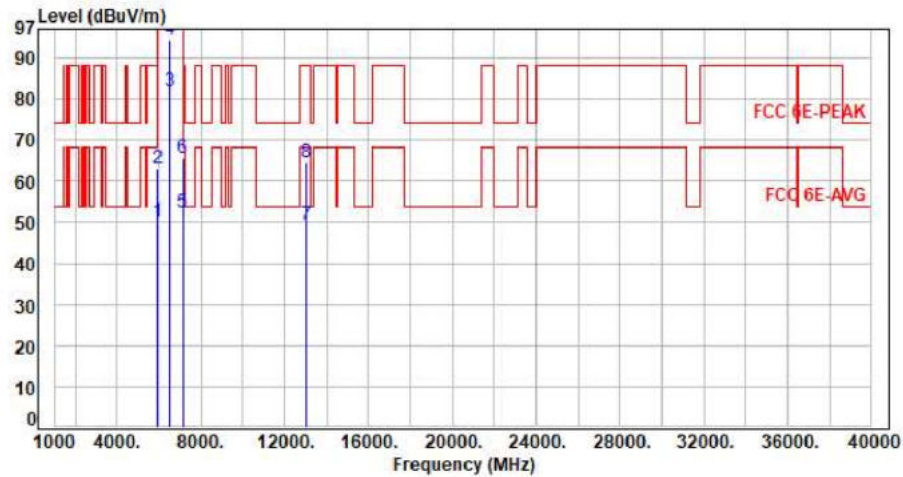


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.49          | 50.15          | 68.20          | -18.05      | Average  | 394         | 213           | P   |
| 2   | 5925.00         | 7.66        | 55.58          | 63.24          | 88.20          | -24.96      | Peak     | 394         | 213           | P   |
| 3   | 6515.00         | 8.42        | 73.37          | 81.79          | 200.00         | -118.21     | Average  | 394         | 213           | P   |
| 4   | 6515.00         | 8.42        | 86.06          | 94.48          | 200.00         | -105.52     | Peak     | 394         | 213           | P   |
| 5   | 7125.00         | 10.05       | 42.32          | 52.37          | 68.20          | -15.83      | Average  | 394         | 213           | P   |
| 6   | 7125.00         | 10.05       | 55.59          | 65.64          | 88.20          | -22.56      | Peak     | 394         | 213           | P   |
| 7   | 13030.00        | 19.86       | 29.67          | 49.53          | 68.20          | -18.67      | Average  | 100         | 113           | P   |
| 8   | 13030.00        | 19.86       | 44.68          | 64.54          | 88.20          | -23.66      | Peak     | 100         | 113           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

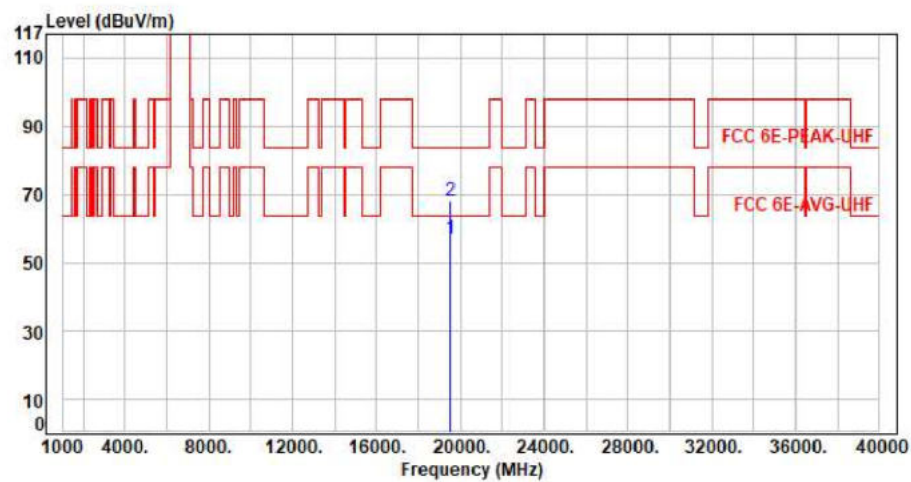


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19545.00           | 12.19          | 44.64             | 56.83             | 63.54             | -6.71          | Average  | 150            | 360              | P   |
| 2   | 19545.00           | 12.19          | 55.73             | 67.92             | 83.54             | -15.62         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

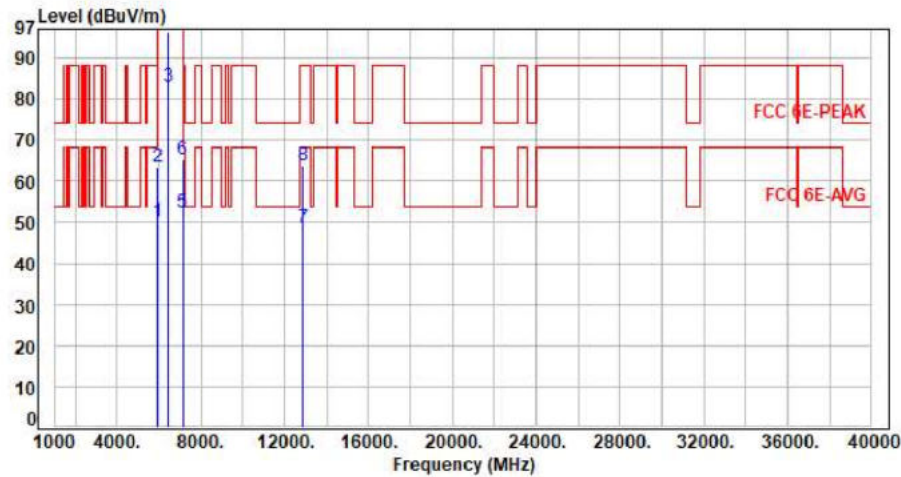


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.48          | 50.14          | 68.20          | -18.06      | Average  | 262         | 40            | P   |
| 2   | 5925.00         | 7.66        | 55.86          | 63.52          | 88.20          | -24.68      | Peak     | 262         | 40            | P   |
| 3   | 6445.00         | 8.31        | 74.83          | 83.14          | 200.00         | -116.86     | Average  | 262         | 40            | P   |
| 4   | 6445.00         | 8.31        | 88.02          | 96.33          | 200.00         | -103.67     | Peak     | 262         | 40            | P   |
| 5   | 7125.00         | 10.05       | 42.14          | 52.19          | 68.20          | -16.01      | Average  | 262         | 40            | P   |
| 6   | 7125.00         | 10.05       | 55.31          | 65.36          | 88.20          | -22.84      | Peak     | 262         | 40            | P   |
| 7   | 12890.00        | 19.05       | 29.68          | 48.73          | 68.20          | -19.47      | Average  | 100         | 229           | P   |
| 8   | 12890.00        | 19.05       | 44.59          | 63.64          | 88.20          | -24.56      | Peak     | 100         | 229           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

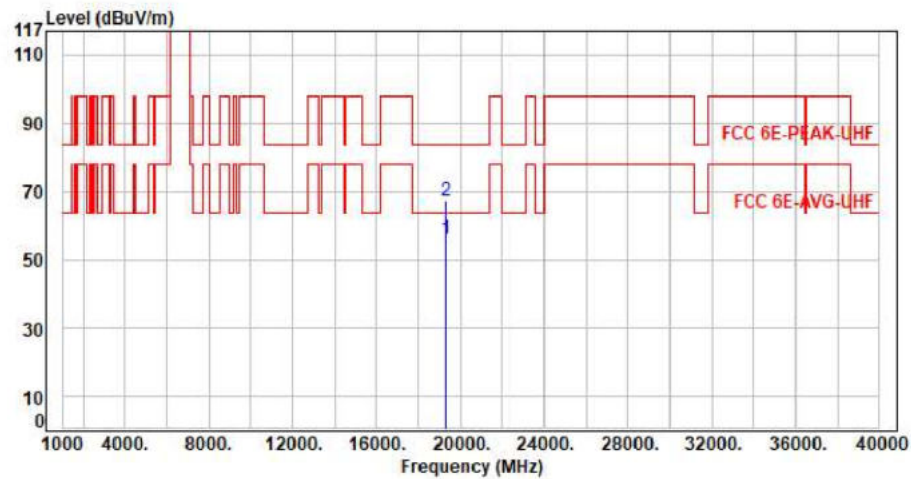


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19335.00           | 11.62          | 44.58             | 56.20             | 63.54             | -7.34          | Average  | 150            | 360              | P   |
| 2   | 19335.00           | 11.62          | 55.76             | 67.38             | 83.54             | -16.16         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

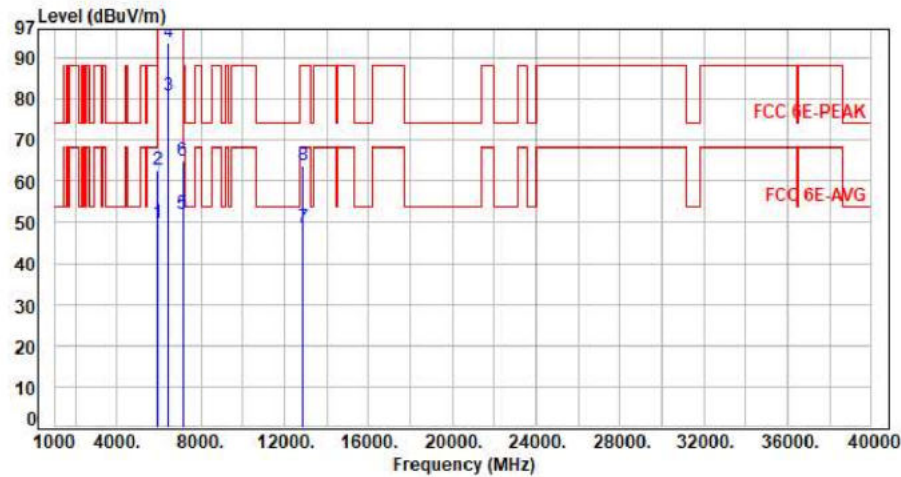


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.14          | 49.80          | 68.20          | -18.40      | Average  | 391         | 214           | P   |
| 2   | 5925.00         | 7.66        | 54.91          | 62.57          | 88.20          | -25.63      | Peak     | 391         | 214           | P   |
| 3   | 6445.00         | 8.31        | 72.48          | 80.79          | 200.00         | -119.21     | Average  | 391         | 214           | P   |
| 4   | 6445.00         | 8.31        | 85.22          | 93.53          | 200.00         | -106.47     | Peak     | 391         | 214           | P   |
| 5   | 7125.00         | 10.05       | 41.90          | 51.95          | 68.20          | -16.25      | Average  | 391         | 214           | P   |
| 6   | 7125.00         | 10.05       | 54.90          | 64.95          | 88.20          | -23.25      | Peak     | 391         | 214           | P   |
| 7   | 12890.00        | 19.05       | 29.60          | 48.65          | 68.20          | -19.55      | Average  | 100         | 114           | P   |
| 8   | 12890.00        | 19.05       | 44.72          | 63.77          | 88.20          | -24.43      | Peak     | 100         | 114           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

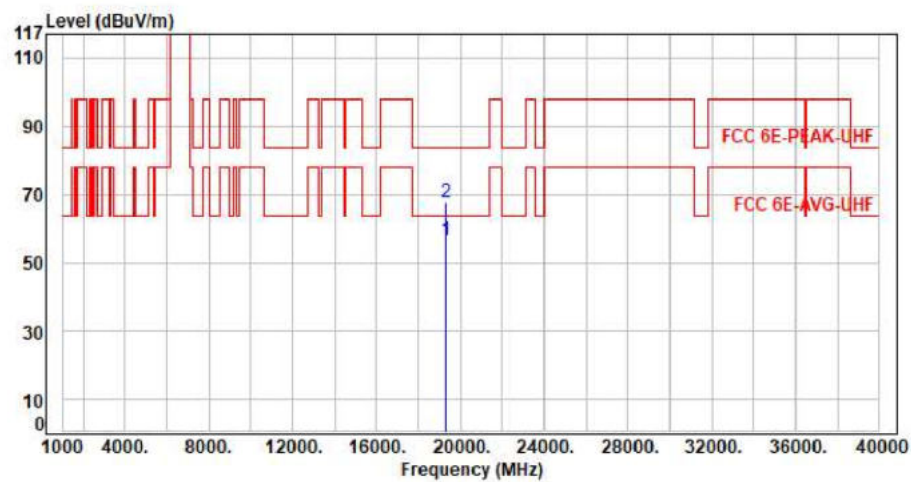


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19335.00           | 11.62          | 44.73             | 56.35             | 63.54             | -7.19          | Average  | 150            | 360              | P   |
| 2   | 19335.00           | 11.62          | 55.82             | 67.44             | 83.54             | -16.10         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

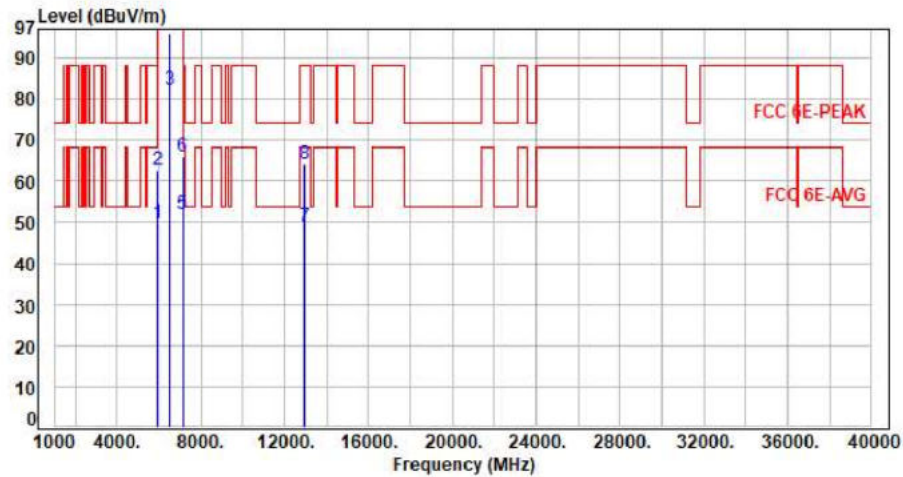

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.12          | 49.78          | 68.20          | -18.42      | Average  | 260         | 40            | P   |
| 2   | 5925.00         | 7.66        | 55.00          | 62.66          | 88.20          | -25.54      | Peak     | 260         | 40            | P   |
| 3   | 6485.00         | 8.34        | 73.99          | 82.33          | 200.00         | -117.67     | Average  | 260         | 40            | P   |
| 4   | 6485.00         | 8.34        | 87.40          | 95.74          | 200.00         | -104.26     | Peak     | 260         | 40            | P   |
| 5   | 7125.00         | 10.05       | 41.90          | 51.95          | 68.20          | -16.25      | Average  | 260         | 40            | P   |
| 6   | 7125.00         | 10.05       | 55.99          | 66.04          | 88.20          | -22.16      | Peak     | 260         | 40            | P   |
| 7   | 12970.00        | 19.47       | 29.44          | 48.91          | 68.20          | -19.29      | Average  | 100         | 224           | P   |
| 8   | 12970.00        | 19.47       | 44.57          | 64.04          | 88.20          | -24.16      | Peak     | 100         | 224           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

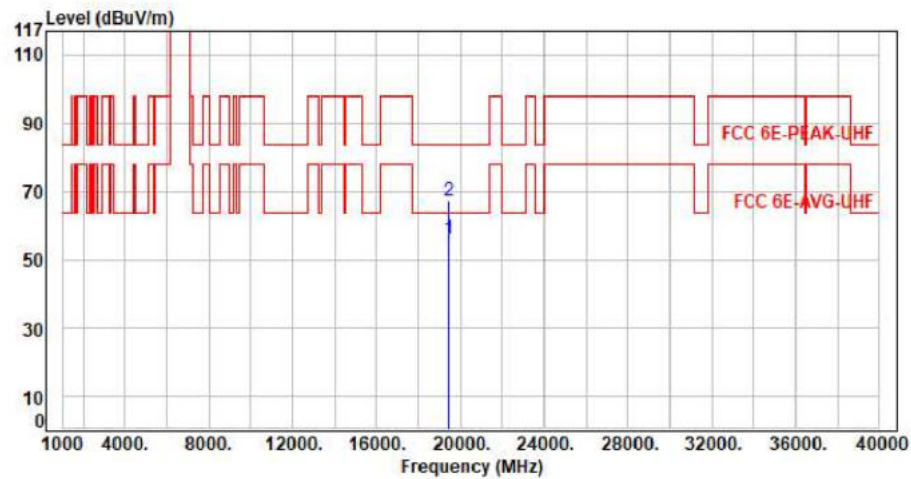

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19455.00           | 11.57          | 44.38             | 55.95             | 63.54             | -7.59          | Average  | 150            | 360              | P   |
| 2   | 19455.00           | 11.57          | 55.75             | 67.32             | 83.54             | -16.22         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

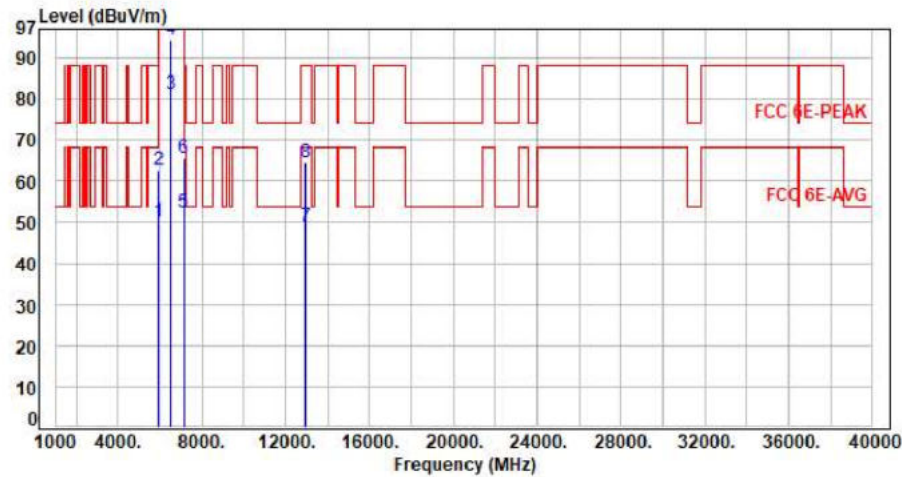

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.51          | 50.17          | 68.20          | -18.03      | Average  | 397         | 214           | P   |
| 2   | 5925.00         | 7.66        | 54.96          | 62.62          | 88.20          | -25.58      | Peak     | 397         | 214           | P   |
| 3   | 6485.00         | 8.34        | 72.98          | 81.32          | 200.00         | -118.68     | Average  | 397         | 214           | P   |
| 4   | 6485.00         | 8.34        | 86.17          | 94.51          | 200.00         | -105.49     | Peak     | 397         | 214           | P   |
| 5   | 7125.00         | 10.05       | 42.33          | 52.38          | 68.20          | -15.82      | Average  | 397         | 214           | P   |
| 6   | 7125.00         | 10.05       | 55.45          | 65.50          | 88.20          | -22.70      | Peak     | 397         | 214           | P   |
| 7   | 12970.00        | 19.47       | 29.47          | 48.94          | 68.20          | -19.26      | Average  | 100         | 138           | P   |
| 8   | 12970.00        | 19.47       | 45.06          | 64.53          | 88.20          | -23.67      | Peak     | 100         | 138           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

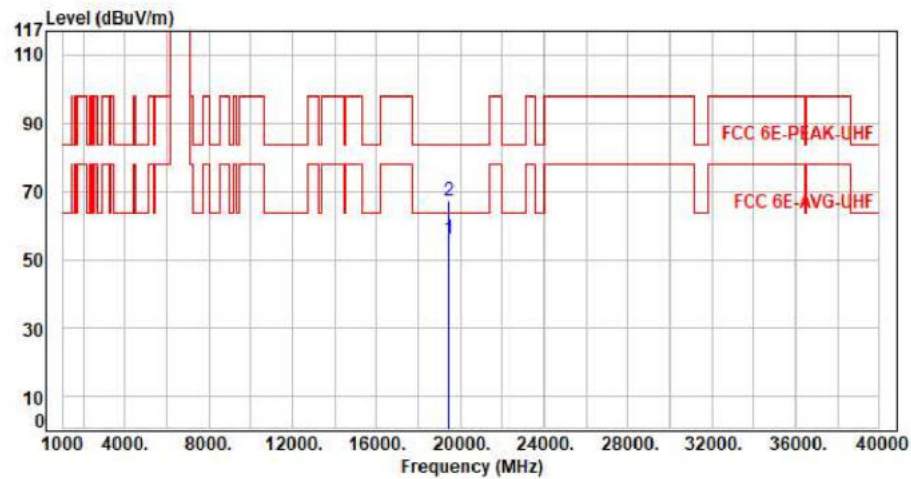


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19455.00           | 11.57          | 44.27             | 55.84             | 63.54             | -7.70          | Average  | 150            | 360              | P   |
| 2   | 19455.00           | 11.57          | 55.63             | 67.20             | 83.54             | -16.34         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

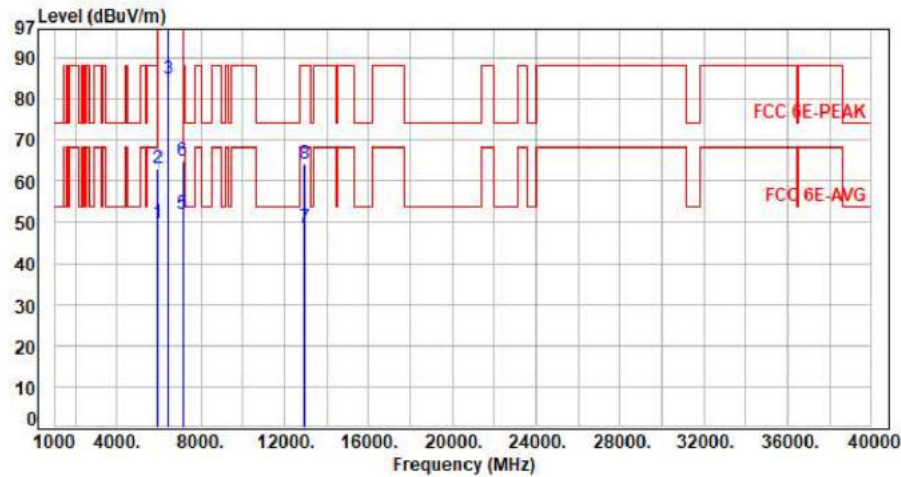


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.03          | 49.69          | 68.20          | -18.51      | Average  | 395         | 45            | P   |
| 2   | 5925.00         | 7.66        | 55.39          | 63.05          | 88.20          | -25.15      | Peak     | 395         | 45            | P   |
| 3   | 6465.00         | 8.32        | 76.61          | 84.93          | 200.00         | -115.07     | Average  | 395         | 45            | P   |
| 4   | 6465.00         | 8.32        | 88.79          | 97.11          | 200.00         | -102.89     | Peak     | 395         | 45            | P   |
| 5   | 7125.00         | 10.05       | 41.83          | 51.88          | 68.20          | -16.32      | Average  | 395         | 45            | P   |
| 6   | 7125.00         | 10.05       | 54.91          | 64.96          | 88.20          | -23.24      | Peak     | 395         | 45            | P   |
| 7   | 12930.00        | 19.27       | 29.41          | 48.68          | 68.20          | -19.52      | Average  | 100         | 138           | P   |
| 8   | 12930.00        | 19.27       | 44.87          | 64.14          | 88.20          | -24.06      | Peak     | 100         | 138           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

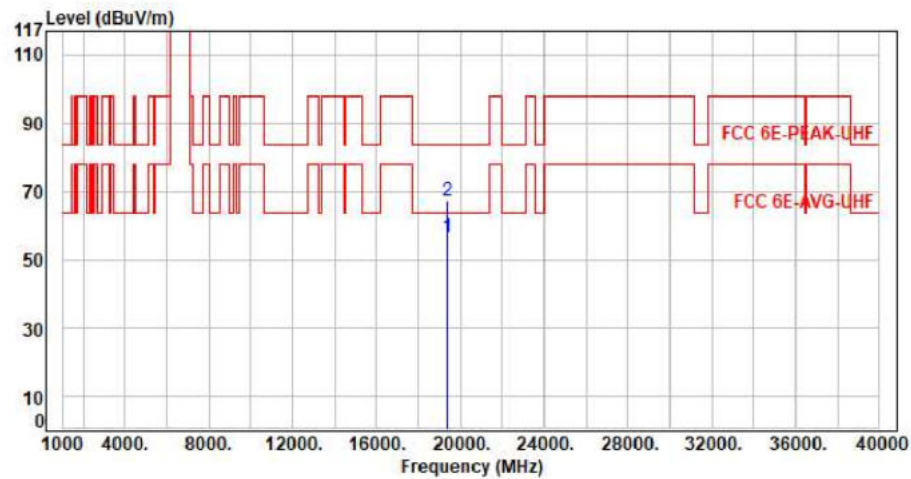


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19395.00           | 11.91          | 44.57             | 56.48             | 63.54             | -7.06          | Average  | 150            | 360              | P   |
| 2   | 19395.00           | 11.91          | 55.28             | 67.19             | 83.54             | -16.35         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

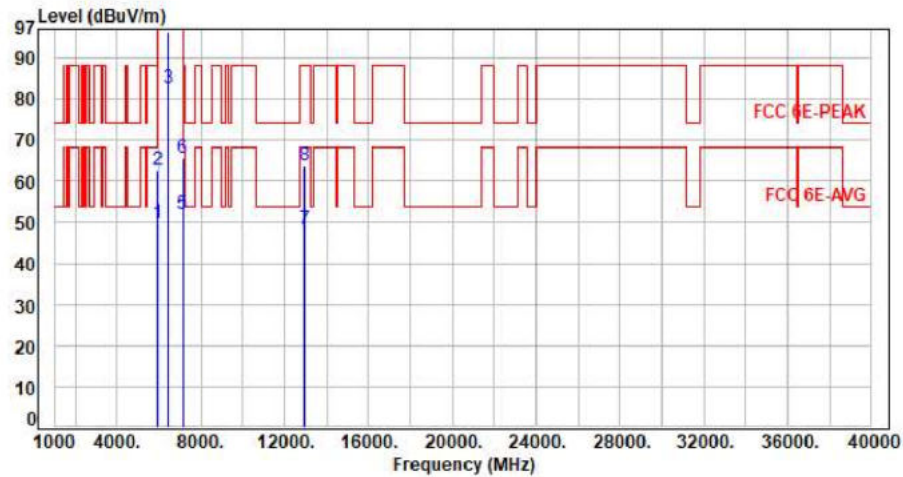

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.06          | 49.72          | 68.20          | -18.48      | Average  | 400         | 215           | P   |
| 2   | 5925.00         | 7.66        | 54.99          | 62.65          | 88.20          | -25.55      | Peak     | 400         | 215           | P   |
| 3   | 6465.00         | 8.32        | 74.27          | 82.59          | 200.00         | -117.41     | Average  | 400         | 215           | P   |
| 4   | 6465.00         | 8.32        | 87.89          | 96.21          | 200.00         | -103.79     | Peak     | 400         | 215           | P   |
| 5   | 7125.00         | 10.05       | 41.85          | 51.90          | 68.20          | -16.30      | Average  | 400         | 215           | P   |
| 6   | 7125.00         | 10.05       | 55.49          | 65.54          | 88.20          | -22.66      | Peak     | 400         | 215           | P   |
| 7   | 12930.00        | 19.27       | 29.10          | 48.37          | 68.20          | -19.83      | Average  | 100         | 151           | P   |
| 8   | 12930.00        | 19.27       | 44.60          | 63.87          | 88.20          | -24.33      | Peak     | 100         | 151           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

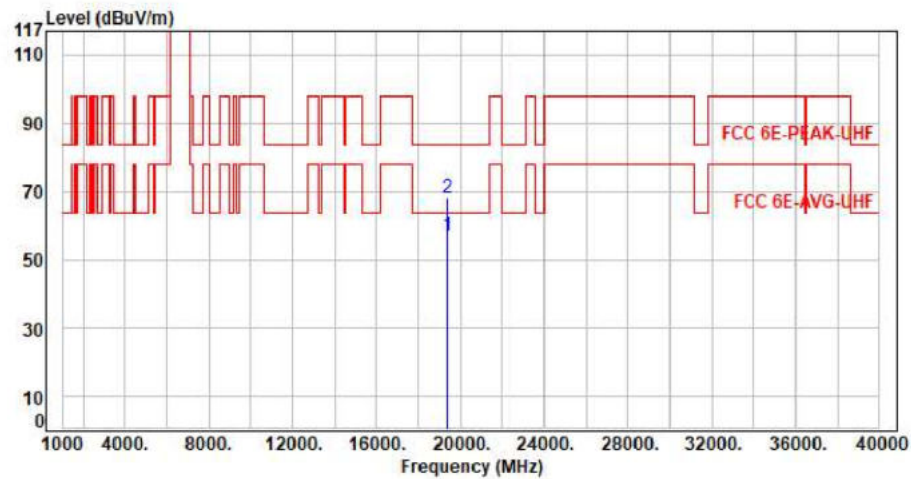

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19395.00           | 11.91          | 44.82             | 56.73             | 63.54             | -6.81          | Average  | 150            | 360              | P   |
| 2   | 19395.00           | 11.91          | 56.17             | 68.08             | 83.54             | -15.46         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

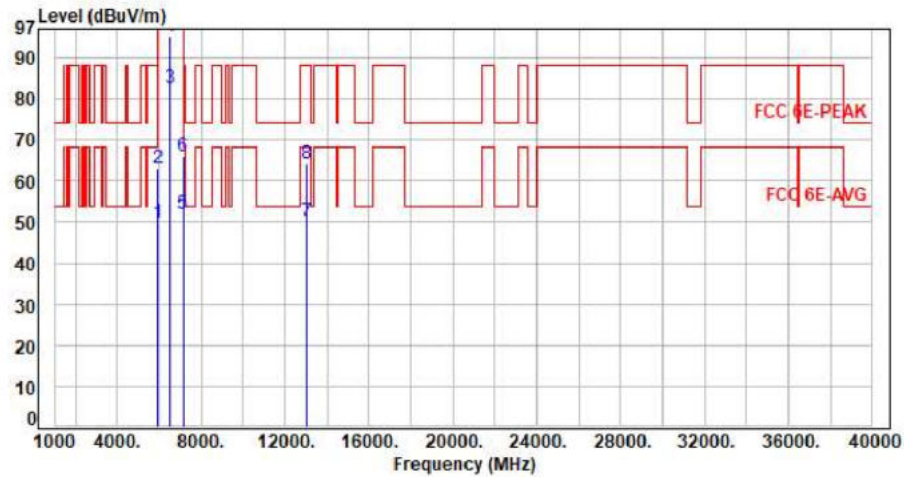

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.18          | 49.84          | 68.20          | -18.36      | Average  | 316         | 40            | P   |
| 2   | 5925.00         | 7.66        | 55.42          | 63.08          | 88.20          | -25.12      | Peak     | 316         | 40            | P   |
| 3   | 6525.00         | 8.45        | 74.22          | 82.67          | 200.00         | -117.33     | Average  | 316         | 40            | P   |
| 4   | 6525.00         | 8.45        | 86.68          | 95.13          | 200.00         | -104.87     | Peak     | 316         | 40            | P   |
| 5   | 7125.00         | 10.05       | 41.97          | 52.02          | 68.20          | -16.18      | Average  | 316         | 40            | P   |
| 6   | 7125.00         | 10.05       | 55.90          | 65.95          | 88.20          | -22.25      | Peak     | 316         | 40            | P   |
| 7   | 13050.00        | 20.02       | 30.11          | 50.13          | 68.20          | -18.07      | Average  | 100         | 146           | P   |
| 8   | 13050.00        | 20.02       | 44.25          | 64.27          | 88.20          | -23.93      | Peak     | 100         | 146           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

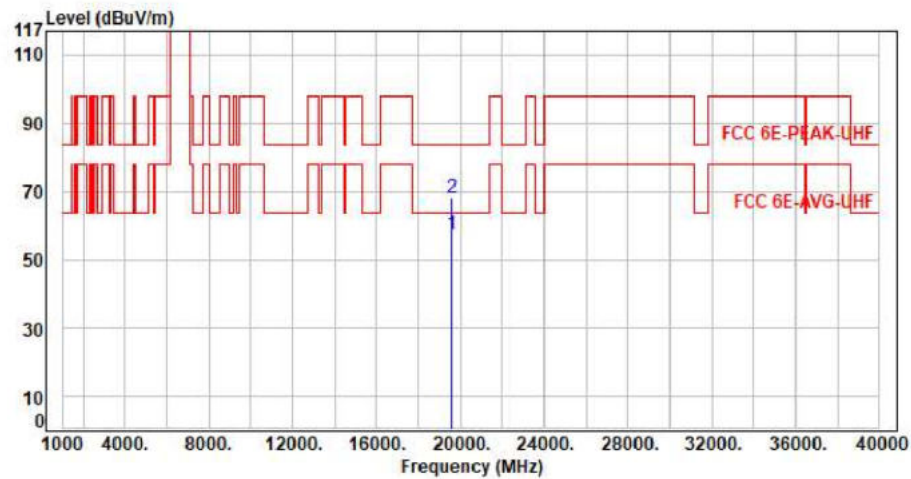


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19575.00           | 12.02          | 45.19             | 57.21             | 63.54             | -6.33          | Average  | 150            | 360              | P   |
| 2   | 19575.00           | 12.02          | 55.88             | 67.90             | 83.54             | -15.64         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

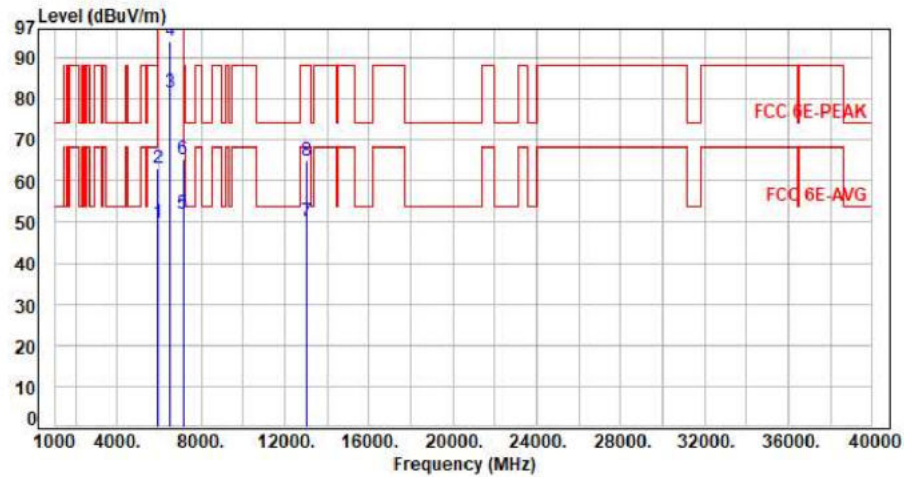

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.29          | 49.95          | 68.20          | -18.25      | Average  | 395         | 212           | P   |
| 2   | 5925.00         | 7.66        | 55.36          | 63.02          | 88.20          | -25.18      | Peak     | 395         | 212           | P   |
| 3   | 6525.00         | 8.45        | 72.97          | 81.42          | 200.00         | -118.58     | Average  | 395         | 212           | P   |
| 4   | 6525.00         | 8.45        | 85.54          | 93.99          | 200.00         | -106.01     | Peak     | 395         | 212           | P   |
| 5   | 7125.00         | 10.05       | 41.94          | 51.99          | 68.20          | -16.21      | Average  | 395         | 212           | P   |
| 6   | 7125.00         | 10.05       | 55.13          | 65.18          | 88.20          | -23.02      | Peak     | 395         | 212           | P   |
| 7   | 13050.00        | 20.02       | 30.14          | 50.16          | 68.20          | -18.04      | Average  | 100         | 254           | P   |
| 8   | 13050.00        | 20.02       | 45.06          | 65.08          | 88.20          | -23.12      | Peak     | 100         | 254           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

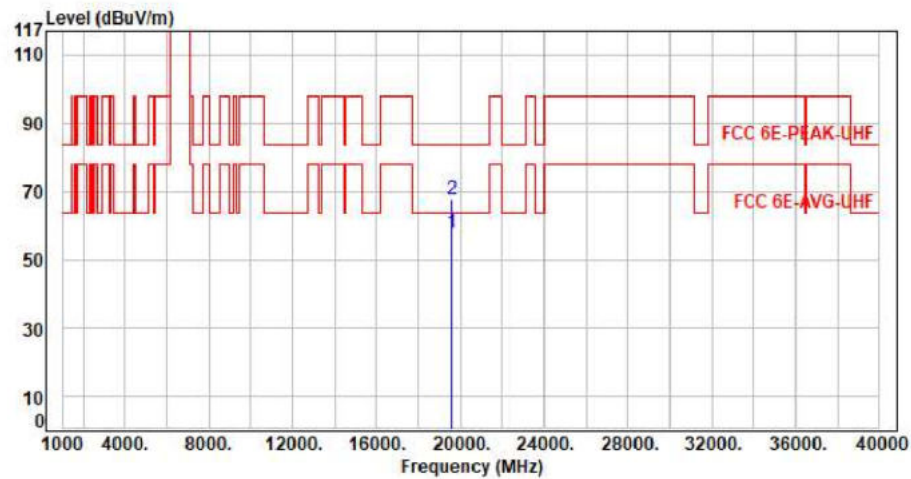


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19575.00           | 12.02          | 45.72             | 57.74             | 63.54             | -5.80          | Average  | 150            | 360              | P   |
| 2   | 19575.00           | 12.02          | 55.72             | 67.74             | 83.54             | -15.80         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

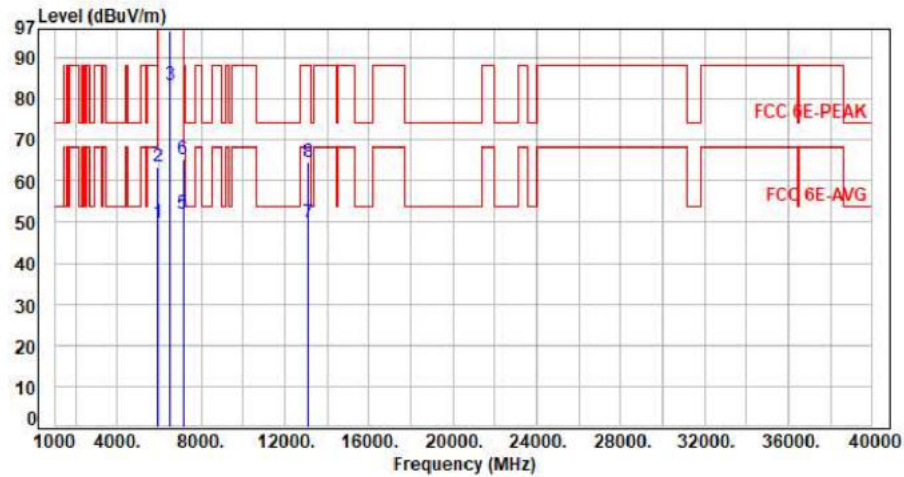


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.06          | 49.72          | 68.20          | -18.48      | Average  | 282         | 41            | P   |
| 2   | 5925.00         | 7.66        | 55.60          | 63.26          | 88.20          | -24.94      | Peak     | 282         | 41            | P   |
| 3   | 6545.00         | 8.55        | 74.74          | 83.29          | 200.00         | -116.71     | Average  | 282         | 41            | P   |
| 4   | 6545.00         | 8.55        | 88.22          | 96.77          | 200.00         | -103.23     | Peak     | 282         | 41            | P   |
| 5   | 7125.00         | 10.05       | 42.11          | 52.16          | 68.20          | -16.04      | Average  | 282         | 41            | P   |
| 6   | 7125.00         | 10.05       | 55.10          | 65.15          | 88.20          | -23.05      | Peak     | 282         | 41            | P   |
| 7   | 13090.00        | 20.20       | 29.74          | 49.94          | 68.20          | -18.26      | Average  | 100         | 199           | P   |
| 8   | 13090.00        | 20.20       | 44.28          | 64.48          | 88.20          | -23.72      | Peak     | 100         | 199           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

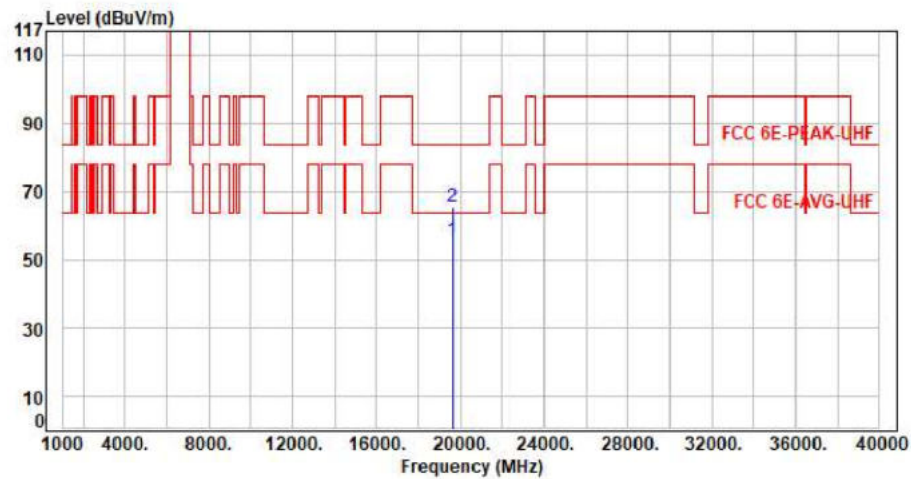


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19635.00           | 11.58          | 44.22             | 55.80             | 63.54             | -7.74          | Average  | 150            | 360              | P   |
| 2   | 19635.00           | 11.58          | 53.99             | 65.57             | 83.54             | -17.97         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

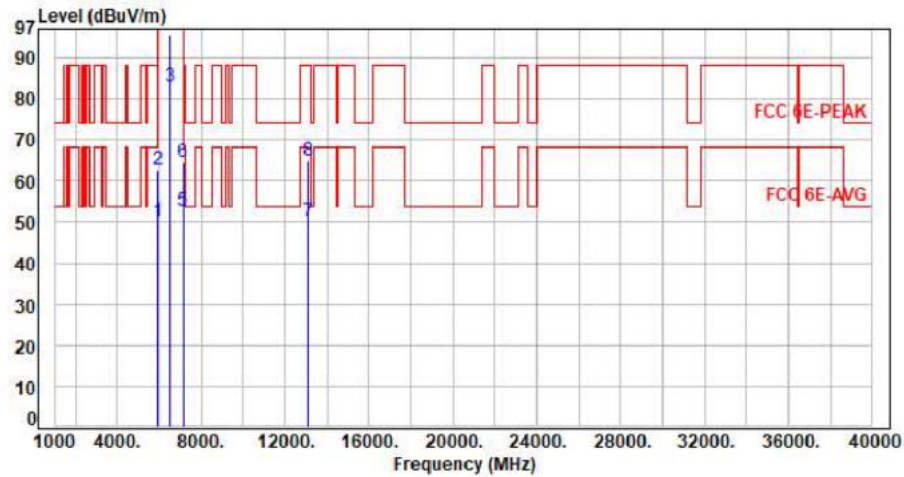


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.41          | 50.07          | 68.20          | -18.13      | Average  | 395         | 212           | P   |
| 2   | 5925.00         | 7.66        | 54.90          | 62.56          | 88.20          | -25.64      | Peak     | 395         | 212           | P   |
| 3   | 6545.00         | 8.55        | 74.30          | 82.85          | 200.00         | -117.15     | Average  | 395         | 212           | P   |
| 4   | 6545.00         | 8.55        | 87.10          | 95.65          | 200.00         | -104.35     | Peak     | 395         | 212           | P   |
| 5   | 7125.00         | 10.05       | 42.67          | 52.72          | 68.20          | -15.48      | Average  | 395         | 212           | P   |
| 6   | 7125.00         | 10.05       | 54.65          | 64.70          | 88.20          | -23.50      | Peak     | 395         | 212           | P   |
| 7   | 13090.00        | 20.20       | 30.14          | 50.34          | 68.20          | -17.86      | Average  | 100         | 182           | P   |
| 8   | 13090.00        | 20.20       | 44.58          | 64.78          | 88.20          | -23.42      | Peak     | 100         | 182           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

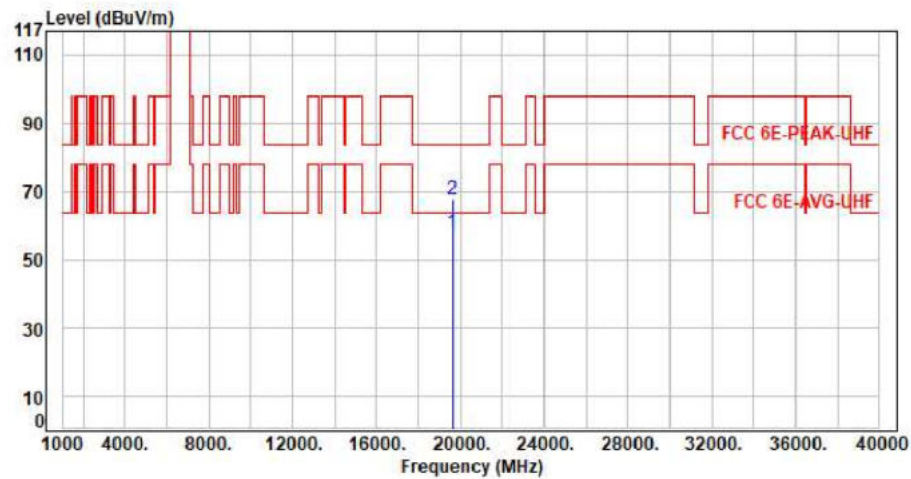


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19635.00           | 11.58          | 46.10             | 57.68             | 63.54             | -5.86          | Average  | 150            | 360              | P   |
| 2   | 19635.00           | 11.58          | 55.99             | 67.57             | 83.54             | -15.97         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

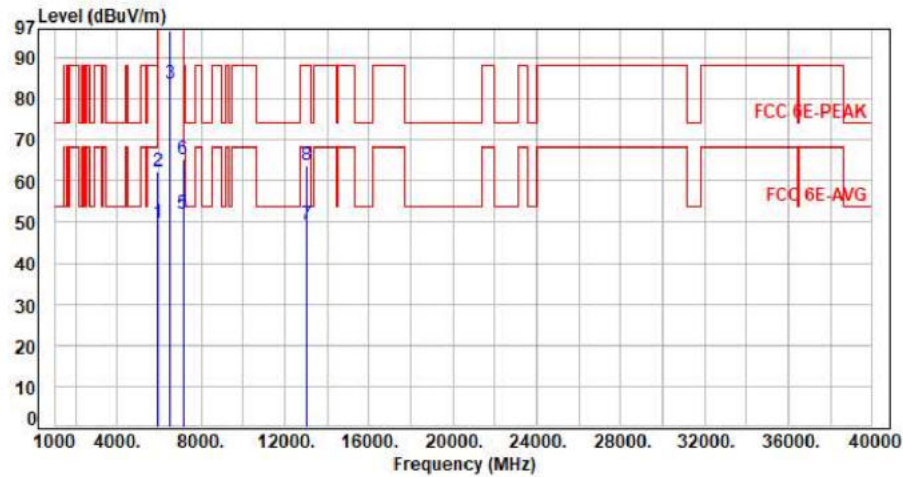

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.13          | 49.79          | 68.20          | -18.41      | Average  | 395         | 43            | P   |
| 2   | 5925.00         | 7.66        | 54.75          | 62.41          | 88.20          | -25.79      | Peak     | 395         | 43            | P   |
| 3   | 6505.00         | 8.37        | 75.48          | 83.85          | 200.00         | -116.15     | Average  | 395         | 43            | P   |
| 4   | 6505.00         | 8.37        | 88.18          | 96.55          | 200.00         | -103.45     | Peak     | 395         | 43            | P   |
| 5   | 7125.00         | 10.05       | 41.90          | 51.95          | 68.20          | -16.25      | Average  | 395         | 43            | P   |
| 6   | 7125.00         | 10.05       | 55.07          | 65.12          | 88.20          | -23.08      | Peak     | 395         | 43            | P   |
| 7   | 13010.00        | 19.69       | 29.86          | 49.55          | 68.20          | -18.65      | Average  | 100         | 143           | P   |
| 8   | 13010.00        | 19.69       | 44.07          | 63.76          | 88.20          | -24.44      | Peak     | 100         | 143           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor