




For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

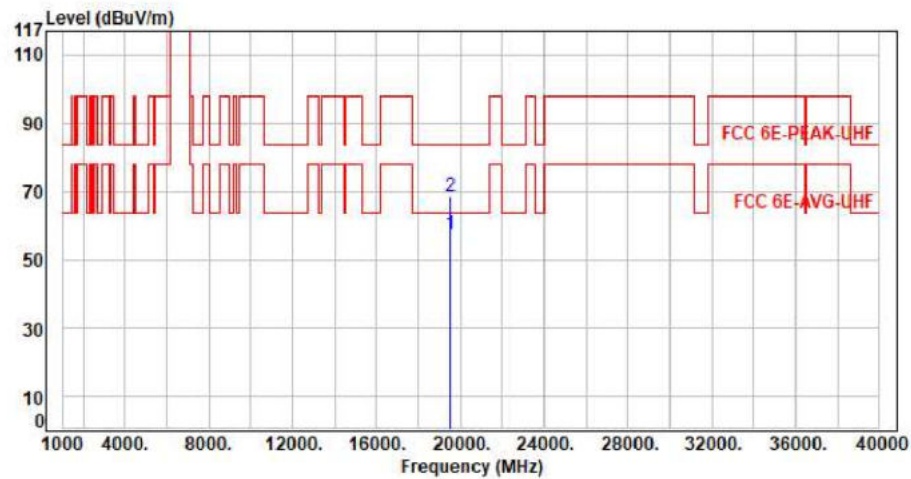


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.28	57.19	63.54	-6.35	Average	150	360	P
2	19515.00	11.91	56.41	68.32	83.54	-15.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

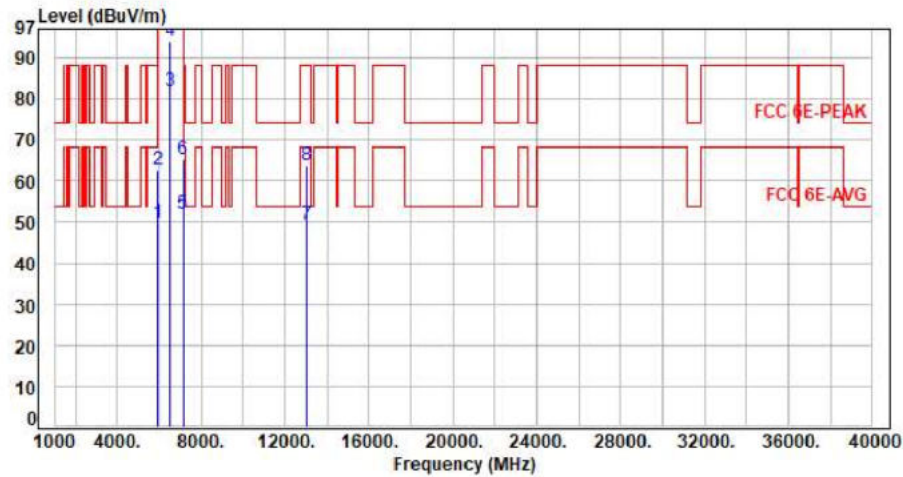

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	400	215	P
2	5925.00	7.66	54.89	62.55	88.20	-25.65	Peak	400	215	P
3	6505.00	8.37	73.60	81.97	200.00	-118.03	Average	400	215	P
4	6505.00	8.37	85.69	94.06	200.00	-105.94	Peak	400	215	P
5	7125.00	10.05	42.08	52.13	68.20	-16.07	Average	400	215	P
6	7125.00	10.05	55.10	65.15	88.20	-23.05	Peak	400	215	P
7	13010.00	19.69	29.87	49.56	68.20	-18.64	Average	100	195	P
8	13010.00	19.69	44.14	63.83	88.20	-24.37	Peak	100	195	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

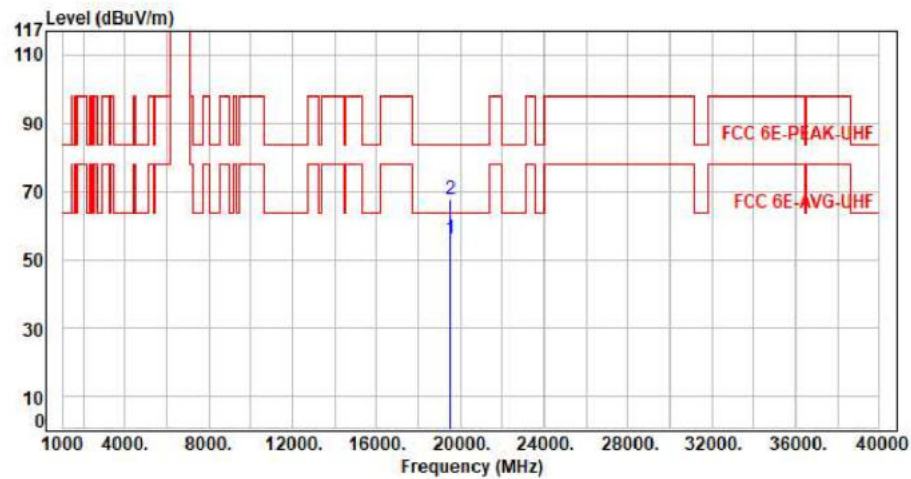


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	44.28	56.19	63.54	-7.35	Average	150	360	P
2	19515.00	11.91	55.62	67.53	83.54	-16.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

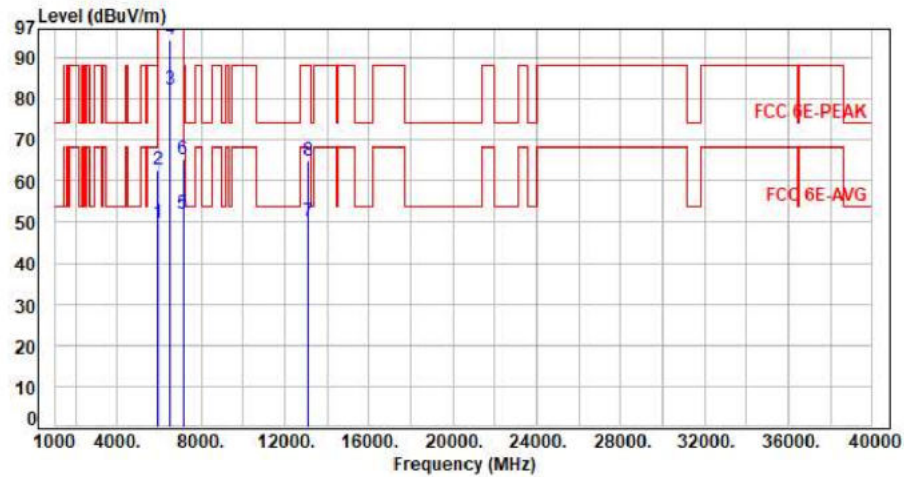

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.07	49.73	68.20	-18.47	Average	264	41	P
2	5925.00	7.66	54.89	62.55	88.20	-25.65	Peak	264	41	P
3	6535.00	8.50	73.70	82.20	200.00	-117.80	Average	264	41	P
4	6535.00	8.50	86.08	94.58	200.00	-105.42	Peak	264	41	P
5	7125.00	10.05	42.06	52.11	68.20	-16.09	Average	264	41	P
6	7125.00	10.05	55.21	65.26	88.20	-22.94	Peak	264	41	P
7	13070.00	20.11	29.88	49.99	68.20	-18.21	Average	100	161	P
8	13070.00	20.11	44.77	64.88	88.20	-23.32	Peak	100	161	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11x20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

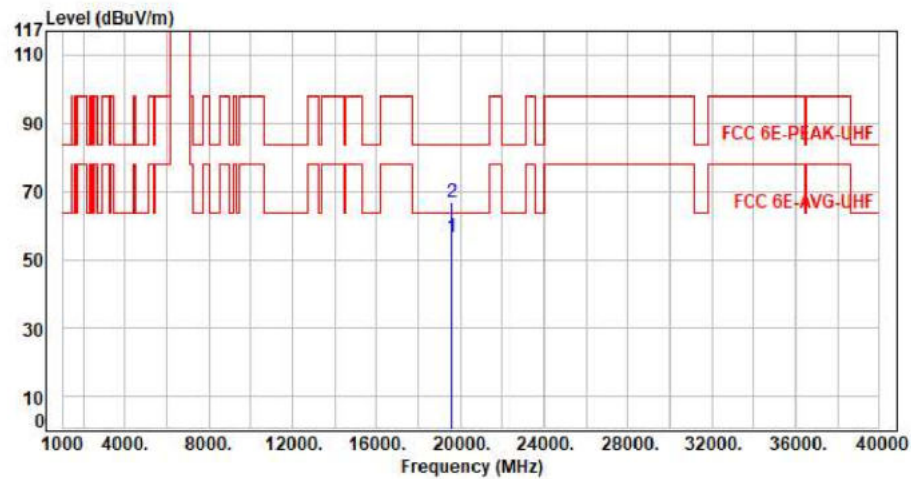


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.85	56.63	63.54	-6.91	Average	150	360	P
2	19605.00	11.78	54.95	66.73	83.54	-16.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

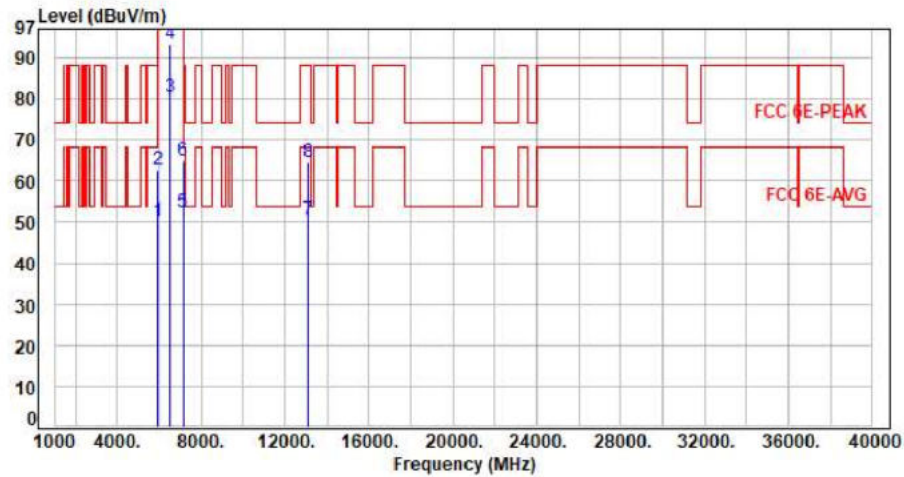

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	400	213	P
2	5925.00	7.66	54.97	62.63	88.20	-25.57	Peak	400	213	P
3	6535.00	8.50	71.99	80.49	200.00	-119.51	Average	400	213	P
4	6535.00	8.50	84.74	93.24	200.00	-106.76	Peak	400	213	P
5	7125.00	10.05	42.27	52.32	68.20	-15.88	Average	400	213	P
6	7125.00	10.05	55.00	65.05	88.20	-23.15	Peak	400	213	P
7	13070.00	20.11	30.54	50.65	68.20	-17.55	Average	100	331	P
8	13070.00	20.11	44.44	64.55	88.20	-23.65	Peak	100	331	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

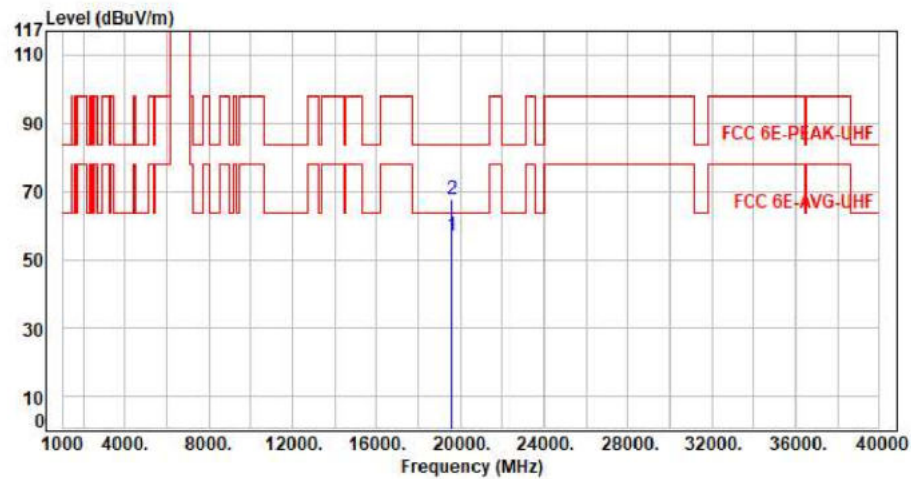


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	45.02	56.80	63.54	-6.74	Average	150	360	P
2	19605.00	11.78	55.69	67.47	83.54	-16.07	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

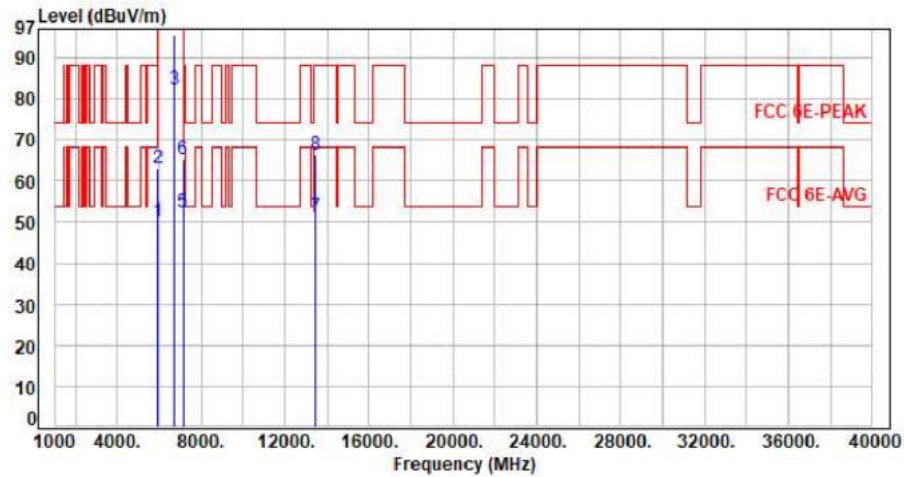

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.46	50.12	68.20	-18.08	Average	272	59	P
2	5925.00	7.66	55.55	63.21	88.20	-24.99	Peak	272	59	P
3	6715.00	9.29	72.88	82.17	200.00	-117.83	Average	272	59	P
4	6715.00	9.29	86.23	95.52	200.00	-104.48	Peak	272	59	P
5	7125.00	10.05	42.20	52.25	68.20	-15.95	Average	272	59	P
6	7125.00	10.05	55.12	65.17	88.20	-23.03	Peak	272	59	P
7	13430.00	21.71	29.47	51.18	68.20	-17.02	Average	100	172	P
8	13430.00	21.71	44.68	66.39	88.20	-21.81	Peak	100	172	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

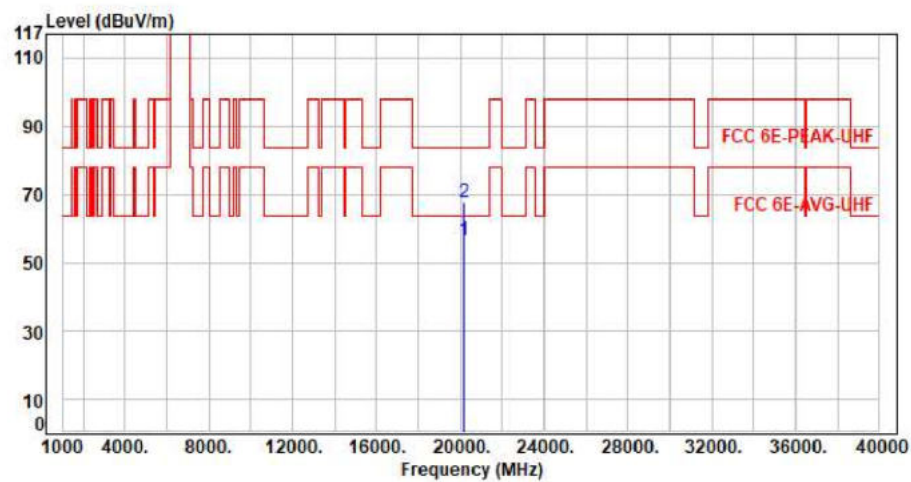


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.04	56.47	63.54	-7.07	Average	150	360	P
2	20145.00	11.43	56.10	67.53	83.54	-16.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

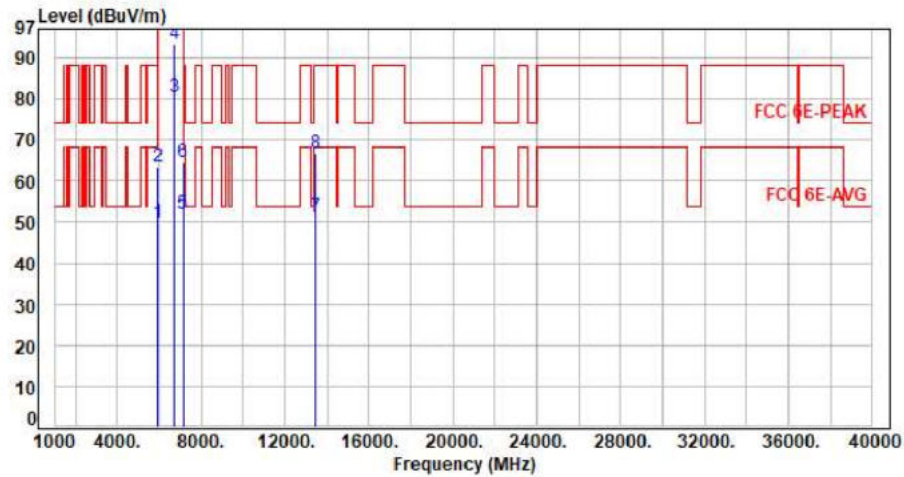

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	390	206	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	390	206	P
3	6715.00	9.29	71.29	80.58	200.00	-119.42	Average	390	206	P
4	6715.00	9.29	84.07	93.36	200.00	-106.64	Peak	390	206	P
5	7125.00	10.05	41.90	51.95	68.20	-16.25	Average	390	206	P
6	7125.00	10.05	54.39	64.44	88.20	-23.76	Peak	390	206	P
7	13430.00	21.71	29.47	51.18	68.20	-17.02	Average	100	221	P
8	13430.00	21.71	44.93	66.64	88.20	-21.56	Peak	100	221	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

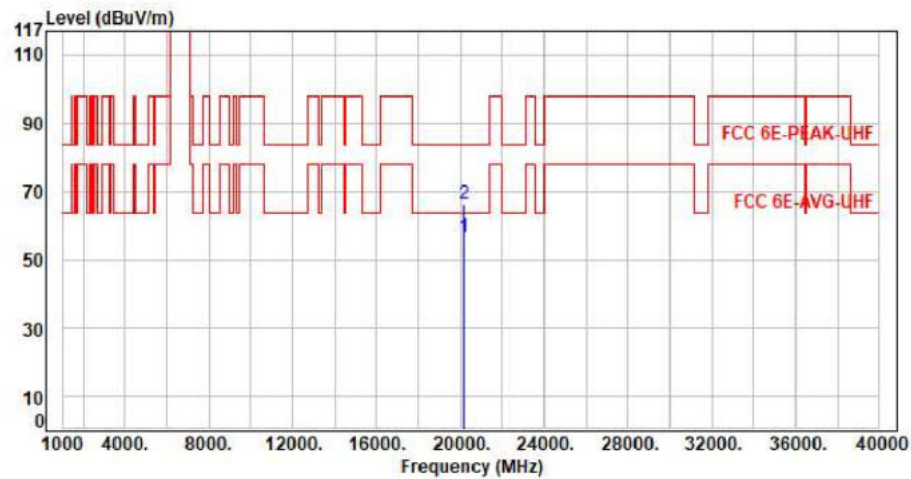


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.87	56.30	63.54	-7.24	Average	150	360	P
2	20145.00	11.43	55.01	66.44	83.54	-17.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

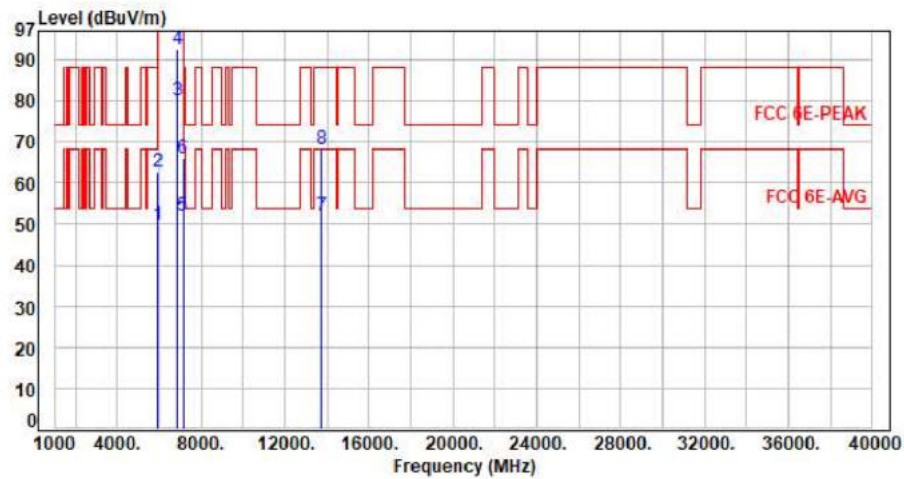

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	264	59	P
2	5925.00	7.66	55.04	62.70	88.20	-25.50	Peak	264	59	P
3	6855.00	9.50	70.70	80.20	200.00	-119.80	Average	264	59	P
4	6855.00	9.50	82.94	92.44	200.00	-107.56	Peak	264	59	P
5	7125.00	10.05	41.81	51.86	68.20	-16.34	Average	264	59	P
6	7125.00	10.05	55.80	65.85	88.20	-22.35	Peak	264	59	P
7	13710.00	22.48	29.45	51.93	68.20	-16.27	Average	100	138	P
8	13710.00	22.48	45.71	68.19	88.20	-20.01	Peak	100	138	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

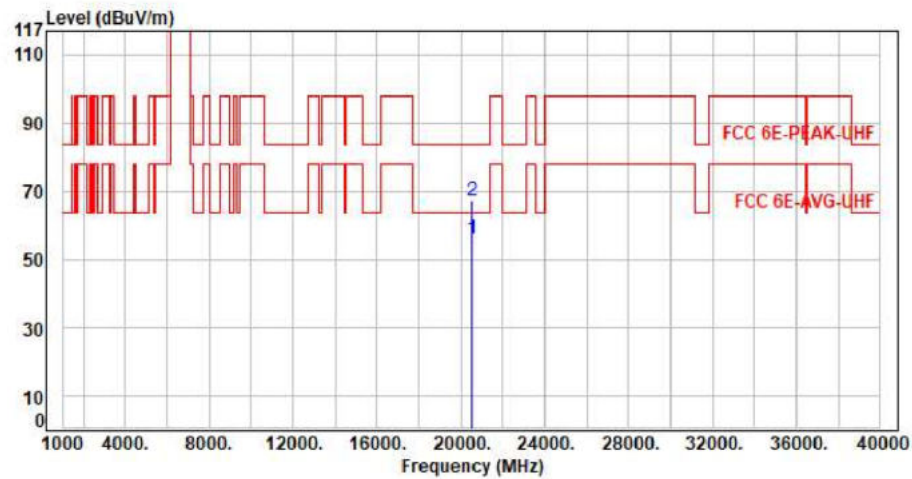


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.68	56.06	63.54	-7.48	Average	150	360	P
2	20565.00	11.38	55.79	67.17	83.54	-16.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

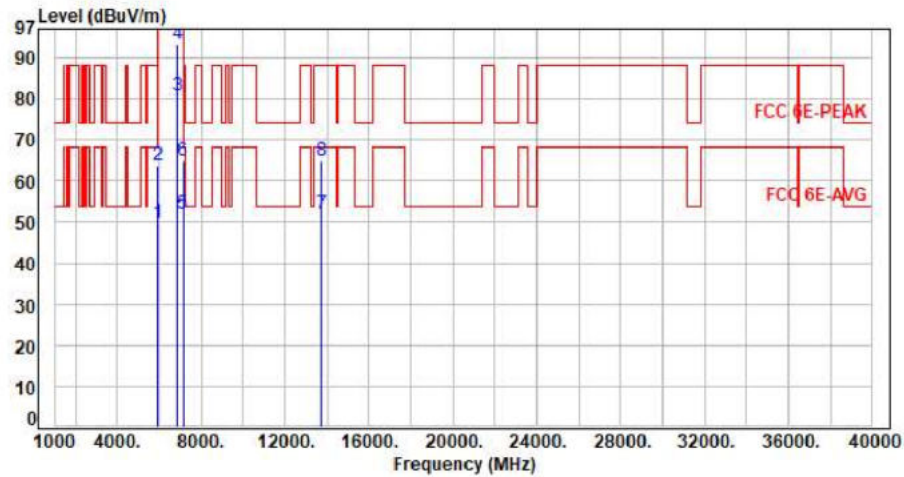

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	390	207	P
2	5925.00	7.66	56.31	63.97	88.20	-24.23	Peak	390	207	P
3	6855.00	9.50	71.32	80.82	200.00	-119.18	Average	390	207	P
4	6855.00	9.50	83.83	93.33	200.00	-106.67	Peak	390	207	P
5	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	390	207	P
6	7125.00	10.05	54.83	64.88	88.20	-23.32	Peak	390	207	P
7	13710.00	22.48	29.67	52.15	68.20	-16.05	Average	100	177	P
8	13710.00	22.48	42.43	64.91	88.20	-23.29	Peak	100	177	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

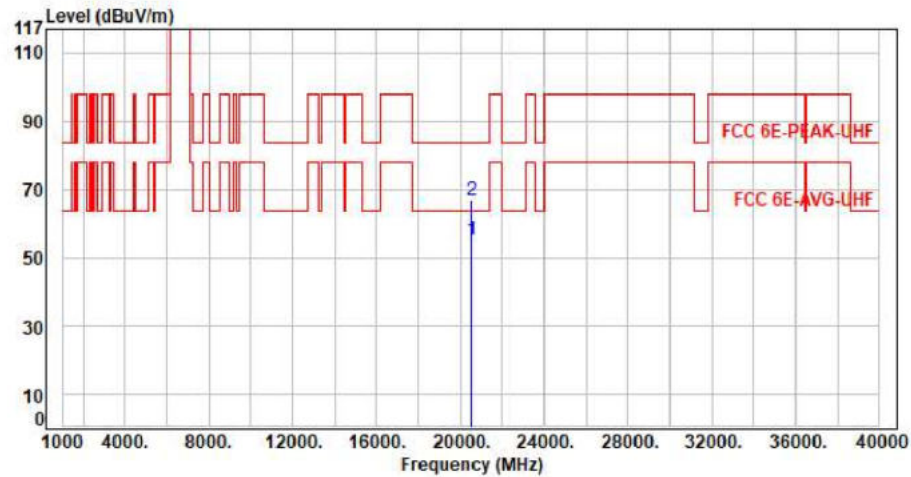


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	43.79	55.17	63.54	-8.37	Average	150	360	P
2	20565.00	11.38	55.41	66.79	83.54	-16.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

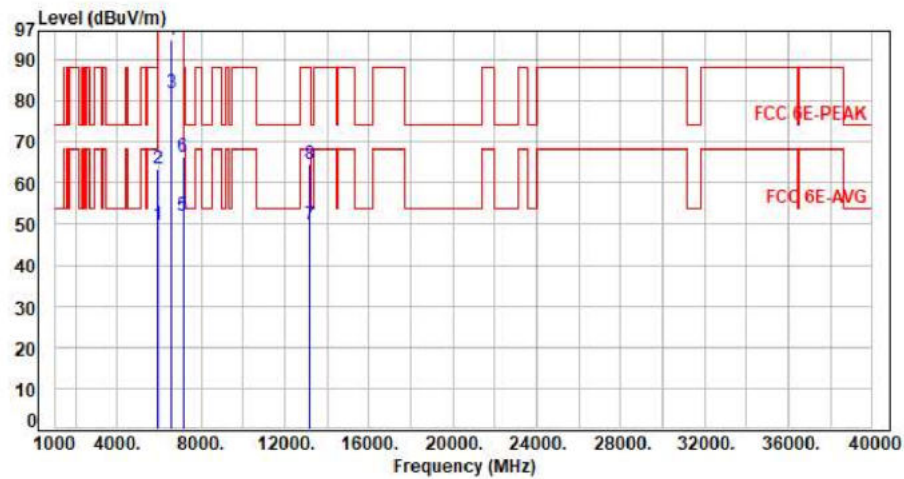

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	258	57	P
2	5925.00	7.66	55.67	63.33	88.20	-24.87	Peak	258	57	P
3	6565.00	8.67	73.15	81.82	200.00	-118.18	Average	258	57	P
4	6565.00	8.67	85.96	94.63	200.00	-105.37	Peak	258	57	P
5	7125.00	10.05	41.95	52.00	68.20	-16.20	Average	258	57	P
6	7125.00	10.05	56.41	66.46	88.20	-21.74	Peak	258	57	P
7	13130.00	20.32	29.47	49.79	68.20	-18.41	Average	100	185	P
8	13130.00	20.32	44.11	64.43	88.20	-23.77	Peak	100	185	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

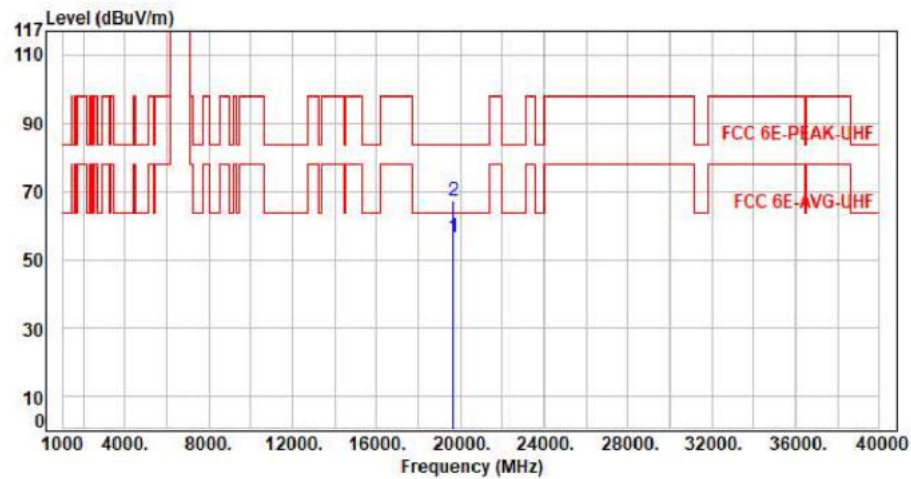


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.85	56.30	63.54	-7.24	Average	150	360	P
2	19695.00	11.45	55.74	67.19	83.54	-16.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

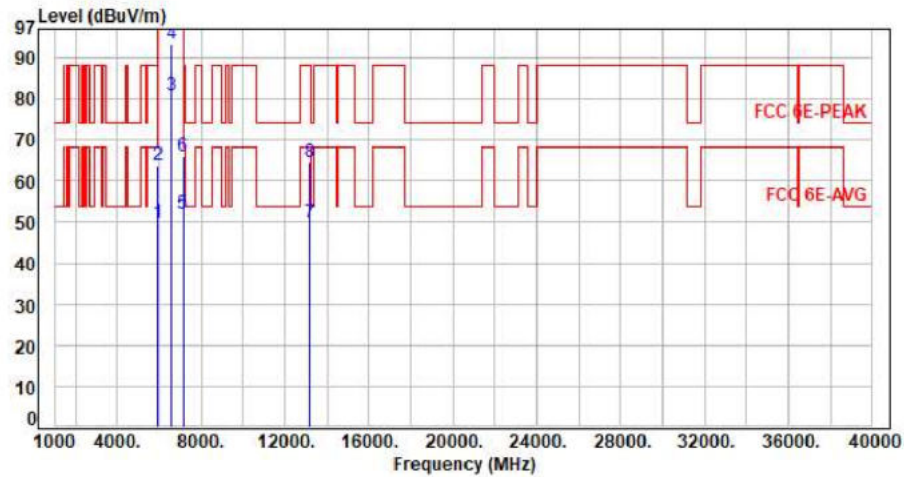


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	395	210	P
2	5925.00	7.66	56.02	63.68	88.20	-24.52	Peak	395	210	P
3	6565.00	8.67	71.97	80.64	200.00	-119.36	Average	395	210	P
4	6565.00	8.67	84.67	93.34	200.00	-106.66	Peak	395	210	P
5	7125.00	10.05	41.88	51.93	68.20	-16.27	Average	395	210	P
6	7125.00	10.05	56.02	66.07	88.20	-22.13	Peak	395	210	P
7	13130.00	20.32	29.47	49.79	68.20	-18.41	Average	100	120	P
8	13130.00	20.32	44.22	64.54	88.20	-23.66	Peak	100	120	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

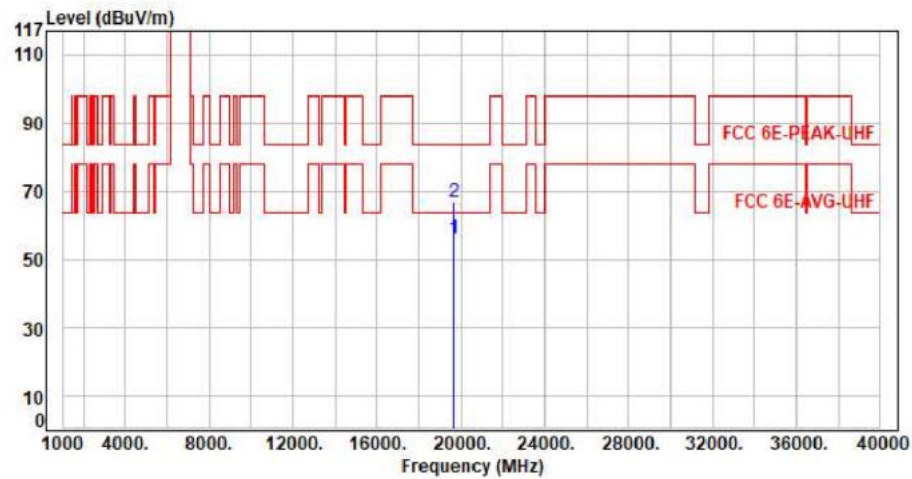


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.62	56.07	63.54	-7.47	Average	150	360	P
2	19695.00	11.45	55.41	66.86	83.54	-16.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

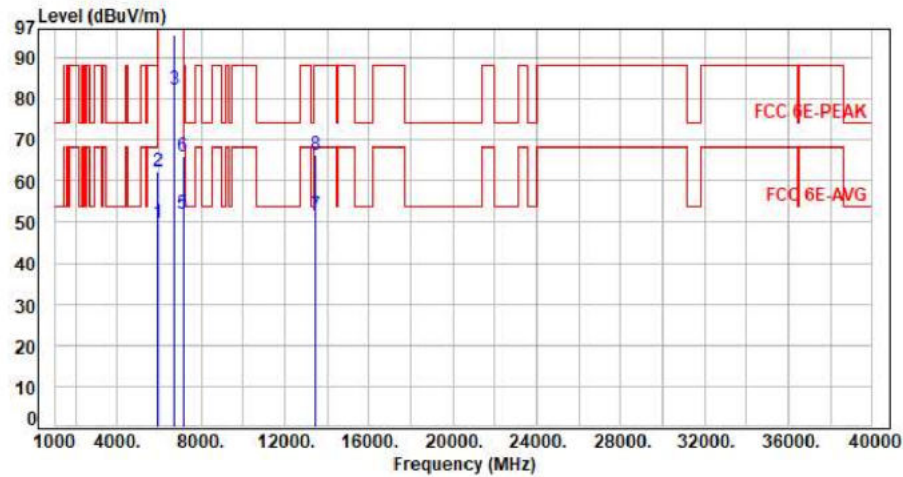

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	270	58	P
2	5925.00	7.66	54.77	62.43	88.20	-25.77	Peak	270	58	P
3	6725.00	9.33	72.98	82.31	200.00	-117.69	Average	270	58	P
4	6725.00	9.33	86.38	95.71	200.00	-104.29	Peak	270	58	P
5	7125.00	10.05	41.96	52.01	68.20	-16.19	Average	270	58	P
6	7125.00	10.05	55.88	65.93	88.20	-22.27	Peak	270	58	P
7	13450.00	21.80	29.83	51.63	68.20	-16.57	Average	100	171	P
8	13450.00	21.80	44.51	66.31	88.20	-21.89	Peak	100	171	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

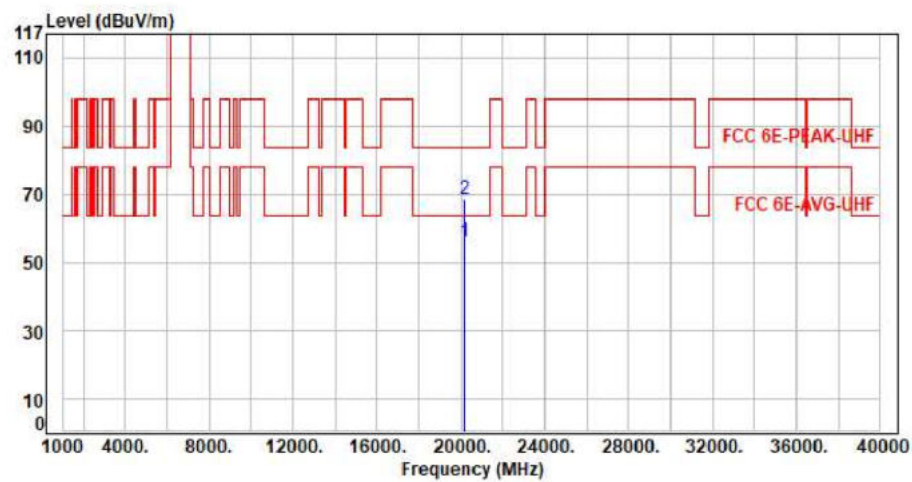

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.53	55.99	63.54	-7.55	Average	150	360	P
2	20175.00	11.46	56.86	68.32	83.54	-15.22	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

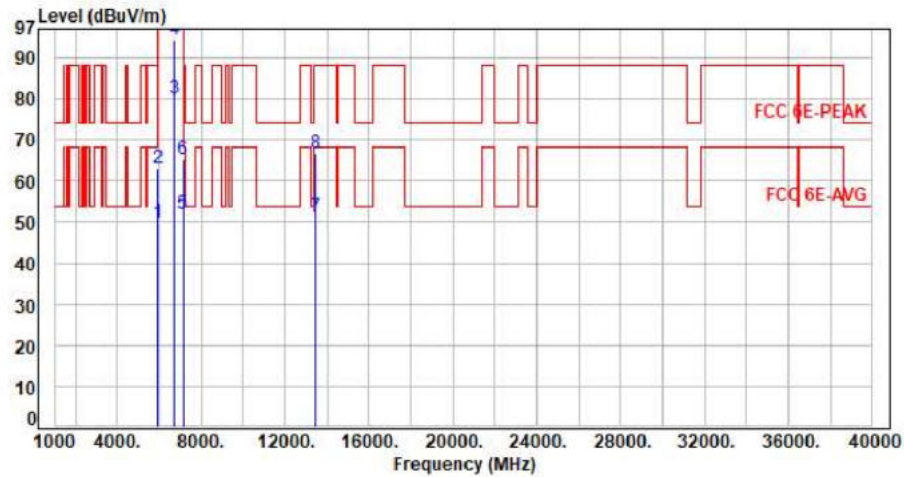

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	390	208	P
2	5925.00	7.66	55.31	62.97	88.20	-25.23	Peak	390	208	P
3	6725.00	9.33	70.63	79.96	200.00	-120.04	Average	390	208	P
4	6725.00	9.33	84.97	94.30	200.00	-105.70	Peak	390	208	P
5	7125.00	10.05	41.87	51.92	68.20	-16.28	Average	390	208	P
6	7125.00	10.05	55.21	65.26	88.20	-22.94	Peak	390	208	P
7	13450.00	21.80	29.63	51.43	68.20	-16.77	Average	100	142	P
8	13450.00	21.80	44.92	66.72	88.20	-21.48	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

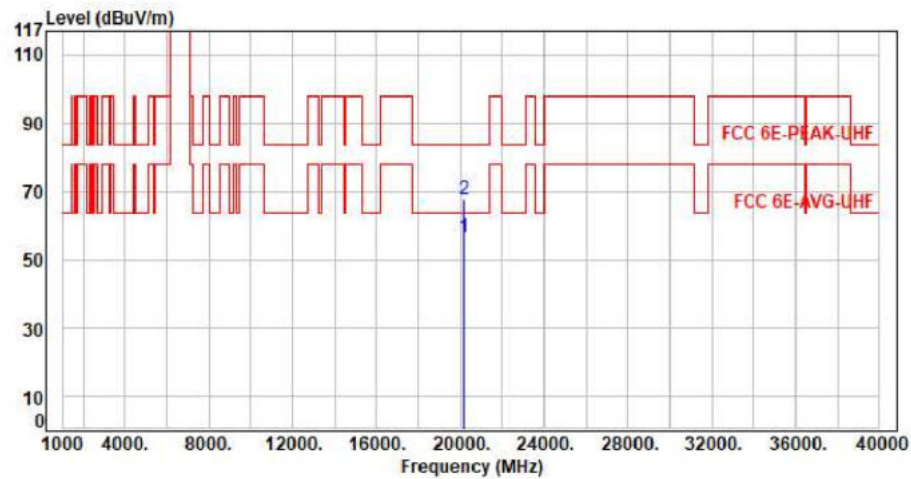


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.86	56.32	63.54	-7.22	Average	150	360	P
2	20175.00	11.46	56.06	67.52	83.54	-16.02	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

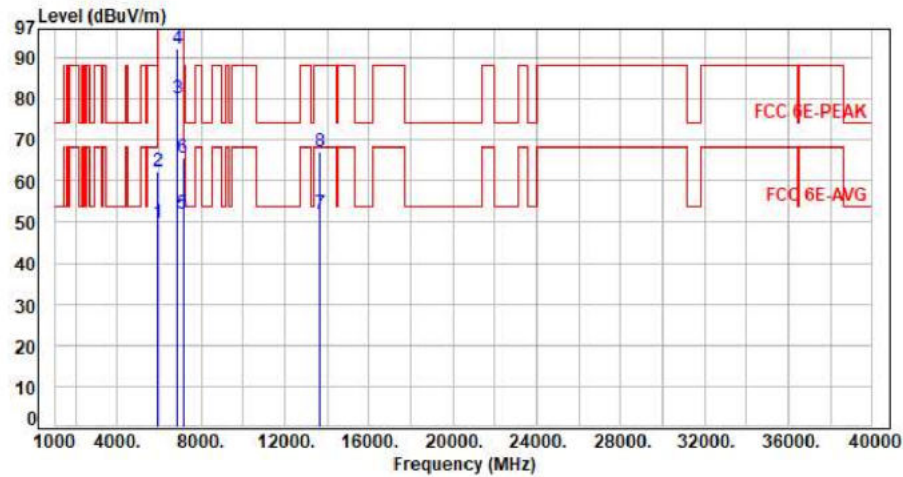

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	255	69	P
2	5925.00	7.66	54.62	62.28	88.20	-25.92	Peak	255	69	P
3	6845.00	9.48	70.53	80.01	200.00	-119.99	Average	255	69	P
4	6845.00	9.48	82.74	92.22	200.00	-107.78	Peak	255	69	P
5	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	255	69	P
6	7125.00	10.05	55.57	65.62	88.20	-22.58	Peak	255	69	P
7	13690.00	22.40	29.53	51.93	68.20	-16.27	Average	100	162	P
8	13690.00	22.40	44.62	67.02	88.20	-21.18	Peak	100	162	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

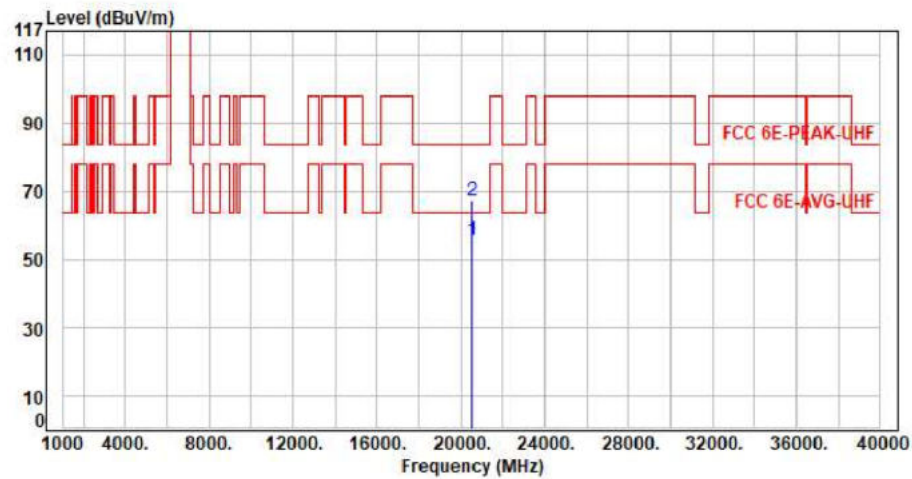


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.29	55.73	63.54	-7.81	Average	150	360	P
2	20535.00	11.44	55.79	67.23	83.54	-16.31	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

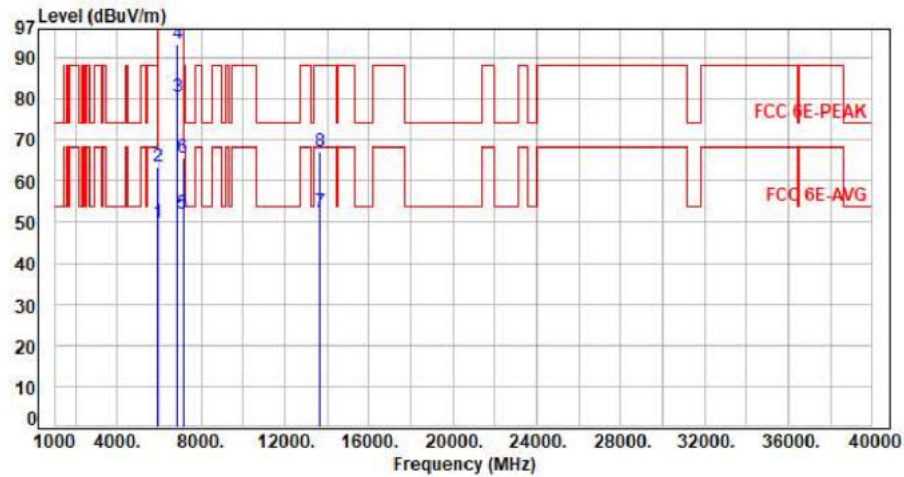

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	389	210	P
2	5925.00	7.66	55.60	63.26	88.20	-24.94	Peak	389	210	P
3	6845.00	9.48	70.82	80.30	200.00	-119.70	Average	389	210	P
4	6845.00	9.48	83.88	93.36	200.00	-106.64	Peak	389	210	P
5	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	389	210	P
6	7125.00	10.05	55.43	65.48	88.20	-22.72	Peak	389	210	P
7	13690.00	22.40	29.88	52.28	68.20	-15.92	Average	100	289	P
8	13690.00	22.40	44.82	67.22	88.20	-20.98	Peak	100	289	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

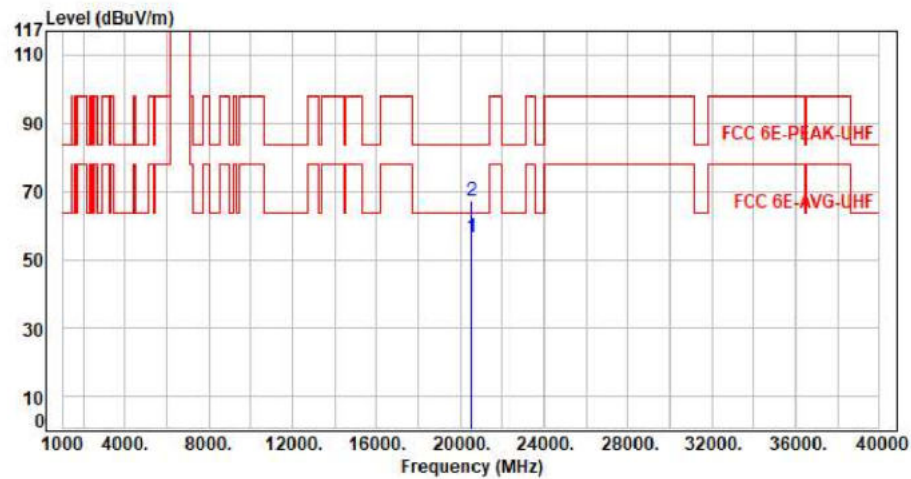


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	45.22	56.66	63.54	-6.88	Average	150	360	P
2	20535.00	11.44	55.63	67.07	83.54	-16.47	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

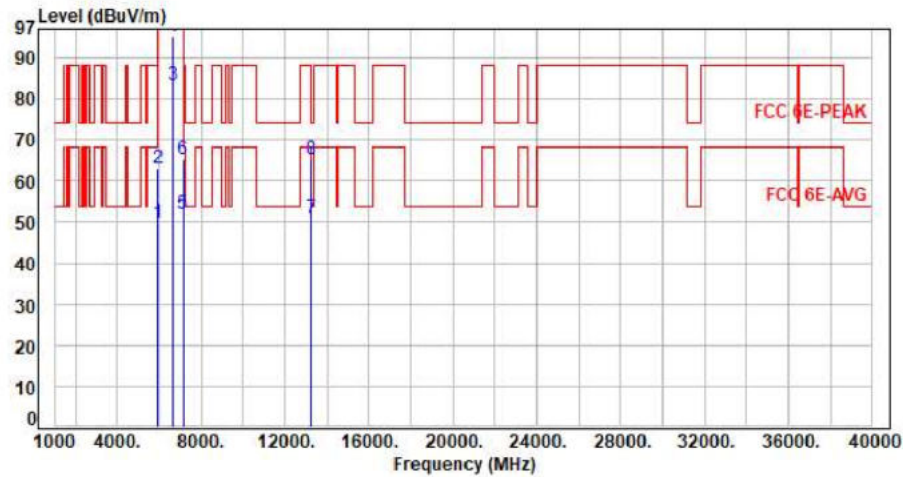

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	272	59	P
2	5925.00	7.66	55.36	63.02	88.20	-25.18	Peak	272	59	P
3	6625.00	8.94	74.29	83.23	200.00	-116.77	Average	272	59	P
4	6625.00	8.94	86.31	95.25	200.00	-104.75	Peak	272	59	P
5	7125.00	10.05	41.92	51.97	68.20	-16.23	Average	272	59	P
6	7125.00	10.05	55.32	65.37	88.20	-22.83	Peak	272	59	P
7	13250.00	21.00	29.93	50.93	54.00	-3.07	Average	100	131	P
8	13250.00	21.00	44.32	65.32	74.00	-8.68	Peak	100	131	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

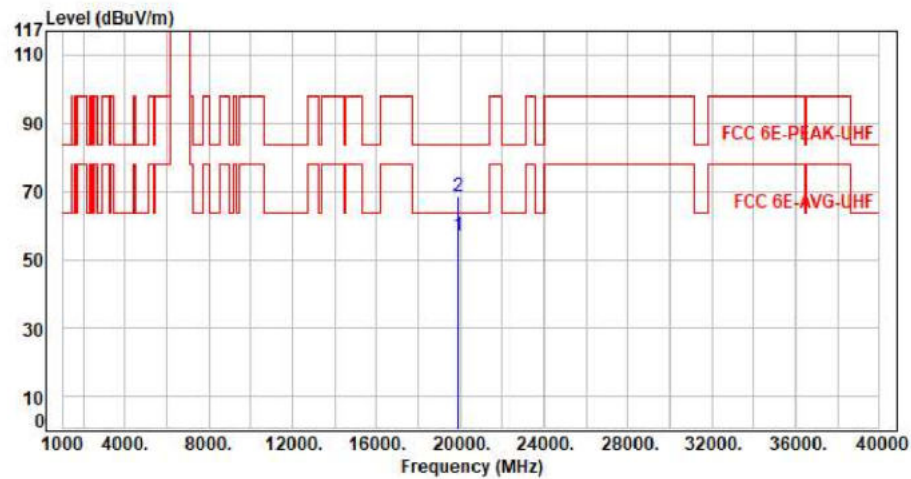


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.02	56.92	63.54	-6.62	Average	150	360	P
2	19875.00	11.90	56.71	68.61	83.54	-14.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

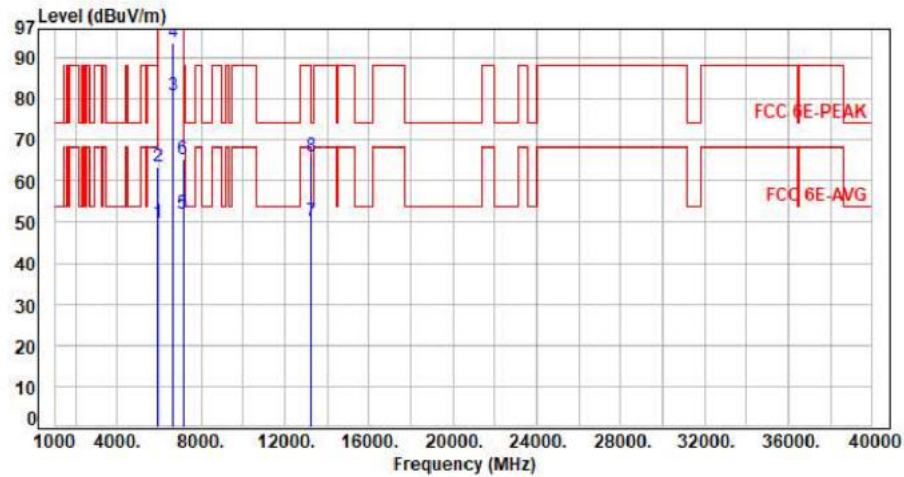


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	390	206	P
2	5925.00	7.66	55.71	63.37	88.20	-24.83	Peak	390	206	P
3	6625.00	8.94	71.93	80.87	200.00	-119.13	Average	390	206	P
4	6625.00	8.94	84.80	93.74	200.00	-106.26	Peak	390	206	P
5	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	390	206	P
6	7125.00	10.05	55.26	65.31	88.20	-22.89	Peak	390	206	P
7	13250.00	21.00	29.27	50.27	54.00	-3.73	Average	100	263	P
8	13250.00	21.00	44.94	65.94	74.00	-8.06	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

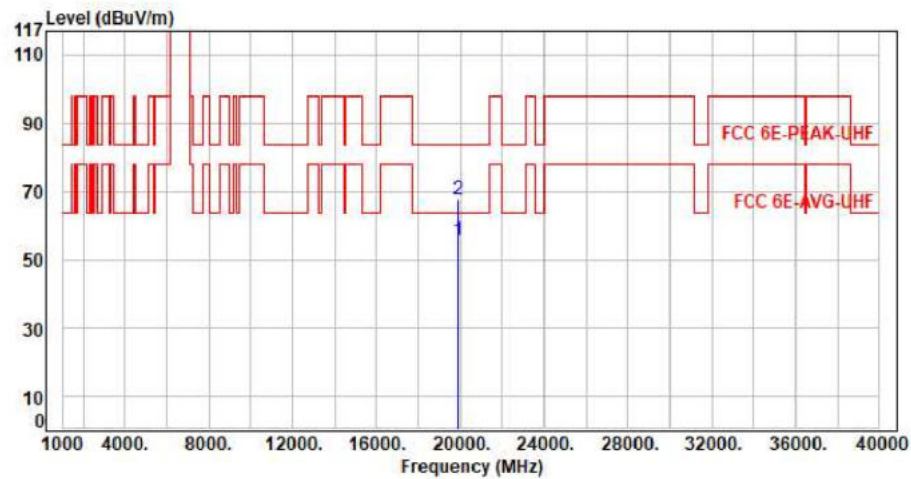


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	43.69	55.59	63.54	-7.95	Average	150	360	P
2	19875.00	11.90	55.84	67.74	83.54	-15.80	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

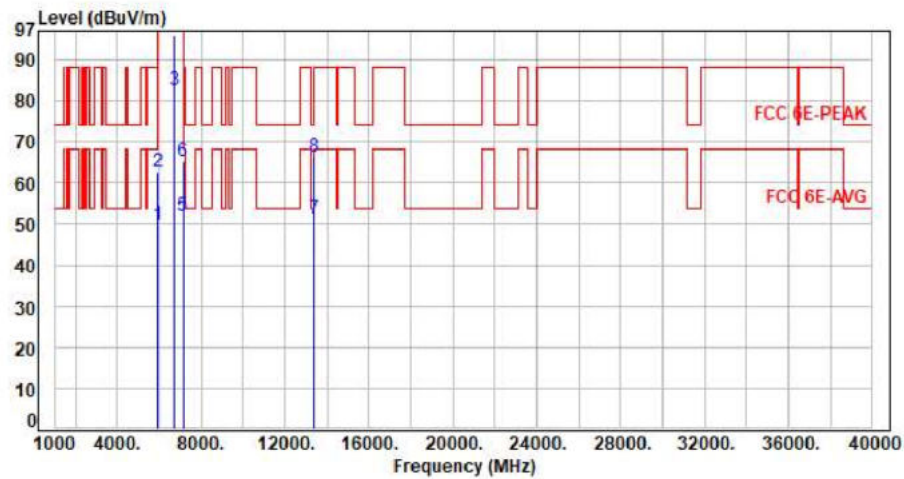


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	272	59	P
2	5925.00	7.66	55.00	62.66	88.20	-25.54	Peak	272	59	P
3	6705.00	9.25	73.35	82.60	200.00	-117.40	Average	272	59	P
4	6705.00	9.25	86.50	95.75	200.00	-104.25	Peak	272	59	P
5	7125.00	10.05	41.83	51.88	68.20	-16.32	Average	272	59	P
6	7125.00	10.05	55.07	65.12	88.20	-23.08	Peak	272	59	P
7	13410.00	21.62	29.48	51.10	68.20	-17.10	Average	100	259	P
8	13410.00	21.62	44.86	66.48	88.20	-21.72	Peak	100	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

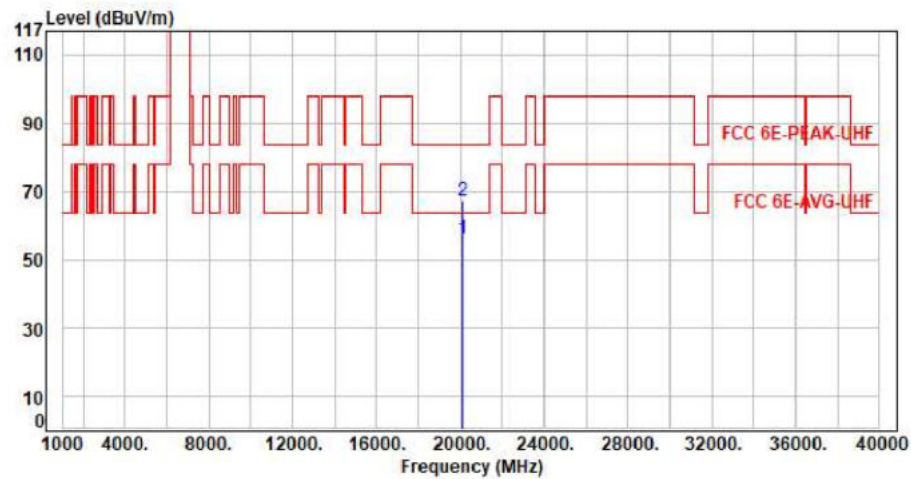


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	44.86	56.26	63.54	-7.28	Average	150	360	P
2	20115.00	11.40	55.76	67.16	83.54	-16.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

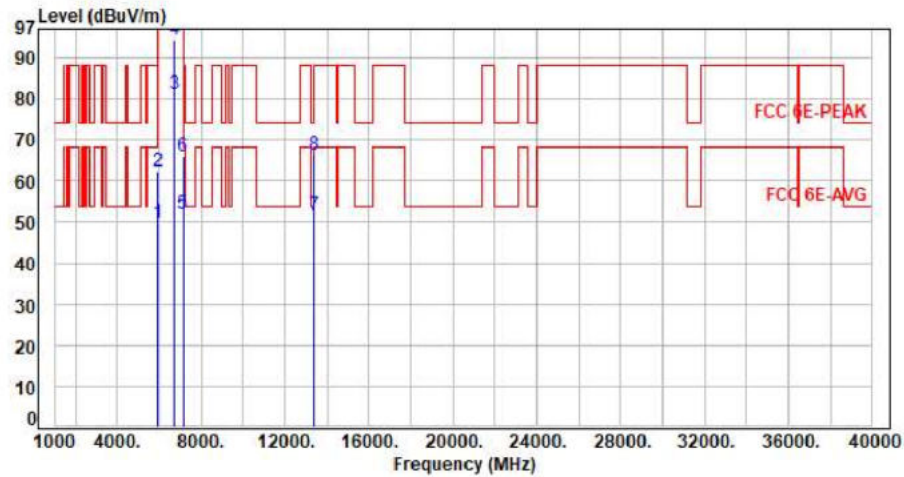


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.05	49.71	68.20	-18.49	Average	391	209	P
2	5925.00	7.66	54.59	62.25	88.20	-25.95	Peak	391	209	P
3	6705.00	9.25	71.75	81.00	200.00	-119.00	Average	391	209	P
4	6705.00	9.25	85.07	94.32	200.00	-105.68	Peak	391	209	P
5	7125.00	10.05	41.81	51.86	68.20	-16.34	Average	391	209	P
6	7125.00	10.05	55.85	65.90	88.20	-22.30	Peak	391	209	P
7	13410.00	21.62	29.88	51.50	68.20	-16.70	Average	100	191	P
8	13410.00	21.62	44.87	66.49	88.20	-21.71	Peak	100	191	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

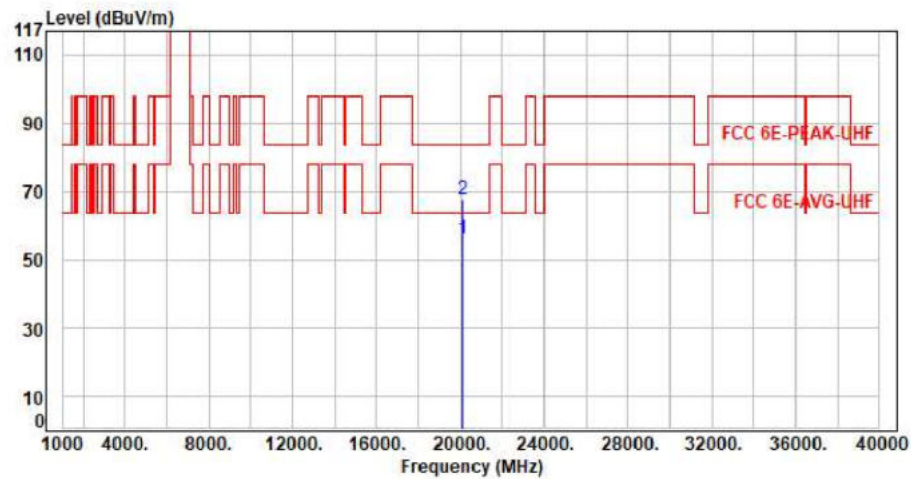


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	44.87	56.27	63.54	-7.27	Average	150	360	P
2	20115.00	11.40	56.03	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

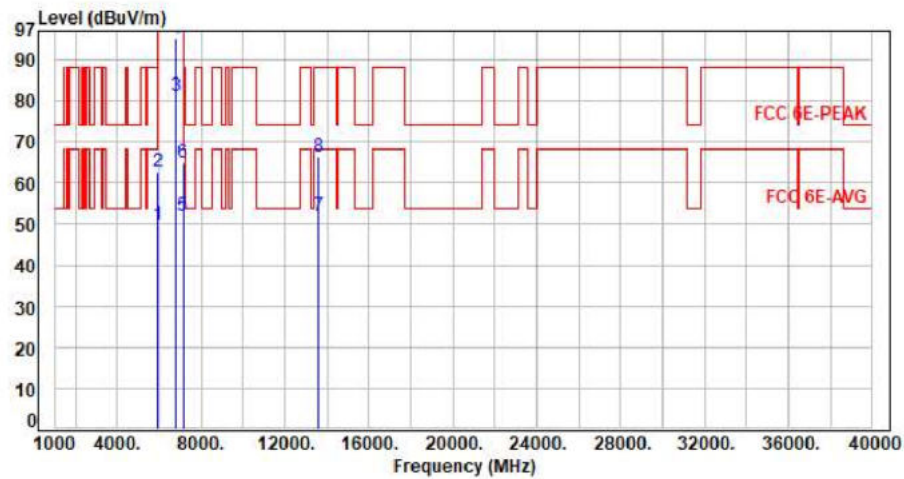

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	268	61	P
2	5925.00	7.66	55.08	62.74	88.20	-25.46	Peak	268	61	P
3	6785.00	9.46	71.79	81.25	200.00	-118.75	Average	268	61	P
4	6785.00	9.46	85.69	95.15	200.00	-104.85	Peak	268	61	P
5	7125.00	10.05	41.89	51.94	68.20	-16.26	Average	268	61	P
6	7125.00	10.05	54.88	64.93	88.20	-23.27	Peak	268	61	P
7	13570.00	22.06	29.88	51.94	68.20	-16.26	Average	100	199	P
8	13570.00	22.06	44.22	66.28	88.20	-21.92	Peak	100	199	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

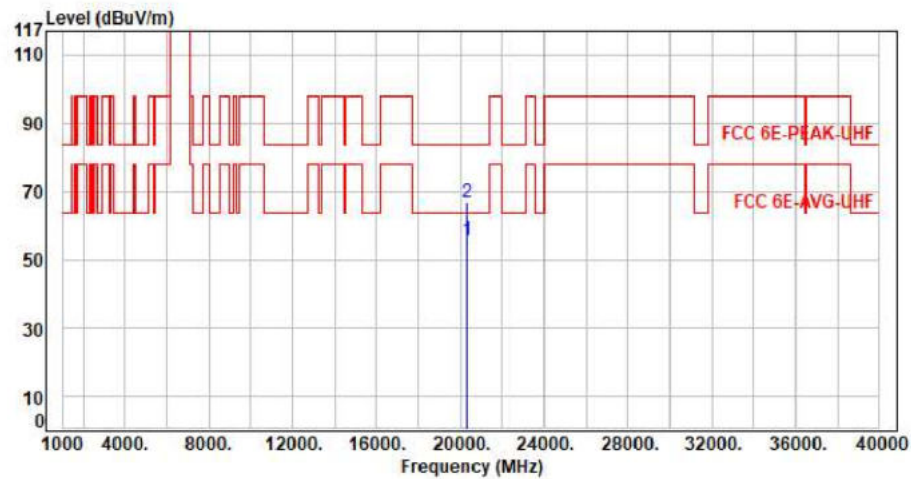

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.75	55.81	63.54	-7.73	Average	150	360	P
2	20355.00	11.06	55.85	66.91	83.54	-16.63	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

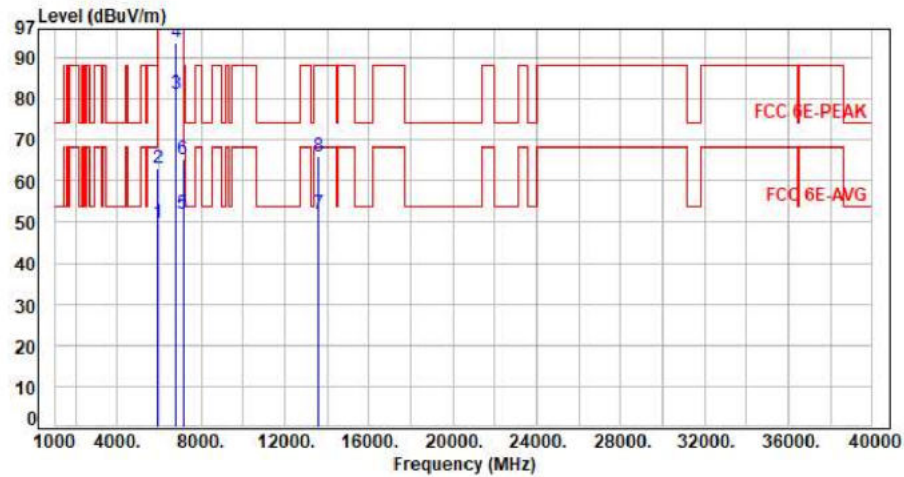

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	395	207	P
2	5925.00	7.66	55.24	62.90	88.20	-25.30	Peak	395	207	P
3	6785.00	9.46	71.83	81.29	200.00	-118.71	Average	395	207	P
4	6785.00	9.46	84.39	93.85	200.00	-106.15	Peak	395	207	P
5	7125.00	10.05	41.81	51.86	68.20	-16.34	Average	395	207	P
6	7125.00	10.05	55.38	65.43	88.20	-22.77	Peak	395	207	P
7	13570.00	22.06	29.89	51.95	68.20	-16.25	Average	100	195	P
8	13570.00	22.06	44.13	66.19	88.20	-22.01	Peak	100	195	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

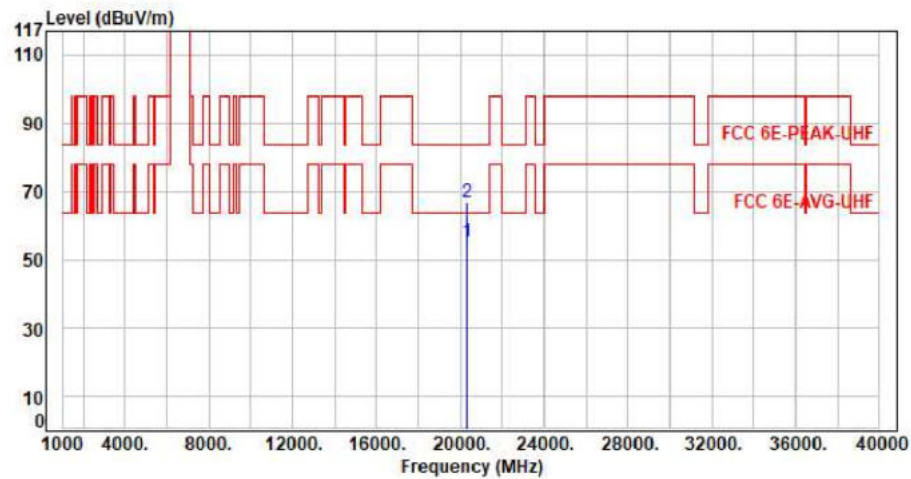

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.21	55.27	63.54	-8.27	Average	150	360	P
2	20355.00	11.06	55.55	66.61	83.54	-16.93	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

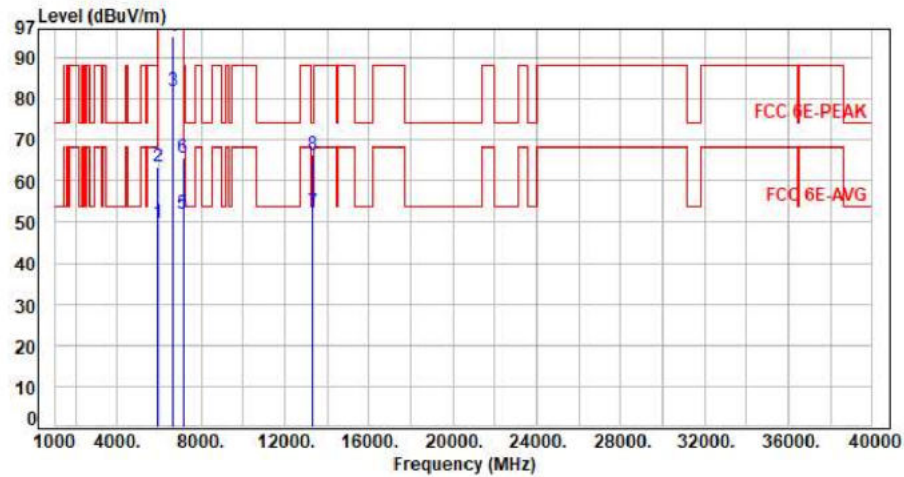

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	255	60	P
2	5925.00	7.66	55.67	63.33	88.20	-24.87	Peak	255	60	P
3	6665.00	9.08	72.83	81.91	200.00	-118.09	Average	255	60	P
4	6665.00	9.08	86.02	95.10	200.00	-104.90	Peak	255	60	P
5	7125.00	10.05	41.91	51.96	68.20	-16.24	Average	255	60	P
6	7125.00	10.05	55.52	65.57	88.20	-22.63	Peak	255	60	P
7	13330.00	21.30	30.92	52.22	54.00	-1.78	Average	100	252	P
8	13330.00	21.30	45.03	66.33	74.00	-7.67	Peak	100	252	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

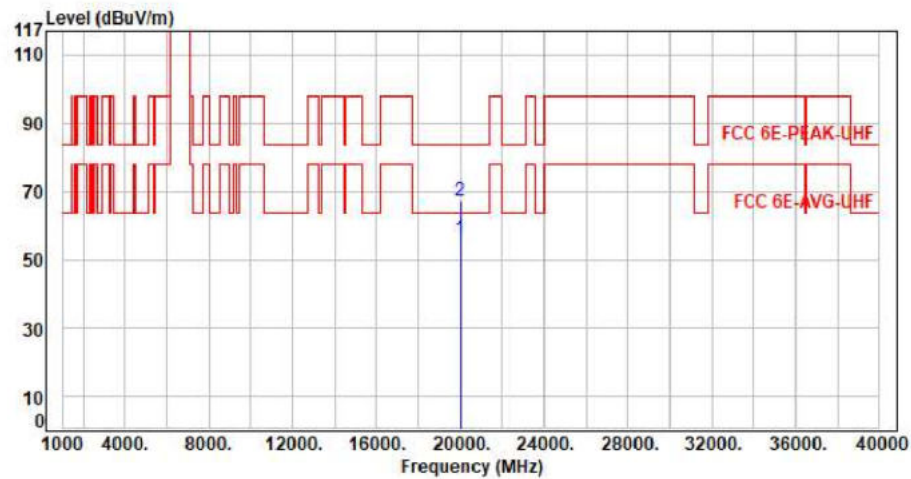

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	44.52	56.22	63.54	-7.32	Average	150	360	P
2	19995.00	11.70	55.49	67.19	83.54	-16.35	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

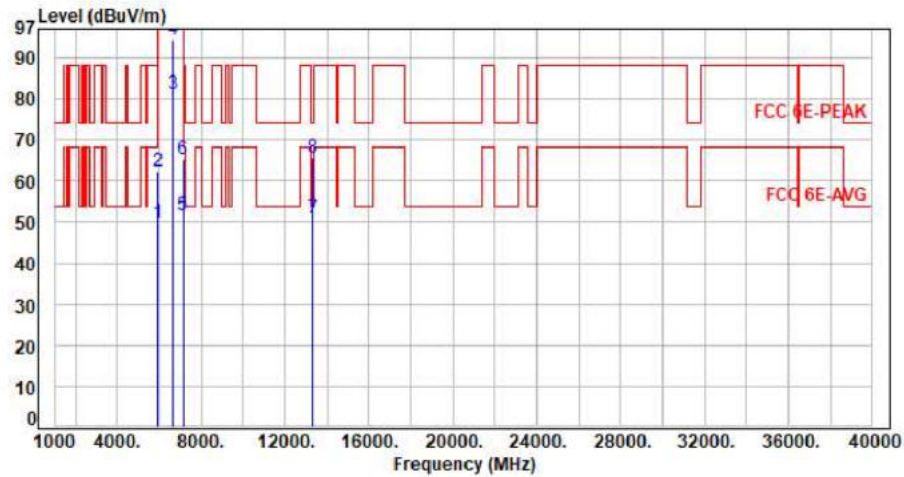


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.20	49.86	68.20	-18.34	Average	382	212	P
2	5925.00	7.66	54.78	62.44	88.20	-25.76	Peak	382	212	P
3	6665.00	9.08	72.22	81.30	200.00	-118.70	Average	382	212	P
4	6665.00	9.08	85.21	94.29	200.00	-105.71	Peak	382	212	P
5	7125.00	10.05	41.76	51.81	68.20	-16.39	Average	382	212	P
6	7125.00	10.05	55.30	65.35	88.20	-22.85	Peak	382	212	P
7	13330.00	21.30	29.65	50.95	54.00	-3.05	Average	100	181	P
8	13330.00	21.30	44.23	65.53	74.00	-8.47	Peak	100	181	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

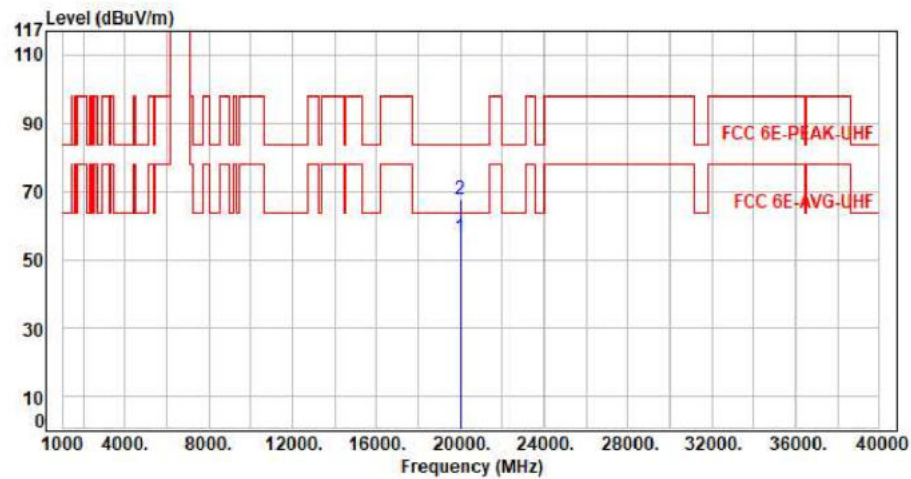


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.00	56.70	63.54	-6.84	Average	150	360	P
2	19995.00	11.70	55.71	67.41	83.54	-16.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

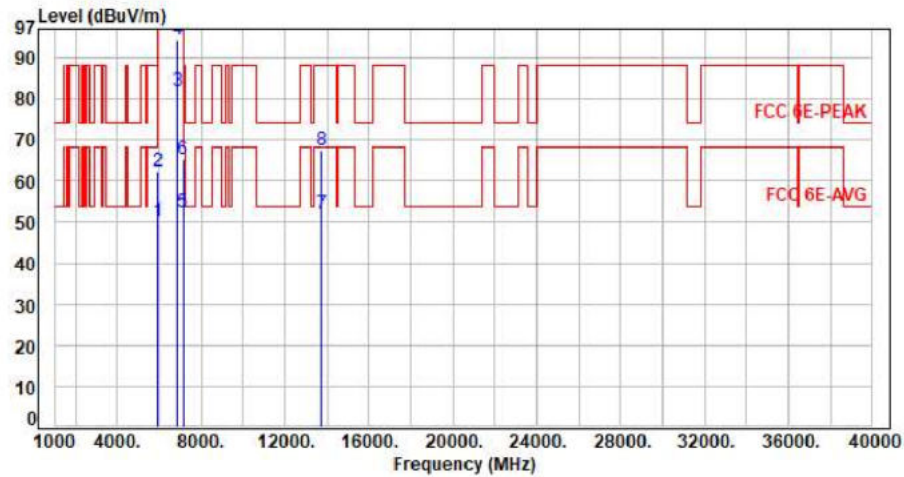

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.62	50.28	68.20	-17.92	Average	253	312	P
2	5925.00	7.66	54.67	62.33	88.20	-25.87	Peak	253	312	P
3	6875.00	9.55	72.42	81.97	200.00	-118.03	Average	253	312	P
4	6875.00	9.55	85.03	94.58	200.00	-105.42	Peak	253	312	P
5	7125.00	10.05	42.40	52.45	68.20	-15.75	Average	253	312	P
6	7125.00	10.05	55.07	65.12	88.20	-23.08	Peak	253	312	P
7	13750.00	22.65	29.18	51.83	68.20	-16.37	Average	100	167	P
8	13750.00	22.65	44.66	67.31	88.20	-20.89	Peak	100	167	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

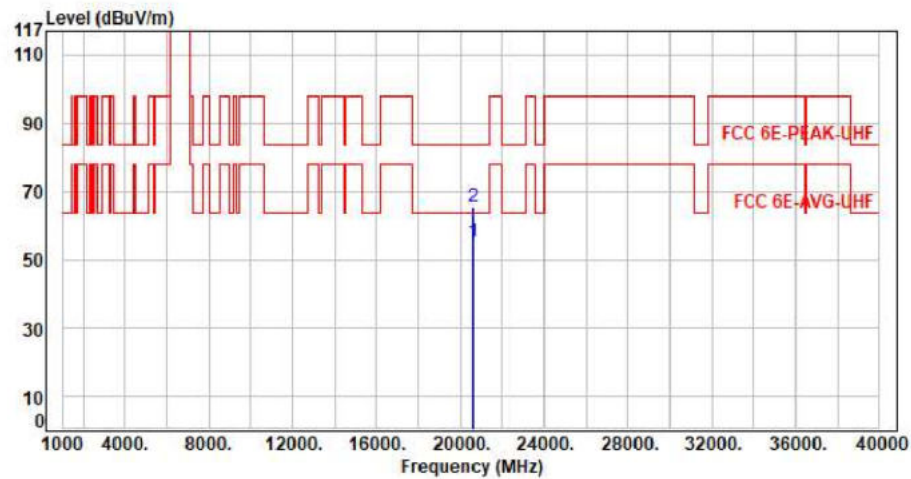


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	44.23	55.37	63.54	-8.17	Average	150	360	P
2	20625.00	11.14	54.29	65.43	83.54	-18.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

```
Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage   : From Adapter(AC120V/60Hz)
Pol       : Horizontal
```

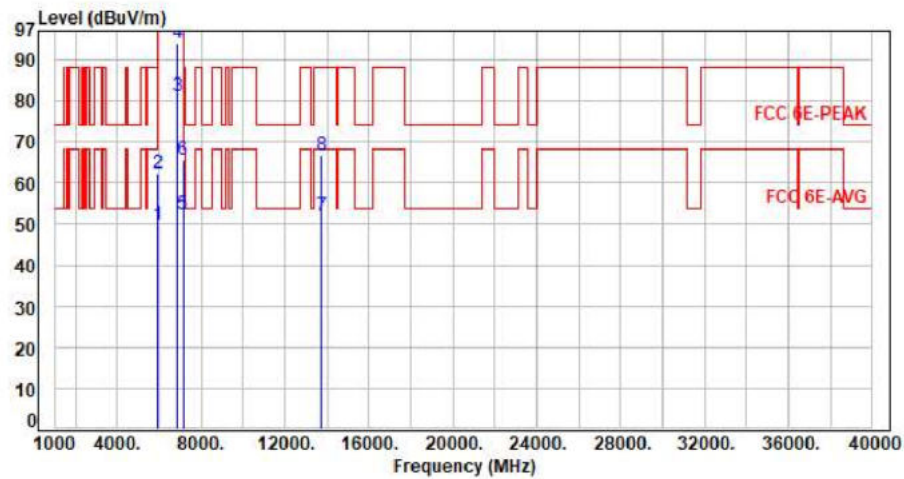

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	400	211	P
2	5925.00	7.66	54.74	62.40	88.20	-25.80	Peak	400	211	P
3	6875.00	9.55	71.58	81.13	200.00	-118.87	Average	400	211	P
4	6875.00	9.55	84.53	94.08	200.00	-105.92	Peak	400	211	P
5	7125.00	10.05	42.18	52.23	68.20	-15.97	Average	400	211	P
6	7125.00	10.05	55.72	65.77	88.20	-22.43	Peak	400	211	P
7	13750.00	22.65	29.47	52.12	68.20	-16.08	Average	100	164	P
8	13750.00	22.65	44.25	66.90	88.20	-21.30	Peak	100	164	P


Note: Level=Reading+Factor

$$\text{Margin} = \text{Level} - \text{Limit}$$
$$\text{Factor} = \text{Antenna Factor} + \text{cable loss} - \text{Amplifier Factor}$$



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

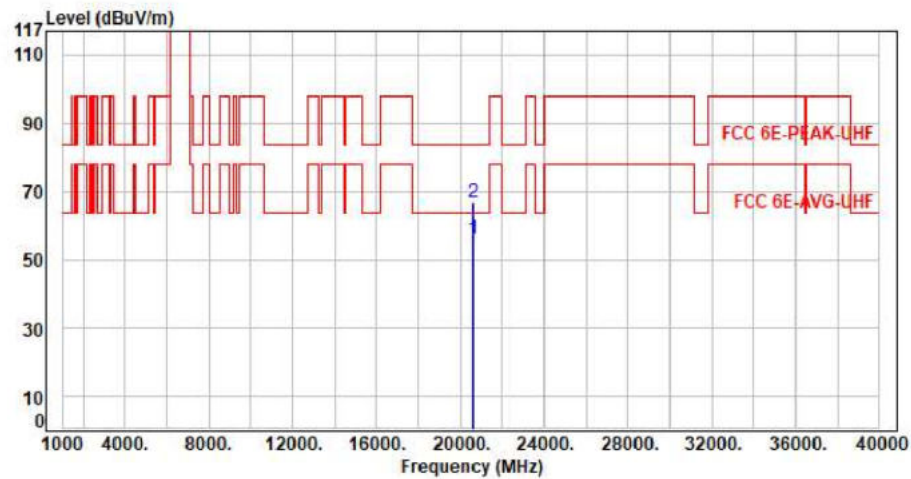


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	44.95	56.09	63.54	-7.45	Average	150	360	P
2	20625.00	11.14	55.68	66.82	83.54	-16.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

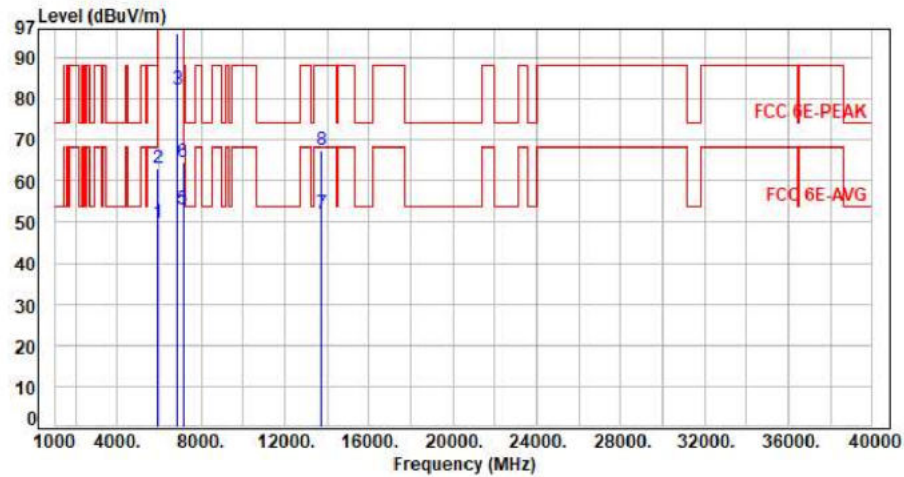

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	265	312	P
2	5925.00	7.66	55.24	62.90	88.20	-25.30	Peak	265	312	P
3	6885.00	9.56	72.64	82.20	200.00	-117.80	Average	265	312	P
4	6885.00	9.56	86.32	95.88	200.00	-104.12	Peak	265	312	P
5	7125.00	10.05	42.94	52.99	68.20	-15.21	Average	265	312	P
6	7125.00	10.05	54.67	64.72	88.20	-23.48	Peak	265	312	P
7	13770.00	22.69	29.45	52.14	68.20	-16.06	Average	100	166	P
8	13770.00	22.69	44.84	67.53	88.20	-20.67	Peak	100	166	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

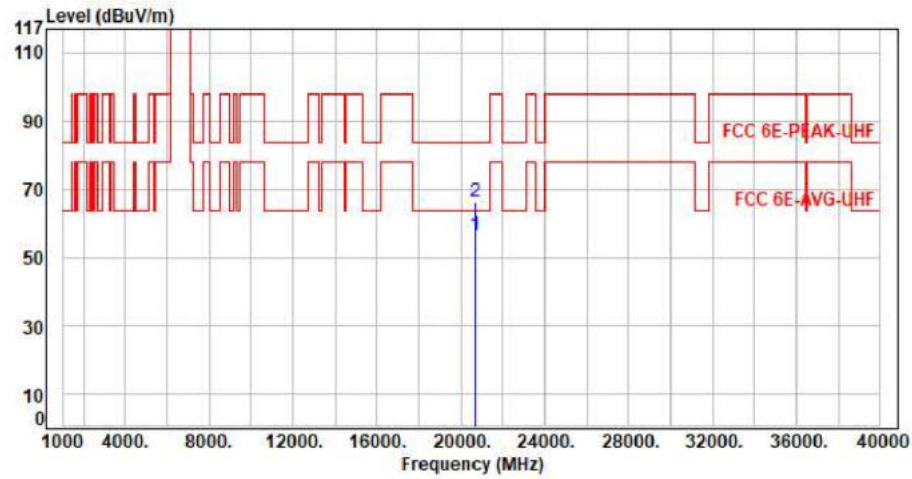

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.71	56.70	63.54	-6.84	Average	150	360	P
2	20655.00	10.99	55.22	66.21	83.54	-17.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor