




For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

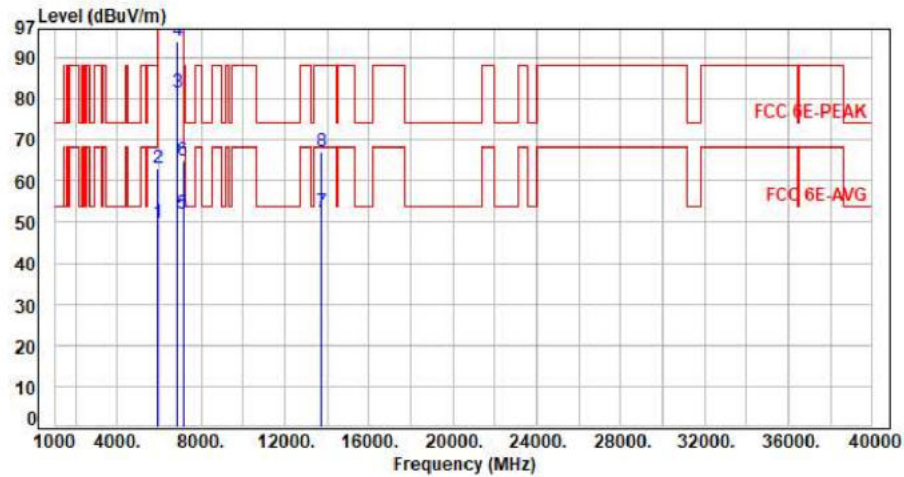

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.21	49.87	68.20	-18.33	Average	380	214	P
2	5925.00	7.66	55.53	63.19	88.20	-25.01	Peak	380	214	P
3	6885.00	9.56	71.77	81.33	200.00	-118.67	Average	380	214	P
4	6885.00	9.56	84.58	94.14	200.00	-105.86	Peak	380	214	P
5	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	380	214	P
6	7125.00	10.05	55.01	65.06	88.20	-23.14	Peak	380	214	P
7	13770.00	22.69	29.64	52.33	68.20	-15.87	Average	100	254	P
8	13770.00	22.69	44.58	67.27	88.20	-20.93	Peak	100	254	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

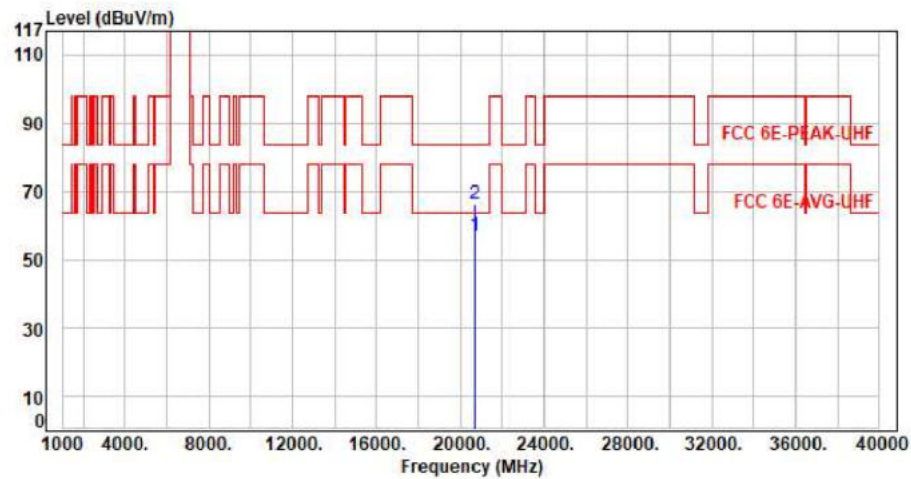


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.78	56.77	63.54	-6.77	Average	150	360	P
2	20655.00	10.99	55.11	66.10	83.54	-17.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

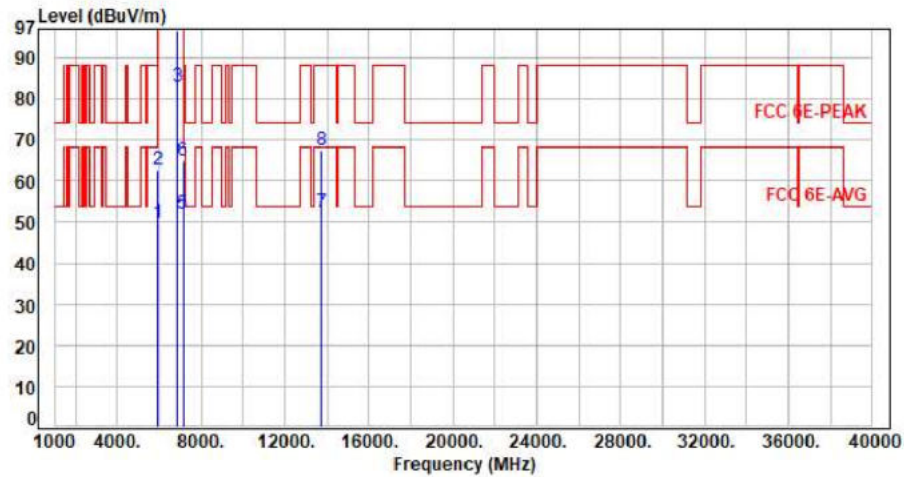


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.30	49.96	68.20	-18.24	Average	253	312	P
2	5925.00	7.66	54.98	62.64	88.20	-25.56	Peak	253	312	P
3	6865.00	9.52	73.29	82.81	200.00	-117.19	Average	253	312	P
4	6865.00	9.52	87.07	96.59	200.00	-103.41	Peak	253	312	P
5	7125.00	10.05	41.92	51.97	68.20	-16.23	Average	253	312	P
6	7125.00	10.05	54.78	64.83	88.20	-23.37	Peak	253	312	P
7	13730.00	22.57	29.64	52.21	68.20	-15.99	Average	100	124	P
8	13730.00	22.57	44.79	67.36	88.20	-20.84	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

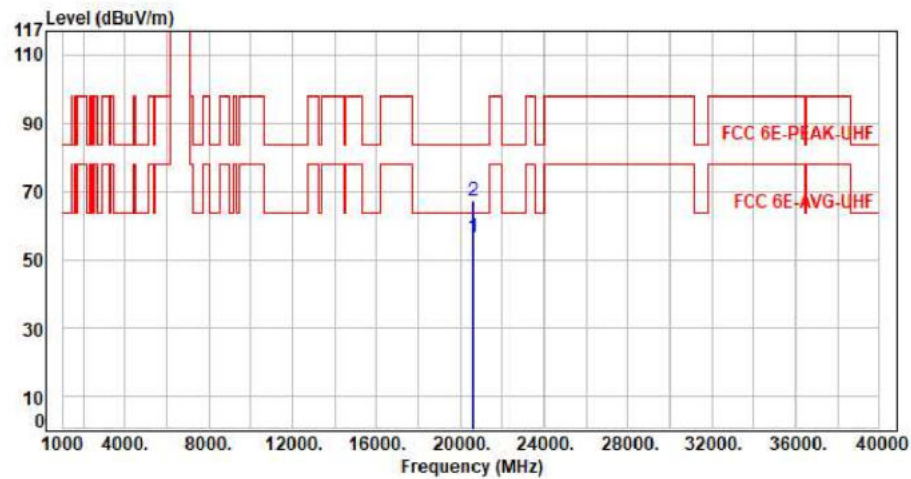


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.28	56.59	63.54	-6.95	Average	150	360	P
2	20595.00	11.31	55.79	67.10	83.54	-16.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

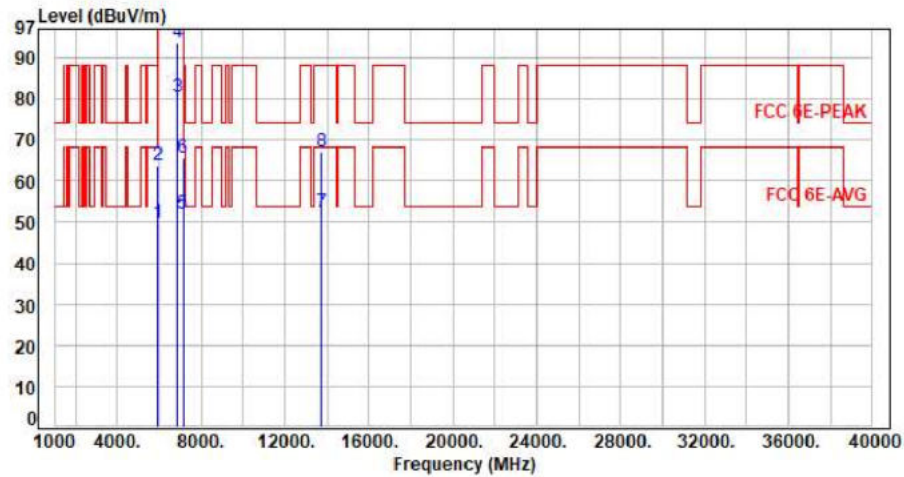


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	400	203	P
2	5925.00	7.66	56.31	63.97	88.20	-24.23	Peak	400	203	P
3	6865.00	9.52	70.71	80.23	200.00	-119.77	Average	400	203	P
4	6865.00	9.52	84.04	93.56	200.00	-106.44	Peak	400	203	P
5	7125.00	10.05	41.89	51.94	68.20	-16.26	Average	400	203	P
6	7125.00	10.05	55.48	65.53	88.20	-22.67	Peak	400	203	P
7	13730.00	22.57	29.68	52.25	68.20	-15.95	Average	100	124	P
8	13730.00	22.57	44.69	67.26	88.20	-20.94	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

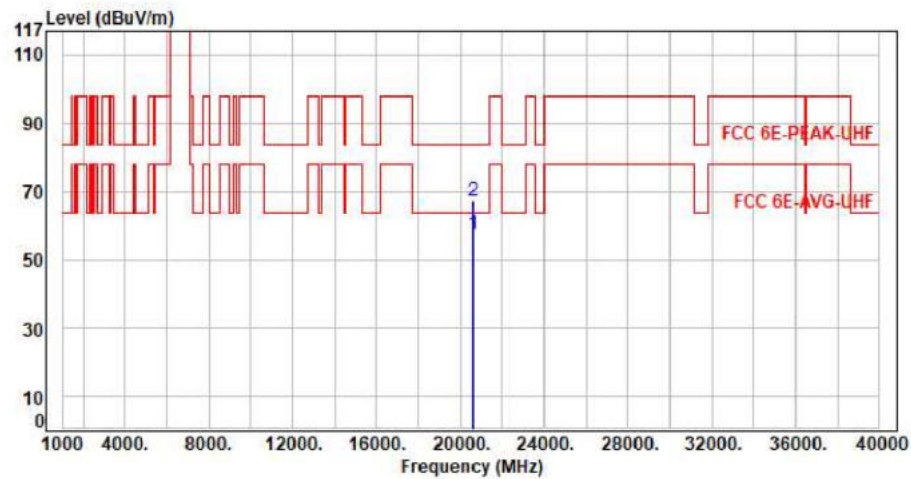


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	46.28	57.59	63.54	-5.95	Average	150	360	P
2	20595.00	11.31	55.87	67.18	83.54	-16.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

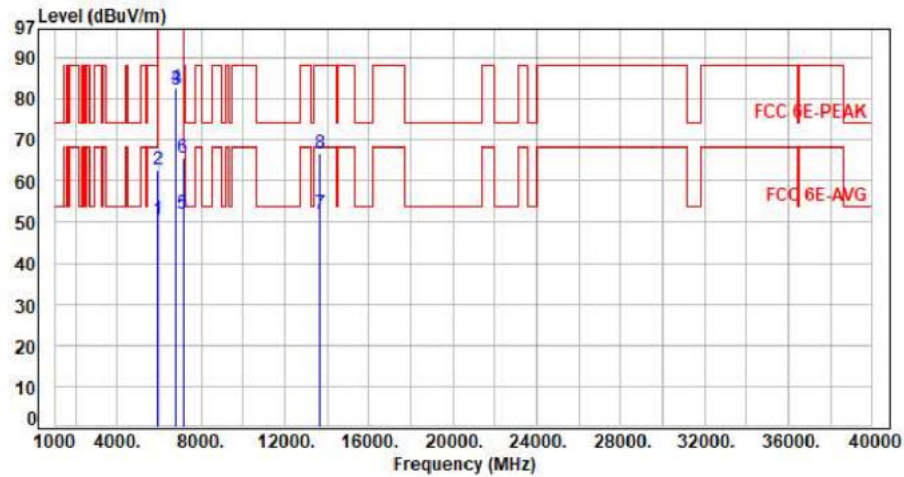

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.95	50.61	68.20	-17.59	Average	270	59	P
2	5925.00	7.66	55.11	62.77	88.20	-25.43	Peak	270	59	P
3	6825.00	9.47	72.93	82.40	200.00	-117.60	Average	270	59	P
4	6825.00	9.47	73.02	82.49	200.00	-117.51	Peak	270	59	P
5	7125.00	10.05	42.07	52.12	68.20	-16.08	Average	270	59	P
6	7125.00	10.05	55.66	65.71	88.20	-22.49	Peak	270	59	P
7	13650.00	22.24	29.86	52.10	68.20	-16.10	Average	100	277	P
8	13650.00	22.24	44.58	66.82	88.20	-21.38	Peak	100	277	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

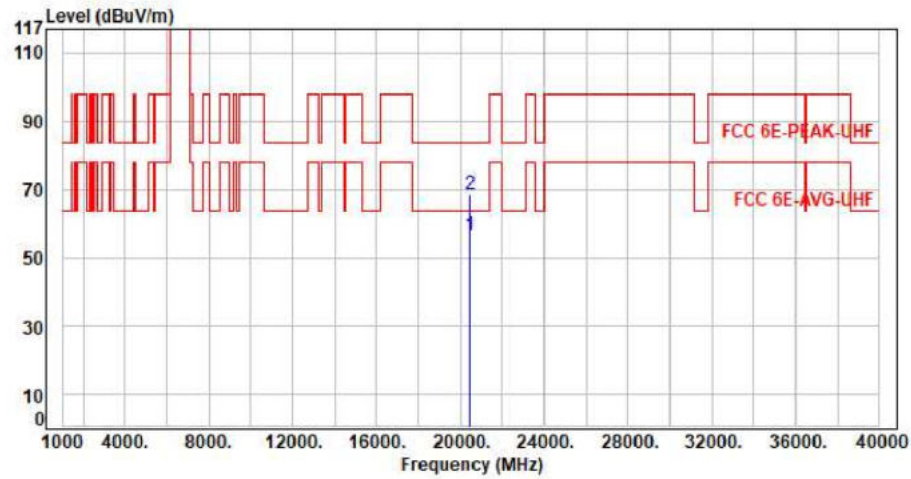


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	44.87	56.32	63.54	-7.22	Average	150	360	P
2	20475.00	11.45	56.87	68.32	83.54	-15.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

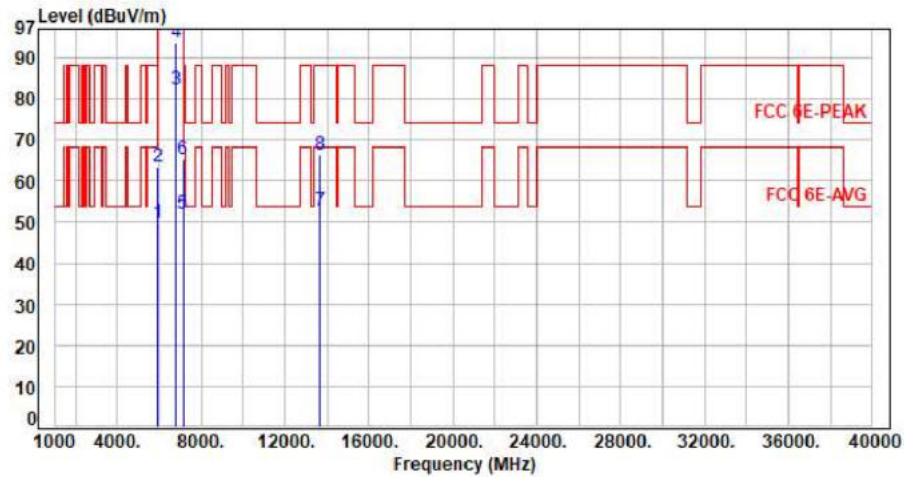

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.19	49.85	68.20	-18.35	Average	392	213	P
2	5925.00	7.66	55.78	63.44	88.20	-24.76	Peak	392	213	P
3	6825.00	9.47	72.63	82.10	200.00	-117.90	Average	392	213	P
4	6825.00	9.47	84.27	93.74	200.00	-106.26	Peak	392	213	P
5	7125.00	10.05	41.90	51.95	68.20	-16.25	Average	392	213	P
6	7125.00	10.05	55.39	65.44	88.20	-22.76	Peak	392	213	P
7	13650.00	22.24	30.45	52.69	68.20	-15.51	Average	100	193	P
8	13650.00	22.24	44.28	66.52	88.20	-21.68	Peak	100	193	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

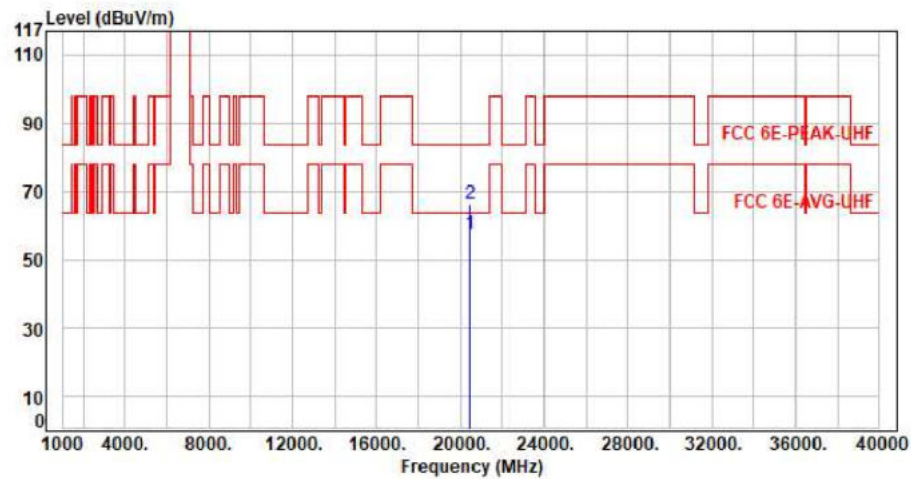


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.98	57.43	63.54	-6.11	Average	150	360	P
2	20475.00	11.45	54.97	66.42	83.54	-17.12	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

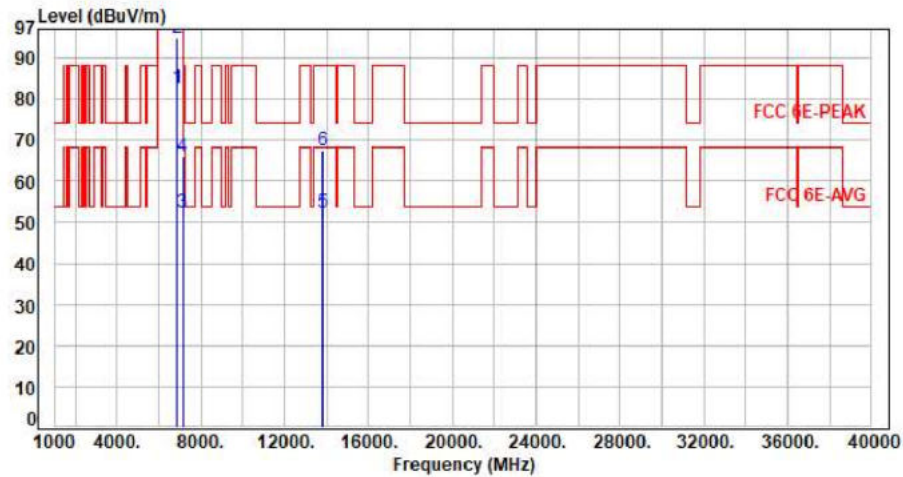


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	72.93	82.52	200.00	-117.48	Average	274	328	P
2	6895.00	9.59	85.18	94.77	200.00	-105.23	Peak	274	328	P
3	7125.00	10.05	42.15	52.20	68.20	-16.00	Average	274	328	P
4	7125.00	10.05	55.98	66.03	88.20	-22.17	Peak	274	328	P
5	13790.00	22.74	29.66	52.40	68.20	-15.80	Average	100	246	P
6	13790.00	22.74	44.68	67.42	88.20	-20.78	Peak	100	246	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1-Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

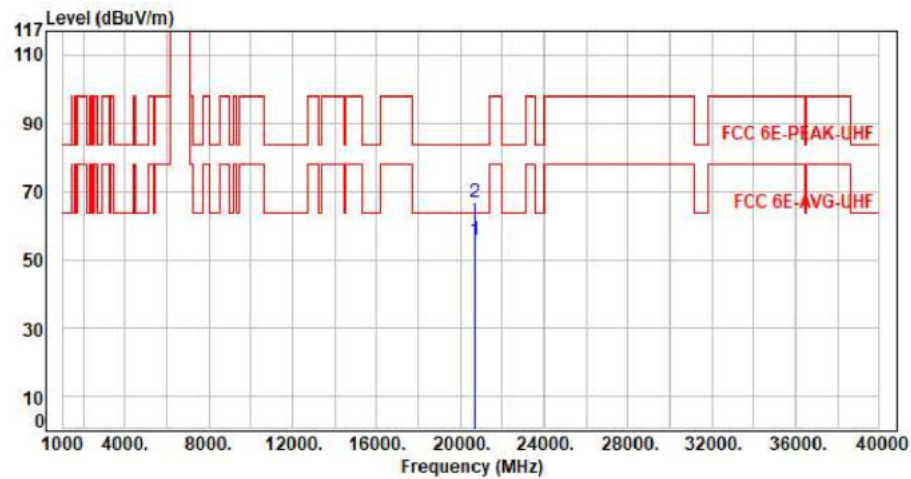


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.61	55.65	63.54	-7.89	Average	150	360	P
2	20685.00	11.04	55.76	66.80	83.54	-16.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

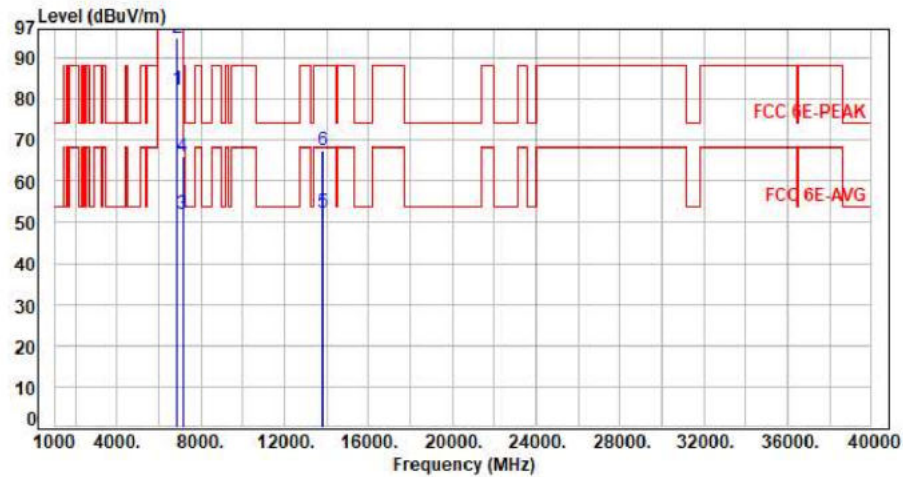


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	72.48	82.07	200.00	-117.93	Average	400	208	P
2	6895.00	9.59	85.23	94.82	200.00	-105.18	Peak	400	208	P
3	7125.00	10.05	42.13	52.18	68.20	-16.02	Average	400	208	P
4	7125.00	10.05	55.88	65.93	88.20	-22.27	Peak	400	208	P
5	13790.00	22.74	29.68	52.42	68.20	-15.78	Average	100	167	P
6	13790.00	22.74	44.80	67.54	88.20	-20.66	Peak	100	167	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

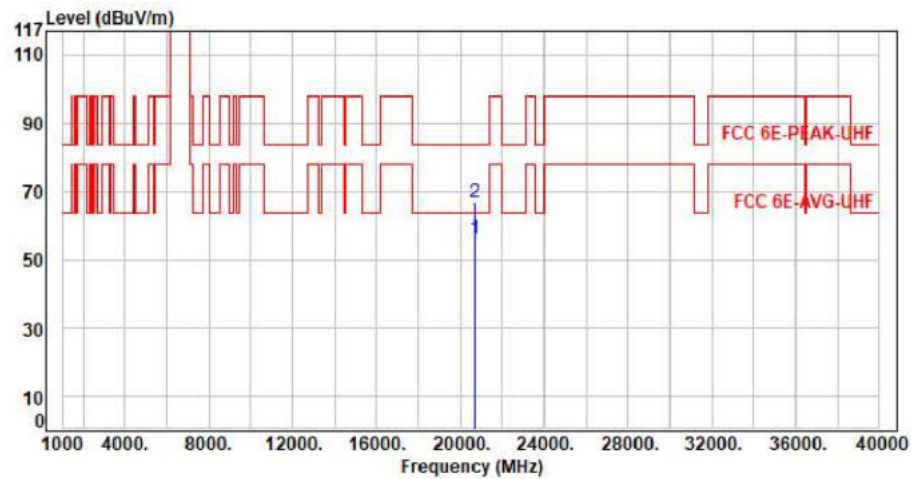


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.85	55.89	63.54	-7.65	Average	150	360	P
2	20685.00	11.04	55.76	66.80	83.54	-16.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

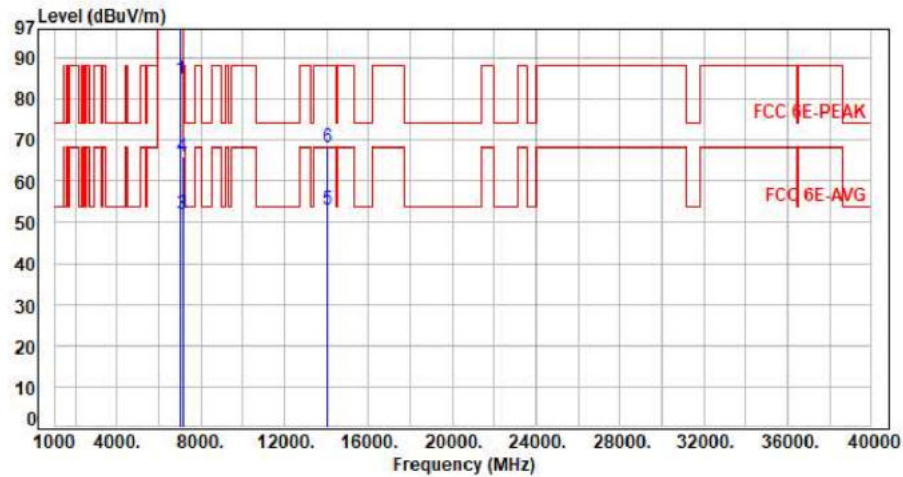


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	75.29	84.97	200.00	-115.03	Average	257	308	P
2	7015.00	9.68	88.98	98.66	200.00	-101.34	Peak	257	308	P
3	7125.00	10.05	42.06	52.11	68.20	-16.09	Average	257	308	P
4	7125.00	10.05	55.97	66.02	88.20	-22.18	Peak	257	308	P
5	14030.00	23.39	29.69	53.08	68.20	-15.12	Average	100	139	P
6	14030.00	23.39	44.79	68.18	88.20	-20.02	Peak	100	139	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

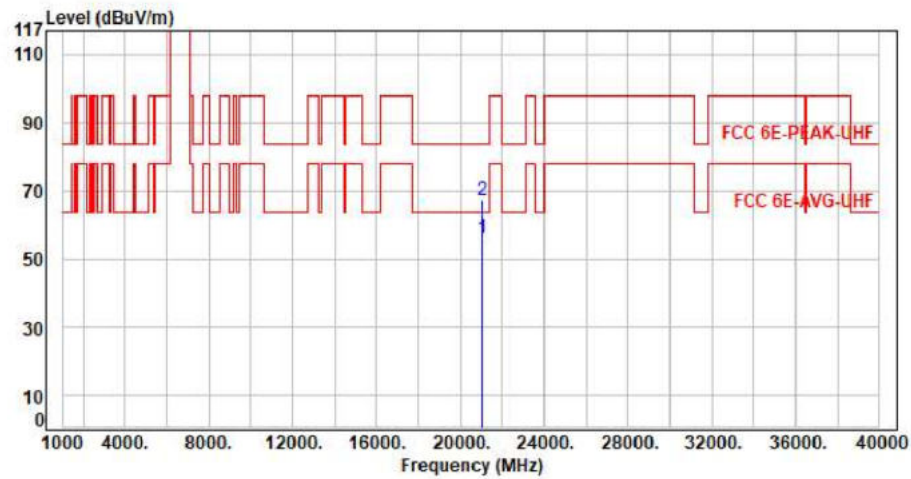


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.62	56.12	63.54	-7.42	Average	150	360	P
2	21045.00	11.50	55.78	67.28	83.54	-16.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

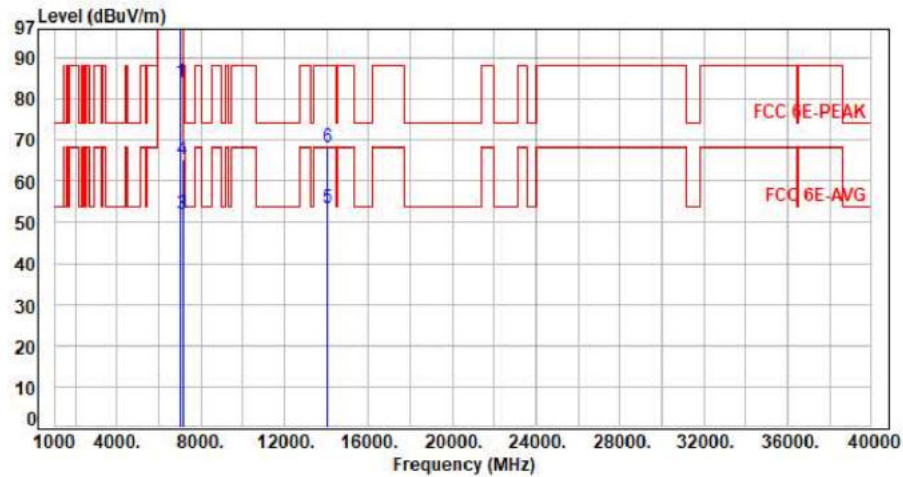


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	74.31	83.99	200.00	-116.01	Average	383	205	P
2	7015.00	9.68	87.30	96.98	200.00	-103.02	Peak	383	205	P
3	7125.00	10.05	41.99	52.04	68.20	-16.16	Average	383	205	P
4	7125.00	10.05	55.20	65.25	88.20	-22.95	Peak	383	205	P
5	14030.00	23.39	30.15	53.54	68.20	-14.66	Average	100	123	P
6	14030.00	23.39	44.82	68.21	88.20	-19.99	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

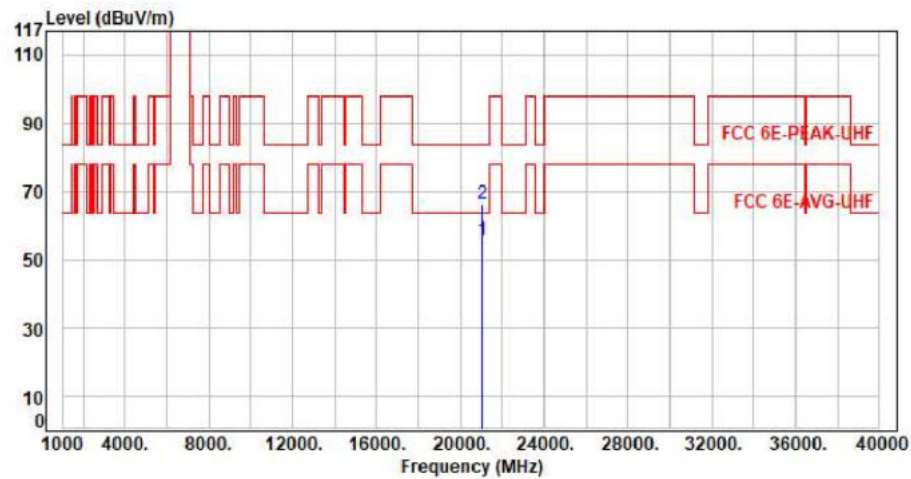


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	43.98	55.48	63.54	-8.06	Average	150	360	P
2	21045.00	11.50	54.98	66.48	83.54	-17.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

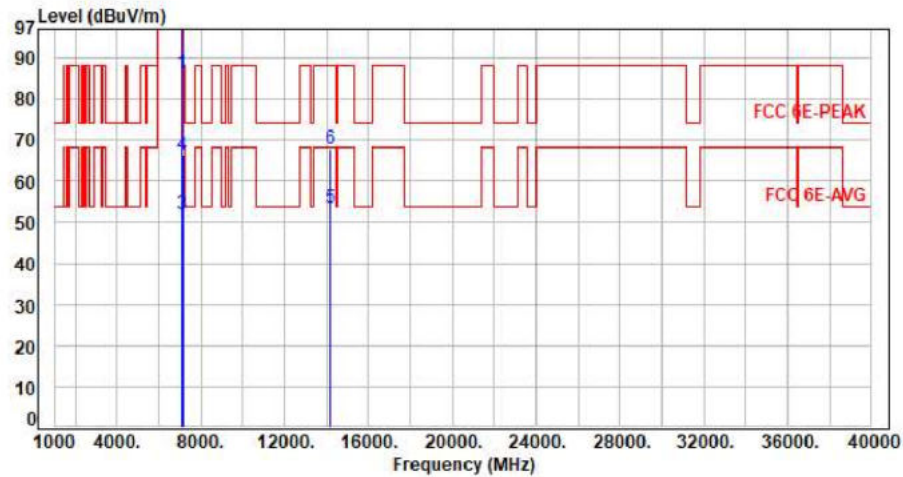


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	76.23	86.19	200.00	-113.81	Average	282	325	P
2	7095.00	9.96	88.82	98.78	200.00	-101.22	Peak	282	325	P
3	7125.00	10.05	42.09	52.14	68.20	-16.06	Average	282	325	P
4	7125.00	10.05	56.20	66.25	88.20	-21.95	Peak	282	325	P
5	14190.00	23.79	29.52	53.31	68.20	-14.89	Average	100	221	P
6	14190.00	23.79	44.21	68.00	88.20	-20.20	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

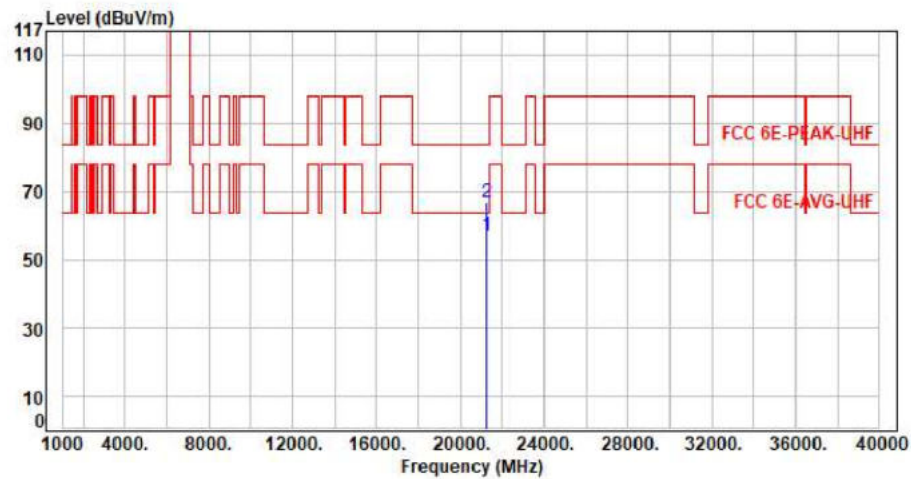


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.99	56.79	63.54	-6.75	Average	150	360	P
2	21285.00	11.80	54.83	66.63	83.54	-16.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

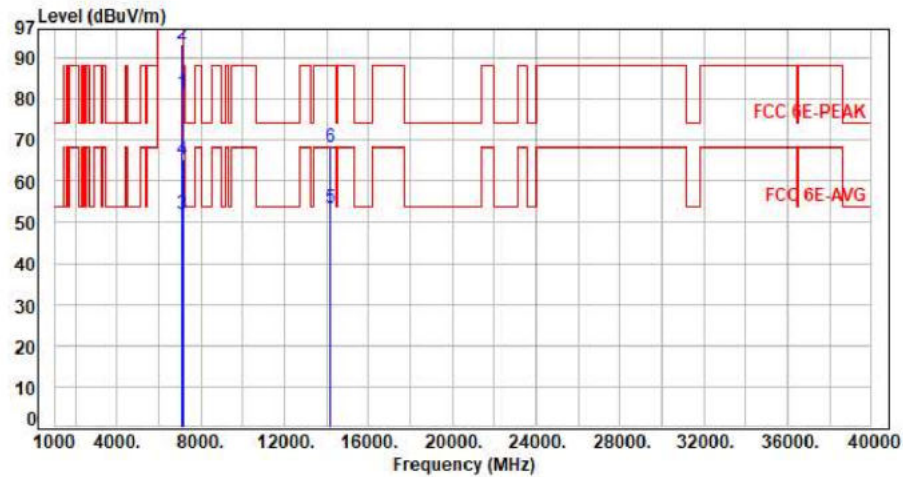


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	71.38	81.34	200.00	-118.66	Average	383	78	P
2	7095.00	9.96	83.50	93.46	200.00	-106.54	Peak	383	78	P
3	7125.00	10.05	41.97	52.02	68.20	-16.18	Average	383	78	P
4	7125.00	10.05	55.30	65.35	88.20	-22.85	Peak	383	78	P
5	14190.00	23.79	29.55	53.34	68.20	-14.86	Average	100	112	P
6	14190.00	23.79	44.58	68.37	88.20	-19.83	Peak	100	112	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

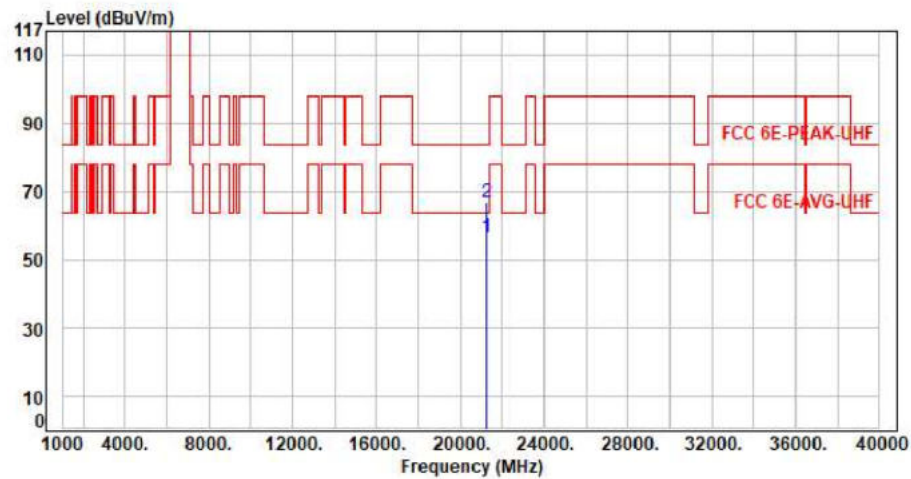


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.73	56.53	63.54	-7.01	Average	150	360	P
2	21285.00	11.80	55.15	66.95	83.54	-16.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

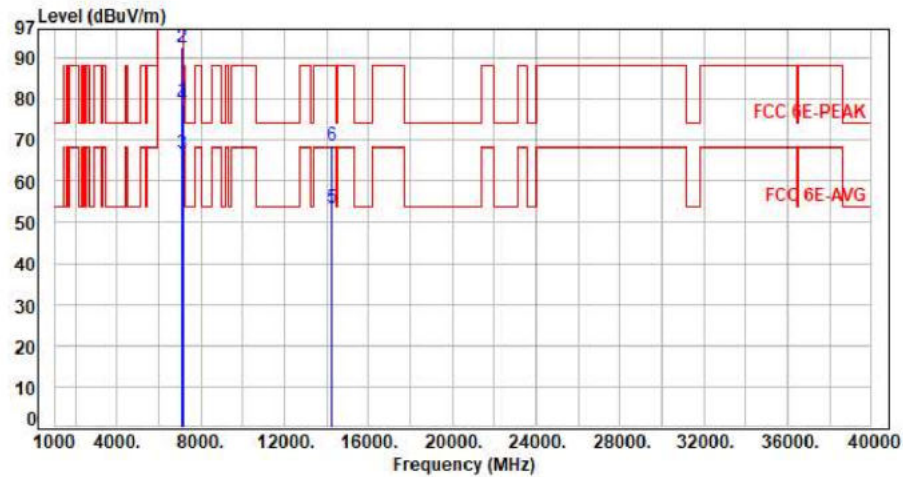


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	69.79	79.81	200.00	-120.19	Average	285	325	P
2	7115.00	10.02	82.42	92.44	200.00	-107.56	Peak	285	325	P
3	7125.00	10.05	56.82	66.87	68.20	-1.33	Average	285	325	P
4	7125.00	10.05	68.56	78.61	88.20	-9.59	Peak	285	325	P
5	14230.00	23.94	29.64	53.58	68.20	-14.62	Average	100	312	P
6	14230.00	23.94	44.59	68.53	88.20	-19.67	Peak	100	312	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

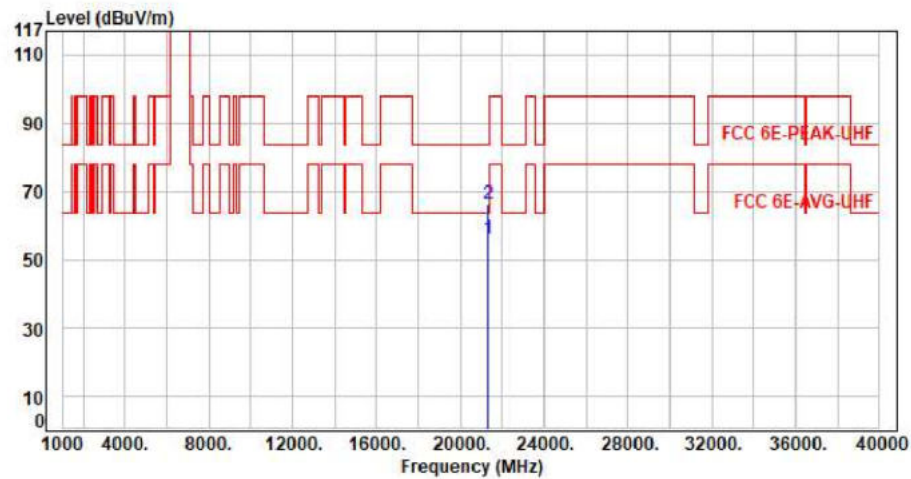


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	44.52	55.88	63.54	-7.66	Average	150	360	P
2	21345.00	11.36	54.84	66.20	83.54	-17.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

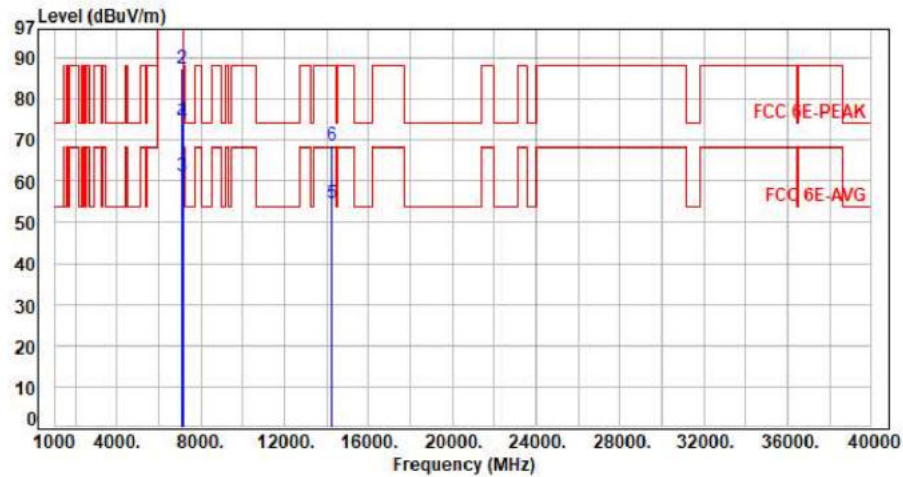


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	64.73	74.75	200.00	-125.25	Average	386	50	P
2	7115.00	10.02	77.38	87.40	200.00	-112.60	Peak	386	50	P
3	7125.00	10.05	51.01	61.06	68.20	-7.14	Average	386	50	P
4	7125.00	10.05	64.20	74.25	88.20	-13.95	Peak	386	50	P
5	14230.00	23.94	30.64	54.58	68.20	-13.62	Average	100	166	P
6	14230.00	23.94	44.69	68.63	88.20	-19.57	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

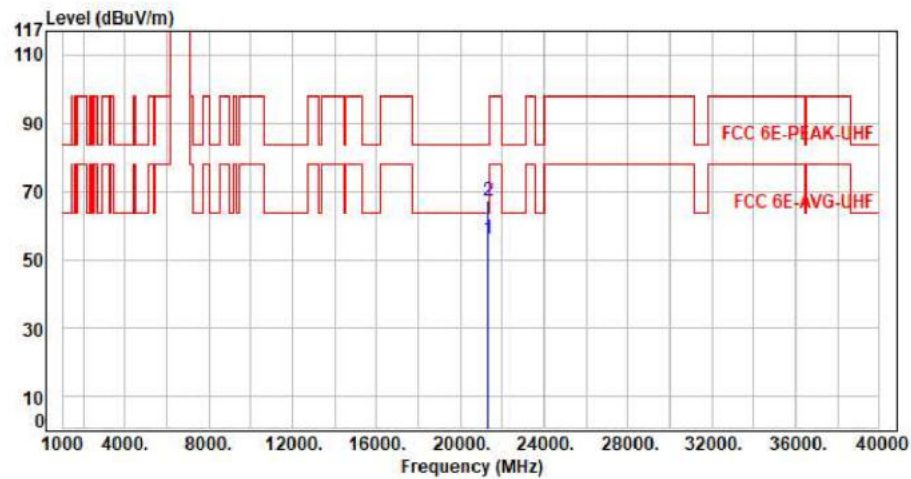


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	44.72	56.08	63.54	-7.46	Average	150	360	P
2	21345.00	11.36	55.63	66.99	83.54	-16.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

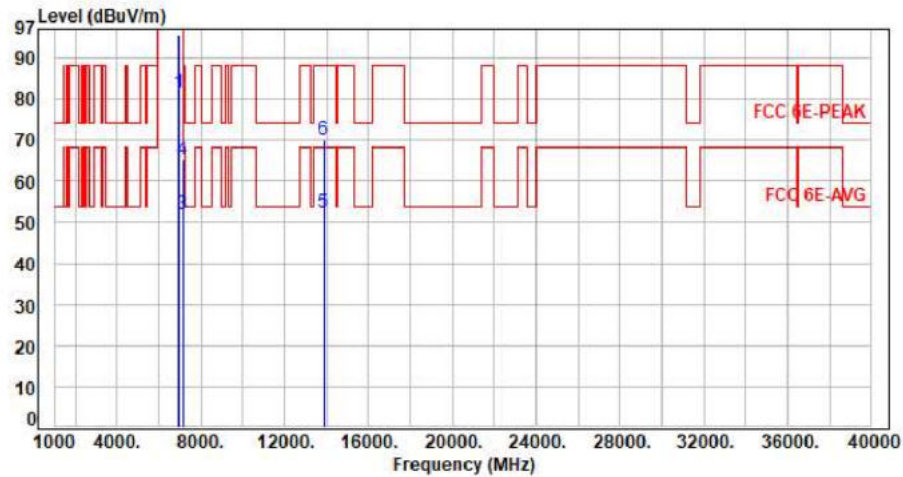


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	71.94	81.55	200.00	-118.45	Average	271	327	P
2	6925.00	9.61	86.01	95.62	200.00	-104.38	Peak	271	327	P
3	7125.00	10.05	42.01	52.06	68.20	-16.14	Average	271	327	P
4	7125.00	10.05	55.10	65.15	88.20	-23.05	Peak	271	327	P
5	13850.00	22.86	29.49	52.35	68.20	-15.85	Average	100	226	P
6	13850.00	22.86	47.24	70.10	88.20	-18.10	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

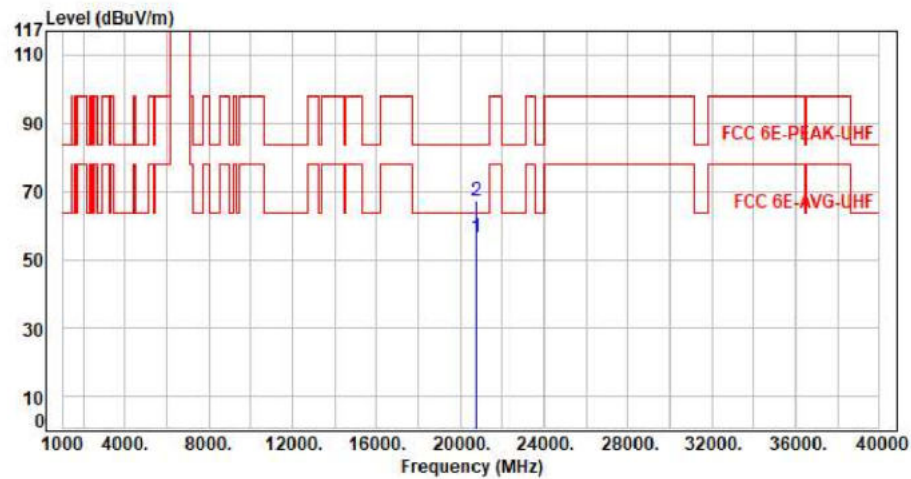


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.15	56.54	63.54	-7.00	Average	150	360	P
2	20775.00	11.39	55.71	67.10	83.54	-16.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

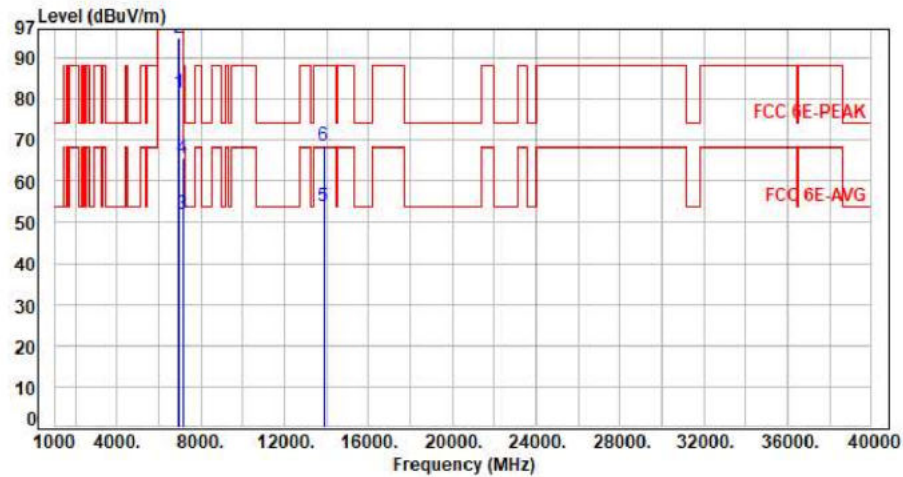


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	71.78	81.39	200.00	-118.61	Average	393	211	P
2	6925.00	9.61	85.25	94.86	200.00	-105.14	Peak	393	211	P
3	7125.00	10.05	41.99	52.04	68.20	-16.16	Average	393	211	P
4	7125.00	10.05	55.76	65.81	88.20	-22.39	Peak	393	211	P
5	13850.00	22.86	31.15	54.01	68.20	-14.19	Average	100	229	P
6	13850.00	22.86	45.85	68.71	88.20	-19.49	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

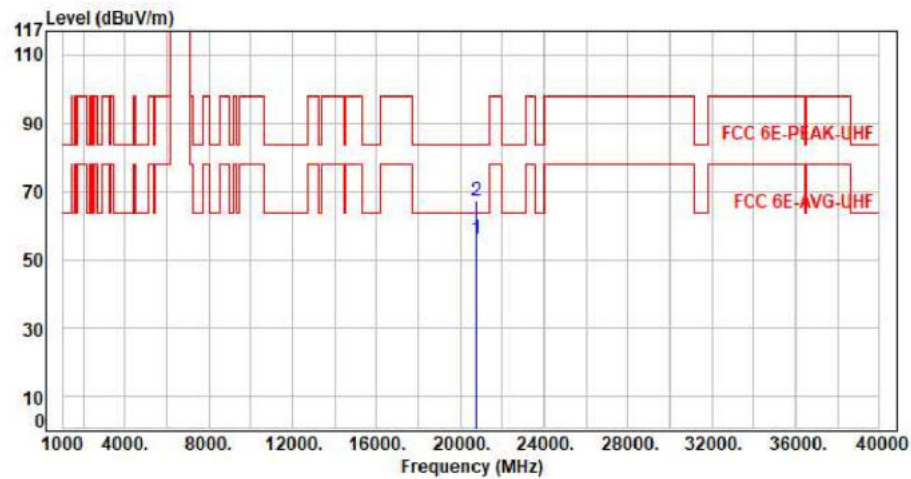


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	44.77	56.16	63.54	-7.38	Average	150	360	P
2	20775.00	11.39	55.71	67.10	83.54	-16.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

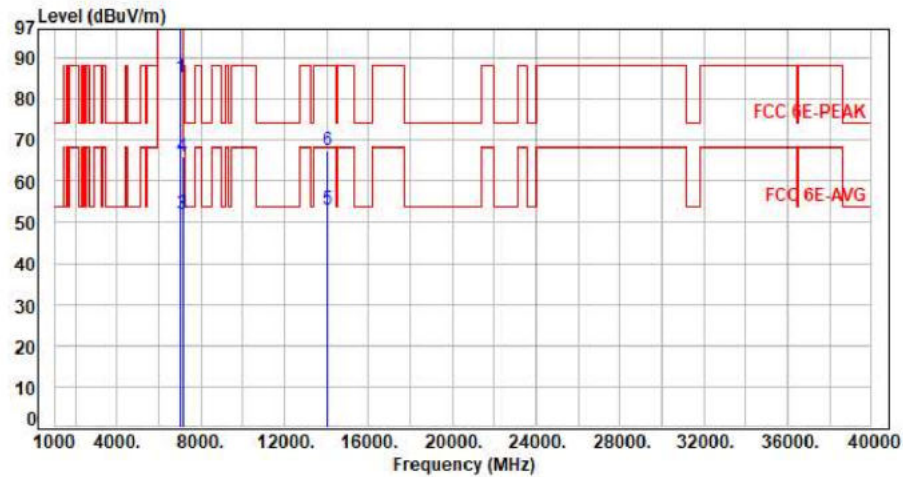


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	75.60	85.25	200.00	-114.75	Average	274	325	P
2	7005.00	9.65	88.20	97.85	200.00	-102.15	Peak	274	325	P
3	7125.00	10.05	41.92	51.97	68.20	-16.23	Average	274	325	P
4	7125.00	10.05	56.14	66.19	88.20	-22.01	Peak	274	325	P
5	14010.00	23.32	29.67	52.99	68.20	-15.21	Average	100	263	P
6	14010.00	23.32	44.36	67.68	88.20	-20.52	Peak	100	263	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

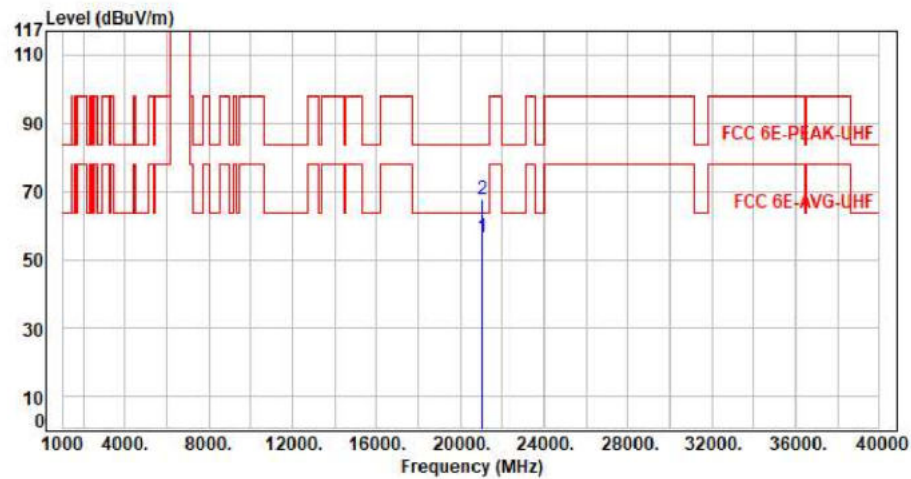

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.12	56.60	63.54	-6.94	Average	150	360	P
2	21015.00	11.48	56.10	67.58	83.54	-15.96	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

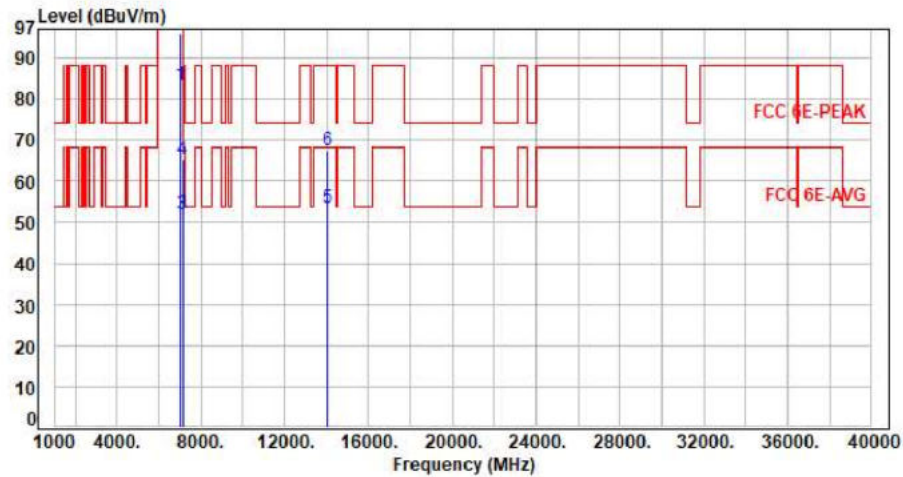


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	73.79	83.44	200.00	-116.56	Average	400	209	P
2	7005.00	9.65	86.40	96.05	200.00	-103.95	Peak	400	209	P
3	7125.00	10.05	42.04	52.09	68.20	-16.11	Average	400	209	P
4	7125.00	10.05	55.33	65.38	88.20	-22.82	Peak	400	209	P
5	14010.00	23.32	30.15	53.47	68.20	-14.73	Average	100	264	P
6	14010.00	23.32	44.06	67.38	88.20	-20.82	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

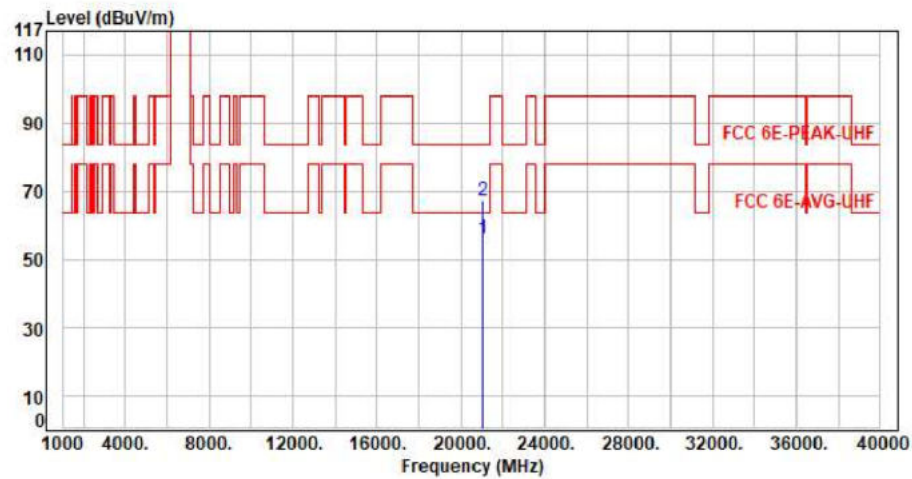


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	44.77	56.25	63.54	-7.29	Average	150	360	P
2	21015.00	11.48	55.81	67.29	83.54	-16.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

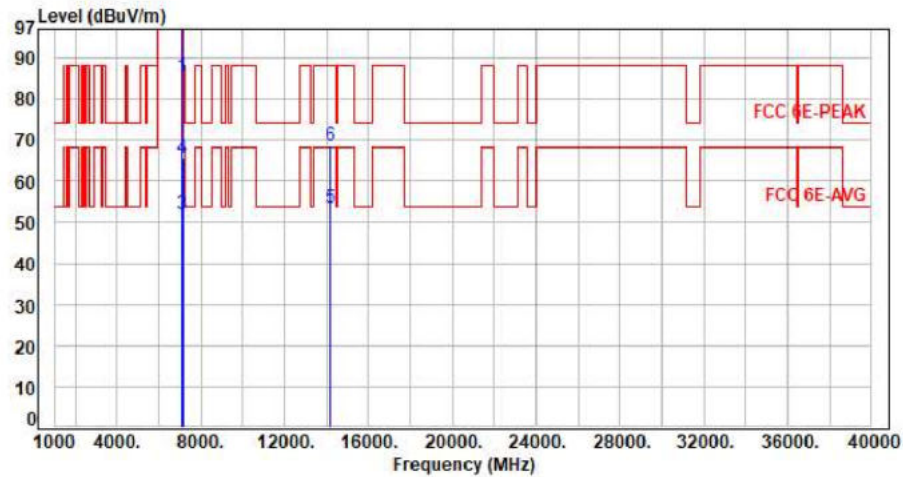


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	75.58	85.49	200.00	-114.51	Average	282	326	P
2	7085.00	9.91	88.78	98.69	200.00	-101.31	Peak	282	326	P
3	7125.00	10.05	41.86	51.91	68.20	-16.29	Average	282	326	P
4	7125.00	10.05	55.53	65.58	88.20	-22.62	Peak	282	326	P
5	14170.00	23.72	29.67	53.39	68.20	-14.81	Average	100	124	P
6	14170.00	23.72	44.99	68.71	88.20	-19.49	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

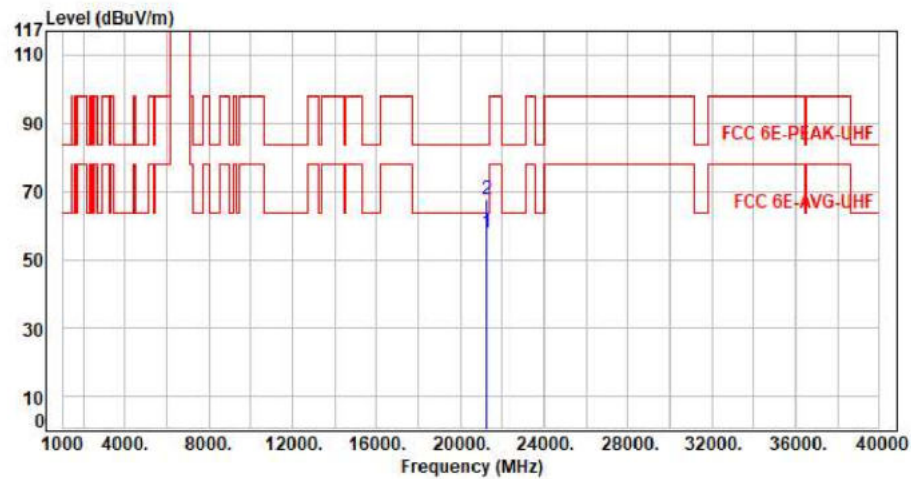


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.85	57.69	63.54	-5.85	Average	150	360	P
2	21255.00	11.84	55.99	67.83	83.54	-15.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

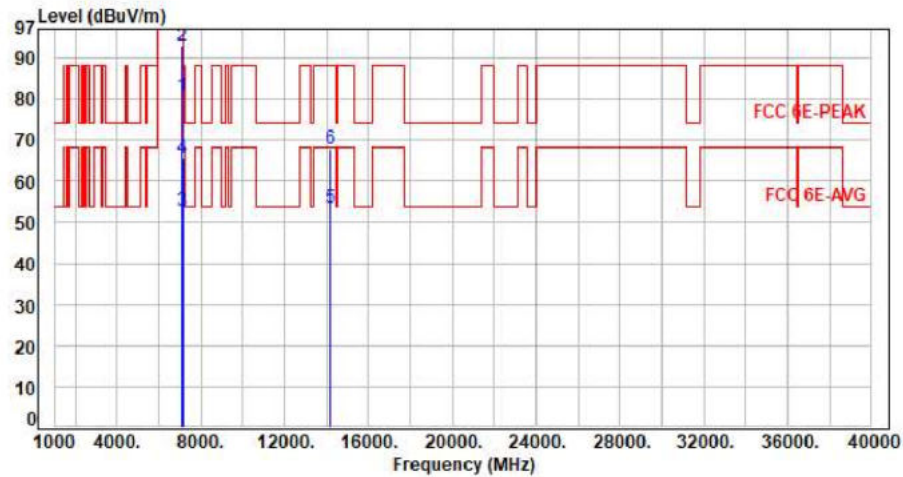


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	70.87	80.78	200.00	-119.22	Average	376	76	P
2	7085.00	9.91	83.18	93.09	200.00	-106.91	Peak	376	76	P
3	7125.00	10.05	42.59	52.64	68.20	-15.56	Average	376	76	P
4	7125.00	10.05	55.43	65.48	88.20	-22.72	Peak	376	76	P
5	14170.00	23.72	29.66	53.38	68.20	-14.82	Average	100	161	P
6	14170.00	23.72	44.28	68.00	88.20	-20.20	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

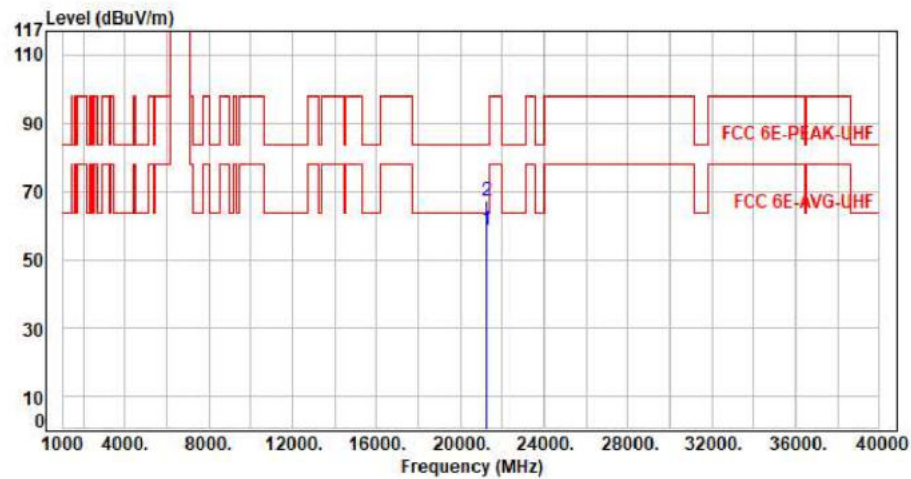


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	46.88	58.72	63.54	-4.82	Average	150	360	P
2	21255.00	11.84	55.21	67.05	83.54	-16.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

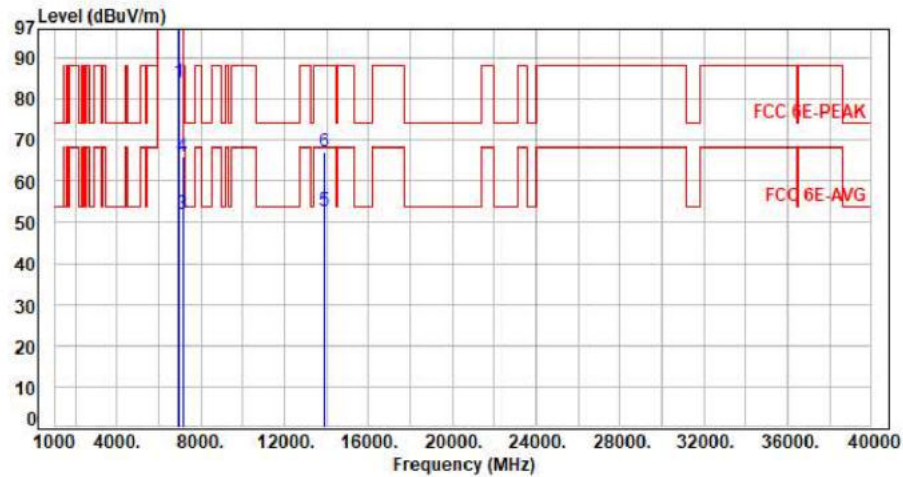


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	74.35	83.97	200.00	-116.03	Average	257	312	P
2	6945.00	9.62	87.52	97.14	200.00	-102.86	Peak	257	312	P
3	7125.00	10.05	41.99	52.04	68.20	-16.16	Average	257	312	P
4	7125.00	10.05	55.93	65.98	88.20	-22.22	Peak	257	312	P
5	13890.00	22.95	29.75	52.70	68.20	-15.50	Average	100	311	P
6	13890.00	22.95	44.28	67.23	88.20	-20.97	Peak	100	311	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

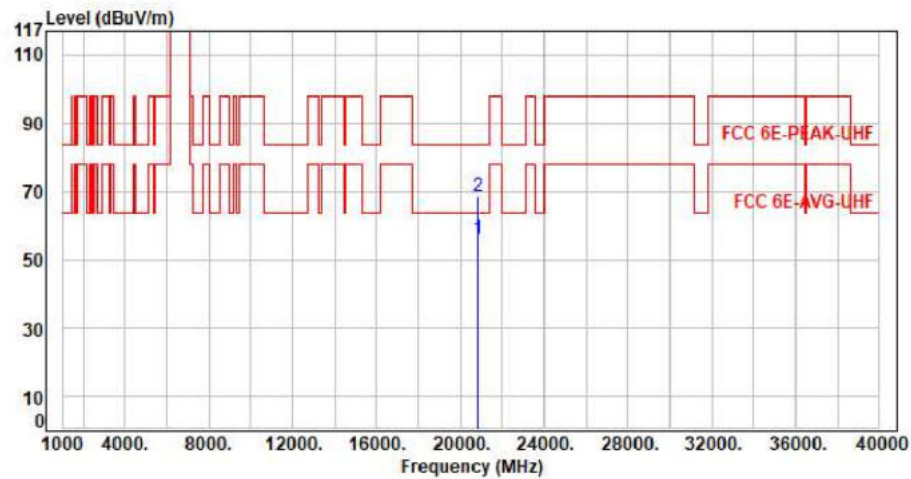


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	44.51	55.91	63.54	-7.63	Average	150	360	P
2	20835.00	11.40	57.05	68.45	83.54	-15.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

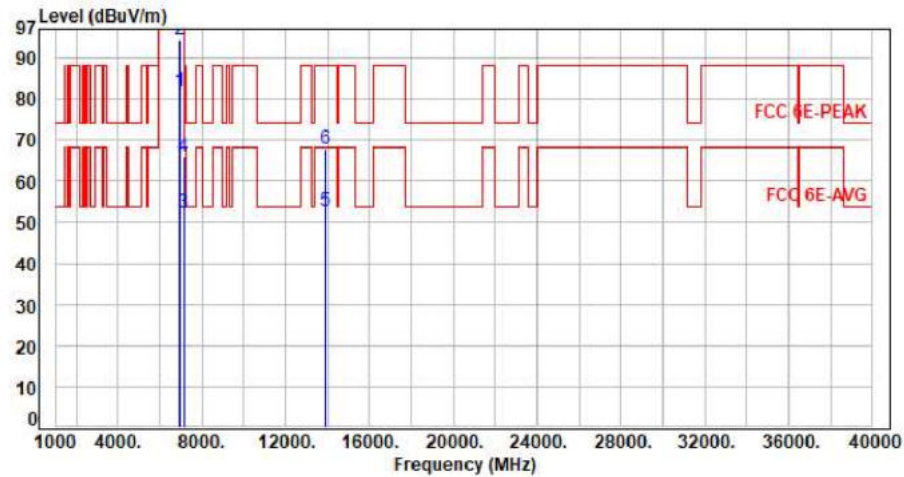


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	72.37	81.99	200.00	-118.01	Average	395	204	P
2	6945.00	9.62	84.69	94.31	200.00	-105.69	Peak	395	204	P
3	7125.00	10.05	42.15	52.20	68.20	-16.00	Average	395	204	P
4	7125.00	10.05	55.82	65.87	88.20	-22.33	Peak	395	204	P
5	13890.00	22.95	29.67	52.62	68.20	-15.58	Average	100	124	P
6	13890.00	22.95	44.93	67.88	88.20	-20.32	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

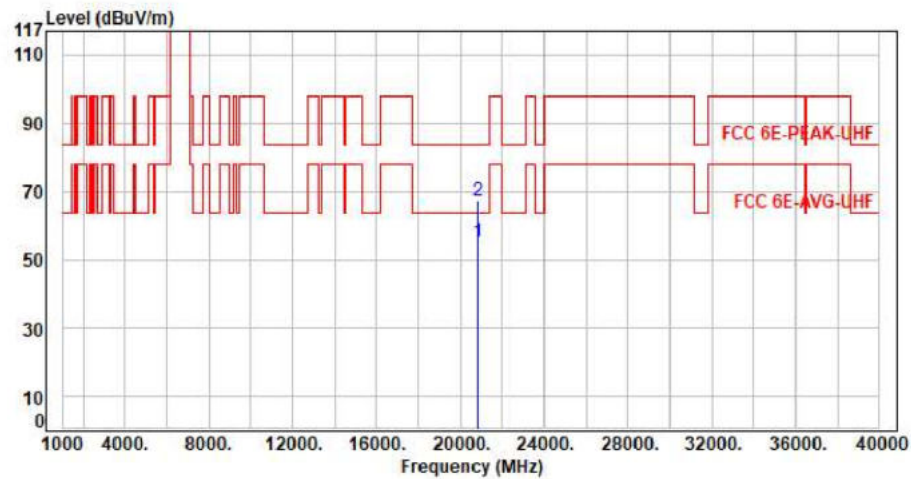


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	43.78	55.18	63.54	-8.36	Average	150	360	P
2	20835.00	11.40	55.74	67.14	83.54	-16.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

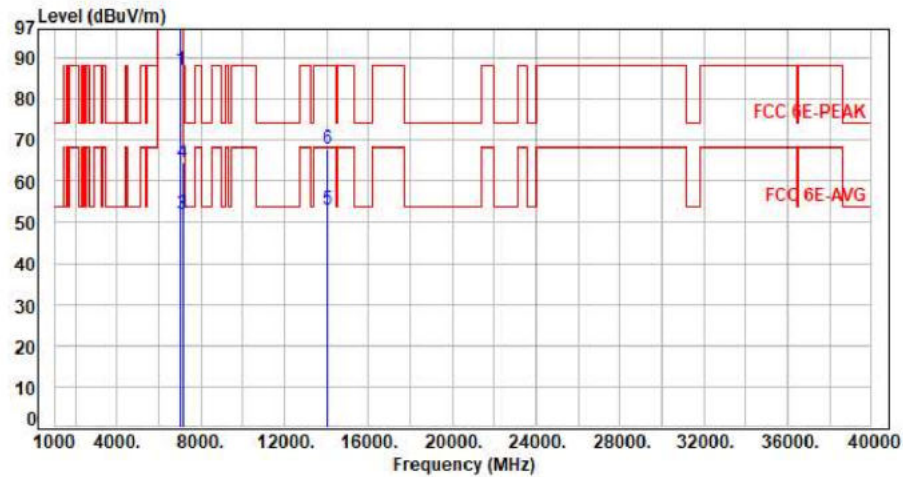


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	77.38	87.09	200.00	-112.91	Average	265	311	P
2	7025.00	9.71	89.36	99.07	200.00	-100.93	Peak	265	311	P
3	7125.00	10.05	41.99	52.04	68.20	-16.16	Average	265	311	P
4	7125.00	10.05	54.52	64.57	88.20	-23.63	Peak	265	311	P
5	14050.00	23.47	29.72	53.19	68.20	-15.01	Average	100	321	P
6	14050.00	23.47	44.47	67.94	88.20	-20.26	Peak	100	321	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

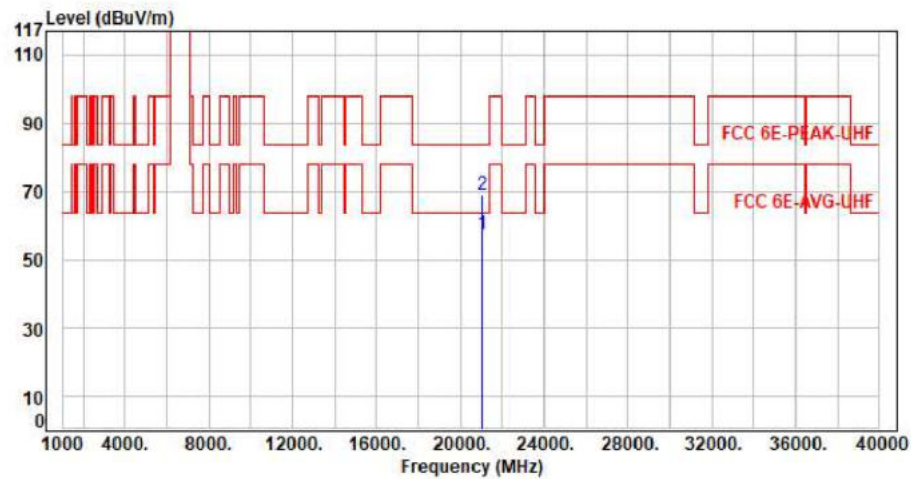


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.96	57.48	63.54	-6.06	Average	150	360	P
2	21075.00	11.52	57.41	68.93	83.54	-14.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

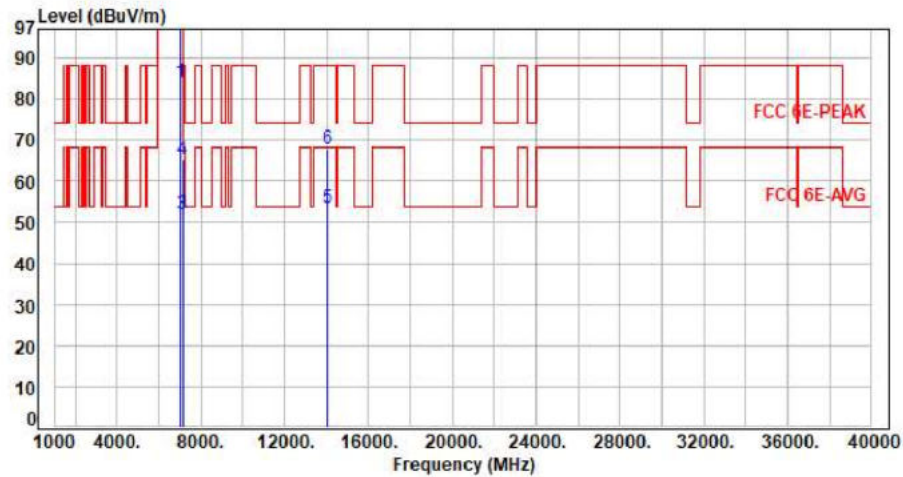


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	74.26	83.97	200.00	-116.03	Average	400	210	P
2	7025.00	9.71	87.13	96.84	200.00	-103.16	Peak	400	210	P
3	7125.00	10.05	42.02	52.07	68.20	-16.13	Average	400	210	P
4	7125.00	10.05	55.37	65.42	88.20	-22.78	Peak	400	210	P
5	14050.00	23.47	30.01	53.48	68.20	-14.72	Average	100	114	P
6	14050.00	23.47	44.31	67.78	88.20	-20.42	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

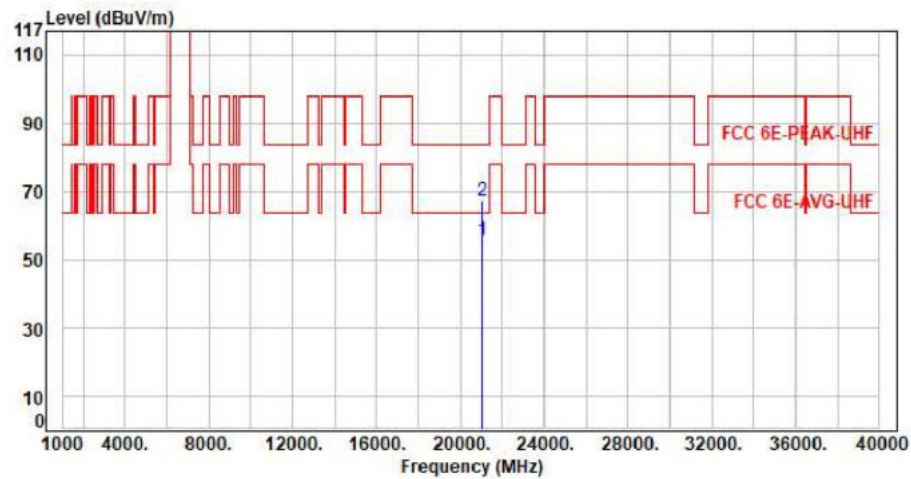


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	43.99	55.51	63.54	-8.03	Average	150	360	P
2	21075.00	11.52	55.48	67.00	83.54	-16.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

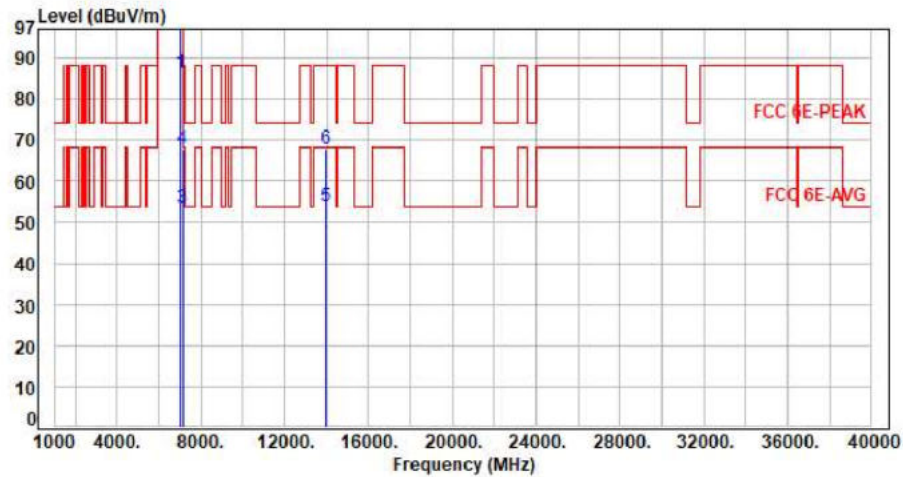


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	76.81	86.44	200.00	-113.56	Average	264	311	P
2	6985.00	9.63	88.76	98.39	200.00	-101.61	Peak	264	311	P
3	7125.00	10.05	43.37	53.42	68.20	-14.78	Average	264	311	P
4	7125.00	10.05	57.72	67.77	88.20	-20.43	Peak	264	311	P
5	13970.00	23.15	30.55	53.70	68.20	-14.50	Average	100	146	P
6	13970.00	23.15	44.83	67.98	88.20	-20.22	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

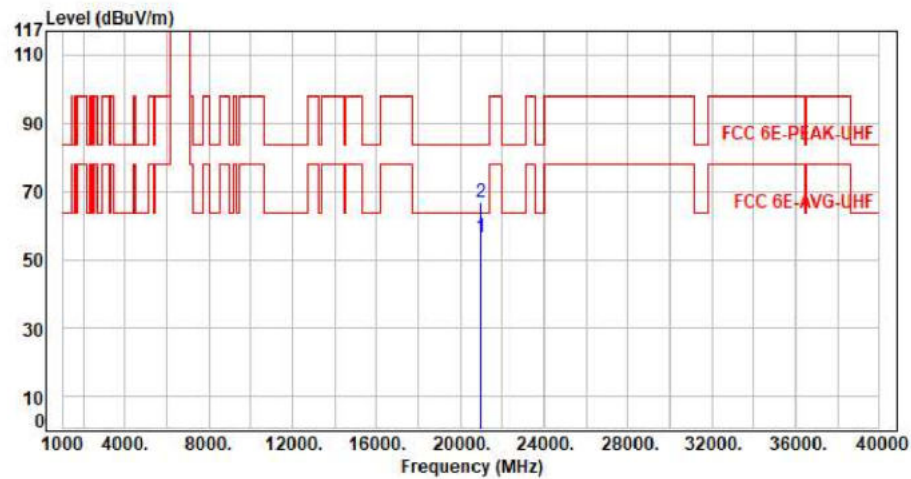


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.21	56.69	63.54	-6.85	Average	150	360	P
2	20955.00	11.48	55.43	66.91	83.54	-16.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

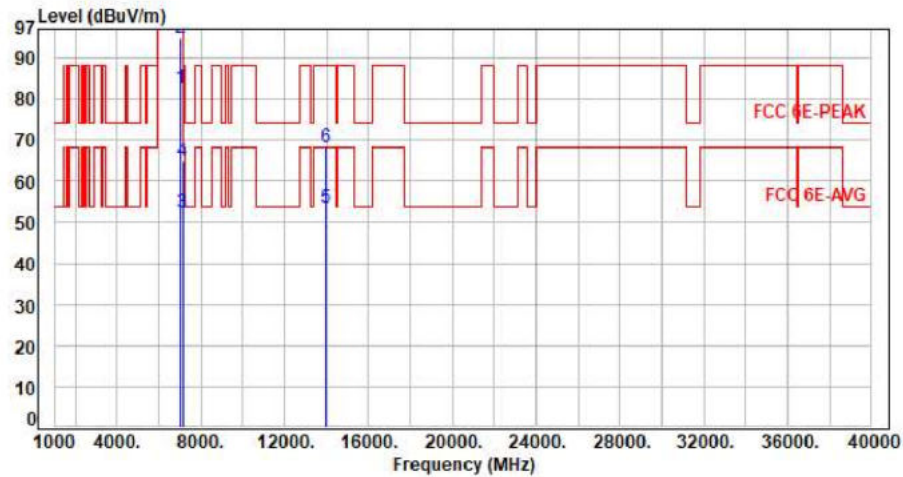

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	72.82	82.45	200.00	-117.55	Average	385	208	P
2	6985.00	9.63	85.03	94.66	200.00	-105.34	Peak	385	208	P
3	7125.00	10.05	42.38	52.43	68.20	-15.77	Average	385	208	P
4	7125.00	10.05	54.94	64.99	88.20	-23.21	Peak	385	208	P
5	13970.00	23.15	30.22	53.37	68.20	-14.83	Average	100	118	P
6	13970.00	23.15	44.94	68.09	88.20	-20.11	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor