




For CRIUS CO310-G1 -Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

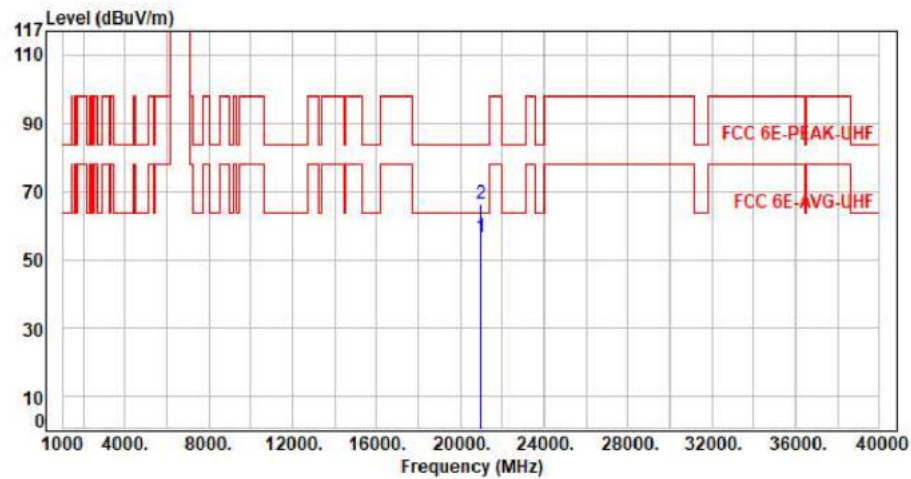


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.87	56.35	63.54	-7.19	Average	150	360	P
2	20955.00	11.48	54.95	66.43	83.54	-17.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

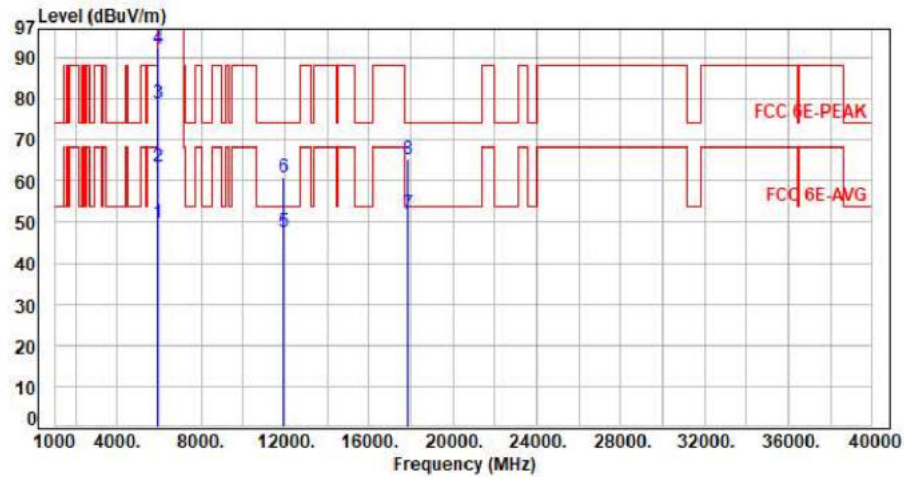


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.07	49.73	68.20	-18.47	Average	314	310	P
2	5925.00	7.66	55.75	63.41	88.20	-24.79	Peak	314	310	P
3	5955.00	7.68	71.33	79.01	200.00	-120.99	Average	314	310	P
4	5955.00	7.68	84.58	92.26	200.00	-107.74	Peak	314	310	P
5	11910.00	18.06	29.54	47.60	54.00	-6.40	Average	100	153	P
6	11910.00	18.06	42.82	60.88	74.00	-13.12	Peak	100	153	P
7	17865.00	27.77	24.22	51.99	54.00	-2.01	Average	100	208	P
8	17865.00	27.77	37.43	65.20	74.00	-8.80	Peak	100	208	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

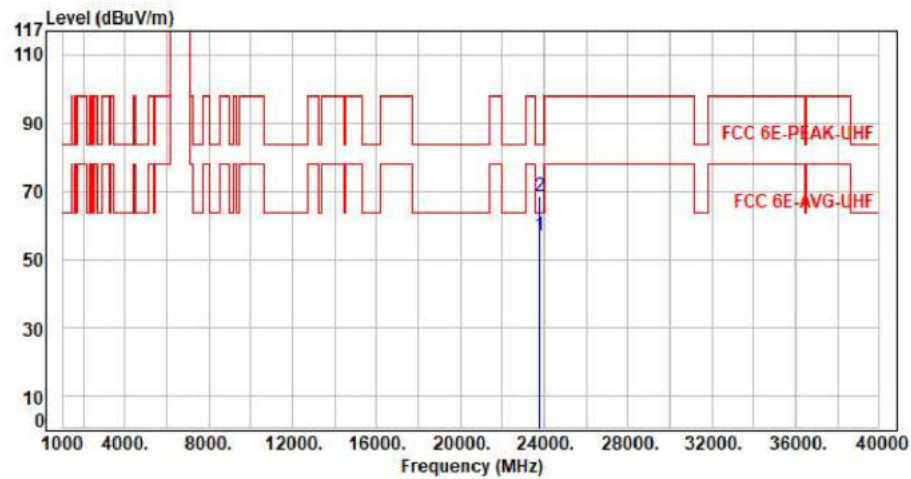

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	45.73	56.92	63.54	-6.62	Average	150	360	P
2	23820.00	11.19	57.25	68.44	83.54	-15.10	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

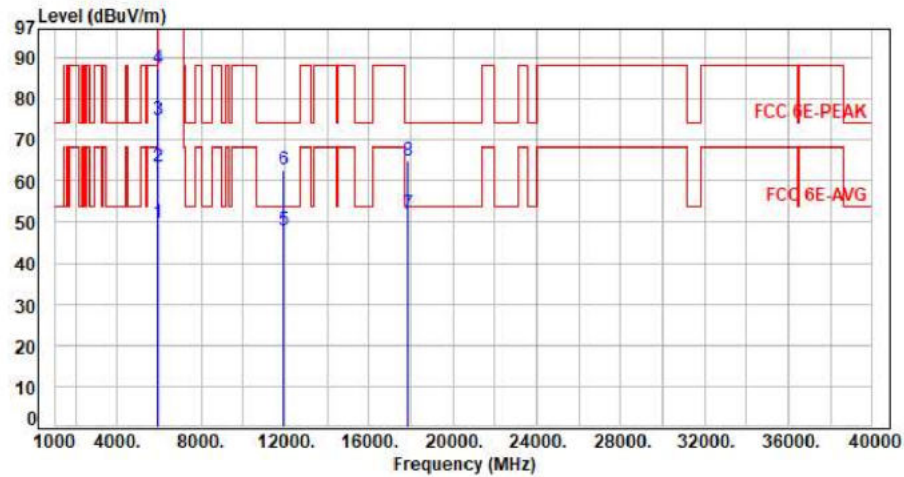

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	115	274	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	115	274	P
3	5955.00	7.68	67.10	74.78	200.00	-125.22	Average	115	274	P
4	5955.00	7.68	79.71	87.39	200.00	-112.61	Peak	115	274	P
5	11910.00	18.06	29.83	47.89	54.00	-6.11	Average	100	118	P
6	11910.00	18.06	44.53	62.59	74.00	-11.41	Peak	100	118	P
7	17865.00	27.77	24.17	51.94	54.00	-2.06	Average	100	307	P
8	17865.00	27.77	37.08	64.85	74.00	-9.15	Peak	100	307	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

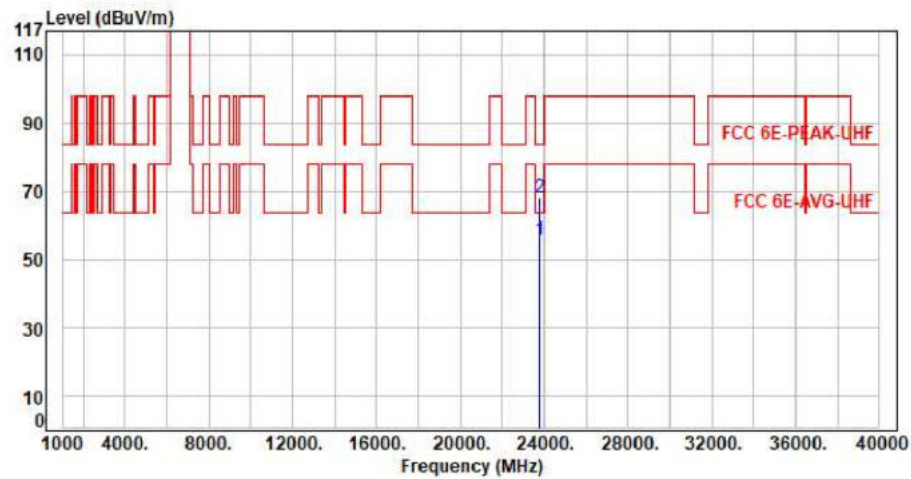


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.32	55.51	63.54	-8.03	Average	150	360	P
2	23820.00	11.19	56.66	67.85	83.54	-15.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

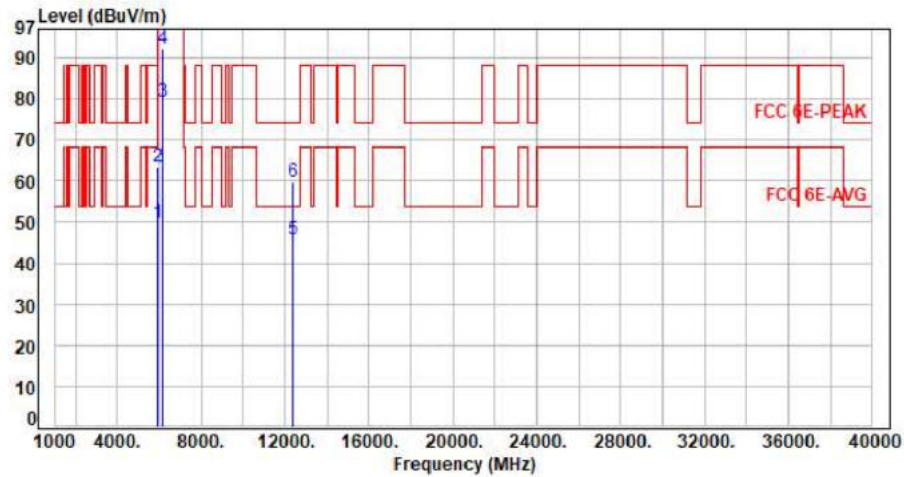


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.31	49.97	68.20	-18.23	Average	315	309	P
2	5925.00	7.66	55.74	63.40	88.20	-24.80	Peak	315	309	P
3	6175.00	8.35	70.82	79.17	200.00	-120.83	Average	315	309	P
4	6175.00	8.35	83.85	92.20	200.00	-107.80	Peak	315	309	P
5	12350.00	17.76	28.09	45.85	54.00	-8.15	Average	100	151	P
6	12350.00	17.76	41.81	59.57	74.00	-14.43	Peak	100	151	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

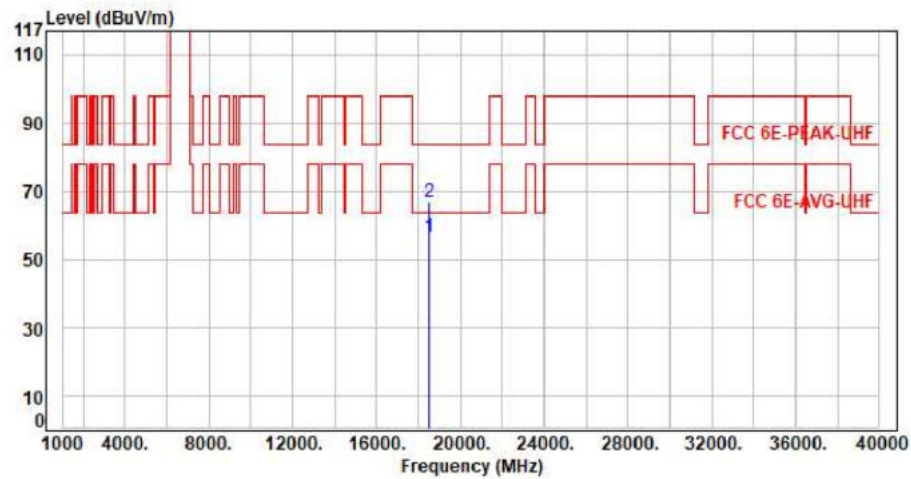

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	45.85	56.40	63.54	-7.14	Average	150	360	P
2	18525.00	10.55	56.33	66.88	83.54	-16.66	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

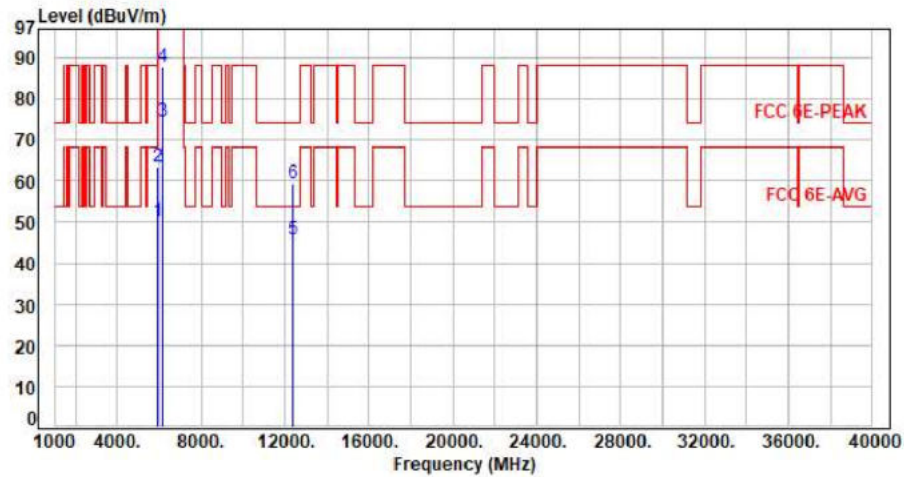


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.39	50.05	68.20	-18.15	Average	375	277	P
2	5925.00	7.66	55.84	63.50	88.20	-24.70	Peak	375	277	P
3	6175.00	8.35	66.28	74.63	200.00	-125.37	Average	375	277	P
4	6175.00	8.35	79.52	87.87	200.00	-112.13	Peak	375	277	P
5	12350.00	17.76	27.97	45.73	54.00	-8.27	Average	100	119	P
6	12350.00	17.76	41.47	59.23	74.00	-14.77	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

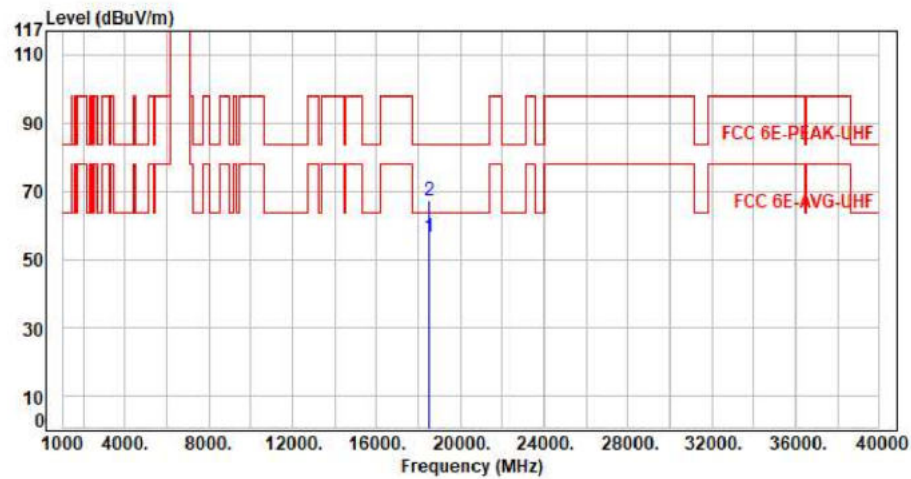


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	46.11	56.66	63.54	-6.88	Average	150	360	P
2	18525.00	10.55	56.42	66.97	83.54	-16.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

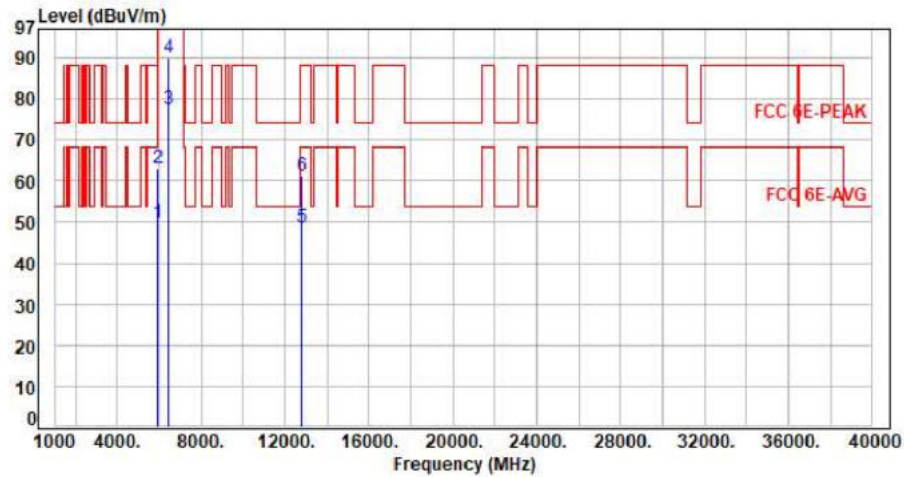


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.20	49.86	68.20	-18.34	Average	100	297	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	100	297	P
3	6415.00	8.34	68.94	77.28	200.00	-122.72	Average	100	297	P
4	6415.00	8.34	81.61	89.95	200.00	-110.05	Peak	100	297	P
5	12830.00	18.92	29.64	48.56	68.20	-19.64	Average	100	155	P
6	12830.00	18.92	42.18	61.10	88.20	-27.10	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

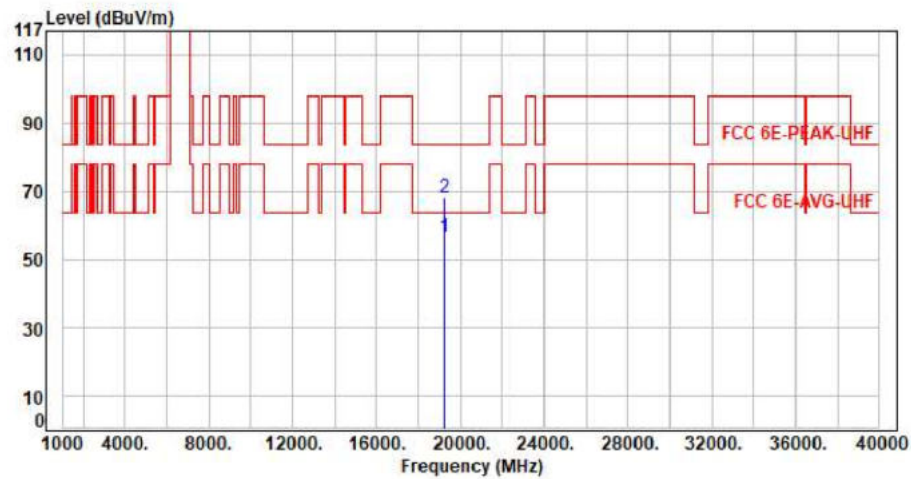


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.17	56.54	63.54	-7.00	Average	150	360	P
2	19245.00	11.37	56.54	67.91	83.54	-15.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

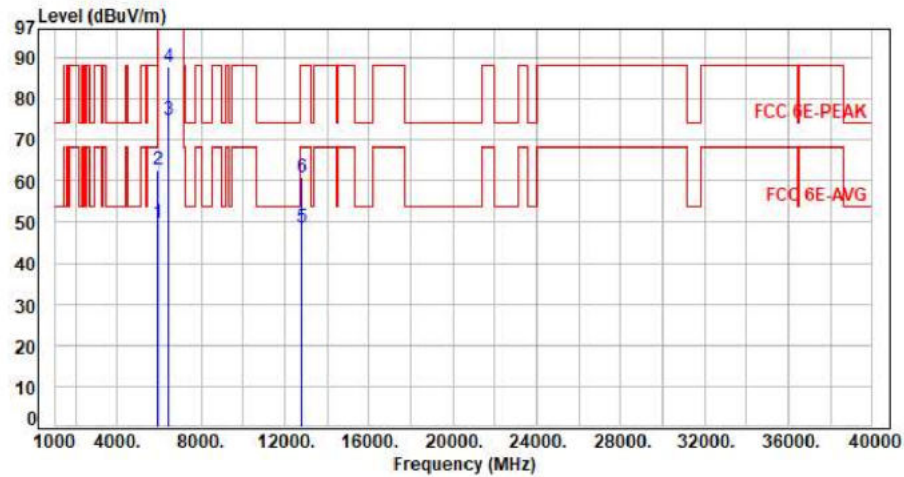


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	394	277	P
2	5925.00	7.66	55.18	62.84	88.20	-25.36	Peak	394	277	P
3	6415.00	8.34	66.56	74.90	200.00	-125.10	Average	394	277	P
4	6415.00	8.34	79.49	87.83	200.00	-112.17	Peak	394	277	P
5	12830.00	18.92	29.64	48.56	68.20	-19.64	Average	100	131	P
6	12830.00	18.92	41.75	60.67	88.20	-27.53	Peak	100	131	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

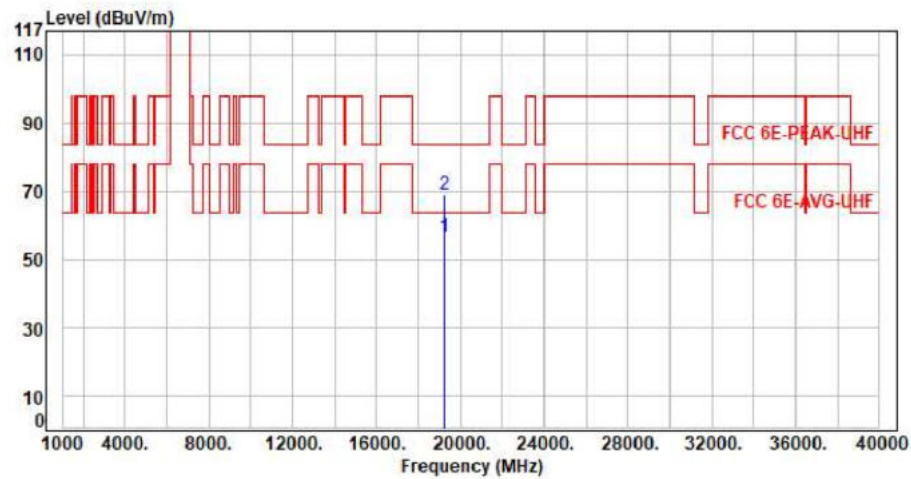


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.32	56.69	63.54	-6.85	Average	150	360	P
2	19245.00	11.37	57.77	69.14	83.54	-14.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

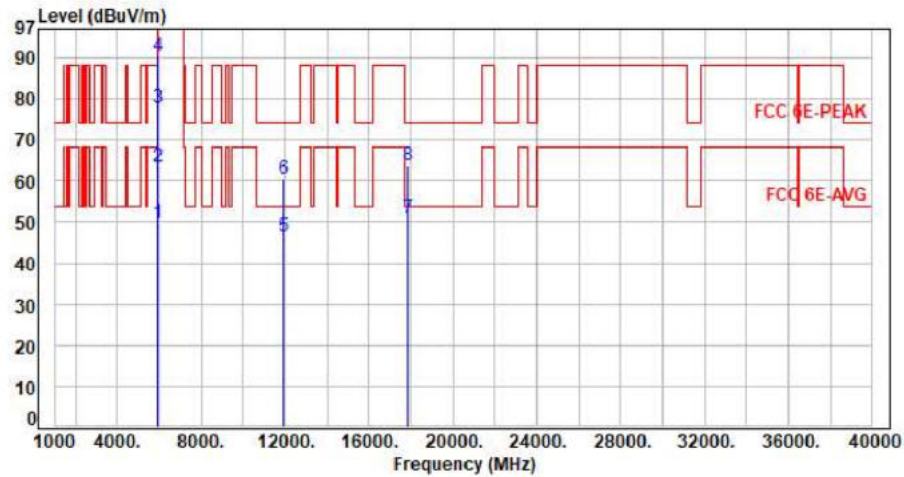

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.28	49.94	68.20	-18.26	Average	100	69	P
2	5925.00	7.66	55.69	63.35	88.20	-24.85	Peak	100	69	P
3	5965.00	7.71	70.13	77.84	200.00	-122.16	Average	100	69	P
4	5965.00	7.71	82.76	90.47	200.00	-109.53	Peak	100	69	P
5	11930.00	18.05	28.24	46.29	54.00	-7.71	Average	100	151	P
6	11930.00	18.05	42.33	60.38	74.00	-13.62	Peak	100	151	P
7	17895.00	27.89	22.88	50.77	54.00	-3.23	Average	100	210	P
8	17895.00	27.89	35.89	63.78	74.00	-10.22	Peak	100	210	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

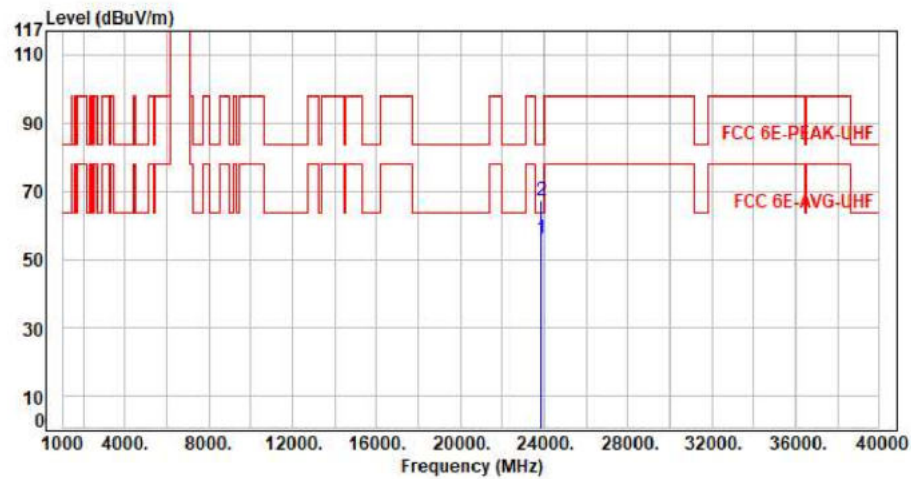

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.82	56.02	63.54	-7.52	Average	150	360	P
2	23860.00	11.20	55.96	67.16	83.54	-16.38	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

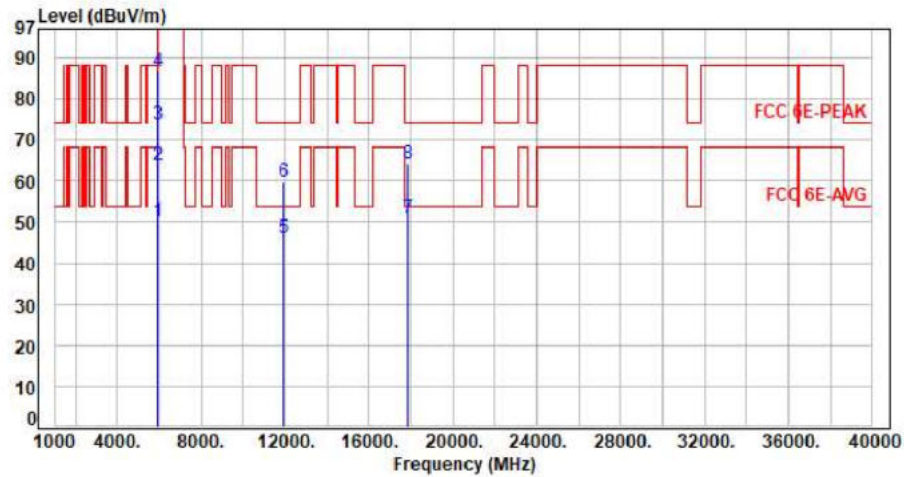


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.58	50.24	68.20	-17.96	Average	158	283	P
2	5925.00	7.66	56.07	63.73	88.20	-24.47	Peak	158	283	P
3	5965.00	7.71	66.18	73.89	200.00	-126.11	Average	158	283	P
4	5965.00	7.71	78.96	86.67	200.00	-113.33	Peak	158	283	P
5	11930.00	18.05	27.95	46.00	54.00	-8.00	Average	100	123	P
6	11930.00	18.05	41.77	59.82	74.00	-14.18	Peak	100	123	P
7	17895.00	27.89	22.90	50.79	54.00	-3.21	Average	100	310	P
8	17895.00	27.89	36.46	64.35	74.00	-9.65	Peak	100	310	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

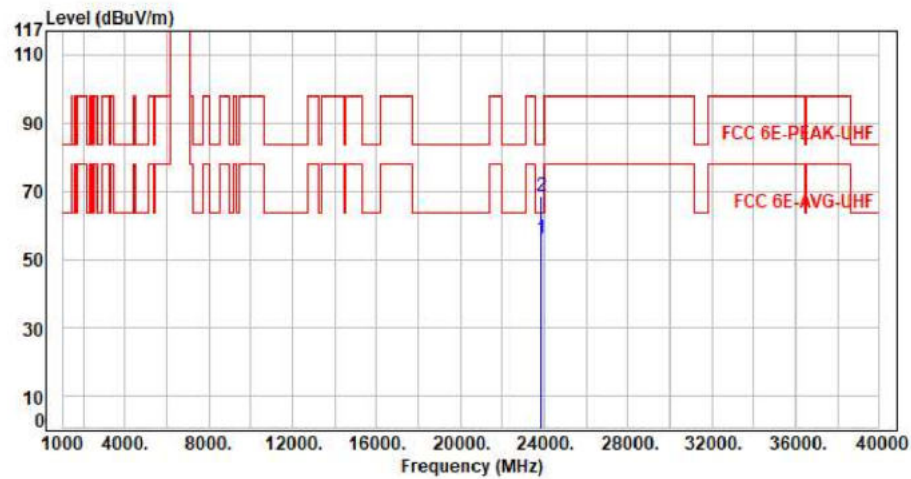


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.67	55.87	63.54	-7.67	Average	150	360	P
2	23860.00	11.20	57.44	68.64	83.54	-14.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

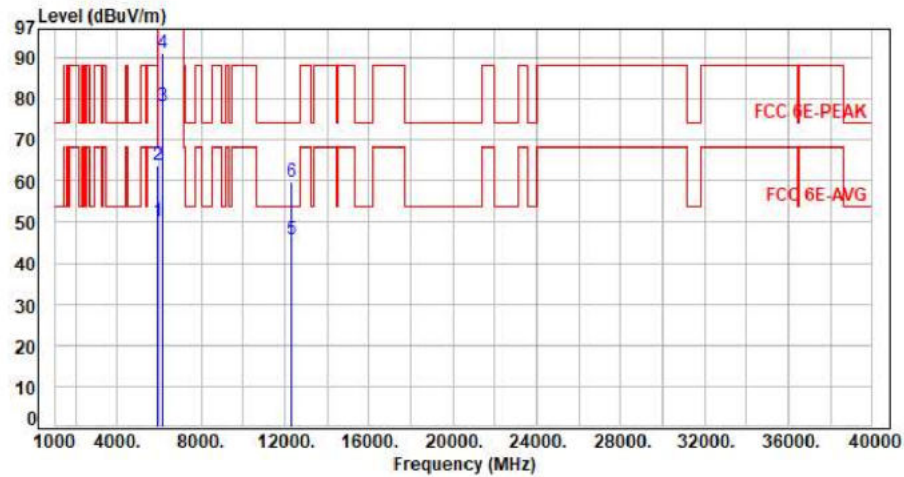


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.54	50.20	68.20	-18.00	Average	294	315	P
2	5925.00	7.66	56.10	63.76	88.20	-24.44	Peak	294	315	P
3	6165.00	8.34	69.85	78.19	200.00	-121.81	Average	294	315	P
4	6165.00	8.34	82.83	91.17	200.00	-108.83	Peak	294	315	P
5	12330.00	17.71	27.93	45.64	54.00	-8.36	Average	100	157	P
6	12330.00	17.71	41.87	59.58	74.00	-14.42	Peak	100	157	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

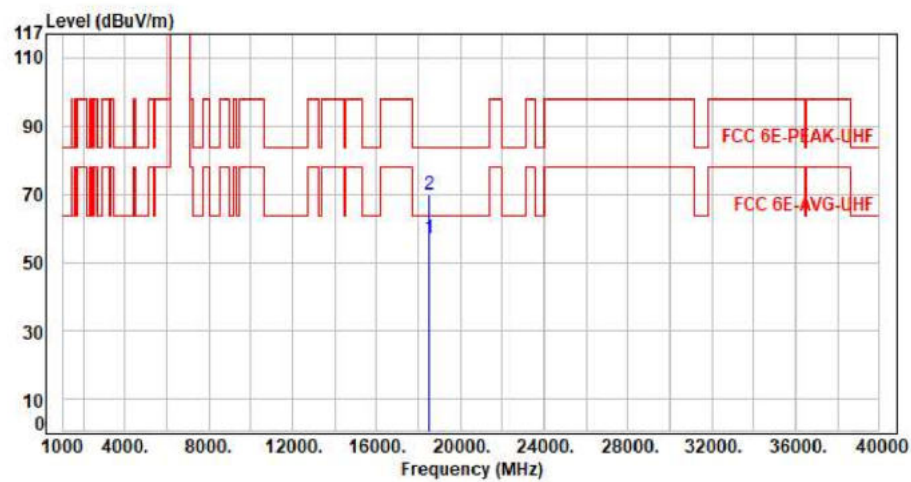

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.71	57.12	63.54	-6.42	Average	150	360	P
2	18495.00	10.41	59.44	69.85	83.54	-13.69	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

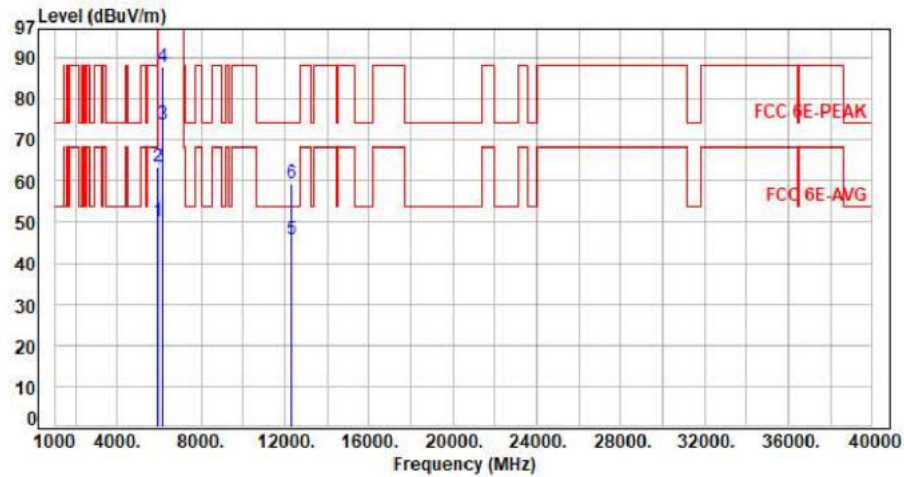


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.37	50.03	68.20	-18.17	Average	382	275	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	382	275	P
3	6165.00	8.34	65.38	73.72	200.00	-126.28	Average	382	275	P
4	6165.00	8.34	79.26	87.60	200.00	-112.40	Peak	382	275	P
5	12330.00	17.71	28.12	45.83	54.00	-8.17	Average	100	121	P
6	12330.00	17.71	41.57	59.28	74.00	-14.72	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

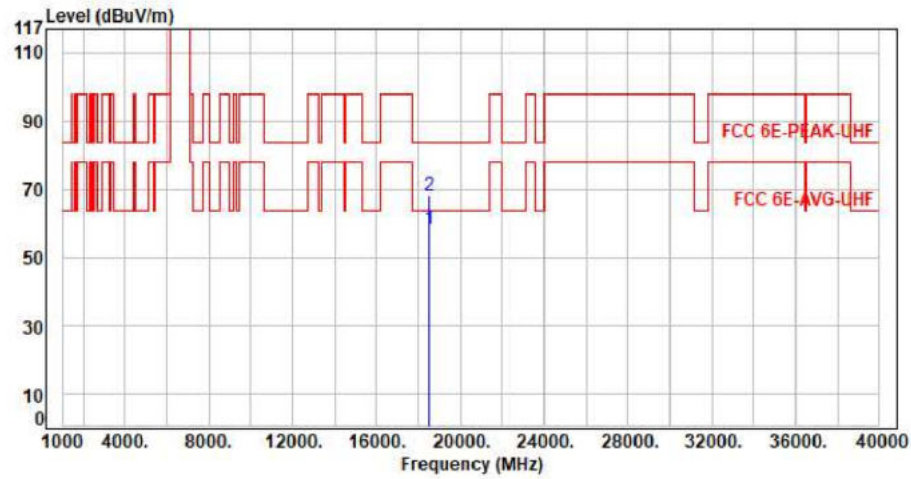


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	47.71	58.12	63.54	-5.42	Average	150	360	P
2	18495.00	10.41	57.44	67.85	83.54	-15.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

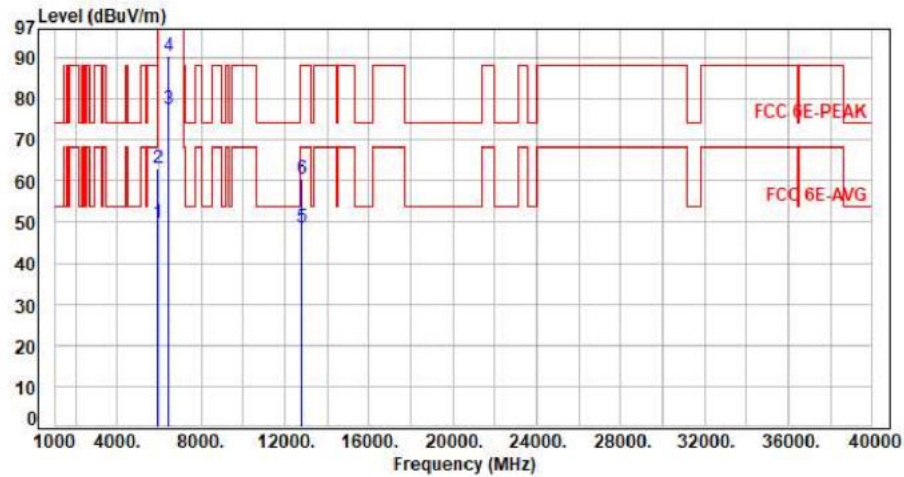


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	100	297	P
2	5925.00	7.66	55.27	62.93	88.20	-25.27	Peak	100	297	P
3	6405.00	8.35	69.17	77.52	200.00	-122.48	Average	100	297	P
4	6405.00	8.35	82.18	90.53	200.00	-109.47	Peak	100	297	P
5	12810.00	18.88	29.84	48.72	68.20	-19.48	Average	100	117	P
6	12810.00	18.88	41.62	60.50	88.20	-27.70	Peak	100	117	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

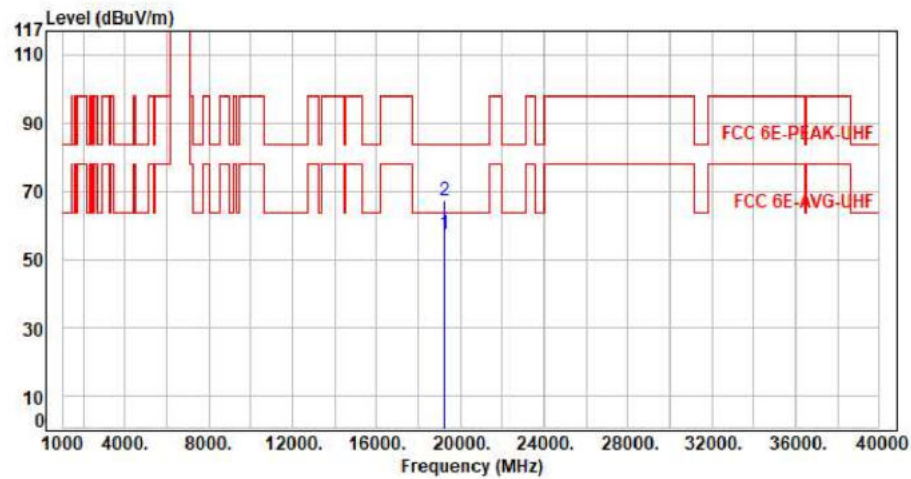


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	45.99	57.23	63.54	-6.31	Average	150	360	P
2	19215.00	11.24	55.73	66.97	83.54	-16.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

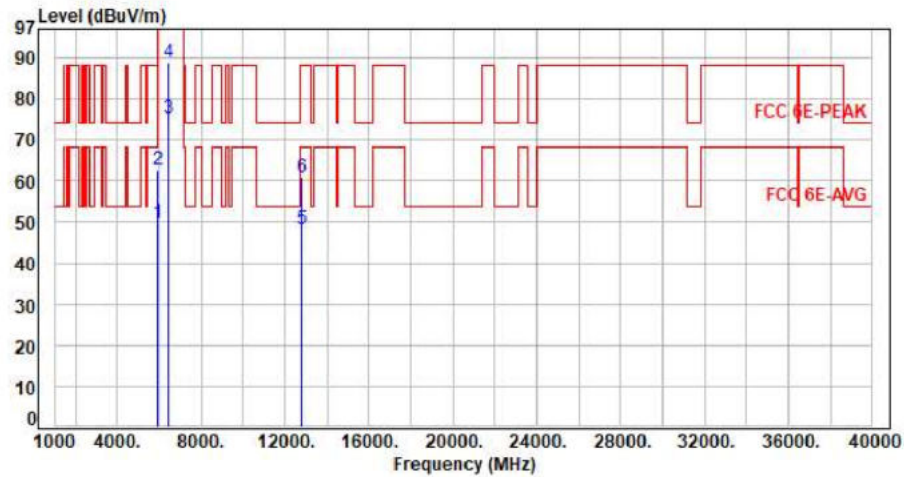


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	398	277	P
2	5925.00	7.66	54.86	62.52	88.20	-25.68	Peak	398	277	P
3	6405.00	8.35	66.97	75.32	200.00	-124.68	Average	398	277	P
4	6405.00	8.35	80.37	88.72	200.00	-111.28	Peak	398	277	P
5	12810.00	18.88	29.54	48.42	68.20	-19.78	Average	100	138	P
6	12810.00	18.88	42.05	60.93	88.20	-27.27	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

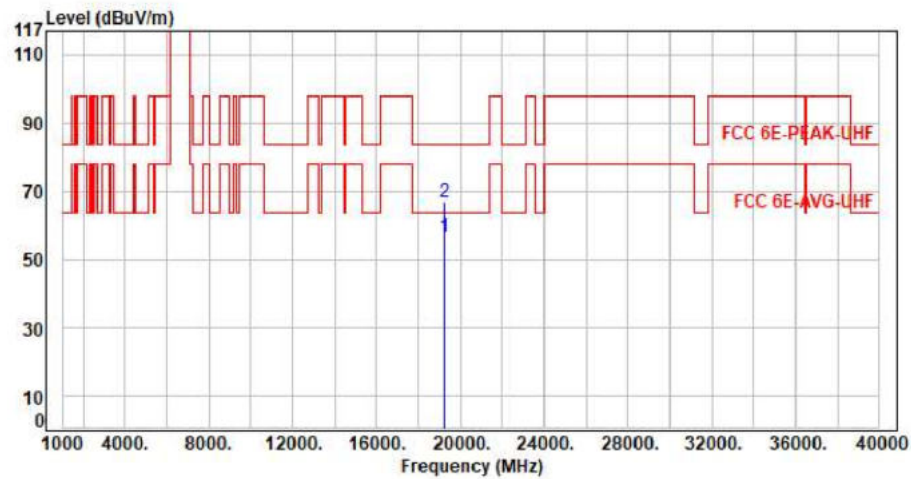


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	45.25	56.49	63.54	-7.05	Average	150	360	P
2	19215.00	11.24	55.45	66.69	83.54	-16.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

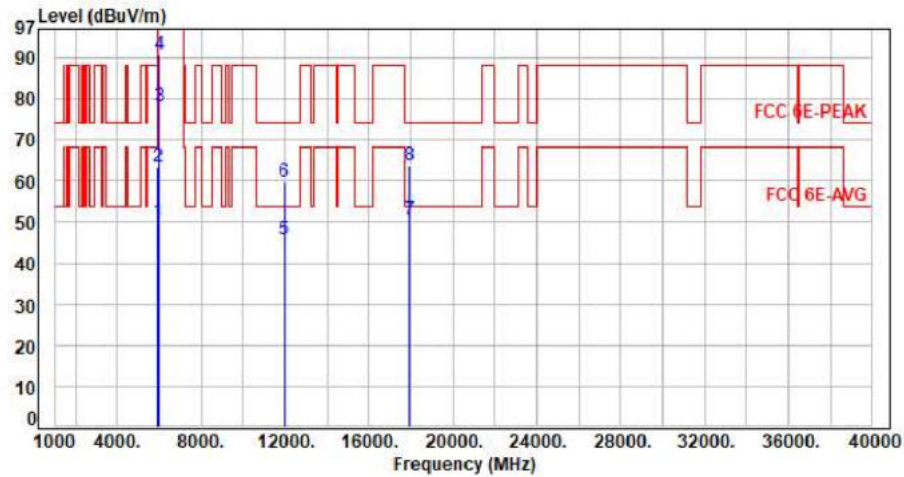


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.48	50.14	68.20	-18.06	Average	310	316	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	310	316	P
3	5985.00	7.75	70.28	78.03	200.00	-121.97	Average	310	316	P
4	5985.00	7.75	83.16	90.91	200.00	-109.09	Peak	310	316	P
5	11970.00	18.02	27.79	45.81	54.00	-8.19	Average	100	158	P
6	11970.00	18.02	41.55	59.57	74.00	-14.43	Peak	100	158	P
7	17955.00	28.04	22.59	50.63	54.00	-3.37	Average	100	211	P
8	17955.00	28.04	35.87	63.91	74.00	-10.09	Peak	100	211	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

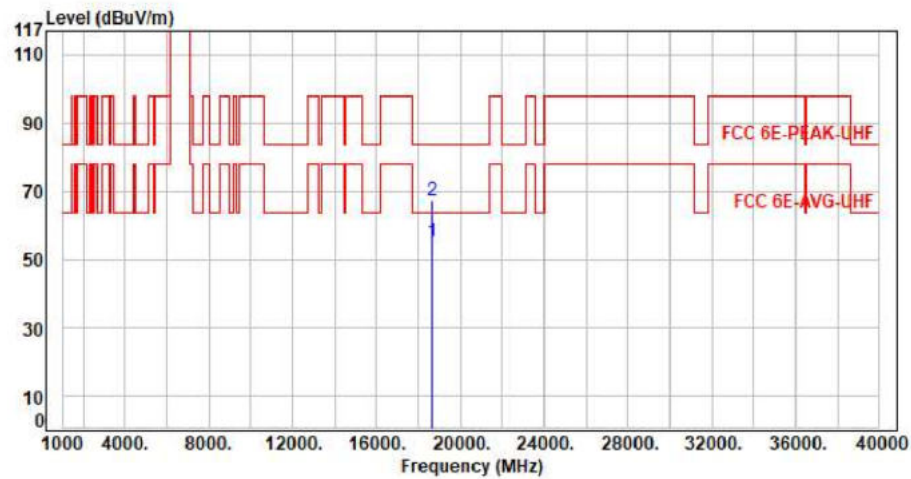


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18675.00	10.64	44.71	55.35	63.54	-8.19	Average	150	360	P
2	18675.00	10.64	56.47	67.11	83.54	-16.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

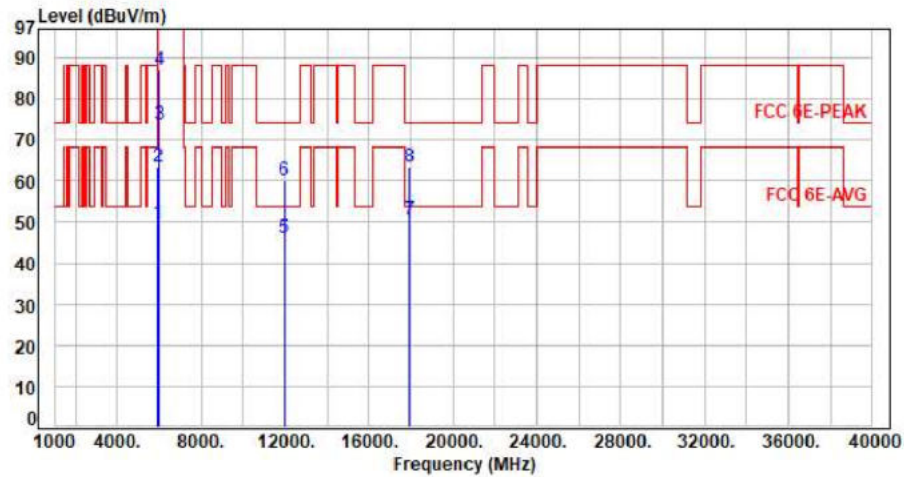

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.19	49.85	68.20	-18.35	Average	118	275	P
2	5925.00	7.66	55.64	63.30	88.20	-24.90	Peak	118	275	P
3	5985.00	7.75	66.15	73.90	200.00	-126.10	Average	118	275	P
4	5985.00	7.75	79.24	86.99	200.00	-113.01	Peak	118	275	P
5	11970.00	18.02	28.11	46.13	54.00	-7.87	Average	100	129	P
6	11970.00	18.02	41.96	59.98	74.00	-14.02	Peak	100	129	P
7	17955.00	28.04	22.32	50.36	54.00	-3.64	Average	100	310	P
8	17955.00	28.04	35.43	63.47	74.00	-10.53	Peak	100	310	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

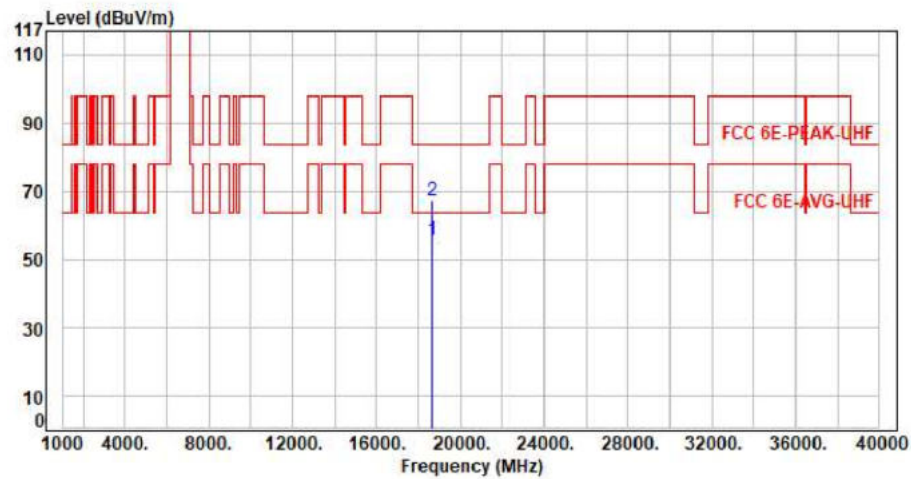


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18675.00	10.64	45.06	55.70	63.54	-7.84	Average	150	360	P
2	18675.00	10.64	56.46	67.10	83.54	-16.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

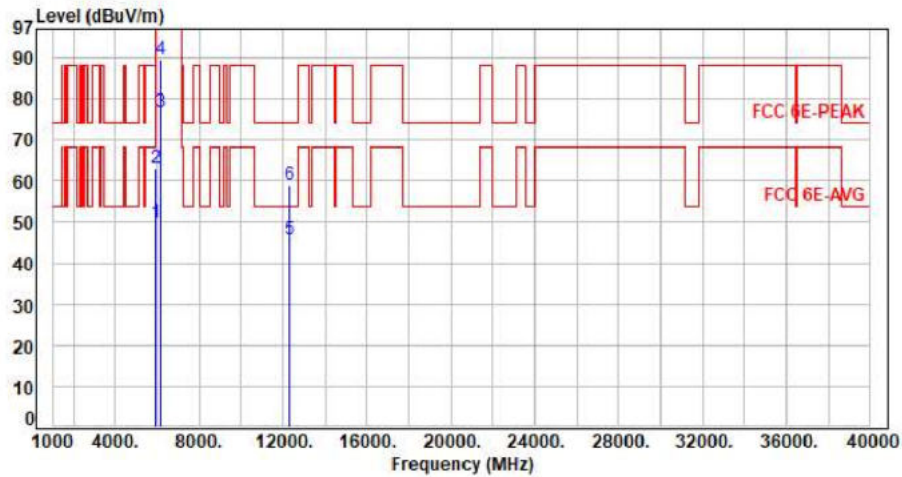


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	315	312	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	315	312	P
3	6145.00	8.31	68.28	76.59	200.00	-123.41	Average	315	312	P
4	6145.00	8.31	81.16	89.47	200.00	-110.53	Peak	315	312	P
5	12290.00	17.62	28.02	45.64	54.00	-8.36	Average	100	154	P
6	12290.00	17.62	41.35	58.97	74.00	-15.03	Peak	100	154	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

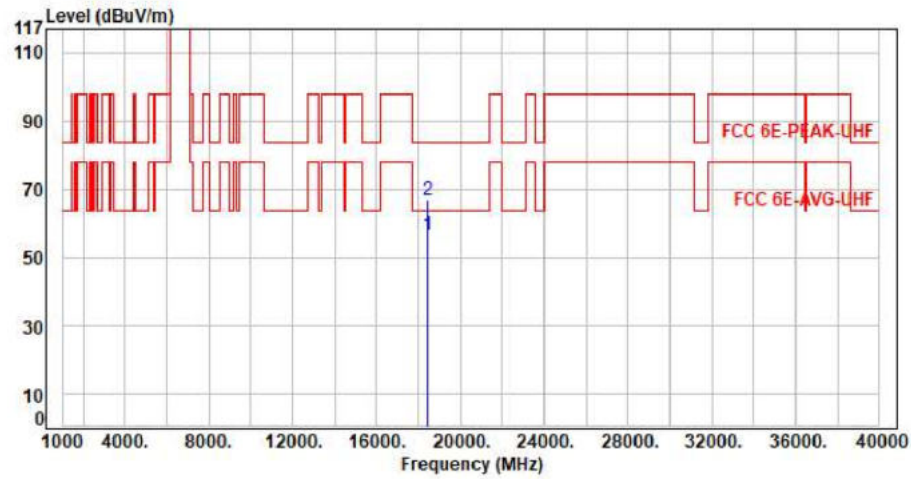


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	46.18	56.38	63.54	-7.16	Average	150	360	P
2	18435.00	10.20	56.31	66.51	83.54	-17.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

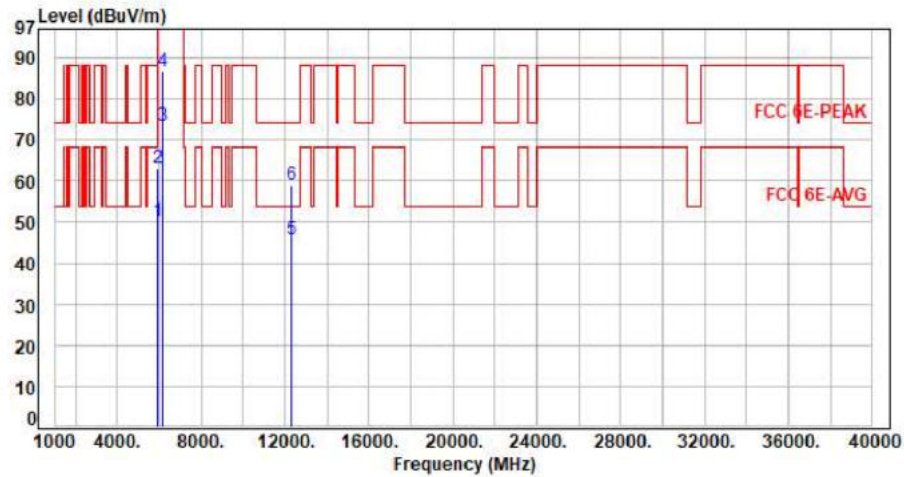


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.35	50.01	68.20	-18.19	Average	123	281	P
2	5925.00	7.66	55.46	63.12	88.20	-25.08	Peak	123	281	P
3	6145.00	8.31	64.97	73.28	200.00	-126.72	Average	123	281	P
4	6145.00	8.31	78.29	86.60	200.00	-113.40	Peak	123	281	P
5	12290.00	17.62	28.00	45.62	54.00	-8.38	Average	100	126	P
6	12290.00	17.62	41.45	59.07	74.00	-14.93	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

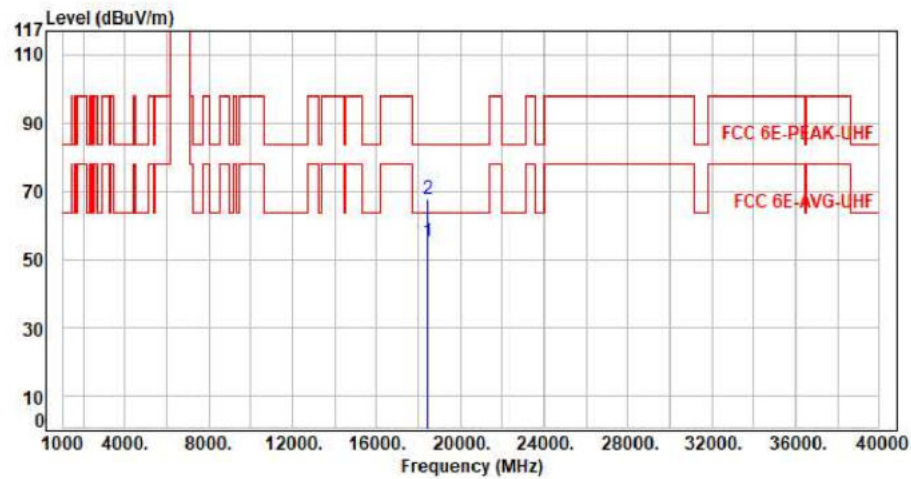


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	45.13	55.33	63.54	-8.21	Average	150	360	P
2	18435.00	10.20	57.60	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

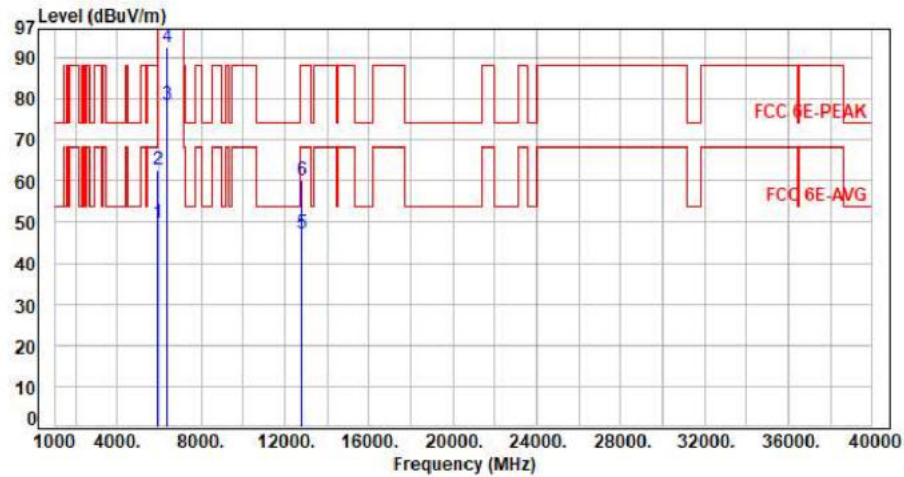


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.01	49.67	68.20	-18.53	Average	100	296	P
2	5925.00	7.66	54.91	62.57	88.20	-25.63	Peak	100	296	P
3	6385.00	8.34	70.07	78.41	200.00	-121.59	Average	100	296	P
4	6385.00	8.34	84.09	92.43	200.00	-107.57	Peak	100	296	P
5	12770.00	18.73	28.46	47.19	68.20	-21.01	Average	100	144	P
6	12770.00	18.73	41.46	60.19	88.20	-28.01	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

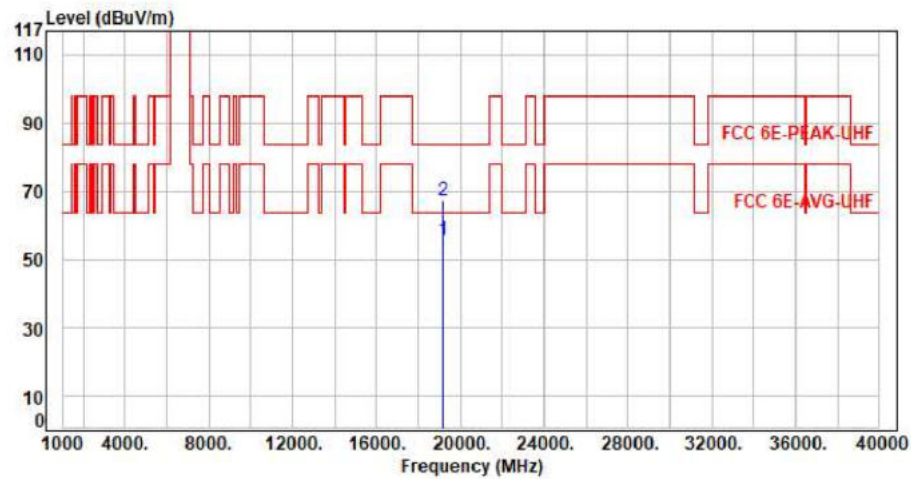


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	44.44	55.78	63.54	-7.76	Average	150	360	P
2	19155.00	11.34	55.67	67.01	83.54	-16.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

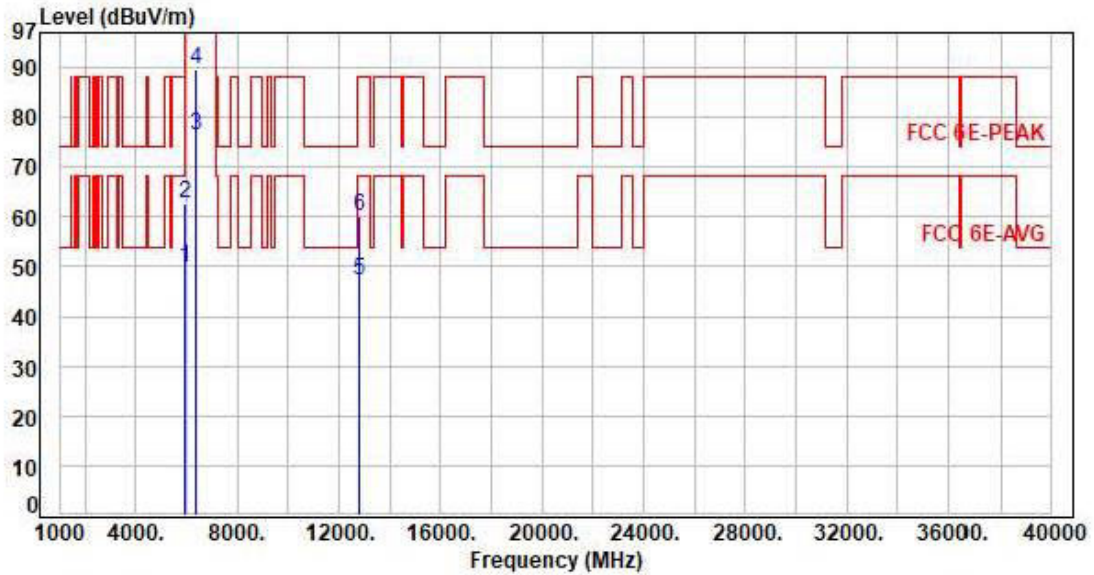

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	398	274	P
2	5925.00	7.66	55.11	62.77	88.20	-25.43	Peak	398	274	P
3	6385.00	8.34	68.13	76.47	200.00	-123.53	Average	398	274	P
4	6385.00	8.34	81.23	89.57	200.00	-110.43	Peak	398	274	P
5	12770.00	18.73	28.38	47.11	68.20	-21.09	Average	100	124	P
6	12770.00	18.73	41.46	60.19	88.20	-28.01	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

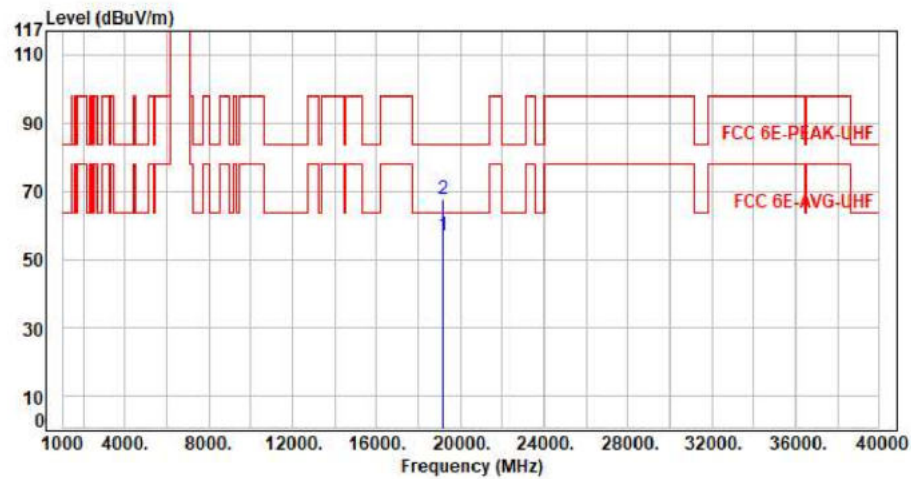


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	45.52	56.86	63.54	-6.68	Average	150	360	P
2	19155.00	11.34	56.35	67.69	83.54	-15.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

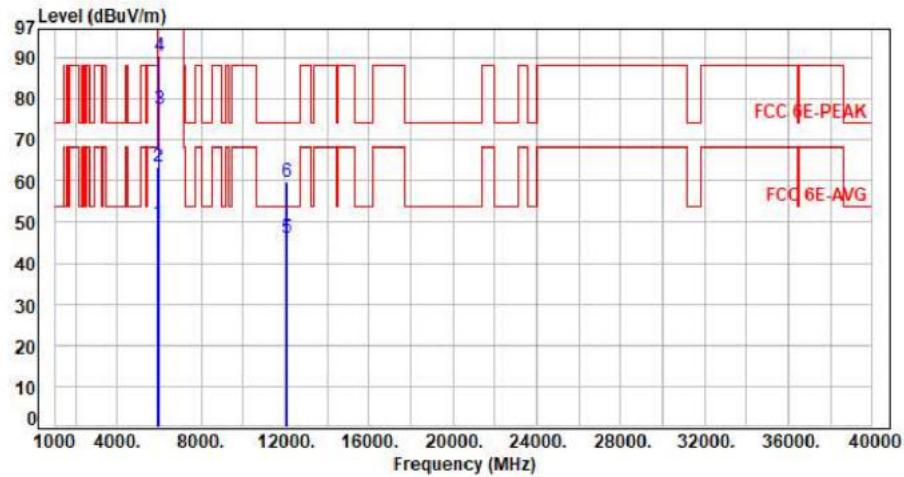


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.25	49.91	68.20	-18.29	Average	100	316	P
2	5925.00	7.66	55.83	63.49	88.20	-24.71	Peak	100	316	P
3	6025.00	7.91	69.49	77.40	200.00	-122.60	Average	100	316	P
4	6025.00	7.91	82.31	90.22	200.00	-109.78	Peak	100	316	P
5	12050.00	17.81	28.20	46.01	54.00	-7.99	Average	100	152	P
6	12050.00	17.81	41.77	59.58	74.00	-14.42	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

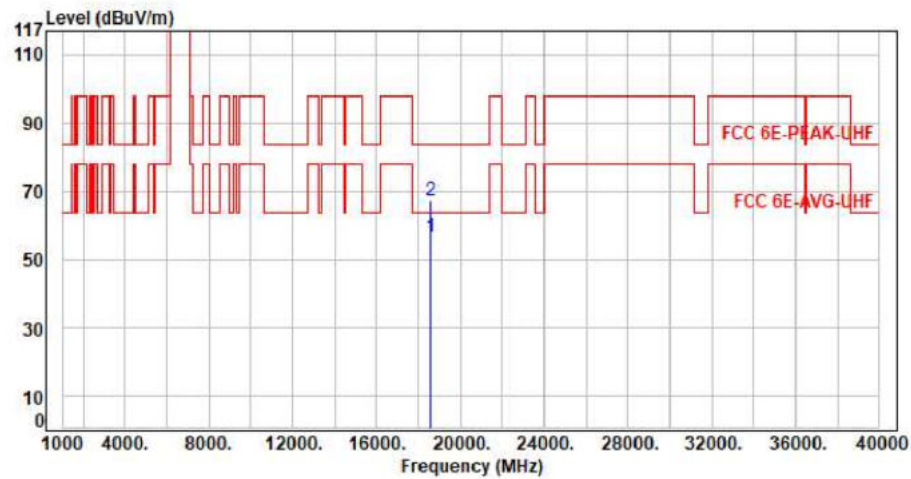


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.78	56.44	63.54	-7.10	Average	150	360	P
2	18555.00	10.66	56.52	67.18	83.54	-16.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

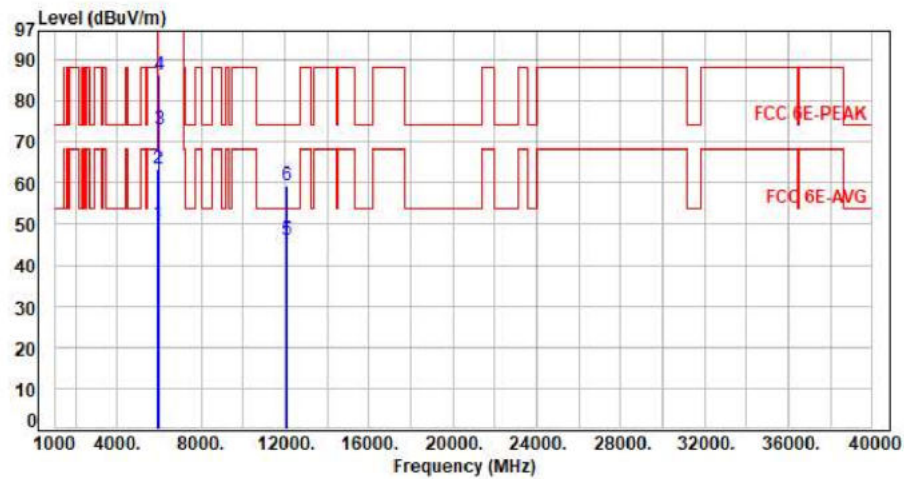


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	358	272	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	358	272	P
3	6025.00	7.91	65.18	73.09	200.00	-126.91	Average	358	272	P
4	6025.00	7.91	78.29	86.20	200.00	-113.80	Peak	358	272	P
5	12050.00	17.81	28.23	46.04	54.00	-7.96	Average	100	115	P
6	12050.00	17.81	41.44	59.25	74.00	-14.75	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

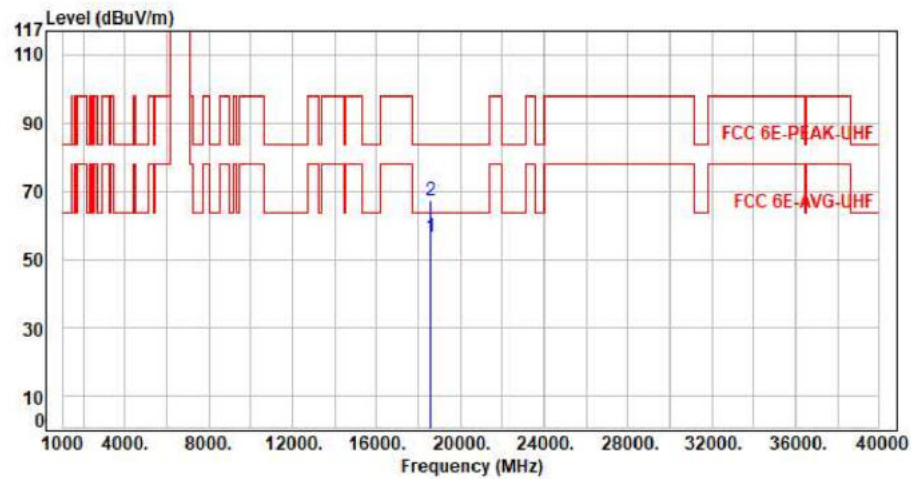

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.79	56.45	63.54	-7.09	Average	150	360	P
2	18555.00	10.66	56.72	67.38	83.54	-16.16	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

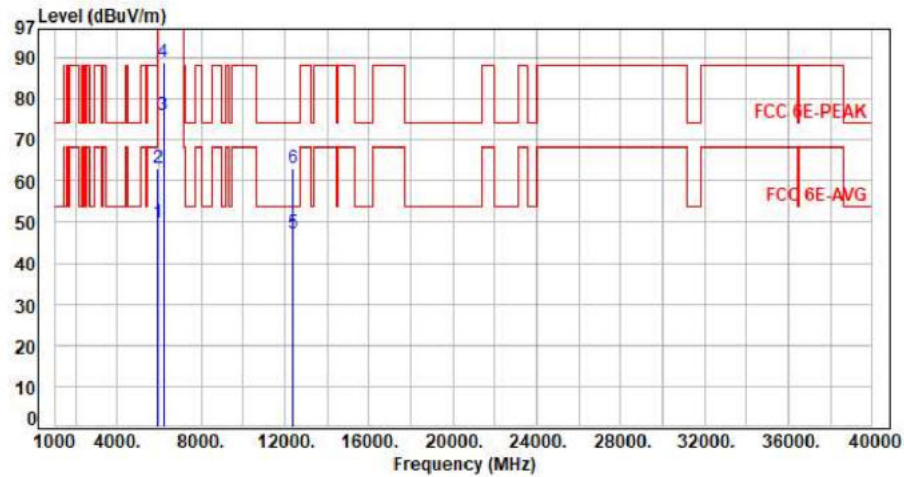


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	113	72	P
2	5925.00	7.66	55.31	62.97	88.20	-25.23	Peak	113	72	P
3	6185.00	8.36	67.69	76.05	200.00	-123.95	Average	113	72	P
4	6185.00	8.36	80.54	88.90	200.00	-111.10	Peak	113	72	P
5	12370.00	17.74	29.41	47.15	54.00	-6.85	Average	100	112	P
6	12370.00	17.74	45.17	62.91	74.00	-11.09	Peak	100	112	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

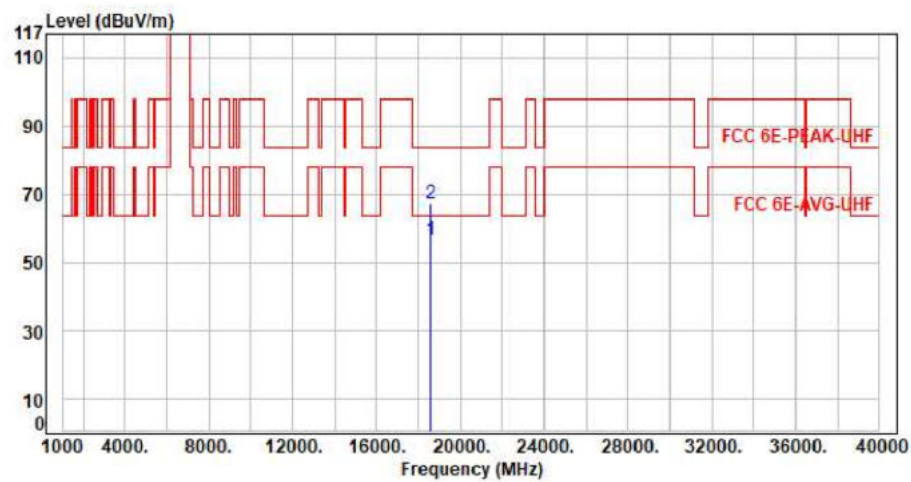


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.78	56.44	63.54	-7.10	Average	150	360	P
2	18555.00	10.66	56.52	67.18	83.54	-16.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

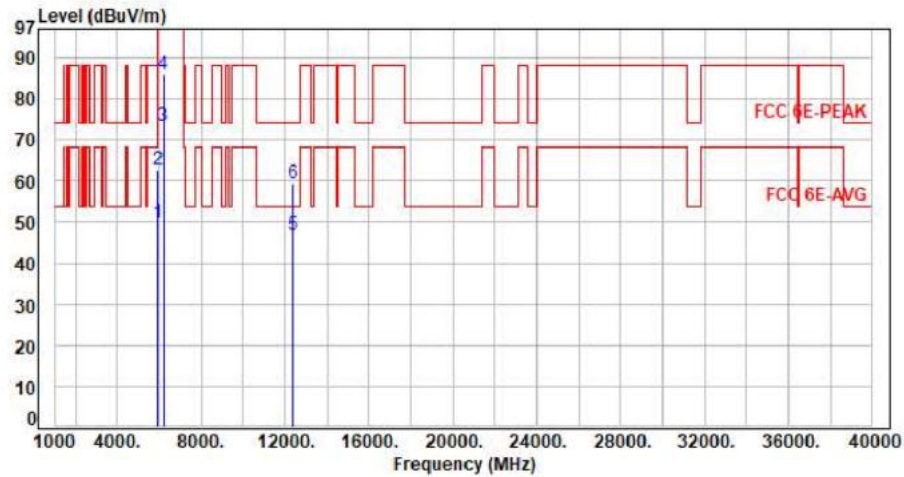


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.19	49.85	68.20	-18.35	Average	165	110	P
2	5925.00	7.66	55.16	62.82	88.20	-25.38	Peak	165	110	P
3	6185.00	8.36	65.04	73.40	200.00	-126.60	Average	165	110	P
4	6185.00	8.36	77.55	85.91	200.00	-114.09	Peak	165	110	P
5	12370.00	17.74	29.17	46.91	54.00	-7.09	Average	100	251	P
6	12370.00	17.74	41.82	59.56	74.00	-14.44	Peak	100	251	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

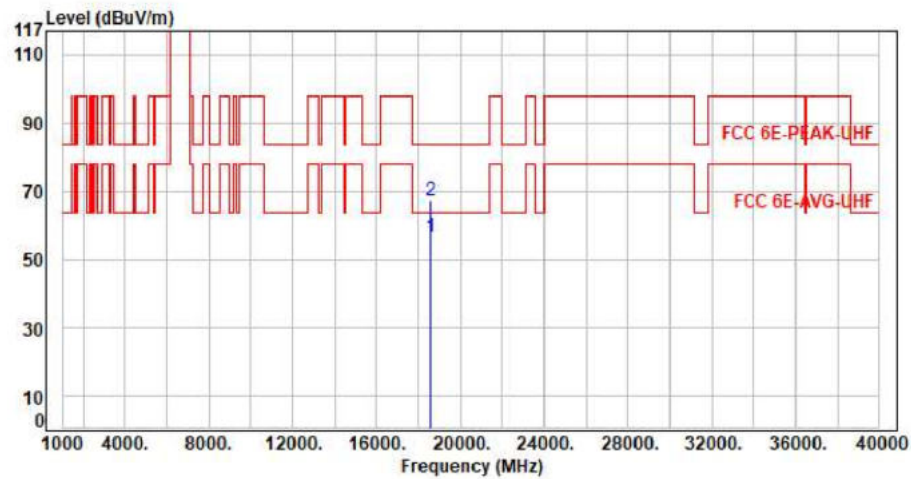


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.79	56.45	63.54	-7.09	Average	150	360	P
2	18555.00	10.66	56.72	67.38	83.54	-16.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

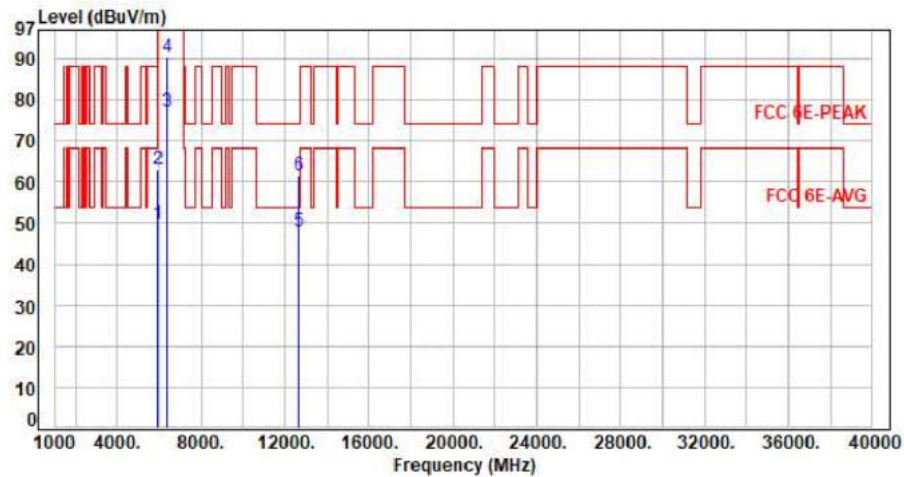


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	100	68	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	100	68	P
3	6345.00	8.31	68.92	77.23	200.00	-122.77	Average	100	68	P
4	6345.00	8.31	82.16	90.47	200.00	-109.53	Peak	100	68	P
5	12690.00	18.27	29.61	47.88	54.00	-6.12	Average	100	241	P
6	12690.00	18.27	43.17	61.44	74.00	-12.56	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

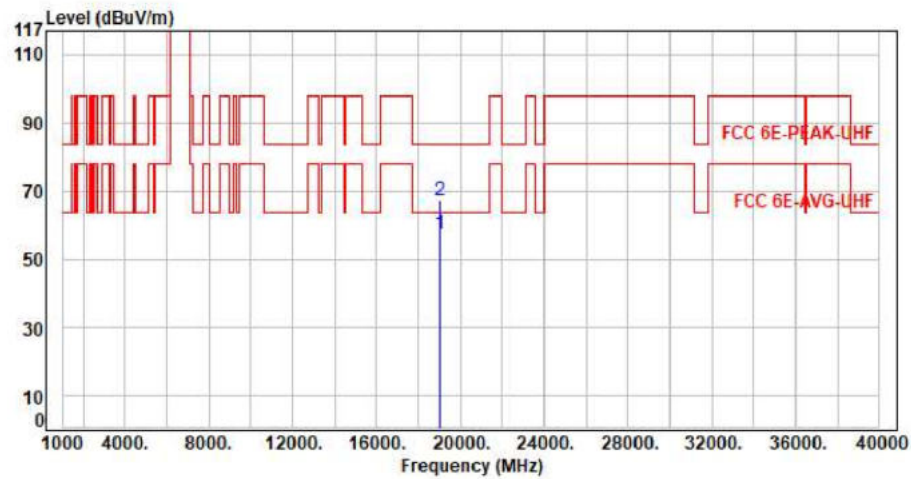


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	45.85	57.26	63.54	-6.28	Average	150	360	P
2	19035.00	11.41	55.56	66.97	83.54	-16.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

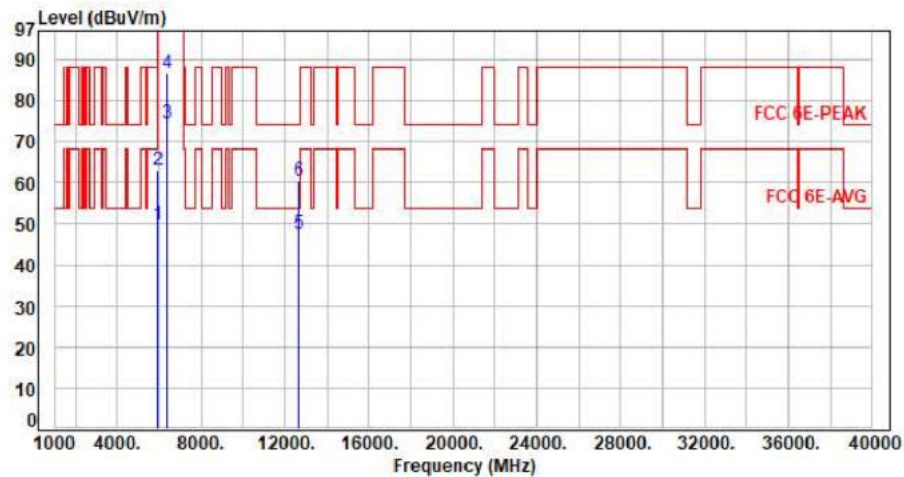

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.98	49.64	68.20	-18.56	Average	398	269	P
2	5925.00	7.66	55.30	62.96	88.20	-25.24	Peak	398	269	P
3	6345.00	8.31	66.34	74.65	200.00	-125.35	Average	398	269	P
4	6345.00	8.31	78.23	86.54	200.00	-113.46	Peak	398	269	P
5	12690.00	18.27	29.47	47.74	54.00	-6.26	Average	100	151	P
6	12690.00	18.27	42.19	60.46	74.00	-13.54	Peak	100	151	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

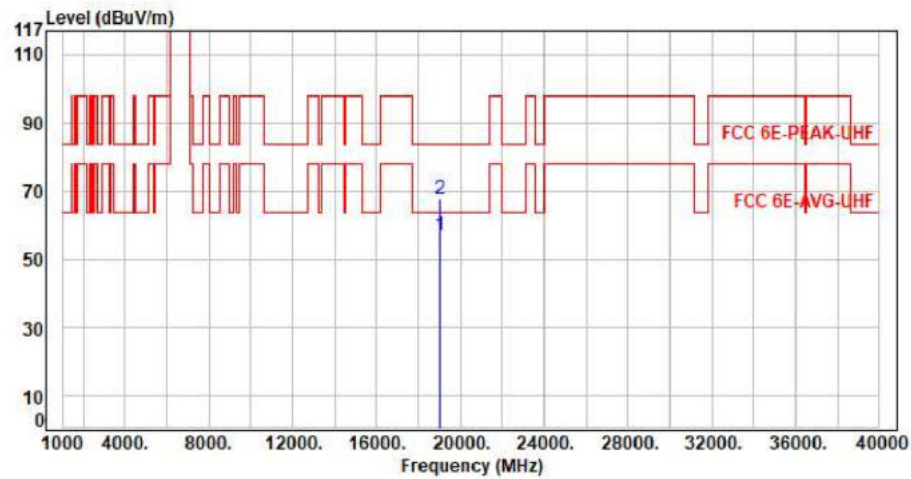

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	45.43	56.84	63.54	-6.70	Average	150	360	P
2	19035.00	11.41	56.17	67.58	83.54	-15.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor