




For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

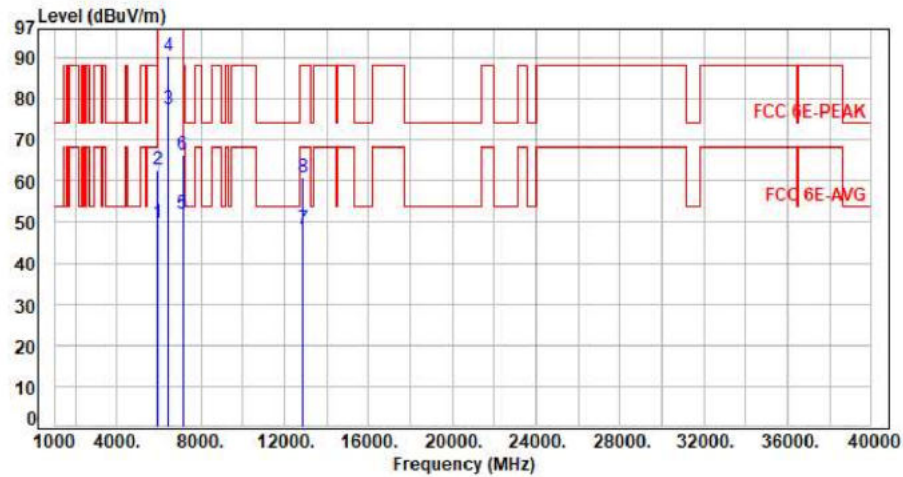

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.07          | 49.73          | 68.20          | -18.47      | Average  | 381         | 308           | P   |
| 2   | 5925.00         | 7.66        | 54.94          | 62.60          | 88.20          | -25.60      | Peak     | 381         | 308           | P   |
| 3   | 6435.00         | 8.32        | 69.21          | 77.53          | 200.00         | -122.47     | Average  | 381         | 308           | P   |
| 4   | 6435.00         | 8.32        | 81.86          | 90.18          | 200.00         | -109.82     | Peak     | 381         | 308           | P   |
| 5   | 7125.00         | 10.05       | 41.88          | 51.93          | 68.20          | -16.27      | Average  | 381         | 308           | P   |
| 6   | 7125.00         | 10.05       | 56.21          | 66.26          | 88.20          | -21.94      | Peak     | 381         | 308           | P   |
| 7   | 12870.00        | 19.02       | 29.16          | 48.18          | 68.20          | -20.02      | Average  | 100         | 42            | P   |
| 8   | 12870.00        | 19.02       | 41.66          | 60.68          | 88.20          | -27.52      | Peak     | 100         | 42            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

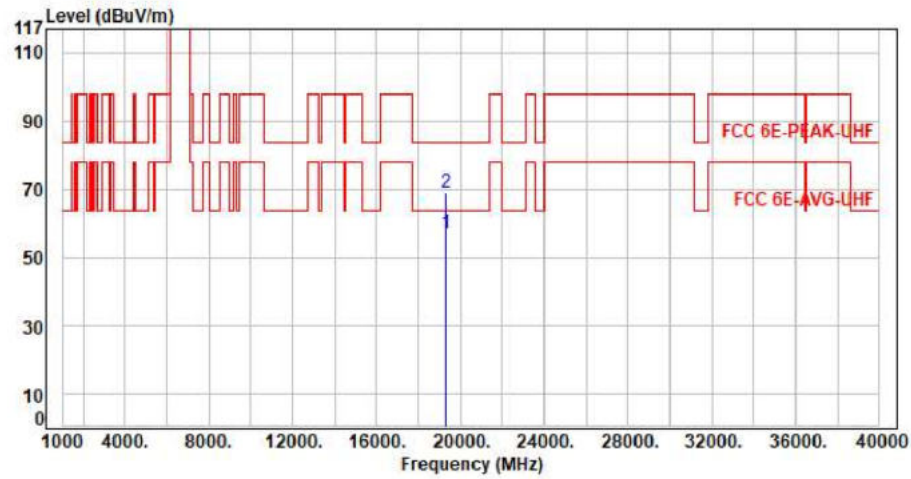


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19305.00           | 11.61          | 45.36             | 56.97             | 63.54             | -6.57          | Average  | 150            | 360              | P   |
| 2   | 19305.00           | 11.61          | 57.28             | 68.89             | 83.54             | -14.65         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

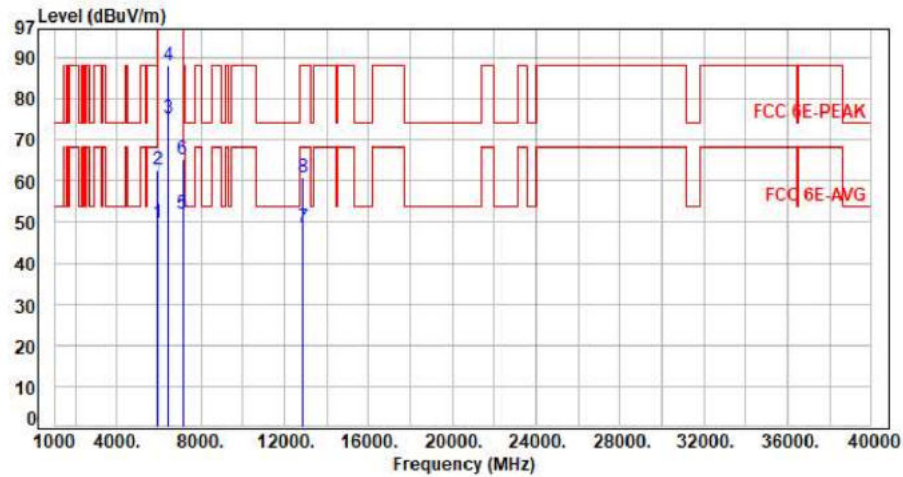

| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.17          | 49.83          | 68.20          | -18.37      | Average  | 393         | 275           | P   |
| 2   | 5925.00         | 7.66        | 55.05          | 62.71          | 88.20          | -25.49      | Peak     | 393         | 275           | P   |
| 3   | 6435.00         | 8.32        | 66.75          | 75.07          | 200.00         | -124.93     | Average  | 393         | 275           | P   |
| 4   | 6435.00         | 8.32        | 79.96          | 88.28          | 200.00         | -111.72     | Peak     | 393         | 275           | P   |
| 5   | 7125.00         | 10.05       | 41.92          | 51.97          | 68.20          | -16.23      | Average  | 393         | 275           | P   |
| 6   | 7125.00         | 10.05       | 55.18          | 65.23          | 88.20          | -22.97      | Peak     | 393         | 275           | P   |
| 7   | 12870.00        | 19.02       | 29.65          | 48.67          | 68.20          | -19.53      | Average  | 100         | 145           | P   |
| 8   | 12870.00        | 19.02       | 41.87          | 60.89          | 88.20          | -27.31      | Peak     | 100         | 145           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH97 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

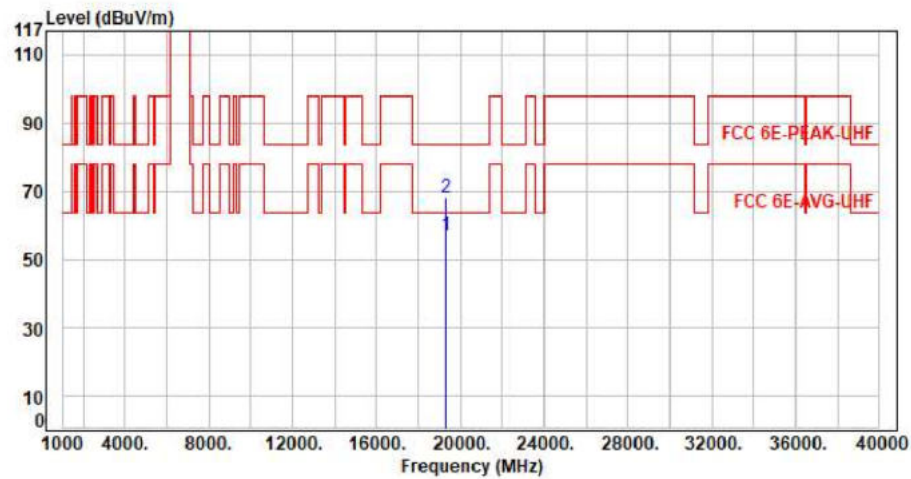


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19305.00           | 11.61          | 45.29             | 56.90             | 63.54             | -6.64          | Average  | 150            | 360              | P   |
| 2   | 19305.00           | 11.61          | 56.36             | 67.97             | 83.54             | -15.57         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

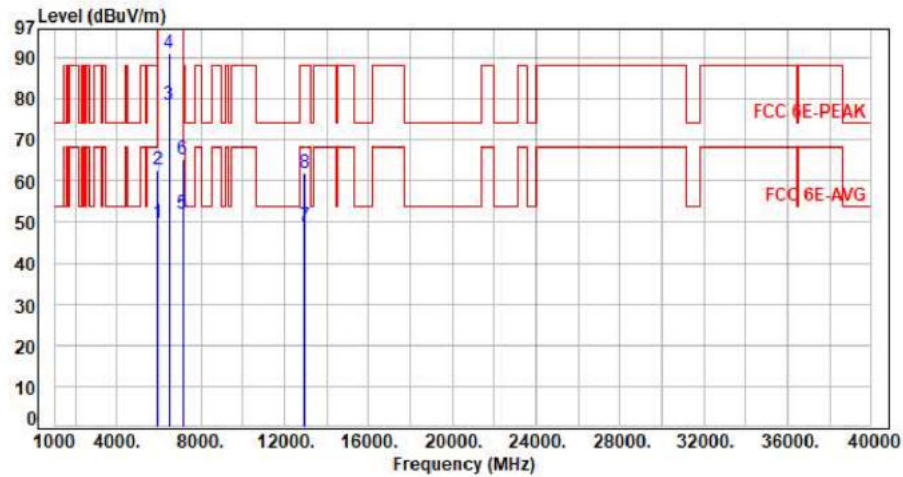

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.07          | 49.73          | 68.20          | -18.47      | Average  | 345         | 310           | P   |
| 2   | 5925.00         | 7.66        | 55.19          | 62.85          | 88.20          | -25.35      | Peak     | 345         | 310           | P   |
| 3   | 6475.00         | 8.33        | 70.36          | 78.69          | 200.00         | -121.31     | Average  | 345         | 310           | P   |
| 4   | 6475.00         | 8.33        | 82.81          | 91.14          | 200.00         | -108.86     | Peak     | 345         | 310           | P   |
| 5   | 7125.00         | 10.05       | 41.87          | 51.92          | 68.20          | -16.28      | Average  | 345         | 310           | P   |
| 6   | 7125.00         | 10.05       | 55.34          | 65.39          | 88.20          | -22.81      | Peak     | 345         | 310           | P   |
| 7   | 12950.00        | 19.39       | 29.74          | 49.13          | 68.20          | -19.07      | Average  | 100         | 228           | P   |
| 8   | 12950.00        | 19.39       | 42.51          | 61.90          | 88.20          | -26.30      | Peak     | 100         | 228           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

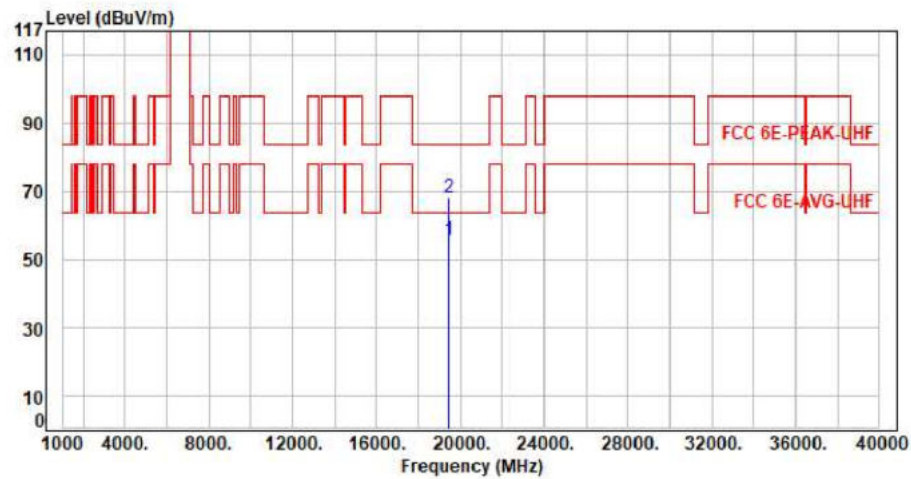

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19425.00           | 11.75          | 43.93             | 55.68             | 63.54             | -7.86          | Average  | 150            | 360              | P   |
| 2   | 19425.00           | 11.75          | 56.12             | 67.87             | 83.54             | -15.67         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

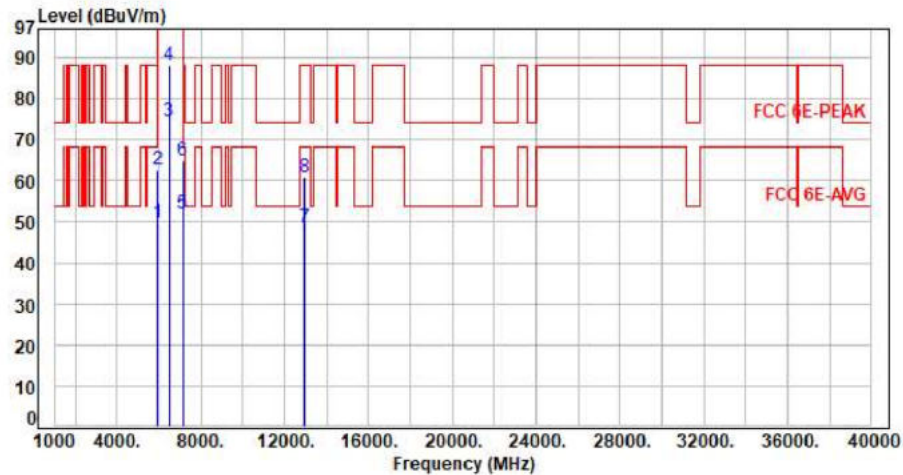

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.06          | 49.72          | 68.20          | -18.48      | Average  | 119         | 91            | P   |
| 2   | 5925.00         | 7.66        | 54.86          | 62.52          | 88.20          | -25.68      | Peak     | 119         | 91            | P   |
| 3   | 6475.00         | 8.33        | 66.23          | 74.56          | 200.00         | -125.44     | Average  | 119         | 91            | P   |
| 4   | 6475.00         | 8.33        | 79.71          | 88.04          | 200.00         | -111.96     | Peak     | 119         | 91            | P   |
| 5   | 7125.00         | 10.05       | 41.97          | 52.02          | 68.20          | -16.18      | Average  | 119         | 91            | P   |
| 6   | 7125.00         | 10.05       | 54.89          | 64.94          | 88.20          | -23.26      | Peak     | 119         | 91            | P   |
| 7   | 12950.00        | 19.39       | 29.18          | 48.57          | 68.20          | -19.63      | Average  | 100         | 159           | P   |
| 8   | 12950.00        | 19.39       | 41.58          | 60.97          | 88.20          | -27.23      | Peak     | 100         | 159           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH105 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

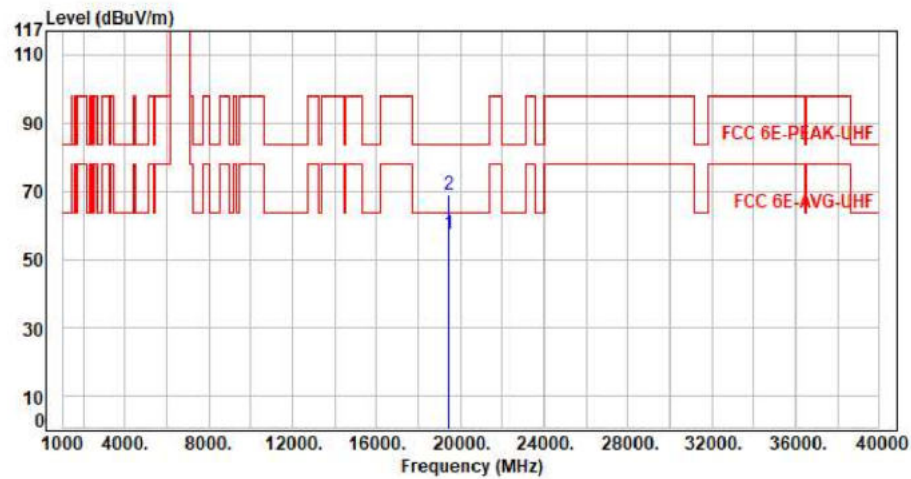


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19425.00           | 11.75          | 45.65             | 57.40             | 63.54             | -6.14          | Average  | 150            | 360              | P   |
| 2   | 19425.00           | 11.75          | 57.18             | 68.93             | 83.54             | -14.61         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

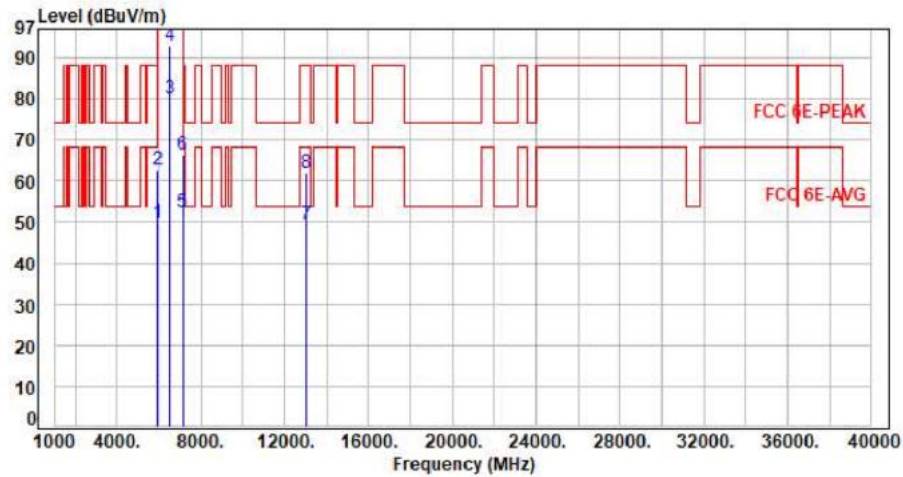


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 41.98             | 49.64             | 68.20             | -18.56         | Average  | 325            | 312              | P   |
| 2   | 5925.00            | 7.66           | 54.95             | 62.61             | 88.20             | -25.59         | Peak     | 325            | 312              | P   |
| 3   | 6515.00            | 8.42           | 71.47             | 79.89             | 200.00            | -120.11        | Average  | 325            | 312              | P   |
| 4   | 6515.00            | 8.42           | 84.46             | 92.88             | 200.00            | -107.12        | Peak     | 325            | 312              | P   |
| 5   | 7125.00            | 10.05          | 42.16             | 52.21             | 68.20             | -15.99         | Average  | 325            | 312              | P   |
| 6   | 7125.00            | 10.05          | 56.22             | 66.27             | 88.20             | -21.93         | Peak     | 325            | 312              | P   |
| 7   | 13030.00           | 19.86          | 29.55             | 49.41             | 68.20             | -18.79         | Average  | 100            | 218              | P   |
| 8   | 13030.00           | 19.86          | 42.18             | 62.04             | 88.20             | -26.16         | Peak     | 100            | 218              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

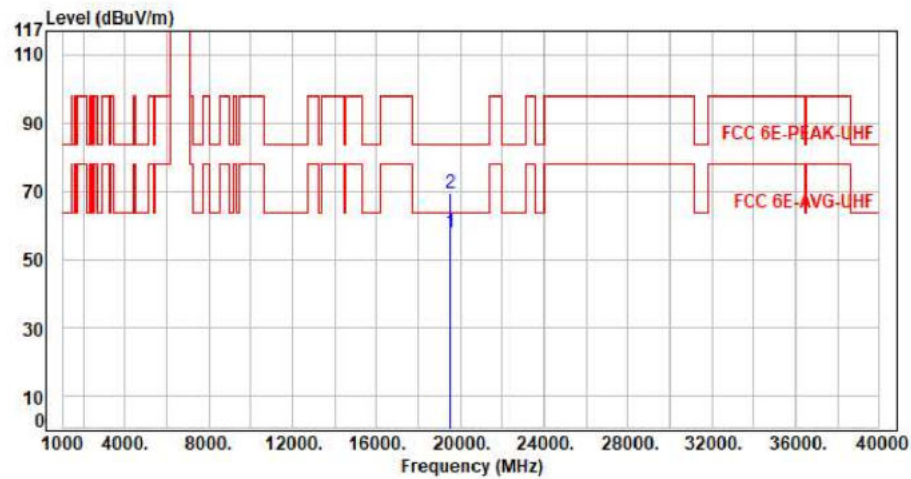


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19545.00           | 12.19          | 45.52             | 57.71             | 63.54             | -5.83          | Average  | 150            | 360              | P   |
| 2   | 19545.00           | 12.19          | 57.00             | 69.19             | 83.54             | -14.35         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

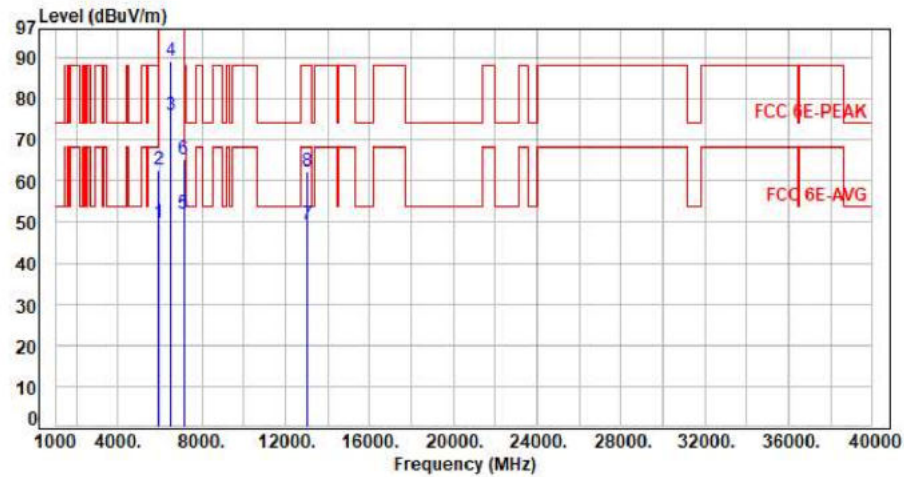

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.01          | 49.67          | 68.20          | -18.53      | Average  | 119         | 91            | P   |
| 2   | 5925.00         | 7.66        | 55.07          | 62.73          | 88.20          | -25.47      | Peak     | 119         | 91            | P   |
| 3   | 6515.00         | 8.42        | 67.64          | 76.06          | 200.00         | -123.94     | Average  | 119         | 91            | P   |
| 4   | 6515.00         | 8.42        | 80.78          | 89.20          | 200.00         | -110.80     | Peak     | 119         | 91            | P   |
| 5   | 7125.00         | 10.05       | 41.94          | 51.99          | 68.20          | -16.21      | Average  | 119         | 91            | P   |
| 6   | 7125.00         | 10.05       | 55.07          | 65.12          | 88.20          | -23.08      | Peak     | 119         | 91            | P   |
| 7   | 13030.00        | 19.86       | 29.63          | 49.49          | 68.20          | -18.71      | Average  | 100         | 227           | P   |
| 8   | 13030.00        | 19.86       | 42.60          | 62.46          | 88.20          | -25.74      | Peak     | 100         | 227           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

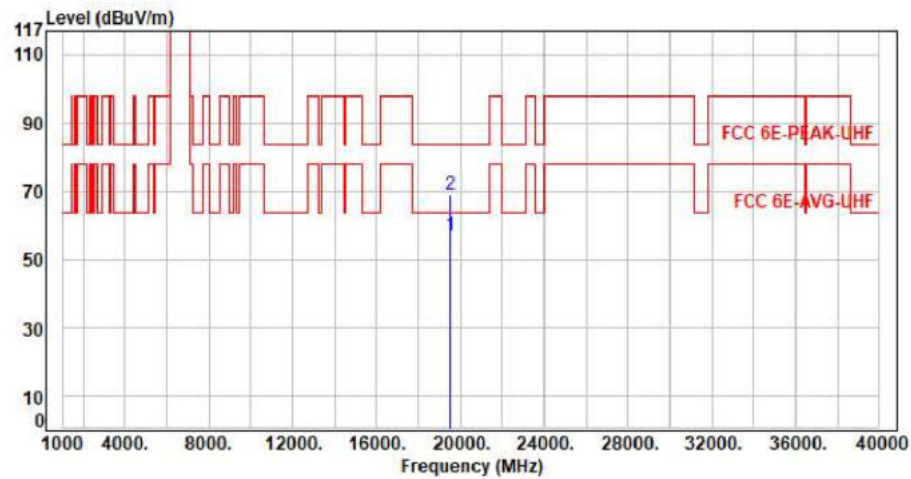


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19545.00           | 12.19          | 44.54             | 56.73             | 63.54             | -6.81          | Average  | 150            | 360              | P   |
| 2   | 19545.00           | 12.19          | 56.73             | 68.92             | 83.54             | -14.62         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

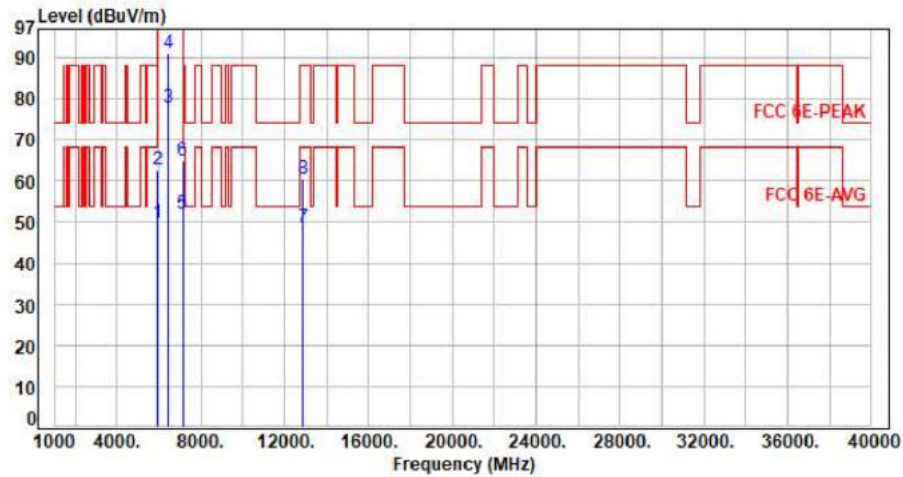

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.07          | 49.73          | 68.20          | -18.47      | Average  | 399         | 307           | P   |
| 2   | 5925.00         | 7.66        | 55.13          | 62.79          | 88.20          | -25.41      | Peak     | 399         | 307           | P   |
| 3   | 6445.00         | 8.31        | 69.38          | 77.69          | 200.00         | -122.31     | Average  | 399         | 307           | P   |
| 4   | 6445.00         | 8.31        | 82.62          | 90.93          | 200.00         | -109.07     | Peak     | 399         | 307           | P   |
| 5   | 7125.00         | 10.05       | 41.95          | 52.00          | 68.20          | -16.20      | Average  | 399         | 307           | P   |
| 6   | 7125.00         | 10.05       | 54.86          | 64.91          | 88.20          | -23.29      | Peak     | 399         | 307           | P   |
| 7   | 12890.00        | 19.05       | 29.65          | 48.70          | 68.20          | -19.50      | Average  | 100         | 149           | P   |
| 8   | 12890.00        | 19.05       | 41.40          | 60.45          | 88.20          | -27.75      | Peak     | 100         | 149           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

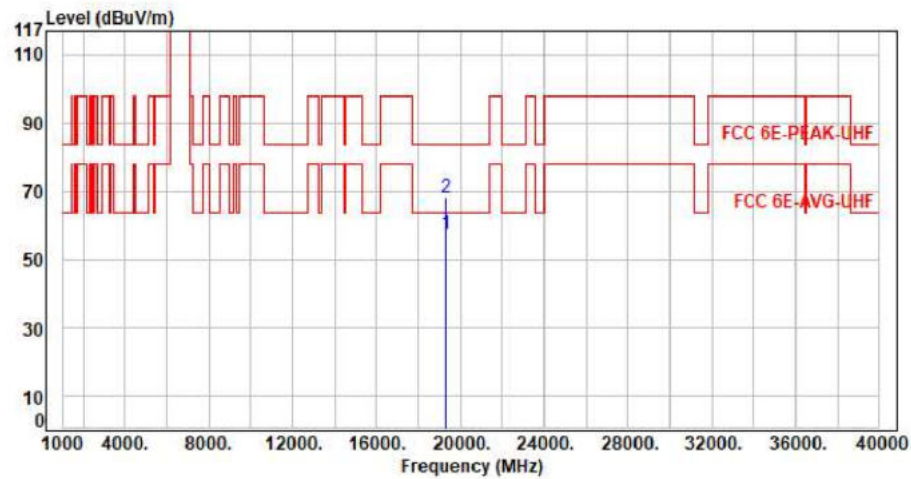


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19335.00           | 11.62          | 45.58             | 57.20             | 63.54             | -6.34          | Average  | 150            | 360              | P   |
| 2   | 19335.00           | 11.62          | 56.56             | 68.18             | 83.54             | -15.36         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

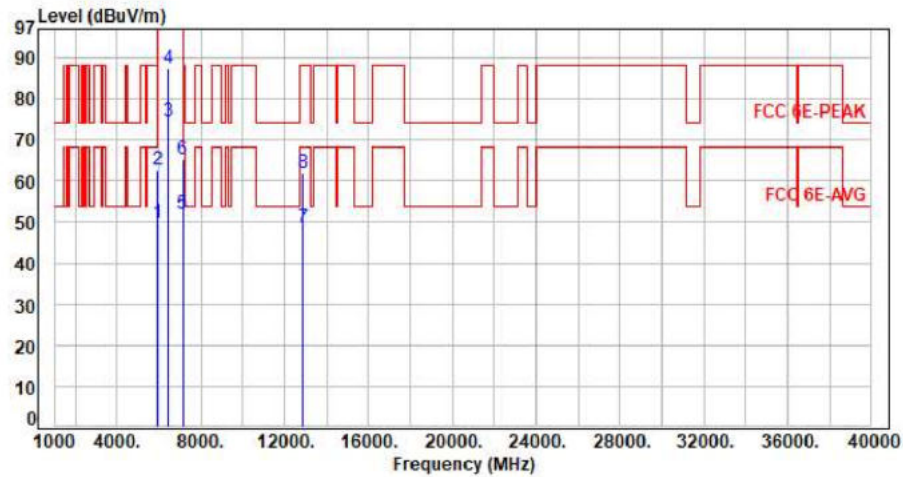

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.04          | 49.70          | 68.20          | -18.50      | Average  | 122         | 92            | P   |
| 2   | 5925.00         | 7.66        | 55.05          | 62.71          | 88.20          | -25.49      | Peak     | 122         | 92            | P   |
| 3   | 6445.00         | 8.31        | 66.27          | 74.58          | 200.00         | -125.42     | Average  | 122         | 92            | P   |
| 4   | 6445.00         | 8.31        | 79.21          | 87.52          | 200.00         | -112.48     | Peak     | 122         | 92            | P   |
| 5   | 7125.00         | 10.05       | 41.95          | 52.00          | 68.20          | -16.20      | Average  | 122         | 92            | P   |
| 6   | 7125.00         | 10.05       | 55.24          | 65.29          | 88.20          | -22.91      | Peak     | 122         | 92            | P   |
| 7   | 12890.00        | 19.05       | 29.62          | 48.67          | 68.20          | -19.53      | Average  | 100         | 138           | P   |
| 8   | 12890.00        | 19.05       | 42.92          | 61.97          | 88.20          | -26.23      | Peak     | 100         | 138           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

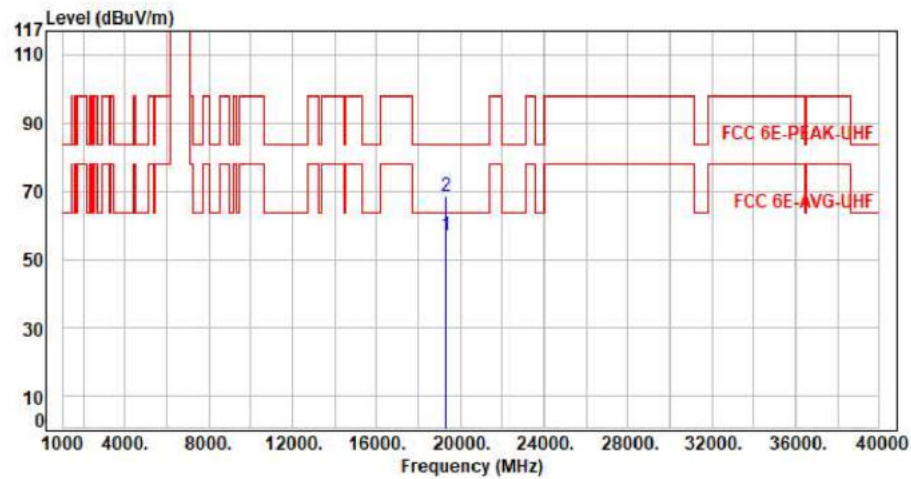


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19335.00           | 11.62          | 45.53             | 57.15             | 63.54             | -6.39          | Average  | 150            | 360              | P   |
| 2   | 19335.00           | 11.62          | 56.82             | 68.44             | 83.54             | -15.10         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

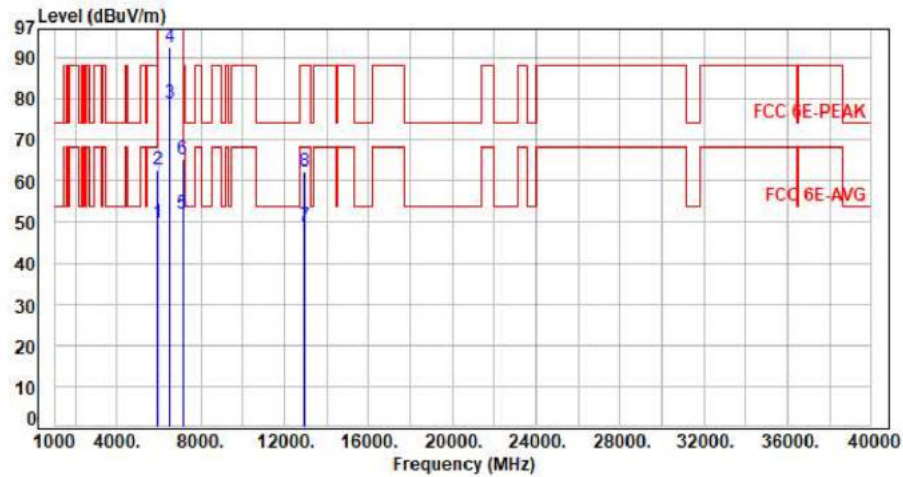


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 42.03             | 49.69             | 68.20             | -18.51         | Average  | 340            | 310              | P   |
| 2   | 5925.00            | 7.66           | 55.22             | 62.88             | 88.20             | -25.32         | Peak     | 340            | 310              | P   |
| 3   | 6485.00            | 8.34           | 70.65             | 78.99             | 200.00            | -121.01        | Average  | 340            | 310              | P   |
| 4   | 6485.00            | 8.34           | 84.10             | 92.44             | 200.00            | -107.56        | Peak     | 340            | 310              | P   |
| 5   | 7125.00            | 10.05          | 41.97             | 52.02             | 68.20             | -16.18         | Average  | 340            | 310              | P   |
| 6   | 7125.00            | 10.05          | 55.34             | 65.39             | 88.20             | -22.81         | Peak     | 340            | 310              | P   |
| 7   | 12970.00           | 19.47          | 29.57             | 49.04             | 68.20             | -19.16         | Average  | 100            | 309              | P   |
| 8   | 12970.00           | 19.47          | 42.81             | 62.28             | 88.20             | -25.92         | Peak     | 100            | 309              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

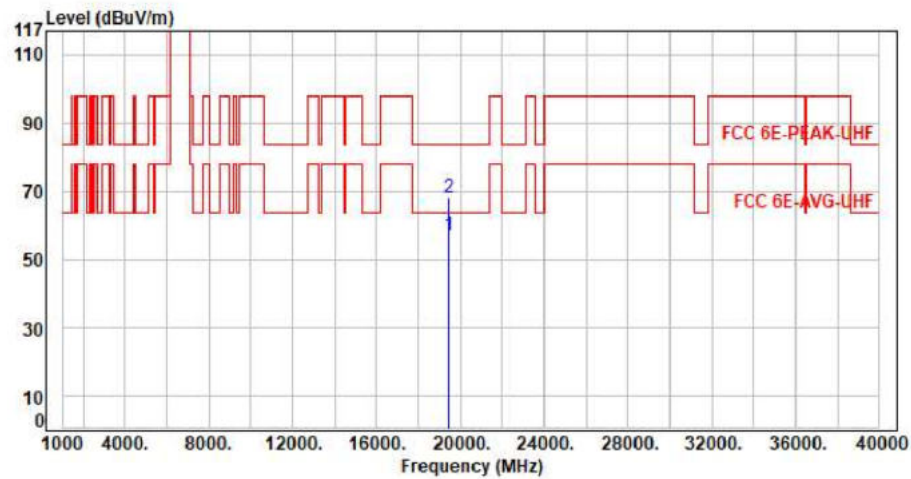


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19455.00           | 11.57          | 45.48             | 57.05             | 63.54             | -6.49          | Average  | 150            | 360              | P   |
| 2   | 19455.00           | 11.57          | 56.55             | 68.12             | 83.54             | -15.42         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

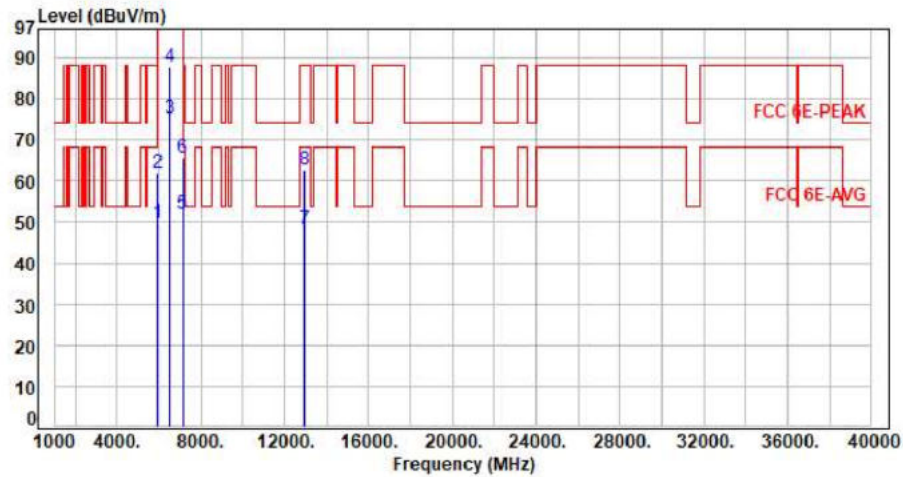

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.01          | 49.67          | 68.20          | -18.53      | Average  | 113         | 91            | P   |
| 2   | 5925.00         | 7.66        | 54.45          | 62.11          | 88.20          | -26.09      | Peak     | 113         | 91            | P   |
| 3   | 6485.00         | 8.34        | 67.03          | 75.37          | 200.00         | -124.63     | Average  | 113         | 91            | P   |
| 4   | 6485.00         | 8.34        | 79.53          | 87.87          | 200.00         | -112.13     | Peak     | 113         | 91            | P   |
| 5   | 7125.00         | 10.05       | 41.91          | 51.96          | 68.20          | -16.24      | Average  | 113         | 91            | P   |
| 6   | 7125.00         | 10.05       | 55.50          | 65.55          | 88.20          | -22.65      | Peak     | 113         | 91            | P   |
| 7   | 12970.00        | 19.47       | 28.96          | 48.43          | 68.20          | -19.77      | Average  | 100         | 112           | P   |
| 8   | 12970.00        | 19.47       | 43.08          | 62.55          | 88.20          | -25.65      | Peak     | 100         | 112           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

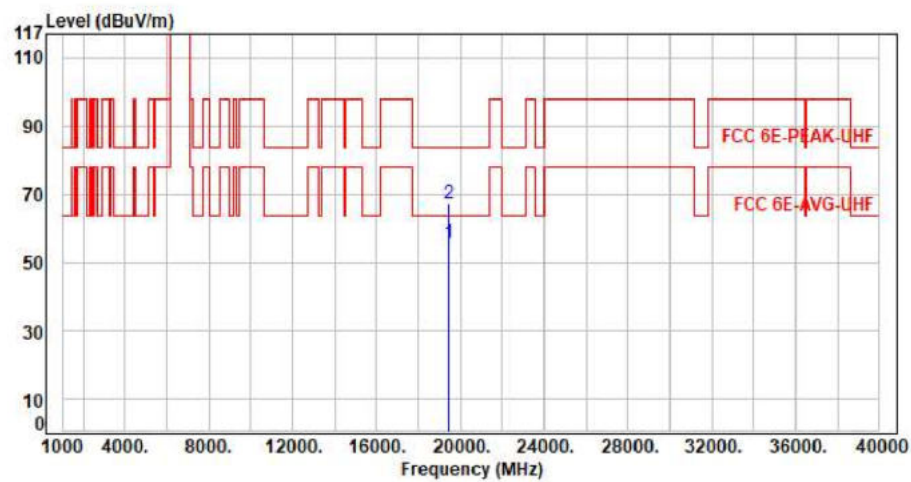


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19455.00           | 11.57          | 44.17             | 55.74             | 63.54             | -7.80          | Average  | 150            | 360              | P   |
| 2   | 19455.00           | 11.57          | 55.83             | 67.40             | 83.54             | -16.14         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

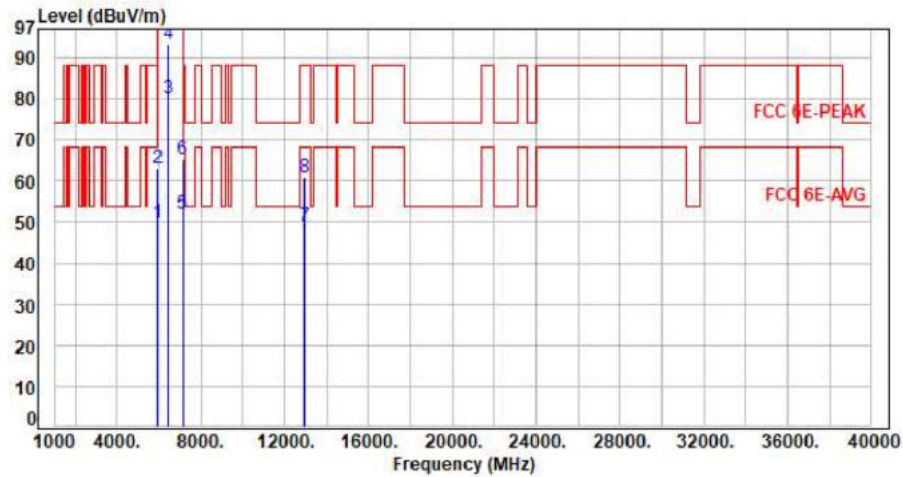


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.08          | 49.74          | 68.20          | -18.46      | Average  | 329         | 310           | P   |
| 2   | 5925.00         | 7.66        | 55.28          | 62.94          | 88.20          | -25.26      | Peak     | 329         | 310           | P   |
| 3   | 6465.00         | 8.32        | 71.71          | 80.03          | 200.00         | -119.97     | Average  | 329         | 310           | P   |
| 4   | 6465.00         | 8.32        | 84.96          | 93.28          | 200.00         | -106.72     | Peak     | 329         | 310           | P   |
| 5   | 7125.00         | 10.05       | 41.84          | 51.89          | 68.20          | -16.31      | Average  | 329         | 310           | P   |
| 6   | 7125.00         | 10.05       | 55.30          | 65.35          | 88.20          | -22.85      | Peak     | 329         | 310           | P   |
| 7   | 12930.00        | 19.27       | 29.67          | 48.94          | 68.20          | -19.26      | Average  | 100         | 225           | P   |
| 8   | 12930.00        | 19.27       | 41.60          | 60.87          | 88.20          | -27.33      | Peak     | 100         | 225           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

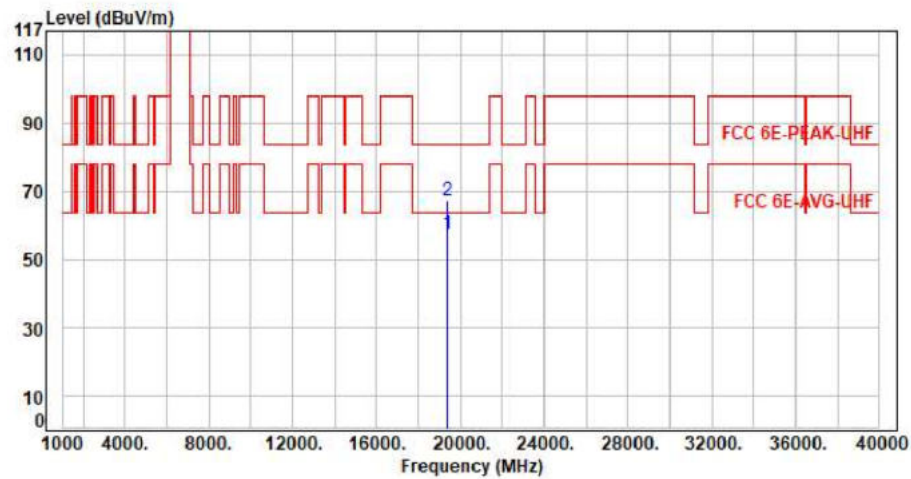


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19395.00           | 11.91          | 45.67             | 57.58             | 63.54             | -5.96          | Average  | 150            | 360              | P   |
| 2   | 19395.00           | 11.91          | 55.08             | 66.99             | 83.54             | -16.55         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

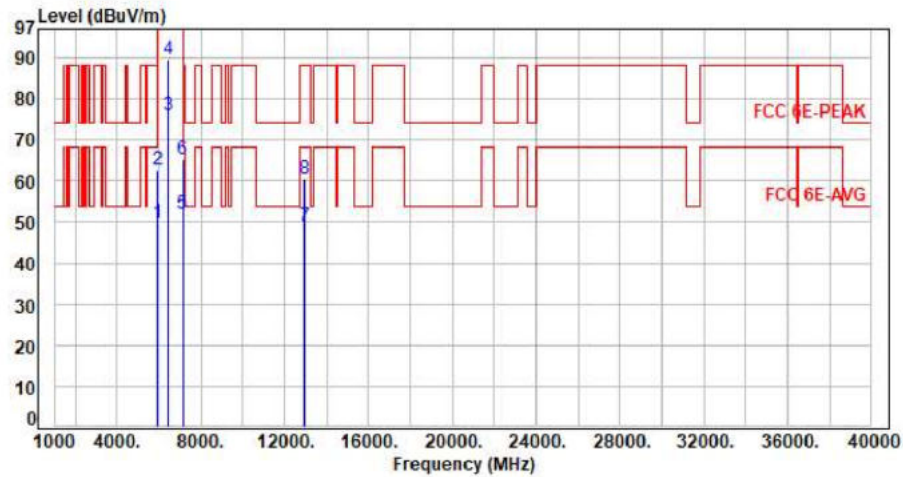

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.08          | 49.74          | 68.20          | -18.46      | Average  | 120         | 91            | P   |
| 2   | 5925.00         | 7.66        | 54.94          | 62.60          | 88.20          | -25.60      | Peak     | 120         | 91            | P   |
| 3   | 6465.00         | 8.32        | 67.75          | 76.07          | 200.00         | -123.93     | Average  | 120         | 91            | P   |
| 4   | 6465.00         | 8.32        | 81.36          | 89.68          | 200.00         | -110.32     | Peak     | 120         | 91            | P   |
| 5   | 7125.00         | 10.05       | 41.90          | 51.95          | 68.20          | -16.25      | Average  | 120         | 91            | P   |
| 6   | 7125.00         | 10.05       | 55.09          | 65.14          | 88.20          | -23.06      | Peak     | 120         | 91            | P   |
| 7   | 12930.00        | 19.27       | 29.86          | 49.13          | 68.20          | -19.07      | Average  | 100         | 146           | P   |
| 8   | 12930.00        | 19.27       | 41.27          | 60.54          | 88.20          | -27.66      | Peak     | 100         | 146           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH103 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

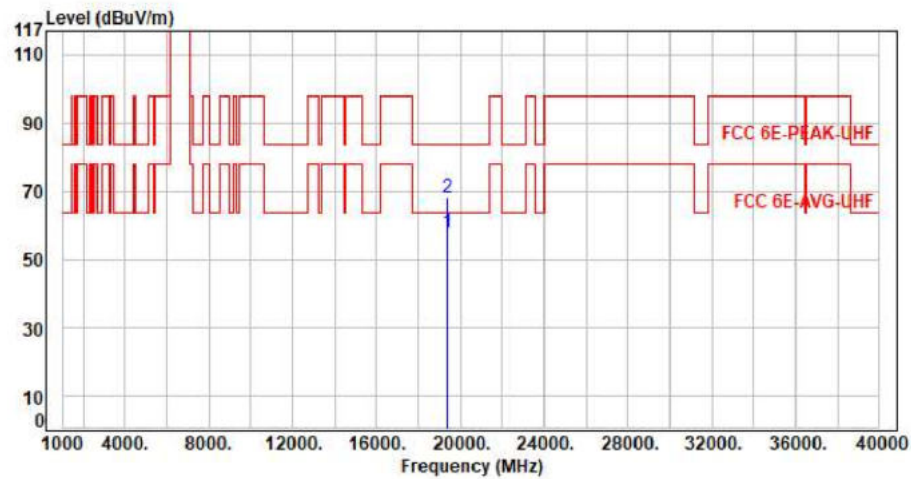


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19395.00           | 11.91          | 45.72             | 57.63             | 63.54             | -5.91          | Average  | 150            | 360              | P   |
| 2   | 19395.00           | 11.91          | 56.27             | 68.18             | 83.54             | -15.36         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

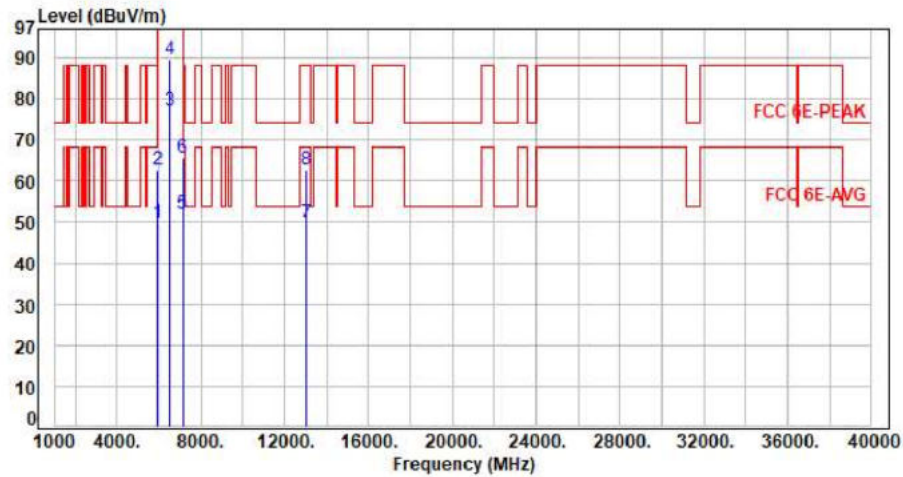


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.98          | 49.64          | 68.20          | -18.56      | Average  | 100         | 67            | P   |
| 2   | 5925.00         | 7.66        | 54.89          | 62.55          | 88.20          | -25.65      | Peak     | 100         | 67            | P   |
| 3   | 6525.00         | 8.45        | 68.77          | 77.22          | 200.00         | -122.78     | Average  | 100         | 67            | P   |
| 4   | 6525.00         | 8.45        | 81.17          | 89.62          | 200.00         | -110.38     | Peak     | 100         | 67            | P   |
| 5   | 7125.00         | 10.05       | 41.83          | 51.88          | 68.20          | -16.32      | Average  | 100         | 67            | P   |
| 6   | 7125.00         | 10.05       | 55.65          | 65.70          | 88.20          | -22.50      | Peak     | 100         | 67            | P   |
| 7   | 13050.00        | 20.02       | 29.65          | 49.67          | 68.20          | -18.53      | Average  | 100         | 158           | P   |
| 8   | 13050.00        | 20.02       | 42.68          | 62.70          | 88.20          | -25.50      | Peak     | 100         | 158           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

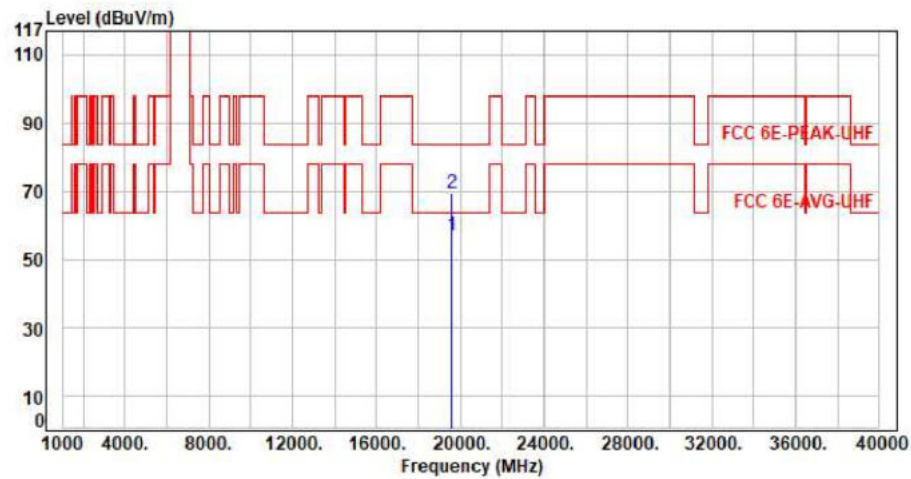


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19575.00           | 12.02          | 45.09             | 57.11             | 63.54             | -6.43          | Average  | 150            | 360              | P   |
| 2   | 19575.00           | 12.02          | 57.27             | 69.29             | 83.54             | -14.25         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

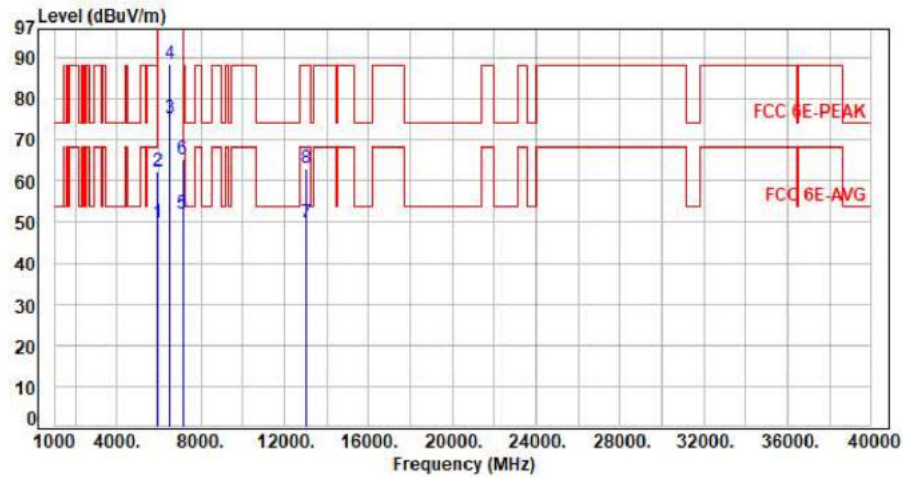

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.02          | 49.68          | 68.20          | -18.52      | Average  | 125         | 91            | P   |
| 2   | 5925.00         | 7.66        | 54.84          | 62.50          | 88.20          | -25.70      | Peak     | 125         | 91            | P   |
| 3   | 6525.00         | 8.45        | 66.64          | 75.09          | 200.00         | -124.91     | Average  | 125         | 91            | P   |
| 4   | 6525.00         | 8.45        | 80.13          | 88.58          | 200.00         | -111.42     | Peak     | 125         | 91            | P   |
| 5   | 7125.00         | 10.05       | 41.92          | 51.97          | 68.20          | -16.23      | Average  | 125         | 91            | P   |
| 6   | 7125.00         | 10.05       | 55.18          | 65.23          | 88.20          | -22.97      | Peak     | 125         | 91            | P   |
| 7   | 13050.00        | 20.02       | 29.81          | 49.83          | 68.20          | -18.37      | Average  | 100         | 154           | P   |
| 8   | 13050.00        | 20.02       | 42.88          | 62.90          | 88.20          | -25.30      | Peak     | 100         | 154           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

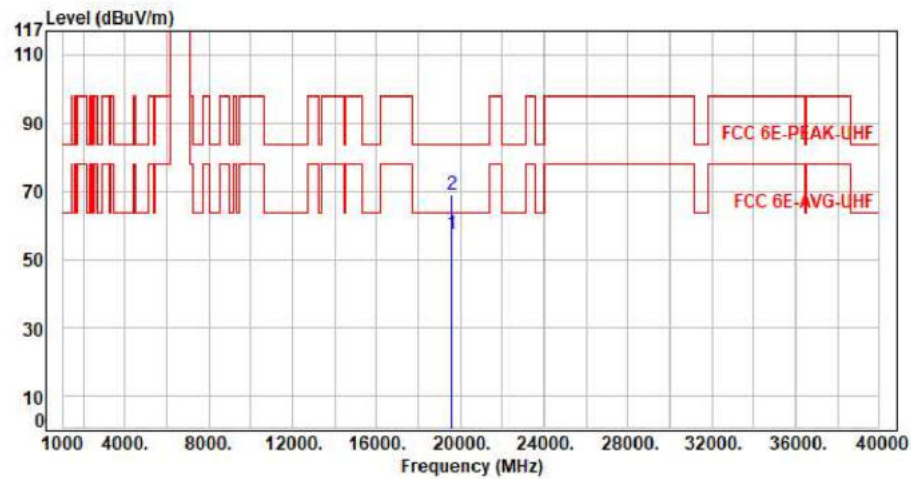


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19575.00           | 12.02          | 45.42             | 57.44             | 63.54             | -6.10          | Average  | 150            | 360              | P   |
| 2   | 19575.00           | 12.02          | 56.72             | 68.74             | 83.54             | -14.80         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

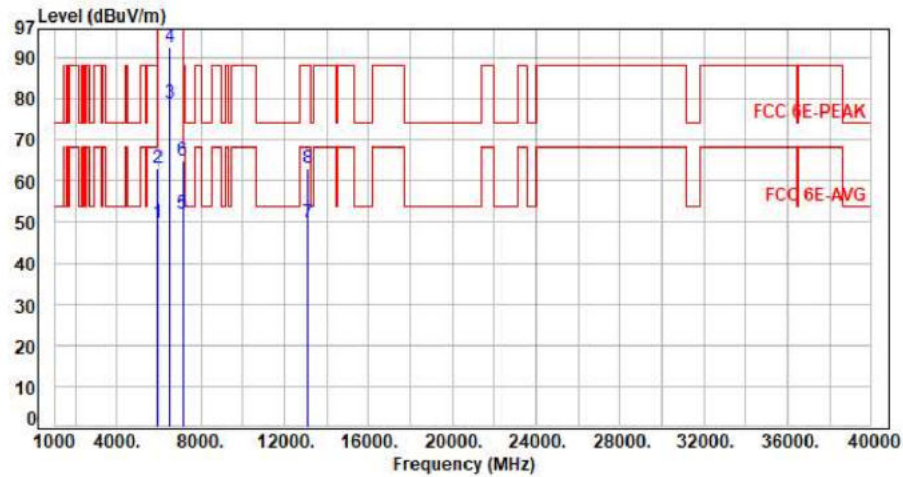


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 42.03             | 49.69             | 68.20             | -18.51         | Average  | 100            | 315              | P   |
| 2   | 5925.00            | 7.66           | 55.43             | 63.09             | 88.20             | -25.11         | Peak     | 100            | 315              | P   |
| 3   | 6545.00            | 8.55           | 70.51             | 79.06             | 200.00            | -120.94        | Average  | 100            | 315              | P   |
| 4   | 6545.00            | 8.55           | 83.89             | 92.44             | 200.00            | -107.56        | Peak     | 100            | 315              | P   |
| 5   | 7125.00            | 10.05          | 41.93             | 51.98             | 68.20             | -16.22         | Average  | 100            | 315              | P   |
| 6   | 7125.00            | 10.05          | 54.97             | 65.02             | 88.20             | -23.18         | Peak     | 100            | 315              | P   |
| 7   | 13090.00           | 20.20          | 29.66             | 49.86             | 68.20             | -18.34         | Average  | 100            | 162              | P   |
| 8   | 13090.00           | 20.20          | 42.81             | 63.01             | 88.20             | -25.19         | Peak     | 100            | 162              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

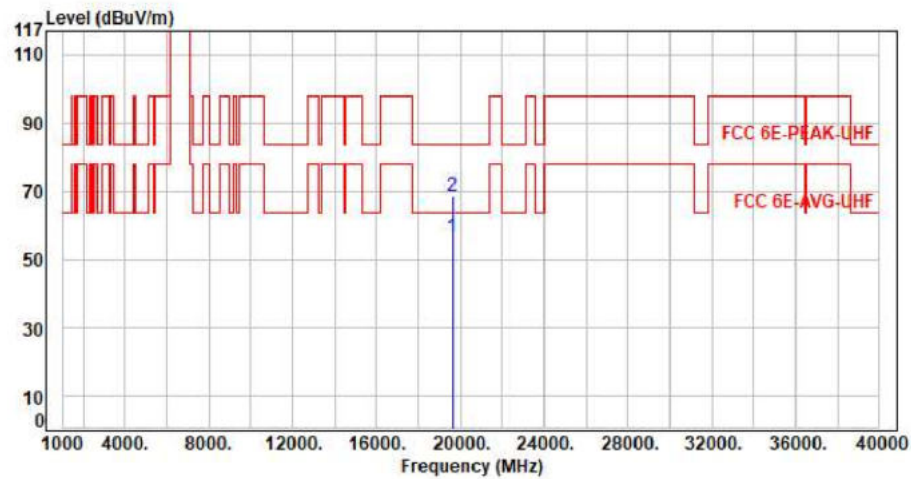


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 19635.00        | 11.58       | 45.12          | 56.70          | 63.54          | -6.84       | Average  | 150         | 360           | P   |
| 2   | 19635.00        | 11.58       | 56.99          | 68.57          | 83.54          | -14.97      | Peak     | 150         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

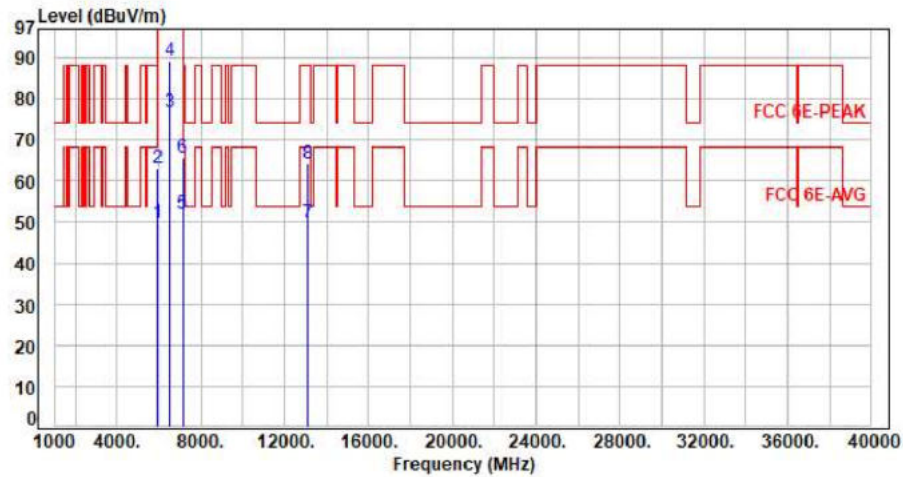

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 42.01             | 49.67             | 68.20             | -18.53         | Average  | 144            | 92               | P   |
| 2   | 5925.00            | 7.66           | 55.36             | 63.02             | 88.20             | -25.18         | Peak     | 144            | 92               | P   |
| 3   | 6545.00            | 8.55           | 67.99             | 76.54             | 200.00            | -123.46        | Average  | 144            | 92               | P   |
| 4   | 6545.00            | 8.55           | 80.73             | 89.28             | 200.00            | -110.72        | Peak     | 144            | 92               | P   |
| 5   | 7125.00            | 10.05          | 41.87             | 51.92             | 68.20             | -16.28         | Average  | 144            | 92               | P   |
| 6   | 7125.00            | 10.05          | 55.60             | 65.65             | 88.20             | -22.55         | Peak     | 144            | 92               | P   |
| 7   | 13090.00           | 20.20          | 29.62             | 49.82             | 68.20             | -18.38         | Average  | 100            | 264              | P   |
| 8   | 13090.00           | 20.20          | 43.81             | 64.01             | 88.20             | -24.19         | Peak     | 100            | 264              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

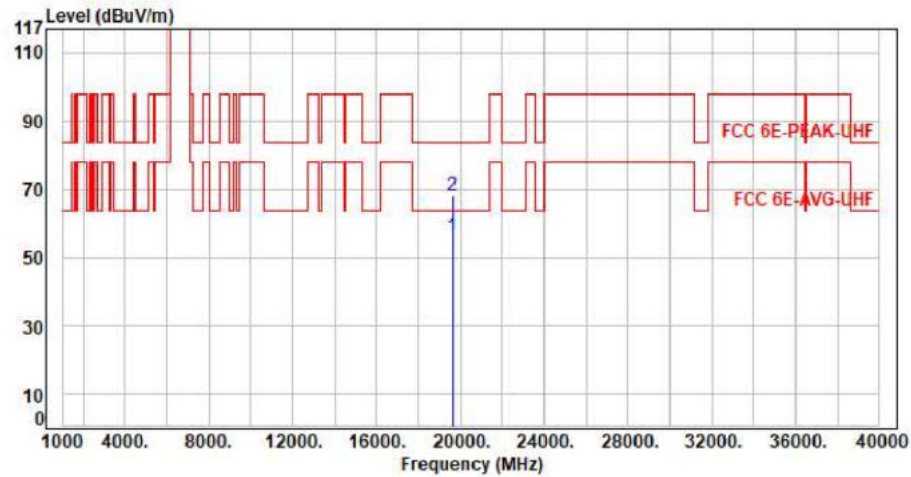


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19635.00           | 11.58          | 44.30             | 55.88             | 63.54             | -7.66          | Average  | 150            | 360              | P   |
| 2   | 19635.00           | 11.58          | 56.29             | 67.87             | 83.54             | -15.67         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

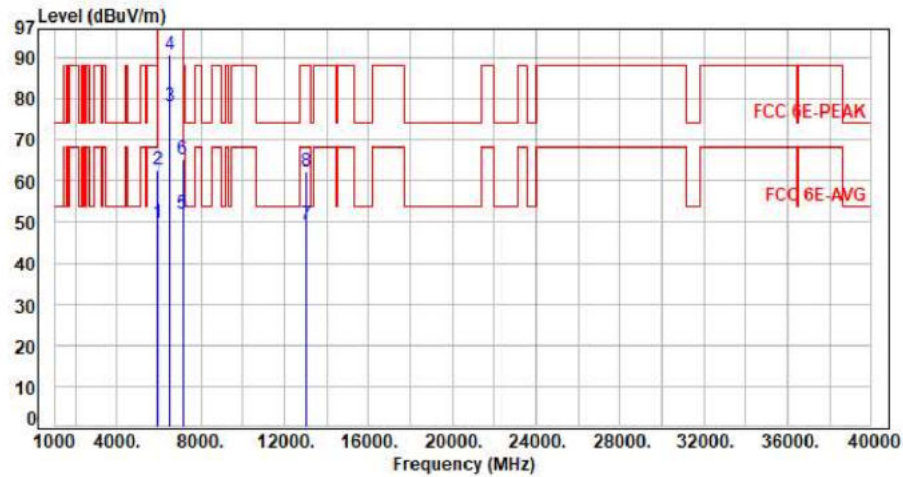

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.01          | 49.67          | 68.20          | -18.53      | Average  | 100         | 313           | P   |
| 2   | 5925.00         | 7.66        | 55.08          | 62.74          | 88.20          | -25.46      | Peak     | 100         | 313           | P   |
| 3   | 6505.00         | 8.37        | 69.83          | 78.20          | 200.00         | -121.80     | Average  | 100         | 313           | P   |
| 4   | 6505.00         | 8.37        | 82.31          | 90.68          | 200.00         | -109.32     | Peak     | 100         | 313           | P   |
| 5   | 7125.00         | 10.05       | 41.80          | 51.85          | 68.20          | -16.35      | Average  | 100         | 313           | P   |
| 6   | 7125.00         | 10.05       | 55.36          | 65.41          | 88.20          | -22.79      | Peak     | 100         | 313           | P   |
| 7   | 13010.00        | 19.69       | 29.87          | 49.56          | 68.20          | -18.64      | Average  | 100         | 166           | P   |
| 8   | 13010.00        | 19.69       | 42.78          | 62.47          | 88.20          | -25.73      | Peak     | 100         | 166           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

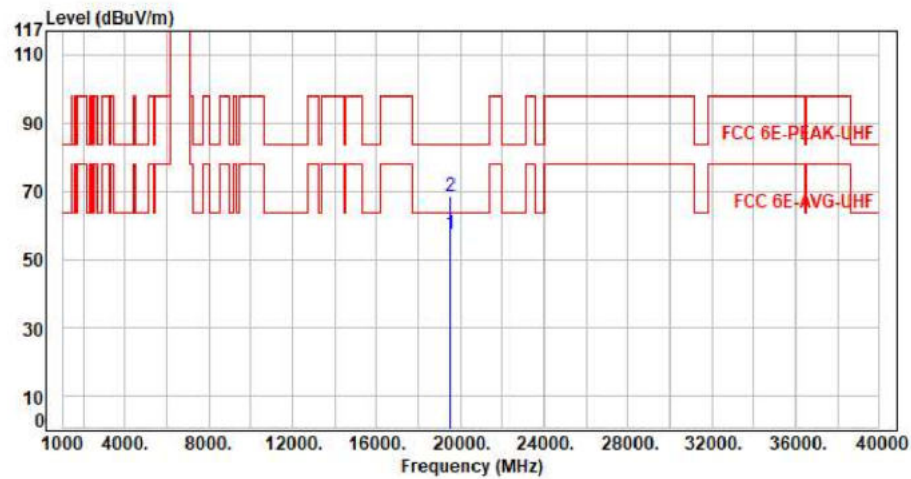


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19515.00           | 11.91          | 45.28             | 57.19             | 63.54             | -6.35          | Average  | 150            | 360              | P   |
| 2   | 19515.00           | 11.91          | 56.81             | 68.72             | 83.54             | -14.82         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

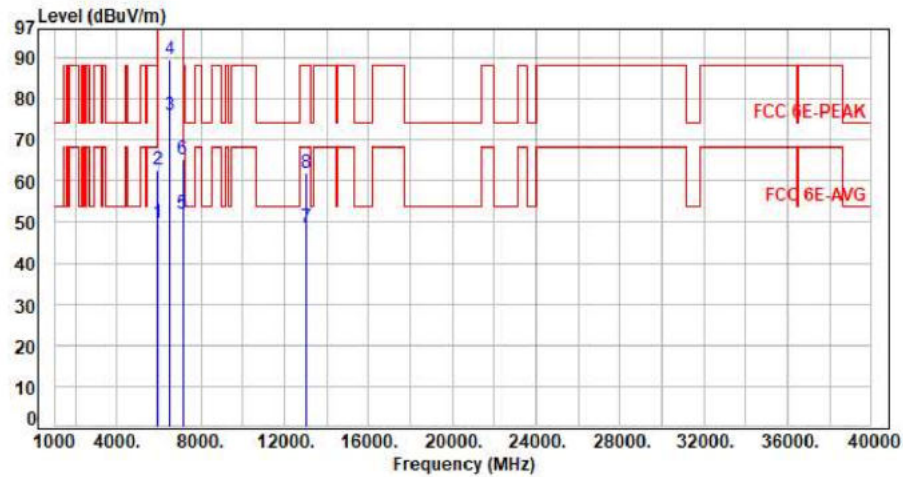

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.03          | 49.69          | 68.20          | -18.51      | Average  | 112         | 90            | P   |
| 2   | 5925.00         | 7.66        | 55.14          | 62.80          | 88.20          | -25.40      | Peak     | 112         | 90            | P   |
| 3   | 6505.00         | 8.37        | 67.57          | 75.94          | 200.00         | -124.06     | Average  | 112         | 90            | P   |
| 4   | 6505.00         | 8.37        | 81.36          | 89.73          | 200.00         | -110.27     | Peak     | 112         | 90            | P   |
| 5   | 7125.00         | 10.05       | 41.84          | 51.89          | 68.20          | -16.31      | Average  | 112         | 90            | P   |
| 6   | 7125.00         | 10.05       | 55.16          | 65.21          | 88.20          | -22.99      | Peak     | 112         | 90            | P   |
| 7   | 13010.00        | 19.69       | 29.09          | 48.78          | 68.20          | -19.42      | Average  | 100         | 198           | P   |
| 8   | 13010.00        | 19.69       | 42.17          | 61.86          | 88.20          | -26.34      | Peak     | 100         | 198           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x160 CH111 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

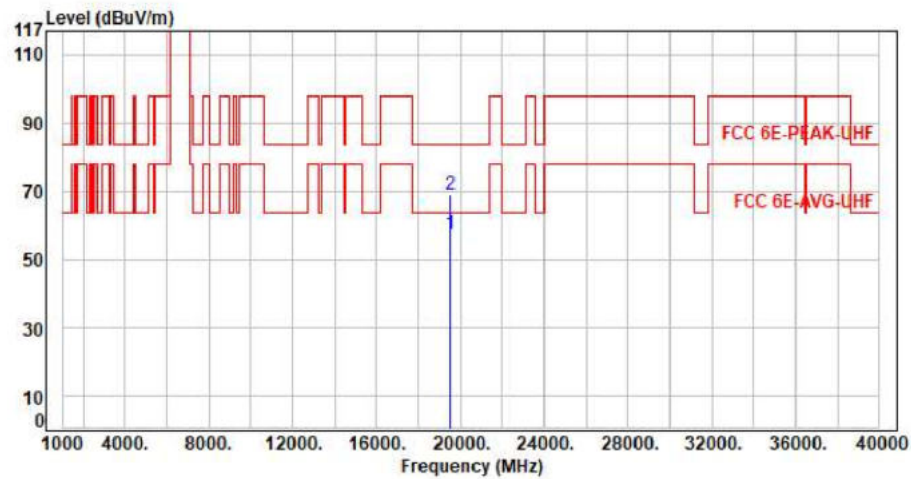


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19515.00           | 11.91          | 45.28             | 57.19             | 63.54             | -6.35          | Average  | 150            | 360              | P   |
| 2   | 19515.00           | 11.91          | 56.92             | 68.83             | 83.54             | -14.71         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

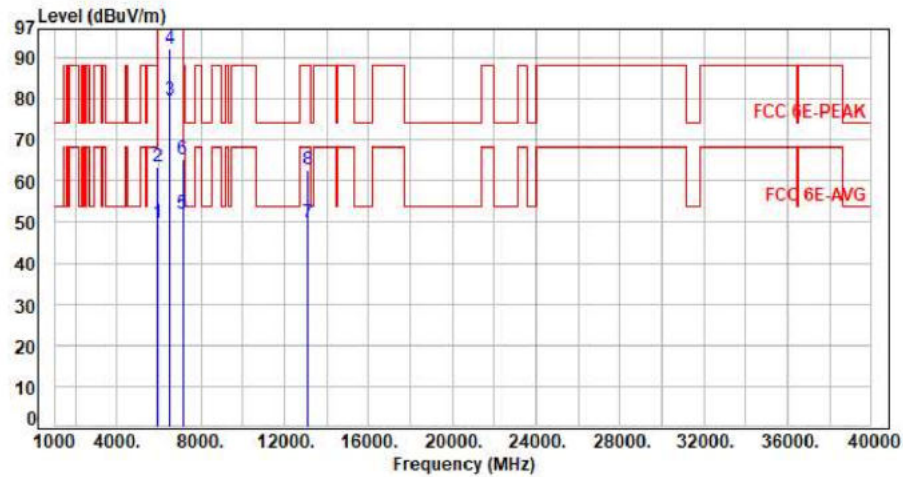

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.23          | 49.89          | 68.20          | -18.31      | Average  | 325         | 312           | P   |
| 2   | 5925.00         | 7.66        | 55.74          | 63.40          | 88.20          | -24.80      | Peak     | 325         | 312           | P   |
| 3   | 6535.00         | 8.50        | 71.04          | 79.54          | 200.00         | -120.46     | Average  | 325         | 312           | P   |
| 4   | 6535.00         | 8.50        | 83.80          | 92.30          | 200.00         | -107.70     | Peak     | 325         | 312           | P   |
| 5   | 7125.00         | 10.05       | 41.84          | 51.89          | 68.20          | -16.31      | Average  | 325         | 312           | P   |
| 6   | 7125.00         | 10.05       | 55.29          | 65.34          | 88.20          | -22.86      | Peak     | 325         | 312           | P   |
| 7   | 13070.00        | 20.11       | 29.61          | 49.72          | 68.20          | -18.48      | Average  | 100         | 123           | P   |
| 8   | 13070.00        | 20.11       | 42.68          | 62.79          | 88.20          | -25.41      | Peak     | 100         | 123           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

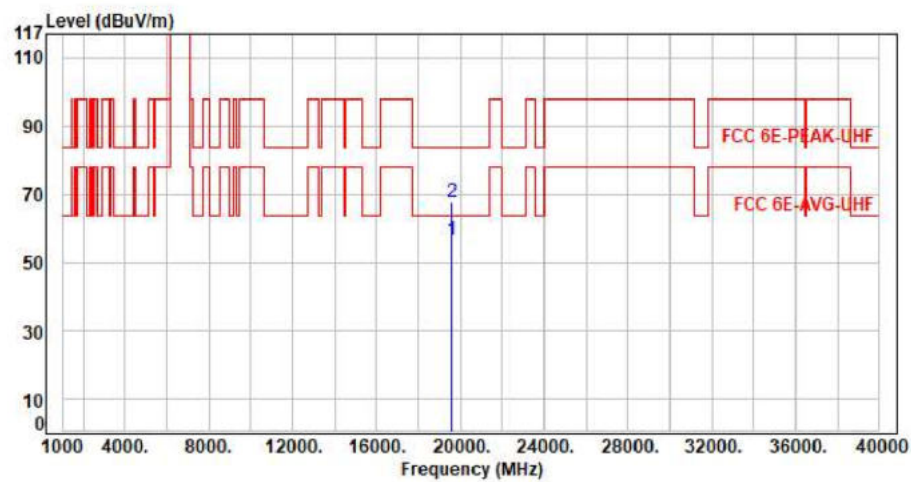

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19605.00           | 11.78          | 44.75             | 56.53             | 63.54             | -7.01          | Average  | 150            | 360              | P   |
| 2   | 19605.00           | 11.78          | 55.85             | 67.63             | 83.54             | -15.91         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

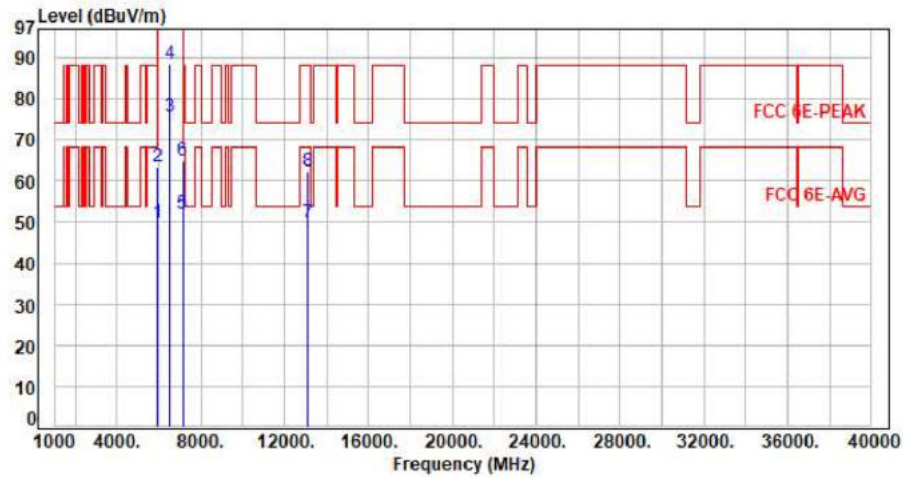


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.09          | 49.75          | 68.20          | -18.45      | Average  | 130         | 91            | P   |
| 2   | 5925.00         | 7.66        | 55.63          | 63.29          | 88.20          | -24.91      | Peak     | 130         | 91            | P   |
| 3   | 6535.00         | 8.50        | 67.24          | 75.74          | 200.00         | -124.26     | Average  | 130         | 91            | P   |
| 4   | 6535.00         | 8.50        | 79.92          | 88.42          | 200.00         | -111.58     | Peak     | 130         | 91            | P   |
| 5   | 7125.00         | 10.05       | 41.87          | 51.92          | 68.20          | -16.28      | Average  | 130         | 91            | P   |
| 6   | 7125.00         | 10.05       | 55.00          | 65.05          | 88.20          | -23.15      | Peak     | 130         | 91            | P   |
| 7   | 13070.00        | 20.11       | 29.66          | 49.77          | 68.20          | -18.43      | Average  | 100         | 152           | P   |
| 8   | 13070.00        | 20.11       | 42.17          | 62.28          | 88.20          | -25.92      | Peak     | 100         | 152           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

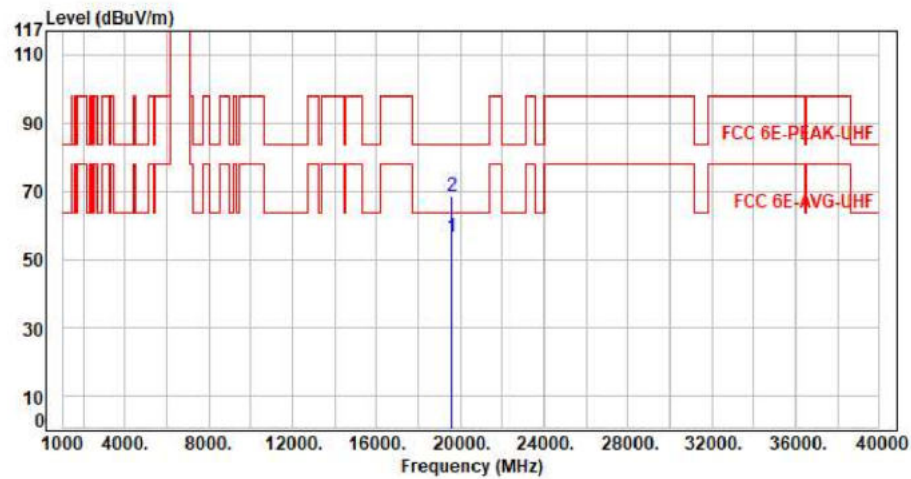


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19605.00           | 11.78          | 44.82             | 56.60             | 63.54             | -6.94          | Average  | 150            | 360              | P   |
| 2   | 19605.00           | 11.78          | 56.69             | 68.47             | 83.54             | -15.07         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

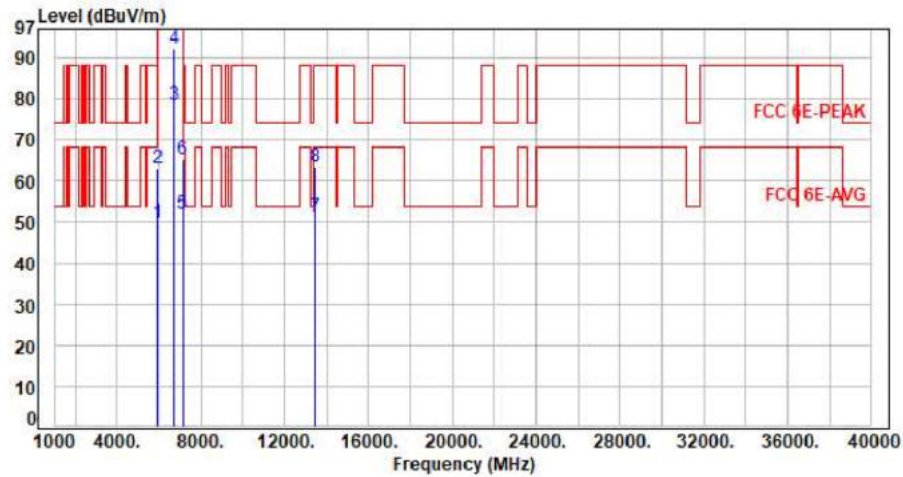

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 41.95             | 49.61             | 68.20             | -18.59         | Average  | 100            | 66               | P   |
| 2   | 5925.00            | 7.66           | 55.23             | 62.89             | 88.20             | -25.31         | Peak     | 100            | 66               | P   |
| 3   | 6715.00            | 9.29           | 69.41             | 78.70             | 200.00            | -121.30        | Average  | 100            | 66               | P   |
| 4   | 6715.00            | 9.29           | 82.87             | 92.16             | 200.00            | -107.84        | Peak     | 100            | 66               | P   |
| 5   | 7125.00            | 10.05          | 41.94             | 51.99             | 68.20             | -16.21         | Average  | 100            | 66               | P   |
| 6   | 7125.00            | 10.05          | 55.25             | 65.30             | 88.20             | -22.90         | Peak     | 100            | 66               | P   |
| 7   | 13430.00           | 21.71          | 29.64             | 51.35             | 68.20             | -16.85         | Average  | 100            | 142              | P   |
| 8   | 13430.00           | 21.71          | 41.69             | 63.40             | 88.20             | -24.80         | Peak     | 100            | 142              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

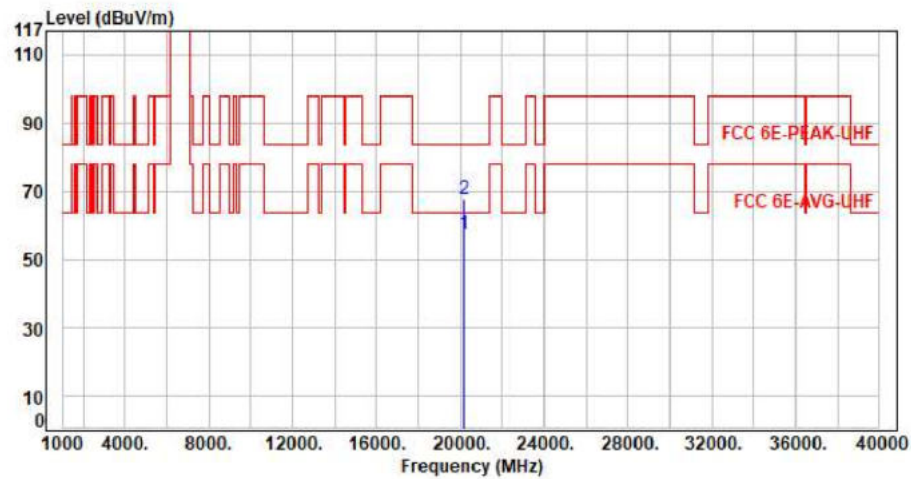


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20145.00           | 11.43          | 45.74             | 57.17             | 63.54             | -6.37          | Average  | 150            | 360              | P   |
| 2   | 20145.00           | 11.43          | 56.30             | 67.73             | 83.54             | -15.81         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

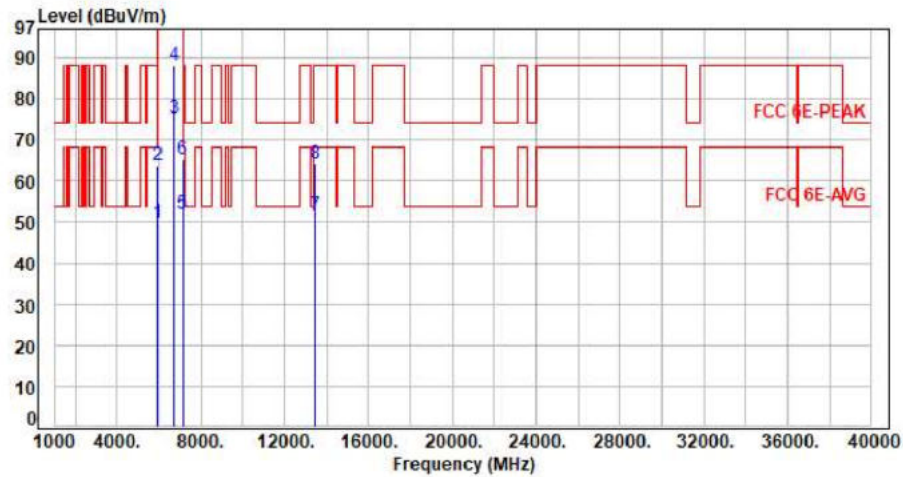

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.01          | 49.67          | 68.20          | -18.53      | Average  | 119         | 90            | P   |
| 2   | 5925.00         | 7.66        | 56.27          | 63.93          | 88.20          | -24.27      | Peak     | 119         | 90            | P   |
| 3   | 6715.00         | 9.29        | 65.86          | 75.15          | 200.00         | -124.85     | Average  | 119         | 90            | P   |
| 4   | 6715.00         | 9.29        | 78.93          | 88.22          | 200.00         | -111.78     | Peak     | 119         | 90            | P   |
| 5   | 7125.00         | 10.05       | 41.88          | 51.93          | 68.20          | -16.27      | Average  | 119         | 90            | P   |
| 6   | 7125.00         | 10.05       | 55.10          | 65.15          | 88.20          | -23.05      | Peak     | 119         | 90            | P   |
| 7   | 13430.00        | 21.71       | 29.88          | 51.59          | 68.20          | -16.61      | Average  | 100         | 146           | P   |
| 8   | 13430.00        | 21.71       | 42.61          | 64.32          | 88.20          | -23.88      | Peak     | 100         | 146           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH153 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

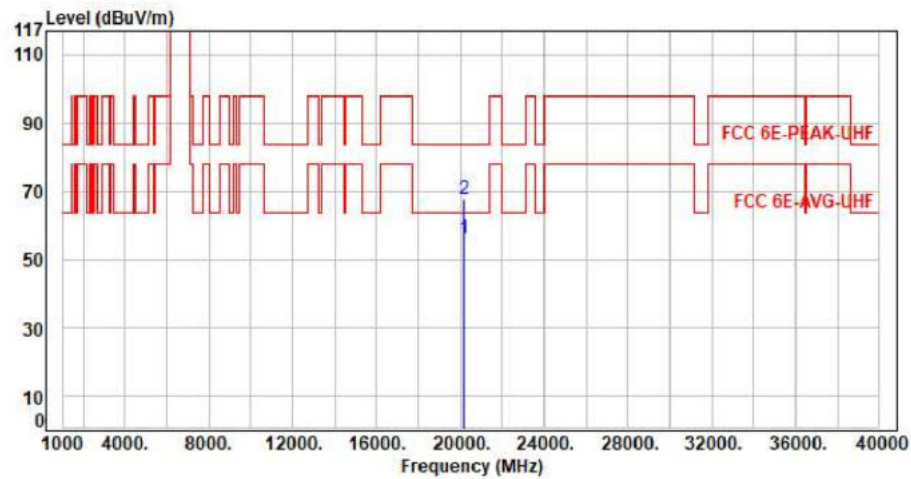


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20145.00           | 11.43          | 44.47             | 55.90             | 63.54             | -7.64          | Average  | 150            | 360              | P   |
| 2   | 20145.00           | 11.43          | 56.21             | 67.64             | 83.54             | -15.90         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

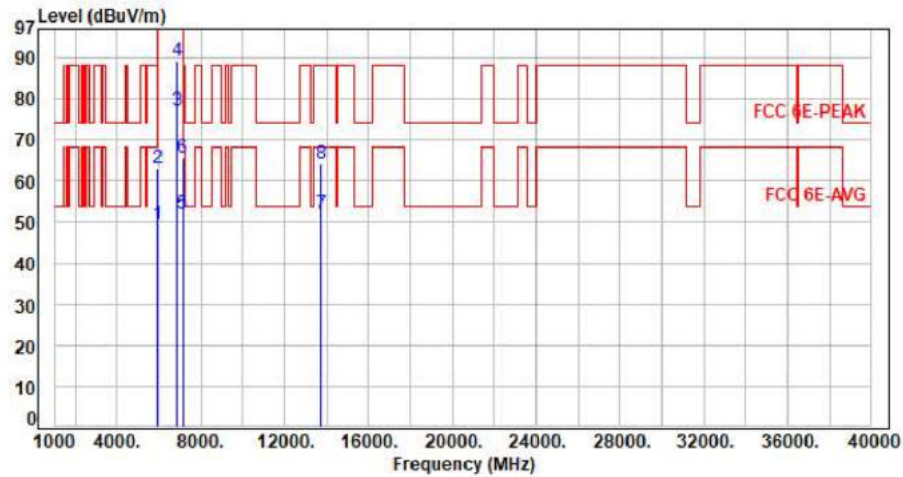

| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.91          | 49.57          | 68.20          | -18.63      | Average  | 103         | 320           | P   |
| 2   | 5925.00         | 7.66        | 55.57          | 63.23          | 88.20          | -24.97      | Peak     | 103         | 320           | P   |
| 3   | 6855.00         | 9.50        | 67.70          | 77.20          | 200.00         | -122.80     | Average  | 103         | 320           | P   |
| 4   | 6855.00         | 9.50        | 79.85          | 89.35          | 200.00         | -110.65     | Peak     | 103         | 320           | P   |
| 5   | 7125.00         | 10.05       | 41.86          | 51.91          | 68.20          | -16.29      | Average  | 103         | 320           | P   |
| 6   | 7125.00         | 10.05       | 55.71          | 65.76          | 88.20          | -22.44      | Peak     | 103         | 320           | P   |
| 7   | 13710.00        | 22.48       | 29.67          | 52.15          | 68.20          | -16.05      | Average  | 100         | 231           | P   |
| 8   | 13710.00        | 22.48       | 41.67          | 64.15          | 88.20          | -24.05      | Peak     | 100         | 231           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

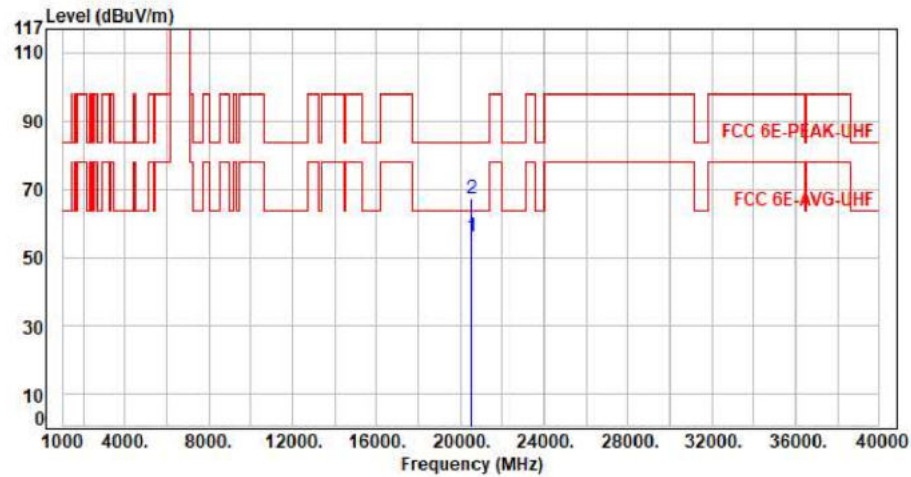


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20565.00           | 11.38          | 44.58             | 55.96             | 63.54             | -7.58          | Average  | 150            | 360              | P   |
| 2   | 20565.00           | 11.38          | 55.79             | 67.17             | 83.54             | -16.37         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

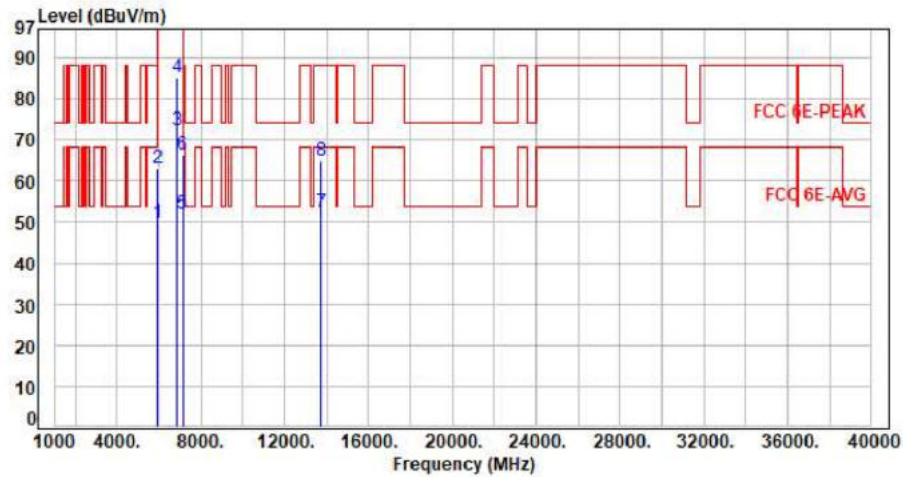


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.04          | 49.70          | 68.20          | -18.50      | Average  | 156         | 101           | P   |
| 2   | 5925.00         | 7.66        | 55.23          | 62.89          | 88.20          | -25.31      | Peak     | 156         | 101           | P   |
| 3   | 6855.00         | 9.50        | 62.61          | 72.11          | 200.00         | -127.89     | Average  | 156         | 101           | P   |
| 4   | 6855.00         | 9.50        | 75.60          | 85.10          | 200.00         | -114.90     | Peak     | 156         | 101           | P   |
| 5   | 7125.00         | 10.05       | 41.95          | 52.00          | 68.20          | -16.20      | Average  | 156         | 101           | P   |
| 6   | 7125.00         | 10.05       | 56.43          | 66.48          | 88.20          | -21.72      | Peak     | 156         | 101           | P   |
| 7   | 13710.00        | 22.48       | 29.79          | 52.27          | 68.20          | -15.93      | Average  | 100         | 260           | P   |
| 8   | 13710.00        | 22.48       | 42.37          | 64.85          | 88.20          | -23.35      | Peak     | 100         | 260           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

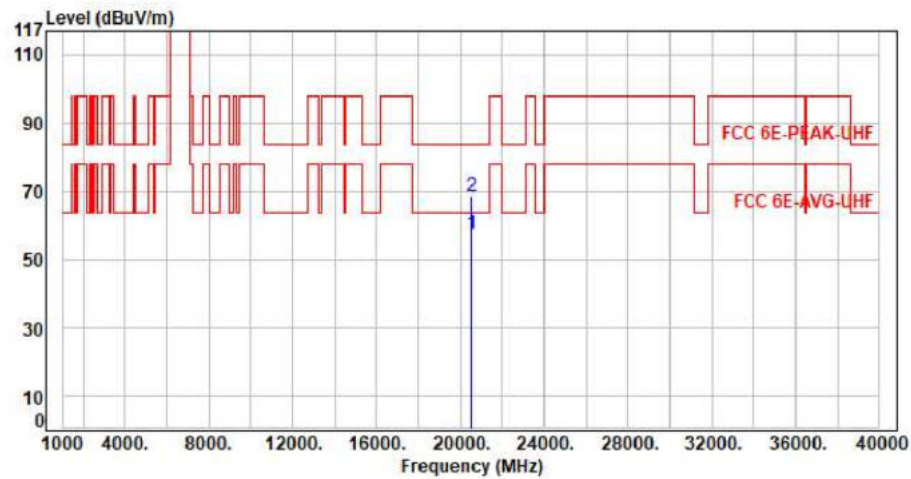


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20565.00           | 11.38          | 45.79             | 57.17             | 63.54             | -6.37          | Average  | 150            | 360              | P   |
| 2   | 20565.00           | 11.38          | 57.21             | 68.59             | 83.54             | -14.95         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

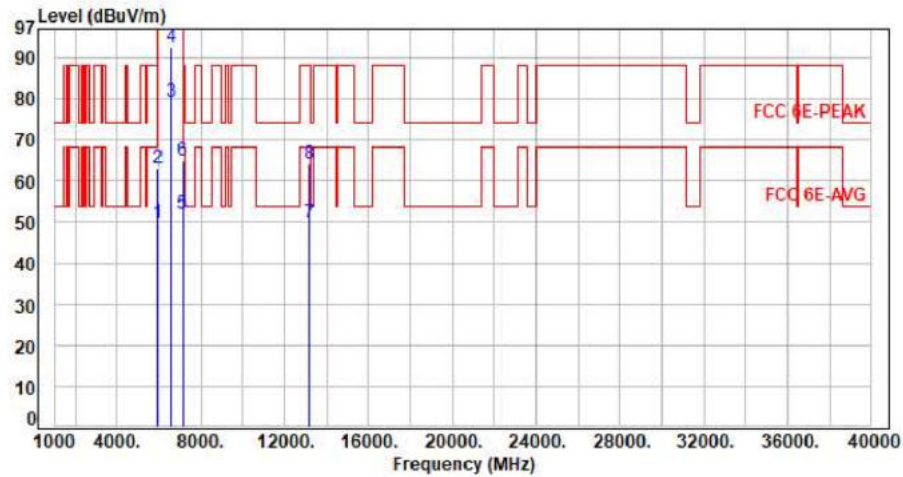

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.99          | 49.65          | 68.20          | -18.55      | Average  | 335         | 312           | P   |
| 2   | 5925.00         | 7.66        | 55.34          | 63.00          | 88.20          | -25.20      | Peak     | 335         | 312           | P   |
| 3   | 6565.00         | 8.67        | 70.71          | 79.38          | 200.00         | -120.62     | Average  | 335         | 312           | P   |
| 4   | 6565.00         | 8.67        | 84.03          | 92.70          | 200.00         | -107.30     | Peak     | 335         | 312           | P   |
| 5   | 7125.00         | 10.05       | 41.77          | 51.82          | 68.20          | -16.38      | Average  | 335         | 312           | P   |
| 6   | 7125.00         | 10.05       | 54.83          | 64.88          | 88.20          | -23.32      | Peak     | 335         | 312           | P   |
| 7   | 13130.00        | 20.32       | 29.44          | 49.76          | 68.20          | -18.44      | Average  | 100         | 143           | P   |
| 8   | 13130.00        | 20.32       | 43.81          | 64.13          | 88.20          | -24.07      | Peak     | 100         | 143           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor