




For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

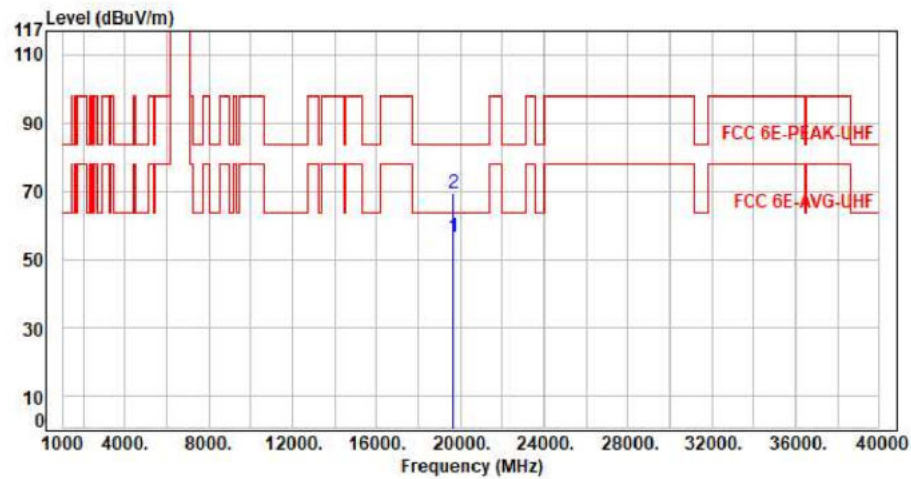


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.25	56.70	63.54	-6.84	Average	150	360	P
2	19695.00	11.45	57.84	69.29	83.54	-14.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

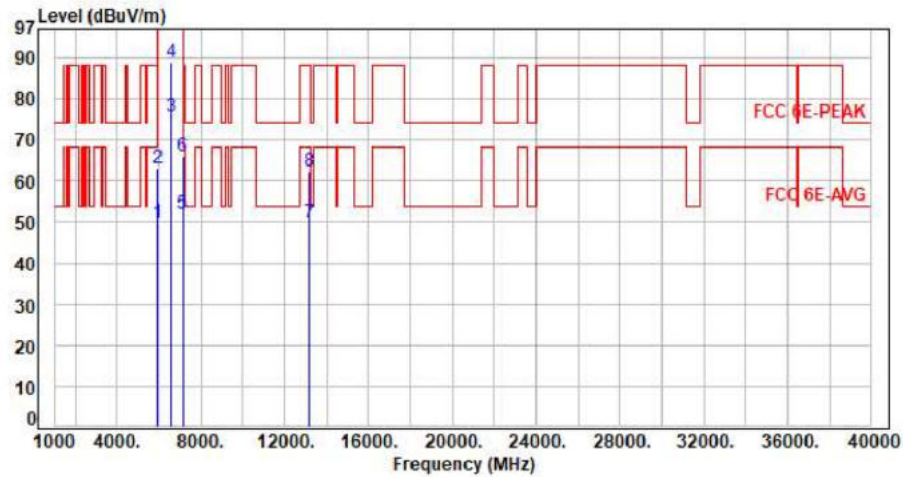

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.96	49.62	68.20	-18.58	Average	119	90	P
2	5925.00	7.66	55.41	63.07	88.20	-25.13	Peak	119	90	P
3	6565.00	8.67	66.95	75.62	200.00	-124.38	Average	119	90	P
4	6565.00	8.67	80.07	88.74	200.00	-111.26	Peak	119	90	P
5	7125.00	10.05	41.81	51.86	68.20	-16.34	Average	119	90	P
6	7125.00	10.05	55.96	66.01	88.20	-22.19	Peak	119	90	P
7	13130.00	20.32	29.63	49.95	68.20	-18.25	Average	100	237	P
8	13130.00	20.32	41.88	62.20	88.20	-26.00	Peak	100	237	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

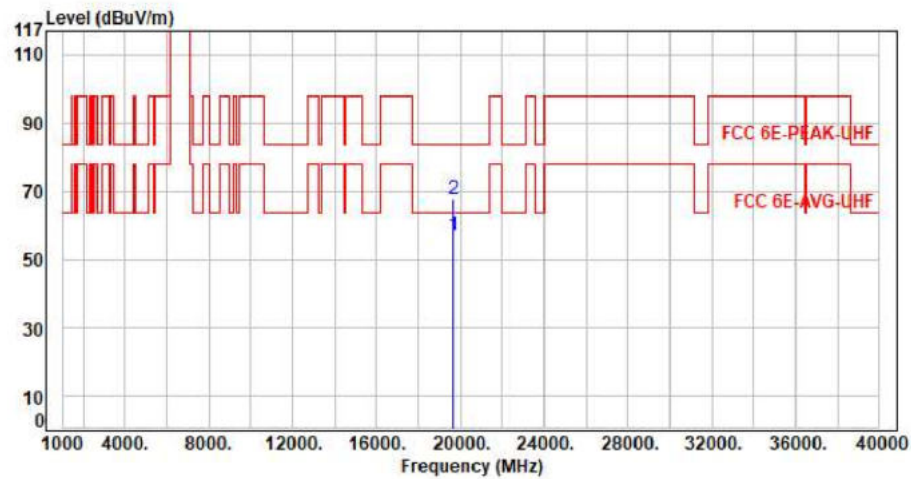


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.52	56.97	63.54	-6.57	Average	150	360	P
2	19695.00	11.45	56.11	67.56	83.54	-15.98	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

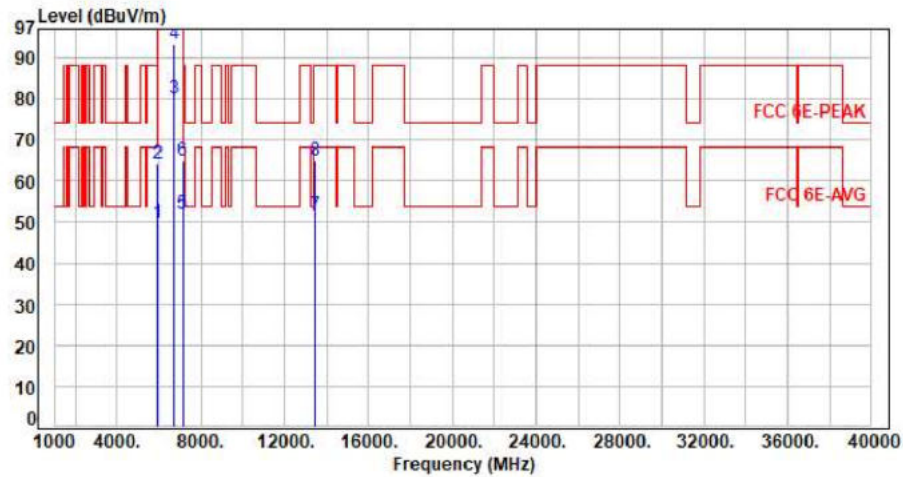

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.99	49.65	68.20	-18.55	Average	108	66	P
2	5925.00	7.66	56.56	64.22	88.20	-23.98	Peak	108	66	P
3	6725.00	9.33	70.58	79.91	200.00	-120.09	Average	108	66	P
4	6725.00	9.33	84.08	93.41	200.00	-106.59	Peak	108	66	P
5	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	108	66	P
6	7125.00	10.05	54.81	64.86	88.20	-23.34	Peak	108	66	P
7	13450.00	21.80	29.87	51.67	68.20	-16.53	Average	100	223	P
8	13450.00	21.80	42.98	64.78	88.20	-23.42	Peak	100	223	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

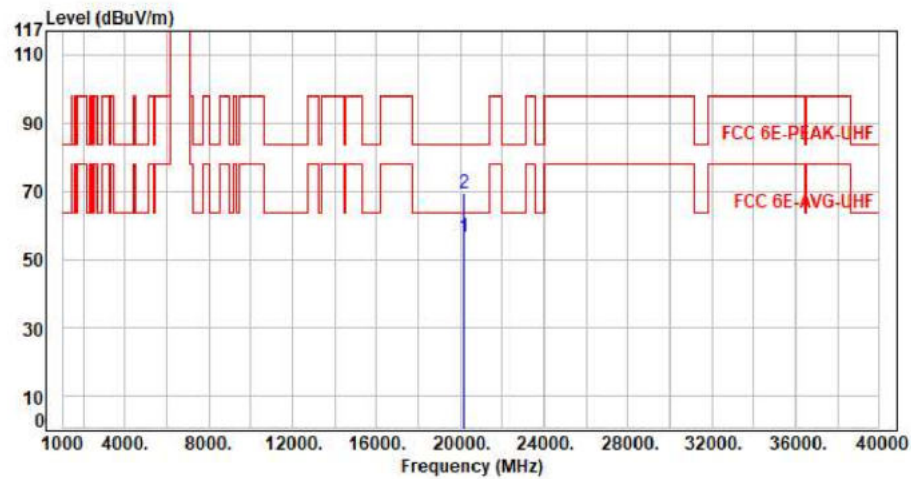


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.23	56.69	63.54	-6.85	Average	150	360	P
2	20175.00	11.46	57.96	69.42	83.54	-14.12	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

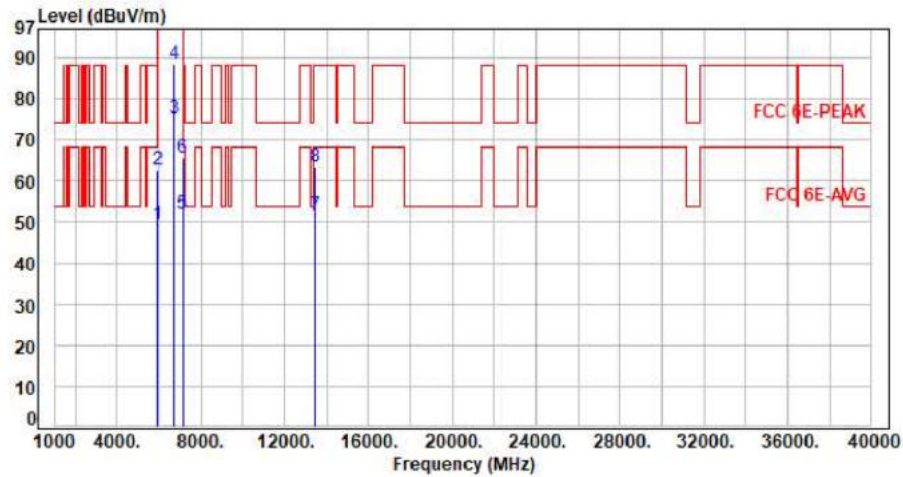

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.91	49.57	68.20	-18.63	Average	118	89	P
2	5925.00	7.66	54.88	62.54	88.20	-25.66	Peak	118	89	P
3	6725.00	9.33	65.85	75.18	200.00	-124.82	Average	118	89	P
4	6725.00	9.33	79.25	88.58	200.00	-111.42	Peak	118	89	P
5	7125.00	10.05	41.90	51.95	68.20	-16.25	Average	118	89	P
6	7125.00	10.05	55.53	65.58	88.20	-22.62	Peak	118	89	P
7	13450.00	21.80	29.83	51.63	68.20	-16.57	Average	100	171	P
8	13450.00	21.80	41.68	63.48	88.20	-24.72	Peak	100	171	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

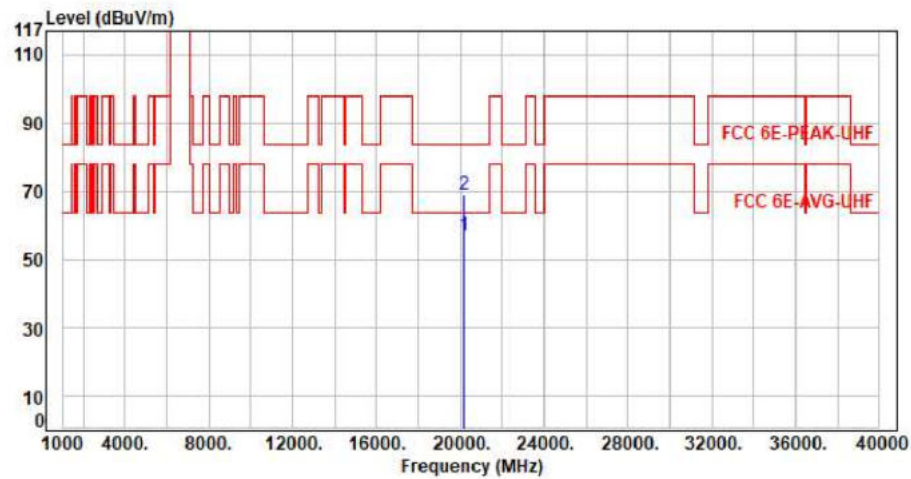


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.66	57.12	63.54	-6.42	Average	150	360	P
2	20175.00	11.46	57.56	69.02	83.54	-14.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

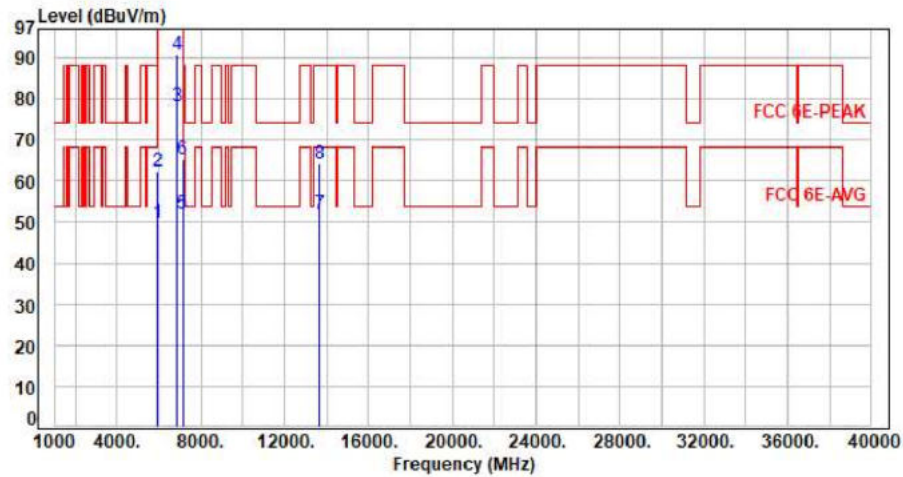


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.00	49.66	68.20	-18.54	Average	100	64	P
2	5925.00	7.66	54.60	62.26	88.20	-25.94	Peak	100	64	P
3	6845.00	9.48	68.81	78.29	200.00	-121.71	Average	100	64	P
4	6845.00	9.48	81.19	90.67	200.00	-109.33	Peak	100	64	P
5	7125.00	10.05	41.88	51.93	68.20	-16.27	Average	100	64	P
6	7125.00	10.05	55.29	65.34	88.20	-22.86	Peak	100	64	P
7	13690.00	22.40	29.60	52.00	68.20	-16.20	Average	100	142	P
8	13690.00	22.40	41.62	64.02	88.20	-24.18	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

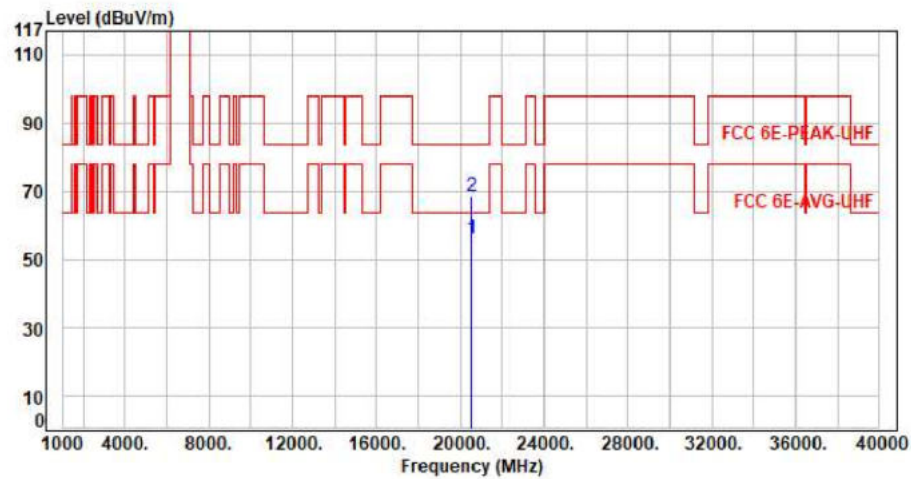

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.79	56.23	63.54	-7.31	Average	150	360	P
2	20535.00	11.44	57.09	68.53	83.54	-15.01	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

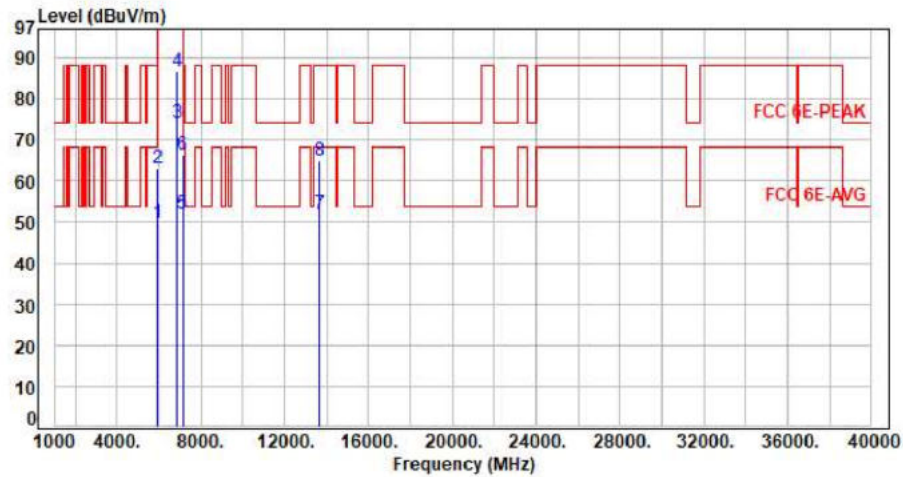

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	119	87	P
2	5925.00	7.66	55.35	63.01	88.20	-25.19	Peak	119	87	P
3	6845.00	9.48	64.60	74.08	200.00	-125.92	Average	119	87	P
4	6845.00	9.48	77.20	86.68	200.00	-113.32	Peak	119	87	P
5	7125.00	10.05	41.93	51.98	68.20	-16.22	Average	119	87	P
6	7125.00	10.05	56.24	66.29	88.20	-21.91	Peak	119	87	P
7	13690.00	22.40	29.62	52.02	68.20	-16.18	Average	100	141	P
8	13690.00	22.40	42.68	65.08	88.20	-23.12	Peak	100	141	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

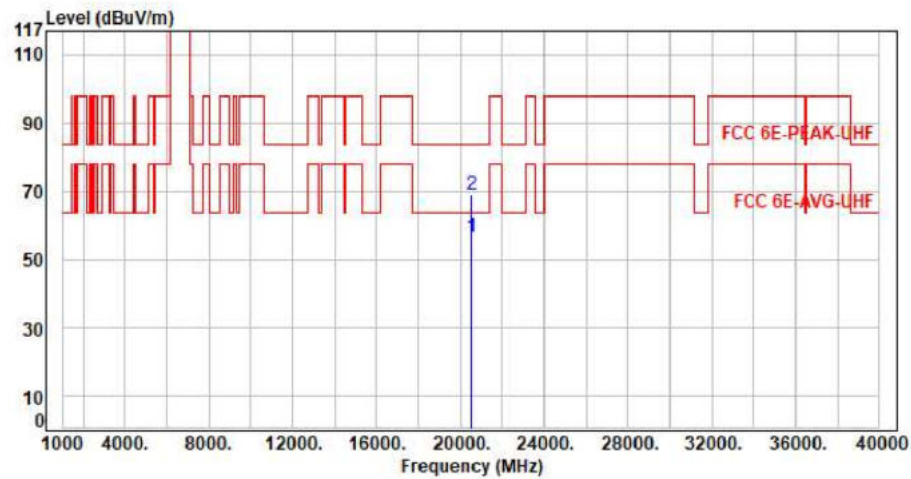

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	45.22	56.66	63.54	-6.88	Average	150	360	P
2	20535.00	11.44	57.73	69.17	83.54	-14.37	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

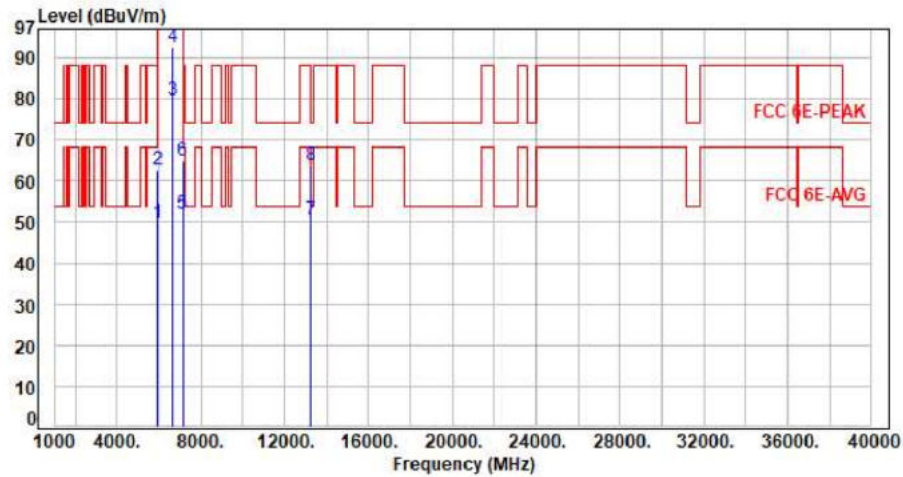

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.97	49.63	68.20	-18.57	Average	100	315	P
2	5925.00	7.66	55.18	62.84	88.20	-25.36	Peak	100	315	P
3	6625.00	8.94	70.65	79.59	200.00	-120.41	Average	100	315	P
4	6625.00	8.94	83.76	92.70	200.00	-107.30	Peak	100	315	P
5	7125.00	10.05	41.87	51.92	68.20	-16.28	Average	100	315	P
6	7125.00	10.05	54.90	64.95	88.20	-23.25	Peak	100	315	P
7	13250.00	21.00	29.64	50.64	54.00	-3.36	Average	100	121	P
8	13250.00	21.00	42.89	63.89	74.00	-10.11	Peak	100	121	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

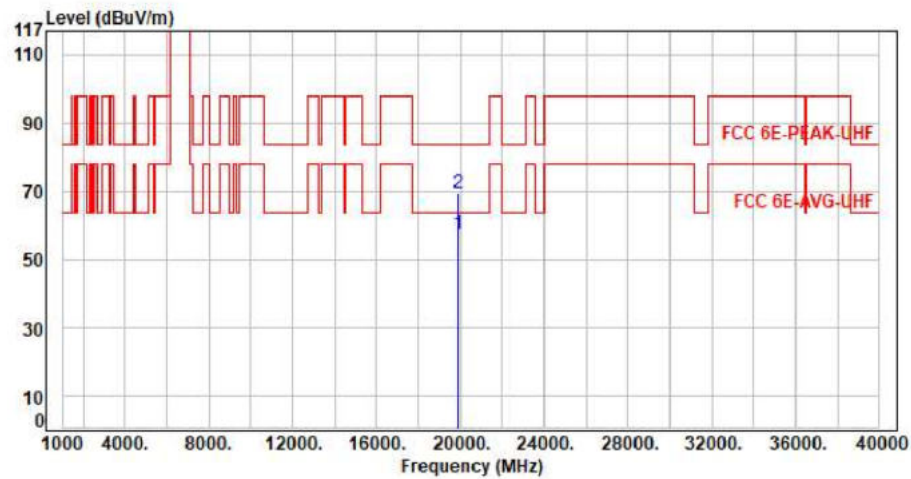


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.62	57.52	63.54	-6.02	Average	150	360	P
2	19875.00	11.90	57.51	69.41	83.54	-14.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

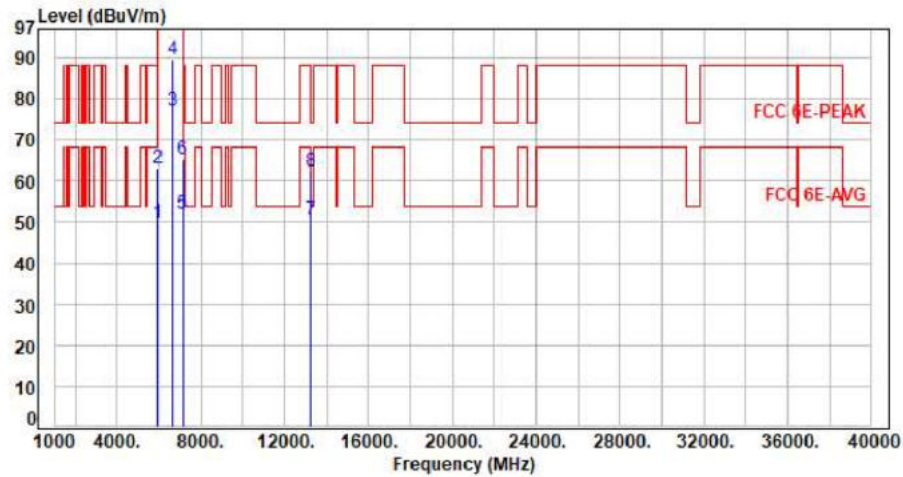


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.01	49.67	68.20	-18.53	Average	143	91	P
2	5925.00	7.66	55.59	63.25	88.20	-24.95	Peak	143	91	P
3	6625.00	8.94	68.13	77.07	200.00	-122.93	Average	143	91	P
4	6625.00	8.94	80.87	89.81	200.00	-110.19	Peak	143	91	P
5	7125.00	10.05	41.90	51.95	68.20	-16.25	Average	143	91	P
6	7125.00	10.05	55.17	65.22	88.20	-22.98	Peak	143	91	P
7	13250.00	21.00	29.55	50.55	54.00	-3.45	Average	100	318	P
8	13250.00	21.00	41.27	62.27	74.00	-11.73	Peak	100	318	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

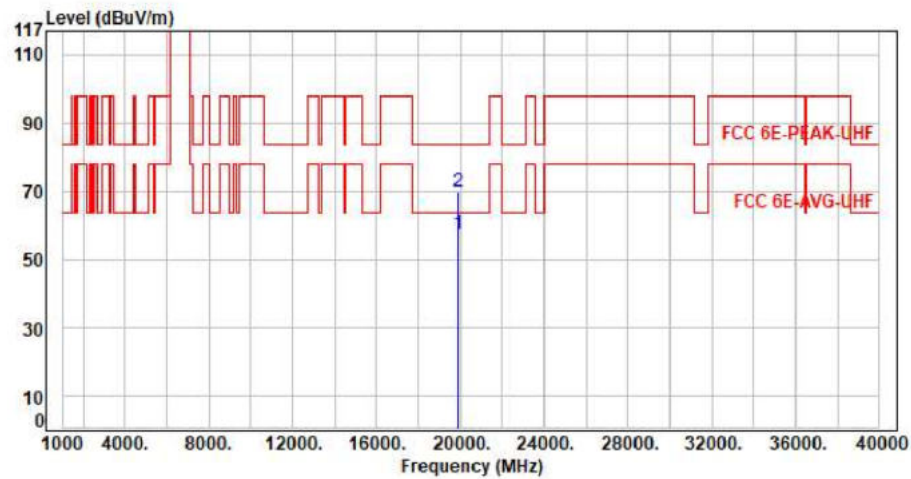


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.28	57.18	63.54	-6.36	Average	150	360	P
2	19875.00	11.90	57.74	69.64	83.54	-13.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

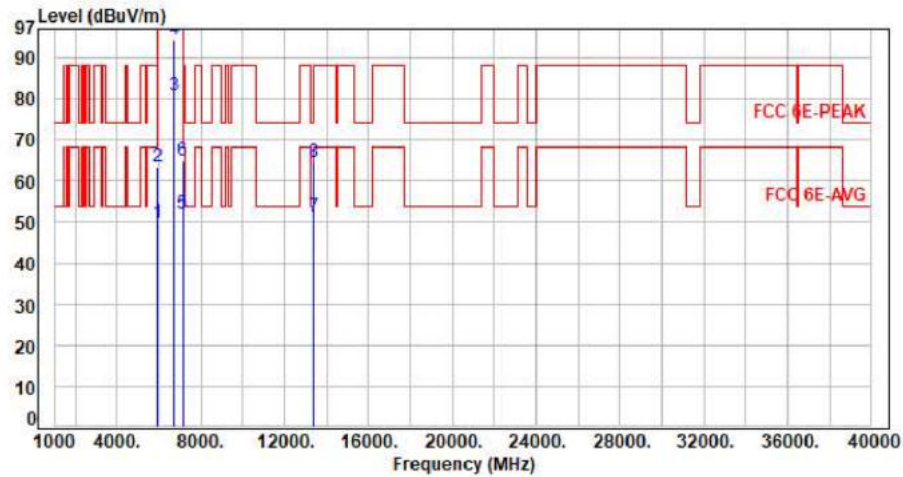


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.97	49.63	68.20	-18.57	Average	100	66	P
2	5925.00	7.66	55.73	63.39	88.20	-24.81	Peak	100	66	P
3	6705.00	9.25	71.58	80.83	200.00	-119.17	Average	100	66	P
4	6705.00	9.25	85.13	94.38	200.00	-105.62	Peak	100	66	P
5	7125.00	10.05	41.84	51.89	68.20	-16.31	Average	100	66	P
6	7125.00	10.05	54.93	64.98	88.20	-23.22	Peak	100	66	P
7	13410.00	21.62	29.66	51.28	68.20	-16.92	Average	100	133	P
8	13410.00	21.62	42.88	64.50	88.20	-23.70	Peak	100	133	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

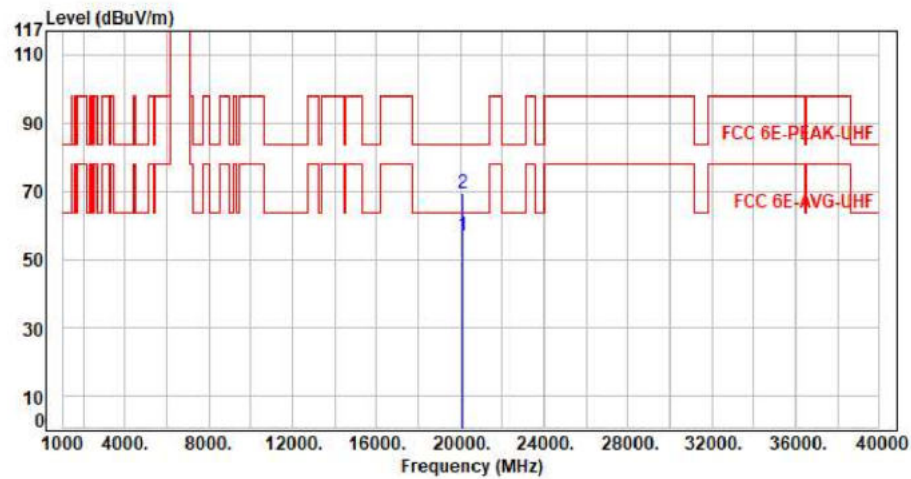


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.46	56.86	63.54	-6.68	Average	150	360	P
2	20115.00	11.40	57.86	69.26	83.54	-14.28	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

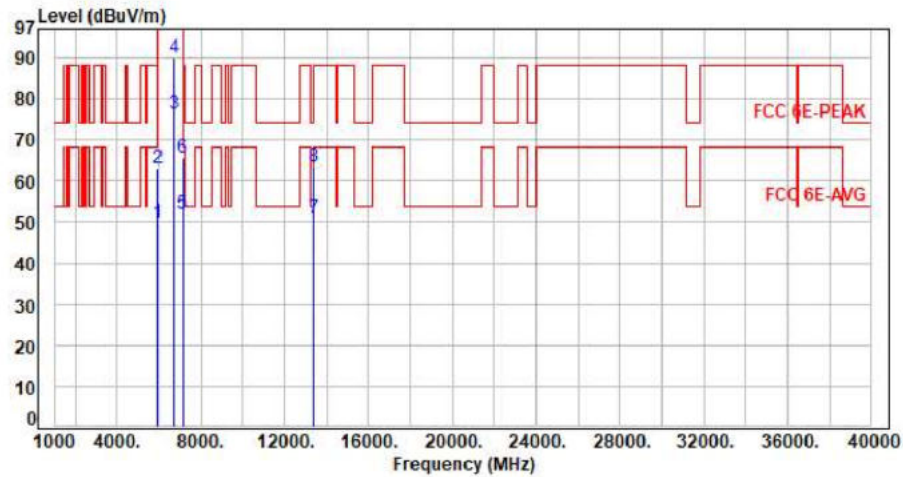

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.05	49.71	68.20	-18.49	Average	128	88	P
2	5925.00	7.66	55.26	62.92	88.20	-25.28	Peak	128	88	P
3	6705.00	9.25	67.10	76.35	200.00	-123.65	Average	128	88	P
4	6705.00	9.25	80.72	89.97	200.00	-110.03	Peak	128	88	P
5	7125.00	10.05	41.93	51.98	68.20	-16.22	Average	128	88	P
6	7125.00	10.05	55.49	65.54	88.20	-22.66	Peak	128	88	P
7	13410.00	21.62	29.44	51.06	68.20	-17.14	Average	100	242	P
8	13410.00	21.62	41.95	63.57	88.20	-24.63	Peak	100	242	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

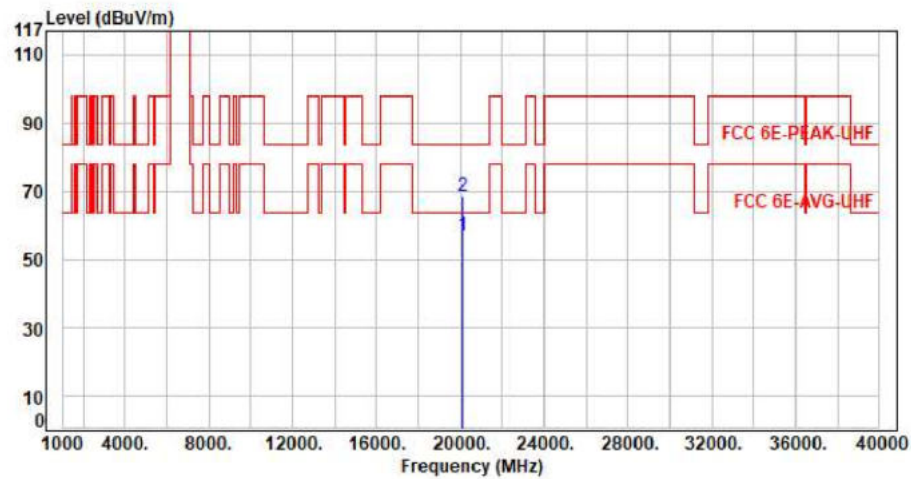


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.37	56.77	63.54	-6.77	Average	150	360	P
2	20115.00	11.40	56.93	68.33	83.54	-15.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

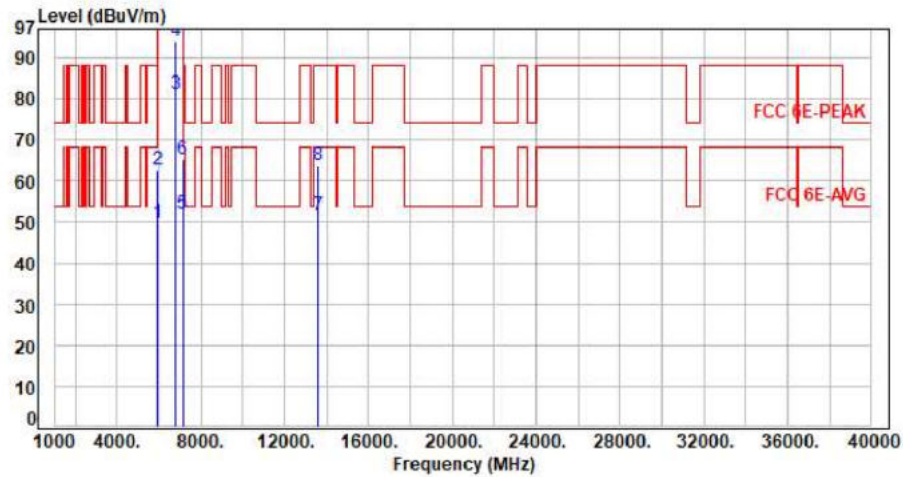

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	100	66	P
2	5925.00	7.66	55.17	62.83	88.20	-25.37	Peak	100	66	P
3	6785.00	9.46	71.66	81.12	200.00	-118.88	Average	100	66	P
4	6785.00	9.46	84.48	93.94	200.00	-106.06	Peak	100	66	P
5	7125.00	10.05	41.92	51.97	68.20	-16.23	Average	100	66	P
6	7125.00	10.05	55.18	65.23	88.20	-22.97	Peak	100	66	P
7	13570.00	22.06	29.67	51.73	68.20	-16.47	Average	100	142	P
8	13570.00	22.06	41.69	63.75	88.20	-24.45	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

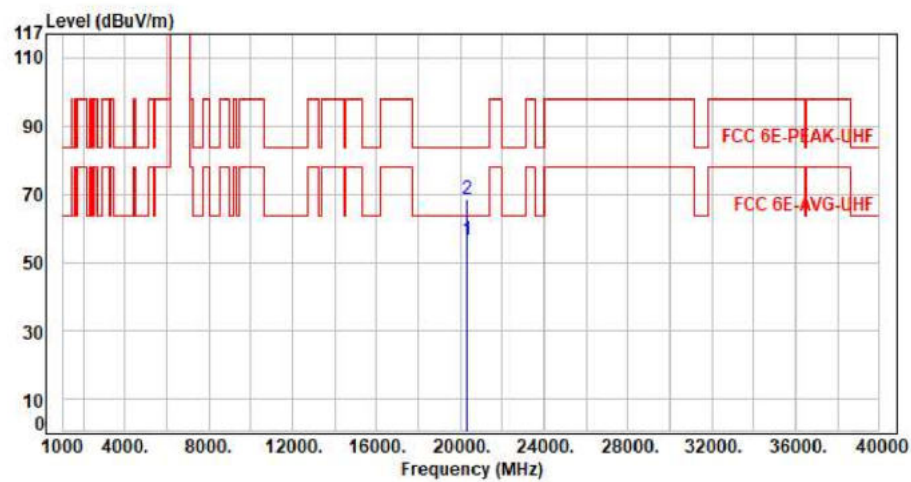

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.65	56.71	63.54	-6.83	Average	150	360	P
2	20355.00	11.06	57.55	68.61	83.54	-14.93	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

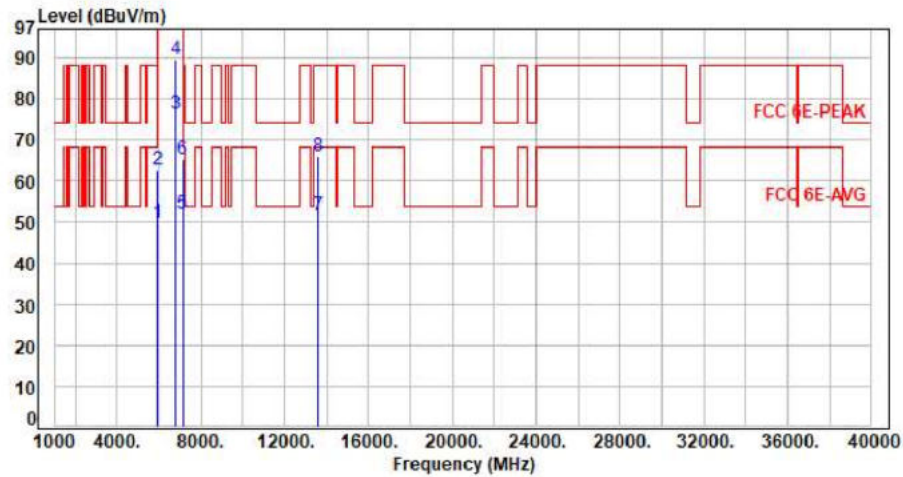

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	119	89	P
2	5925.00	7.66	55.17	62.83	88.20	-25.37	Peak	119	89	P
3	6785.00	9.46	66.86	76.32	200.00	-123.68	Average	119	89	P
4	6785.00	9.46	80.20	89.66	200.00	-110.34	Peak	119	89	P
5	7125.00	10.05	42.01	52.06	68.20	-16.14	Average	119	89	P
6	7125.00	10.05	55.10	65.15	88.20	-23.05	Peak	119	89	P
7	13570.00	22.06	29.67	51.73	68.20	-16.47	Average	100	172	P
8	13570.00	22.06	44.11	66.17	88.20	-22.03	Peak	100	172	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

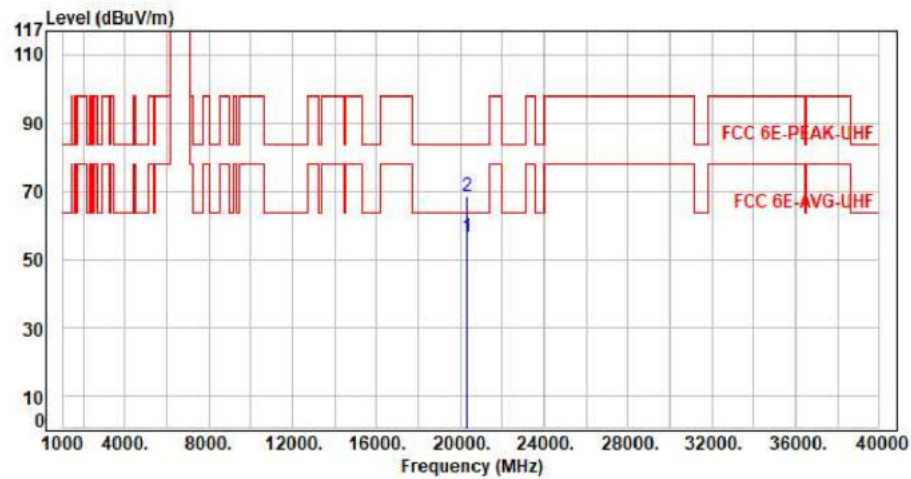


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.41	56.47	63.54	-7.07	Average	150	360	P
2	20355.00	11.06	57.25	68.31	83.54	-15.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

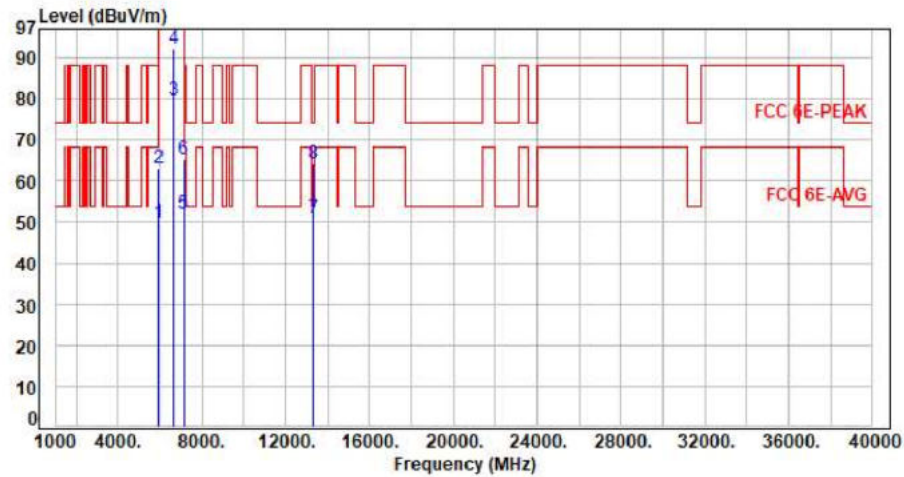

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.02	49.68	68.20	-18.52	Average	102	66	P
2	5925.00	7.66	55.41	63.07	88.20	-25.13	Peak	102	66	P
3	6665.00	9.08	70.49	79.57	200.00	-120.43	Average	102	66	P
4	6665.00	9.08	83.24	92.32	200.00	-107.68	Peak	102	66	P
5	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	102	66	P
6	7125.00	10.05	55.41	65.46	88.20	-22.74	Peak	102	66	P
7	13330.00	21.30	29.65	50.95	54.00	-3.05	Average	100	144	P
8	13330.00	21.30	42.82	64.12	74.00	-9.88	Peak	100	144	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

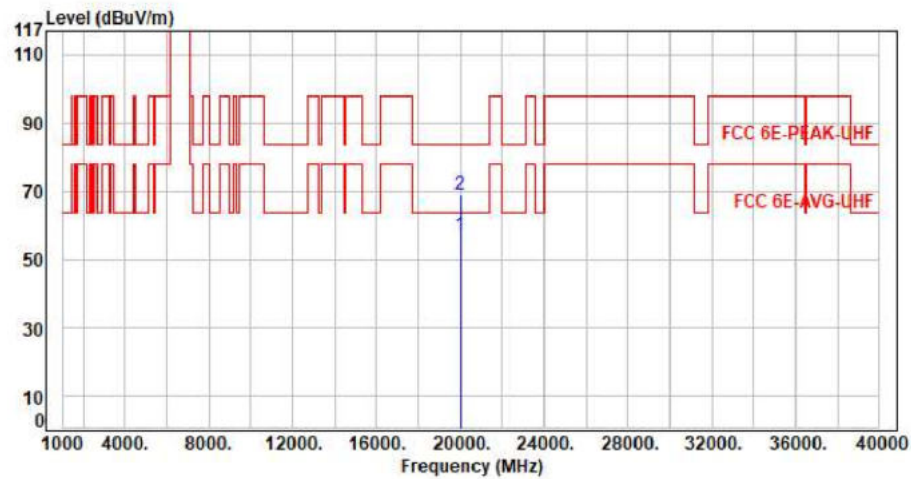


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.38	57.08	63.54	-6.46	Average	150	360	P
2	19995.00	11.70	57.29	68.99	83.54	-14.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

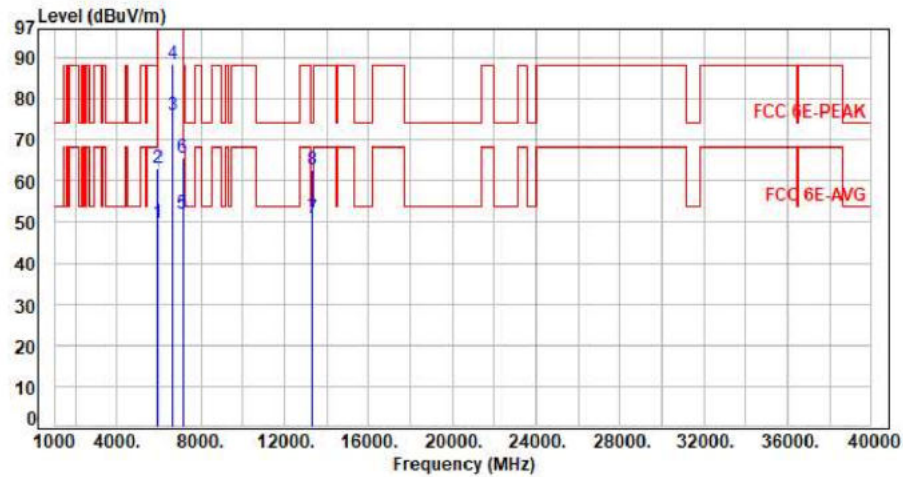

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.05	49.71	68.20	-18.49	Average	133	89	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	133	89	P
3	6665.00	9.08	67.05	76.13	200.00	-123.87	Average	133	89	P
4	6665.00	9.08	79.29	88.37	200.00	-111.63	Peak	133	89	P
5	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	133	89	P
6	7125.00	10.05	55.68	65.73	88.20	-22.47	Peak	133	89	P
7	13330.00	21.30	29.52	50.82	54.00	-3.18	Average	100	351	P
8	13330.00	21.30	41.34	62.64	74.00	-11.36	Peak	100	351	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

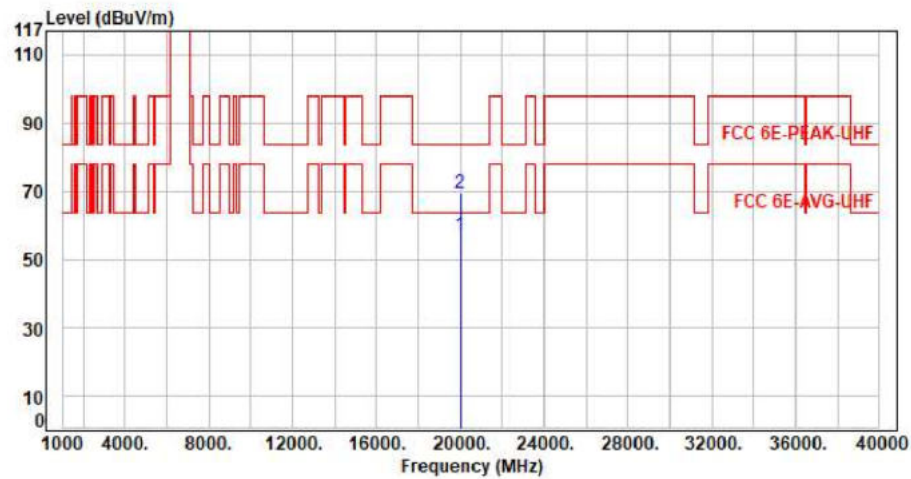


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.15	56.85	63.54	-6.69	Average	150	360	P
2	19995.00	11.70	57.91	69.61	83.54	-13.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

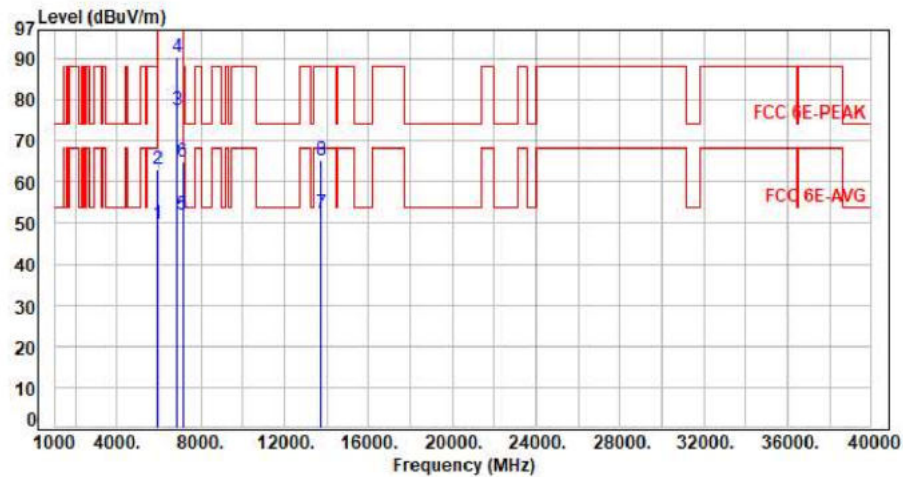


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.97	49.63	68.20	-18.57	Average	100	304	P
2	5925.00	7.66	55.49	63.15	88.20	-25.05	Peak	100	304	P
3	6875.00	9.55	67.76	77.31	200.00	-122.69	Average	100	304	P
4	6875.00	9.55	80.71	90.26	200.00	-109.74	Peak	100	304	P
5	7125.00	10.05	41.79	51.84	68.20	-16.36	Average	100	304	P
6	7125.00	10.05	54.87	64.92	88.20	-23.28	Peak	100	304	P
7	13750.00	22.65	29.64	52.29	68.20	-15.91	Average	100	156	P
8	13750.00	22.65	42.68	65.33	88.20	-22.87	Peak	100	156	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

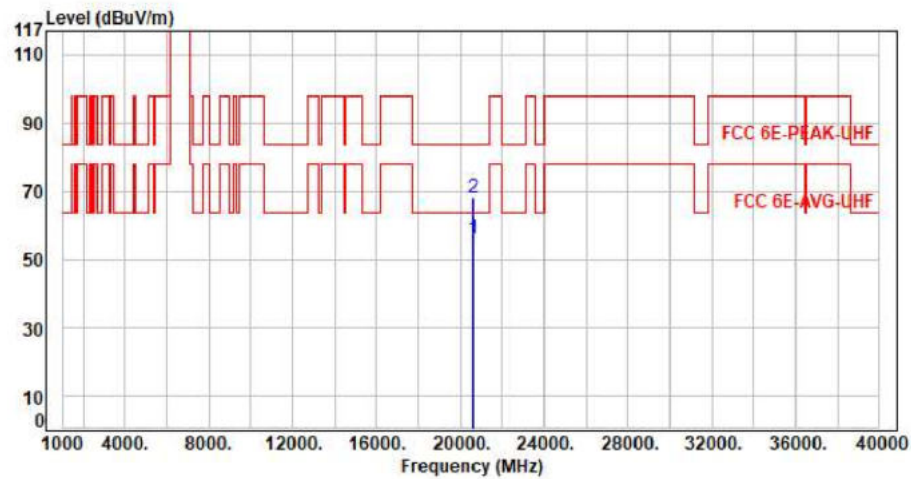


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	44.83	55.97	63.54	-7.57	Average	150	360	P
2	20625.00	11.14	56.99	68.13	83.54	-15.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

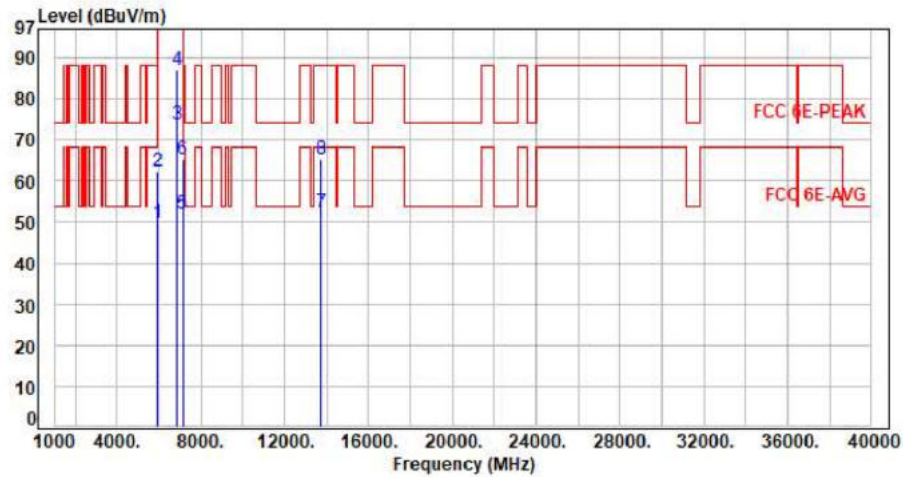

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.03	49.69	68.20	-18.51	Average	123	88	P
2	5925.00	7.66	54.76	62.42	88.20	-25.78	Peak	123	88	P
3	6875.00	9.55	64.17	73.72	200.00	-126.28	Average	123	88	P
4	6875.00	9.55	77.31	86.86	200.00	-113.14	Peak	123	88	P
5	7125.00	10.05	41.91	51.96	68.20	-16.24	Average	123	88	P
6	7125.00	10.05	55.10	65.15	88.20	-23.05	Peak	123	88	P
7	13750.00	22.65	29.67	52.32	68.20	-15.88	Average	100	142	P
8	13750.00	22.65	42.77	65.42	88.20	-22.78	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

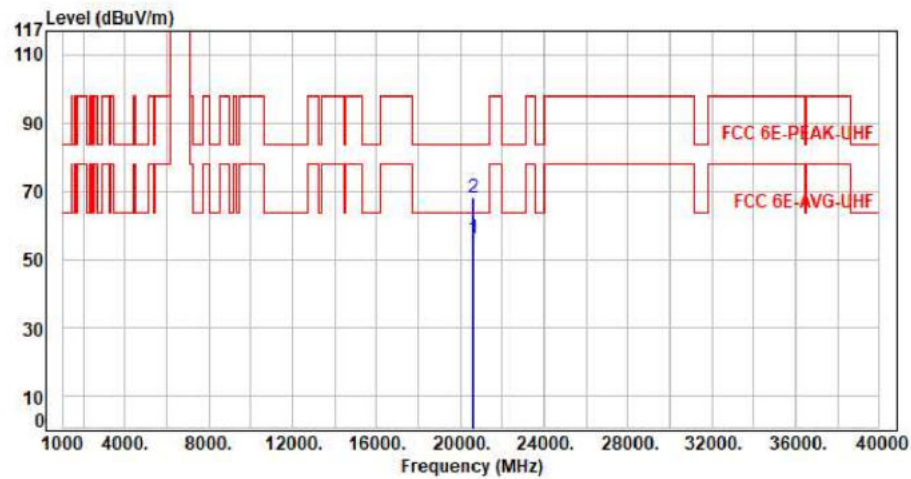


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.05	56.19	63.54	-7.35	Average	150	360	P
2	20625.00	11.14	57.08	68.22	83.54	-15.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

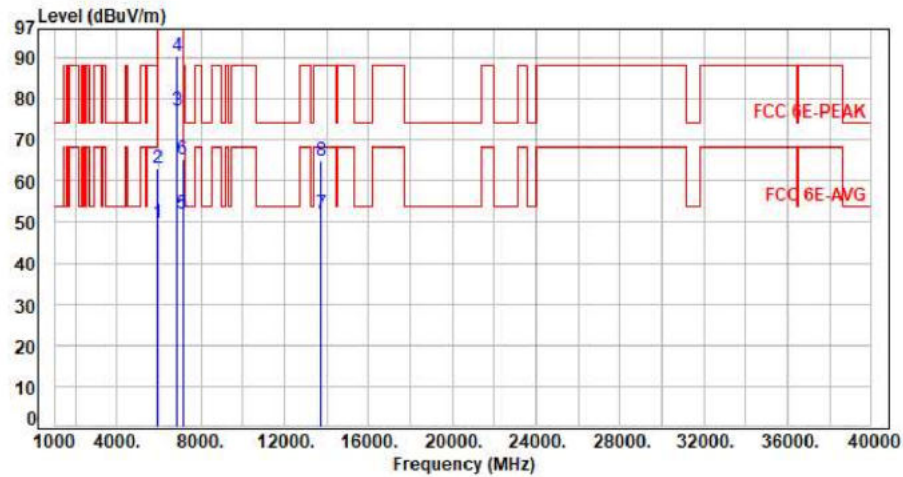


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	119	305	P
2	5925.00	7.66	55.40	63.06	88.20	-25.14	Peak	119	305	P
3	6885.00	9.56	67.48	77.04	200.00	-122.96	Average	119	305	P
4	6885.00	9.56	80.97	90.53	200.00	-109.47	Peak	119	305	P
5	7125.00	10.05	41.80	51.85	68.20	-16.35	Average	119	305	P
6	7125.00	10.05	55.22	65.27	88.20	-22.93	Peak	119	305	P
7	13770.00	22.69	29.42	52.11	68.20	-16.09	Average	100	292	P
8	13770.00	22.69	42.18	64.87	88.20	-23.33	Peak	100	292	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

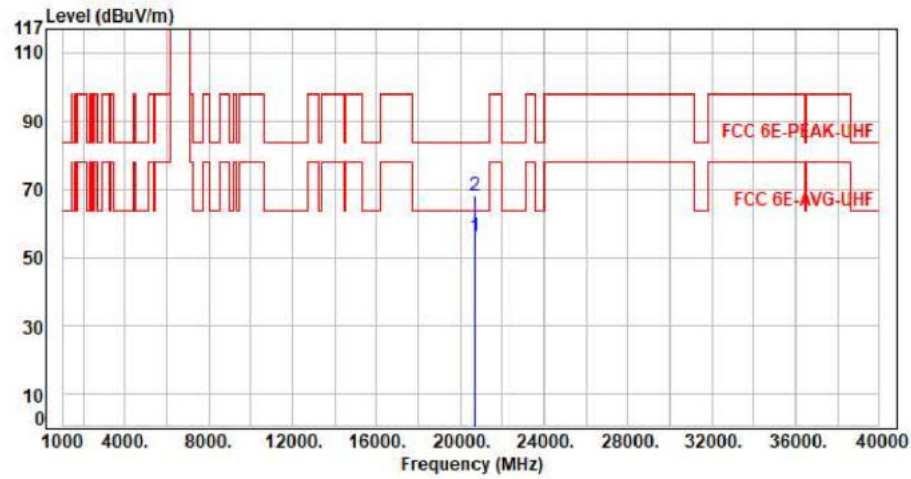


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.11	56.10	63.54	-7.44	Average	150	360	P
2	20655.00	10.99	56.92	67.91	83.54	-15.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

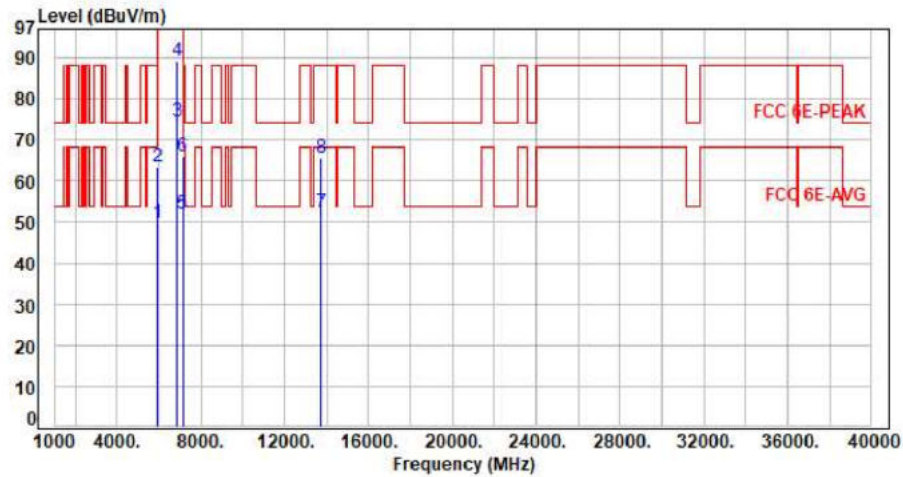

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.98	49.64	68.20	-18.56	Average	125	89	P
2	5925.00	7.66	55.60	63.26	88.20	-24.94	Peak	125	89	P
3	6885.00	9.56	64.77	74.33	200.00	-125.67	Average	125	89	P
4	6885.00	9.56	79.54	89.10	200.00	-110.90	Peak	125	89	P
5	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	125	89	P
6	7125.00	10.05	55.94	65.99	88.20	-22.21	Peak	125	89	P
7	13770.00	22.69	29.62	52.31	68.20	-15.89	Average	100	296	P
8	13770.00	22.69	42.94	65.63	88.20	-22.57	Peak	100	296	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

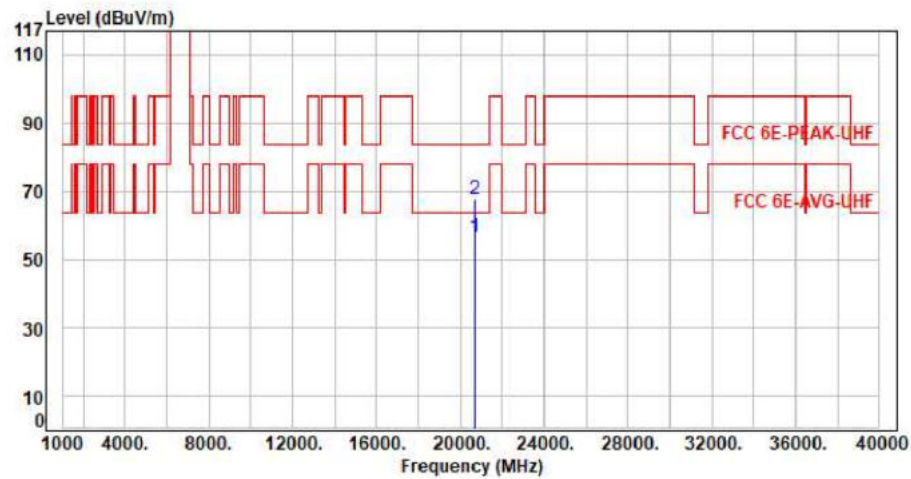

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.58	56.57	63.54	-6.97	Average	150	360	P
2	20655.00	10.99	56.81	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

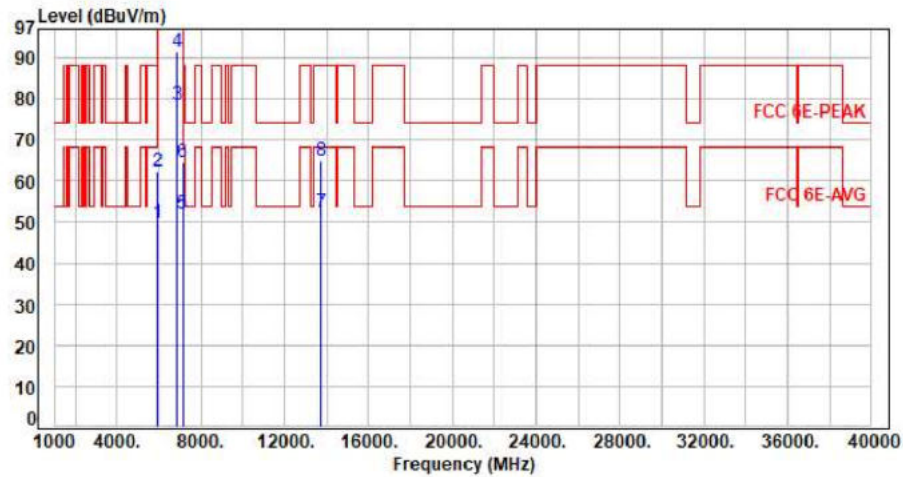

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	108	305	P
2	5925.00	7.66	54.66	62.32	88.20	-25.88	Peak	108	305	P
3	6865.00	9.52	68.91	78.43	200.00	-121.57	Average	108	305	P
4	6865.00	9.52	82.05	91.57	200.00	-108.43	Peak	108	305	P
5	7125.00	10.05	41.88	51.93	68.20	-16.27	Average	108	305	P
6	7125.00	10.05	54.62	64.67	88.20	-23.53	Peak	108	305	P
7	13730.00	22.57	29.67	52.24	68.20	-15.96	Average	100	152	P
8	13730.00	22.57	42.38	64.95	88.20	-23.25	Peak	100	152	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

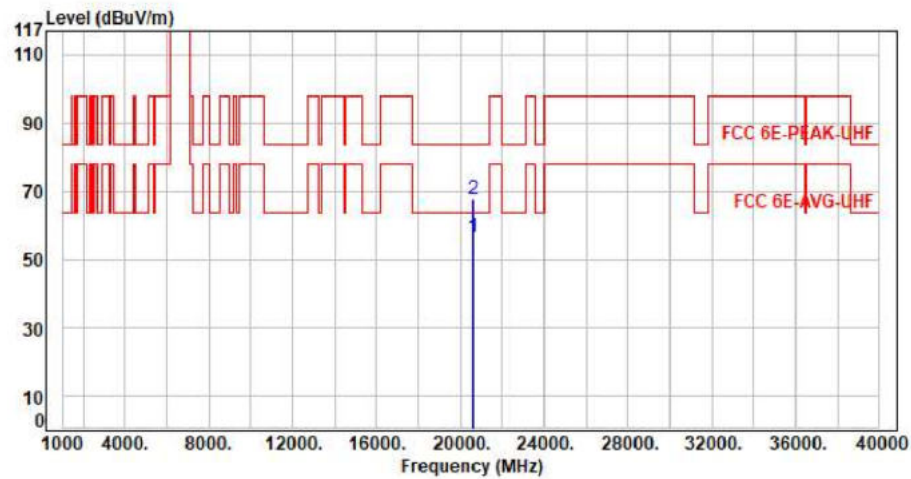


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	44.98	56.29	63.54	-7.25	Average	150	360	P
2	20595.00	11.31	56.49	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

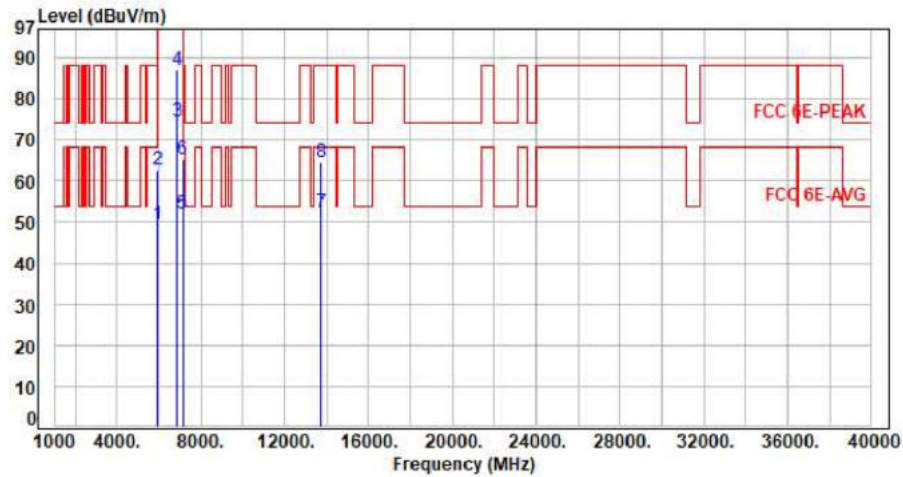


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.90	49.56	68.20	-18.64	Average	135	87	P
2	5925.00	7.66	54.93	62.59	88.20	-25.61	Peak	135	87	P
3	6865.00	9.52	65.05	74.57	200.00	-125.43	Average	135	87	P
4	6865.00	9.52	77.62	87.14	200.00	-112.86	Peak	135	87	P
5	7125.00	10.05	41.93	51.98	68.20	-16.22	Average	135	87	P
6	7125.00	10.05	55.21	65.26	88.20	-22.94	Peak	135	87	P
7	13730.00	22.57	29.66	52.23	68.20	-15.97	Average	100	158	P
8	13730.00	22.57	41.99	64.56	88.20	-23.64	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

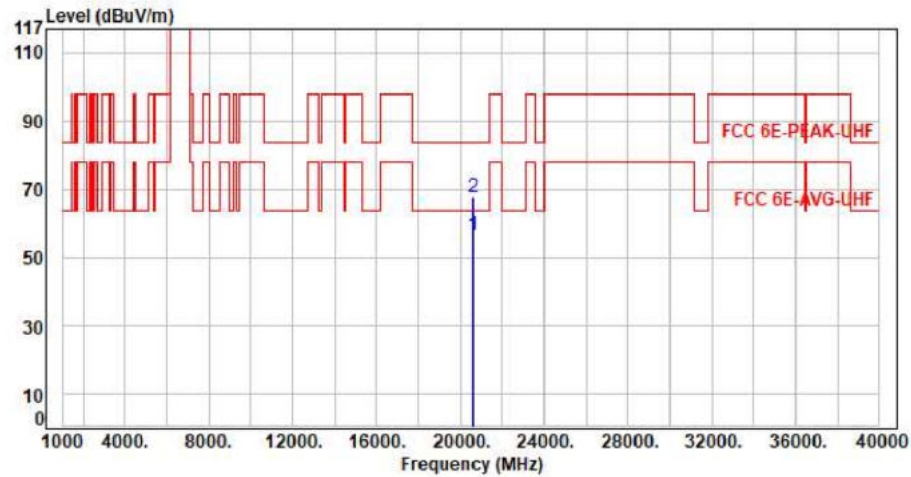


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	44.98	56.29	63.54	-7.25	Average	150	360	P
2	20595.00	11.31	56.47	67.78	83.54	-15.76	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

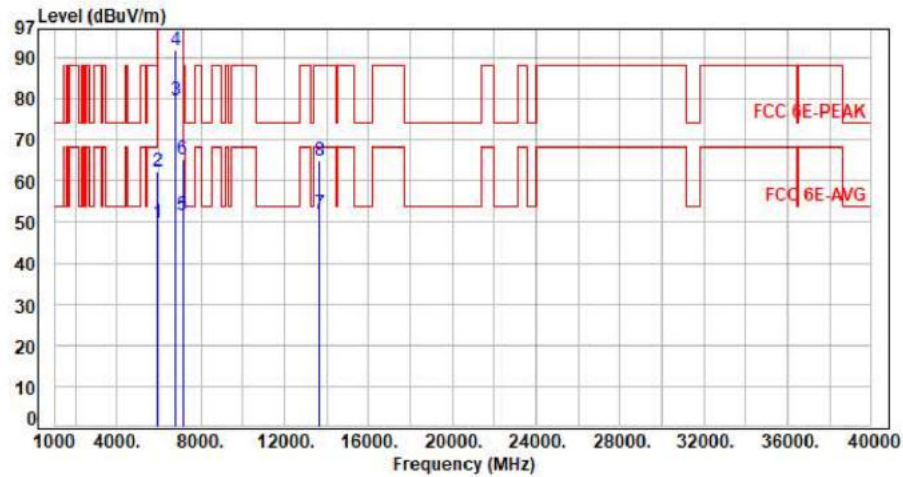

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	100	64	P
2	5925.00	7.66	54.60	62.26	88.20	-25.94	Peak	100	64	P
3	6825.00	9.47	70.07	79.54	200.00	-120.46	Average	100	64	P
4	6825.00	9.47	82.45	91.92	200.00	-108.08	Peak	100	64	P
5	7125.00	10.05	41.57	51.62	68.20	-16.58	Average	100	64	P
6	7125.00	10.05	55.25	65.30	88.20	-22.90	Peak	100	64	P
7	13650.00	22.24	29.66	51.90	68.20	-16.30	Average	100	145	P
8	13650.00	22.24	42.85	65.09	88.20	-23.11	Peak	100	145	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

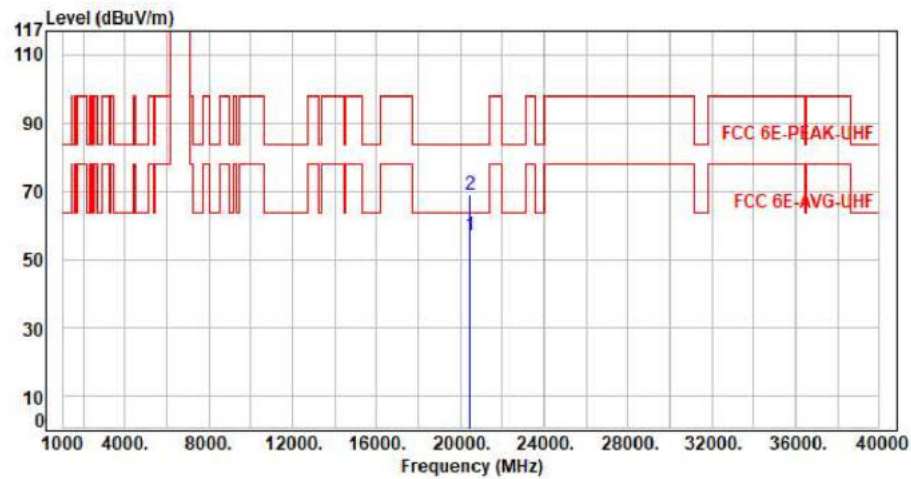


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.47	56.92	63.54	-6.62	Average	150	360	P
2	20475.00	11.45	57.67	69.12	83.54	-14.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

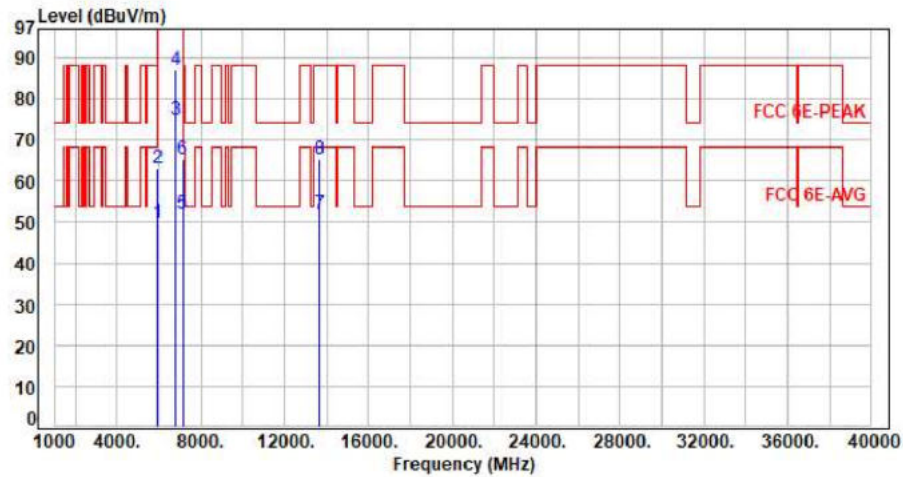


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.98	49.64	68.20	-18.56	Average	128	89	P
2	5925.00	7.66	55.45	63.11	88.20	-25.09	Peak	128	89	P
3	6825.00	9.47	65.40	74.87	200.00	-125.13	Average	128	89	P
4	6825.00	9.47	77.64	87.11	200.00	-112.89	Peak	128	89	P
5	7125.00	10.05	41.91	51.96	68.20	-16.24	Average	128	89	P
6	7125.00	10.05	55.19	65.24	88.20	-22.96	Peak	128	89	P
7	13650.00	22.24	29.62	51.86	68.20	-16.34	Average	100	258	P
8	13650.00	22.24	42.88	65.12	88.20	-23.08	Peak	100	258	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

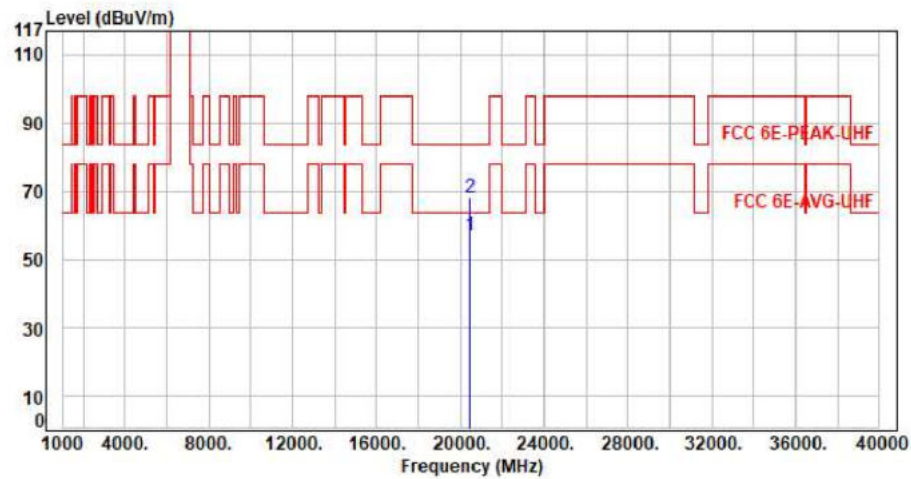


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.68	57.13	63.54	-6.41	Average	150	360	P
2	20475.00	11.45	56.67	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

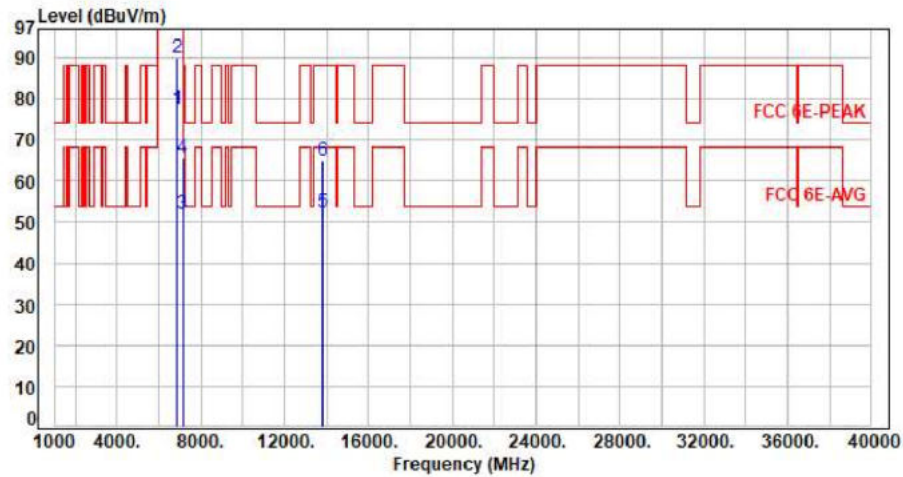


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	67.79	77.38	200.00	-122.62	Average	100	305	P
2	6895.00	9.59	80.29	89.88	200.00	-110.12	Peak	100	305	P
3	7125.00	10.05	41.95	52.00	68.20	-16.20	Average	100	305	P
4	7125.00	10.05	55.61	65.66	88.20	-22.54	Peak	100	305	P
5	13790.00	22.74	29.73	52.47	68.20	-15.73	Average	100	218	P
6	13790.00	22.74	42.08	64.82	88.20	-23.38	Peak	100	218	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

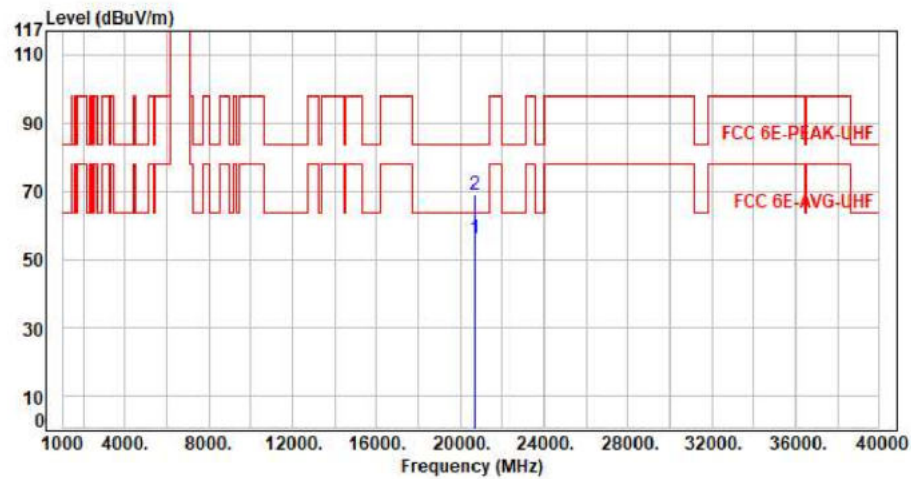


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.11	56.15	63.54	-7.39	Average	150	360	P
2	20685.00	11.04	57.96	69.00	83.54	-14.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

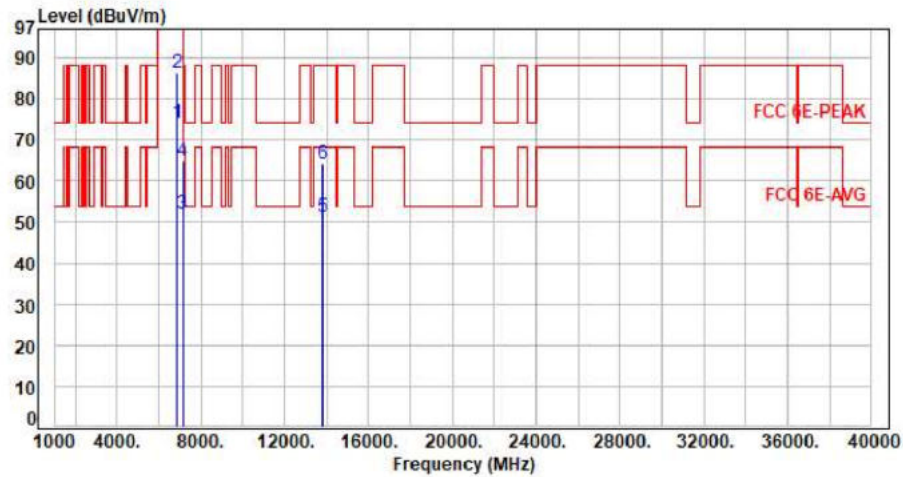


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	64.38	73.97	200.00	-126.03	Average	120	88	P
2	6895.00	9.59	76.74	86.33	200.00	-113.67	Peak	120	88	P
3	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	120	88	P
4	7125.00	10.05	54.83	64.88	88.20	-23.32	Peak	120	88	P
5	13790.00	22.74	28.66	51.40	68.20	-16.80	Average	100	143	P
6	13790.00	22.74	41.51	64.25	88.20	-23.95	Peak	100	143	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

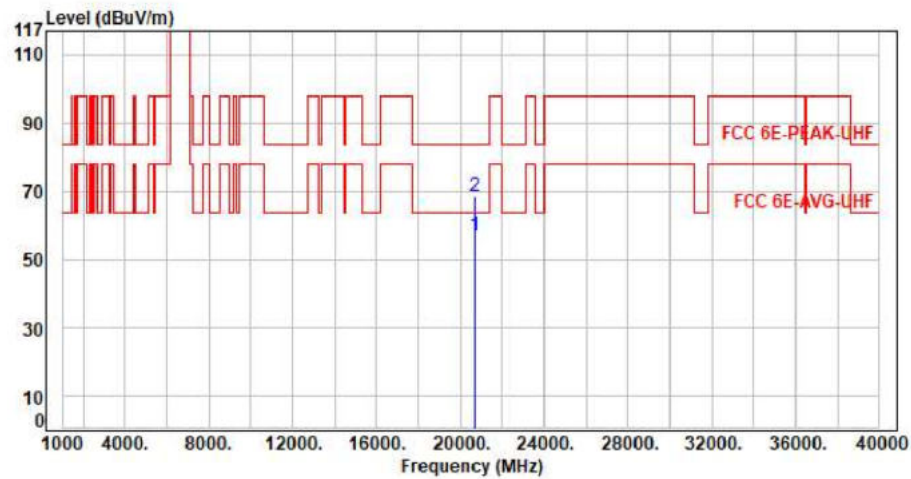


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	45.85	56.89	63.54	-6.65	Average	150	360	P
2	20685.00	11.04	57.46	68.50	83.54	-15.04	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

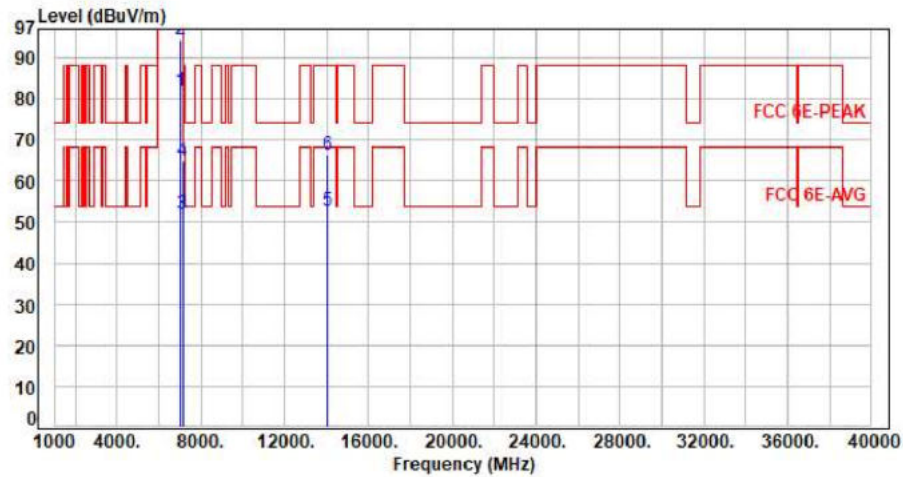


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	72.26	81.94	200.00	-118.06	Average	101	326	P
2	7015.00	9.68	84.76	94.44	200.00	-105.56	Peak	101	326	P
3	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	101	326	P
4	7125.00	10.05	55.00	65.05	88.20	-23.15	Peak	101	326	P
5	14030.00	23.39	29.47	52.86	68.20	-15.34	Average	100	115	P
6	14030.00	23.39	42.91	66.30	88.20	-21.90	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

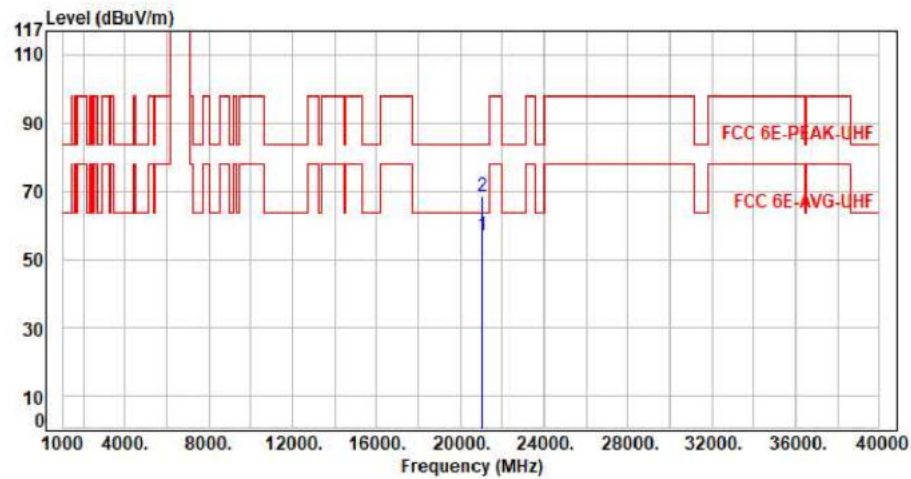

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.22	56.72	63.54	-6.82	Average	150	360	P
2	21045.00	11.50	57.18	68.68	83.54	-14.86	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor