




For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

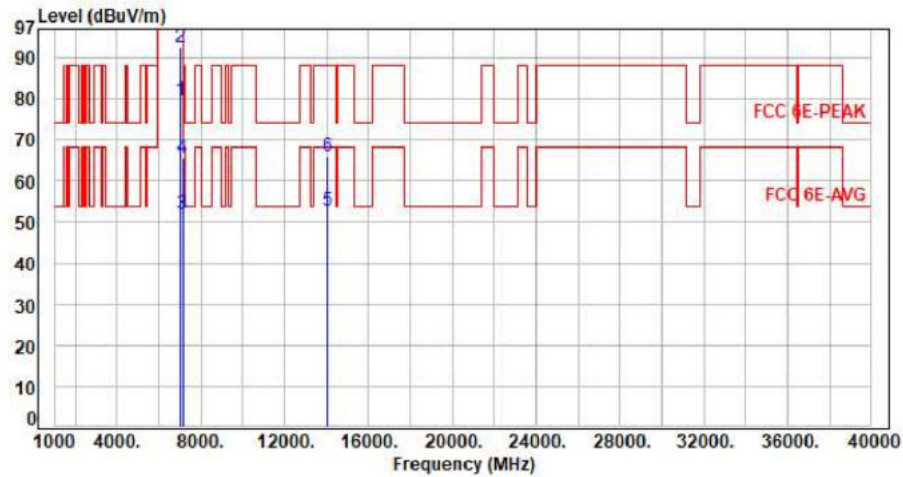


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	70.15	79.83	200.00	-120.17	Average	372	351	P
2	7015.00	9.68	82.77	92.45	200.00	-107.55	Peak	372	351	P
3	7125.00	10.05	41.84	51.89	68.20	-16.31	Average	372	351	P
4	7125.00	10.05	55.56	65.61	88.20	-22.59	Peak	372	351	P
5	14030.00	23.39	29.47	52.86	68.20	-15.34	Average	100	124	P
6	14030.00	23.39	42.68	66.07	88.20	-22.13	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

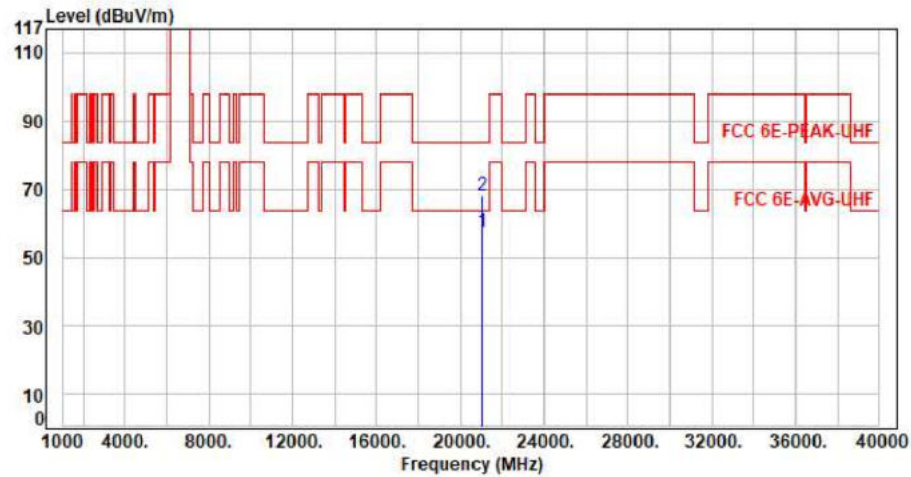


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	46.08	57.58	63.54	-5.96	Average	150	360	P
2	21045.00	11.50	56.78	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

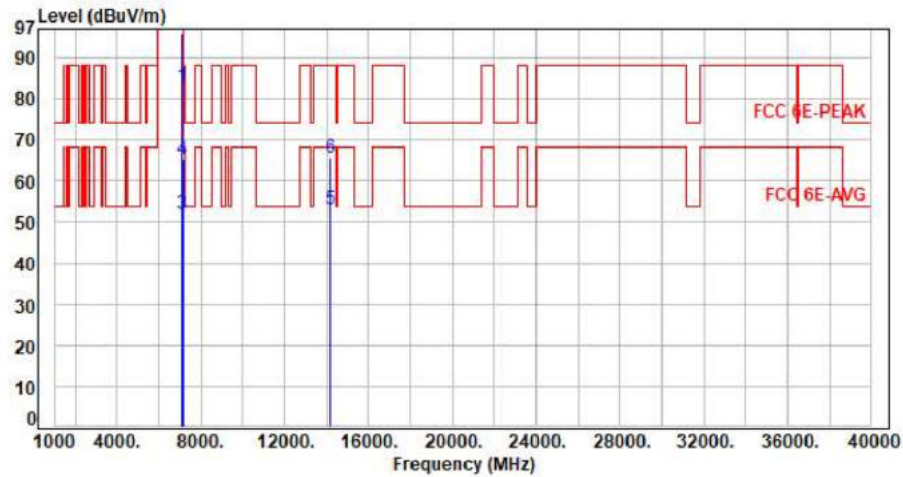


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	73.15	83.11	200.00	-116.89	Average	100	327	P
2	7095.00	9.96	86.05	96.01	200.00	-103.99	Peak	100	327	P
3	7125.00	10.05	41.77	51.82	68.20	-16.38	Average	100	327	P
4	7125.00	10.05	55.37	65.42	88.20	-22.78	Peak	100	327	P
5	14190.00	23.79	29.45	53.24	68.20	-14.96	Average	100	142	P
6	14190.00	23.79	41.89	65.68	88.20	-22.52	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

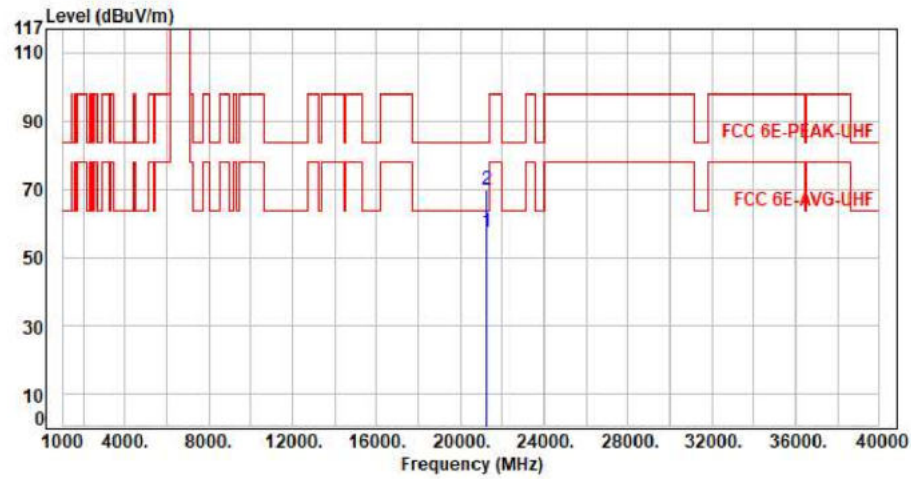


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.49	57.29	63.54	-6.25	Average	150	360	P
2	21285.00	11.80	58.03	69.83	83.54	-13.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

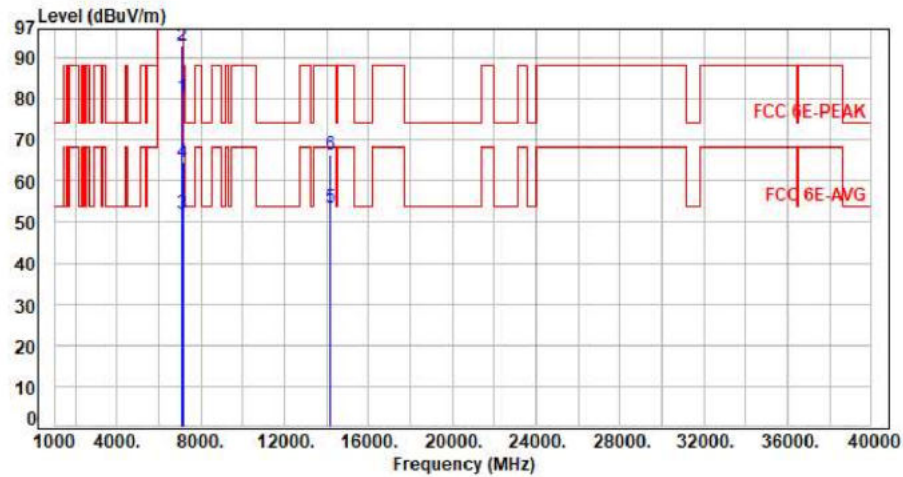


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	70.41	80.37	200.00	-119.63	Average	395	351	P
2	7095.00	9.96	82.81	92.77	200.00	-107.23	Peak	395	351	P
3	7125.00	10.05	41.86	51.91	68.20	-16.29	Average	395	351	P
4	7125.00	10.05	54.62	64.67	88.20	-23.53	Peak	395	351	P
5	14190.00	23.79	29.61	53.40	68.20	-14.80	Average	100	134	P
6	14190.00	23.79	42.68	66.47	88.20	-21.73	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

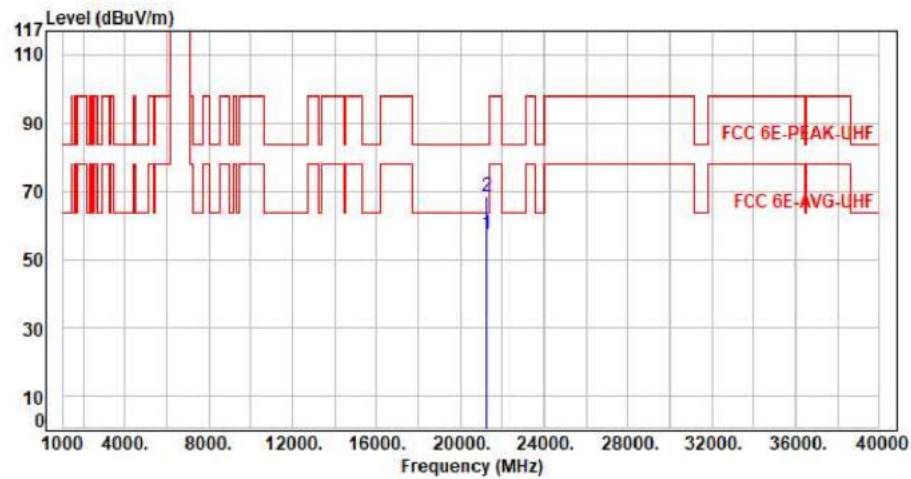

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.43	57.23	63.54	-6.31	Average	150	360	P
2	21285.00	11.80	56.85	68.65	83.54	-14.89	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

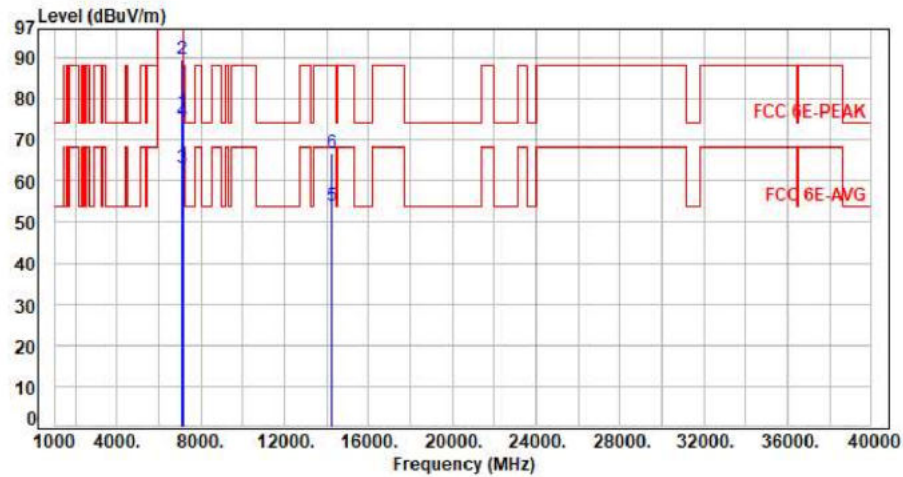


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	66.84	76.86	200.00	-123.14	Average	100	328	P
2	7115.00	10.02	79.52	89.54	200.00	-110.46	Peak	100	328	P
3	7125.00	10.05	53.08	63.13	68.20	-5.07	Average	100	328	P
4	7125.00	10.05	64.59	74.64	88.20	-13.56	Peak	100	328	P
5	14230.00	23.94	29.77	53.71	68.20	-14.49	Average	100	186	P
6	14230.00	23.94	42.69	66.63	88.20	-21.57	Peak	100	186	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

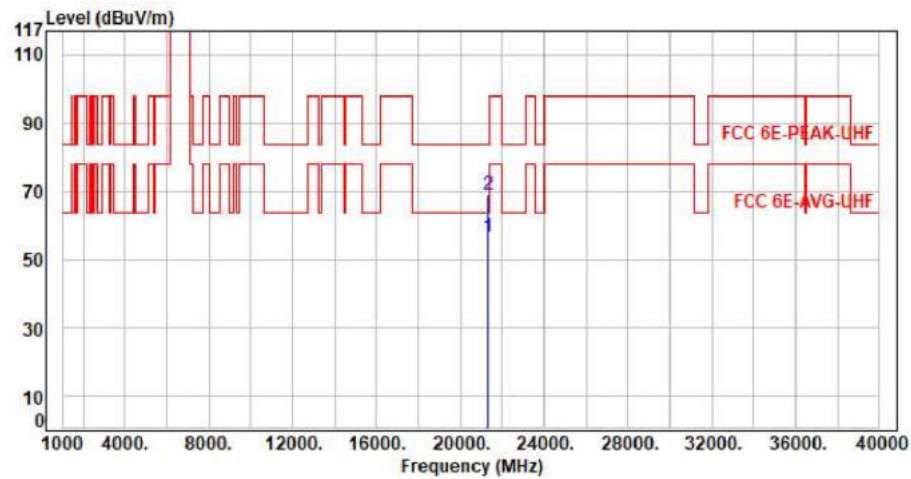

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.32	56.68	63.54	-6.86	Average	150	360	P
2	21345.00	11.36	57.54	68.90	83.54	-14.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

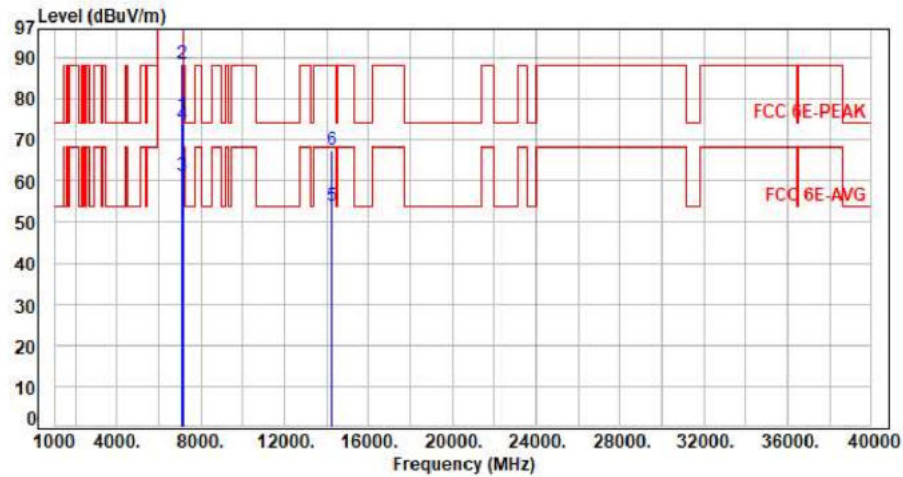


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	65.78	75.80	200.00	-124.20	Average	362	351	P
2	7115.00	10.02	78.40	88.42	200.00	-111.58	Peak	362	351	P
3	7125.00	10.05	51.30	61.35	68.20	-6.85	Average	362	351	P
4	7125.00	10.05	63.69	73.74	88.20	-14.46	Peak	362	351	P
5	14230.00	23.94	29.77	53.71	68.20	-14.49	Average	100	186	P
6	14230.00	23.94	43.61	67.55	88.20	-20.65	Peak	100	186	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

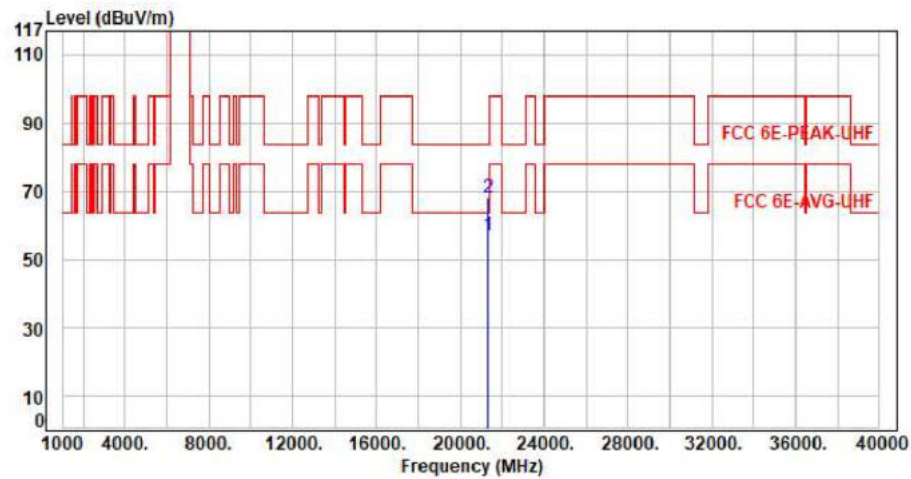


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.42	56.78	63.54	-6.76	Average	150	360	P
2	21345.00	11.36	56.63	67.99	83.54	-15.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

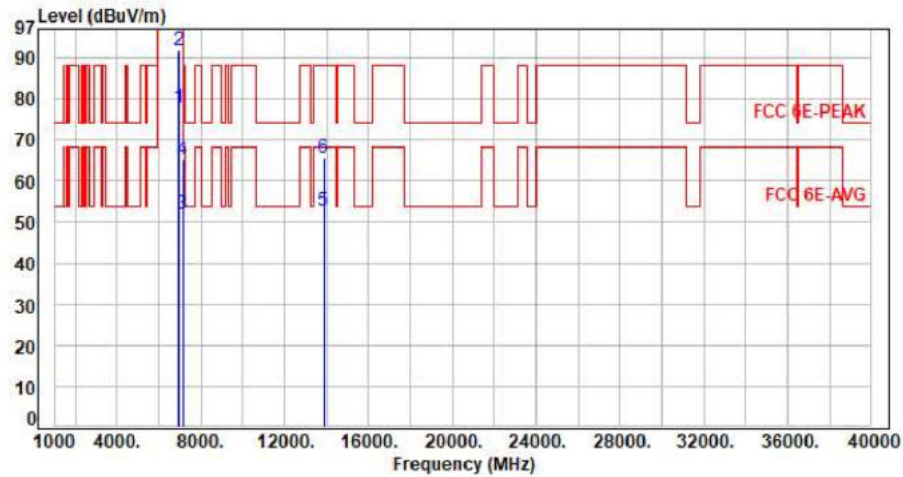


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	68.32	77.93	200.00	-122.07	Average	100	304	P
2	6925.00	9.61	82.21	91.82	200.00	-108.18	Peak	100	304	P
3	7125.00	10.05	41.96	52.01	68.20	-16.19	Average	100	304	P
4	7125.00	10.05	55.14	65.19	88.20	-23.01	Peak	100	304	P
5	13850.00	22.86	29.87	52.73	68.20	-15.47	Average	100	169	P
6	13850.00	22.86	42.66	65.52	88.20	-22.68	Peak	100	169	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

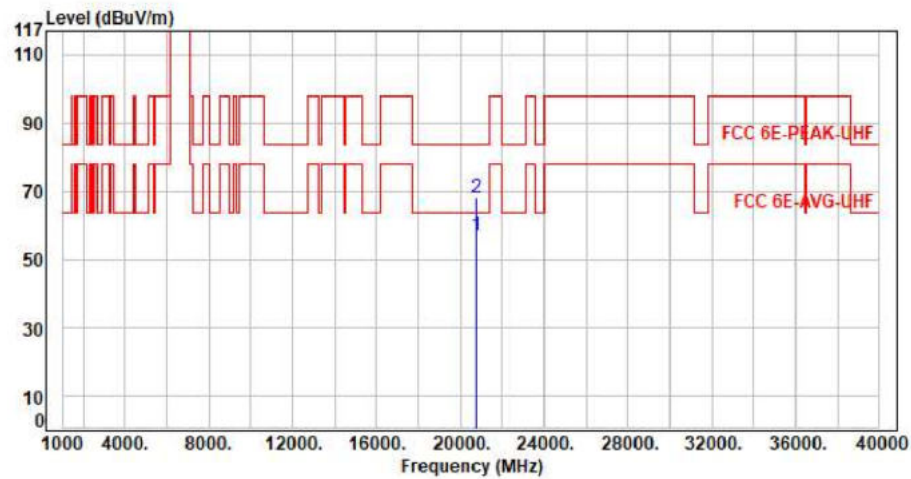


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.65	57.04	63.54	-6.50	Average	150	360	P
2	20775.00	11.39	56.51	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

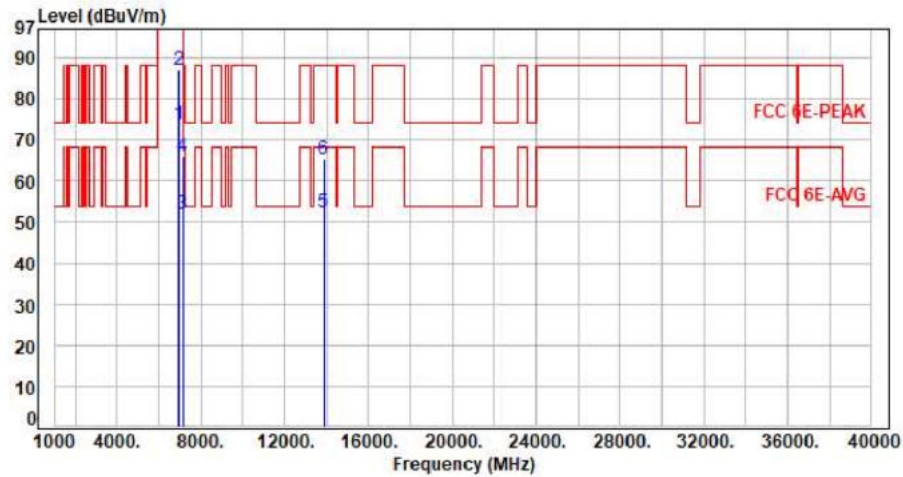


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	64.27	73.88	200.00	-126.12	Average	120	88	P
2	6925.00	9.61	77.45	87.06	200.00	-112.94	Peak	120	88	P
3	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	120	88	P
4	7125.00	10.05	55.81	65.86	88.20	-22.34	Peak	120	88	P
5	13850.00	22.86	29.61	52.47	68.20	-15.73	Average	100	138	P
6	13850.00	22.86	42.55	65.41	88.20	-22.79	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

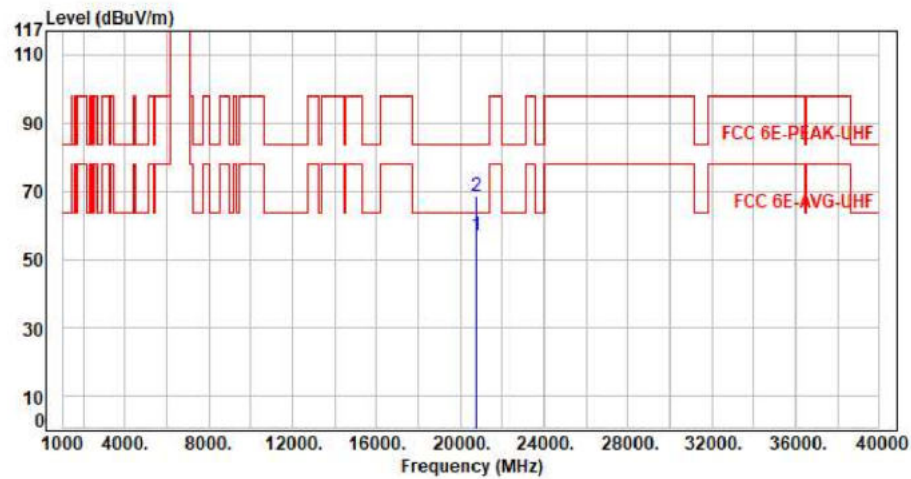

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.77	57.16	63.54	-6.38	Average	150	360	P
2	20775.00	11.39	57.11	68.50	83.54	-15.04	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

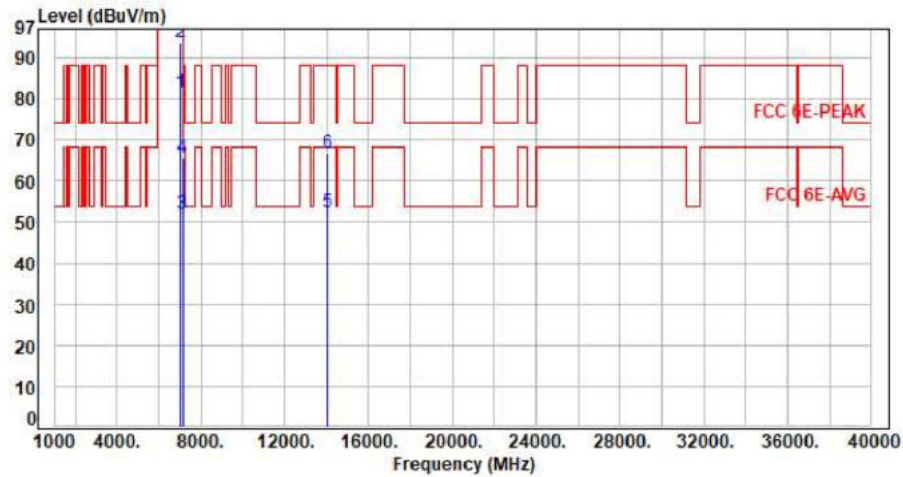


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	71.90	81.55	200.00	-118.45	Average	100	327	P
2	7005.00	9.65	84.21	93.86	200.00	-106.14	Peak	100	327	P
3	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	100	327	P
4	7125.00	10.05	55.46	65.51	88.20	-22.69	Peak	100	327	P
5	14010.00	23.32	28.99	52.31	68.20	-15.89	Average	100	166	P
6	14010.00	23.32	43.62	66.94	88.20	-21.26	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

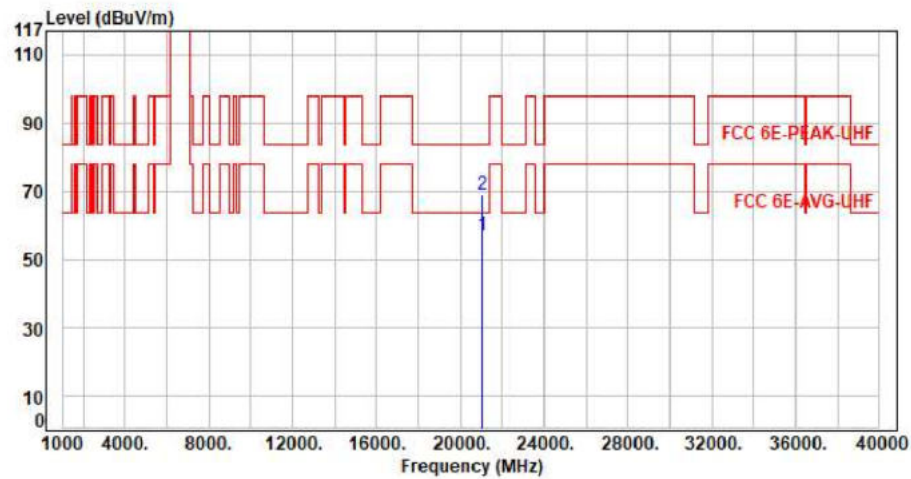


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.52	57.00	63.54	-6.54	Average	150	360	P
2	21015.00	11.48	57.60	69.08	83.54	-14.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

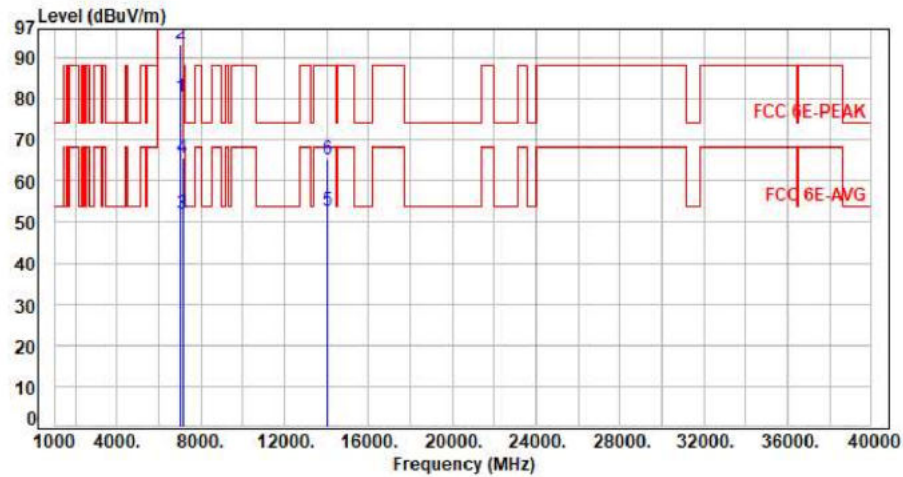


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	70.75	80.40	200.00	-119.60	Average	387	350	P
2	7005.00	9.65	83.48	93.13	200.00	-106.87	Peak	387	350	P
3	7125.00	10.05	41.81	51.86	68.20	-16.34	Average	387	350	P
4	7125.00	10.05	55.61	65.66	88.20	-22.54	Peak	387	350	P
5	14010.00	23.32	29.51	52.83	68.20	-15.37	Average	100	148	P
6	14010.00	23.32	41.96	65.28	88.20	-22.92	Peak	100	148	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

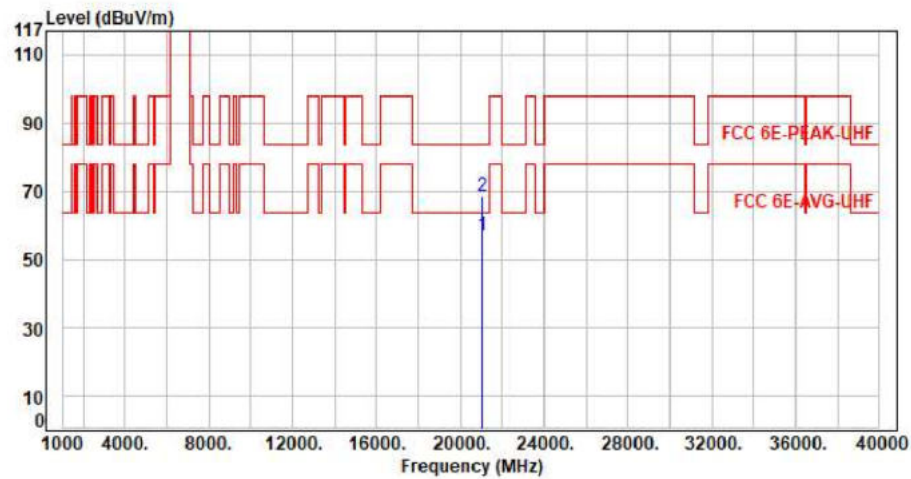


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.57	57.05	63.54	-6.49	Average	150	360	P
2	21015.00	11.48	56.81	68.29	83.54	-15.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

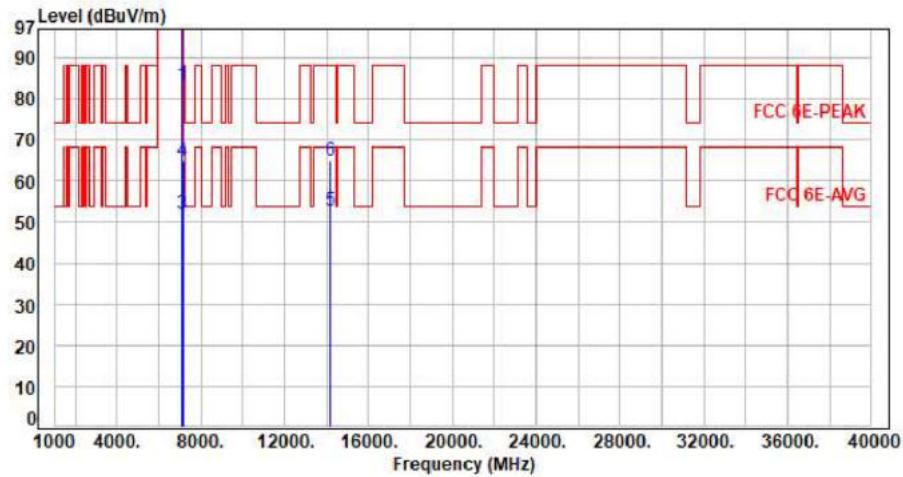


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	73.59	83.50	200.00	-116.50	Average	100	327	P
2	7085.00	9.91	87.95	97.86	200.00	-102.14	Peak	100	327	P
3	7125.00	10.05	41.77	51.82	68.20	-16.38	Average	100	327	P
4	7125.00	10.05	54.78	64.83	88.20	-23.37	Peak	100	327	P
5	14170.00	23.72	28.90	52.62	68.20	-15.58	Average	100	168	P
6	14170.00	23.72	41.35	65.07	88.20	-23.13	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

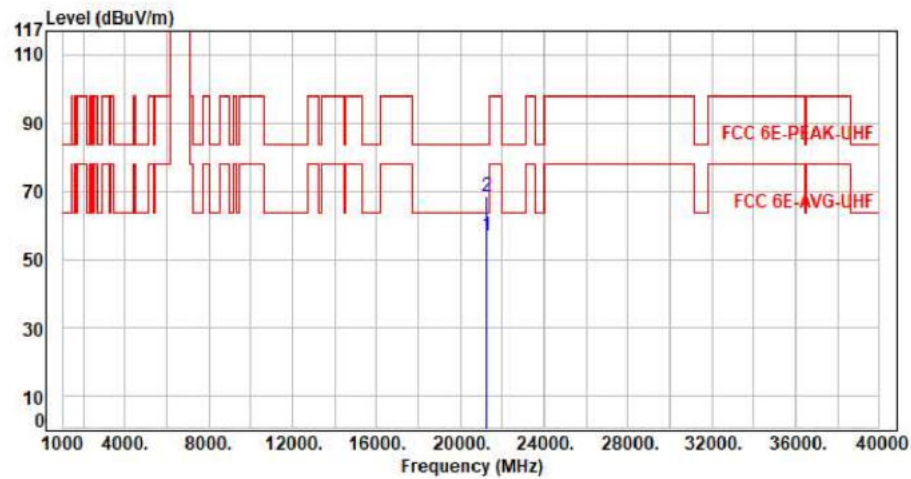


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.15	56.99	63.54	-6.55	Average	150	360	P
2	21255.00	11.84	56.79	68.63	83.54	-14.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

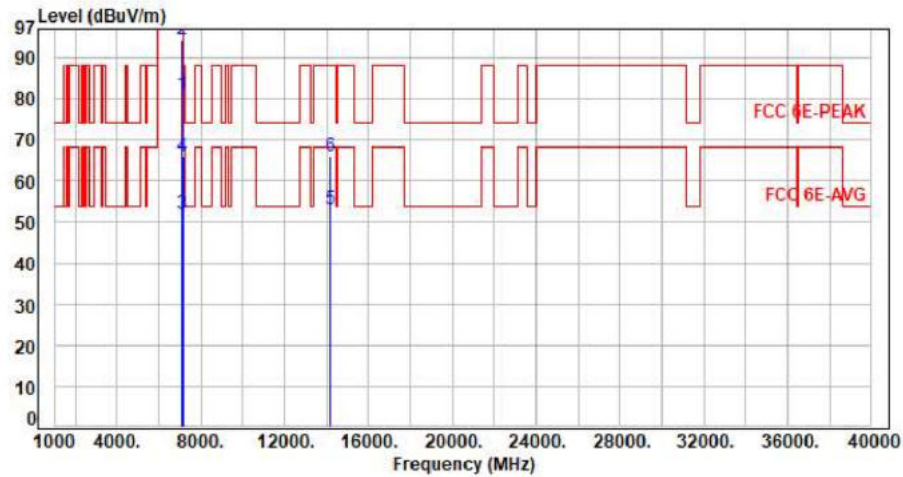


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	71.30	81.21	200.00	-118.79	Average	394	352	P
2	7085.00	9.91	84.52	94.43	200.00	-105.57	Peak	394	352	P
3	7125.00	10.05	41.81	51.86	68.20	-16.34	Average	394	352	P
4	7125.00	10.05	55.94	65.99	88.20	-22.21	Peak	394	352	P
5	14170.00	23.72	29.24	52.96	68.20	-15.24	Average	100	152	P
6	14170.00	23.72	42.47	66.19	88.20	-22.01	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

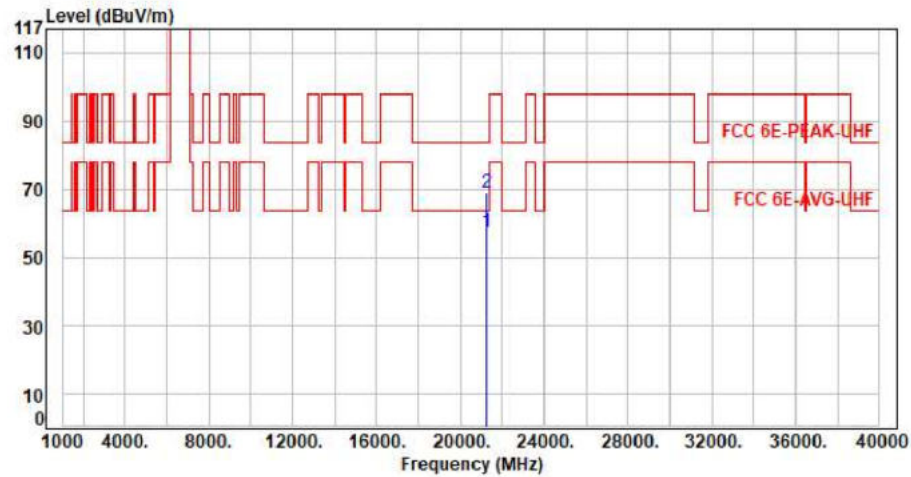


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.38	57.22	63.54	-6.32	Average	150	360	P
2	21255.00	11.84	57.11	68.95	83.54	-14.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

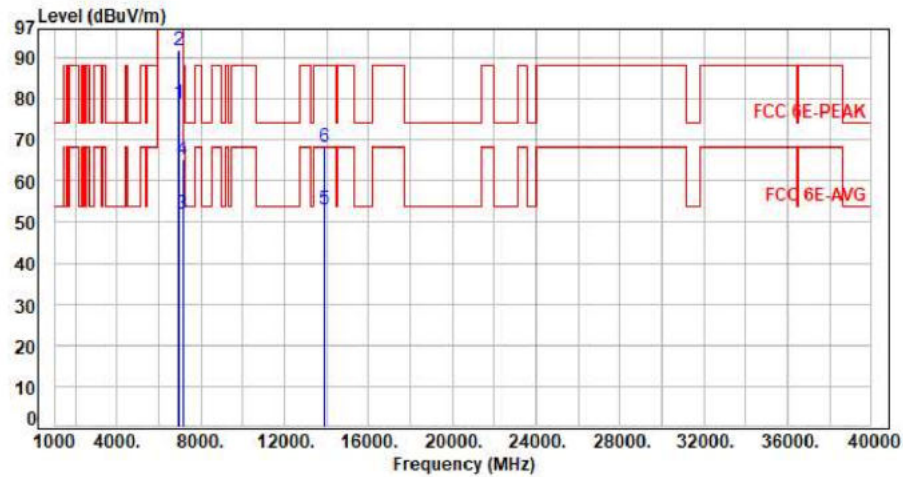


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	69.30	78.92	200.00	-121.08	Average	106	306	P
2	6945.00	9.62	82.05	91.67	200.00	-108.33	Peak	106	306	P
3	7125.00	10.05	41.83	51.88	68.20	-16.32	Average	106	306	P
4	7125.00	10.05	55.11	65.16	88.20	-23.04	Peak	106	306	P
5	13890.00	22.95	30.16	53.11	68.20	-15.09	Average	100	332	P
6	13890.00	22.95	45.18	68.13	88.20	-20.07	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

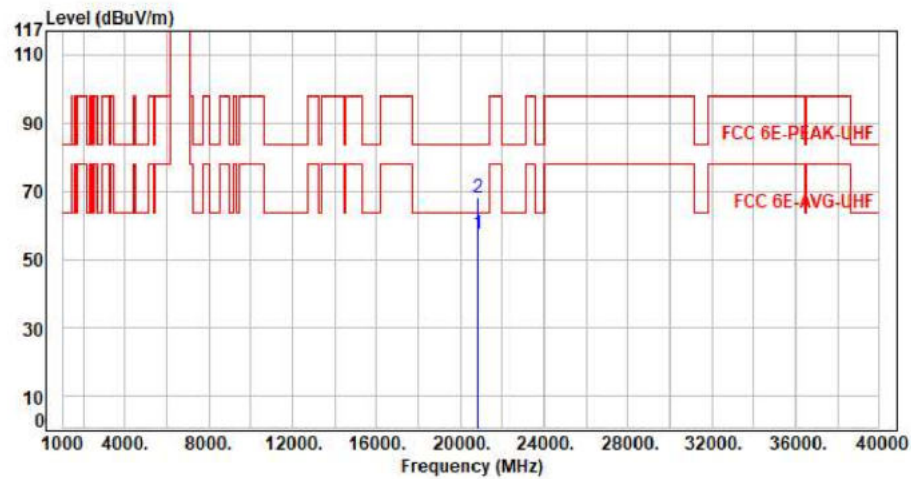

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	46.01	57.41	63.54	-6.13	Average	150	360	P
2	20835.00	11.40	56.45	67.85	83.54	-15.69	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

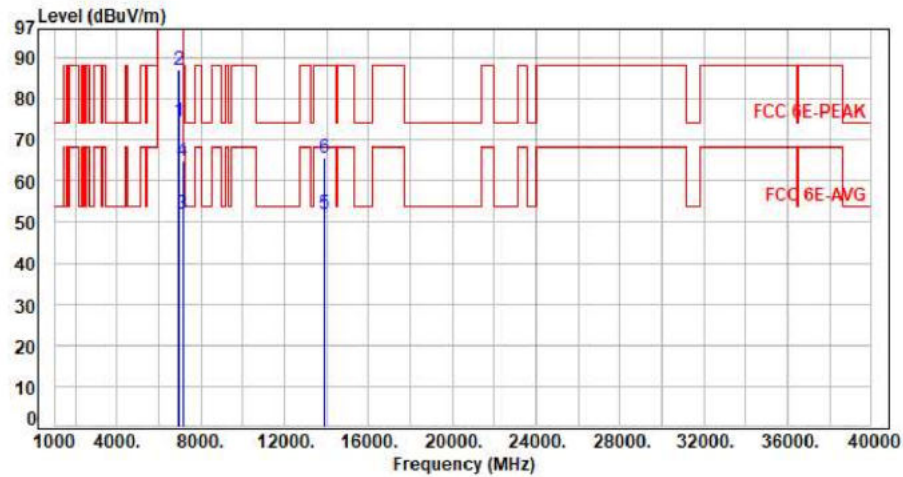


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	64.91	74.53	200.00	-125.47	Average	116	87	P
2	6945.00	9.62	77.45	87.07	200.00	-112.93	Peak	116	87	P
3	7125.00	10.05	41.80	51.85	68.20	-16.35	Average	116	87	P
4	7125.00	10.05	54.75	64.80	88.20	-23.40	Peak	116	87	P
5	13890.00	22.95	28.99	51.94	68.20	-16.26	Average	100	118	P
6	13890.00	22.95	42.76	65.71	88.20	-22.49	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

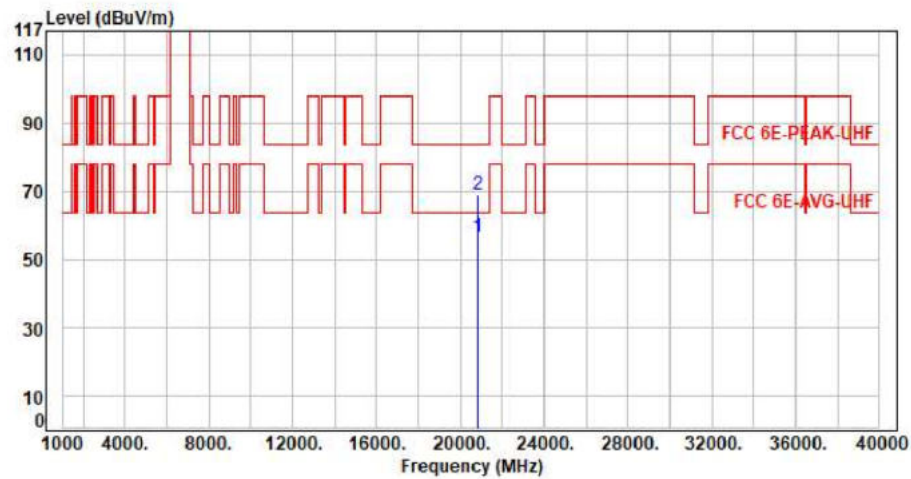


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.18	56.58	63.54	-6.96	Average	150	360	P
2	20835.00	11.40	57.54	68.94	83.54	-14.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

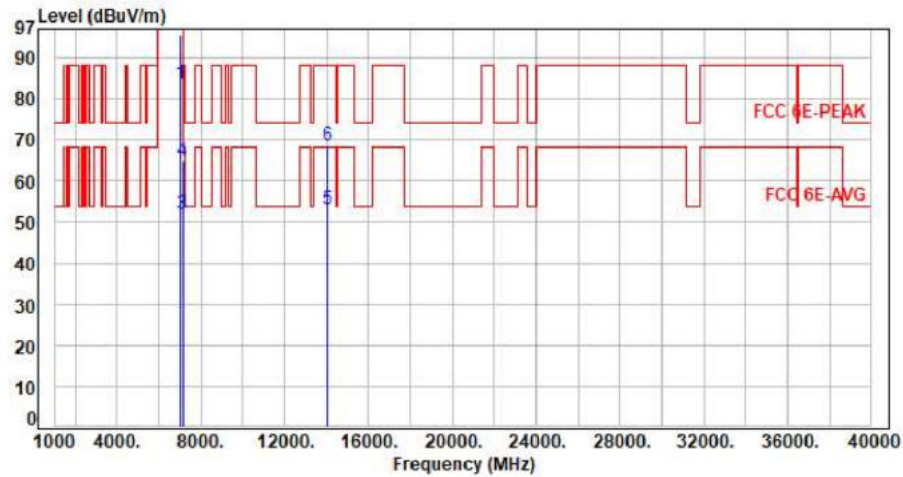


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	73.88	83.59	200.00	-116.41	Average	100	327	P
2	7025.00	9.71	85.64	95.35	200.00	-104.65	Peak	100	327	P
3	7125.00	10.05	41.78	51.83	68.20	-16.37	Average	100	327	P
4	7125.00	10.05	54.87	64.92	88.20	-23.28	Peak	100	327	P
5	14050.00	23.47	29.68	53.15	68.20	-15.05	Average	100	161	P
6	14050.00	23.47	45.08	68.55	88.20	-19.65	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

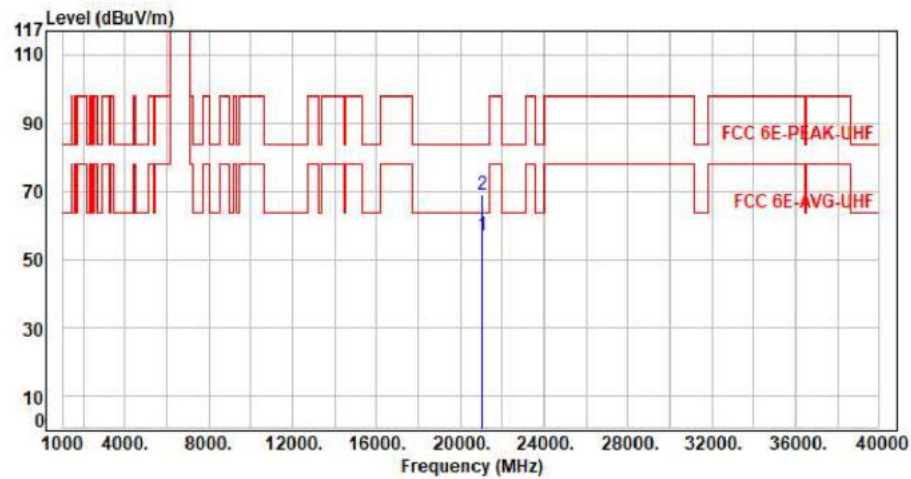


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.36	56.88	63.54	-6.66	Average	150	360	P
2	21075.00	11.52	57.21	68.73	83.54	-14.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

For CRIUS N310-G1-Aux



Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

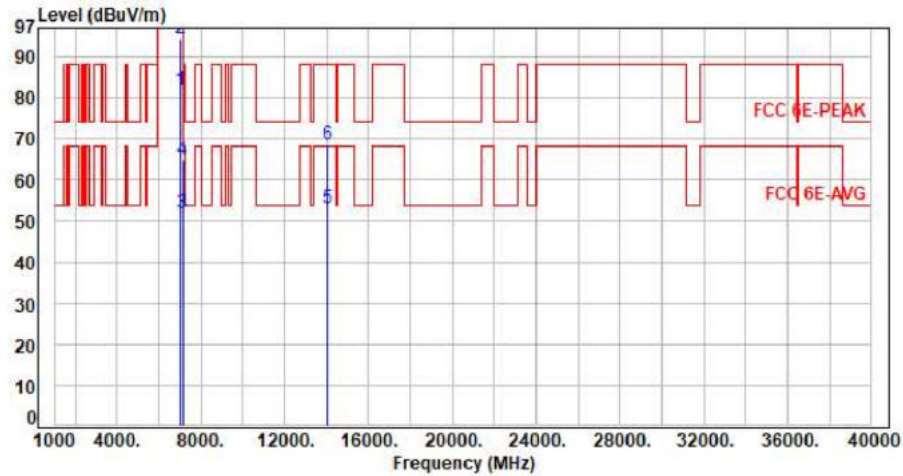


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	72.06	81.77	200.00	-118.23	Average	386	351	P
2	7025.00	9.71	84.62	94.33	200.00	-105.67	Peak	386	351	P
3	7125.00	10.05	41.86	51.91	68.20	-16.29	Average	386	351	P
4	7125.00	10.05	54.71	64.76	88.20	-23.44	Peak	386	351	P
5	14050.00	23.47	29.78	53.25	68.20	-14.95	Average	100	332	P
6	14050.00	23.47	45.09	68.56	88.20	-19.64	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

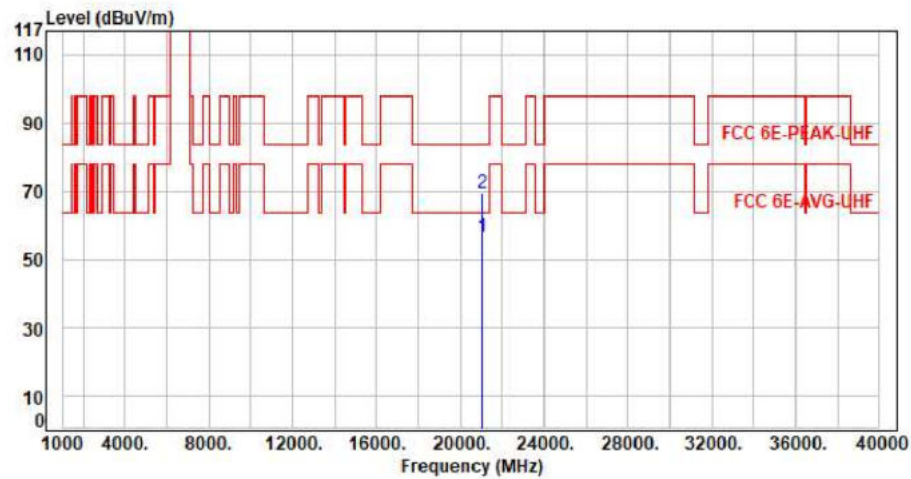


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	44.89	56.41	63.54	-7.13	Average	150	360	P
2	21075.00	11.52	57.88	69.40	83.54	-14.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

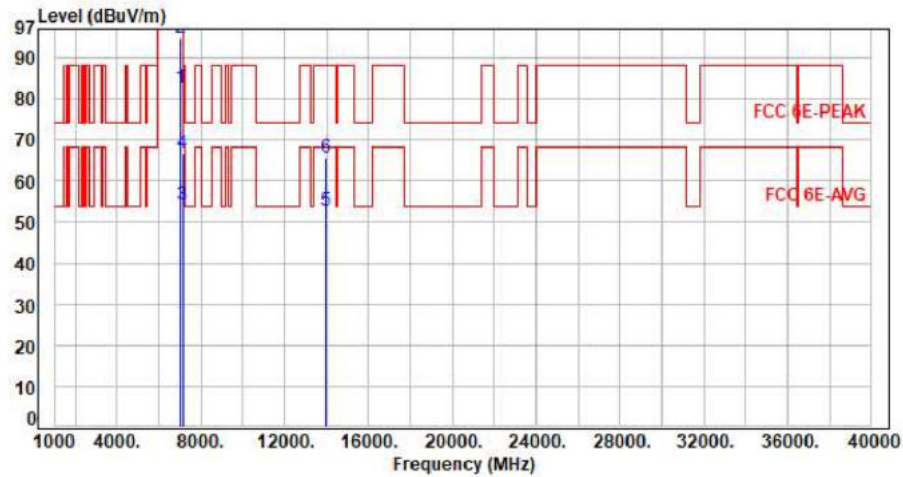


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	72.97	82.60	200.00	-117.40	Average	100	326	P
2	6985.00	9.63	85.28	94.91	200.00	-105.09	Peak	100	326	P
3	7125.00	10.05	44.23	54.28	68.20	-13.92	Average	100	326	P
4	7125.00	10.05	56.55	66.60	88.20	-21.60	Peak	100	326	P
5	13970.00	23.15	29.64	52.79	68.20	-15.41	Average	100	146	P
6	13970.00	23.15	42.63	65.78	88.20	-22.42	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

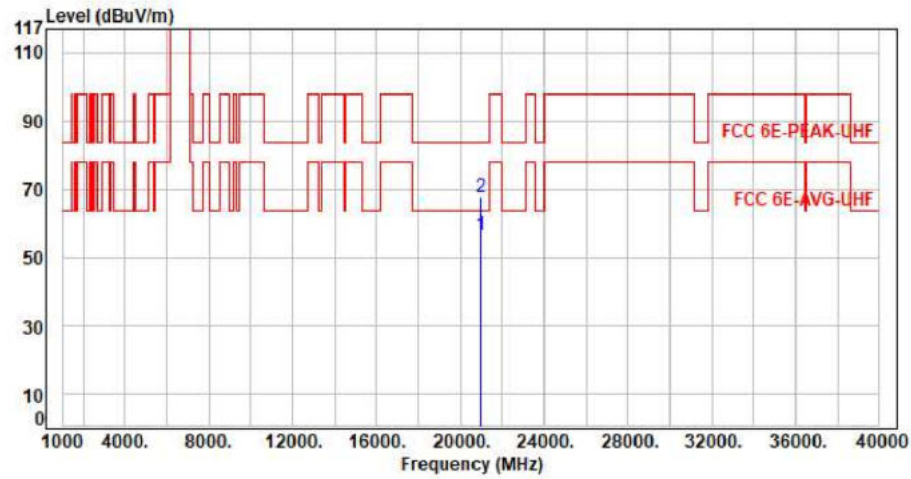


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.91	56.39	63.54	-7.15	Average	150	360	P
2	20955.00	11.48	56.13	67.61	83.54	-15.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

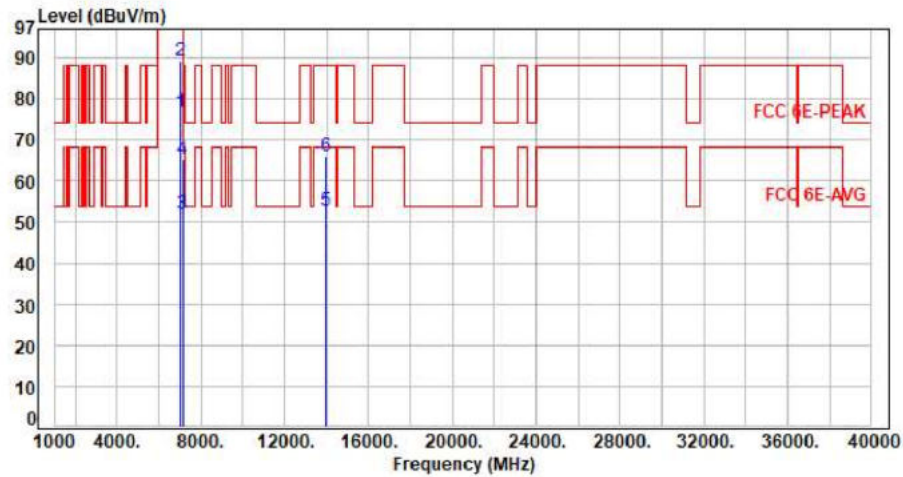


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	67.23	76.86	200.00	-123.14	Average	131	86	P
2	6985.00	9.63	79.64	89.27	200.00	-110.73	Peak	131	86	P
3	7125.00	10.05	41.96	52.01	68.20	-16.19	Average	131	86	P
4	7125.00	10.05	55.28	65.33	88.20	-22.87	Peak	131	86	P
5	13970.00	23.15	29.67	52.82	68.20	-15.38	Average	100	195	P
6	13970.00	23.15	42.78	65.93	88.20	-22.27	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

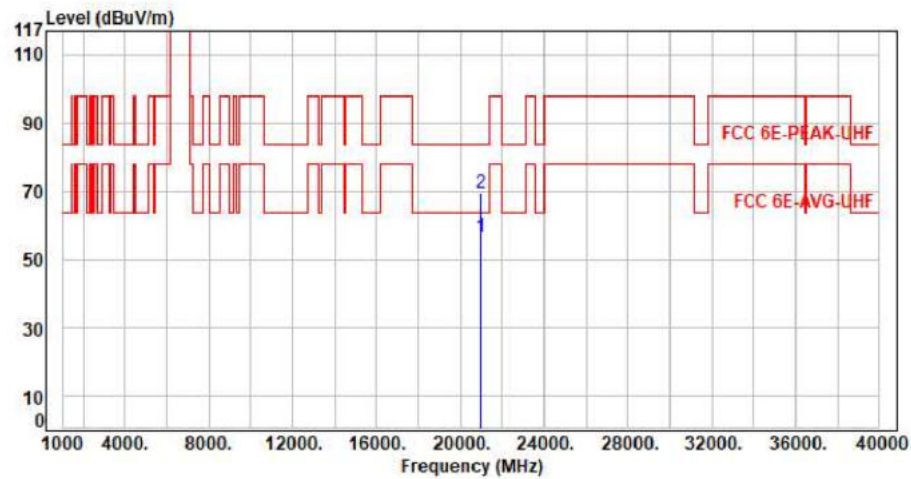


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.17	56.65	63.54	-6.89	Average	150	360	P
2	20955.00	11.48	58.05	69.53	83.54	-14.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

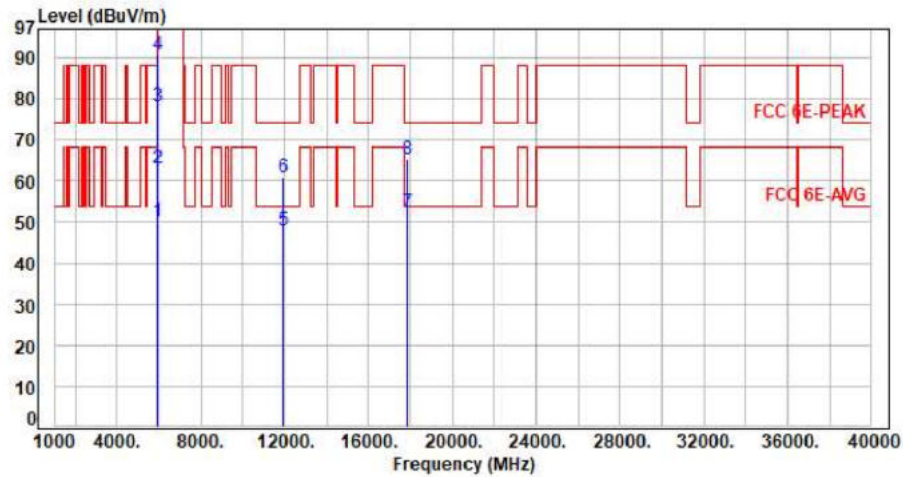

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.42	50.08	68.20	-18.12	Average	100	45	P
2	5925.00	7.66	55.49	63.15	88.20	-25.05	Peak	100	45	P
3	5955.00	7.68	70.47	78.15	200.00	-121.85	Average	100	45	P
4	5955.00	7.68	83.01	90.69	200.00	-109.31	Peak	100	45	P
5	11910.00	18.06	29.71	47.77	54.00	-6.23	Average	100	318	P
6	11910.00	18.06	42.75	60.81	74.00	-13.19	Peak	100	318	P
7	17865.00	27.77	24.57	52.34	54.00	-1.66	Average	100	183	P
8	17865.00	27.77	37.33	65.10	74.00	-8.90	Peak	100	183	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

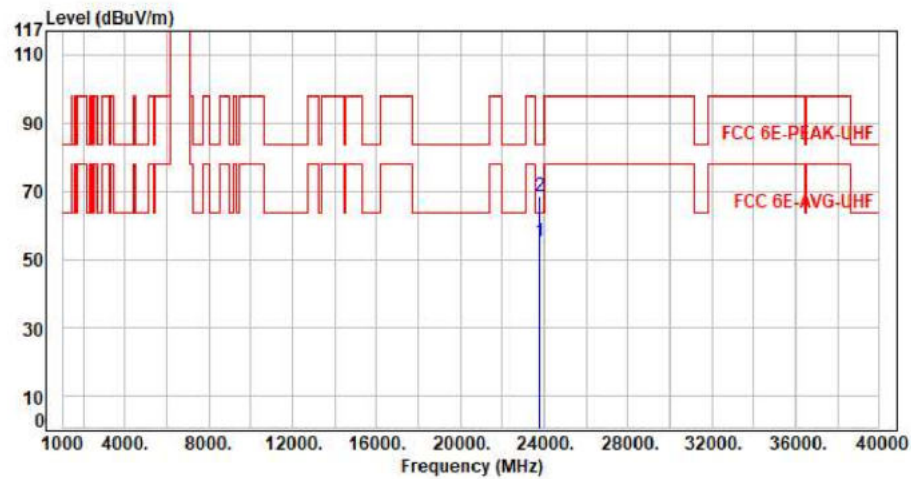


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.17	55.36	63.54	-8.18	Average	150	360	P
2	23820.00	11.19	57.26	68.45	83.54	-15.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

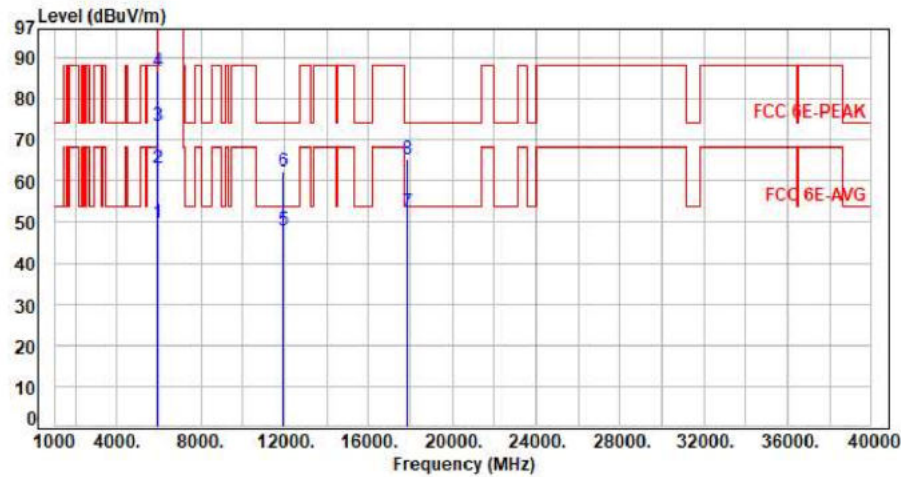

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	164	261	P
2	5925.00	7.66	55.33	62.99	88.20	-25.21	Peak	164	261	P
3	5955.00	7.68	65.62	73.30	200.00	-126.70	Average	164	261	P
4	5955.00	7.68	78.95	86.63	200.00	-113.37	Peak	164	261	P
5	11910.00	18.06	29.73	47.79	54.00	-6.21	Average	100	159	P
6	11910.00	18.06	44.20	62.26	74.00	-11.74	Peak	100	159	P
7	17865.00	27.77	24.53	52.30	54.00	-1.70	Average	100	261	P
8	17865.00	27.77	37.54	65.31	74.00	-8.69	Peak	100	261	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

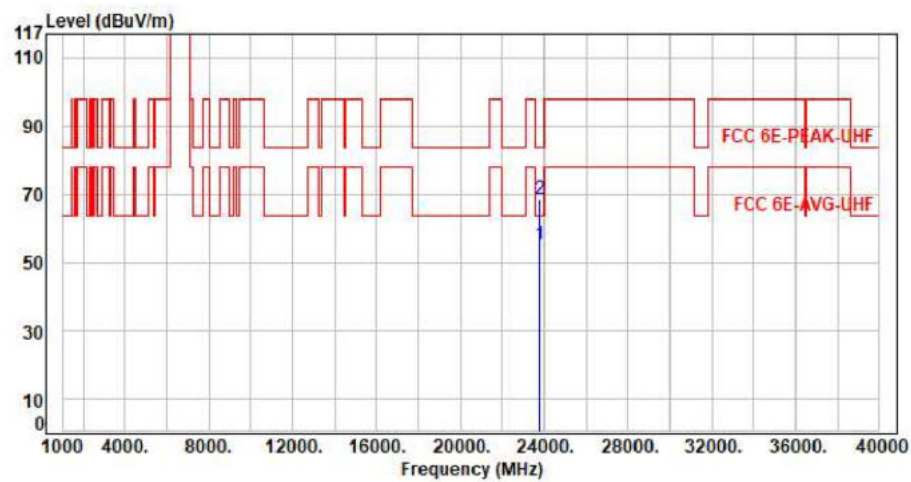

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.18	55.37	63.54	-8.17	Average	150	360	P
2	23820.00	11.19	57.54	68.73	83.54	-14.81	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

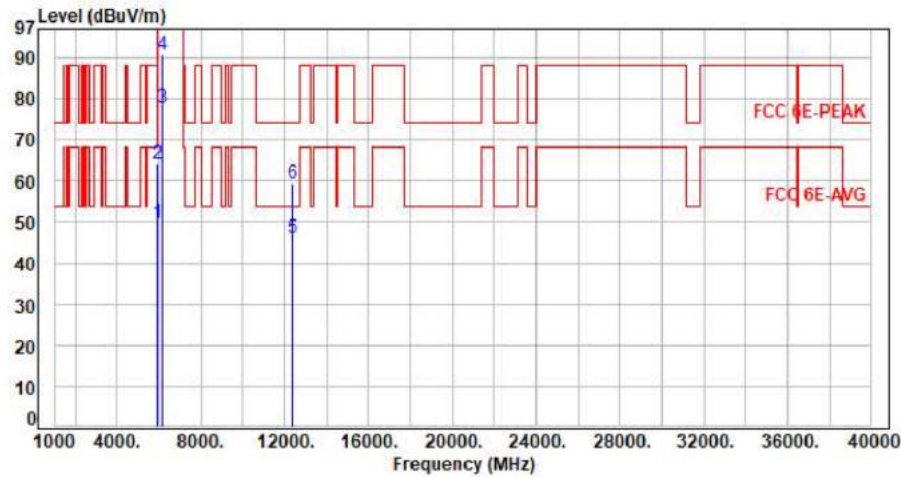


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.24	49.90	68.20	-18.30	Average	100	53	P
2	5925.00	7.66	56.36	64.02	88.20	-24.18	Peak	100	53	P
3	6175.00	8.35	69.58	77.93	200.00	-122.07	Average	100	53	P
4	6175.00	8.35	82.49	90.84	200.00	-109.16	Peak	100	53	P
5	12350.00	17.76	28.26	46.02	54.00	-7.98	Average	100	315	P
6	12350.00	17.76	41.46	59.22	74.00	-14.78	Peak	100	315	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

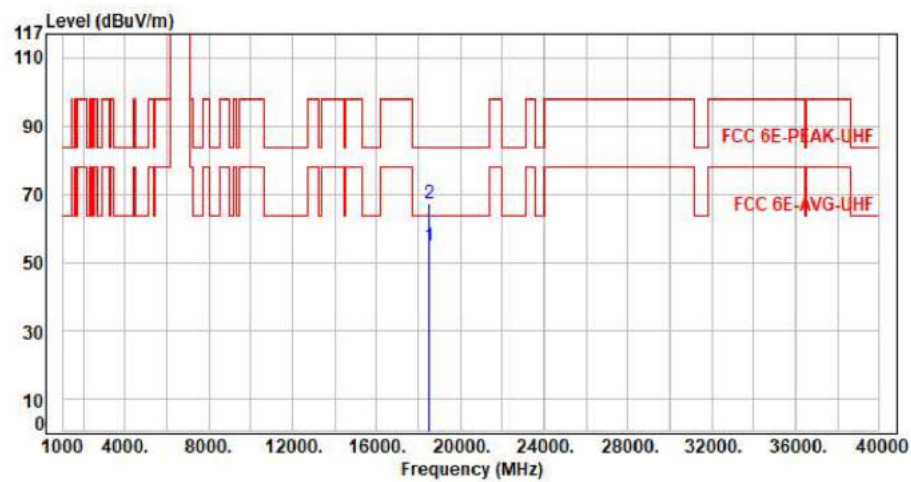

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	44.07	54.62	63.54	-8.92	Average	150	360	P
2	18525.00	10.55	56.54	67.09	83.54	-16.45	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

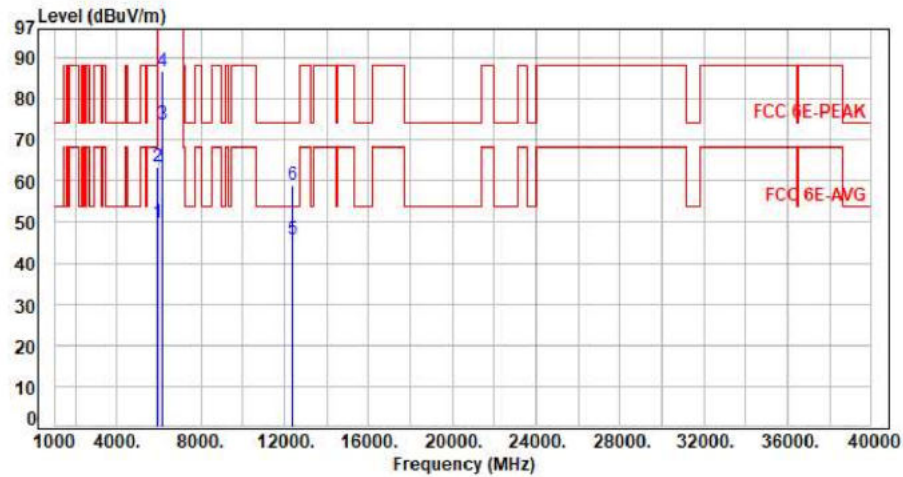


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.26	49.92	68.20	-18.28	Average	175	263	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	175	263	P
3	6175.00	8.35	65.51	73.86	200.00	-126.14	Average	175	263	P
4	6175.00	8.35	78.36	86.71	200.00	-113.29	Peak	175	263	P
5	12350.00	17.76	27.86	45.62	54.00	-8.38	Average	100	266	P
6	12350.00	17.76	41.37	59.13	74.00	-14.87	Peak	100	266	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

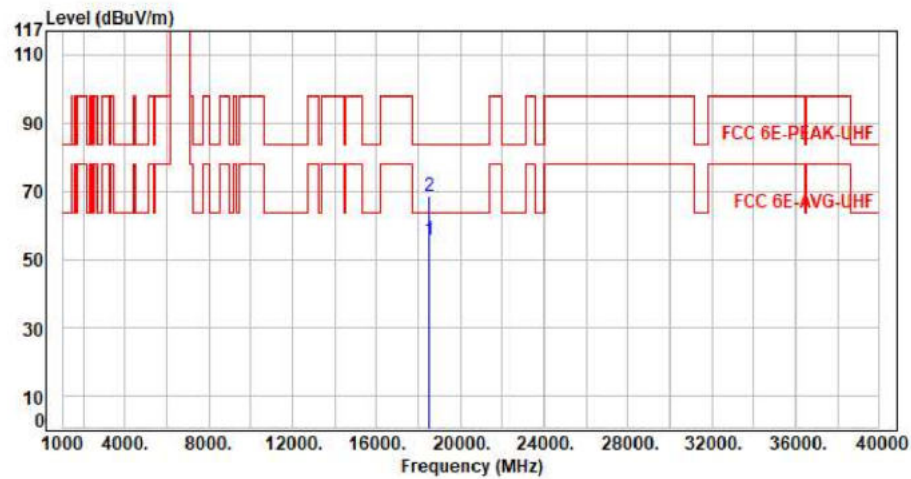

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	45.15	55.70	63.54	-7.84	Average	150	360	P
2	18525.00	10.55	57.91	68.46	83.54	-15.08	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

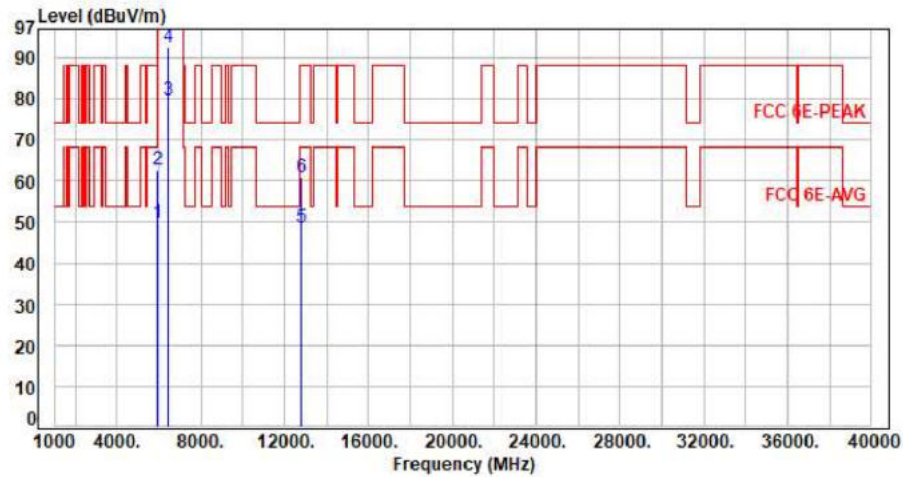


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.13	49.79	68.20	-18.41	Average	100	62	P
2	5925.00	7.66	55.16	62.82	88.20	-25.38	Peak	100	62	P
3	6415.00	8.34	71.28	79.62	200.00	-120.38	Average	100	62	P
4	6415.00	8.34	84.11	92.45	200.00	-107.55	Peak	100	62	P
5	12830.00	18.92	29.67	48.59	68.20	-19.61	Average	100	131	P
6	12830.00	18.92	42.09	61.01	88.20	-27.19	Peak	100	131	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

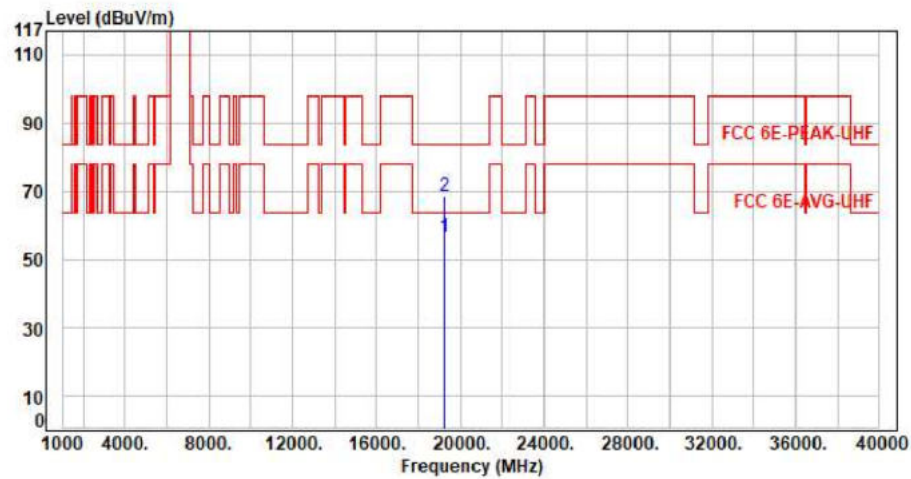


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.07	56.44	63.54	-7.10	Average	150	360	P
2	19245.00	11.37	57.14	68.51	83.54	-15.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

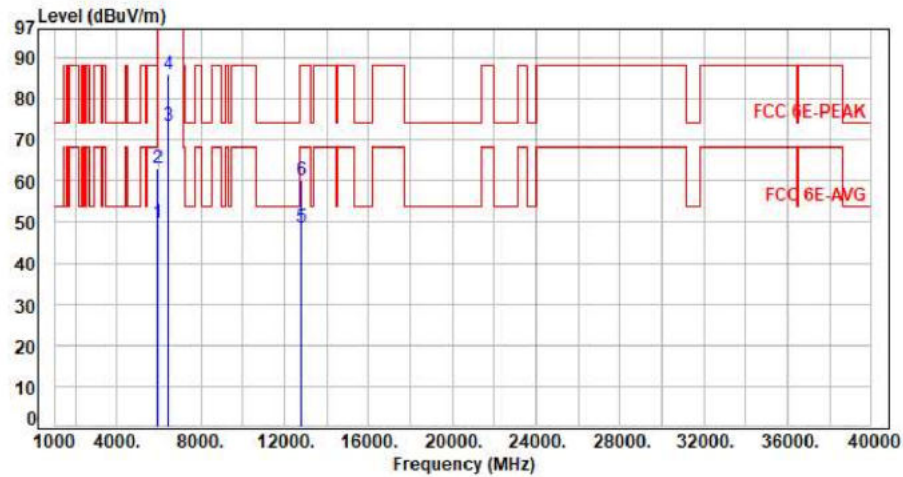


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	117	273	P
2	5925.00	7.66	55.40	63.06	88.20	-25.14	Peak	117	273	P
3	6415.00	8.34	64.93	73.27	200.00	-126.73	Average	117	273	P
4	6415.00	8.34	77.41	85.75	200.00	-114.25	Peak	117	273	P
5	12830.00	18.92	29.67	48.59	68.20	-19.61	Average	100	113	P
6	12830.00	18.92	41.22	60.14	88.20	-28.06	Peak	100	113	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

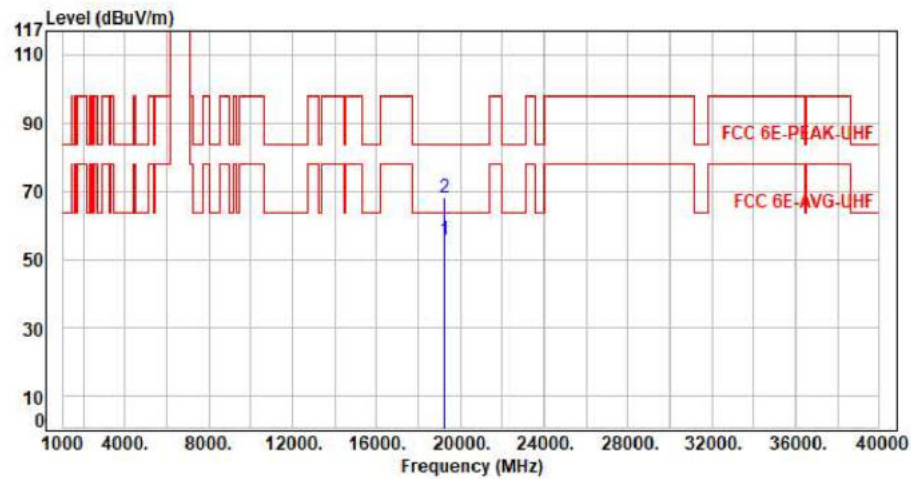


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	44.32	55.69	63.54	-7.85	Average	150	360	P
2	19245.00	11.37	56.87	68.24	83.54	-15.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

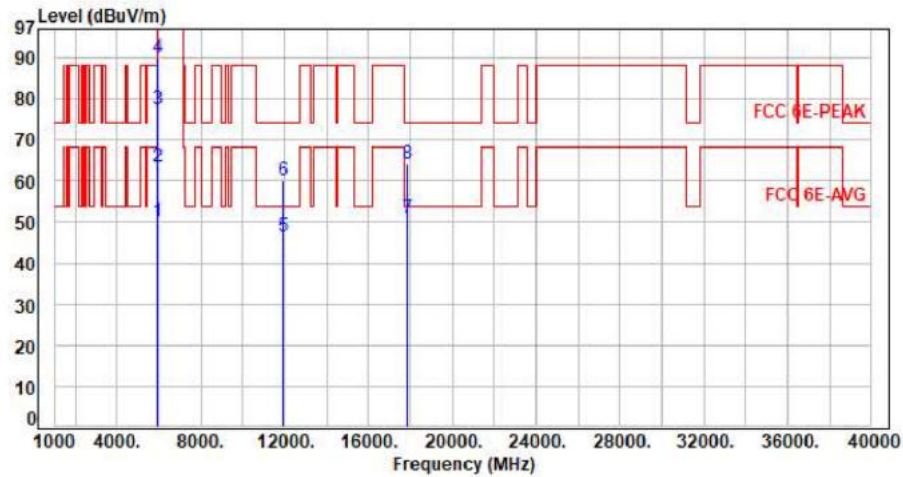


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.43	50.09	68.20	-18.11	Average	100	48	P
2	5925.00	7.66	55.82	63.48	88.20	-24.72	Peak	100	48	P
3	5965.00	7.71	69.62	77.33	200.00	-122.67	Average	100	48	P
4	5965.00	7.71	82.18	89.89	200.00	-110.11	Peak	100	48	P
5	11930.00	18.05	28.45	46.50	54.00	-7.50	Average	100	320	P
6	11930.00	18.05	42.17	60.22	74.00	-13.78	Peak	100	320	P
7	17895.00	27.89	22.90	50.79	54.00	-3.21	Average	100	180	P
8	17895.00	27.89	36.17	64.06	74.00	-9.94	Peak	100	180	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

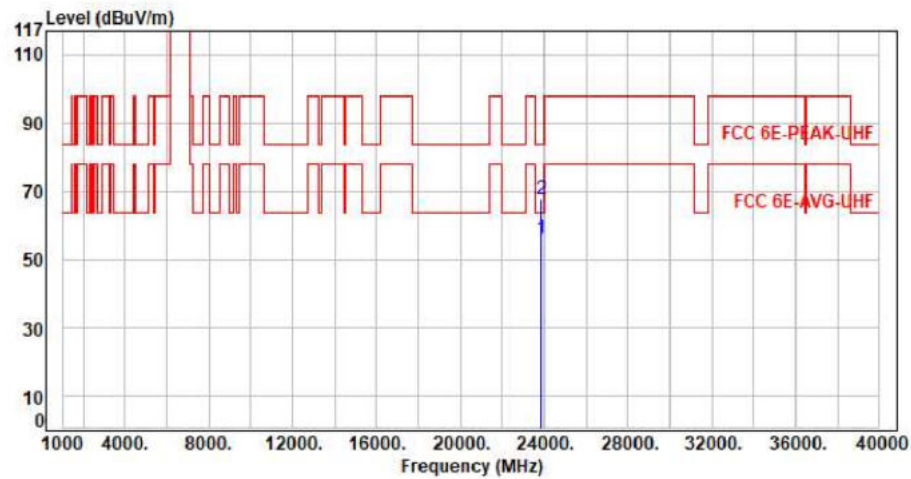


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.66	55.86	63.54	-7.68	Average	150	360	P
2	23860.00	11.20	56.55	67.75	83.54	-15.79	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

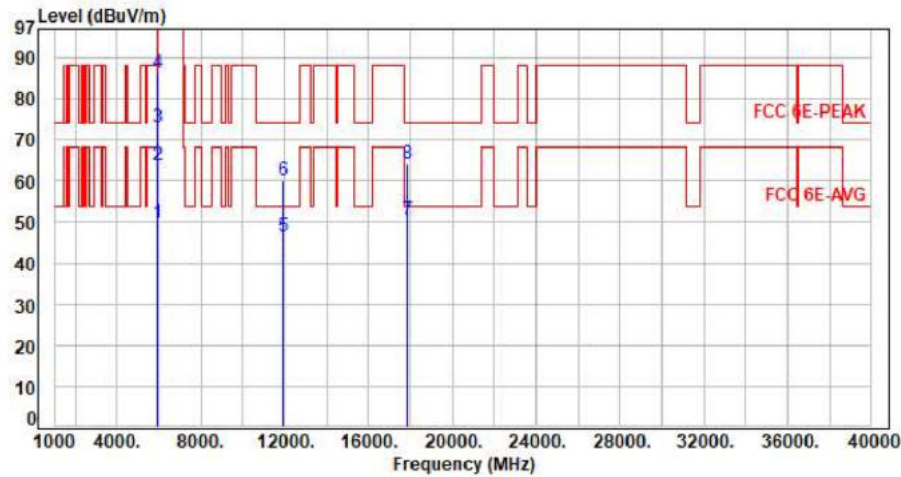

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.30	49.96	68.20	-18.24	Average	162	257	P
2	5925.00	7.66	56.11	63.77	88.20	-24.43	Peak	162	257	P
3	5965.00	7.71	65.48	73.19	200.00	-126.81	Average	162	257	P
4	5965.00	7.71	78.43	86.14	200.00	-113.86	Peak	162	257	P
5	11930.00	18.05	28.29	46.34	54.00	-7.66	Average	100	170	P
6	11930.00	18.05	42.14	60.19	74.00	-13.81	Peak	100	170	P
7	17895.00	27.89	22.50	50.39	54.00	-3.61	Average	100	255	P
8	17895.00	27.89	36.11	64.00	74.00	-10.00	Peak	100	255	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor