




For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

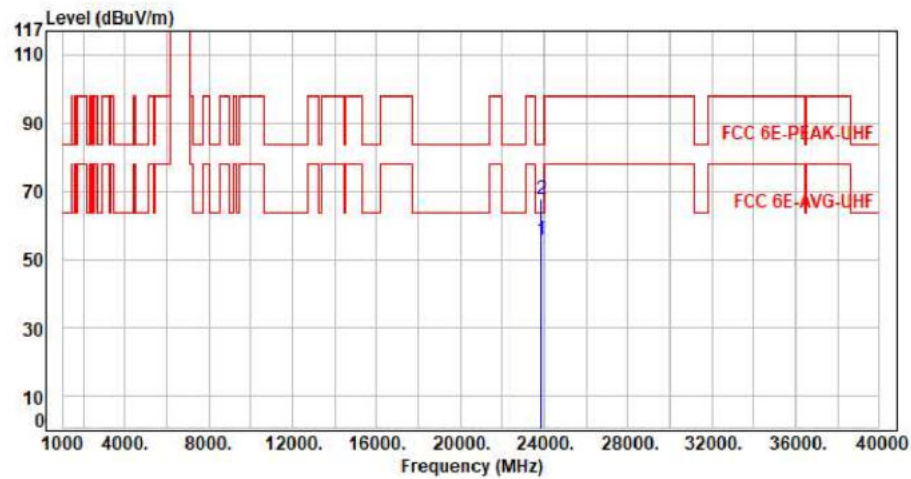


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.39	55.59	63.54	-7.95	Average	150	360	P
2	23860.00	11.20	56.44	67.64	83.54	-15.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

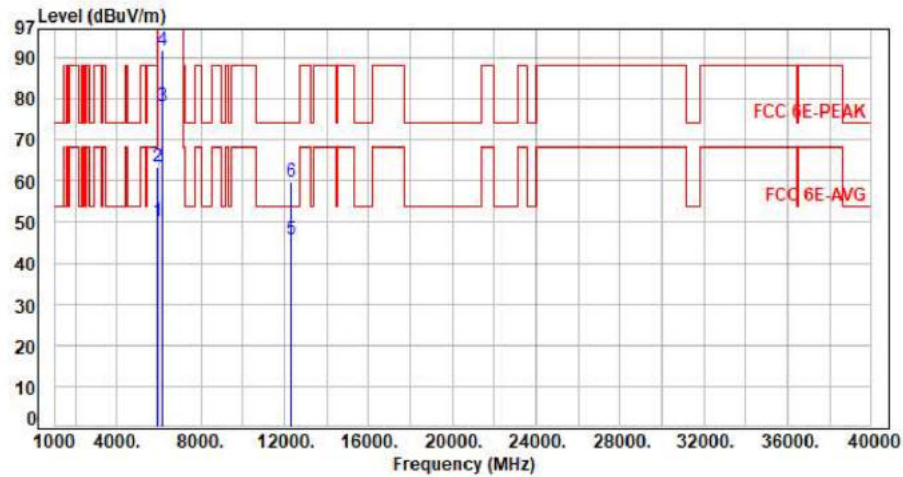


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	100	50	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	100	50	P
3	6165.00	8.34	69.94	78.28	200.00	-121.72	Average	100	50	P
4	6165.00	8.34	83.52	91.86	200.00	-108.14	Peak	100	50	P
5	12330.00	17.71	28.18	45.89	54.00	-8.11	Average	100	315	P
6	12330.00	17.71	42.00	59.71	74.00	-14.29	Peak	100	315	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

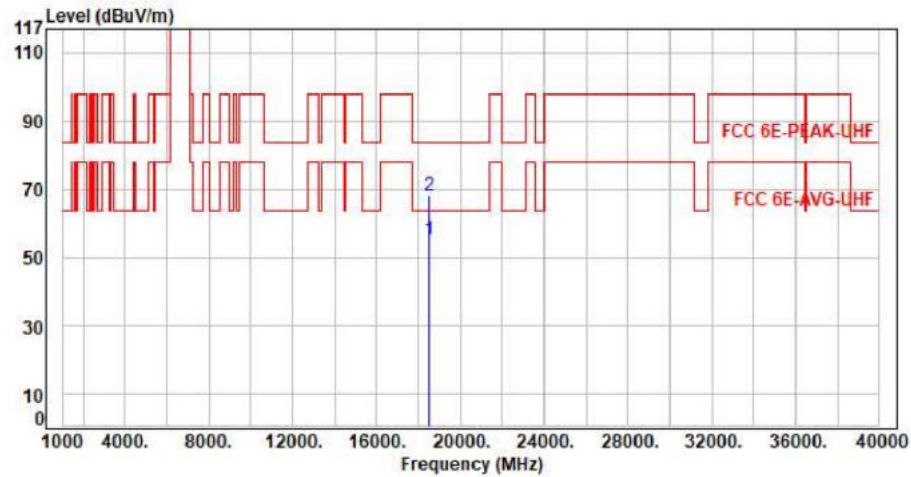


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	44.66	55.07	63.54	-8.47	Average	150	360	P
2	18495.00	10.41	57.54	67.95	83.54	-15.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

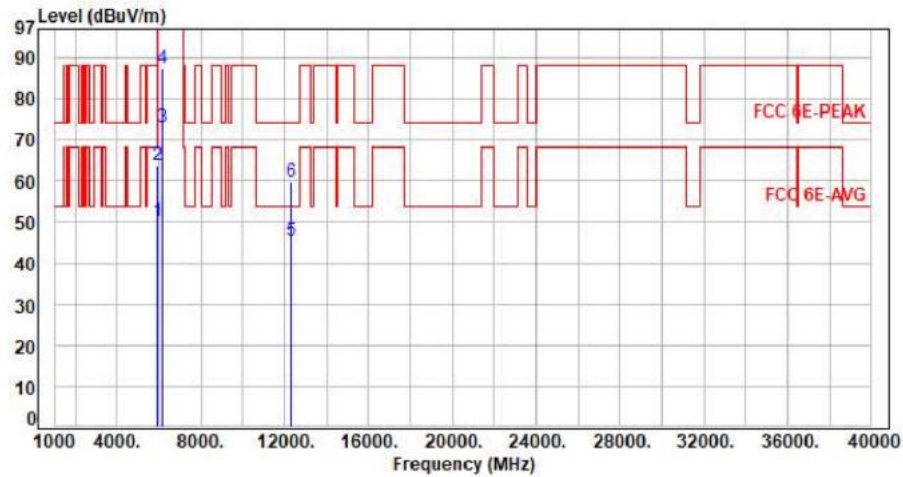


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.53	50.19	68.20	-18.01	Average	169	265	P
2	5925.00	7.66	55.99	63.65	88.20	-24.55	Peak	169	265	P
3	6165.00	8.34	64.72	73.06	200.00	-126.94	Average	169	265	P
4	6165.00	8.34	79.11	87.45	200.00	-112.55	Peak	169	265	P
5	12330.00	17.71	27.76	45.47	54.00	-8.53	Average	100	155	P
6	12330.00	17.71	42.05	59.76	74.00	-14.24	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

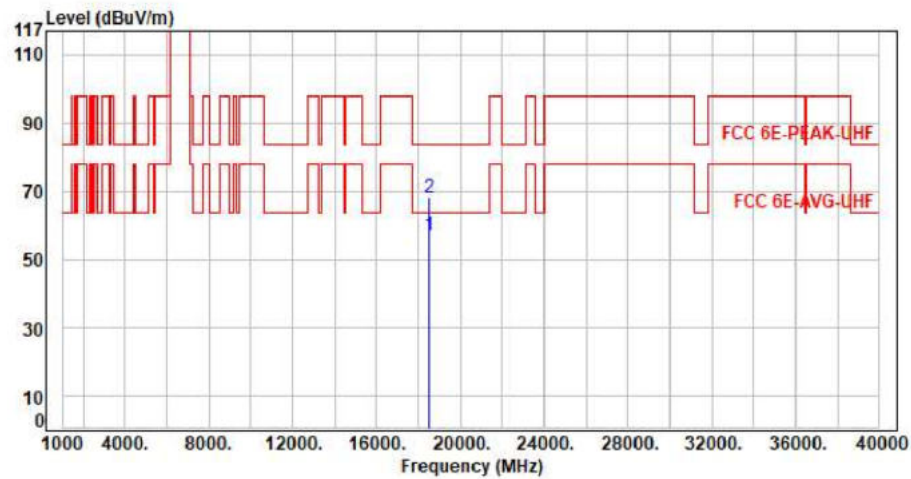


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.31	56.72	63.54	-6.82	Average	150	360	P
2	18495.00	10.41	57.64	68.05	83.54	-15.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

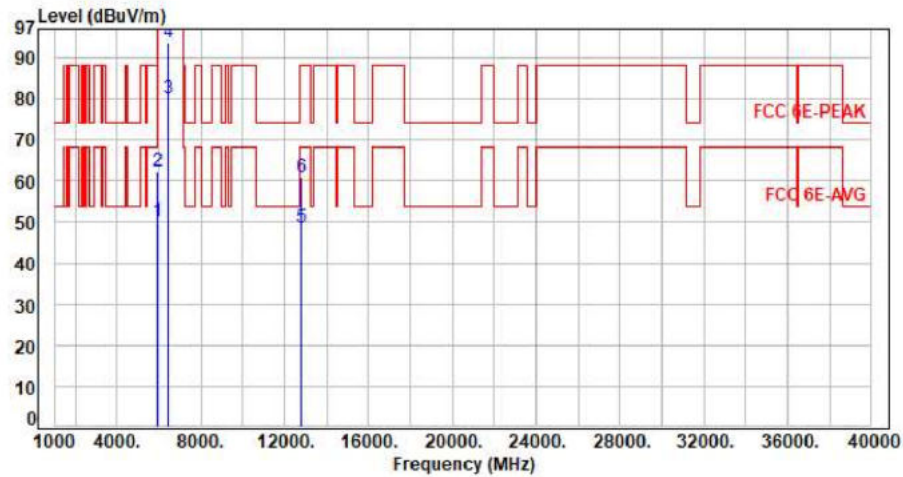


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.61	50.27	68.20	-17.93	Average	100	64	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	100	64	P
3	6405.00	8.35	71.65	80.00	200.00	-120.00	Average	100	64	P
4	6405.00	8.35	85.51	93.86	200.00	-106.14	Peak	100	64	P
5	12810.00	18.88	29.67	48.55	68.20	-19.65	Average	100	115	P
6	12810.00	18.88	42.09	60.97	88.20	-27.23	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

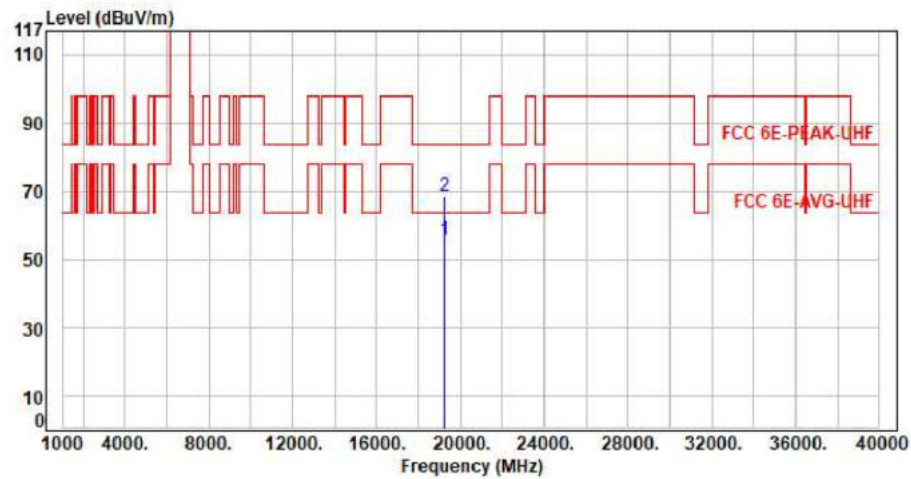


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.49	55.73	63.54	-7.81	Average	150	360	P
2	19215.00	11.24	57.43	68.67	83.54	-14.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

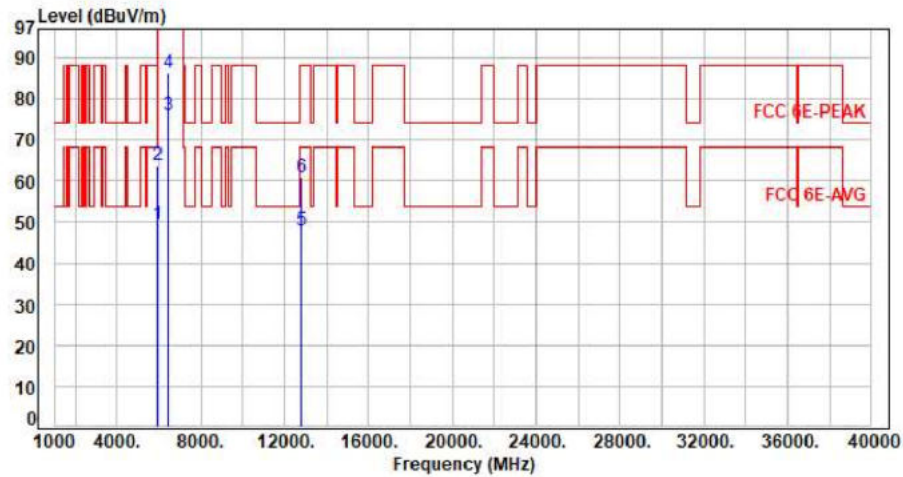


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.84	49.50	68.20	-18.70	Average	141	274	P
2	5925.00	7.66	56.21	63.87	88.20	-24.33	Peak	141	274	P
3	6405.00	8.35	67.78	76.13	200.00	-123.87	Average	141	274	P
4	6405.00	8.35	78.03	86.38	200.00	-113.62	Peak	141	274	P
5	12810.00	18.88	29.18	48.06	68.20	-20.14	Average	100	152	P
6	12810.00	18.88	42.07	60.95	88.20	-27.25	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

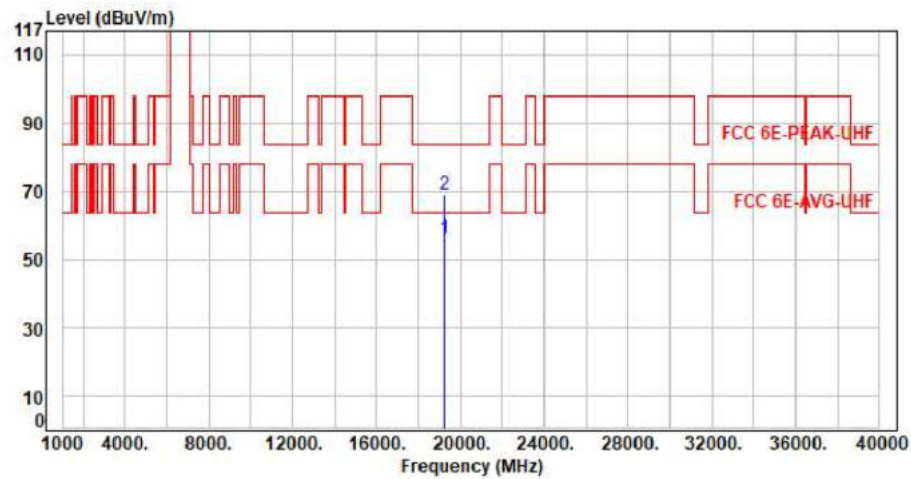


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.85	56.09	63.54	-7.45	Average	150	360	P
2	19215.00	11.24	57.85	69.09	83.54	-14.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

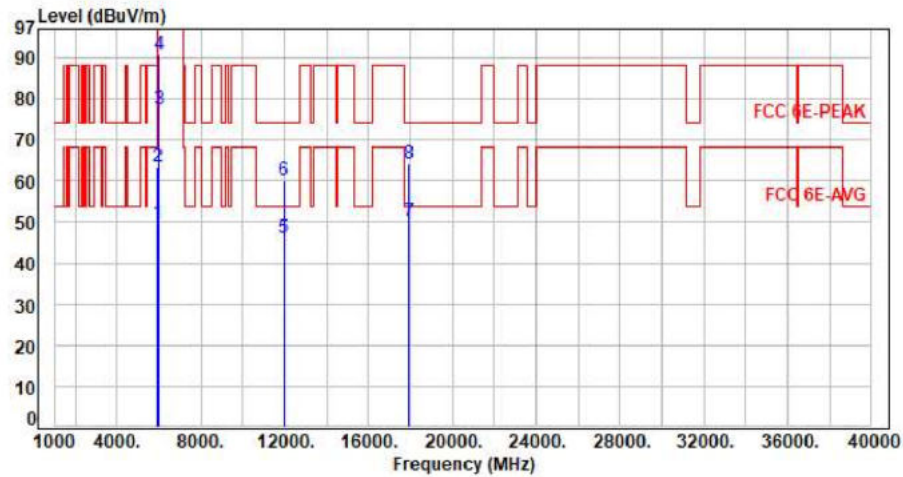

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	100	52	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	100	52	P
3	5985.00	7.75	69.82	77.57	200.00	-122.43	Average	100	52	P
4	5985.00	7.75	82.97	90.72	200.00	-109.28	Peak	100	52	P
5	11970.00	18.02	28.19	46.21	54.00	-7.79	Average	100	313	P
6	11970.00	18.02	42.16	60.18	74.00	-13.82	Peak	100	313	P
7	17955.00	28.04	22.29	50.33	54.00	-3.67	Average	100	180	P
8	17955.00	28.04	36.09	64.13	74.00	-9.87	Peak	100	180	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

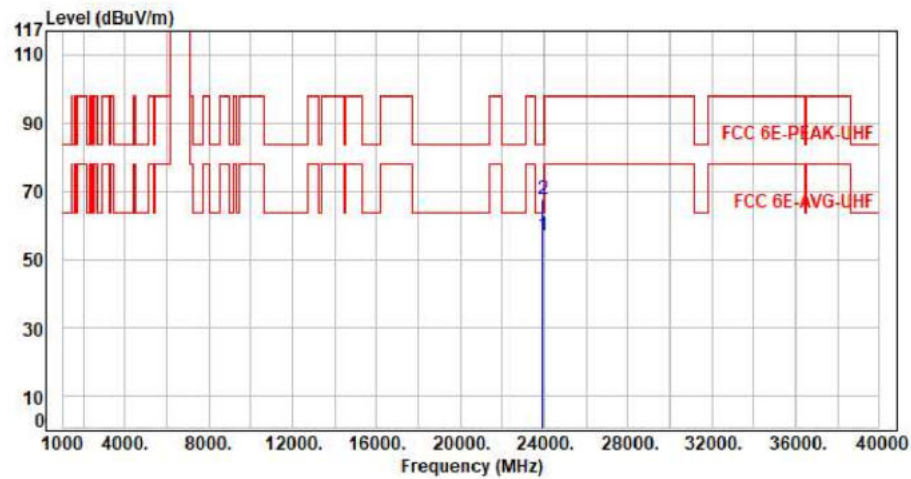

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.38	56.74	63.54	-6.80	Average	150	360	P
2	23940.00	11.36	56.44	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

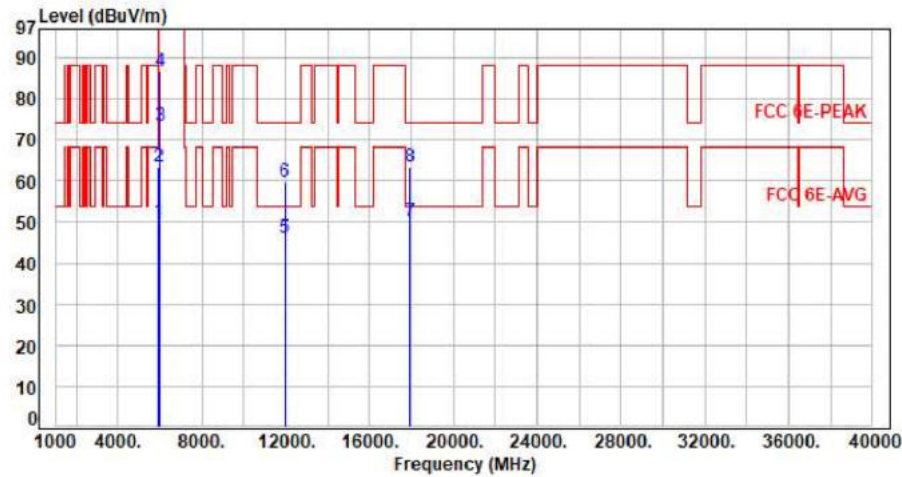

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.33	49.99	68.20	-18.21	Average	157	262	P
2	5925.00	7.66	55.87	63.53	88.20	-24.67	Peak	157	262	P
3	5985.00	7.75	65.48	73.23	200.00	-126.77	Average	157	262	P
4	5985.00	7.75	78.83	86.58	200.00	-113.42	Peak	157	262	P
5	11970.00	18.02	27.96	45.98	54.00	-8.02	Average	100	161	P
6	11970.00	18.02	41.78	59.80	74.00	-14.20	Peak	100	161	P
7	17955.00	28.04	22.25	50.29	54.00	-3.71	Average	100	255	P
8	17955.00	28.04	35.55	63.59	74.00	-10.41	Peak	100	255	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

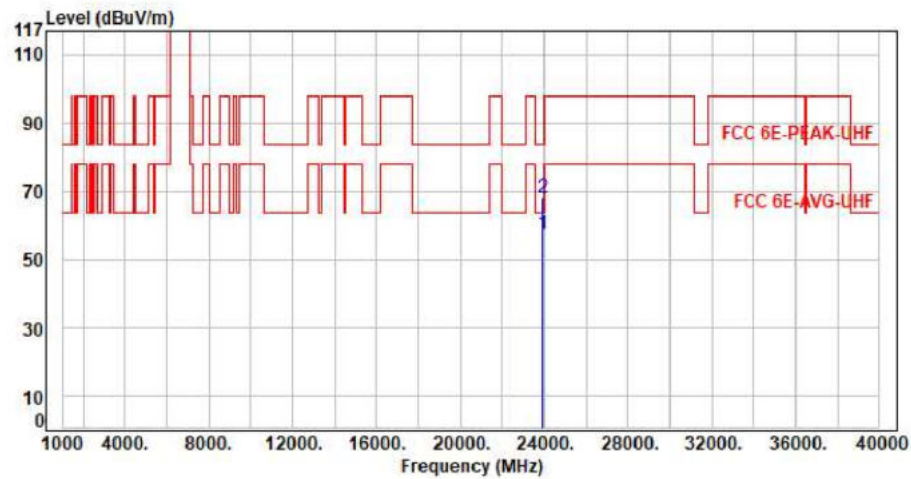


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	46.03	57.39	63.54	-6.15	Average	150	360	P
2	23940.00	11.36	56.53	67.89	83.54	-15.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

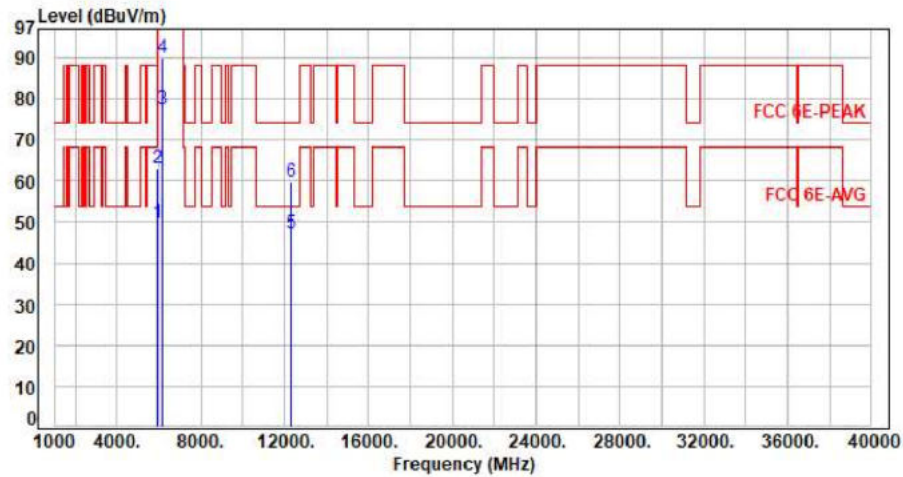


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.04	49.70	68.20	-18.50	Average	100	48	P
2	5925.00	7.66	55.39	63.05	88.20	-25.15	Peak	100	48	P
3	6145.00	8.31	69.08	77.39	200.00	-122.61	Average	100	48	P
4	6145.00	8.31	81.72	90.03	200.00	-109.97	Peak	100	48	P
5	12290.00	17.62	29.76	47.38	54.00	-6.62	Average	100	116	P
6	12290.00	17.62	42.08	59.70	74.00	-14.30	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

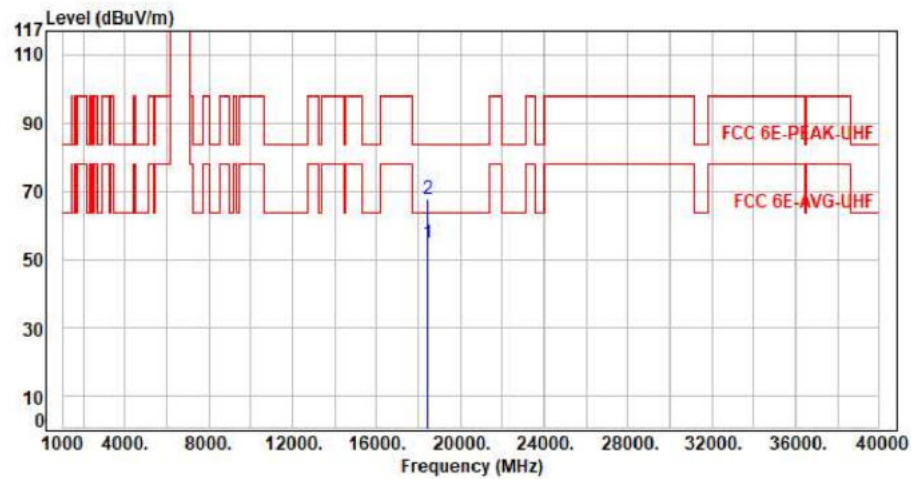


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.68	54.88	63.54	-8.66	Average	150	360	P
2	18435.00	10.20	57.51	67.71	83.54	-15.83	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

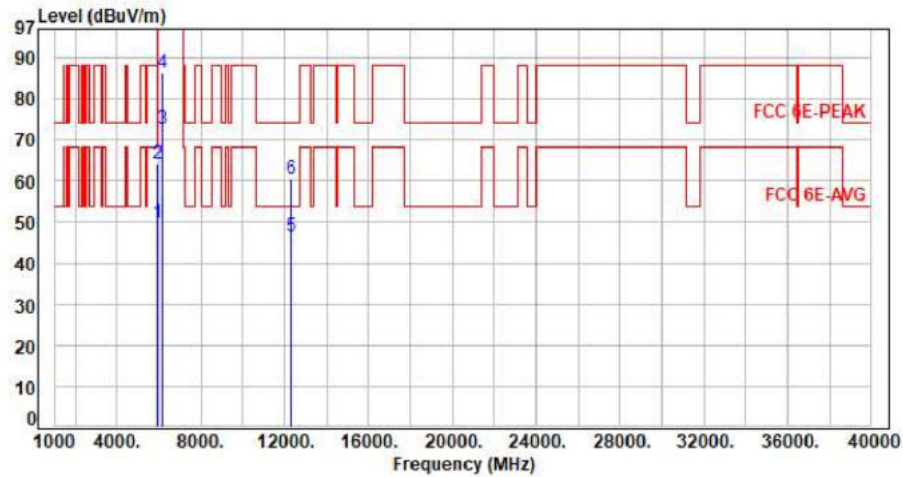


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	149	108	P
2	5925.00	7.66	56.44	64.10	88.20	-24.10	Peak	149	108	P
3	6145.00	8.31	64.22	72.53	200.00	-127.47	Average	149	108	P
4	6145.00	8.31	77.81	86.12	200.00	-113.88	Peak	149	108	P
5	12290.00	17.62	29.00	46.62	54.00	-7.38	Average	100	115	P
6	12290.00	17.62	43.00	60.62	74.00	-13.38	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

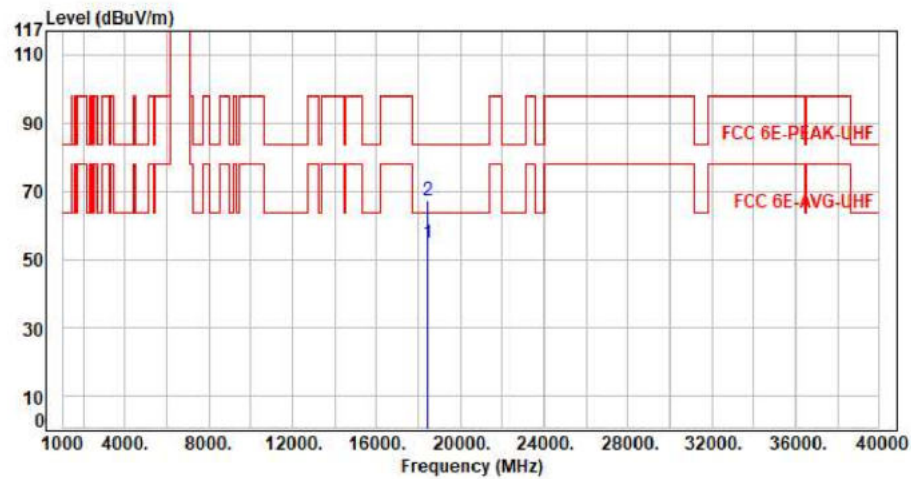


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.43	54.63	63.54	-8.91	Average	150	360	P
2	18435.00	10.20	57.00	67.20	83.54	-16.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

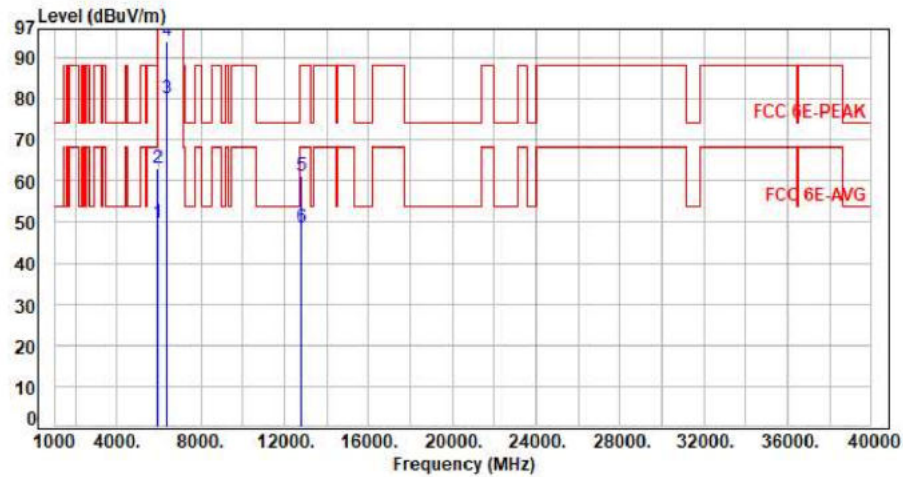


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	100	66	P
2	5925.00	7.66	55.52	63.18	88.20	-25.02	Peak	100	66	P
3	6385.00	8.34	71.87	80.21	200.00	-119.79	Average	100	66	P
4	6385.00	8.34	85.87	94.21	200.00	-105.79	Peak	100	66	P
5	12770.00	18.73	42.53	61.26	68.20	-6.94	Average	100	262	P
6	12770.00	18.73	29.88	48.61	88.20	-39.59	Peak	100	262	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

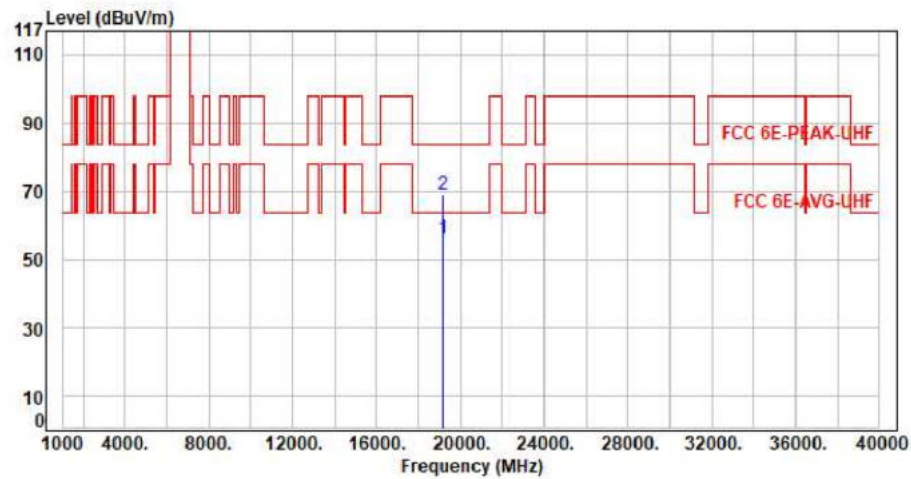


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	44.64	55.98	63.54	-7.56	Average	150	360	P
2	19155.00	11.34	57.47	68.81	83.54	-14.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

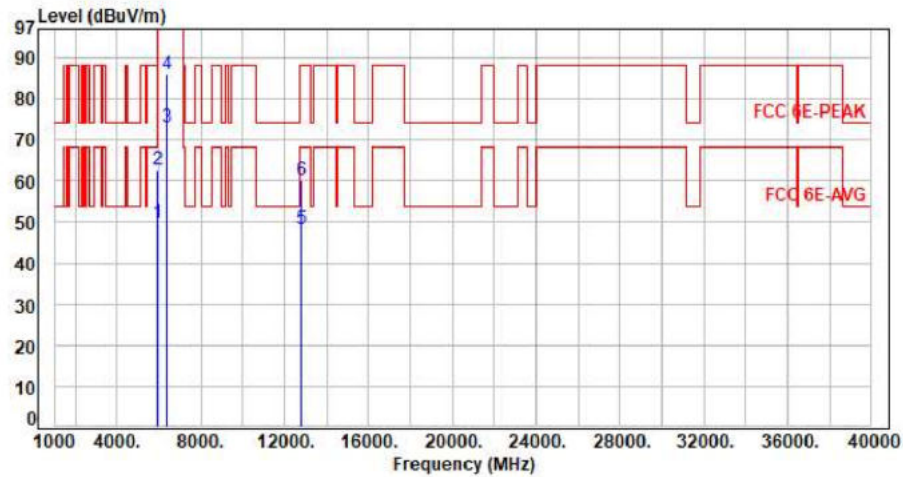


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.19	49.85	68.20	-18.35	Average	129	272	P
2	5925.00	7.66	55.19	62.85	88.20	-25.35	Peak	129	272	P
3	6385.00	8.34	64.74	73.08	200.00	-126.92	Average	129	272	P
4	6385.00	8.34	77.68	86.02	200.00	-113.98	Peak	129	272	P
5	12770.00	18.73	29.76	48.49	68.20	-19.71	Average	100	138	P
6	12770.00	18.73	41.22	59.95	88.20	-28.25	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

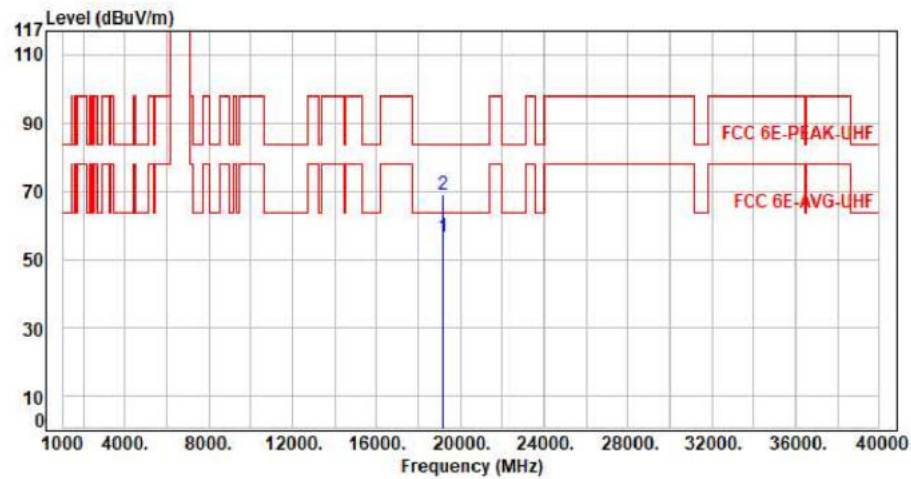


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	45.12	56.46	63.54	-7.08	Average	150	360	P
2	19155.00	11.34	57.65	68.99	83.54	-14.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

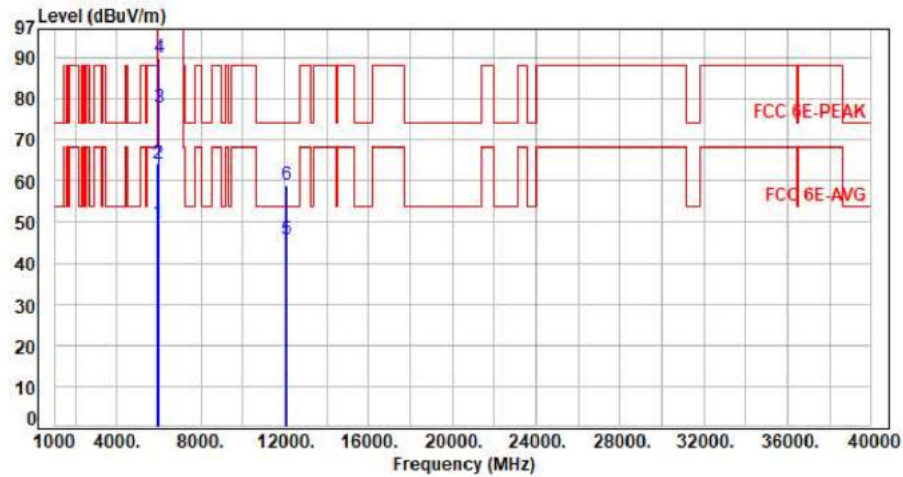


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.28	49.94	68.20	-18.26	Average	100	59	P
2	5925.00	7.66	56.39	64.05	88.20	-24.15	Peak	100	59	P
3	6025.00	7.91	69.84	77.75	200.00	-122.25	Average	100	59	P
4	6025.00	7.91	81.93	89.84	200.00	-110.16	Peak	100	59	P
5	12050.00	17.81	27.88	45.69	54.00	-8.31	Average	100	311	P
6	12050.00	17.81	41.35	59.16	74.00	-14.84	Peak	100	311	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

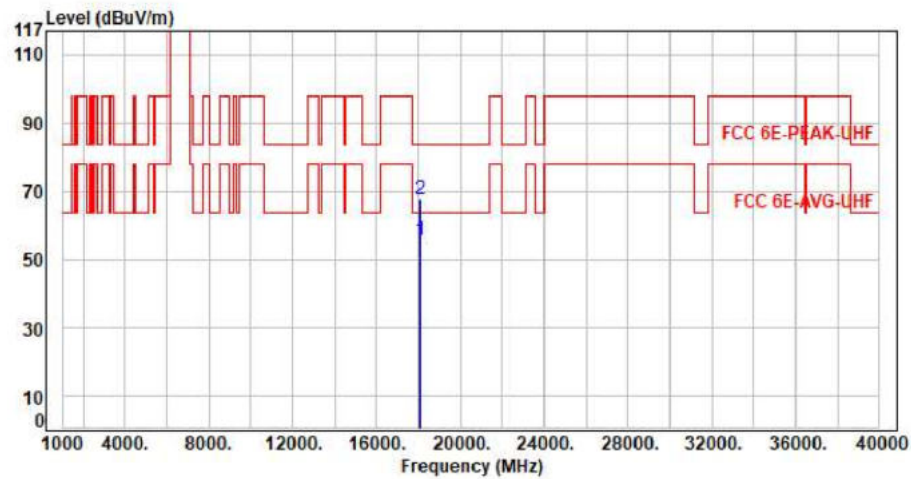


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	45.78	55.68	63.54	-7.86	Average	150	360	P
2	18075.00	9.90	57.77	67.67	83.54	-15.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

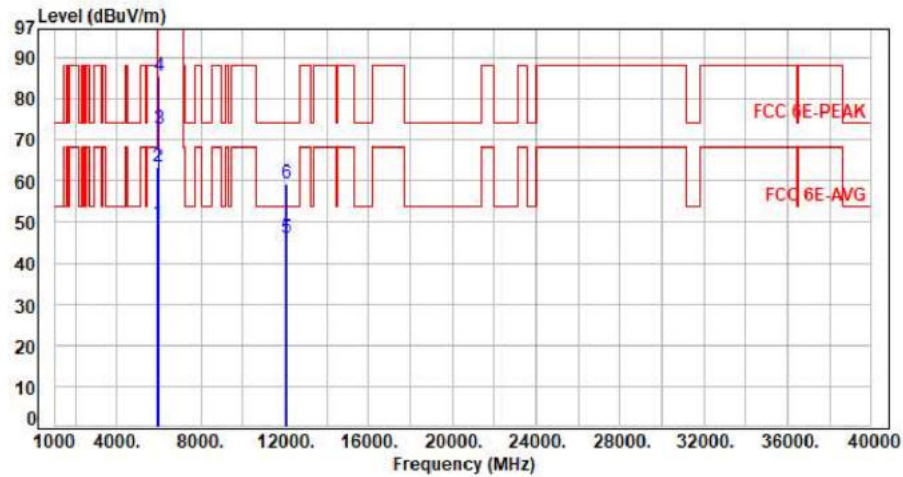


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	161	282	P
2	5925.00	7.66	55.75	63.41	88.20	-24.79	Peak	161	282	P
3	6025.00	7.91	64.82	72.73	200.00	-127.27	Average	161	282	P
4	6025.00	7.91	77.78	85.69	200.00	-114.31	Peak	161	282	P
5	12050.00	17.81	28.13	45.94	54.00	-8.06	Average	100	152	P
6	12050.00	17.81	41.67	59.48	74.00	-14.52	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

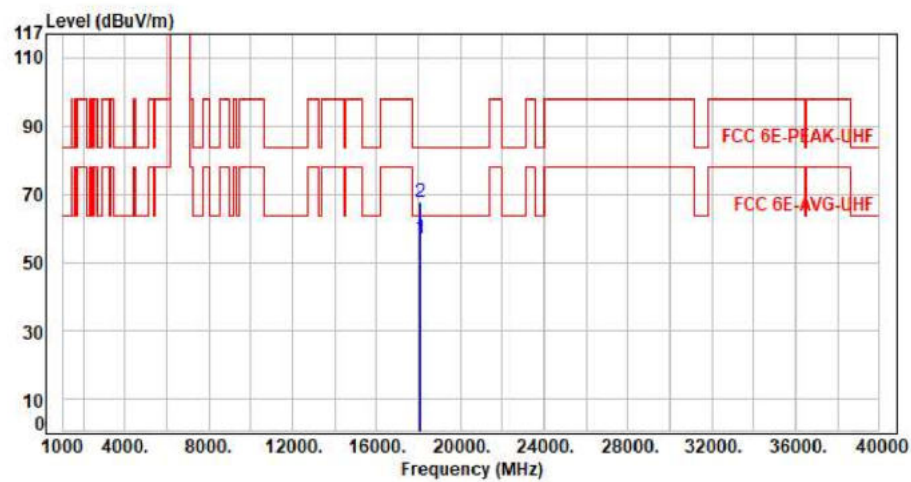


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	47.04	56.94	63.54	-6.60	Average	150	360	P
2	18075.00	9.90	57.57	67.47	83.54	-16.07	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

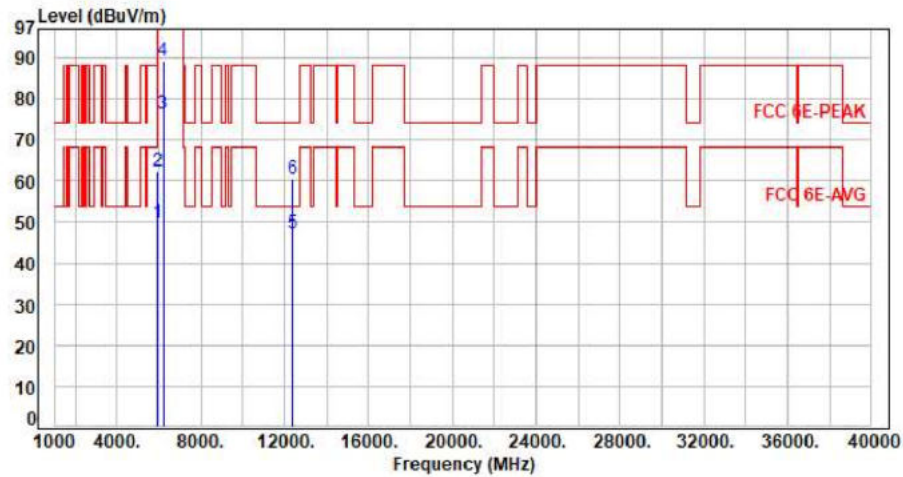


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	100	67	P
2	5925.00	7.66	54.81	62.47	88.20	-25.73	Peak	100	67	P
3	6185.00	8.36	67.81	76.17	200.00	-123.83	Average	100	67	P
4	6185.00	8.36	80.94	89.30	200.00	-110.70	Peak	100	67	P
5	12370.00	17.74	29.42	47.16	54.00	-6.84	Average	100	316	P
6	12370.00	17.74	42.75	60.49	74.00	-13.51	Peak	100	316	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

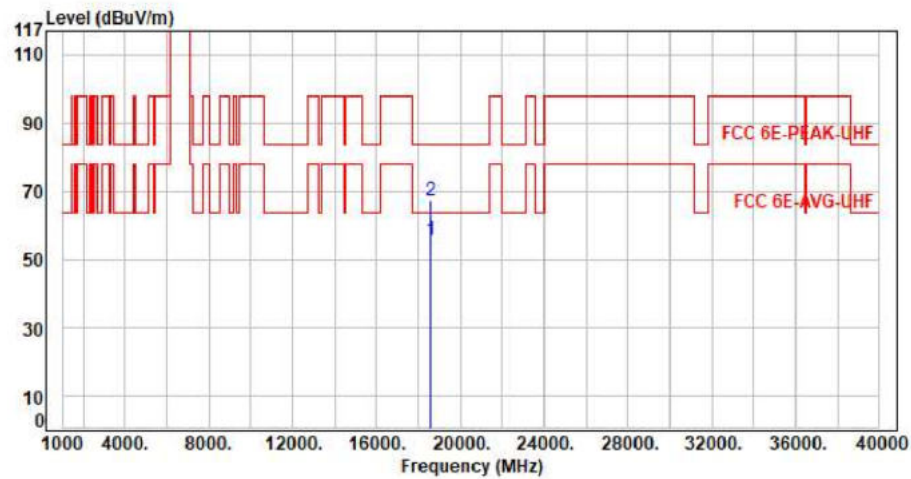


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	44.88	55.54	63.54	-8.00	Average	150	360	P
2	18555.00	10.66	56.72	67.38	83.54	-16.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

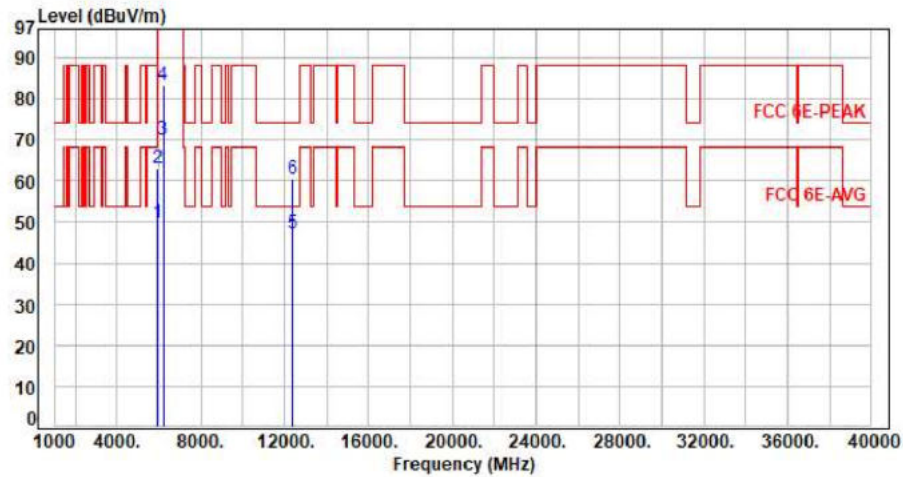


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.98	49.64	68.20	-18.56	Average	100	108	P
2	5925.00	7.66	55.29	62.95	88.20	-25.25	Peak	100	108	P
3	6185.00	8.36	61.79	70.15	200.00	-129.85	Average	100	108	P
4	6185.00	8.36	74.90	83.26	200.00	-116.74	Peak	100	108	P
5	12370.00	17.74	29.46	47.20	54.00	-6.80	Average	100	194	P
6	12370.00	17.74	42.85	60.59	74.00	-13.41	Peak	100	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

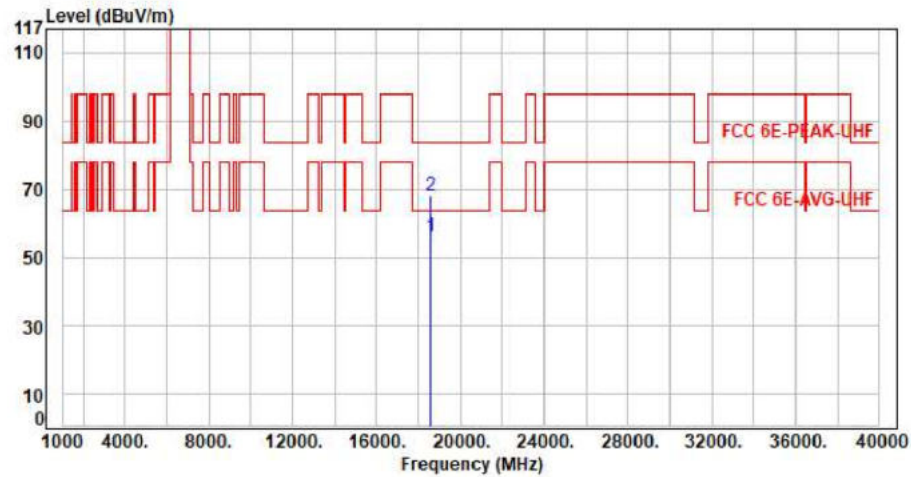


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.29	55.95	63.54	-7.59	Average	150	360	P
2	18555.00	10.66	57.62	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

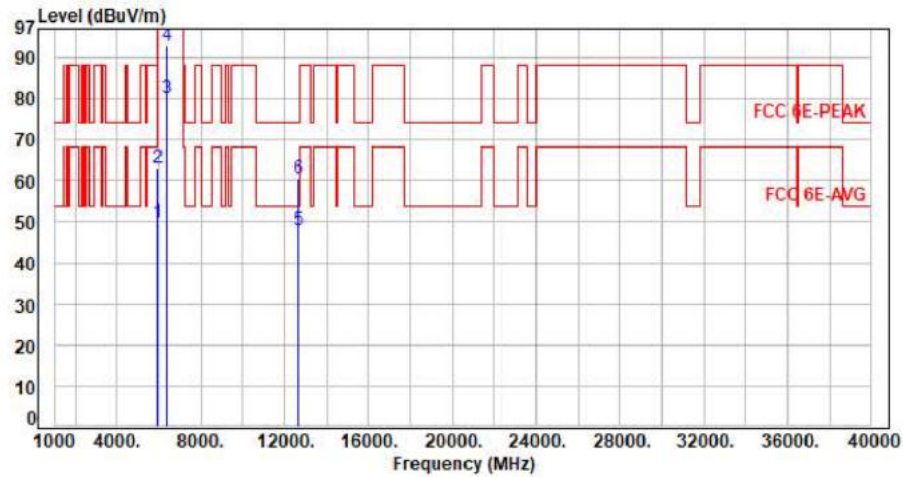


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	100	65	P
2	5925.00	7.66	55.56	63.22	88.20	-24.98	Peak	100	65	P
3	6345.00	8.31	71.73	80.04	200.00	-119.96	Average	100	65	P
4	6345.00	8.31	84.68	92.99	200.00	-107.01	Peak	100	65	P
5	12690.00	18.27	29.77	48.04	54.00	-5.96	Average	100	121	P
6	12690.00	18.27	42.28	60.55	74.00	-13.45	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

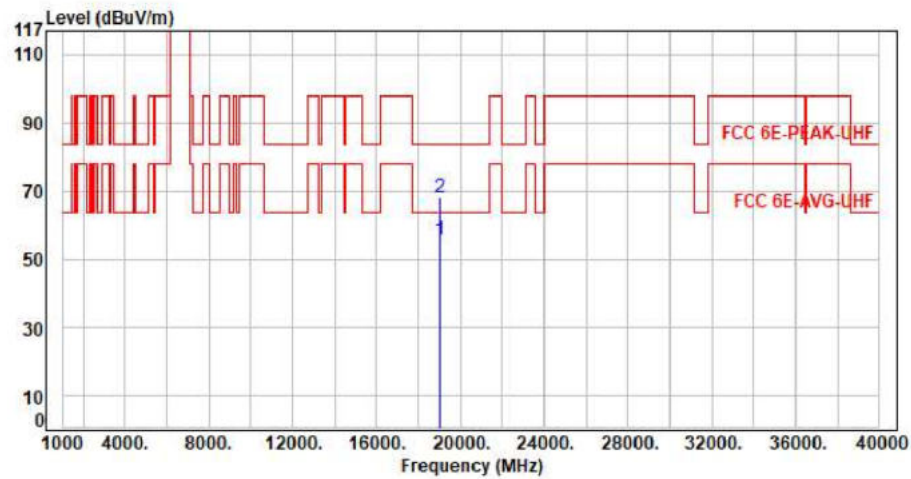


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.05	55.46	63.54	-8.08	Average	150	360	P
2	19035.00	11.41	56.46	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

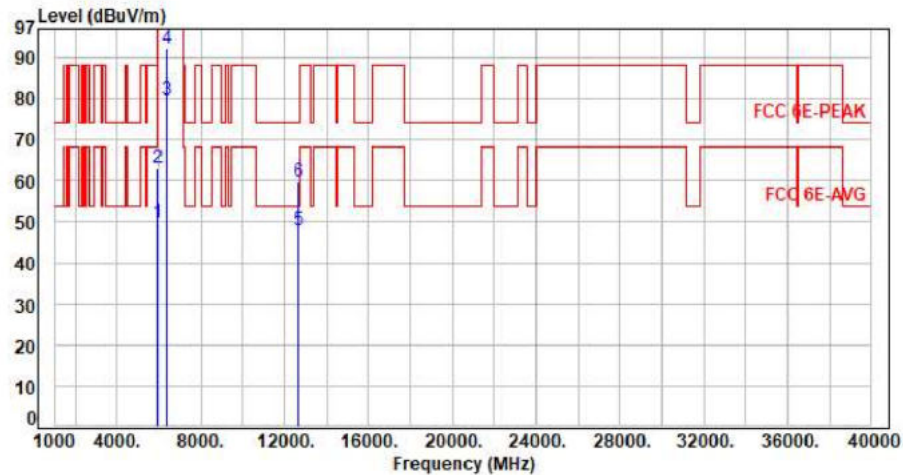


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	393	84	P
2	5925.00	7.66	55.41	63.07	88.20	-25.13	Peak	393	84	P
3	6345.00	8.31	71.20	79.51	200.00	-120.49	Average	393	84	P
4	6345.00	8.31	83.73	92.04	200.00	-107.96	Peak	393	84	P
5	12690.00	18.27	29.52	47.79	54.00	-6.21	Average	100	191	P
6	12690.00	18.27	41.66	59.93	74.00	-14.07	Peak	100	191	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

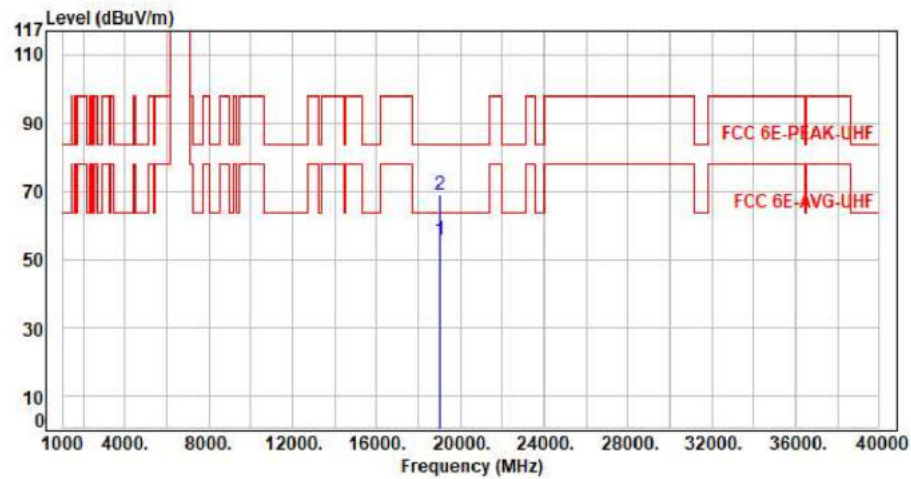


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.23	55.64	63.54	-7.90	Average	150	360	P
2	19035.00	11.41	57.37	68.78	83.54	-14.76	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

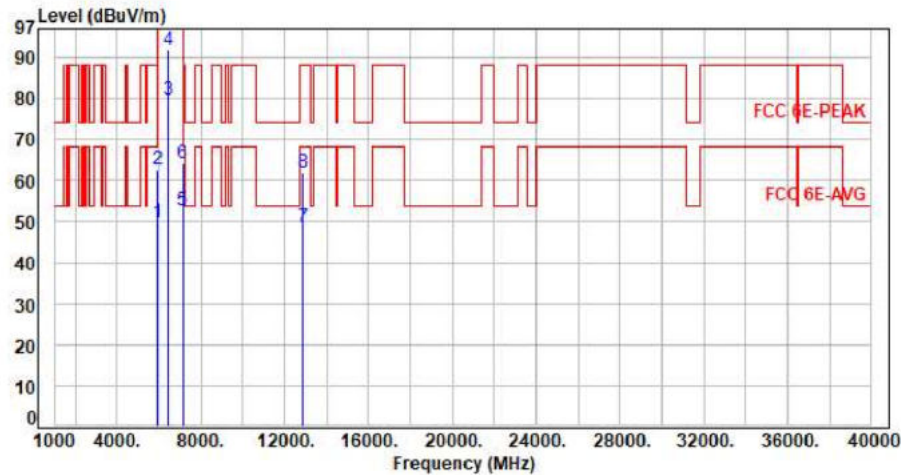

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	100	59	P
2	5925.00	7.66	54.87	62.53	88.20	-25.67	Peak	100	59	P
3	6435.00	8.32	71.35	79.67	200.00	-120.33	Average	100	59	P
4	6435.00	8.32	83.70	92.02	200.00	-107.98	Peak	100	59	P
5	7125.00	10.05	42.85	52.90	68.20	-15.30	Average	100	59	P
6	7125.00	10.05	54.24	64.29	88.20	-23.91	Peak	100	59	P
7	12870.00	19.02	29.57	48.59	68.20	-19.61	Average	100	142	P
8	12870.00	19.02	43.11	62.13	88.20	-26.07	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

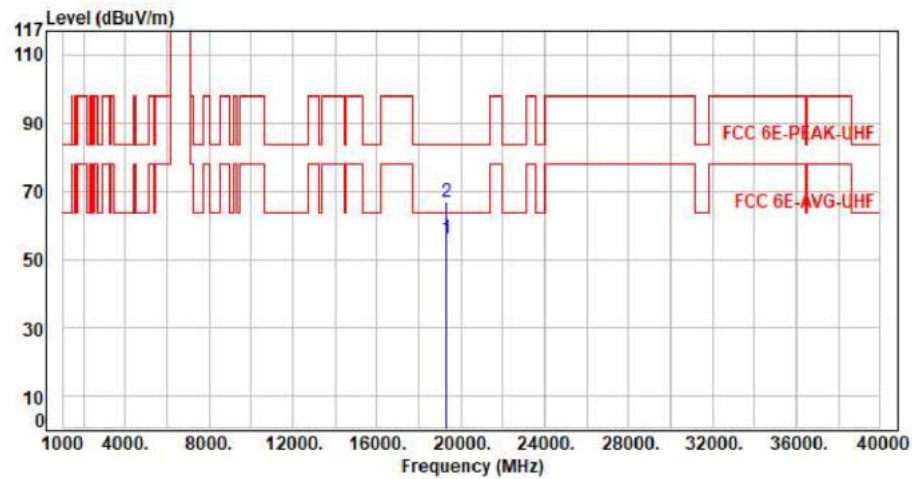


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.56	56.17	63.54	-7.37	Average	150	360	P
2	19305.00	11.61	55.18	66.79	83.54	-16.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

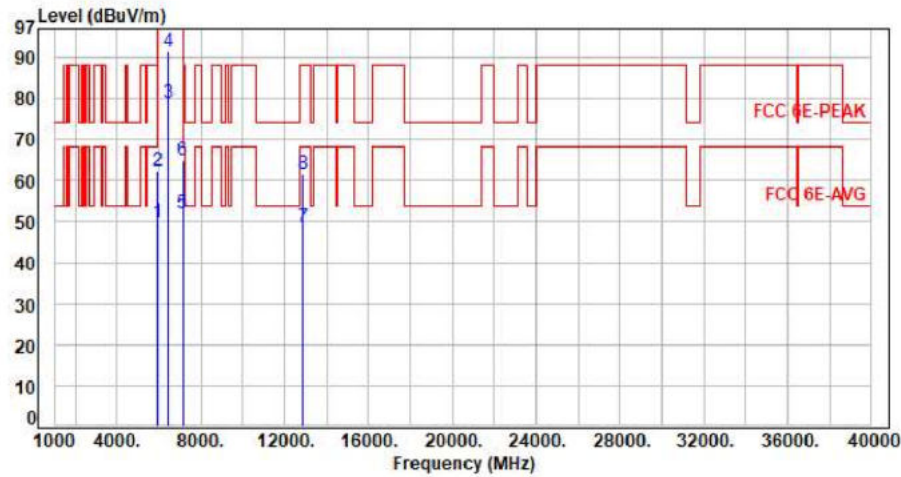

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	389	81	P
2	5925.00	7.66	54.85	62.51	88.20	-25.69	Peak	389	81	P
3	6435.00	8.32	70.52	78.84	200.00	-121.16	Average	389	81	P
4	6435.00	8.32	83.01	91.33	200.00	-108.67	Peak	389	81	P
5	7125.00	10.05	42.10	52.15	68.20	-16.05	Average	389	81	P
6	7125.00	10.05	54.85	64.90	88.20	-23.30	Peak	389	81	P
7	12870.00	19.02	29.65	48.67	68.20	-19.53	Average	100	133	P
8	12870.00	19.02	42.65	61.67	88.20	-26.53	Peak	100	133	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

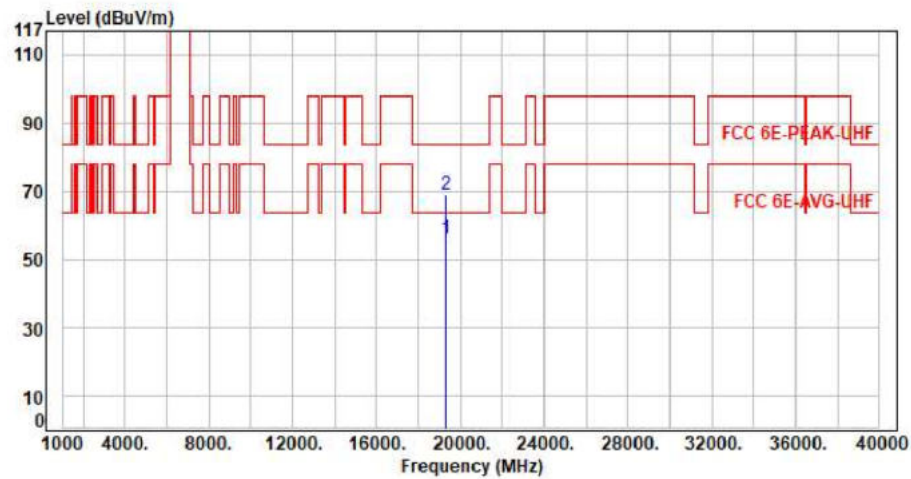


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.29	55.90	63.54	-7.64	Average	150	360	P
2	19305.00	11.61	57.26	68.87	83.54	-14.67	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

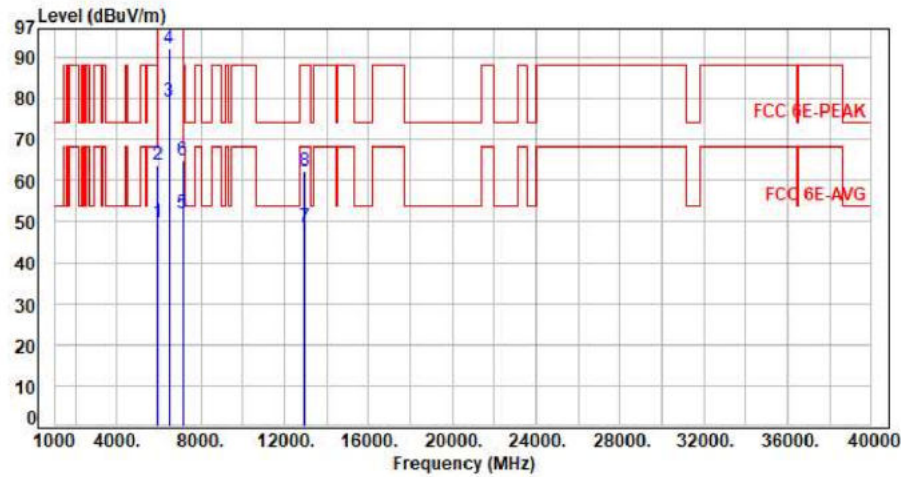

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.96	49.62	68.20	-18.58	Average	100	65	P
2	5925.00	7.66	56.09	63.75	88.20	-24.45	Peak	100	65	P
3	6475.00	8.33	70.99	79.32	200.00	-120.68	Average	100	65	P
4	6475.00	8.33	83.85	92.18	200.00	-107.82	Peak	100	65	P
5	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	100	65	P
6	7125.00	10.05	54.77	64.82	88.20	-23.38	Peak	100	65	P
7	12950.00	19.39	29.44	48.83	68.20	-19.37	Average	100	195	P
8	12950.00	19.39	42.77	62.16	88.20	-26.04	Peak	100	195	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

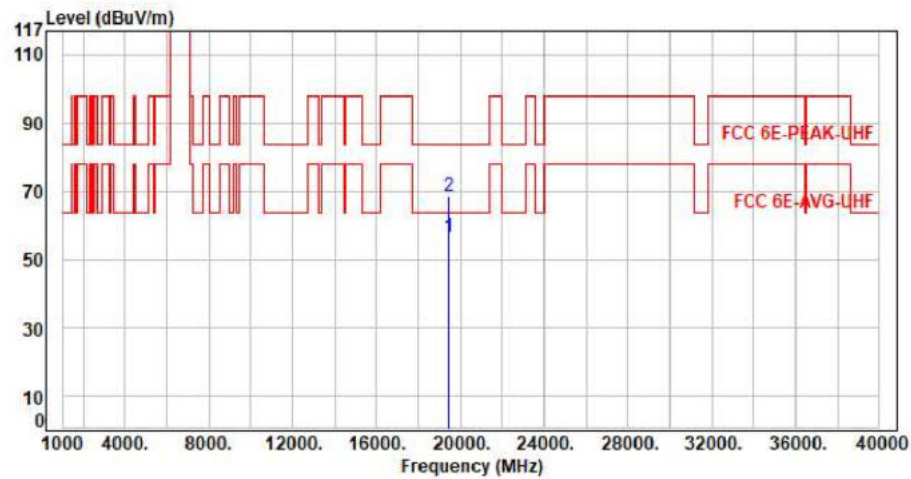


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.72	56.47	63.54	-7.07	Average	150	360	P
2	19425.00	11.75	56.92	68.67	83.54	-14.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

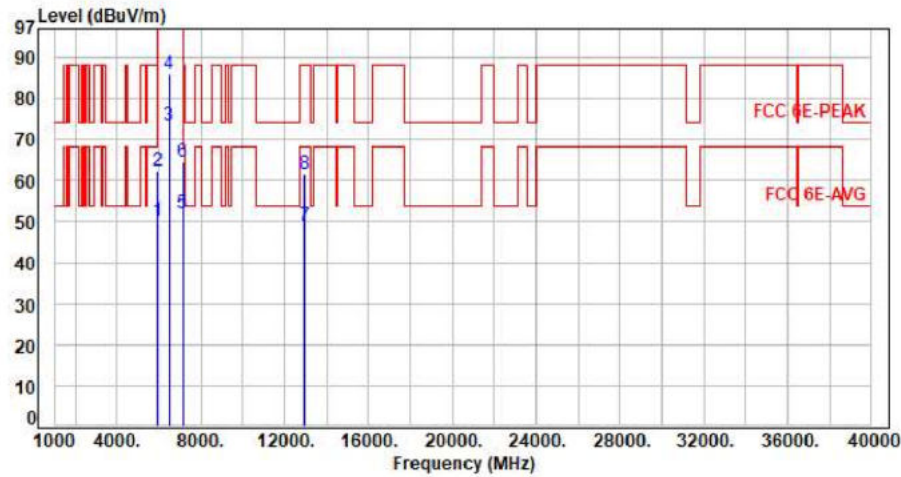

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	100	131	P
2	5925.00	7.66	54.84	62.50	88.20	-25.70	Peak	100	131	P
3	6475.00	8.33	65.07	73.40	200.00	-126.60	Average	100	131	P
4	6475.00	8.33	77.63	85.96	200.00	-114.04	Peak	100	131	P
5	7125.00	10.05	42.10	52.15	68.20	-16.05	Average	100	131	P
6	7125.00	10.05	54.32	64.37	88.20	-23.83	Peak	100	131	P
7	12950.00	19.39	29.67	49.06	68.20	-19.14	Average	100	119	P
8	12950.00	19.39	42.09	61.48	88.20	-26.72	Peak	100	119	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

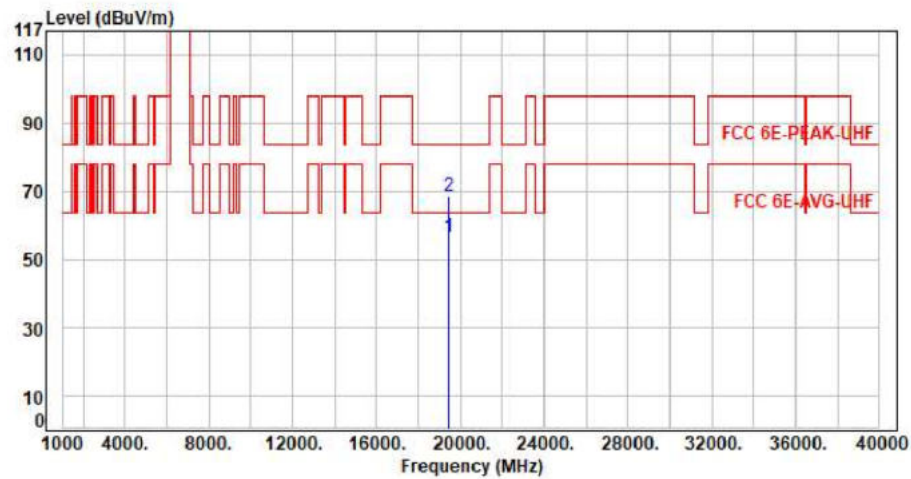


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.75	56.50	63.54	-7.04	Average	150	360	P
2	19425.00	11.75	56.98	68.73	83.54	-14.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

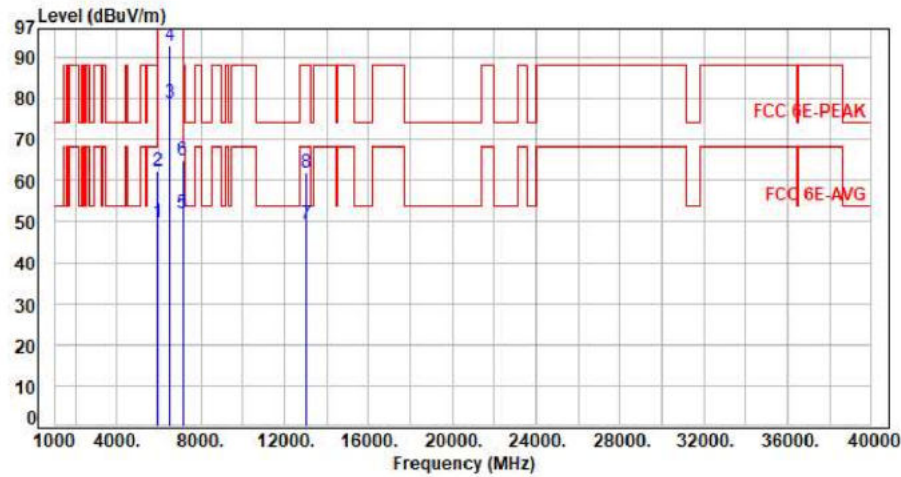

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	100	66	P
2	5925.00	7.66	54.73	62.39	88.20	-25.81	Peak	100	66	P
3	6515.00	8.42	70.68	79.10	200.00	-120.90	Average	100	66	P
4	6515.00	8.42	84.40	92.82	200.00	-107.18	Peak	100	66	P
5	7125.00	10.05	41.89	51.94	68.20	-16.26	Average	100	66	P
6	7125.00	10.05	55.03	65.08	88.20	-23.12	Peak	100	66	P
7	13030.00	19.86	29.43	49.29	68.20	-18.91	Average	100	294	P
8	13030.00	19.86	42.09	61.95	88.20	-26.25	Peak	100	294	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

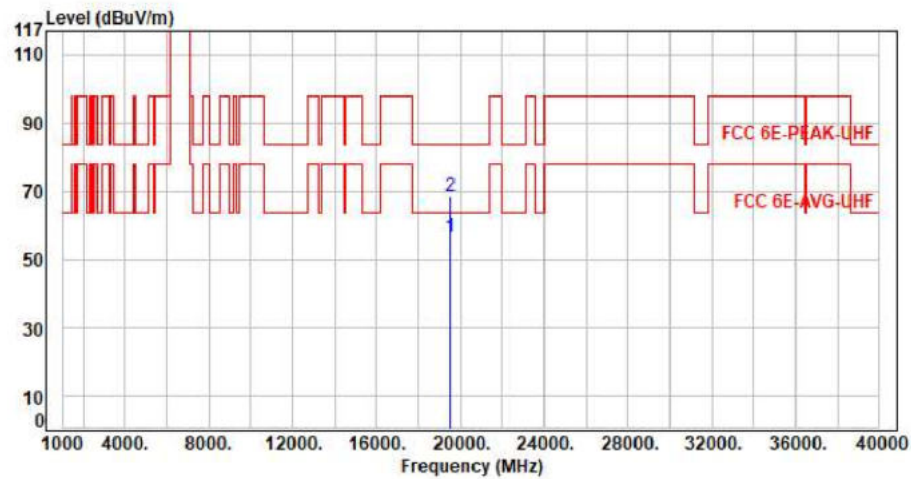


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.32	56.51	63.54	-7.03	Average	150	360	P
2	19545.00	12.19	56.51	68.70	83.54	-14.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

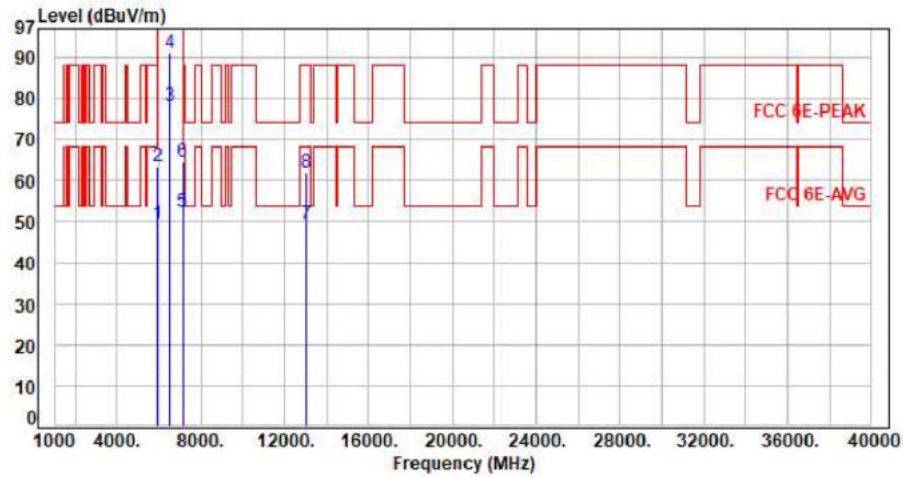

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.94	49.60	68.20	-18.60	Average	395	81	P
2	5925.00	7.66	55.70	63.36	88.20	-24.84	Peak	395	81	P
3	6515.00	8.42	69.79	78.21	200.00	-121.79	Average	395	81	P
4	6515.00	8.42	82.69	91.11	200.00	-108.89	Peak	395	81	P
5	7125.00	10.05	42.17	52.22	68.20	-15.98	Average	395	81	P
6	7125.00	10.05	54.67	64.72	88.20	-23.48	Peak	395	81	P
7	13030.00	19.86	29.45	49.31	68.20	-18.89	Average	100	113	P
8	13030.00	19.86	42.17	62.03	88.20	-26.17	Peak	100	113	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

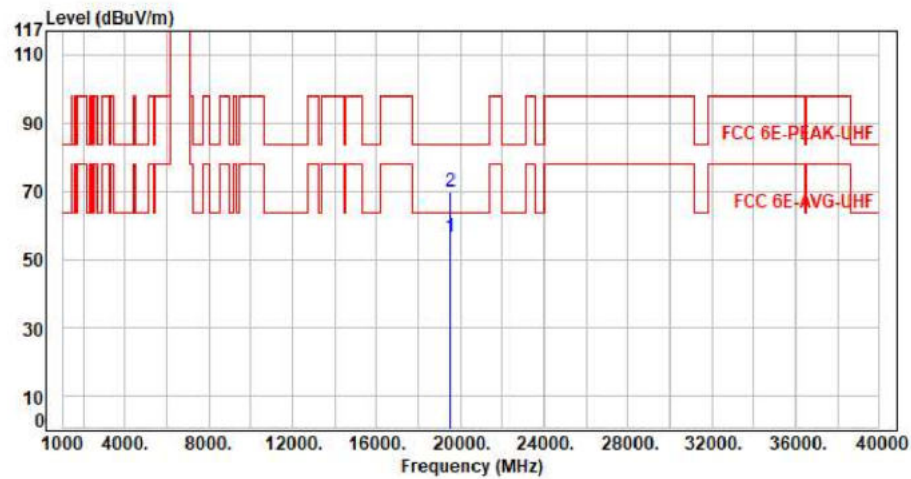


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.34	56.53	63.54	-7.01	Average	150	360	P
2	19545.00	12.19	57.63	69.82	83.54	-13.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

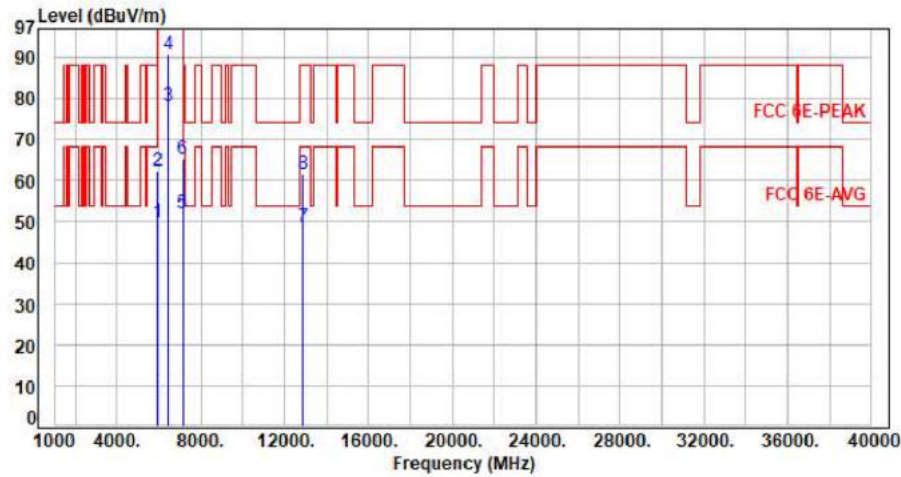

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	100	62	P
2	5925.00	7.66	54.63	62.29	88.20	-25.91	Peak	100	62	P
3	6445.00	8.31	70.03	78.34	200.00	-121.66	Average	100	62	P
4	6445.00	8.31	82.51	90.82	200.00	-109.18	Peak	100	62	P
5	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	100	62	P
6	7125.00	10.05	55.05	65.10	88.20	-23.10	Peak	100	62	P
7	12890.00	19.05	29.67	48.72	68.20	-19.48	Average	100	142	P
8	12890.00	19.05	42.59	61.64	88.20	-26.56	Peak	100	142	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

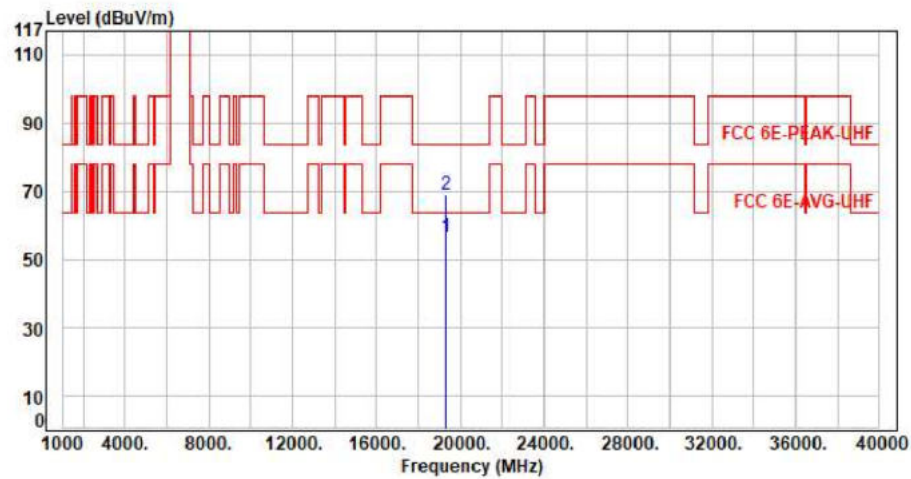


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.88	56.50	63.54	-7.04	Average	150	360	P
2	19335.00	11.62	57.46	69.08	83.54	-14.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

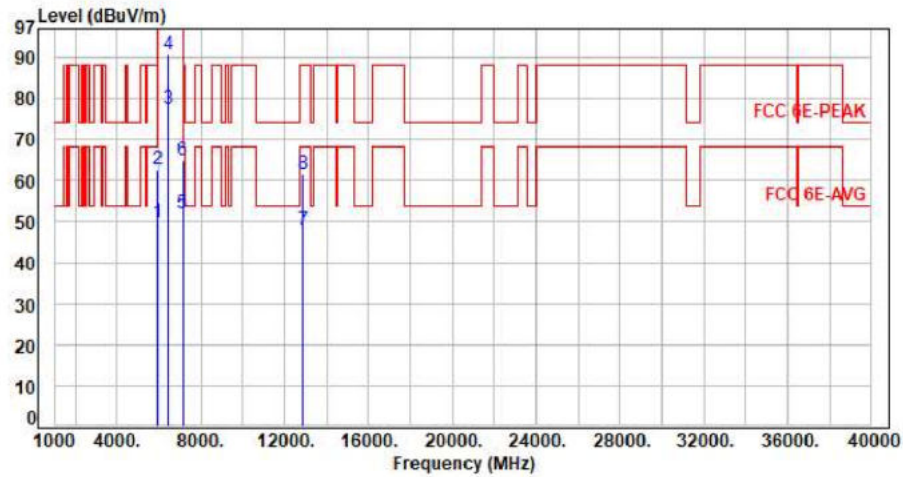

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.99	49.65	68.20	-18.55	Average	388	85	P
2	5925.00	7.66	54.95	62.61	88.20	-25.59	Peak	388	85	P
3	6445.00	8.31	69.06	77.37	200.00	-122.63	Average	388	85	P
4	6445.00	8.31	82.39	90.70	200.00	-109.30	Peak	388	85	P
5	7125.00	10.05	41.88	51.93	68.20	-16.27	Average	388	85	P
6	7125.00	10.05	54.92	64.97	88.20	-23.23	Peak	388	85	P
7	12890.00	19.05	29.07	48.12	68.20	-20.08	Average	100	162	P
8	12890.00	19.05	42.43	61.48	88.20	-26.72	Peak	100	162	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

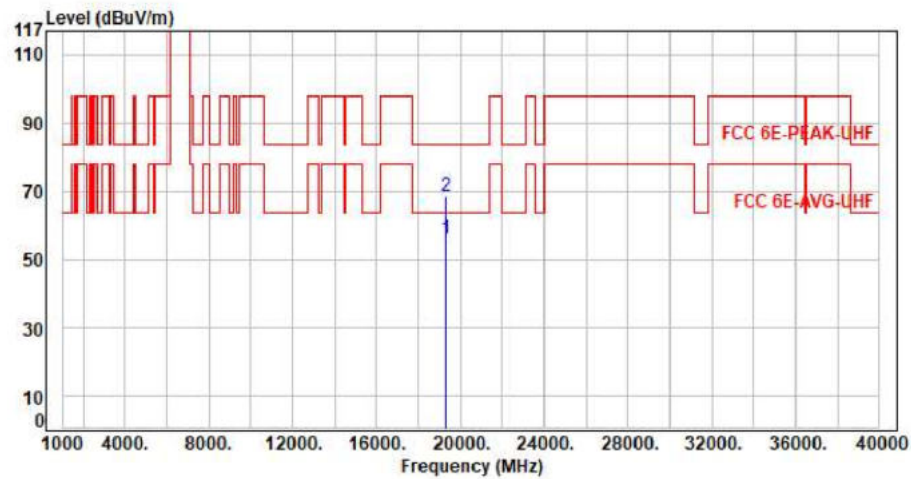

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.63	56.25	63.54	-7.29	Average	150	360	P
2	19335.00	11.62	56.92	68.54	83.54	-15.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor