




For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

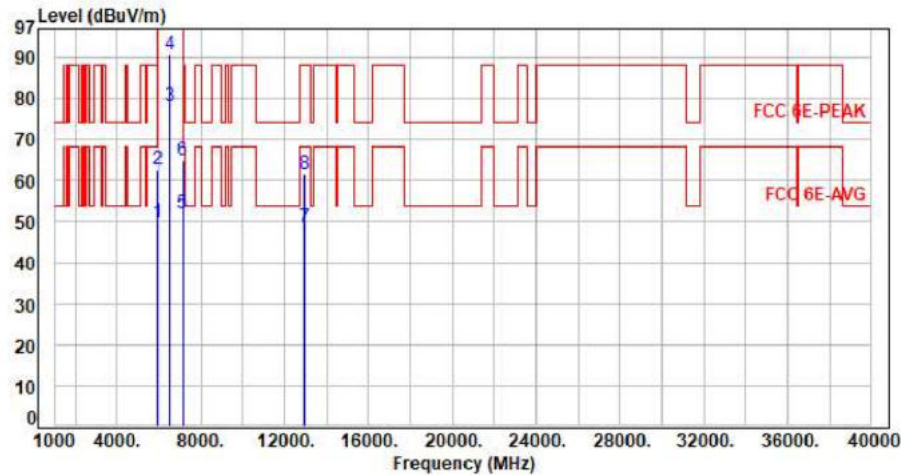

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.07	49.73	68.20	-18.47	Average	100	61	P
2	5925.00	7.66	54.88	62.54	88.20	-25.66	Peak	100	61	P
3	6485.00	8.34	69.82	78.16	200.00	-121.84	Average	100	61	P
4	6485.00	8.34	82.28	90.62	200.00	-109.38	Peak	100	61	P
5	7125.00	10.05	41.78	51.83	68.20	-16.37	Average	100	61	P
6	7125.00	10.05	54.77	64.82	88.20	-23.38	Peak	100	61	P
7	12970.00	19.47	29.07	48.54	68.20	-19.66	Average	100	338	P
8	12970.00	19.47	42.28	61.75	88.20	-26.45	Peak	100	338	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

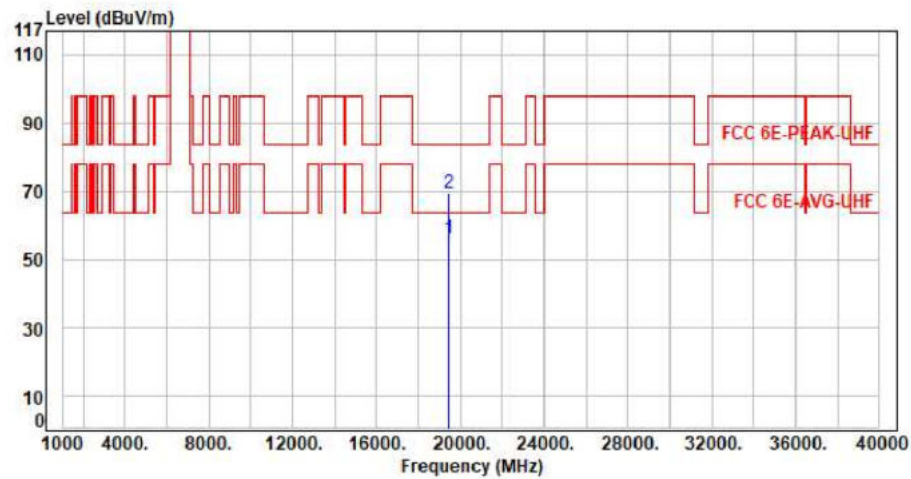


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.58	56.15	63.54	-7.39	Average	150	360	P
2	19455.00	11.57	57.75	69.32	83.54	-14.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

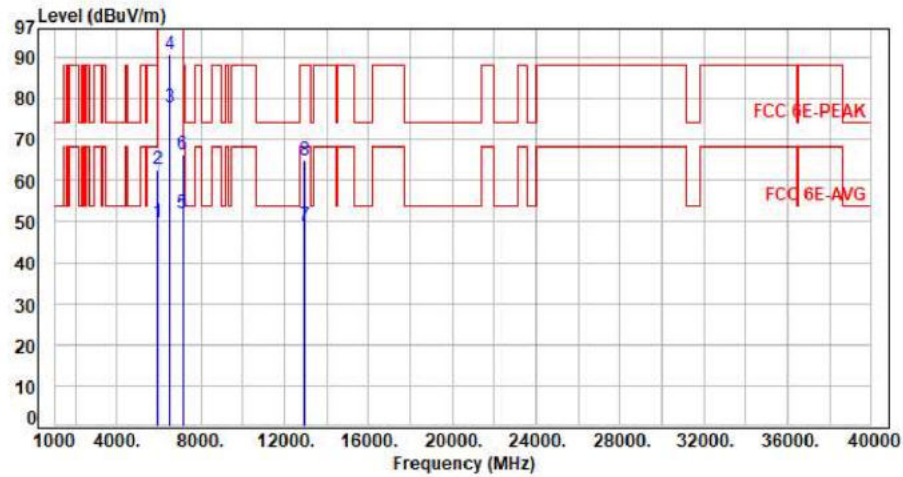

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.02	49.68	68.20	-18.52	Average	400	85	P
2	5925.00	7.66	55.13	62.79	88.20	-25.41	Peak	400	85	P
3	6485.00	8.34	69.35	77.69	200.00	-122.31	Average	400	85	P
4	6485.00	8.34	82.54	90.88	200.00	-109.12	Peak	400	85	P
5	7125.00	10.05	41.84	51.89	68.20	-16.31	Average	400	85	P
6	7125.00	10.05	56.22	66.27	88.20	-21.93	Peak	400	85	P
7	12970.00	19.47	29.54	49.01	68.20	-19.19	Average	100	258	P
8	12970.00	19.47	45.35	64.82	88.20	-23.38	Peak	100	258	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

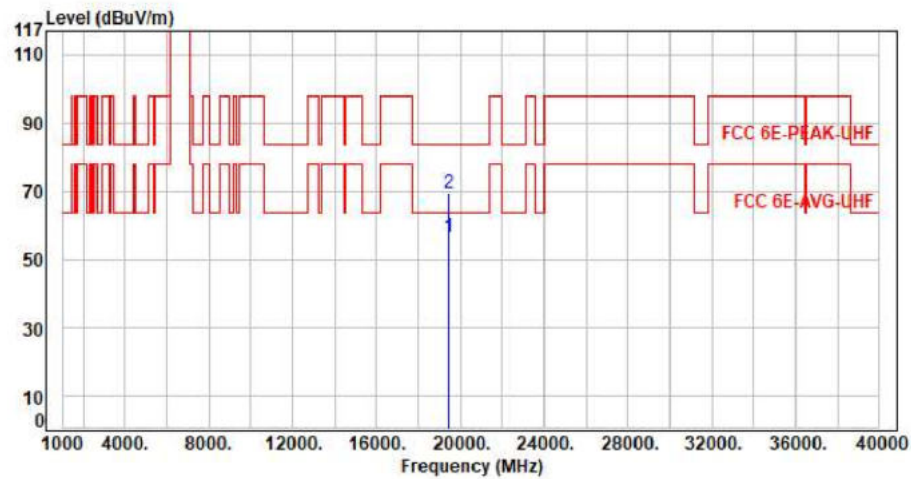


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.97	56.54	63.54	-7.00	Average	150	360	P
2	19455.00	11.57	57.83	69.40	83.54	-14.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

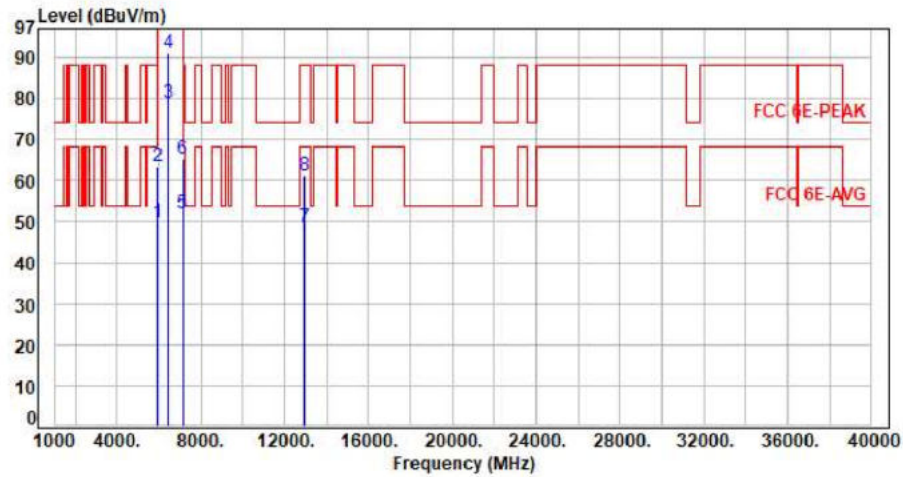

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.96	49.62	68.20	-18.58	Average	100	63	P
2	5925.00	7.66	55.84	63.50	88.20	-24.70	Peak	100	63	P
3	6465.00	8.32	70.62	78.94	200.00	-121.06	Average	100	63	P
4	6465.00	8.32	82.84	91.16	200.00	-108.84	Peak	100	63	P
5	7125.00	10.05	41.77	51.82	68.20	-16.38	Average	100	63	P
6	7125.00	10.05	55.08	65.13	88.20	-23.07	Peak	100	63	P
7	12930.00	19.27	29.43	48.70	68.20	-19.50	Average	100	161	P
8	12930.00	19.27	42.06	61.33	88.20	-26.87	Peak	100	161	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

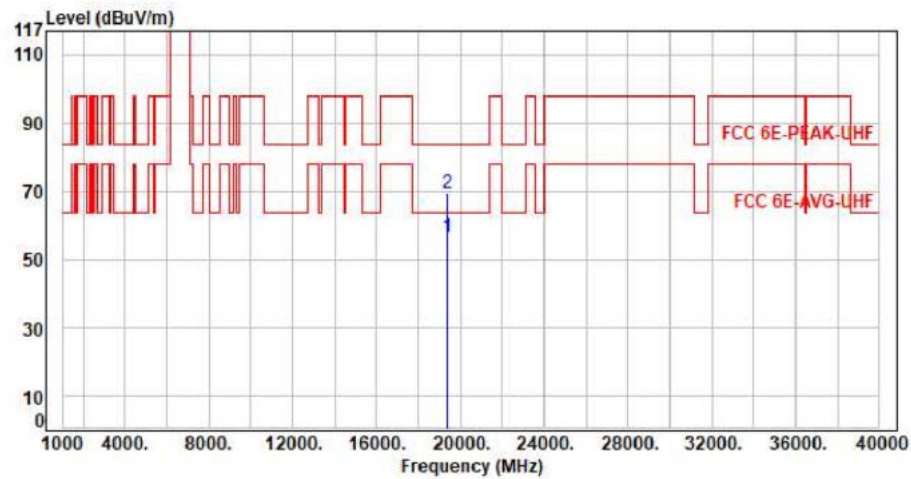


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	44.37	56.28	63.54	-7.26	Average	150	360	P
2	19395.00	11.91	57.38	69.29	83.54	-14.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

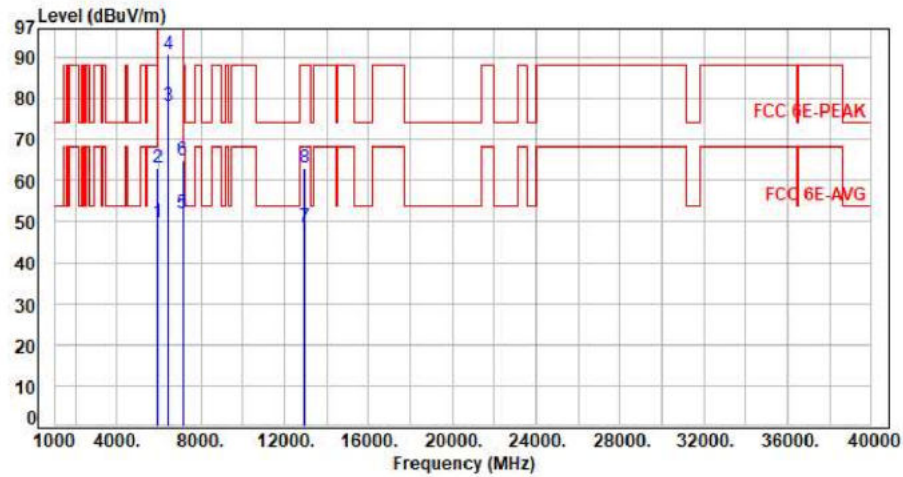

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	384	90	P
2	5925.00	7.66	55.46	63.12	88.20	-25.08	Peak	384	90	P
3	6465.00	8.32	69.70	78.02	200.00	-121.98	Average	384	90	P
4	6465.00	8.32	82.48	90.80	200.00	-109.20	Peak	384	90	P
5	7125.00	10.05	41.91	51.96	68.20	-16.24	Average	384	90	P
6	7125.00	10.05	54.73	64.78	88.20	-23.42	Peak	384	90	P
7	12930.00	19.27	29.47	48.74	68.20	-19.46	Average	100	188	P
8	12930.00	19.27	43.90	63.17	88.20	-25.03	Peak	100	188	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

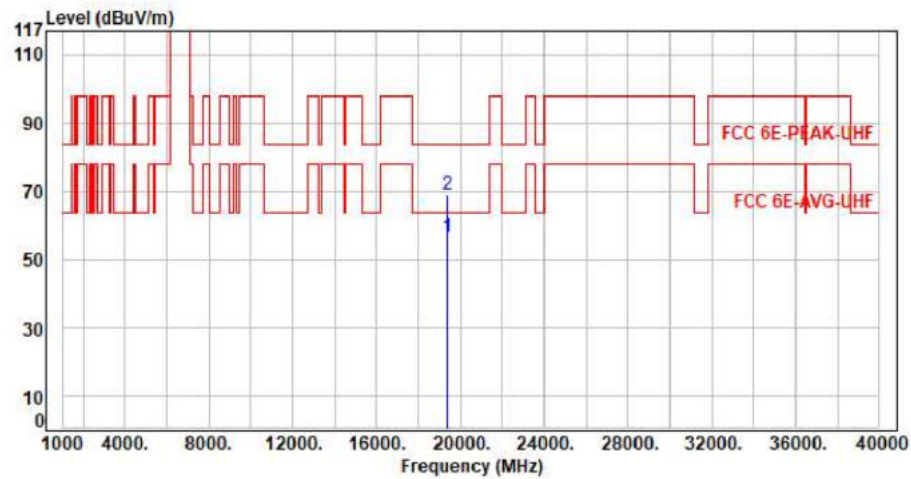


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	44.42	56.33	63.54	-7.21	Average	150	360	P
2	19395.00	11.91	57.07	68.98	83.54	-14.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

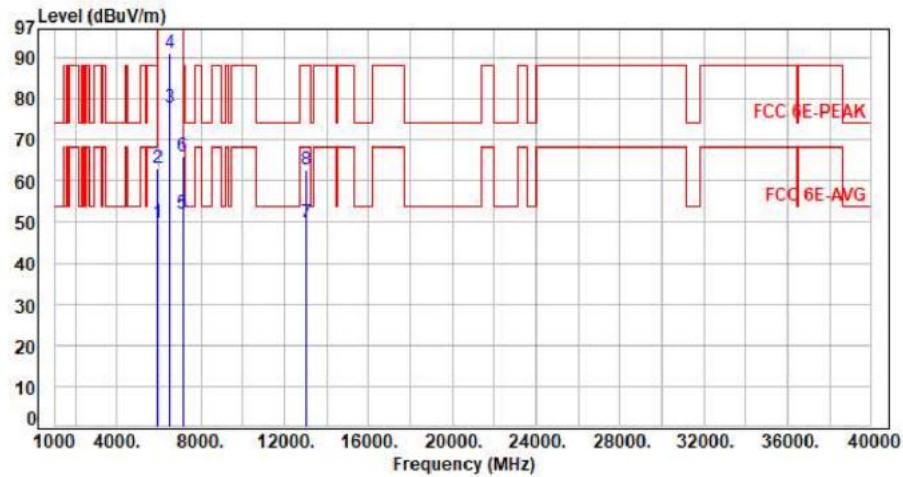


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.02	49.68	68.20	-18.52	Average	259	67	P
2	5925.00	7.66	55.36	63.02	88.20	-25.18	Peak	259	67	P
3	6525.00	8.45	69.45	77.90	200.00	-122.10	Average	259	67	P
4	6525.00	8.45	82.70	91.15	200.00	-108.85	Peak	259	67	P
5	7125.00	10.05	41.96	52.01	68.20	-16.19	Average	259	67	P
6	7125.00	10.05	56.02	66.07	88.20	-22.13	Peak	259	67	P
7	13050.00	20.02	29.64	49.66	68.20	-18.54	Average	100	155	P
8	13050.00	20.02	42.51	62.53	88.20	-25.67	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

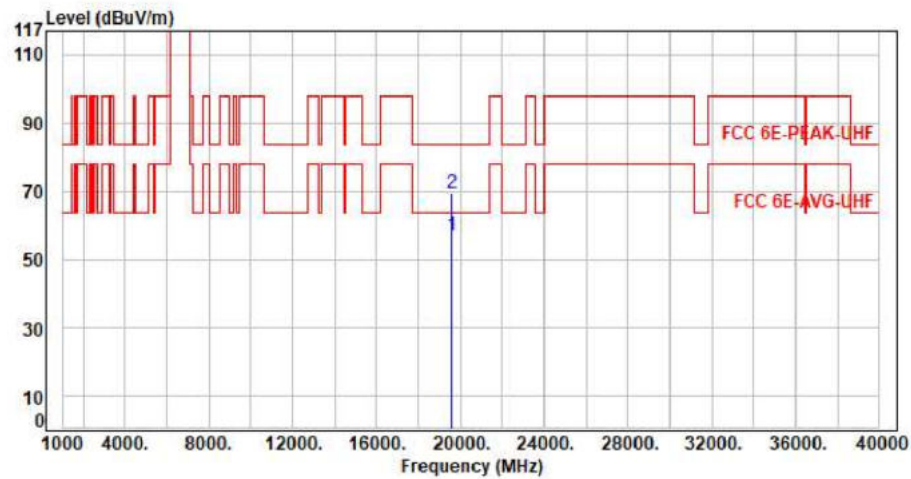


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	44.99	57.01	63.54	-6.53	Average	150	360	P
2	19575.00	12.02	57.17	69.19	83.54	-14.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

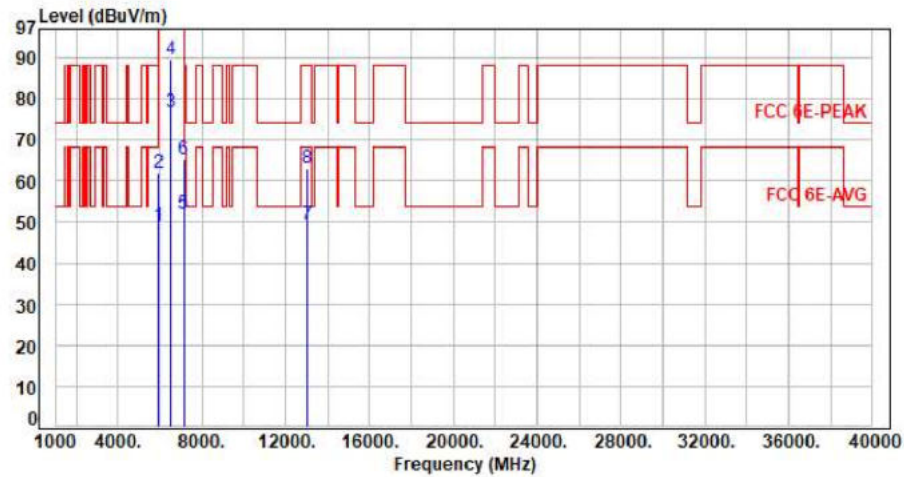

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.33	48.99	68.20	-19.21	Average	390	89	P
2	5925.00	7.66	54.29	61.95	88.20	-26.25	Peak	390	89	P
3	6525.00	8.45	68.15	76.60	200.00	-123.40	Average	390	89	P
4	6525.00	8.45	81.22	89.67	200.00	-110.33	Peak	390	89	P
5	7125.00	10.05	41.93	51.98	68.20	-16.22	Average	390	89	P
6	7125.00	10.05	55.14	65.19	88.20	-23.01	Peak	390	89	P
7	13050.00	20.02	29.52	49.54	68.20	-18.66	Average	100	191	P
8	13050.00	20.02	42.88	62.90	88.20	-25.30	Peak	100	191	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

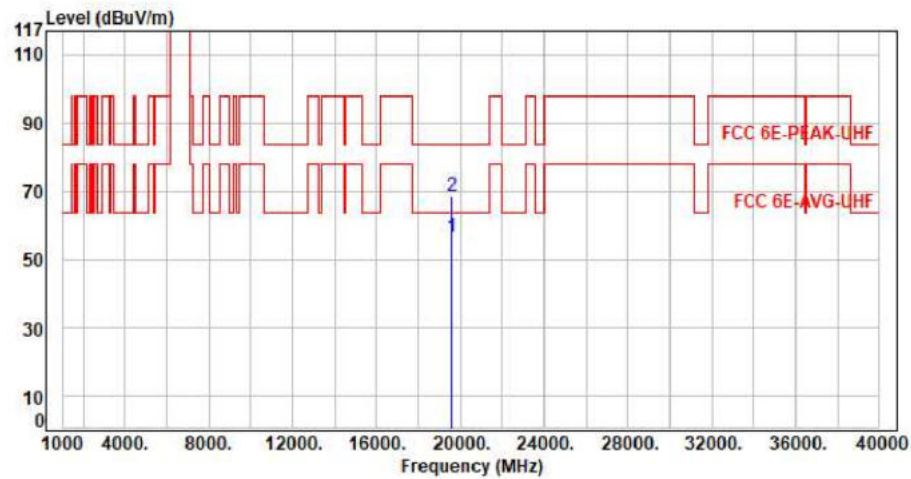


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	44.42	56.44	63.54	-7.10	Average	150	360	P
2	19575.00	12.02	56.42	68.44	83.54	-15.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

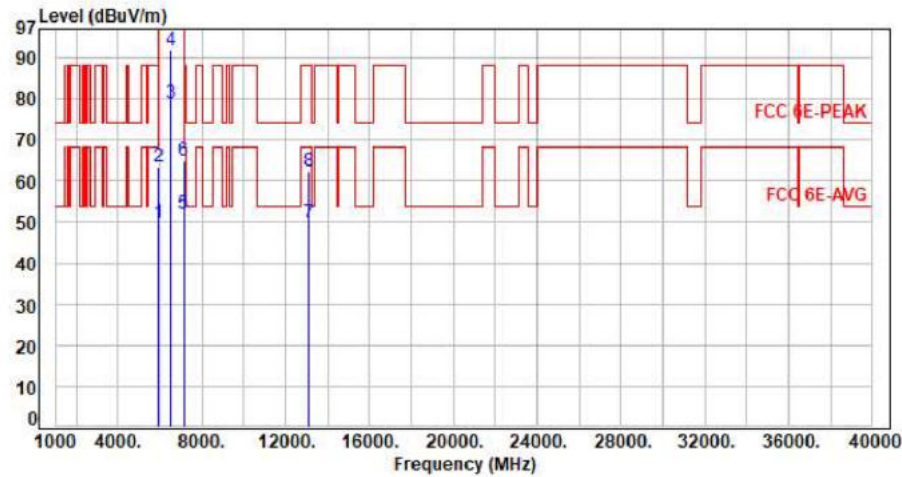


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	100	58	P
2	5925.00	7.66	55.71	63.37	88.20	-24.83	Peak	100	58	P
3	6545.00	8.55	70.36	78.91	200.00	-121.09	Average	100	58	P
4	6545.00	8.55	83.25	91.80	200.00	-108.20	Peak	100	58	P
5	7125.00	10.05	42.05	52.10	68.20	-16.10	Average	100	58	P
6	7125.00	10.05	54.81	64.86	88.20	-23.34	Peak	100	58	P
7	13090.00	20.20	29.66	49.86	68.20	-18.34	Average	100	134	P
8	13090.00	20.20	42.31	62.51	88.20	-25.69	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

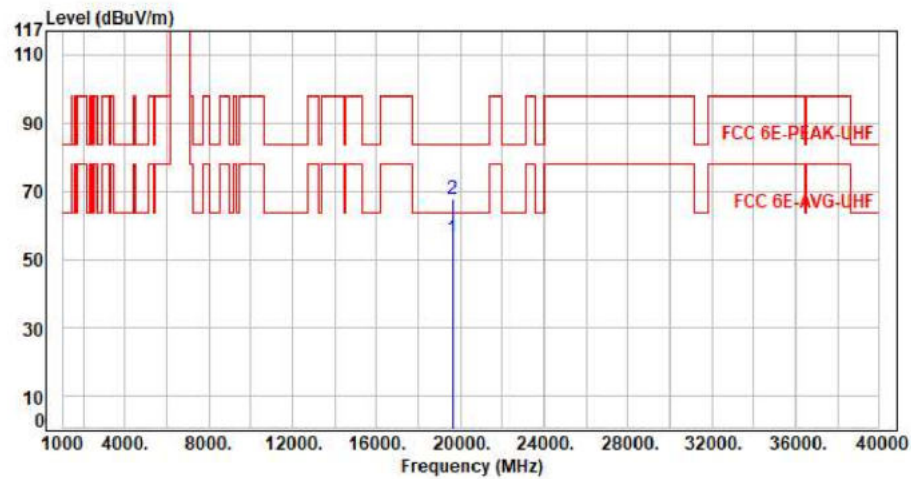


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.32	55.90	63.54	-7.64	Average	150	360	P
2	19635.00	11.58	56.09	67.67	83.54	-15.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

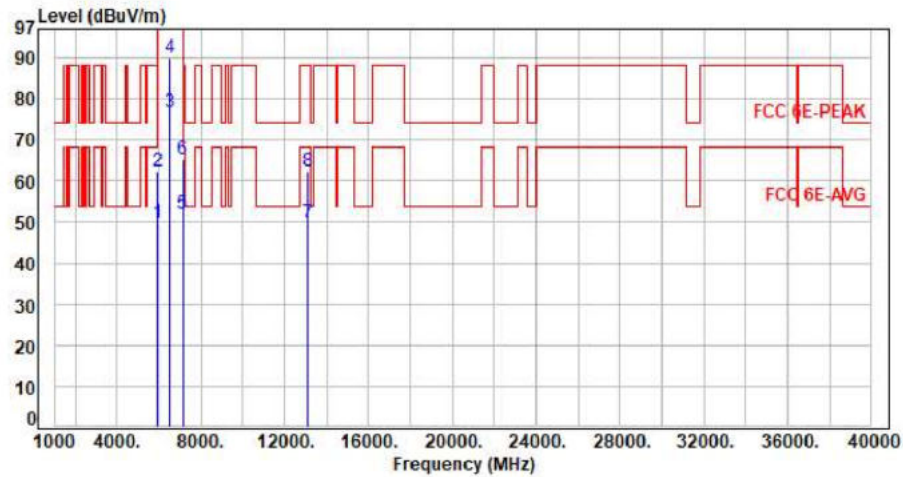

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.03	49.69	68.20	-18.51	Average	393	91	P
2	5925.00	7.66	54.64	62.30	88.20	-25.90	Peak	393	91	P
3	6545.00	8.55	68.15	76.70	200.00	-123.30	Average	393	91	P
4	6545.00	8.55	81.35	89.90	200.00	-110.10	Peak	393	91	P
5	7125.00	10.05	41.98	52.03	68.20	-16.17	Average	393	91	P
6	7125.00	10.05	55.34	65.39	88.20	-22.81	Peak	393	91	P
7	13090.00	20.20	29.62	49.82	68.20	-18.38	Average	100	169	P
8	13090.00	20.20	42.19	62.39	88.20	-25.81	Peak	100	169	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

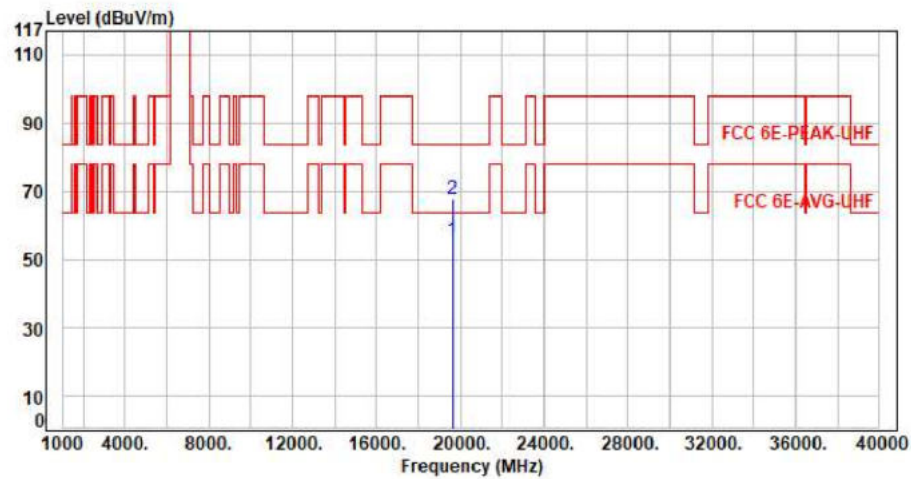


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.10	55.68	63.54	-7.86	Average	150	360	P
2	19635.00	11.58	56.19	67.77	83.54	-15.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

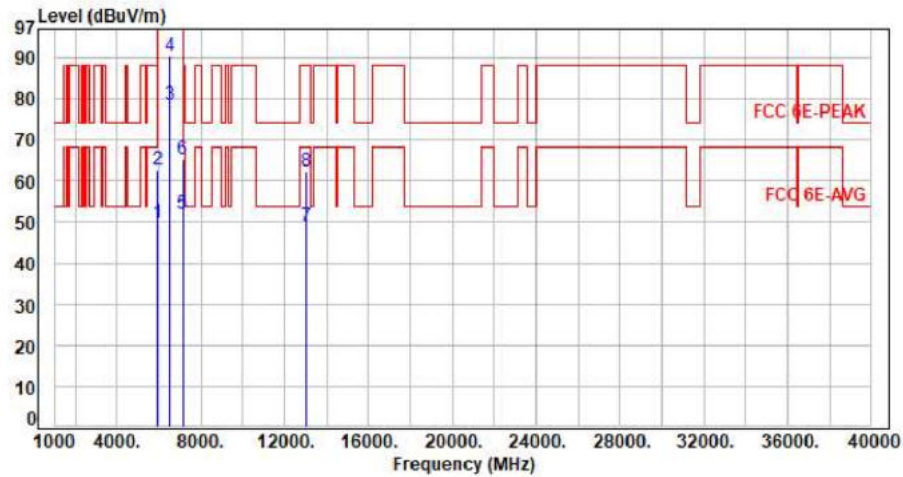

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.03	49.69	68.20	-18.51	Average	109	62	P
2	5925.00	7.66	55.09	62.75	88.20	-25.45	Peak	109	62	P
3	6505.00	8.37	70.12	78.49	200.00	-121.51	Average	109	62	P
4	6505.00	8.37	82.17	90.54	200.00	-109.46	Peak	109	62	P
5	7125.00	10.05	41.99	52.04	68.20	-16.16	Average	109	62	P
6	7125.00	10.05	55.34	65.39	88.20	-22.81	Peak	109	62	P
7	13010.00	19.69	29.46	49.15	68.20	-19.05	Average	100	132	P
8	13010.00	19.69	42.65	62.34	88.20	-25.86	Peak	100	132	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

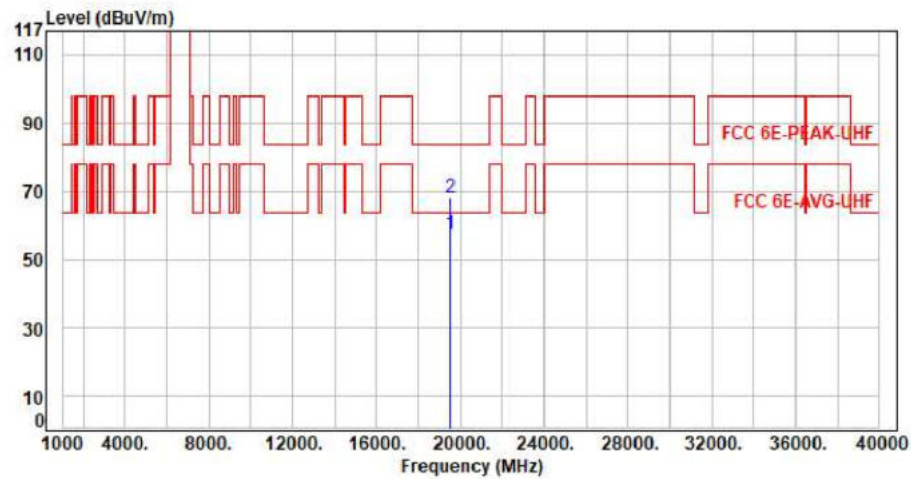


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.58	57.49	63.54	-6.05	Average	150	360	P
2	19515.00	11.91	56.21	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

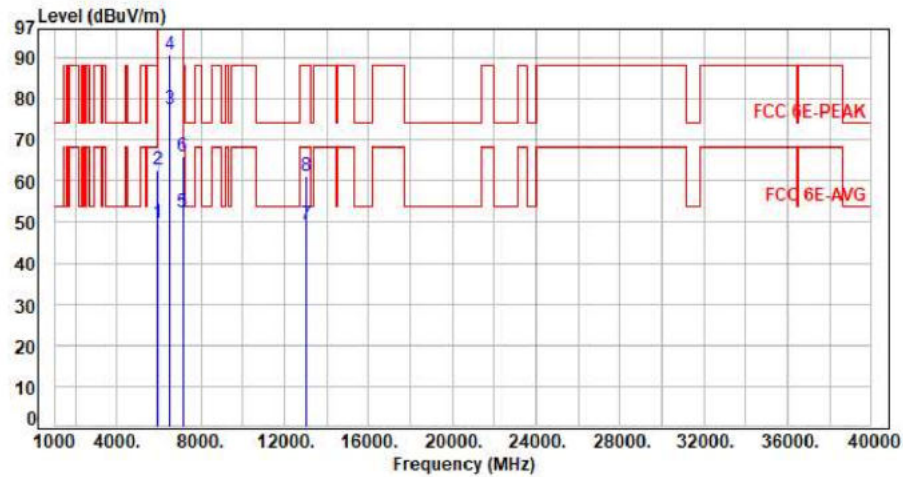


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	400	90	P
2	5925.00	7.66	54.92	62.58	88.20	-25.62	Peak	400	90	P
3	6505.00	8.37	69.20	77.57	200.00	-122.43	Average	400	90	P
4	6505.00	8.37	82.23	90.60	200.00	-109.40	Peak	400	90	P
5	7125.00	10.05	42.14	52.19	68.20	-16.01	Average	400	90	P
6	7125.00	10.05	55.94	65.99	88.20	-22.21	Peak	400	90	P
7	13010.00	19.69	29.64	49.33	68.20	-18.87	Average	100	152	P
8	13010.00	19.69	41.67	61.36	88.20	-26.84	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

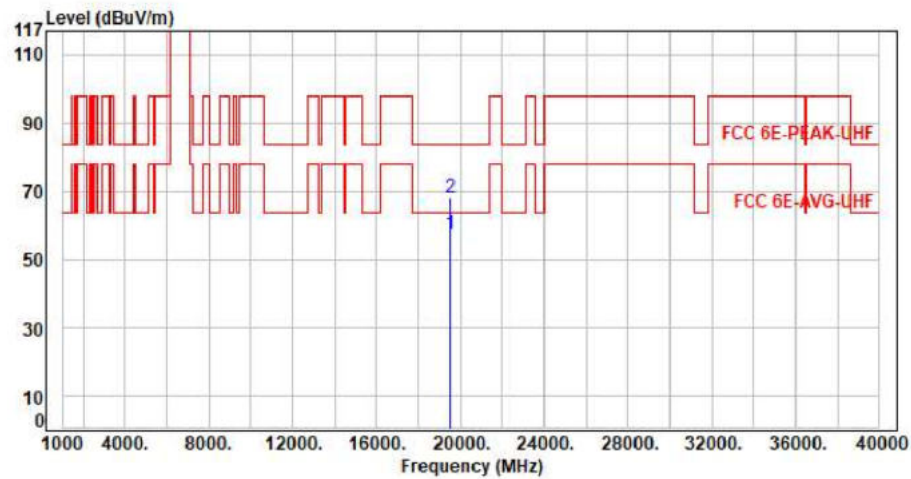


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.28	57.19	63.54	-6.35	Average	150	360	P
2	19515.00	11.91	56.02	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

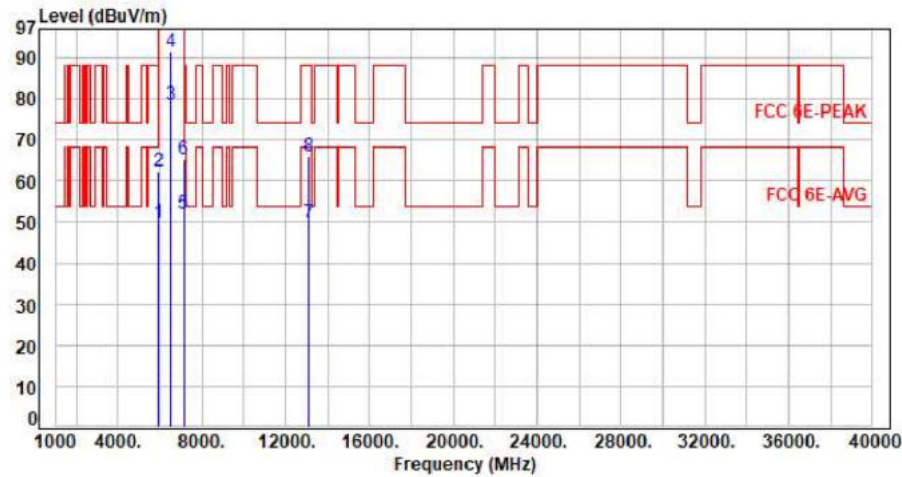

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.99	49.65	68.20	-18.55	Average	255	64	P
2	5925.00	7.66	54.66	62.32	88.20	-25.88	Peak	255	64	P
3	6535.00	8.50	69.96	78.46	200.00	-121.54	Average	255	64	P
4	6535.00	8.50	82.84	91.34	200.00	-108.66	Peak	255	64	P
5	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	255	64	P
6	7125.00	10.05	55.09	65.14	88.20	-23.06	Peak	255	64	P
7	13070.00	20.11	29.75	49.86	68.20	-18.34	Average	100	182	P
8	13070.00	20.11	45.96	66.07	88.20	-22.13	Peak	100	182	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

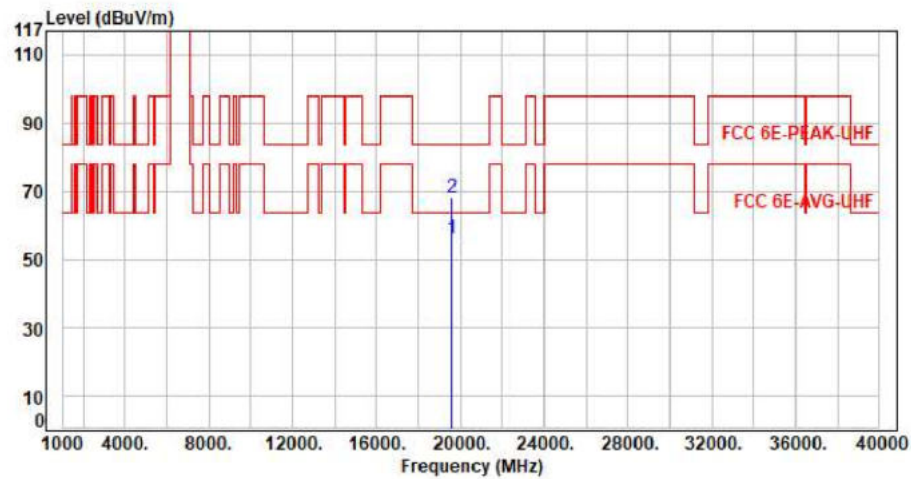

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.35	56.13	63.54	-7.41	Average	150	360	P
2	19605.00	11.78	56.25	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

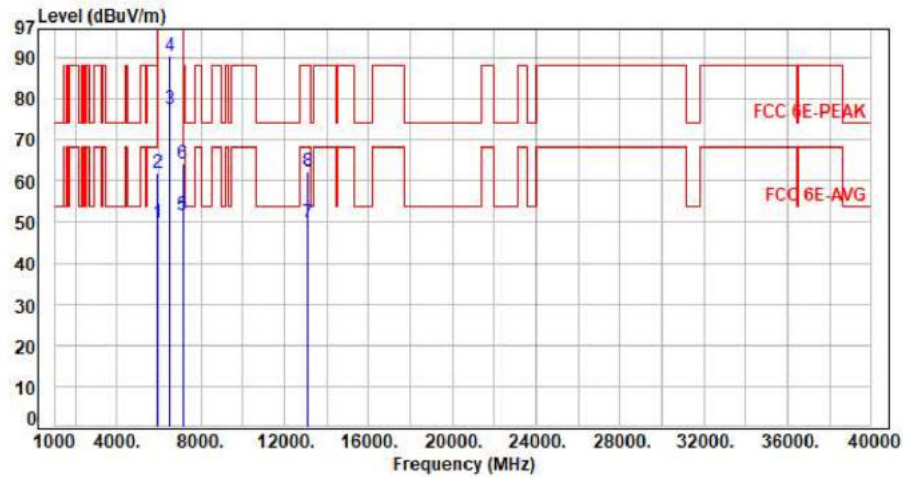

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.11	49.77	68.20	-18.43	Average	393	83	P
2	5925.00	7.66	54.38	62.04	88.20	-26.16	Peak	393	83	P
3	6535.00	8.50	68.86	77.36	200.00	-122.64	Average	393	83	P
4	6535.00	8.50	82.02	90.52	200.00	-109.48	Peak	393	83	P
5	7125.00	10.05	41.51	51.56	68.20	-16.64	Average	393	83	P
6	7125.00	10.05	54.11	64.16	88.20	-24.04	Peak	393	83	P
7	13070.00	20.11	29.80	49.91	68.20	-18.29	Average	100	102	P
8	13070.00	20.11	42.07	62.18	88.20	-26.02	Peak	100	102	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

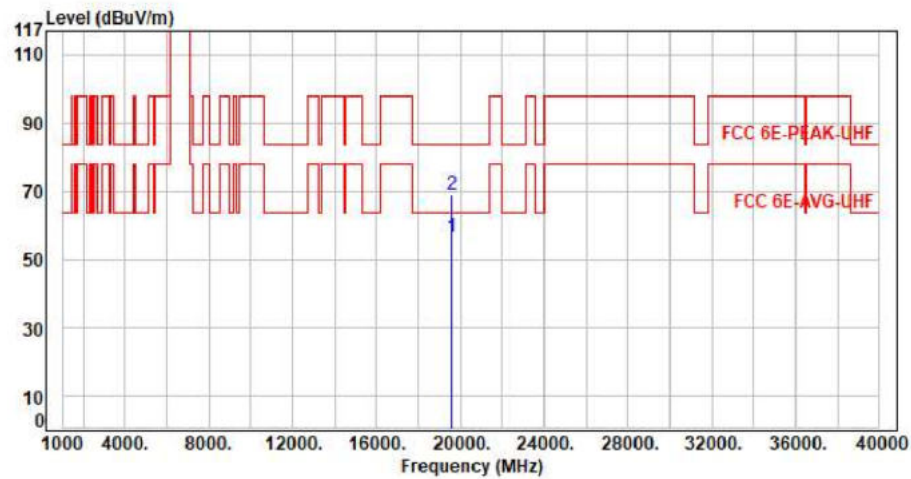


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.72	56.50	63.54	-7.04	Average	150	360	P
2	19605.00	11.78	57.39	69.17	83.54	-14.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

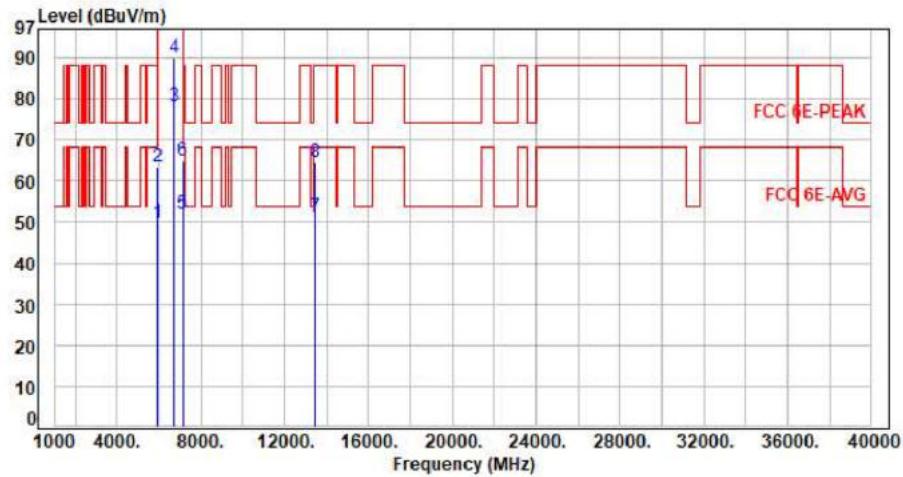

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.09	49.75	68.20	-18.45	Average	100	59	P
2	5925.00	7.66	55.83	63.49	88.20	-24.71	Peak	100	59	P
3	6715.00	9.29	68.72	78.01	200.00	-121.99	Average	100	59	P
4	6715.00	9.29	80.80	90.09	200.00	-109.91	Peak	100	59	P
5	7125.00	10.05	41.81	51.86	68.20	-16.34	Average	100	59	P
6	7125.00	10.05	54.68	64.73	88.20	-23.47	Peak	100	59	P
7	13430.00	21.71	29.64	51.35	68.20	-16.85	Average	100	181	P
8	13430.00	21.71	42.68	64.39	88.20	-23.81	Peak	100	181	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

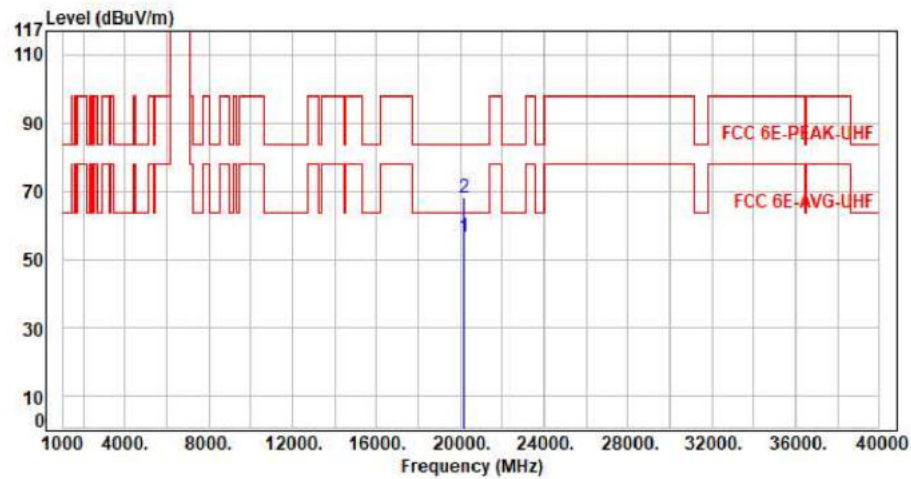

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.94	56.37	63.54	-7.17	Average	150	360	P
2	20145.00	11.43	56.60	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

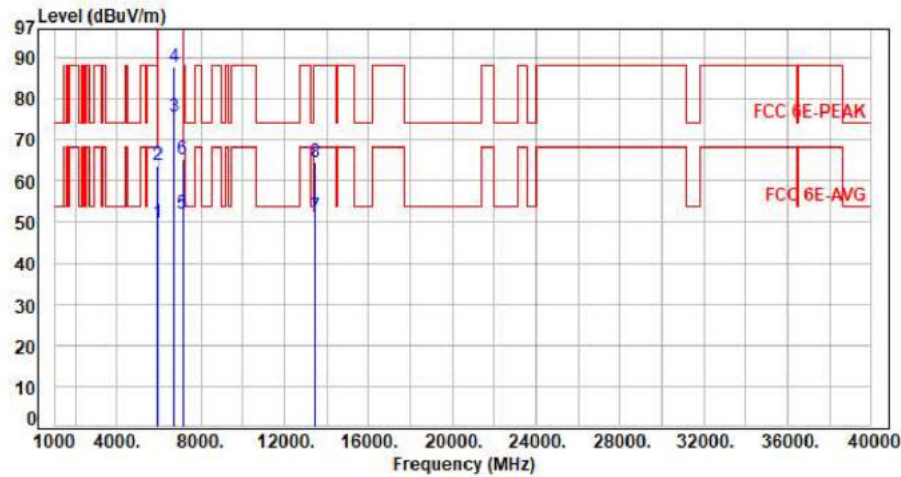

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.05	49.71	68.20	-18.49	Average	119	90	P
2	5925.00	7.66	55.97	63.63	88.20	-24.57	Peak	119	90	P
3	6715.00	9.29	66.35	75.64	200.00	-124.36	Average	119	90	P
4	6715.00	9.29	78.55	87.84	200.00	-112.16	Peak	119	90	P
5	7125.00	10.05	41.92	51.97	68.20	-16.23	Average	119	90	P
6	7125.00	10.05	55.36	65.41	88.20	-22.79	Peak	119	90	P
7	13430.00	21.71	29.64	51.35	68.20	-16.85	Average	100	332	P
8	13430.00	21.71	42.78	64.49	88.20	-23.71	Peak	100	332	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

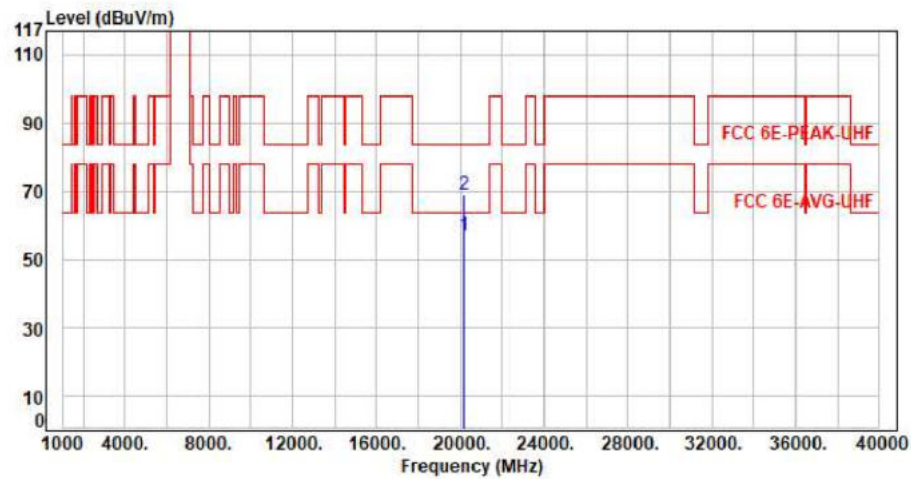


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.37	56.80	63.54	-6.74	Average	150	360	P
2	20145.00	11.43	57.71	69.14	83.54	-14.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

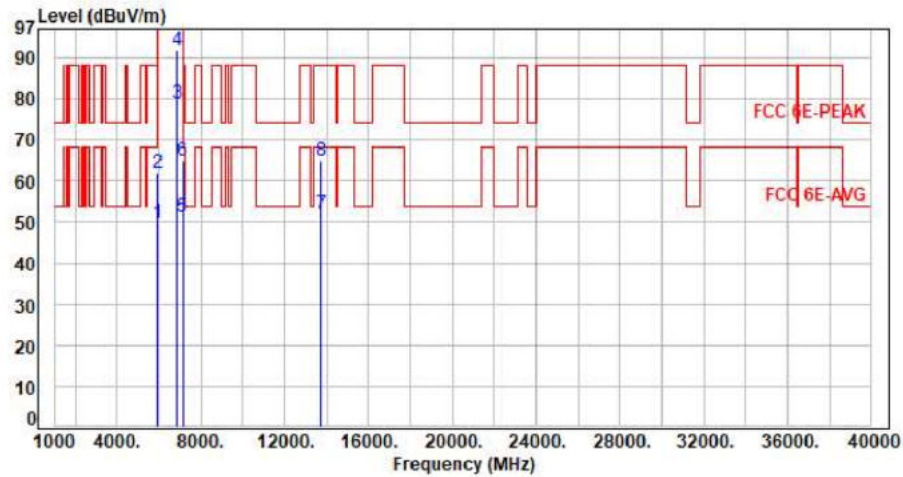

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	100	297	P
2	5925.00	7.66	54.28	61.94	88.20	-26.26	Peak	100	297	P
3	6855.00	9.50	69.56	79.06	200.00	-120.94	Average	100	297	P
4	6855.00	9.50	82.29	91.79	200.00	-108.21	Peak	100	297	P
5	7125.00	10.05	41.08	51.13	68.20	-17.07	Average	100	297	P
6	7125.00	10.05	54.86	64.91	88.20	-23.29	Peak	100	297	P
7	13710.00	22.48	29.65	52.13	68.20	-16.07	Average	100	117	P
8	13710.00	22.48	42.59	65.07	88.20	-23.13	Peak	100	117	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

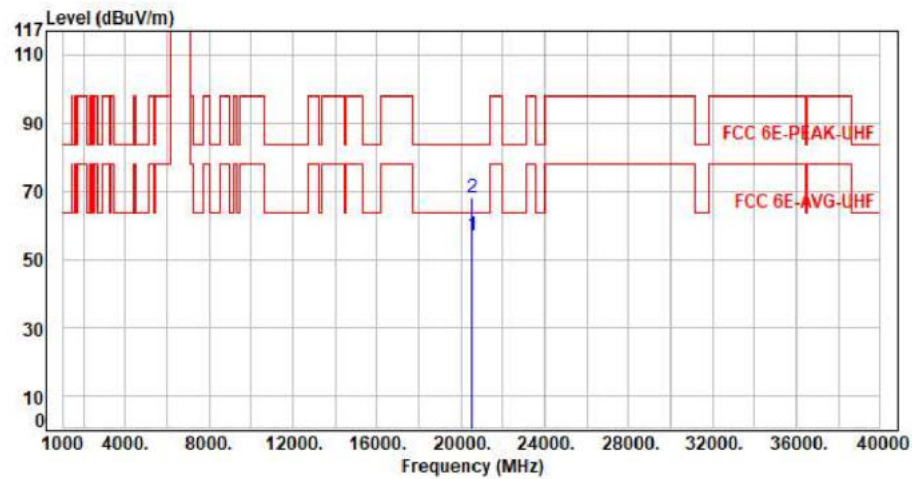


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	45.48	56.86	63.54	-6.68	Average	150	360	P
2	20565.00	11.38	56.59	67.97	83.54	-15.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

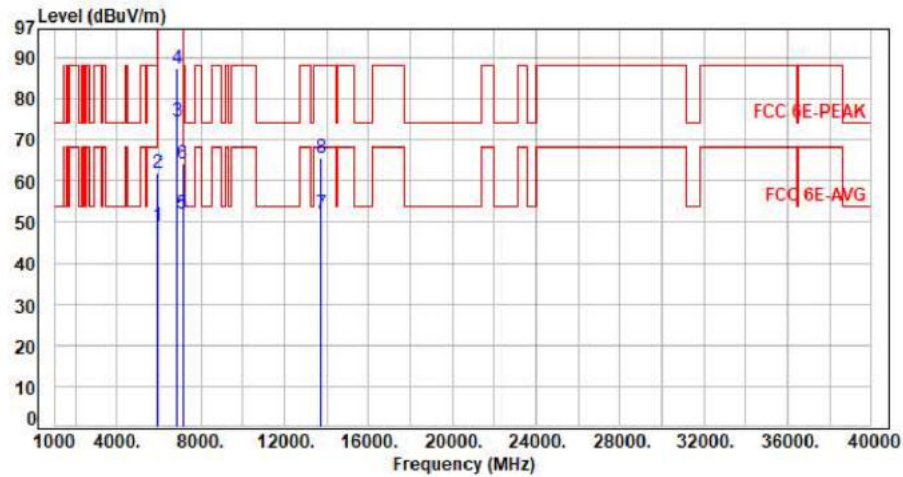

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.25	48.91	68.20	-19.29	Average	121	104	P
2	5925.00	7.66	54.28	61.94	88.20	-26.26	Peak	121	104	P
3	6855.00	9.50	64.97	74.47	200.00	-125.53	Average	121	104	P
4	6855.00	9.50	77.81	87.31	200.00	-112.69	Peak	121	104	P
5	7125.00	10.05	42.01	52.06	68.20	-16.14	Average	121	104	P
6	7125.00	10.05	54.16	64.21	88.20	-23.99	Peak	121	104	P
7	13710.00	22.48	29.67	52.15	68.20	-16.05	Average	100	225	P
8	13710.00	22.48	43.07	65.55	88.20	-22.65	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

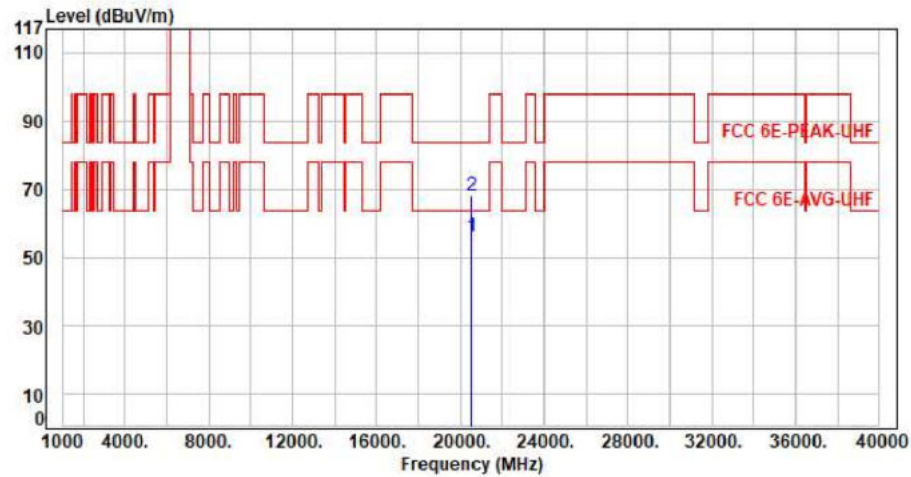


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.59	55.97	63.54	-7.57	Average	150	360	P
2	20565.00	11.38	56.51	67.89	83.54	-15.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

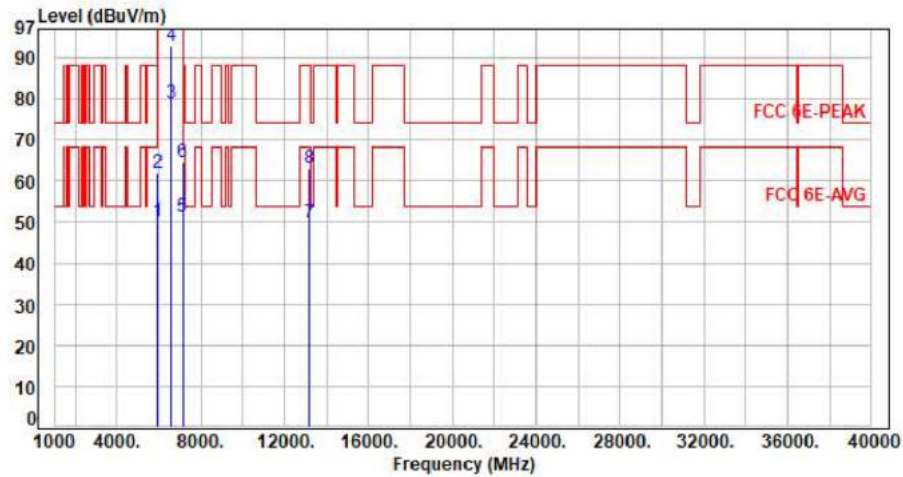


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.52	50.18	68.20	-18.02	Average	100	61	P
2	5925.00	7.66	54.15	61.81	88.20	-26.39	Peak	100	61	P
3	6565.00	8.67	70.31	78.98	200.00	-121.02	Average	100	61	P
4	6565.00	8.67	84.29	92.96	200.00	-107.04	Peak	100	61	P
5	7125.00	10.05	41.27	51.32	68.20	-16.88	Average	100	61	P
6	7125.00	10.05	54.61	64.66	88.20	-23.54	Peak	100	61	P
7	13130.00	20.32	29.52	49.84	68.20	-18.36	Average	100	119	P
8	13130.00	20.32	42.69	63.01	88.20	-25.19	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

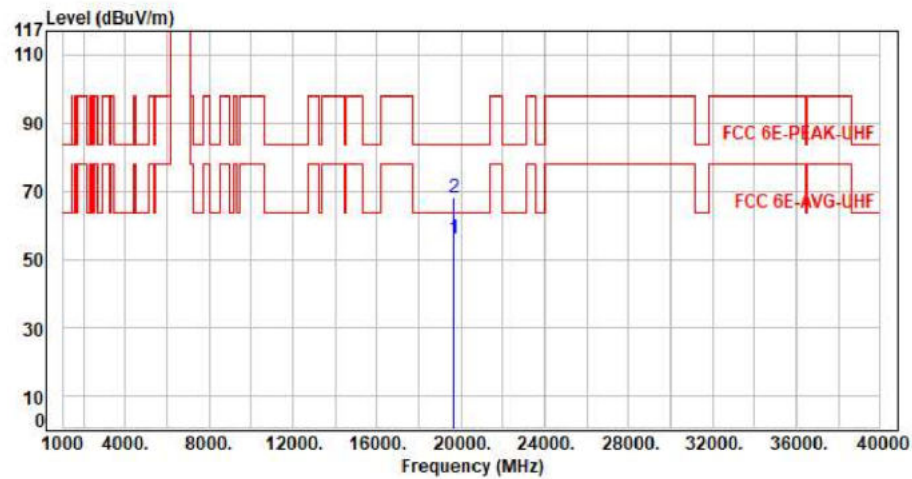

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.65	56.10	63.54	-7.44	Average	150	360	P
2	19695.00	11.45	56.74	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

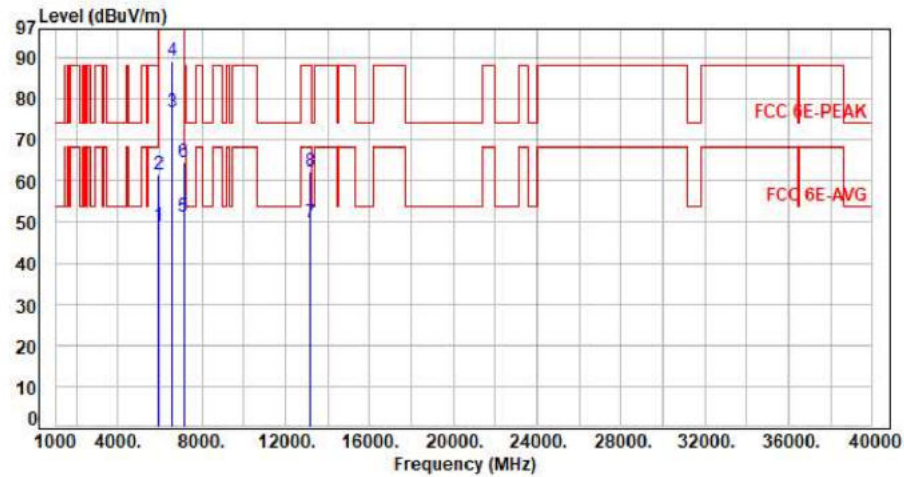

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.52	49.18	68.20	-19.02	Average	388	83	P
2	5925.00	7.66	54.03	61.69	88.20	-26.51	Peak	388	83	P
3	6565.00	8.67	67.96	76.63	200.00	-123.37	Average	388	83	P
4	6565.00	8.67	80.51	89.18	200.00	-110.82	Peak	388	83	P
5	7125.00	10.05	41.34	51.39	68.20	-16.81	Average	388	83	P
6	7125.00	10.05	54.35	64.40	88.20	-23.80	Peak	388	83	P
7	13130.00	20.32	29.55	49.87	68.20	-18.33	Average	100	154	P
8	13130.00	20.32	42.00	62.32	88.20	-25.88	Peak	100	154	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

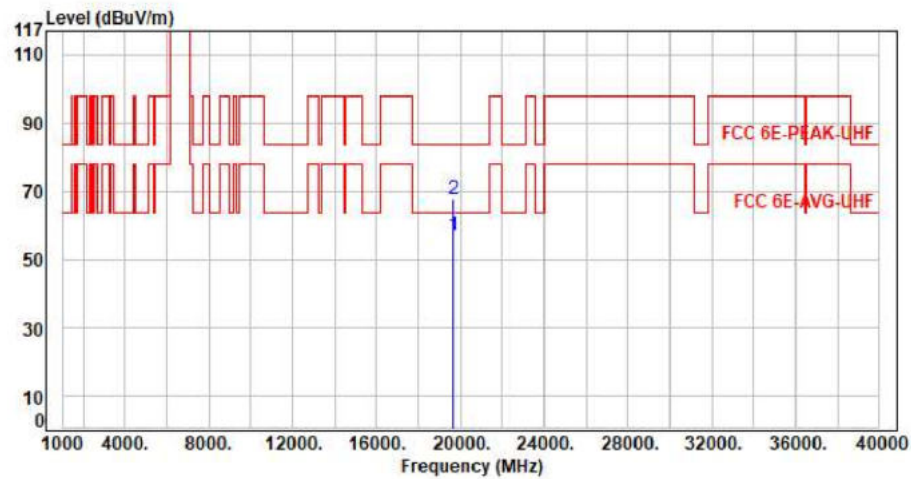

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.52	56.97	63.54	-6.57	Average	150	360	P
2	19695.00	11.45	56.01	67.46	83.54	-16.08	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

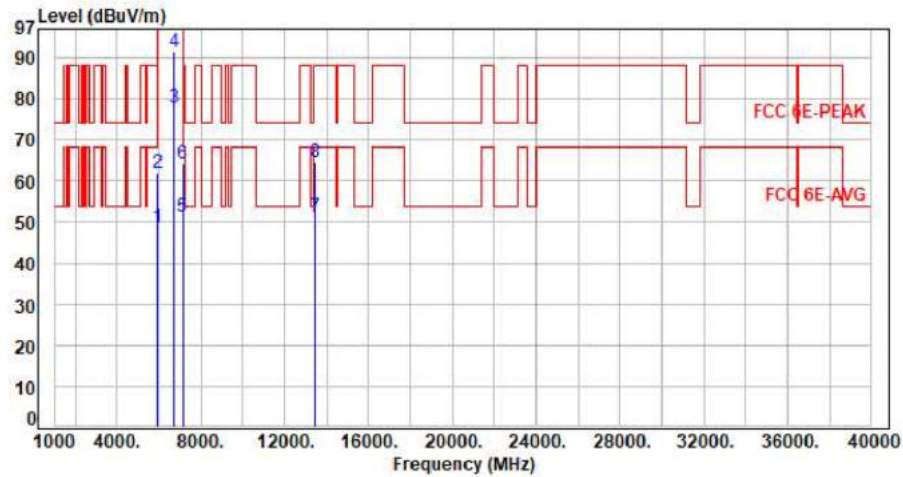


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.06	48.72	68.20	-19.48	Average	248	57	P
2	5925.00	7.66	54.28	61.94	88.20	-26.26	Peak	248	57	P
3	6725.00	9.33	68.65	77.98	200.00	-122.02	Average	248	57	P
4	6725.00	9.33	82.00	91.33	200.00	-108.67	Peak	248	57	P
5	7125.00	10.05	41.28	51.33	68.20	-16.87	Average	248	57	P
6	7125.00	10.05	54.30	64.35	88.20	-23.85	Peak	248	57	P
7	13450.00	21.80	29.52	51.32	68.20	-16.88	Average	100	227	P
8	13450.00	21.80	42.60	64.40	88.20	-23.80	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

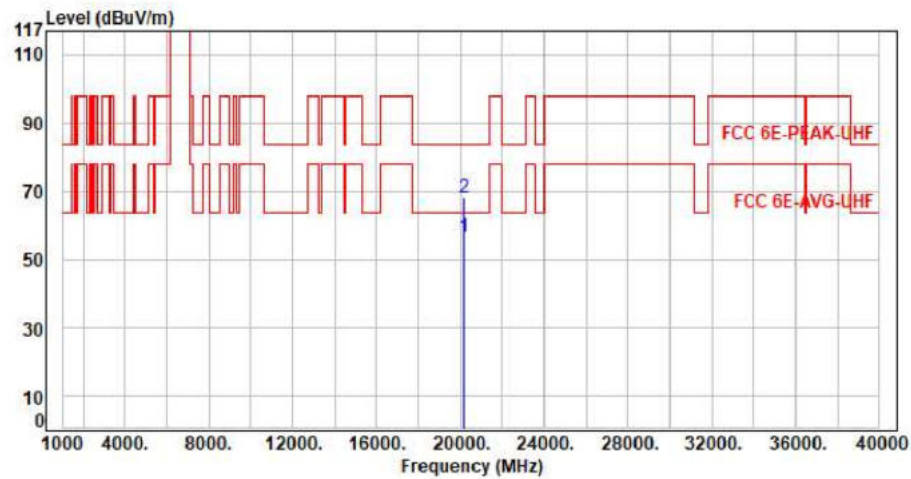

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.13	56.59	63.54	-6.95	Average	150	360	P
2	20175.00	11.46	56.76	68.22	83.54	-15.32	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

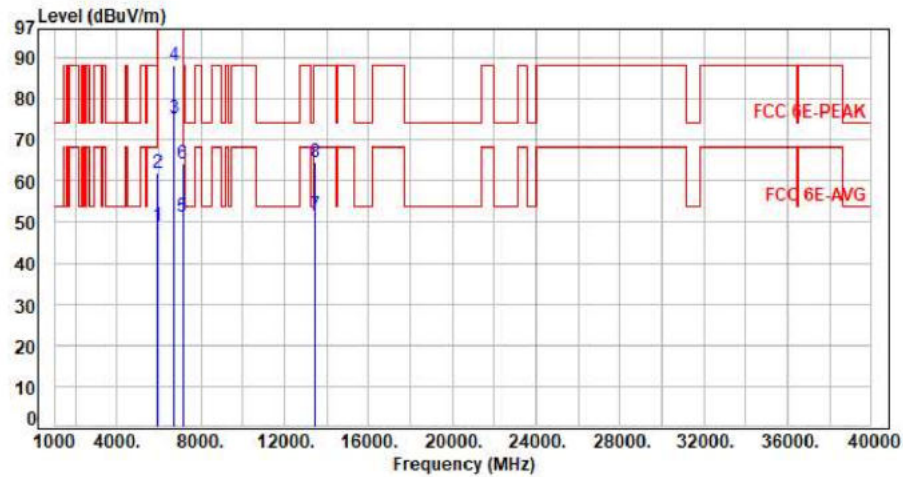


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.21	48.87	68.20	-19.33	Average	119	90	P
2	5925.00	7.66	54.36	62.02	88.20	-26.18	Peak	119	90	P
3	6725.00	9.33	65.79	75.12	200.00	-124.88	Average	119	90	P
4	6725.00	9.33	78.80	88.13	200.00	-111.87	Peak	119	90	P
5	7125.00	10.05	41.37	51.42	68.20	-16.78	Average	119	90	P
6	7125.00	10.05	54.11	64.16	88.20	-24.04	Peak	119	90	P
7	13450.00	21.80	29.78	51.58	68.20	-16.62	Average	100	235	P
8	13450.00	21.80	42.65	64.45	88.20	-23.75	Peak	100	235	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

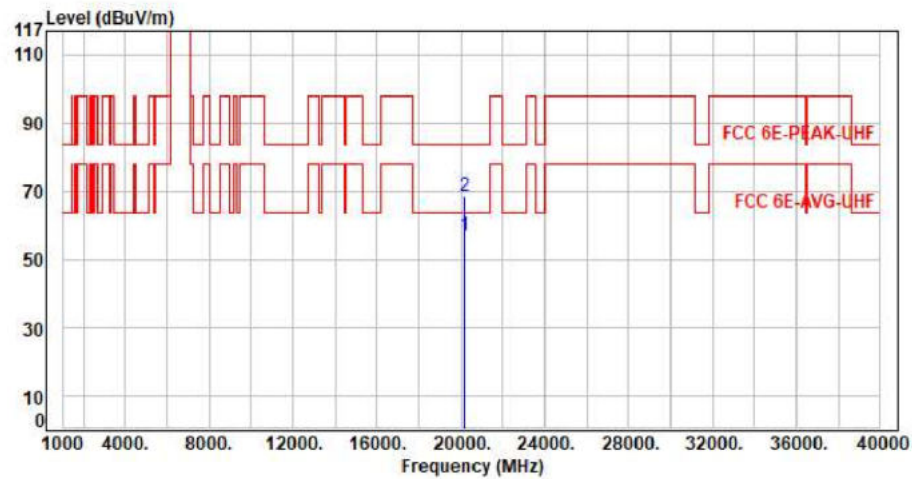


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.46	56.92	63.54	-6.62	Average	150	360	P
2	20175.00	11.46	56.86	68.32	83.54	-15.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

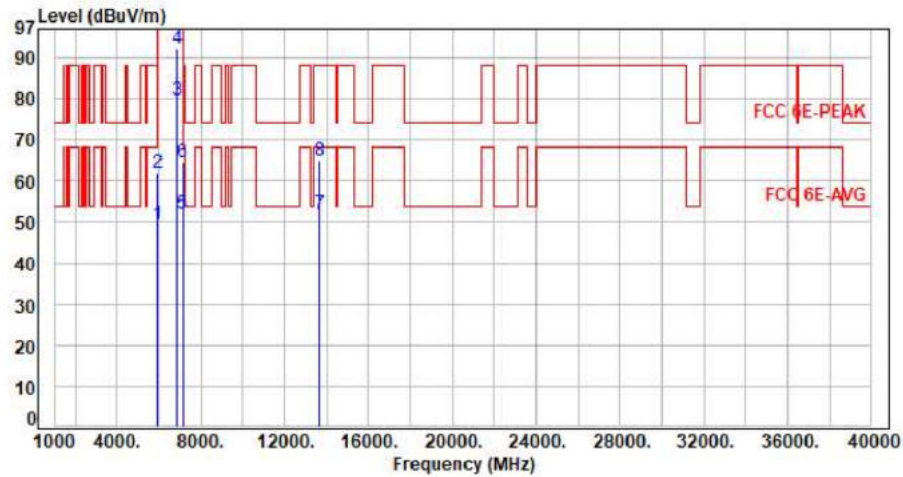

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.68	49.34	68.20	-18.86	Average	252	291	P
2	5925.00	7.66	54.16	61.82	88.20	-26.38	Peak	252	291	P
3	6845.00	9.48	70.07	79.55	200.00	-120.45	Average	252	291	P
4	6845.00	9.48	82.81	92.29	200.00	-107.71	Peak	252	291	P
5	7125.00	10.05	42.07	52.12	68.20	-16.08	Average	252	291	P
6	7125.00	10.05	54.35	64.40	88.20	-23.80	Peak	252	291	P
7	13690.00	22.40	29.63	52.03	68.20	-16.17	Average	100	314	P
8	13690.00	22.40	42.55	64.95	88.20	-23.25	Peak	100	314	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

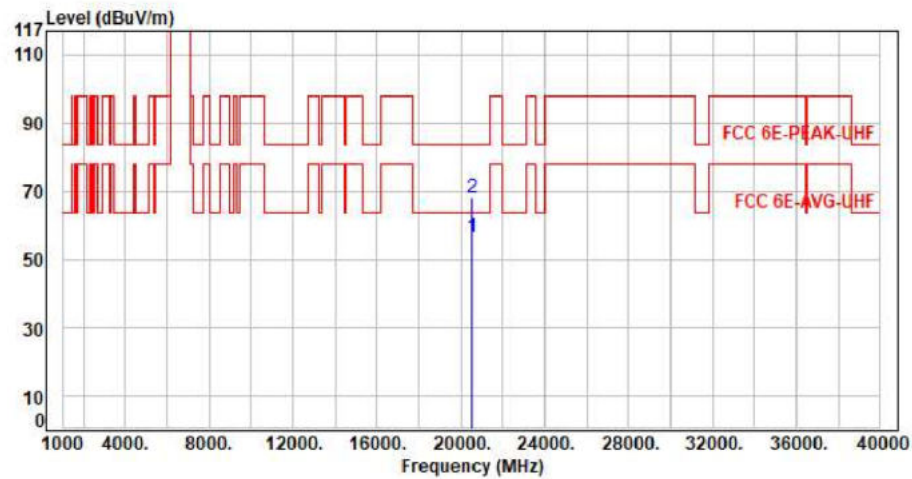


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	45.19	56.63	63.54	-6.91	Average	150	360	P
2	20535.00	11.44	56.59	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

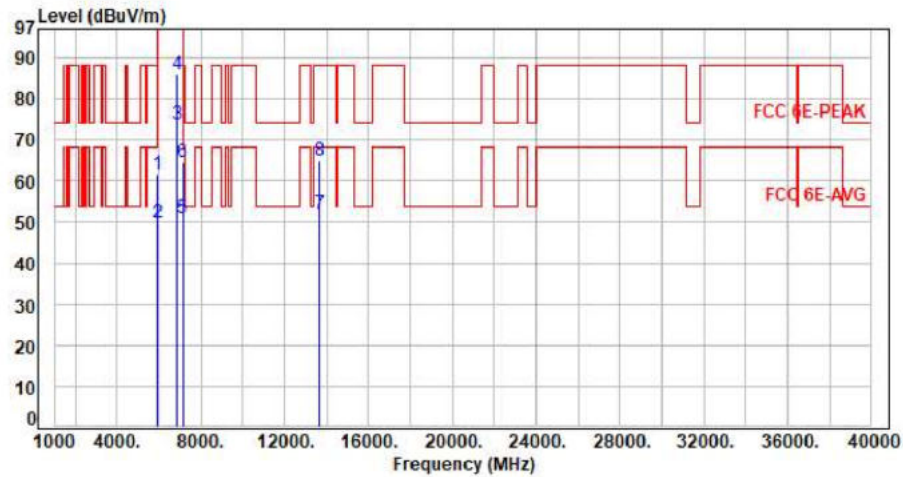

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	54.06	61.72	68.20	-6.48	Average	100	84	P
2	5925.00	7.66	42.18	49.84	88.20	-38.36	Peak	100	84	P
3	6845.00	9.48	64.15	73.63	200.00	-126.37	Average	100	84	P
4	6845.00	9.48	76.30	85.78	200.00	-114.22	Peak	100	84	P
5	7125.00	10.05	41.02	51.07	68.20	-17.13	Average	100	84	P
6	7125.00	10.05	54.60	64.65	88.20	-23.55	Peak	100	84	P
7	13690.00	22.40	29.55	51.95	68.20	-16.25	Average	100	224	P
8	13690.00	22.40	42.51	64.91	88.20	-23.29	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

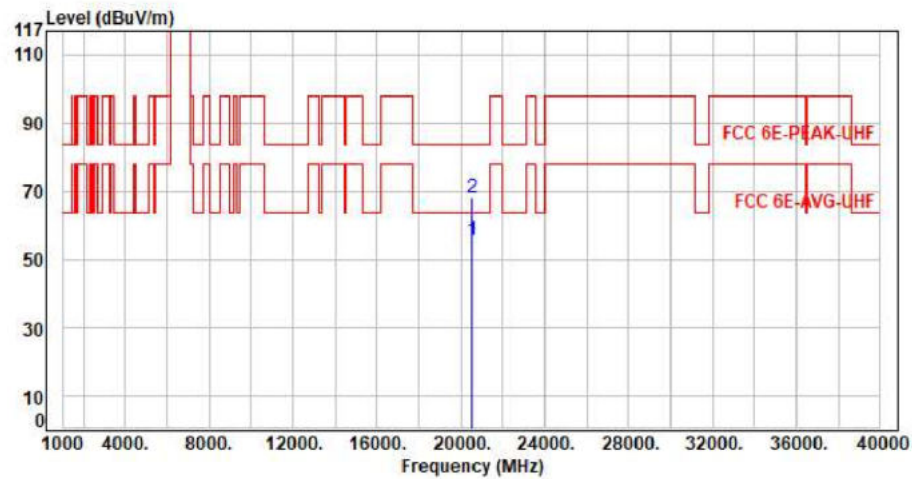

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.02	55.46	63.54	-8.08	Average	150	360	P
2	20535.00	11.44	56.53	67.97	83.54	-15.57	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

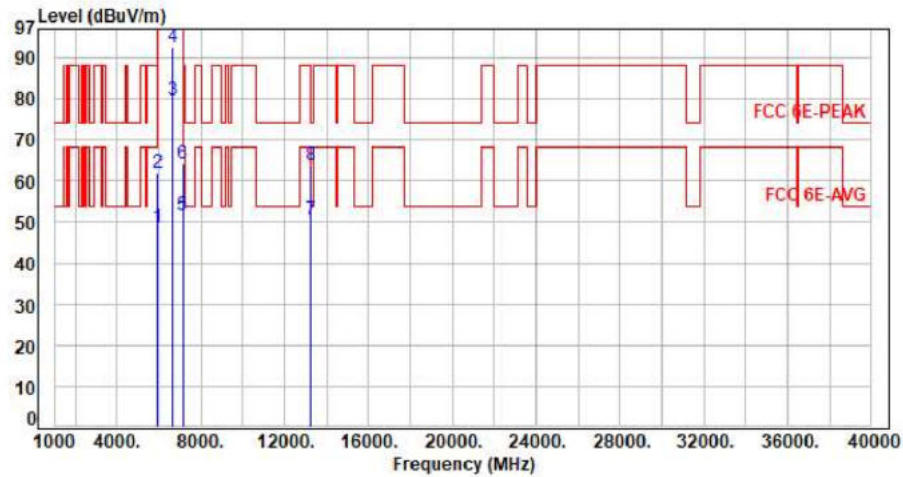


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.06	48.72	68.20	-19.48	Average	100	57	P
2	5925.00	7.66	54.26	61.92	88.20	-26.28	Peak	100	57	P
3	6625.00	8.94	70.72	79.66	200.00	-120.34	Average	100	57	P
4	6625.00	8.94	83.46	92.40	200.00	-107.60	Peak	100	57	P
5	7125.00	10.05	41.61	51.66	68.20	-16.54	Average	100	57	P
6	7125.00	10.05	54.05	64.10	88.20	-24.10	Peak	100	57	P
7	13250.00	21.00	29.62	50.62	54.00	-3.38	Average	100	139	P
8	13250.00	21.00	42.67	63.67	74.00	-10.33	Peak	100	139	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

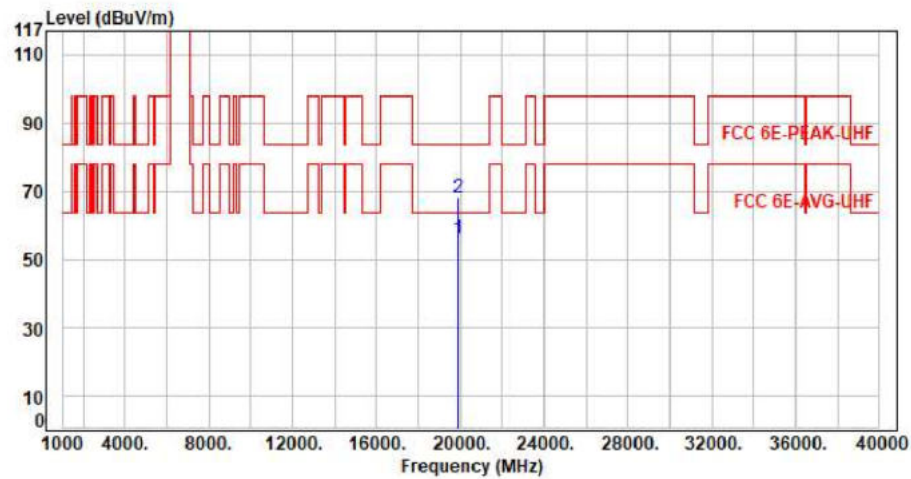


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.32	56.22	63.54	-7.32	Average	150	360	P
2	19875.00	11.90	56.20	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

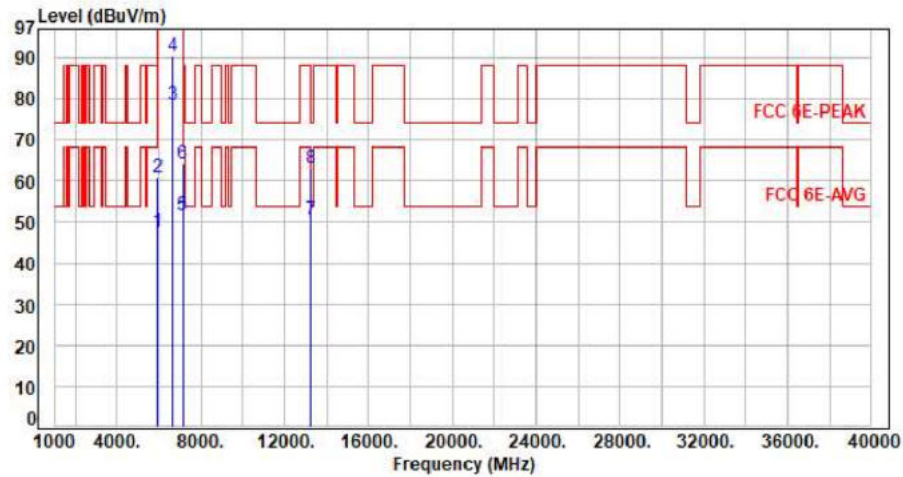


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	40.06	47.72	68.20	-20.48	Average	397	90	P
2	5925.00	7.66	53.26	60.92	88.20	-27.28	Peak	397	90	P
3	6625.00	8.94	69.72	78.66	200.00	-121.34	Average	397	90	P
4	6625.00	8.94	81.46	90.40	200.00	-109.60	Peak	397	90	P
5	7125.00	10.05	41.51	51.56	68.20	-16.64	Average	397	90	P
6	7125.00	10.05	53.95	64.00	88.20	-24.20	Peak	397	90	P
7	13250.00	21.00	29.57	50.57	54.00	-3.43	Average	100	228	P
8	13250.00	21.00	42.19	63.19	74.00	-10.81	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

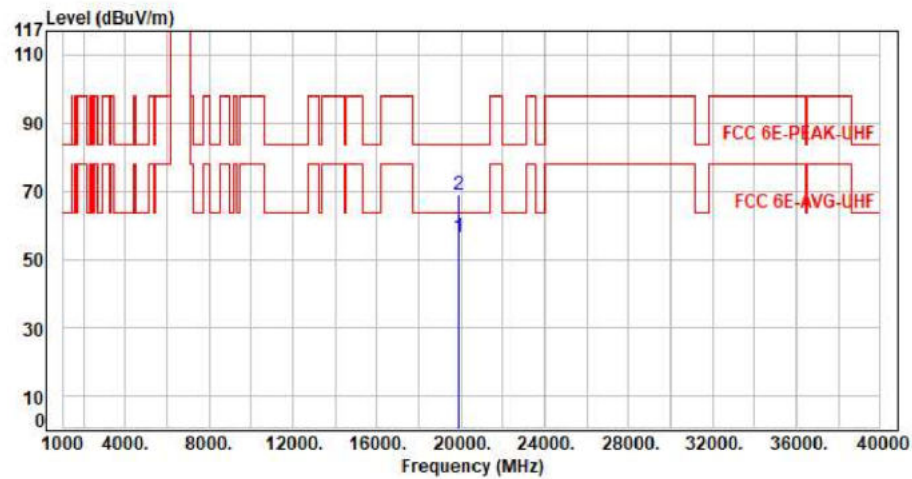


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.79	56.69	63.54	-6.85	Average	150	360	P
2	19875.00	11.90	57.04	68.94	83.54	-14.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

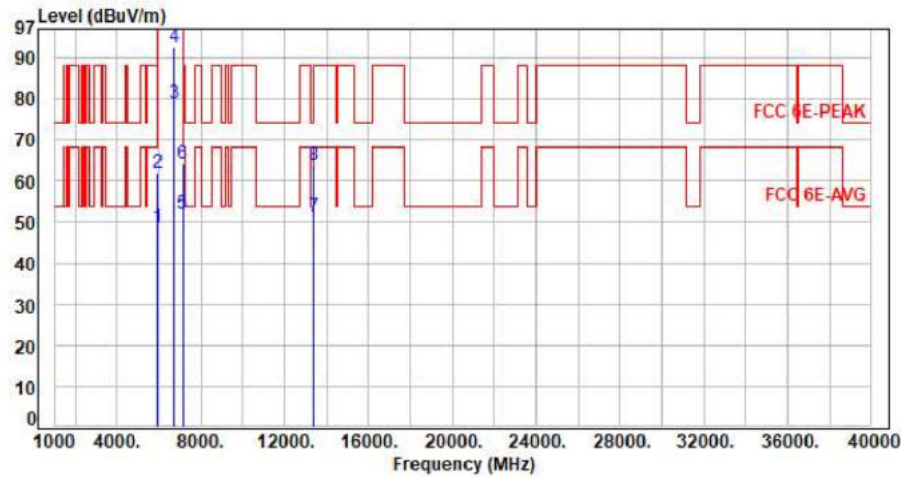

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.06	48.72	68.20	-19.48	Average	113	58	P
2	5925.00	7.66	54.24	61.90	88.20	-26.30	Peak	113	58	P
3	6705.00	9.25	69.60	78.85	200.00	-121.15	Average	113	58	P
4	6705.00	9.25	83.24	92.49	200.00	-107.51	Peak	113	58	P
5	7125.00	10.05	42.08	52.13	68.20	-16.07	Average	113	58	P
6	7125.00	10.05	54.05	64.10	88.20	-24.10	Peak	113	58	P
7	13410.00	21.62	29.61	51.23	68.20	-16.97	Average	100	138	P
8	13410.00	21.62	42.10	63.72	88.20	-24.48	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor