




For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

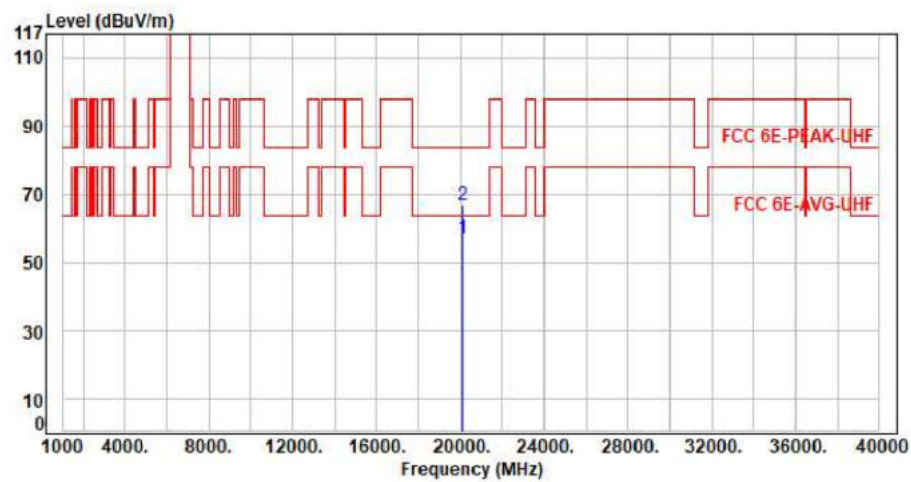

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20115.00           | 11.40          | 45.76             | 57.16             | 63.54             | -6.38          | Average  | 150            | 360              | P   |
| 2   | 20115.00           | 11.40          | 55.46             | 66.86             | 83.54             | -16.68         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

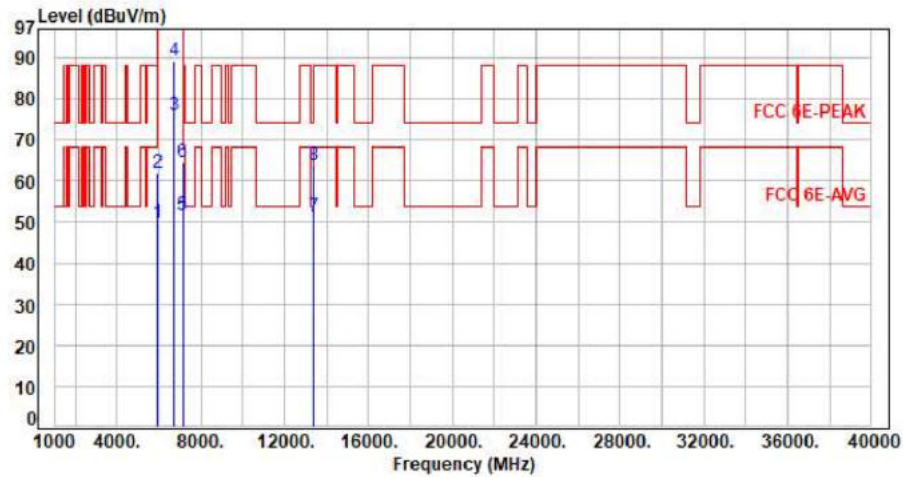


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.06          | 49.72          | 68.20          | -18.48      | Average  | 132         | 85            | P   |
| 2   | 5925.00         | 7.66        | 54.25          | 61.91          | 88.20          | -26.29      | Peak     | 132         | 85            | P   |
| 3   | 6705.00         | 9.25        | 66.58          | 75.83          | 200.00         | -124.17     | Average  | 132         | 85            | P   |
| 4   | 6705.00         | 9.25        | 80.18          | 89.43          | 200.00         | -110.57     | Peak     | 132         | 85            | P   |
| 5   | 7125.00         | 10.05       | 41.67          | 51.72          | 68.20          | -16.48      | Average  | 132         | 85            | P   |
| 6   | 7125.00         | 10.05       | 54.60          | 64.65          | 88.20          | -23.55      | Peak     | 132         | 85            | P   |
| 7   | 13410.00        | 21.62       | 29.58          | 51.20          | 68.20          | -17.00      | Average  | 100         | 135           | P   |
| 8   | 13410.00        | 21.62       | 42.31          | 63.93          | 88.20          | -24.27      | Peak     | 100         | 135           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH151 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

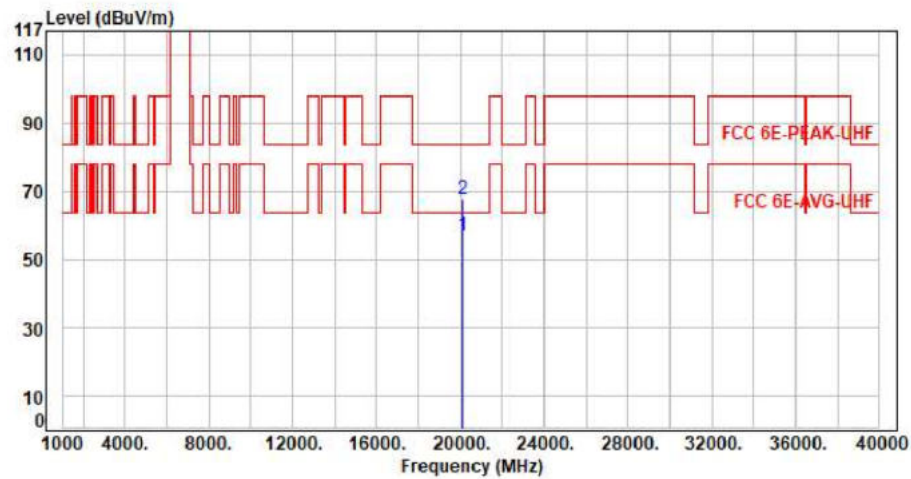


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20115.00           | 11.40          | 45.47             | 56.87             | 63.54             | -6.67          | Average  | 150            | 360              | P   |
| 2   | 20115.00           | 11.40          | 56.13             | 67.53             | 83.54             | -16.01         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

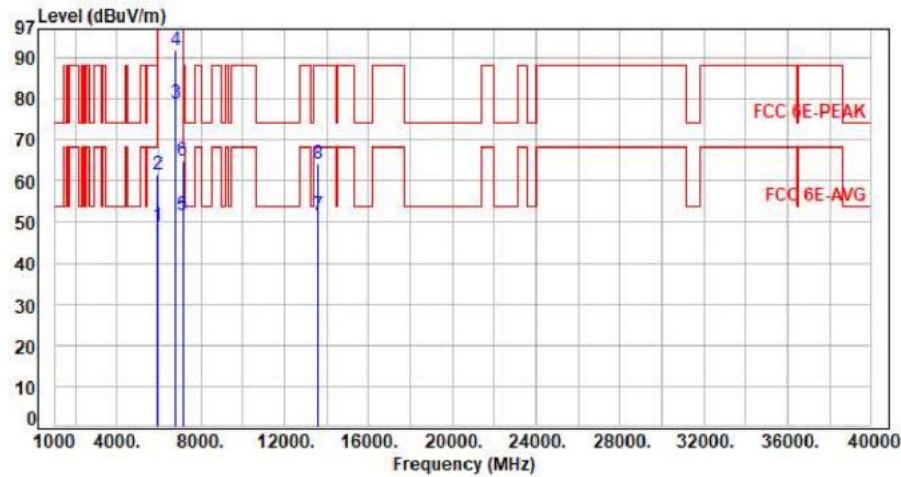

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.36          | 49.02          | 68.20          | -19.18      | Average  | 100         | 297           | P   |
| 2   | 5925.00         | 7.66        | 54.09          | 61.75          | 88.20          | -26.45      | Peak     | 100         | 297           | P   |
| 3   | 6785.00         | 9.46        | 69.33          | 78.79          | 200.00         | -121.21     | Average  | 100         | 297           | P   |
| 4   | 6785.00         | 9.46        | 82.32          | 91.78          | 200.00         | -108.22     | Peak     | 100         | 297           | P   |
| 5   | 7125.00         | 10.05       | 41.51          | 51.56          | 68.20          | -16.64      | Average  | 100         | 297           | P   |
| 6   | 7125.00         | 10.05       | 54.91          | 64.96          | 88.20          | -23.24      | Peak     | 100         | 297           | P   |
| 7   | 13570.00        | 22.06       | 29.55          | 51.61          | 68.20          | -16.59      | Average  | 100         | 166           | P   |
| 8   | 13570.00        | 22.06       | 42.08          | 64.14          | 88.20          | -24.06      | Peak     | 100         | 166           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

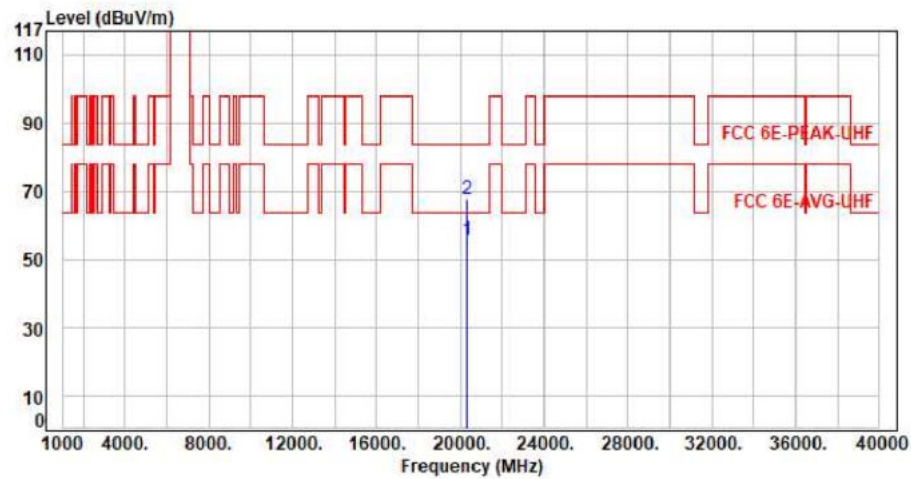


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20355.00           | 11.06          | 44.55             | 55.61             | 63.54             | -7.93          | Average  | 150            | 360              | P   |
| 2   | 20355.00           | 11.06          | 56.75             | 67.81             | 83.54             | -15.73         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

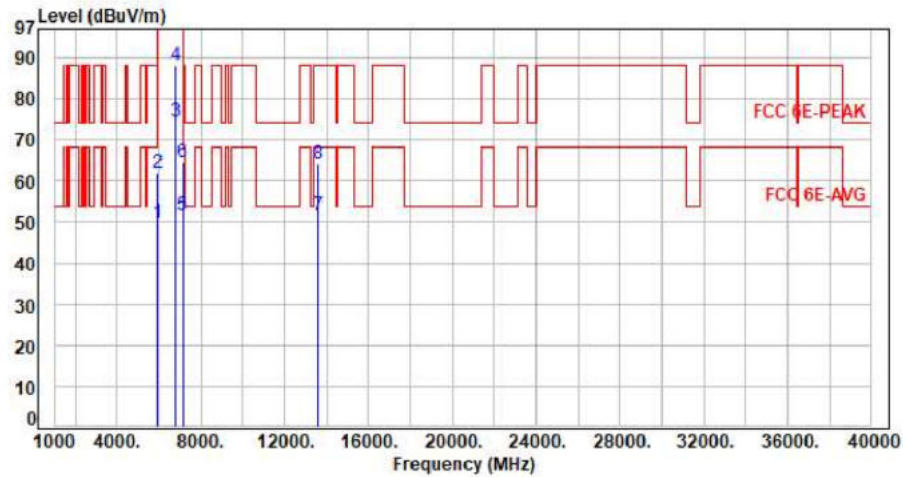

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.02          | 49.68          | 68.20          | -18.52      | Average  | 108         | 106           | P   |
| 2   | 5925.00         | 7.66        | 54.36          | 62.02          | 88.20          | -26.18      | Peak     | 108         | 106           | P   |
| 3   | 6785.00         | 9.46        | 65.08          | 74.54          | 200.00         | -125.46     | Average  | 108         | 106           | P   |
| 4   | 6785.00         | 9.46        | 78.75          | 88.21          | 200.00         | -111.79     | Peak     | 108         | 106           | P   |
| 5   | 7125.00         | 10.05       | 41.64          | 51.69          | 68.20          | -16.51      | Average  | 108         | 106           | P   |
| 6   | 7125.00         | 10.05       | 54.65          | 64.70          | 88.20          | -23.50      | Peak     | 108         | 106           | P   |
| 7   | 13570.00        | 22.06       | 29.47          | 51.53          | 68.20          | -16.67      | Average  | 100         | 261           | P   |
| 8   | 13570.00        | 22.06       | 42.20          | 64.26          | 88.20          | -23.94      | Peak     | 100         | 261           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH167 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

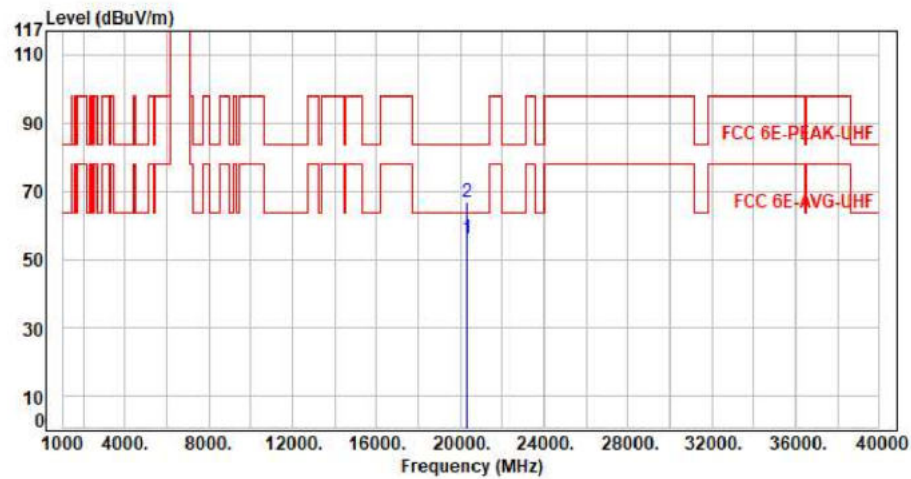


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20355.00           | 11.06          | 45.11             | 56.17             | 63.54             | -7.37          | Average  | 150            | 360              | P   |
| 2   | 20355.00           | 11.06          | 55.55             | 66.61             | 83.54             | -16.93         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

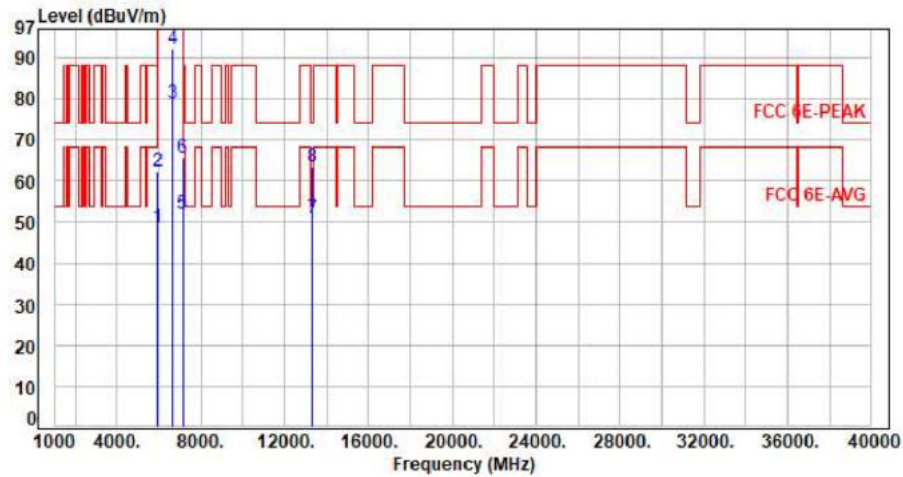

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 41.07          | 48.73          | 68.20          | -19.47      | Average  | 100         | 57            | P   |
| 2   | 5925.00         | 7.66        | 54.62          | 62.28          | 88.20          | -25.92      | Peak     | 100         | 57            | P   |
| 3   | 6665.00         | 9.08        | 69.85          | 78.93          | 200.00         | -121.07     | Average  | 100         | 57            | P   |
| 4   | 6665.00         | 9.08        | 83.17          | 92.25          | 200.00         | -107.75     | Peak     | 100         | 57            | P   |
| 5   | 7125.00         | 10.05       | 42.06          | 52.11          | 68.20          | -16.09      | Average  | 100         | 57            | P   |
| 6   | 7125.00         | 10.05       | 55.61          | 65.66          | 88.20          | -22.54      | Peak     | 100         | 57            | P   |
| 7   | 13330.00        | 21.30       | 29.63          | 50.93          | 54.00          | -3.07       | Average  | 100         | 133           | P   |
| 8   | 13330.00        | 21.30       | 42.20          | 63.50          | 74.00          | -10.50      | Peak     | 100         | 133           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

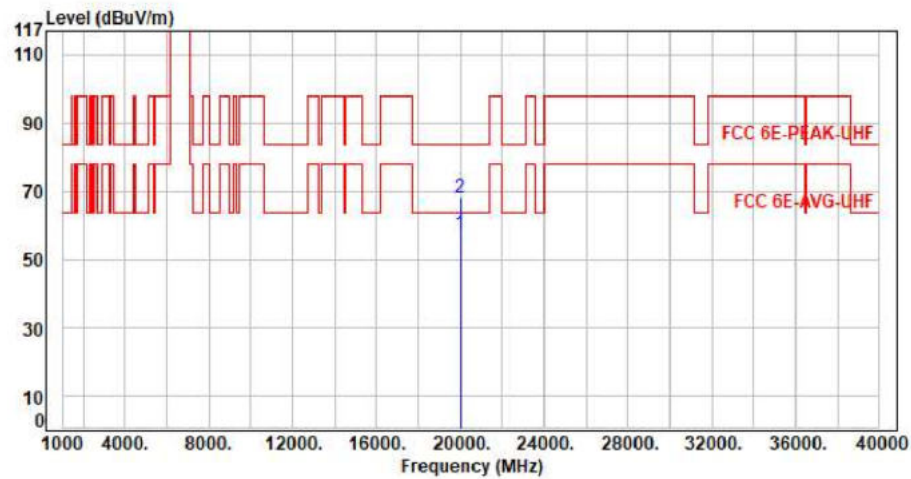


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19995.00           | 11.70          | 45.48             | 57.18             | 63.54             | -6.36          | Average  | 150            | 360              | P   |
| 2   | 19995.00           | 11.70          | 56.19             | 67.89             | 83.54             | -15.65         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

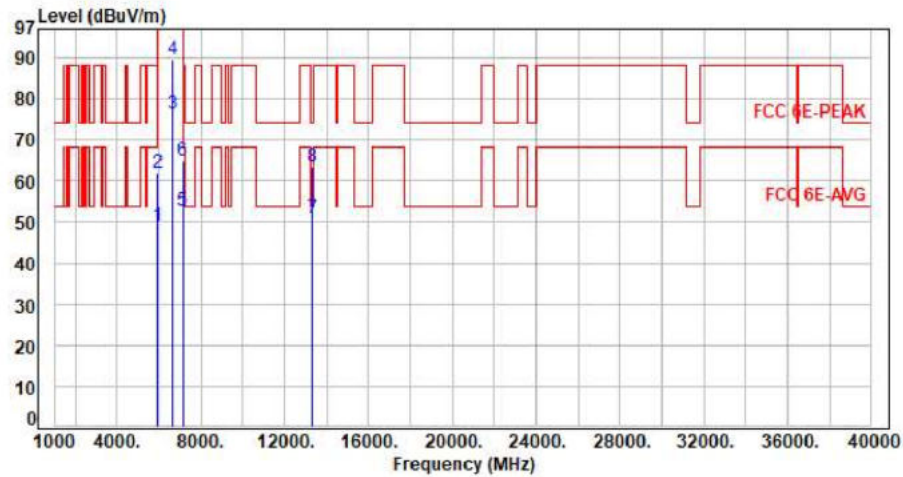


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 7.66           | 41.36             | 49.02             | 68.20             | -19.18         | Average  | 100            | 89               | P   |
| 2   | 5925.00            | 7.66           | 54.23             | 61.89             | 88.20             | -26.31         | Peak     | 100            | 89               | P   |
| 3   | 6665.00            | 9.08           | 67.39             | 76.47             | 200.00            | -123.53        | Average  | 100            | 89               | P   |
| 4   | 6665.00            | 9.08           | 80.36             | 89.44             | 200.00            | -110.56        | Peak     | 100            | 89               | P   |
| 5   | 7125.00            | 10.05          | 42.61             | 52.66             | 68.20             | -15.54         | Average  | 100            | 89               | P   |
| 6   | 7125.00            | 10.05          | 54.68             | 64.73             | 88.20             | -23.47         | Peak     | 100            | 89               | P   |
| 7   | 13330.00           | 21.30          | 29.49             | 50.79             | 54.00             | -3.21          | Average  | 100            | 195              | P   |
| 8   | 13330.00           | 21.30          | 42.05             | 63.35             | 74.00             | -10.65         | Peak     | 100            | 195              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x160 CH143 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

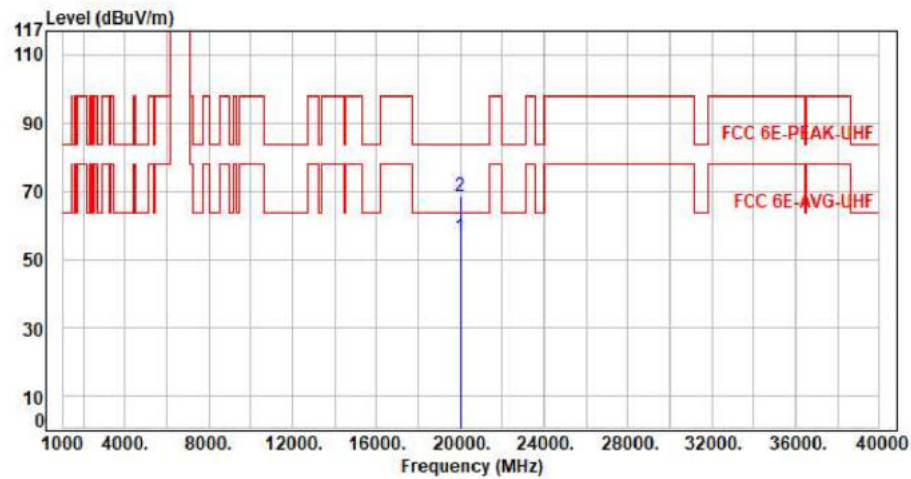


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19995.00           | 11.70          | 44.95             | 56.65             | 63.54             | -6.89          | Average  | 150            | 360              | P   |
| 2   | 19995.00           | 11.70          | 56.91             | 68.61             | 83.54             | -14.93         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

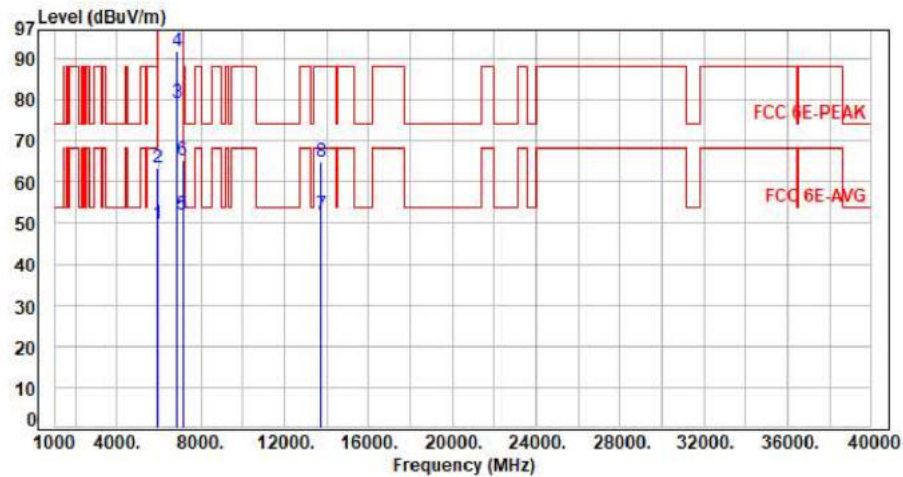

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.08          | 49.74          | 68.20          | -18.46      | Average  | 111         | 297           | P   |
| 2   | 5925.00         | 7.66        | 55.93          | 63.59          | 88.20          | -24.61      | Peak     | 111         | 297           | P   |
| 3   | 6875.00         | 9.55        | 69.56          | 79.11          | 200.00         | -120.89     | Average  | 111         | 297           | P   |
| 4   | 6875.00         | 9.55        | 82.25          | 91.80          | 200.00         | -108.20     | Peak     | 111         | 297           | P   |
| 5   | 7125.00         | 10.05       | 42.08          | 52.13          | 68.20          | -16.07      | Average  | 111         | 297           | P   |
| 6   | 7125.00         | 10.05       | 55.13          | 65.18          | 88.20          | -23.02      | Peak     | 111         | 297           | P   |
| 7   | 13750.00        | 22.65       | 29.44          | 52.09          | 68.20          | -16.11      | Average  | 100         | 124           | P   |
| 8   | 13750.00        | 22.65       | 42.19          | 64.84          | 88.20          | -23.36      | Peak     | 100         | 124           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

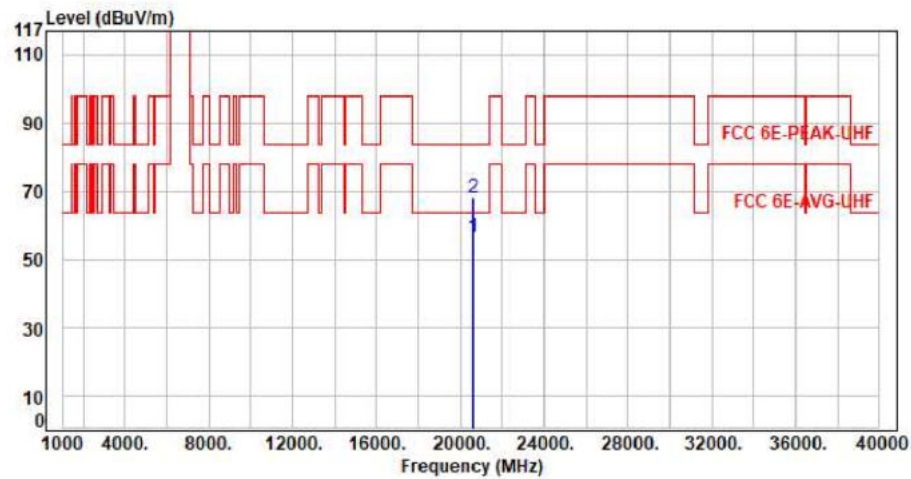


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20625.00           | 11.14          | 45.33             | 56.47             | 63.54             | -7.07          | Average  | 150            | 360              | P   |
| 2   | 20625.00           | 11.14          | 56.99             | 68.13             | 83.54             | -15.41         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

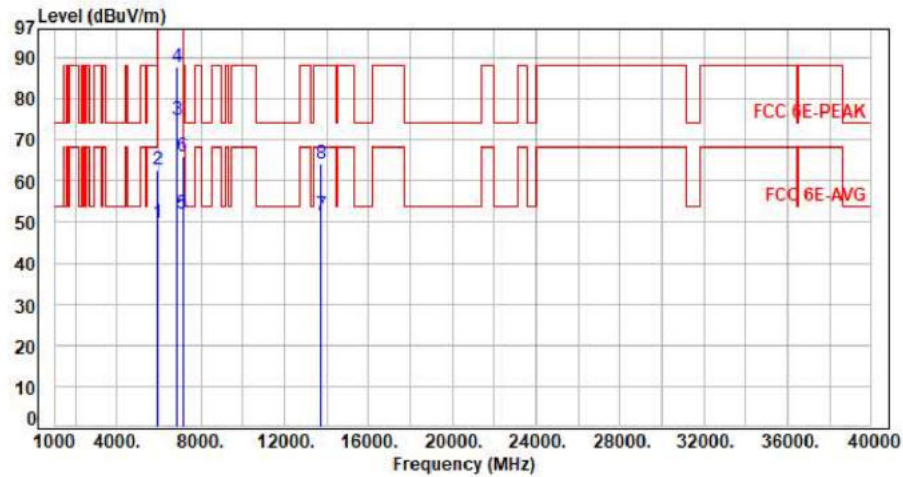


| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.06          | 49.72          | 68.20          | -18.48      | Average  | 128         | 105           | P   |
| 2   | 5925.00         | 7.66        | 55.12          | 62.78          | 88.20          | -25.42      | Peak     | 128         | 105           | P   |
| 3   | 6875.00         | 9.55        | 65.26          | 74.81          | 200.00         | -125.19     | Average  | 128         | 105           | P   |
| 4   | 6875.00         | 9.55        | 78.40          | 87.95          | 200.00         | -112.05     | Peak     | 128         | 105           | P   |
| 5   | 7125.00         | 10.05       | 41.94          | 51.99          | 68.20          | -16.21      | Average  | 128         | 105           | P   |
| 6   | 7125.00         | 10.05       | 55.82          | 65.87          | 88.20          | -22.33      | Peak     | 128         | 105           | P   |
| 7   | 13750.00        | 22.65       | 29.16          | 51.81          | 68.20          | -16.39      | Average  | 100         | 258           | P   |
| 8   | 13750.00        | 22.65       | 41.69          | 64.34          | 88.20          | -23.86      | Peak     | 100         | 258           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

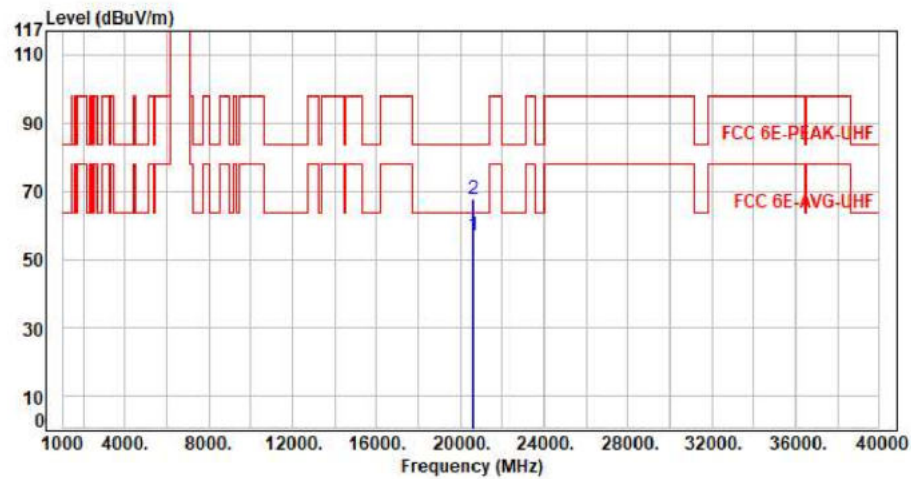


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20625.00           | 11.14          | 45.65             | 56.79             | 63.54             | -6.75          | Average  | 150            | 360              | P   |
| 2   | 20625.00           | 11.14          | 56.28             | 67.42             | 83.54             | -16.12         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

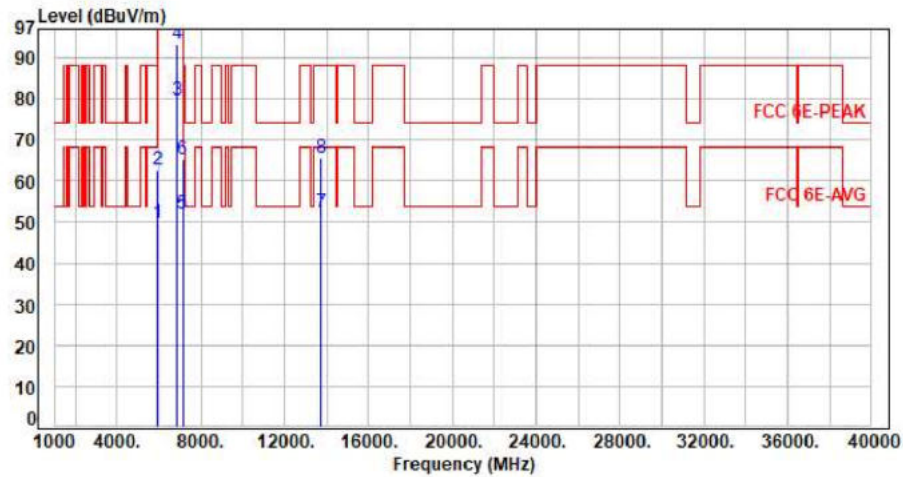

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.08          | 49.74          | 68.20          | -18.46      | Average  | 272         | 293           | P   |
| 2   | 5925.00         | 7.66        | 55.18          | 62.84          | 88.20          | -25.36      | Peak     | 272         | 293           | P   |
| 3   | 6885.00         | 9.56        | 70.15          | 79.71          | 200.00         | -120.29     | Average  | 272         | 293           | P   |
| 4   | 6885.00         | 9.56        | 83.77          | 93.33          | 200.00         | -106.67     | Peak     | 272         | 293           | P   |
| 5   | 7125.00         | 10.05       | 41.96          | 52.01          | 68.20          | -16.19      | Average  | 272         | 293           | P   |
| 6   | 7125.00         | 10.05       | 55.32          | 65.37          | 88.20          | -22.83      | Peak     | 272         | 293           | P   |
| 7   | 13770.00        | 22.69       | 29.61          | 52.30          | 68.20          | -15.90      | Average  | 100         | 132           | P   |
| 8   | 13770.00        | 22.69       | 42.91          | 65.60          | 88.20          | -22.60      | Peak     | 100         | 132           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

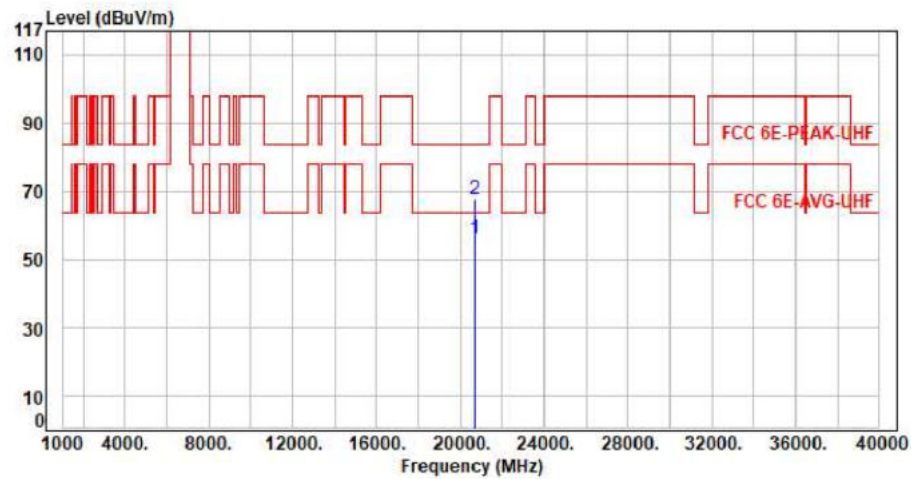


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20655.00           | 10.99          | 45.11             | 56.10             | 63.54             | -7.44          | Average  | 150            | 360              | P   |
| 2   | 20655.00           | 10.99          | 56.42             | 67.41             | 83.54             | -16.13         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

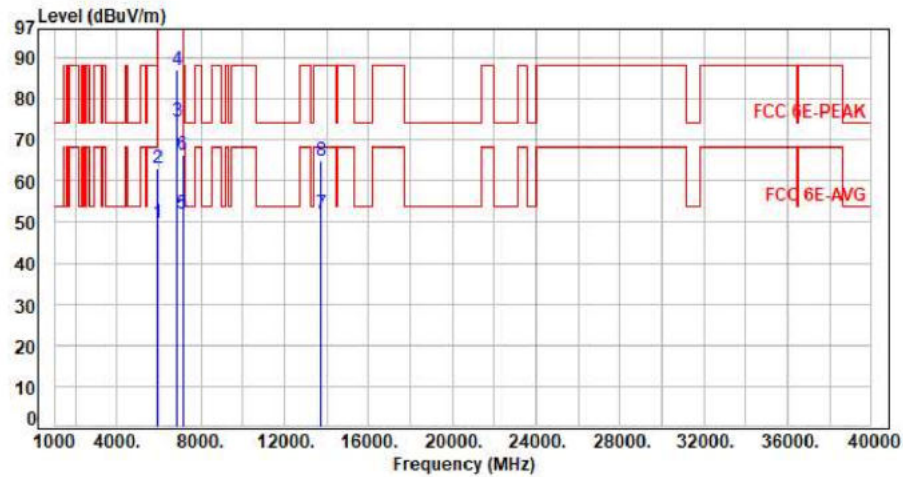

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.08          | 49.74          | 68.20          | -18.46      | Average  | 125         | 104           | P   |
| 2   | 5925.00         | 7.66        | 55.55          | 63.21          | 88.20          | -24.99      | Peak     | 125         | 104           | P   |
| 3   | 6885.00         | 9.56        | 65.13          | 74.69          | 200.00         | -125.31     | Average  | 125         | 104           | P   |
| 4   | 6885.00         | 9.56        | 77.57          | 87.13          | 200.00         | -112.87     | Peak     | 125         | 104           | P   |
| 5   | 7125.00         | 10.05       | 42.02          | 52.07          | 68.20          | -16.13      | Average  | 125         | 104           | P   |
| 6   | 7125.00         | 10.05       | 56.20          | 66.25          | 88.20          | -21.95      | Peak     | 125         | 104           | P   |
| 7   | 13770.00        | 22.69       | 29.42          | 52.11          | 68.20          | -16.09      | Average  | 100         | 193           | P   |
| 8   | 13770.00        | 22.69       | 42.19          | 64.88          | 88.20          | -23.32      | Peak     | 100         | 193           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

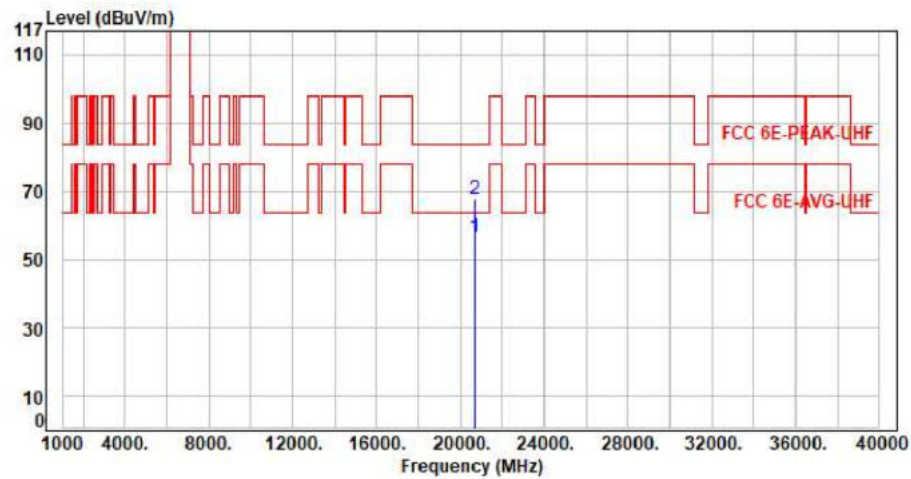


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20655.00           | 10.99          | 45.38             | 56.37             | 63.54             | -7.17          | Average  | 150            | 360              | P   |
| 2   | 20655.00           | 10.99          | 56.71             | 67.70             | 83.54             | -15.84         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

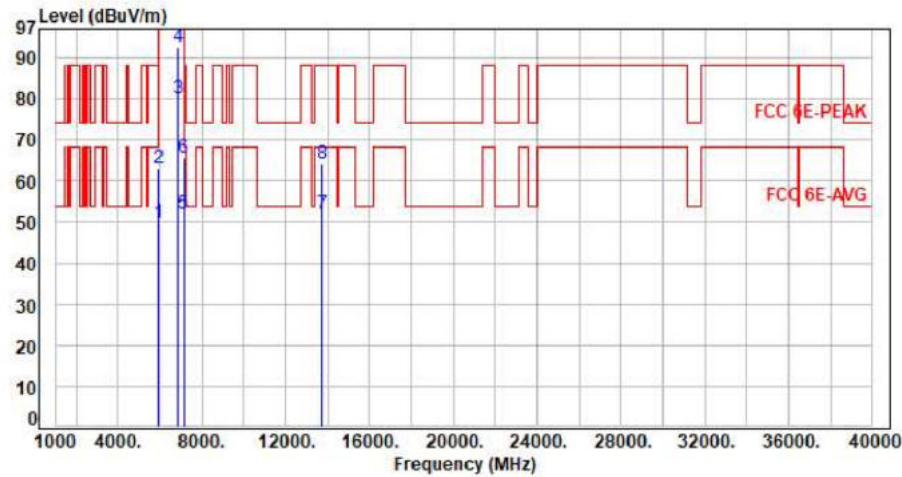


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.04          | 49.70          | 68.20          | -18.50      | Average  | 105         | 296           | P   |
| 2   | 5925.00         | 7.66        | 55.48          | 63.14          | 88.20          | -25.06      | Peak     | 105         | 296           | P   |
| 3   | 6865.00         | 9.52        | 70.36          | 79.88          | 200.00         | -120.12     | Average  | 105         | 296           | P   |
| 4   | 6865.00         | 9.52        | 83.13          | 92.65          | 200.00         | -107.35     | Peak     | 105         | 296           | P   |
| 5   | 7125.00         | 10.05       | 42.05          | 52.10          | 68.20          | -16.10      | Average  | 105         | 296           | P   |
| 6   | 7125.00         | 10.05       | 55.45          | 65.50          | 88.20          | -22.70      | Peak     | 105         | 296           | P   |
| 7   | 13730.00        | 22.57       | 29.41          | 51.98          | 68.20          | -16.22      | Average  | 100         | 247           | P   |
| 8   | 13730.00        | 22.57       | 41.69          | 64.26          | 88.20          | -23.94      | Peak     | 100         | 247           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

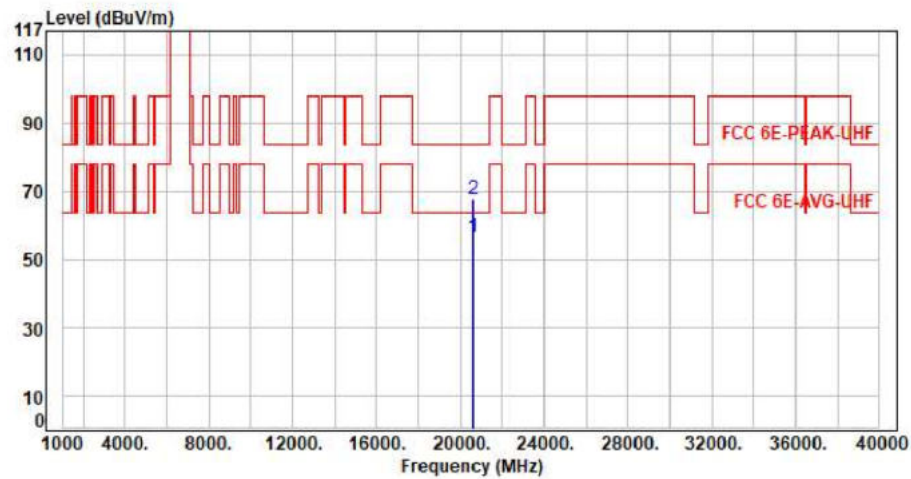


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20595.00           | 11.31          | 45.08             | 56.39             | 63.54             | -7.15          | Average  | 150            | 360              | P   |
| 2   | 20595.00           | 11.31          | 56.49             | 67.80             | 83.54             | -15.74         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

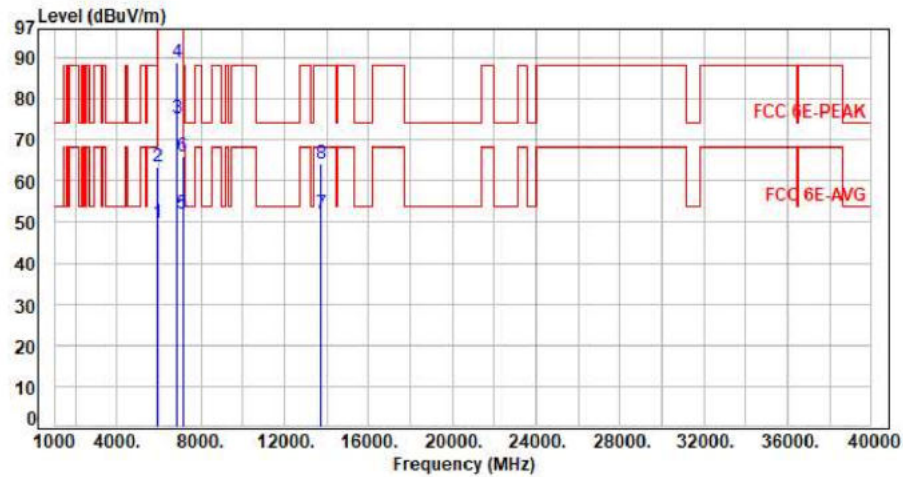

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.09          | 49.75          | 68.20          | -18.45      | Average  | 128         | 104           | P   |
| 2   | 5925.00         | 7.66        | 55.93          | 63.59          | 88.20          | -24.61      | Peak     | 128         | 104           | P   |
| 3   | 6865.00         | 9.52        | 65.89          | 75.41          | 200.00         | -124.59     | Average  | 128         | 104           | P   |
| 4   | 6865.00         | 9.52        | 79.42          | 88.94          | 200.00         | -111.06     | Peak     | 128         | 104           | P   |
| 5   | 7125.00         | 10.05       | 42.08          | 52.13          | 68.20          | -16.07      | Average  | 128         | 104           | P   |
| 6   | 7125.00         | 10.05       | 55.86          | 65.91          | 88.20          | -22.29      | Peak     | 128         | 104           | P   |
| 7   | 13730.00        | 22.57       | 29.48          | 52.05          | 68.20          | -16.15      | Average  | 100         | 324           | P   |
| 8   | 13730.00        | 22.57       | 41.49          | 64.06          | 88.20          | -24.14      | Peak     | 100         | 324           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH183 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

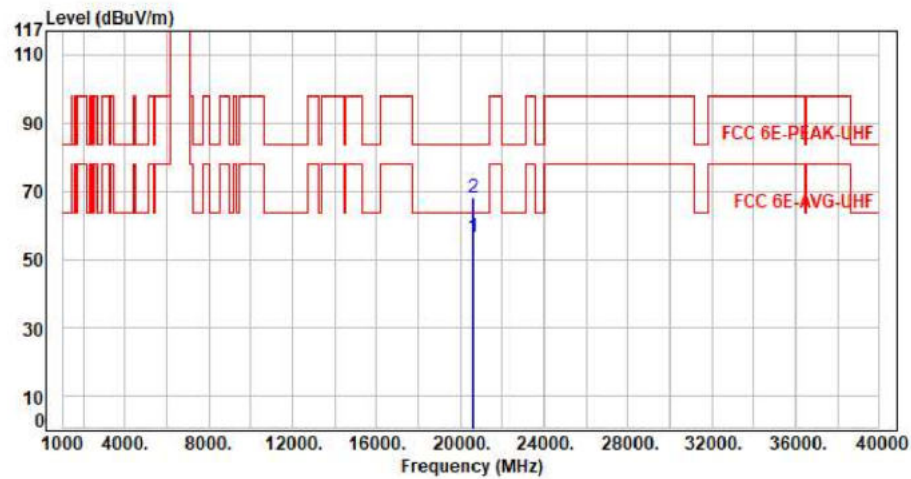


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20595.00           | 11.31          | 45.08             | 56.39             | 63.54             | -7.15          | Average  | 150            | 360              | P   |
| 2   | 20595.00           | 11.31          | 56.87             | 68.18             | 83.54             | -15.36         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

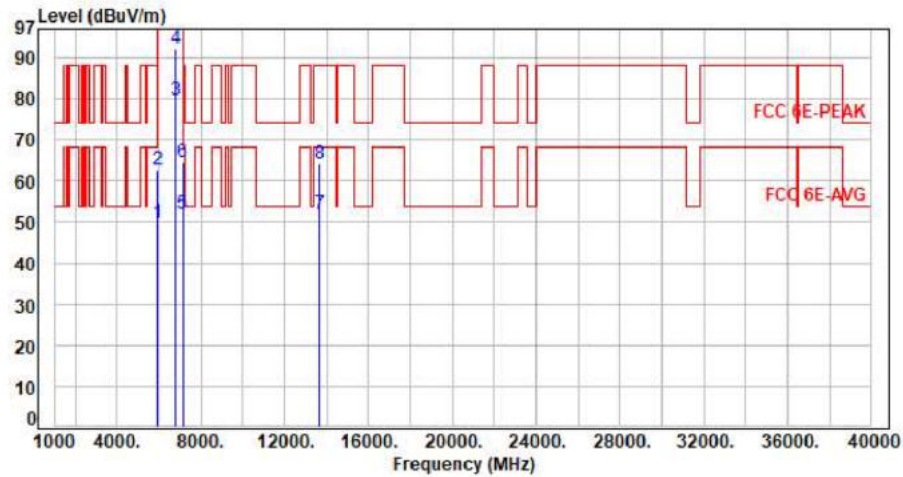


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.02          | 49.68          | 68.20          | -18.52      | Average  | 102         | 296           | P   |
| 2   | 5925.00         | 7.66        | 55.17          | 62.83          | 88.20          | -25.37      | Peak     | 102         | 296           | P   |
| 3   | 6825.00         | 9.47        | 70.07          | 79.54          | 200.00         | -120.46     | Average  | 102         | 296           | P   |
| 4   | 6825.00         | 9.47        | 82.57          | 92.04          | 200.00         | -107.96     | Peak     | 102         | 296           | P   |
| 5   | 7125.00         | 10.05       | 41.95          | 52.00          | 68.20          | -16.20      | Average  | 102         | 296           | P   |
| 6   | 7125.00         | 10.05       | 54.61          | 64.66          | 88.20          | -23.54      | Peak     | 102         | 296           | P   |
| 7   | 13650.00        | 22.24       | 29.66          | 51.90          | 68.20          | -16.30      | Average  | 100         | 314           | P   |
| 8   | 13650.00        | 22.24       | 41.91          | 64.15          | 88.20          | -24.05      | Peak     | 100         | 314           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

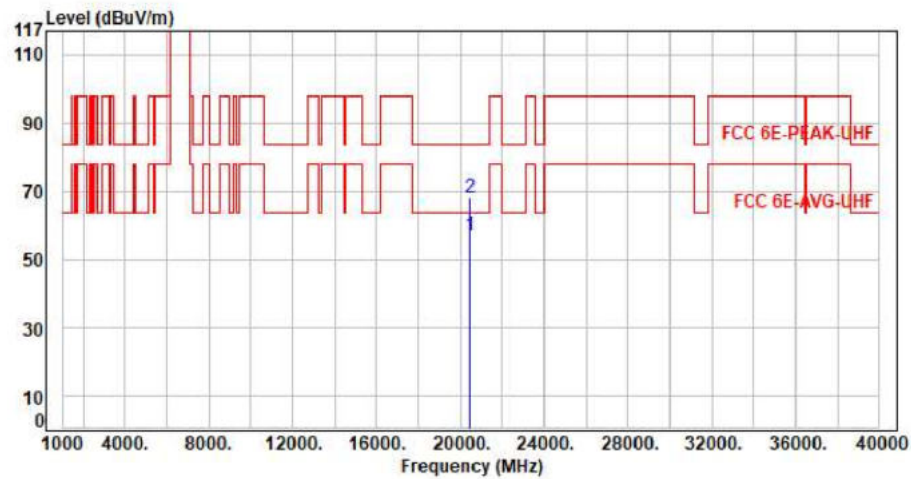


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20475.00           | 11.45          | 45.37             | 56.82             | 63.54             | -6.72          | Average  | 150            | 360              | P   |
| 2   | 20475.00           | 11.45          | 56.47             | 67.92             | 83.54             | -15.62         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

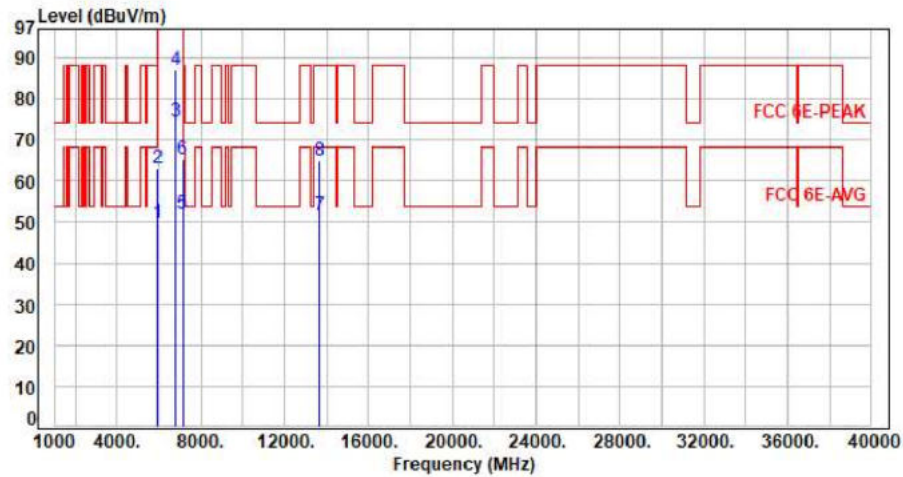


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 7.66        | 42.13          | 49.79          | 68.20          | -18.41      | Average  | 100         | 84            | P   |
| 2   | 5925.00         | 7.66        | 55.27          | 62.93          | 88.20          | -25.27      | Peak     | 100         | 84            | P   |
| 3   | 6825.00         | 9.47        | 65.02          | 74.49          | 200.00         | -125.51     | Average  | 100         | 84            | P   |
| 4   | 6825.00         | 9.47        | 77.52          | 86.99          | 200.00         | -113.01     | Peak     | 100         | 84            | P   |
| 5   | 7125.00         | 10.05       | 42.01          | 52.06          | 68.20          | -16.14      | Average  | 100         | 84            | P   |
| 6   | 7125.00         | 10.05       | 55.30          | 65.35          | 88.20          | -22.85      | Peak     | 100         | 84            | P   |
| 7   | 13650.00        | 22.24       | 29.55          | 51.79          | 68.20          | -16.41      | Average  | 100         | 314           | P   |
| 8   | 13650.00        | 22.24       | 42.51          | 64.75          | 88.20          | -23.45      | Peak     | 100         | 314           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

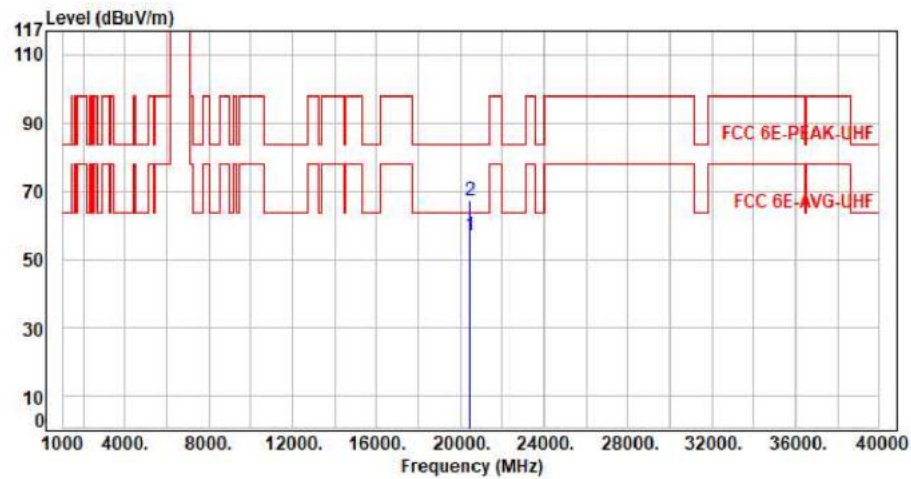


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20475.00           | 11.45          | 45.68             | 57.13             | 63.54             | -6.41          | Average  | 150            | 360              | P   |
| 2   | 20475.00           | 11.45          | 55.67             | 67.12             | 83.54             | -16.42         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

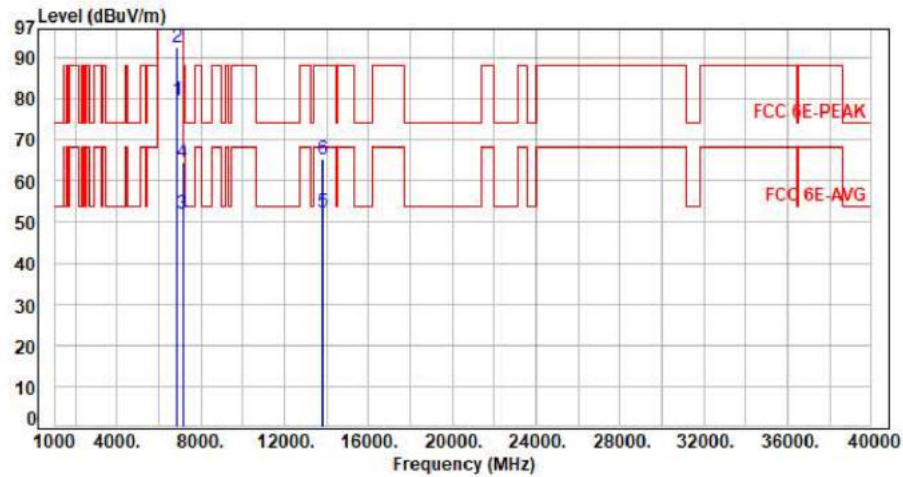


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 6895.00            | 9.59           | 70.22             | 79.81             | 200.00            | -120.19        | Average  | 249            | 284              | P   |
| 2   | 6895.00            | 9.59           | 82.94             | 92.53             | 200.00            | -107.47        | Peak     | 249            | 284              | P   |
| 3   | 7125.00            | 10.05          | 42.07             | 52.12             | 68.20             | -16.08         | Average  | 249            | 284              | P   |
| 4   | 7125.00            | 10.05          | 54.37             | 64.42             | 88.20             | -23.78         | Peak     | 249            | 284              | P   |
| 5   | 13790.00           | 22.74          | 29.61             | 52.35             | 68.20             | -15.85         | Average  | 100            | 118              | P   |
| 6   | 13790.00           | 22.74          | 42.60             | 65.34             | 88.20             | -22.86         | Peak     | 100            | 118              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

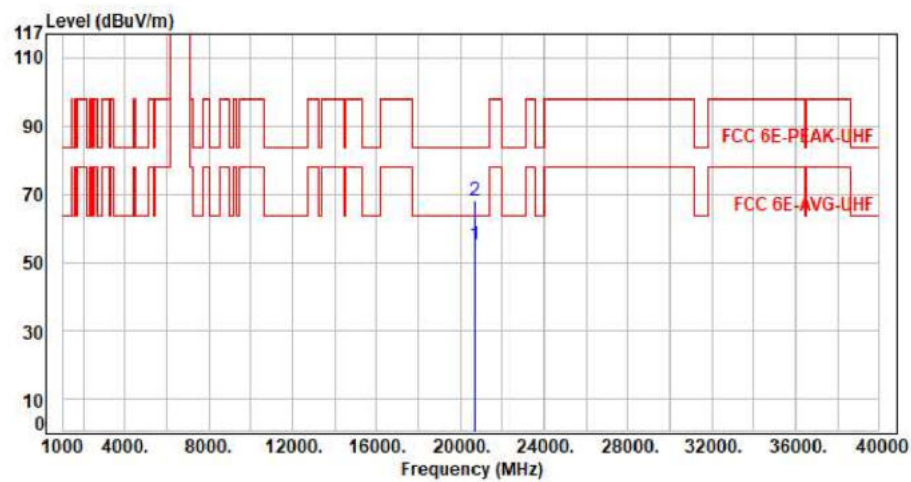

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20685.00           | 11.04          | 44.01             | 55.05             | 63.54             | -8.49          | Average  | 150            | 360              | P   |
| 2   | 20685.00           | 11.04          | 57.06             | 68.10             | 83.54             | -15.44         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

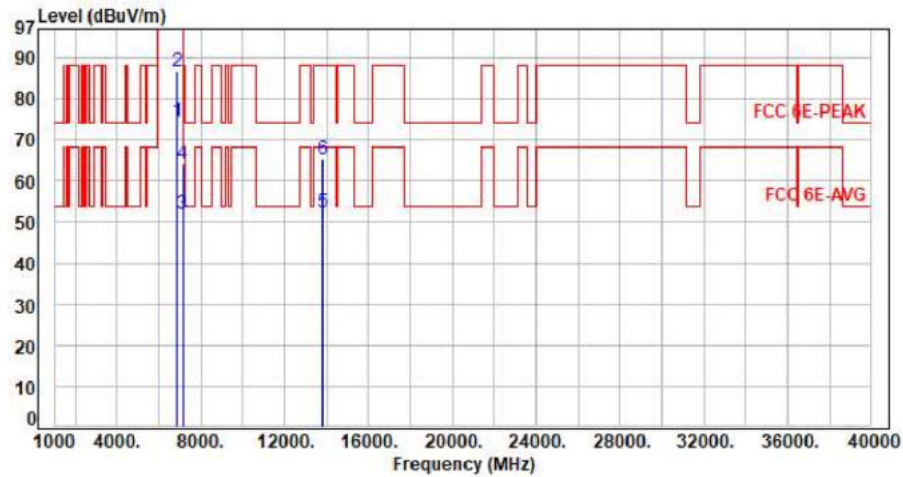


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6895.00         | 9.59        | 65.02          | 74.61          | 200.00         | -125.39     | Average  | 140         | 105           | P   |
| 2   | 6895.00         | 9.59        | 77.14          | 86.73          | 200.00         | -113.27     | Peak     | 140         | 105           | P   |
| 3   | 7125.00         | 10.05       | 41.94          | 51.99          | 68.20          | -16.21      | Average  | 140         | 105           | P   |
| 4   | 7125.00         | 10.05       | 54.30          | 64.35          | 88.20          | -23.85      | Peak     | 140         | 105           | P   |
| 5   | 13790.00        | 22.74       | 29.47          | 52.21          | 68.20          | -15.99      | Average  | 100         | 264           | P   |
| 6   | 13790.00        | 22.74       | 42.60          | 65.34          | 88.20          | -22.86      | Peak     | 100         | 264           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

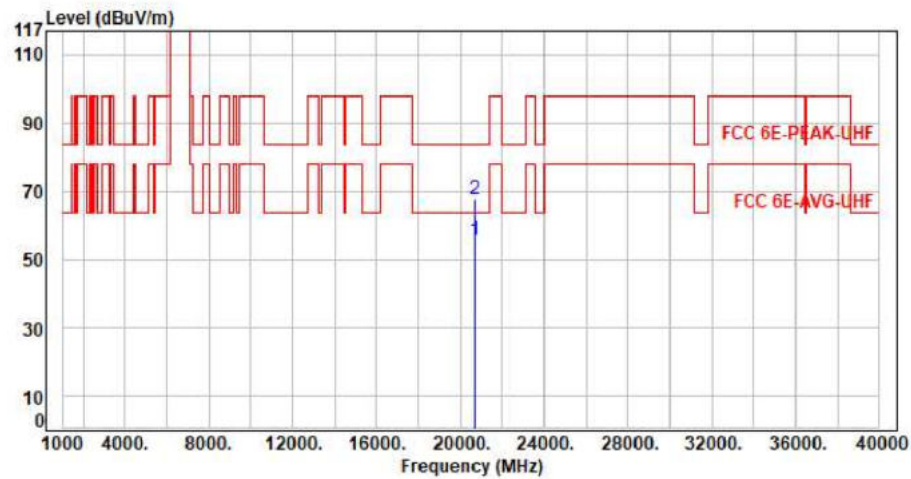


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20685.00           | 11.04          | 44.75             | 55.79             | 63.54             | -7.75          | Average  | 150            | 360              | P   |
| 2   | 20685.00           | 11.04          | 56.56             | 67.60             | 83.54             | -15.94         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

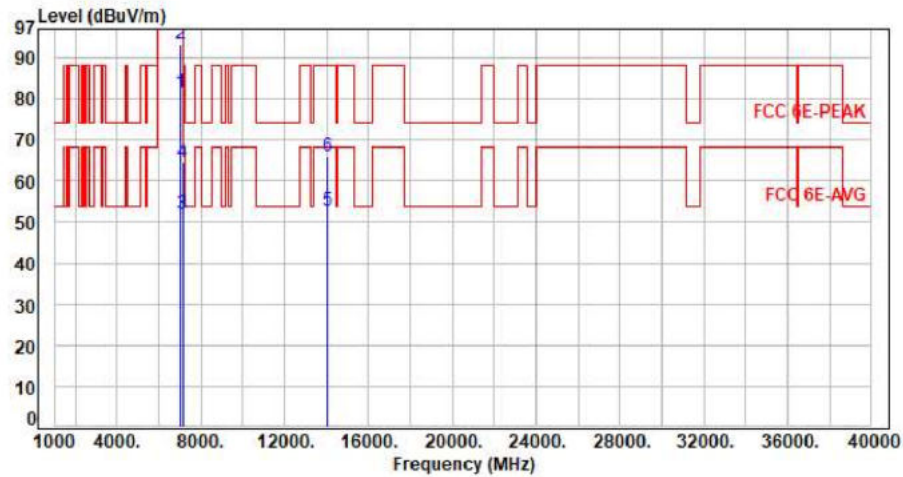


| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 7015.00         | 9.68        | 71.85          | 81.53          | 200.00         | -118.47     | Average  | 106         | 295           | P   |
| 2   | 7015.00         | 9.68        | 83.79          | 93.47          | 200.00         | -106.53     | Peak     | 106         | 295           | P   |
| 3   | 7125.00         | 10.05       | 42.10          | 52.15          | 68.20          | -16.05      | Average  | 106         | 295           | P   |
| 4   | 7125.00         | 10.05       | 54.62          | 64.67          | 88.20          | -23.53      | Peak     | 106         | 295           | P   |
| 5   | 14030.00        | 23.39       | 29.46          | 52.85          | 68.20          | -15.35      | Average  | 100         | 264           | P   |
| 6   | 14030.00        | 23.39       | 42.66          | 66.05          | 88.20          | -22.15      | Peak     | 100         | 264           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

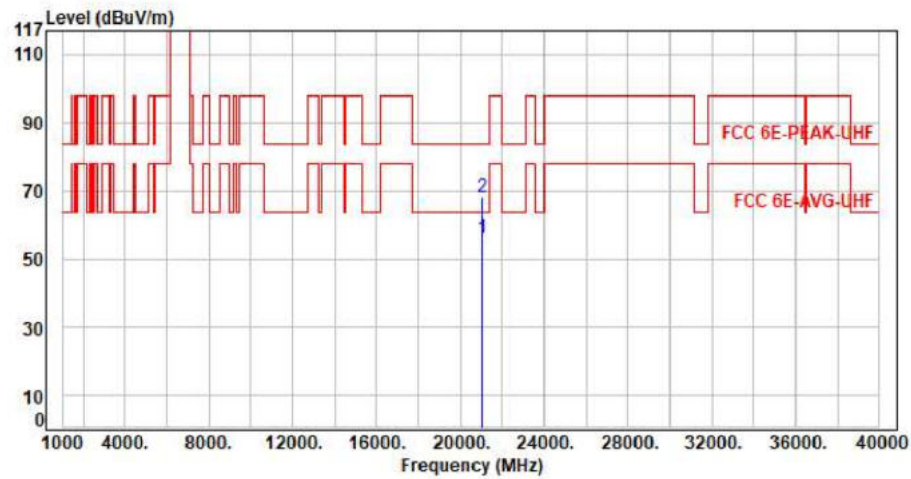


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 21045.00        | 11.50       | 44.42          | 55.92          | 63.54          | -7.62       | Average  | 150         | 360           | P   |
| 2   | 21045.00        | 11.50       | 56.78          | 68.28          | 83.54          | -15.26      | Peak     | 150         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

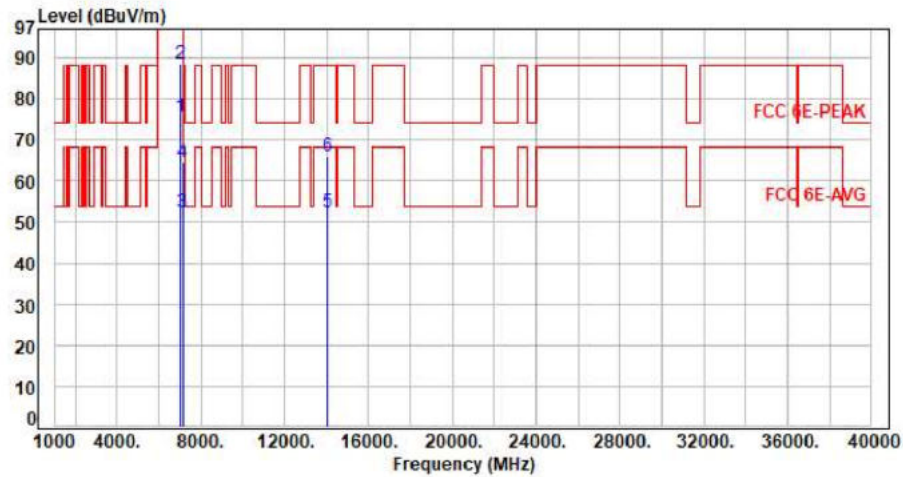


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 7015.00            | 9.68           | 65.76             | 75.44             | 200.00            | -124.56        | Average  | 100            | 105              | P   |
| 2   | 7015.00            | 9.68           | 78.71             | 88.39             | 200.00            | -111.61        | Peak     | 100            | 105              | P   |
| 3   | 7125.00            | 10.05          | 42.17             | 52.22             | 68.20             | -15.98         | Average  | 100            | 105              | P   |
| 4   | 7125.00            | 10.05          | 54.65             | 64.70             | 88.20             | -23.50         | Peak     | 100            | 105              | P   |
| 5   | 14030.00           | 23.39          | 29.11             | 52.50             | 68.20             | -15.70         | Average  | 100            | 154              | P   |
| 6   | 14030.00           | 23.39          | 42.61             | 66.00             | 88.20             | -22.20         | Peak     | 100            | 154              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH213 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

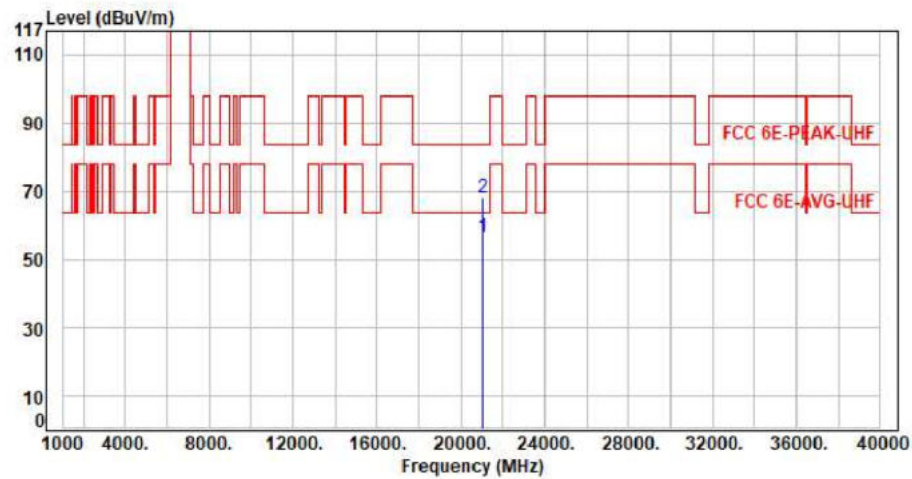


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 21045.00           | 11.50          | 44.98             | 56.48             | 63.54             | -7.06          | Average  | 150            | 360              | P   |
| 2   | 21045.00           | 11.50          | 56.48             | 67.98             | 83.54             | -15.56         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

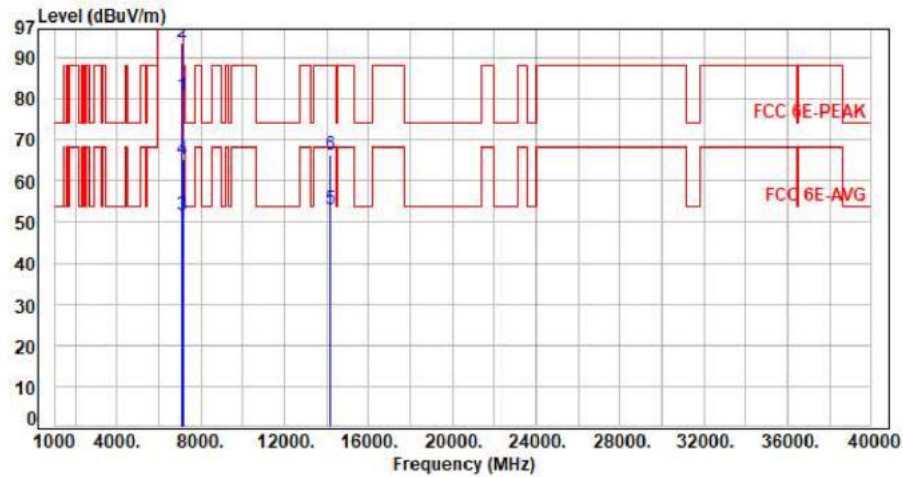


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 7095.00         | 9.96        | 70.95          | 80.91          | 200.00         | -119.09     | Average  | 100         | 312           | P   |
| 2   | 7095.00         | 9.96        | 83.87          | 93.83          | 200.00         | -106.17     | Peak     | 100         | 312           | P   |
| 3   | 7125.00         | 10.05       | 41.69          | 51.74          | 68.20          | -16.46      | Average  | 100         | 312           | P   |
| 4   | 7125.00         | 10.05       | 55.22          | 65.27          | 88.20          | -22.93      | Peak     | 100         | 312           | P   |
| 5   | 14190.00        | 23.79       | 29.33          | 53.12          | 68.20          | -15.08      | Average  | 100         | 168           | P   |
| 6   | 14190.00        | 23.79       | 42.61          | 66.40          | 88.20          | -21.80      | Peak     | 100         | 168           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

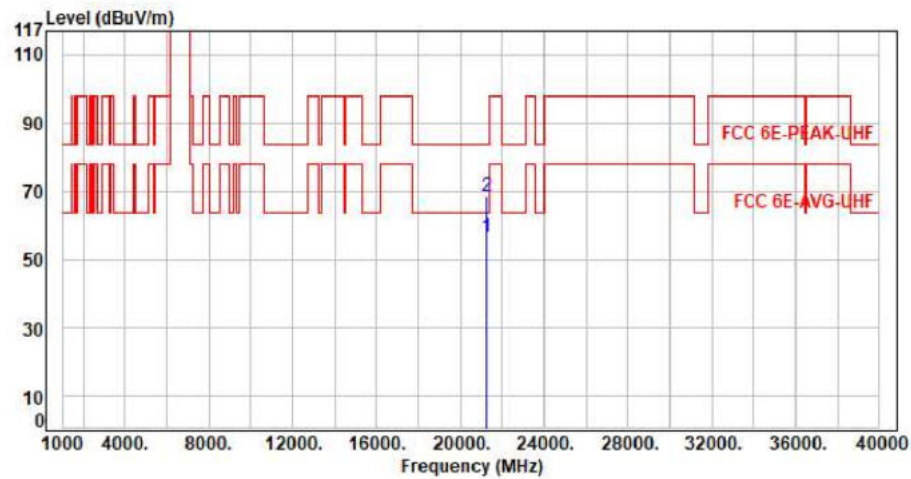


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 21285.00           | 11.80          | 44.59             | 56.39             | 63.54             | -7.15          | Average  | 150            | 360              | P   |
| 2   | 21285.00           | 11.80          | 56.93             | 68.73             | 83.54             | -14.81         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

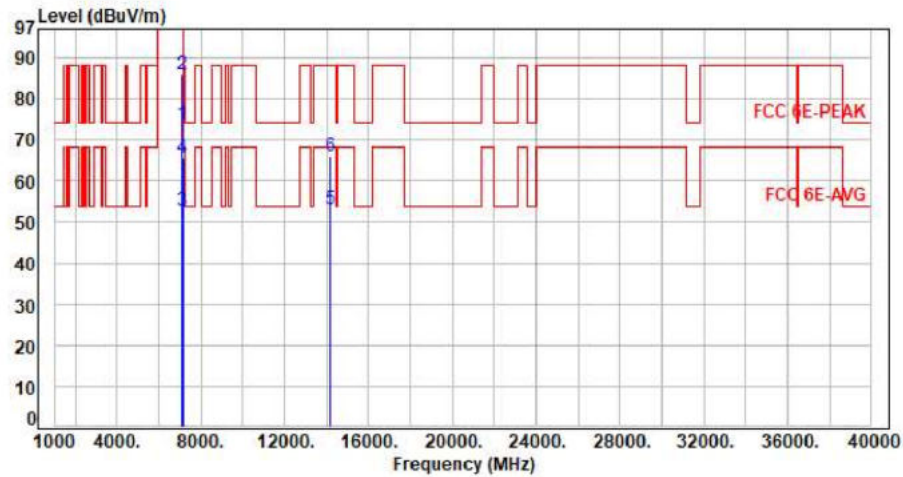


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 7095.00            | 9.96           | 63.75             | 73.71             | 200.00            | -126.29        | Average  | 109            | 108              | P   |
| 2   | 7095.00            | 9.96           | 75.95             | 85.91             | 200.00            | -114.09        | Peak     | 109            | 108              | P   |
| 3   | 7125.00            | 10.05          | 42.67             | 52.72             | 68.20             | -15.48         | Average  | 109            | 108              | P   |
| 4   | 7125.00            | 10.05          | 55.67             | 65.72             | 88.20             | -22.48         | Peak     | 109            | 108              | P   |
| 5   | 14190.00           | 23.79          | 29.48             | 53.27             | 68.20             | -14.93         | Average  | 100            | 122              | P   |
| 6   | 14190.00           | 23.79          | 42.18             | 65.97             | 88.20             | -22.23         | Peak     | 100            | 122              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH229 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

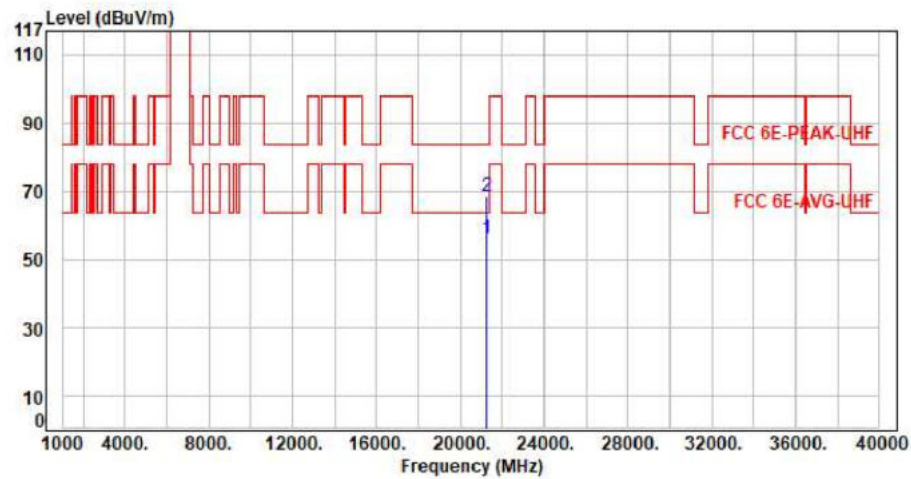

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 21285.00           | 11.80          | 44.23             | 56.03             | 63.54             | -7.51          | Average  | 150            | 360              | P   |
| 2   | 21285.00           | 11.80          | 56.75             | 68.55             | 83.54             | -14.99         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

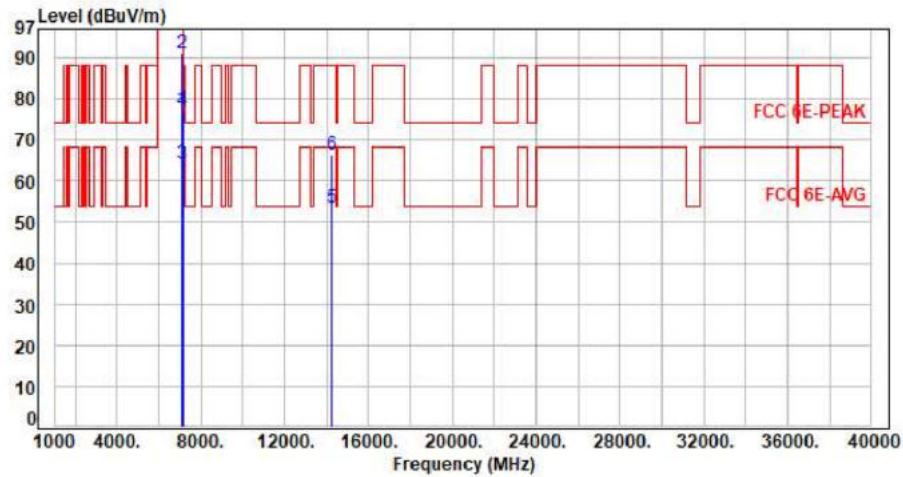


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 7115.00            | 10.02          | 67.39             | 77.41             | 200.00            | -122.59        | Average  | 110            | 68               | P   |
| 2   | 7115.00            | 10.02          | 81.17             | 91.19             | 200.00            | -108.81        | Peak     | 110            | 68               | P   |
| 3   | 7125.00            | 10.05          | 54.04             | 64.09             | 68.20             | -4.11          | Average  | 110            | 68               | P   |
| 4   | 7125.00            | 10.05          | 67.07             | 77.12             | 88.20             | -11.08         | Peak     | 110            | 68               | P   |
| 5   | 14230.00           | 23.94          | 29.44             | 53.38             | 68.20             | -14.82         | Average  | 100            | 312              | P   |
| 6   | 14230.00           | 23.94          | 42.49             | 66.43             | 88.20             | -21.77         | Peak     | 100            | 312              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

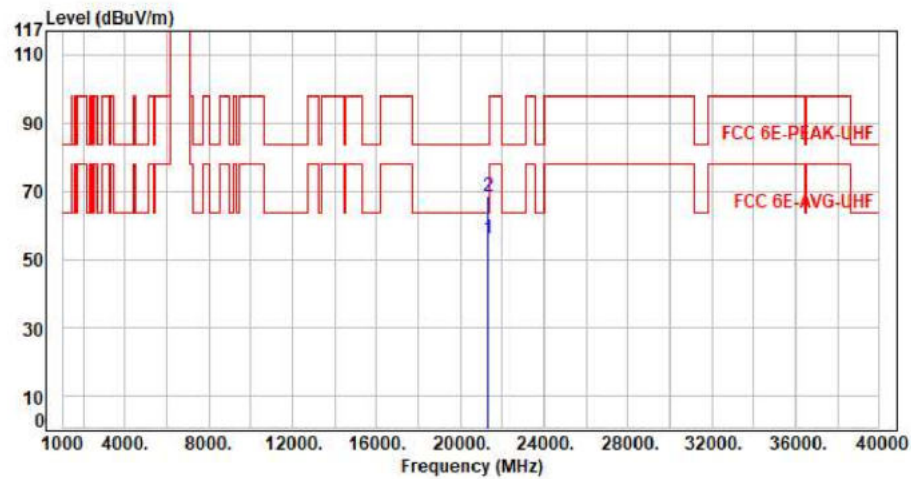

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 21345.00           | 11.36          | 44.72             | 56.08             | 63.54             | -7.46          | Average  | 150            | 360              | P   |
| 2   | 21345.00           | 11.36          | 57.04             | 68.40             | 83.54             | -15.14         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

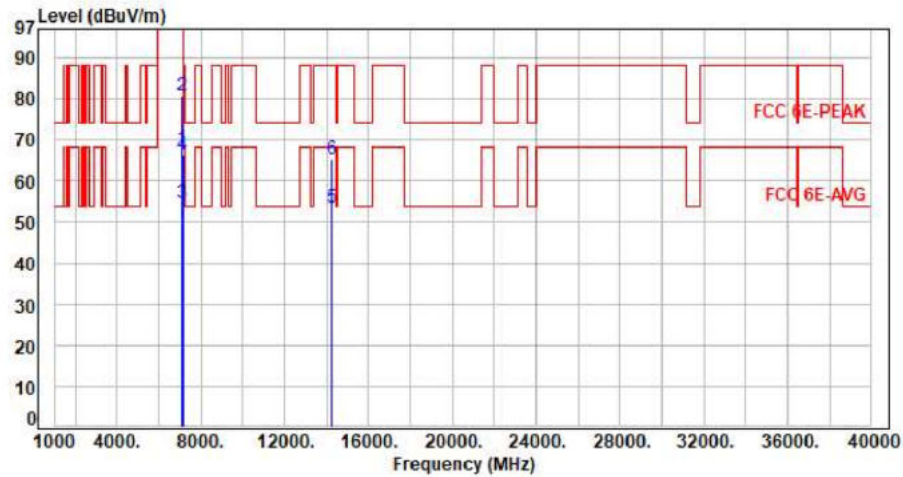


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 7115.00            | 10.02          | 58.02             | 68.04             | 200.00            | -131.96        | Average  | 100            | 184              | P   |
| 2   | 7115.00            | 10.02          | 70.91             | 80.93             | 200.00            | -119.07        | Peak     | 100            | 184              | P   |
| 3   | 7125.00            | 10.05          | 44.49             | 54.54             | 68.20             | -13.66         | Average  | 100            | 184              | P   |
| 4   | 7125.00            | 10.05          | 56.43             | 66.48             | 88.20             | -21.72         | Peak     | 100            | 184              | P   |
| 5   | 14230.00           | 23.94          | 29.67             | 53.61             | 68.20             | -14.59         | Average  | 100            | 152              | P   |
| 6   | 14230.00           | 23.94          | 41.29             | 65.23             | 88.20             | -22.97         | Peak     | 100            | 152              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x20 CH233 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

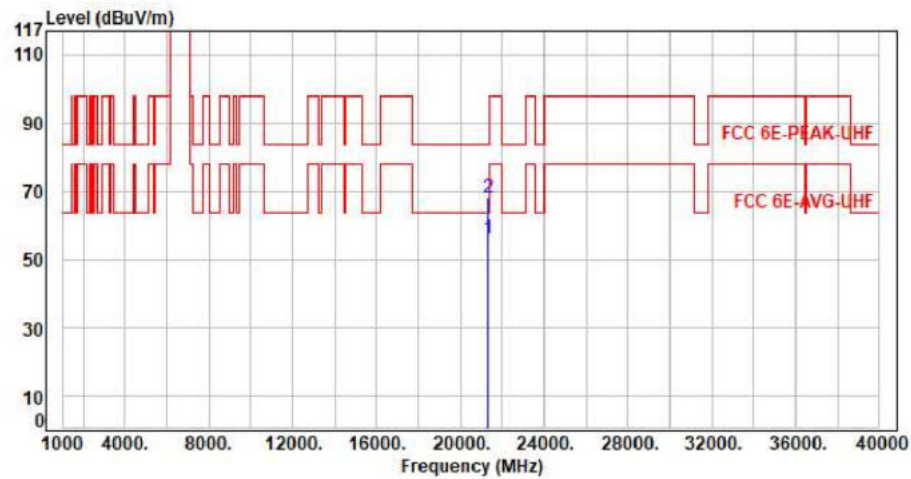


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 21345.00           | 11.36          | 44.62             | 55.98             | 63.54             | -7.56          | Average  | 150            | 360              | P   |
| 2   | 21345.00           | 11.36          | 56.73             | 68.09             | 83.54             | -15.45         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

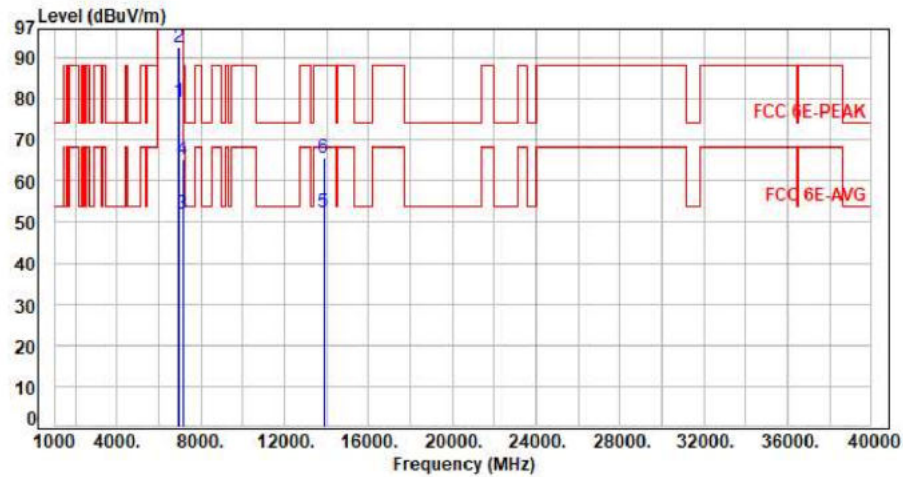


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBUV) | Level<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 6925.00            | 9.61           | 69.66             | 79.27             | 200.00            | -120.73        | Average  | 242            | 293              | P   |
| 2   | 6925.00            | 9.61           | 82.96             | 92.57             | 200.00            | -107.43        | Peak     | 242            | 293              | P   |
| 3   | 7125.00            | 10.05          | 41.85             | 51.90             | 68.20             | -16.30         | Average  | 242            | 293              | P   |
| 4   | 7125.00            | 10.05          | 55.28             | 65.33             | 88.20             | -22.87         | Peak     | 242            | 293              | P   |
| 5   | 13850.00           | 22.86          | 29.44             | 52.30             | 68.20             | -15.90         | Average  | 100            | 264              | P   |
| 6   | 13850.00           | 22.86          | 42.67             | 65.53             | 88.20             | -22.67         | Peak     | 100            | 264              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

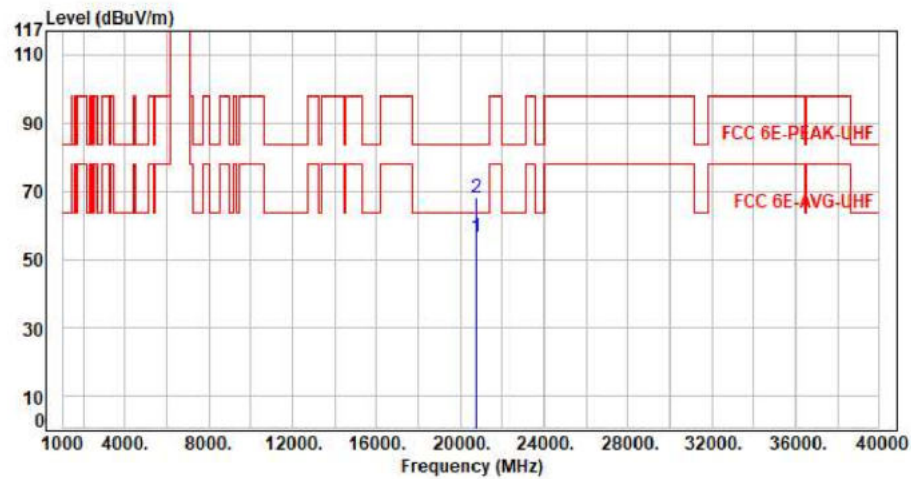


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20775.00           | 11.39          | 45.25             | 56.64             | 63.54             | -6.90          | Average  | 150            | 360              | P   |
| 2   | 20775.00           | 11.39          | 56.61             | 68.00             | 83.54             | -15.54         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

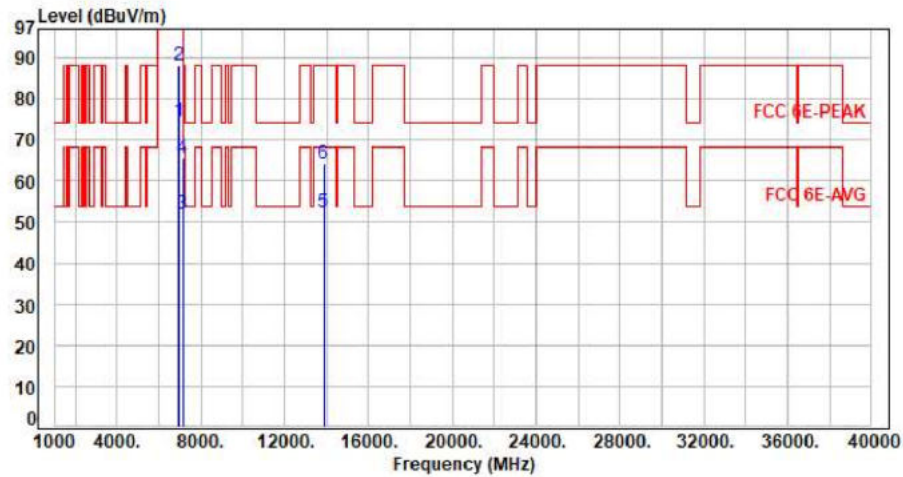


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6925.00         | 9.61        | 64.85          | 74.46          | 200.00         | -125.54     | Average  | 130         | 105           | P   |
| 2   | 6925.00         | 9.61        | 78.42          | 88.03          | 200.00         | -111.97     | Peak     | 130         | 105           | P   |
| 3   | 7125.00         | 10.05       | 42.02          | 52.07          | 68.20          | -16.13      | Average  | 130         | 105           | P   |
| 4   | 7125.00         | 10.05       | 55.53          | 65.58          | 88.20          | -22.62      | Peak     | 130         | 105           | P   |
| 5   | 13850.00        | 22.86       | 29.44          | 52.30          | 68.20          | -15.90      | Average  | 100         | 314           | P   |
| 6   | 13850.00        | 22.86       | 41.33          | 64.19          | 88.20          | -24.01      | Peak     | 100         | 314           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Horizontal

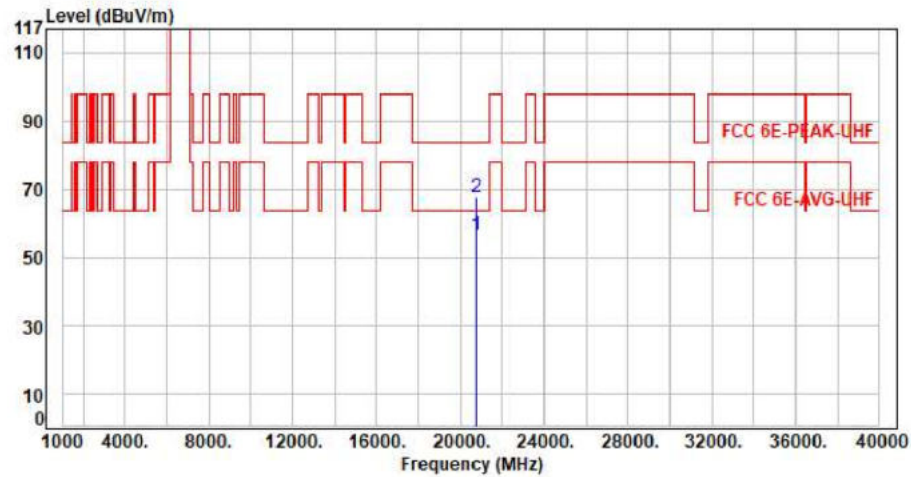


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 20775.00           | 11.39          | 45.07             | 56.46             | 63.54             | -7.08          | Average  | 150            | 360              | P   |
| 2   | 20775.00           | 11.39          | 56.41             | 67.80             | 83.54             | -15.74         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

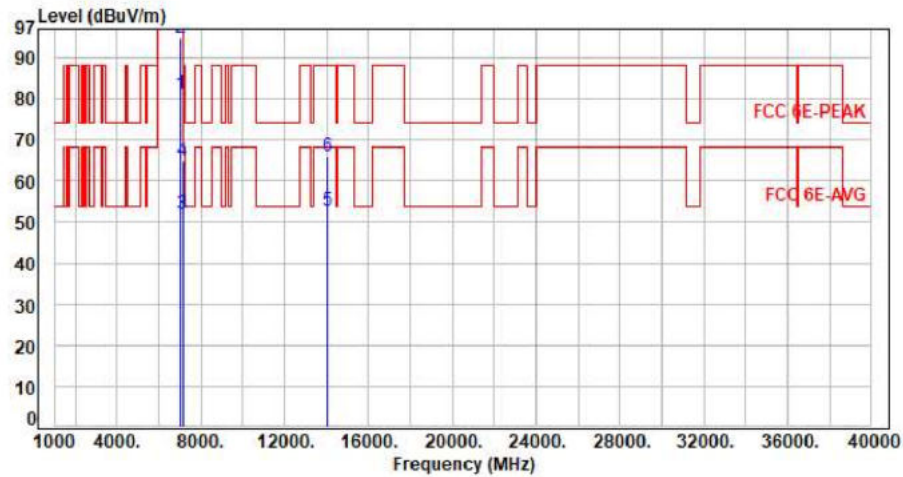


| No. | Frequency (MHz) | Factor (dB) | Reading (dBUV) | Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 7005.00         | 9.65        | 71.65          | 81.30          | 200.00         | -118.70     | Average  | 255         | 295           | P   |
| 2   | 7005.00         | 9.65        | 85.22          | 94.87          | 200.00         | -105.13     | Peak     | 255         | 295           | P   |
| 3   | 7125.00         | 10.05       | 41.89          | 51.94          | 68.20          | -16.26      | Average  | 255         | 295           | P   |
| 4   | 7125.00         | 10.05       | 54.88          | 64.93          | 88.20          | -23.27      | Peak     | 255         | 295           | P   |
| 5   | 14010.00        | 23.32       | 29.44          | 52.76          | 68.20          | -15.44      | Average  | 100         | 316           | P   |
| 6   | 14010.00        | 23.32       | 42.67          | 65.99          | 88.20          | -22.21      | Peak     | 100         | 316           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0  
Voltage : From Adapter(AC120V/60Hz)  
Pol : Vertical

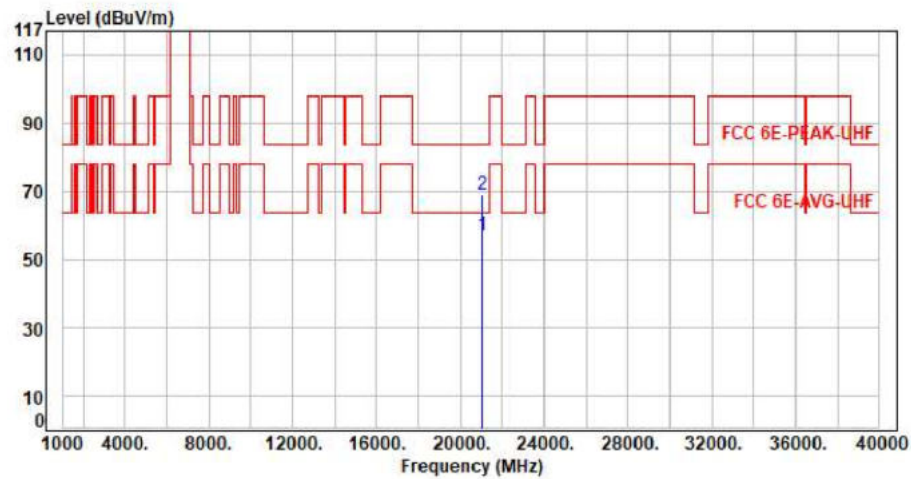

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 21015.00           | 11.48          | 45.42             | 56.90             | 63.54             | -6.64          | Average  | 150            | 360              | P   |
| 2   | 21015.00           | 11.48          | 57.60             | 69.08             | 83.54             | -14.46         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor