




For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

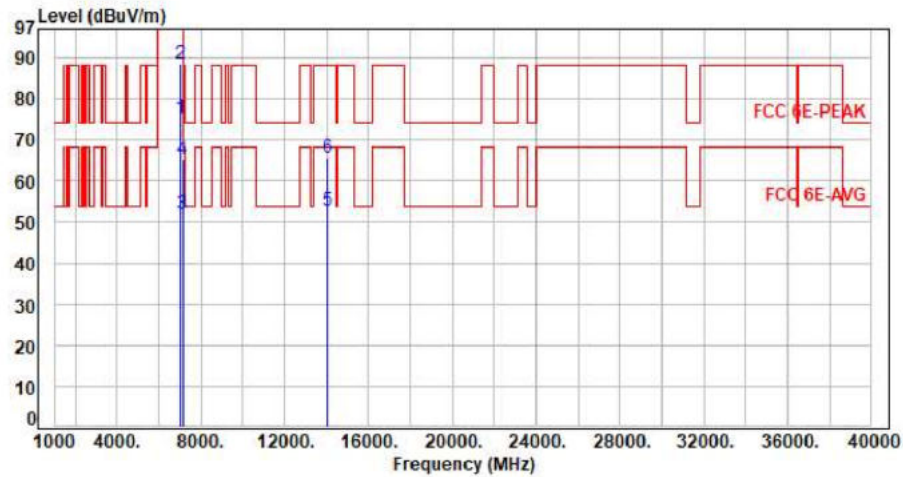


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	65.61	75.26	200.00	-124.74	Average	133	106	P
2	7005.00	9.65	78.95	88.60	200.00	-111.40	Peak	133	106	P
3	7125.00	10.05	41.90	51.95	68.20	-16.25	Average	133	106	P
4	7125.00	10.05	55.32	65.37	88.20	-22.83	Peak	133	106	P
5	14010.00	23.32	29.47	52.79	68.20	-15.41	Average	100	165	P
6	14010.00	23.32	42.16	65.48	88.20	-22.72	Peak	100	165	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

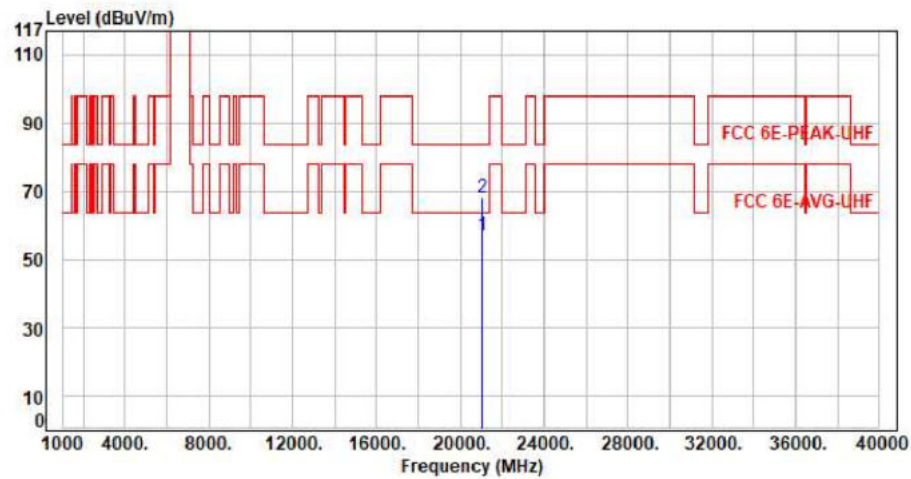


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.27	56.75	63.54	-6.79	Average	150	360	P
2	21015.00	11.48	56.41	67.89	83.54	-15.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

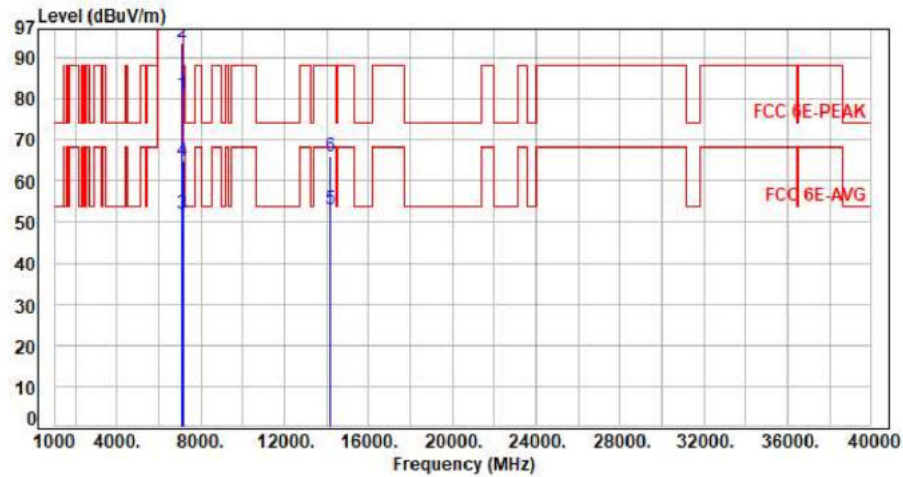


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	71.41	81.32	200.00	-118.68	Average	279	287	P
2	7085.00	9.91	83.93	93.84	200.00	-106.16	Peak	279	287	P
3	7125.00	10.05	42.12	52.17	68.20	-16.03	Average	279	287	P
4	7125.00	10.05	54.94	64.99	88.20	-23.21	Peak	279	287	P
5	14170.00	23.72	29.42	53.14	68.20	-15.06	Average	100	118	P
6	14170.00	23.72	42.16	65.88	88.20	-22.32	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

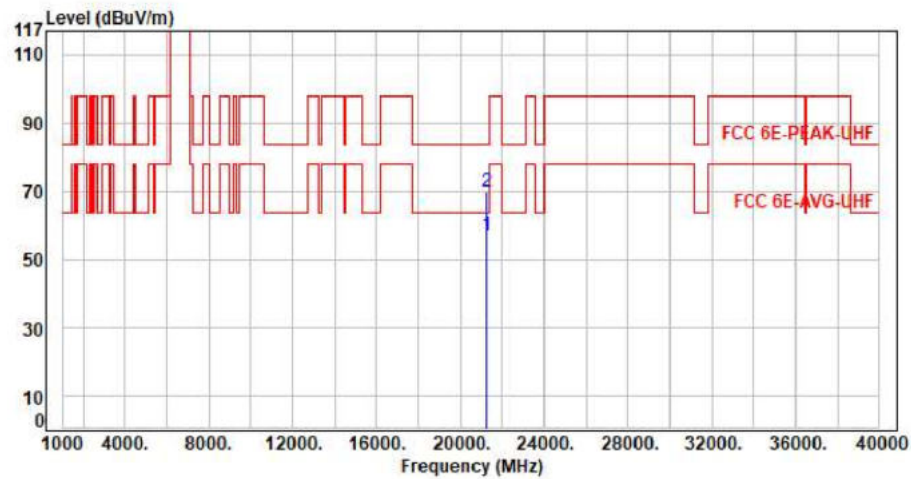


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.05	56.89	63.54	-6.65	Average	150	360	P
2	21255.00	11.84	57.79	69.63	83.54	-13.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

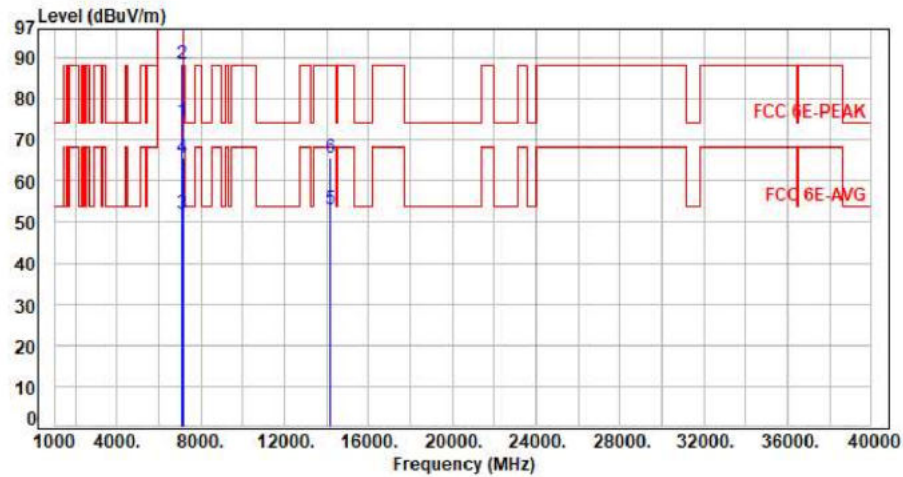


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	64.64	74.55	200.00	-125.45	Average	105	106	P
2	7085.00	9.91	78.46	88.37	200.00	-111.63	Peak	105	106	P
3	7125.00	10.05	42.05	52.10	68.20	-16.10	Average	105	106	P
4	7125.00	10.05	55.75	65.80	88.20	-22.40	Peak	105	106	P
5	14170.00	23.72	29.44	53.16	68.20	-15.04	Average	100	199	P
6	14170.00	23.72	42.11	65.83	88.20	-22.37	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

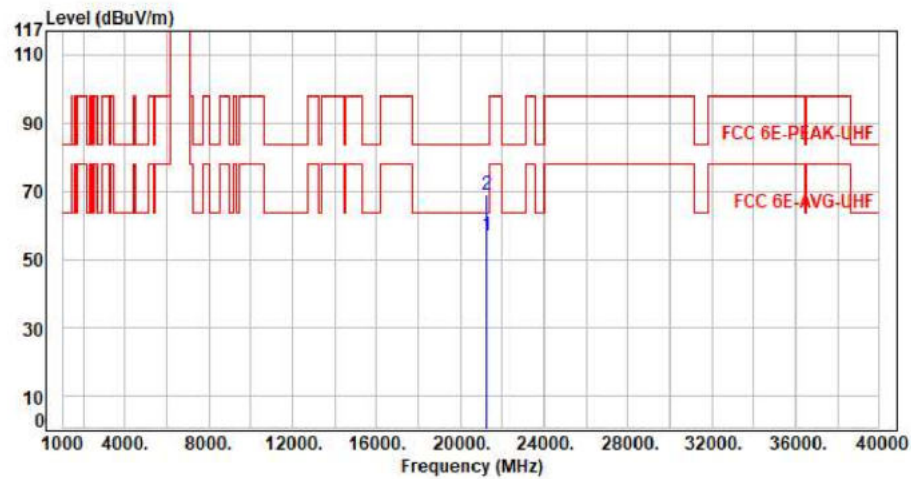


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	44.98	56.82	63.54	-6.72	Average	150	360	P
2	21255.00	11.84	57.31	69.15	83.54	-14.39	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

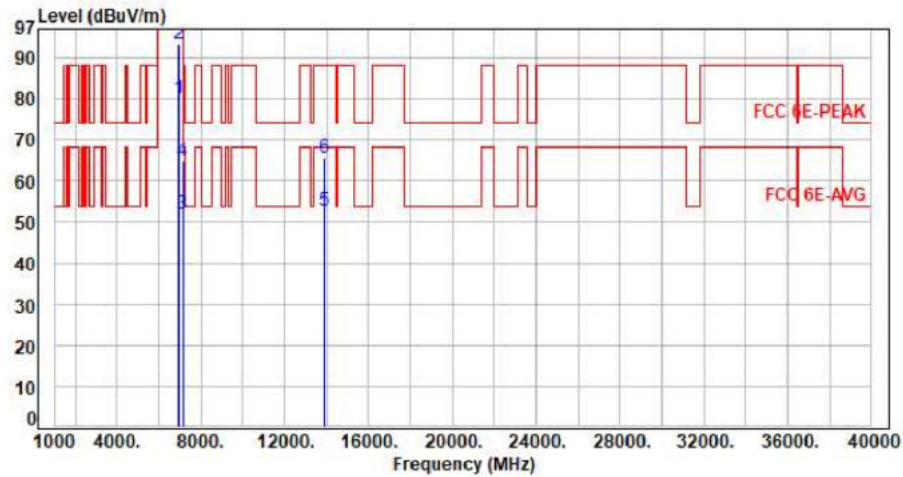


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	70.37	79.99	200.00	-120.01	Average	260	296	P
2	6945.00	9.62	83.72	93.34	200.00	-106.66	Peak	260	296	P
3	7125.00	10.05	41.82	51.87	68.20	-16.33	Average	260	296	P
4	7125.00	10.05	54.97	65.02	88.20	-23.18	Peak	260	296	P
5	13890.00	22.95	29.64	52.59	68.20	-15.61	Average	100	324	P
6	13890.00	22.95	42.61	65.56	88.20	-22.64	Peak	100	324	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

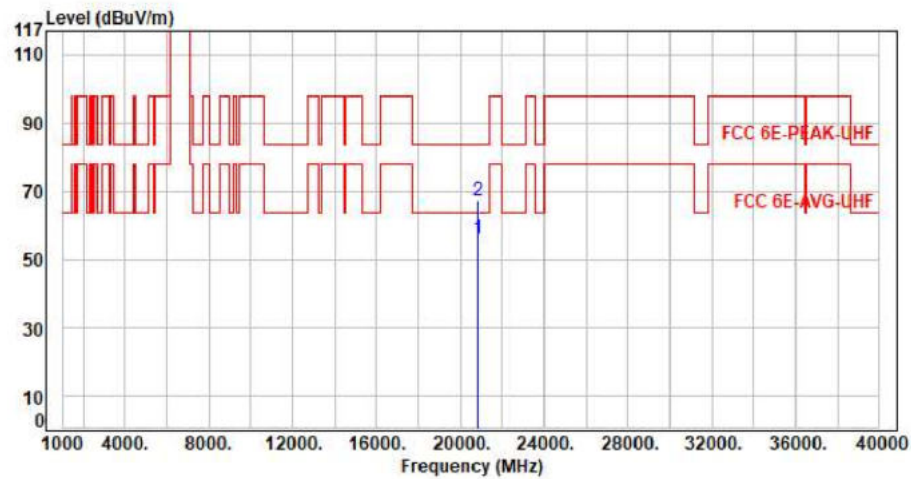


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	44.81	56.21	63.54	-7.33	Average	150	360	P
2	20835.00	11.40	55.55	66.95	83.54	-16.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

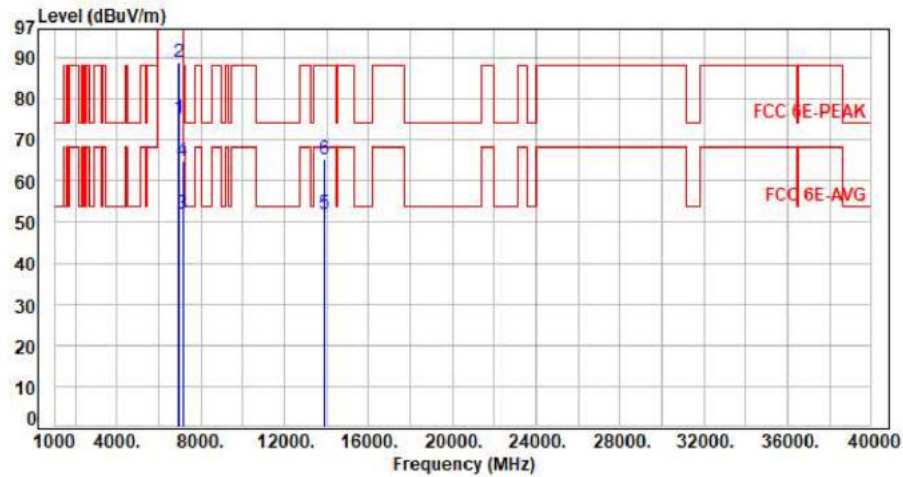


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	65.78	75.40	200.00	-124.60	Average	130	104	P
2	6945.00	9.62	79.18	88.80	200.00	-111.20	Peak	130	104	P
3	7125.00	10.05	41.94	51.99	68.20	-16.21	Average	130	104	P
4	7125.00	10.05	54.97	65.02	88.20	-23.18	Peak	130	104	P
5	13890.00	22.95	29.09	52.04	68.20	-16.16	Average	100	114	P
6	13890.00	22.95	42.19	65.14	88.20	-23.06	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

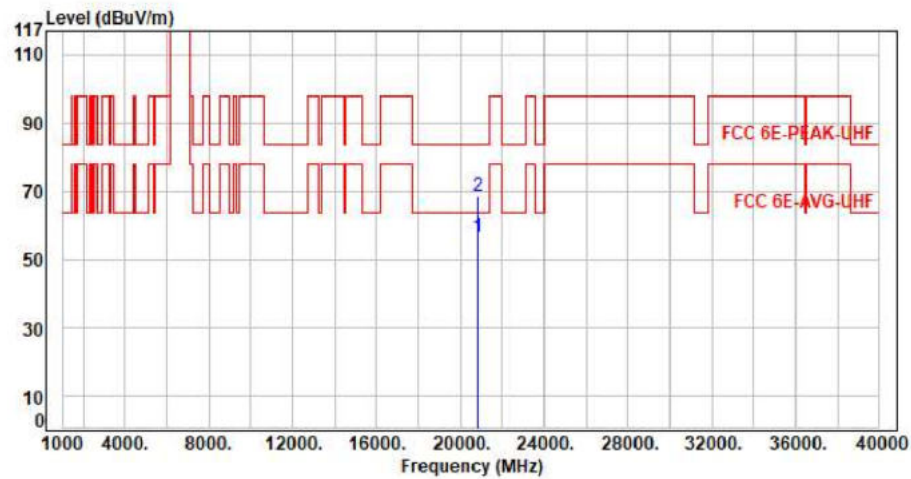


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.08	56.48	63.54	-7.06	Average	150	360	P
2	20835.00	11.40	57.14	68.54	83.54	-15.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

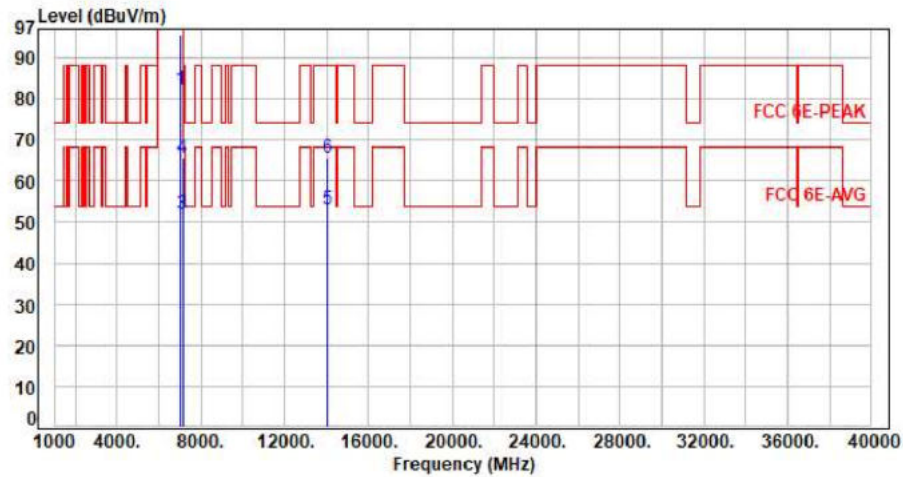


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	72.60	82.31	200.00	-117.69	Average	267	295	P
2	7025.00	9.71	85.66	95.37	200.00	-104.63	Peak	267	295	P
3	7125.00	10.05	41.97	52.02	68.20	-16.18	Average	267	295	P
4	7125.00	10.05	55.76	65.81	88.20	-22.39	Peak	267	295	P
5	14050.00	23.47	29.46	52.93	68.20	-15.27	Average	100	162	P
6	14050.00	23.47	42.19	65.66	88.20	-22.54	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

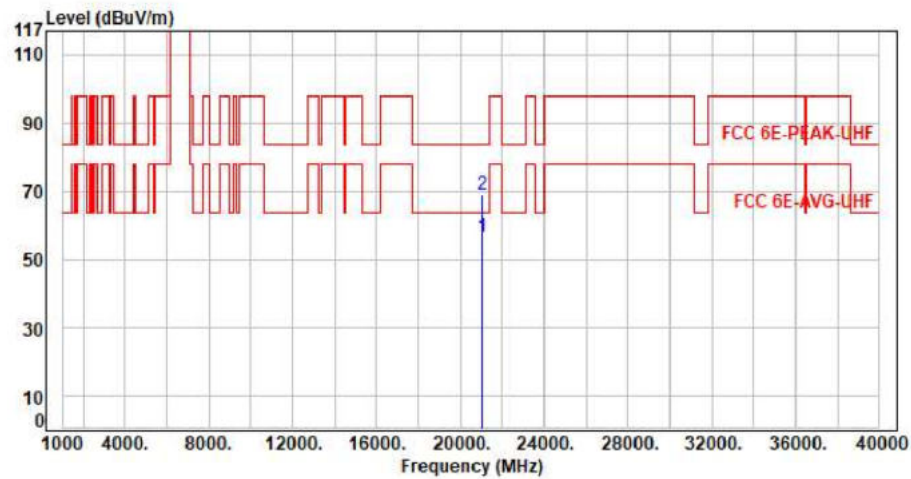


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.16	56.68	63.54	-6.86	Average	150	360	P
2	21075.00	11.52	57.51	69.03	83.54	-14.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

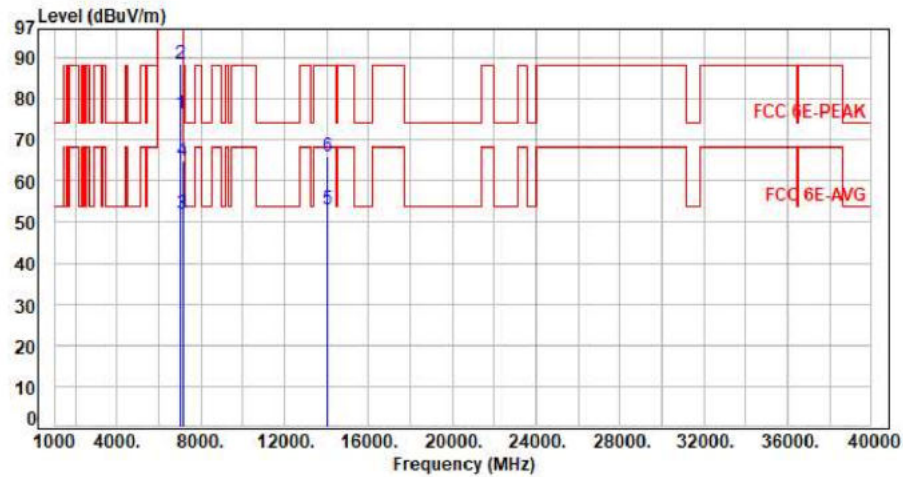


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	66.59	76.30	200.00	-123.70	Average	120	105	P
2	7025.00	9.71	78.74	88.45	200.00	-111.55	Peak	120	105	P
3	7125.00	10.05	41.85	51.90	68.20	-16.30	Average	120	105	P
4	7125.00	10.05	54.91	64.96	88.20	-23.24	Peak	120	105	P
5	14050.00	23.47	29.64	53.11	68.20	-15.09	Average	100	162	P
6	14050.00	23.47	42.61	66.08	88.20	-22.12	Peak	100	162	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

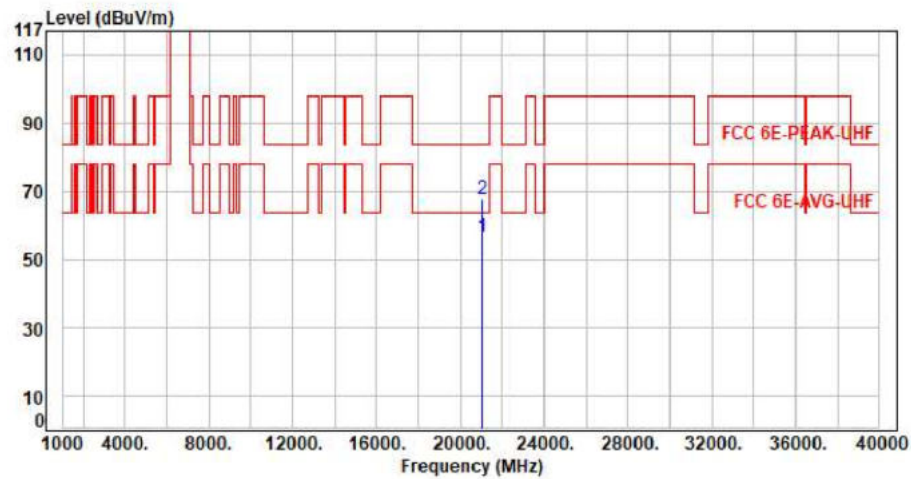


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.19	56.71	63.54	-6.83	Average	150	360	P
2	21075.00	11.52	56.08	67.60	83.54	-15.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

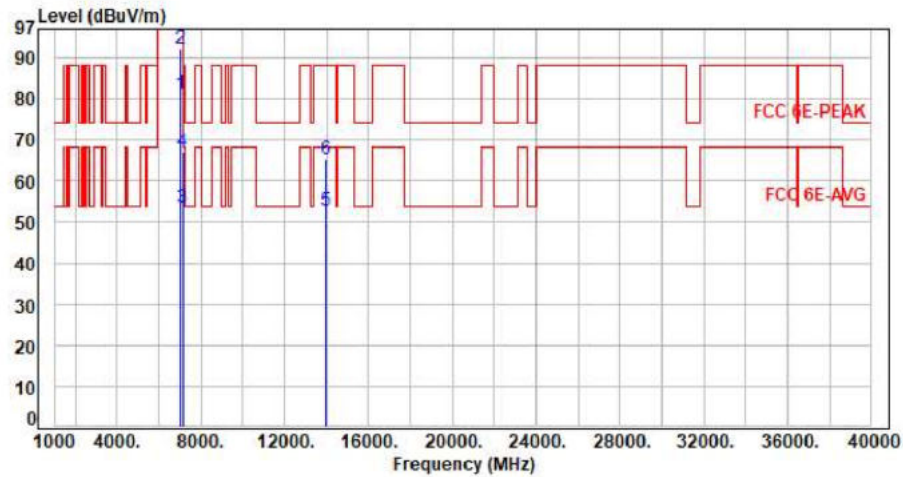


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	71.35	80.98	200.00	-119.02	Average	276	295	P
2	6985.00	9.63	82.47	92.10	200.00	-107.90	Peak	276	295	P
3	7125.00	10.05	43.32	53.37	68.20	-14.83	Average	276	295	P
4	7125.00	10.05	57.20	67.25	88.20	-20.95	Peak	276	295	P
5	13970.00	23.15	29.63	52.78	68.20	-15.42	Average	100	264	P
6	13970.00	23.15	42.17	65.32	88.20	-22.88	Peak	100	264	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

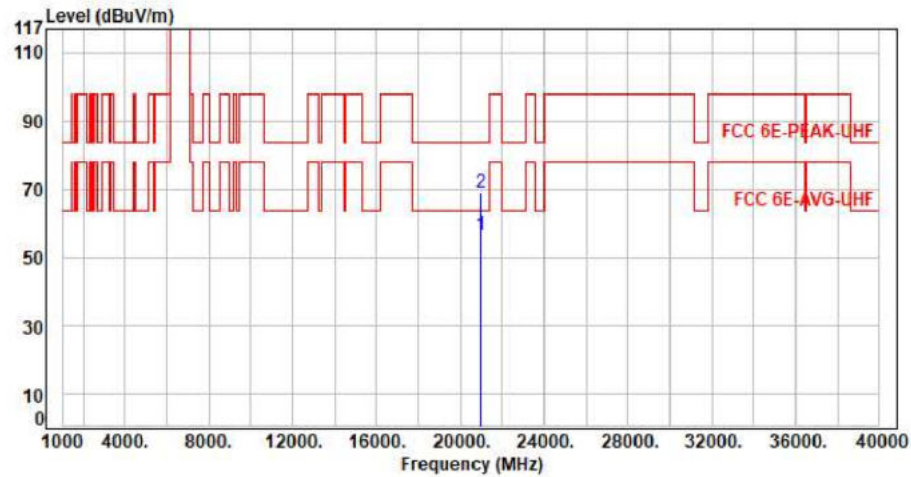


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.01	56.49	63.54	-7.05	Average	150	360	P
2	20955.00	11.48	57.43	68.91	83.54	-14.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

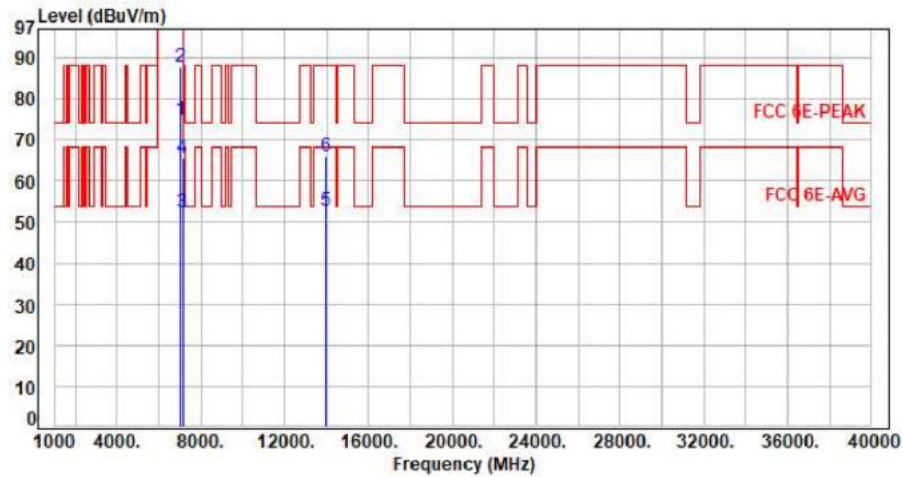


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	65.14	74.77	200.00	-125.23	Average	129	105	P
2	6985.00	9.63	78.15	87.78	200.00	-112.22	Peak	129	105	P
3	7125.00	10.05	42.18	52.23	68.20	-15.97	Average	129	105	P
4	7125.00	10.05	55.47	65.52	88.20	-22.68	Peak	129	105	P
5	13970.00	23.15	29.67	52.82	68.20	-15.38	Average	100	32	P
6	13970.00	23.15	42.96	66.11	88.20	-22.09	Peak	100	32	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

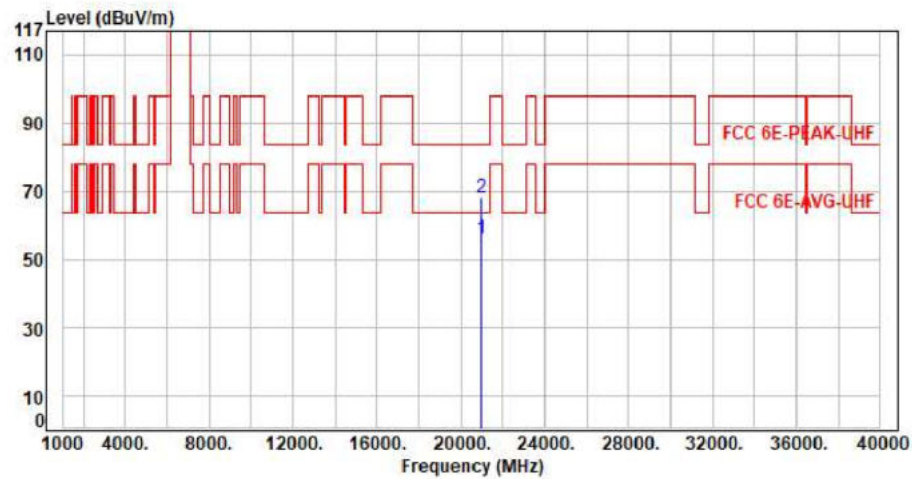


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.67	56.15	63.54	-7.39	Average	150	360	P
2	20955.00	11.48	56.55	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

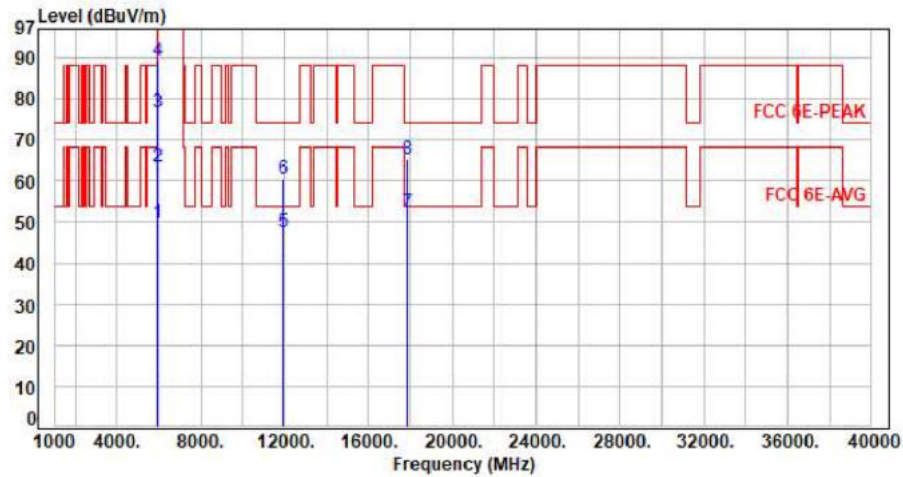


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.10	49.76	68.20	-18.44	Average	100	66	P
2	5925.00	7.66	55.87	63.53	88.20	-24.67	Peak	100	66	P
3	5955.00	7.68	68.95	76.63	200.00	-123.37	Average	100	66	P
4	5955.00	7.68	81.52	89.20	200.00	-110.80	Peak	100	66	P
5	11910.00	18.06	29.37	47.43	54.00	-6.57	Average	100	195	P
6	11910.00	18.06	42.56	60.62	74.00	-13.38	Peak	100	195	P
7	17865.00	27.77	24.53	52.30	54.00	-1.70	Average	100	138	P
8	17865.00	27.77	37.58	65.35	74.00	-8.65	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

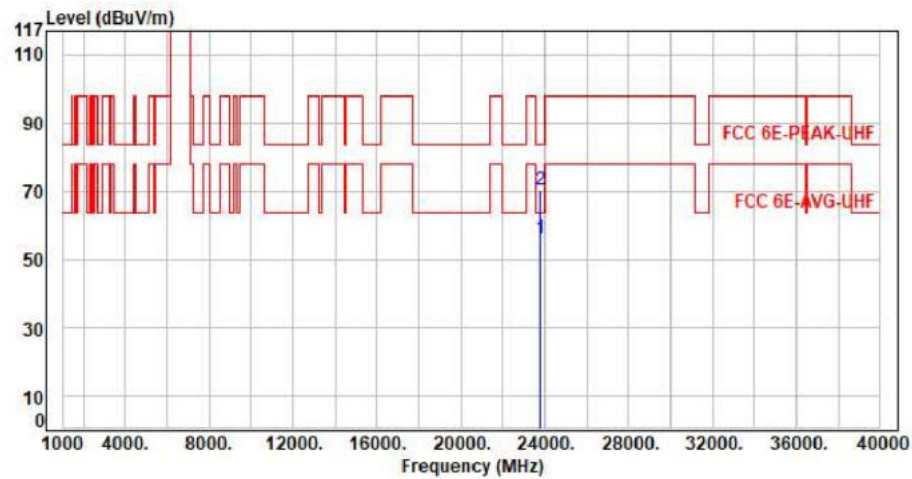


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.87	56.06	63.54	-7.48	Average	150	360	P
2	23820.00	11.19	58.96	70.15	83.54	-13.39	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

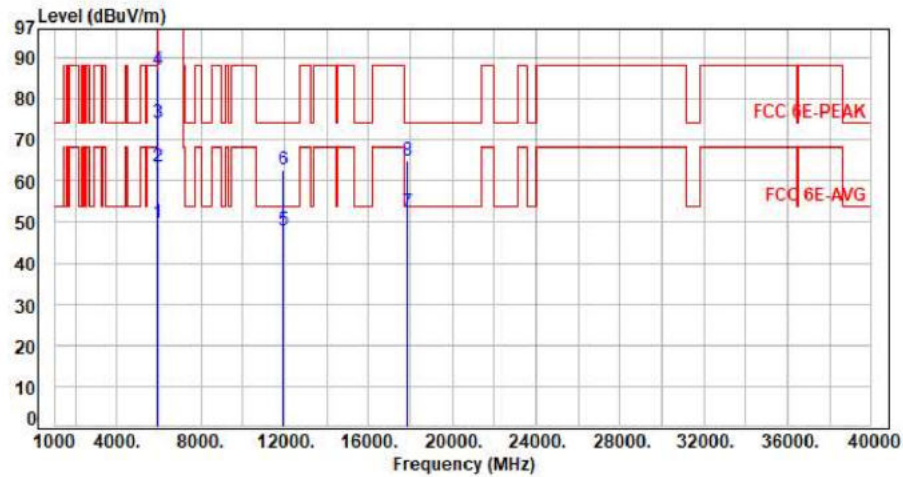

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.07	49.73	68.20	-18.47	Average	113	274	P
2	5925.00	7.66	55.89	63.55	88.20	-24.65	Peak	113	274	P
3	5955.00	7.68	66.50	74.18	200.00	-125.82	Average	113	274	P
4	5955.00	7.68	79.49	87.17	200.00	-112.83	Peak	113	274	P
5	11910.00	18.06	29.73	47.79	54.00	-6.21	Average	100	256	P
6	11910.00	18.06	44.67	62.73	74.00	-11.27	Peak	100	256	P
7	17865.00	27.77	24.57	52.34	54.00	-1.66	Average	100	151	P
8	17865.00	27.77	37.28	65.05	74.00	-8.95	Peak	100	151	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

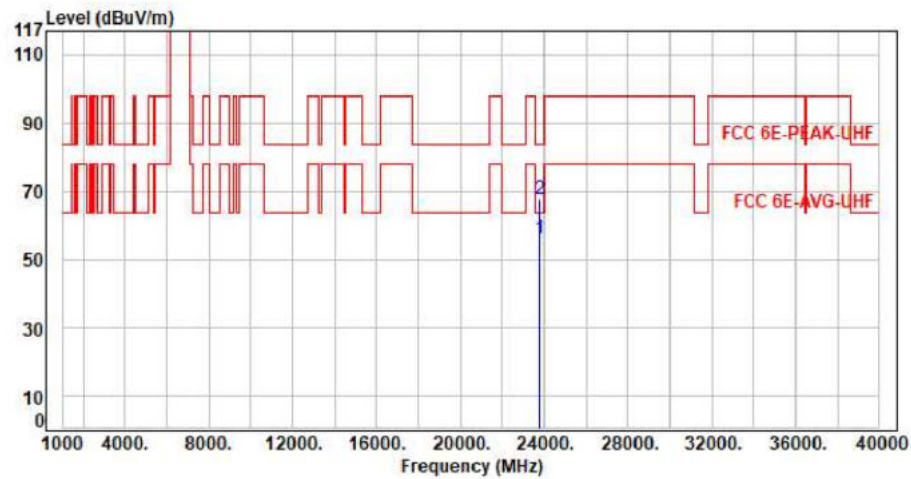


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.88	56.07	63.54	-7.47	Average	150	360	P
2	23820.00	11.19	56.24	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

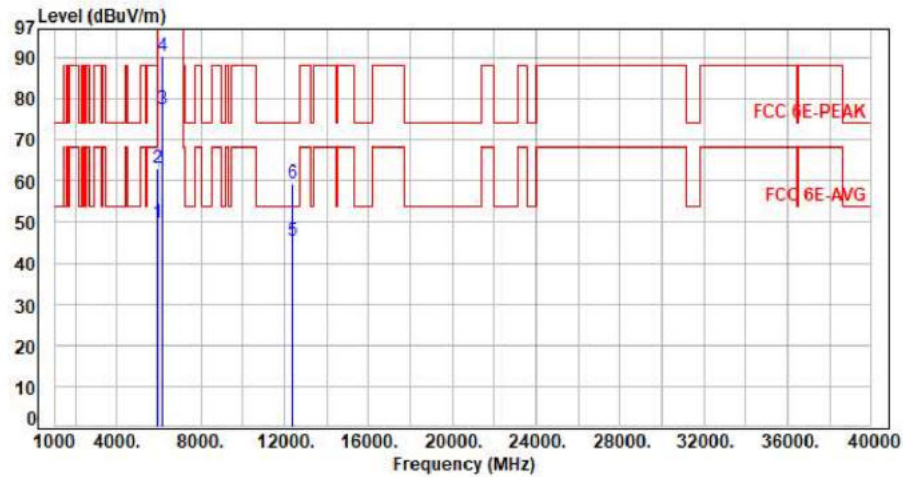


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	100	66	P
2	5925.00	7.66	55.39	63.05	88.20	-25.15	Peak	100	66	P
3	6175.00	8.35	68.94	77.29	200.00	-122.71	Average	100	66	P
4	6175.00	8.35	82.19	90.54	200.00	-109.46	Peak	100	66	P
5	12350.00	17.76	27.72	45.48	54.00	-8.52	Average	100	199	P
6	12350.00	17.76	41.44	59.20	74.00	-14.80	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

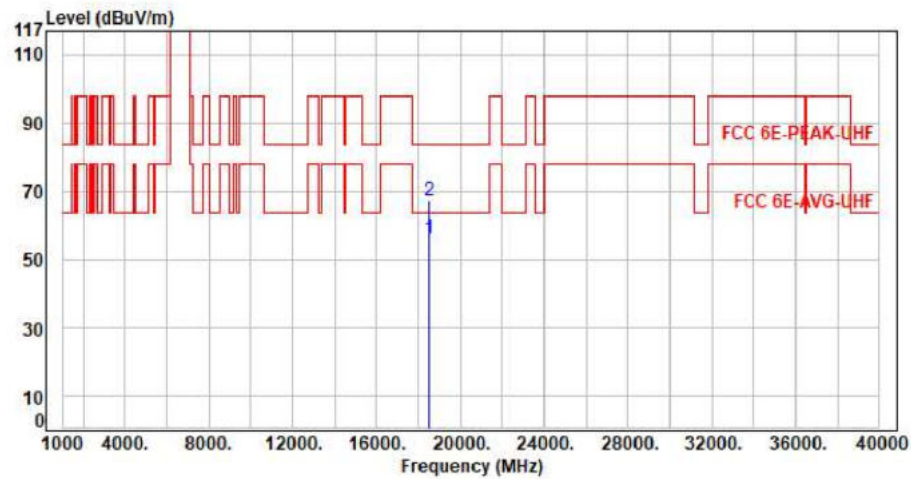


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	45.67	56.22	63.54	-7.32	Average	150	360	P
2	18525.00	10.55	56.44	66.99	83.54	-16.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

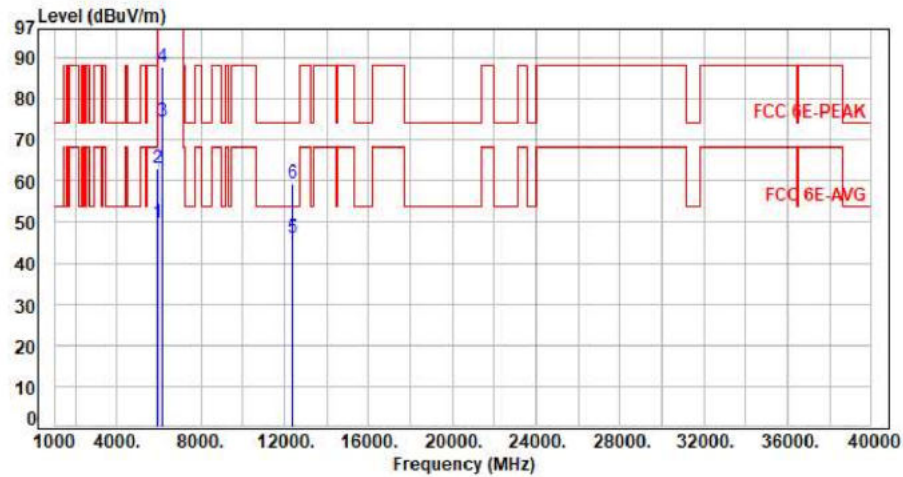


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.27	49.93	68.20	-18.27	Average	108	272	P
2	5925.00	7.66	55.54	63.20	88.20	-25.00	Peak	108	272	P
3	6175.00	8.35	66.17	74.52	200.00	-125.48	Average	108	272	P
4	6175.00	8.35	79.37	87.72	200.00	-112.28	Peak	108	272	P
5	12350.00	17.76	28.18	45.94	54.00	-8.06	Average	100	254	P
6	12350.00	17.76	41.69	59.45	74.00	-14.55	Peak	100	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

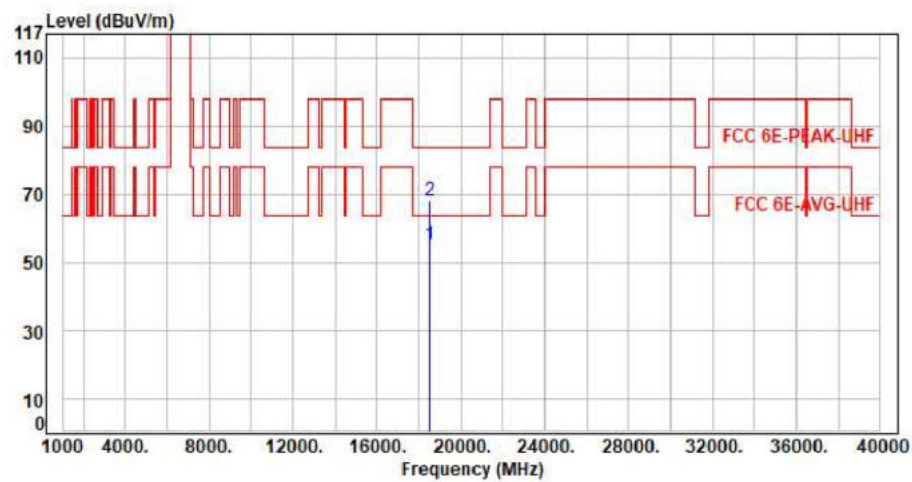

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	44.75	55.30	63.54	-8.24	Average	150	360	P
2	18525.00	10.55	57.51	68.06	83.54	-15.48	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

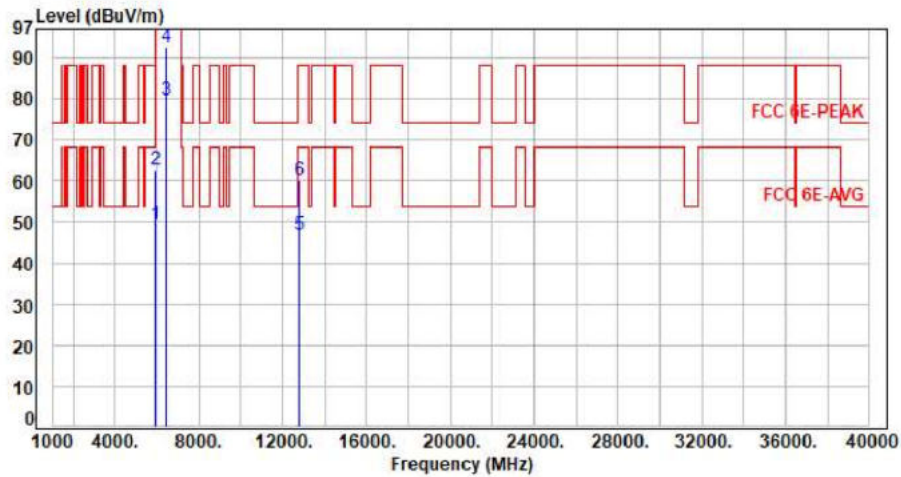


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.79	49.45	68.20	-18.75	Average	100	65	P
2	5925.00	7.66	54.91	62.57	88.20	-25.63	Peak	100	65	P
3	6415.00	8.34	71.21	79.55	200.00	-120.45	Average	100	65	P
4	6415.00	8.34	84.15	92.49	200.00	-107.51	Peak	100	65	P
5	12830.00	18.92	27.89	46.81	68.20	-21.39	Average	100	199	P
6	12830.00	18.92	41.16	60.08	88.20	-28.12	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

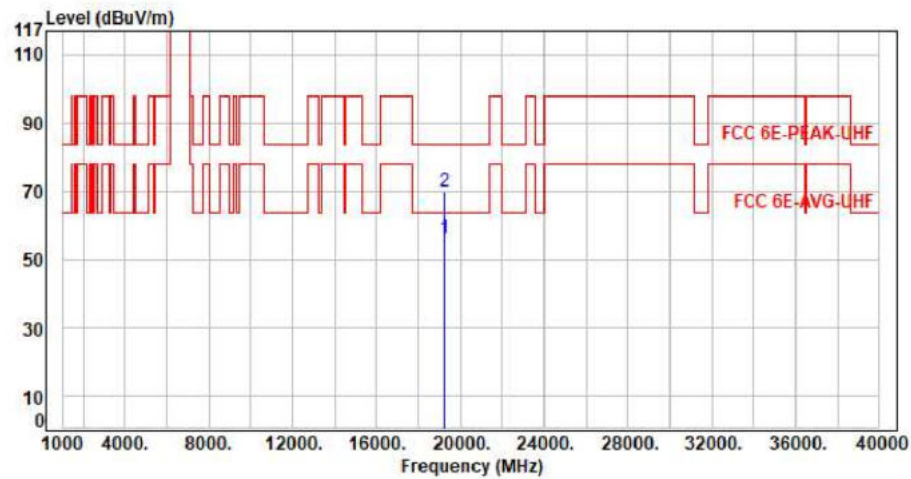


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	44.77	56.14	63.54	-7.40	Average	150	360	P
2	19245.00	11.37	58.64	70.01	83.54	-13.53	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

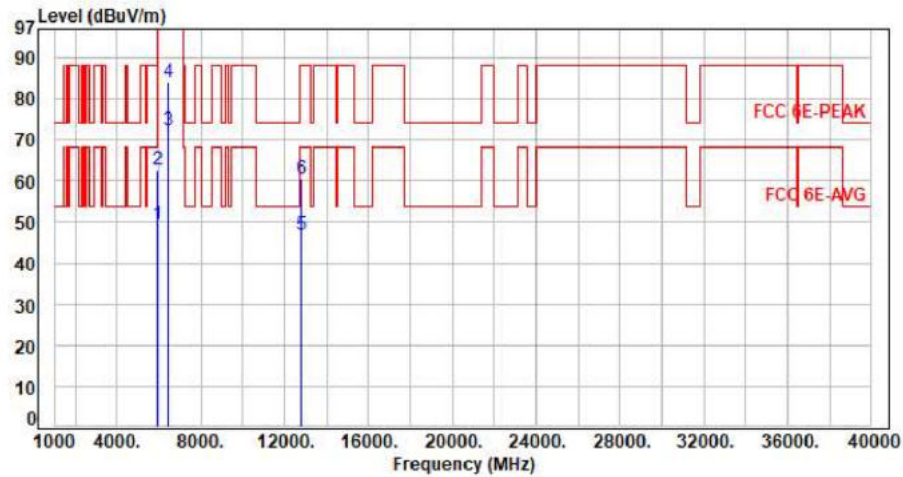


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.74	49.40	68.20	-18.80	Average	125	270	P
2	5925.00	7.66	55.13	62.79	88.20	-25.41	Peak	125	270	P
3	6415.00	8.34	64.02	72.36	200.00	-127.64	Average	125	270	P
4	6415.00	8.34	75.58	83.92	200.00	-116.08	Peak	125	270	P
5	12830.00	18.92	27.87	46.79	68.20	-21.41	Average	100	253	P
6	12830.00	18.92	41.49	60.41	88.20	-27.79	Peak	100	253	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

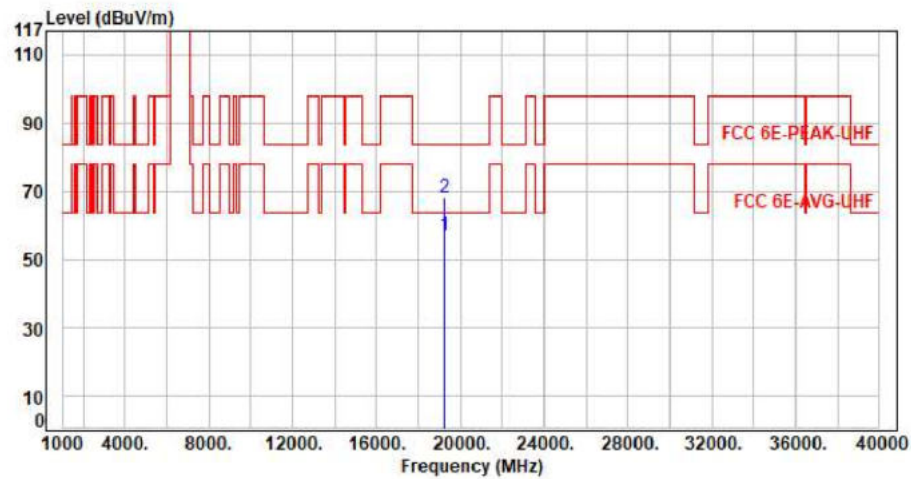


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.52	56.89	63.54	-6.65	Average	150	360	P
2	19245.00	11.37	56.77	68.14	83.54	-15.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

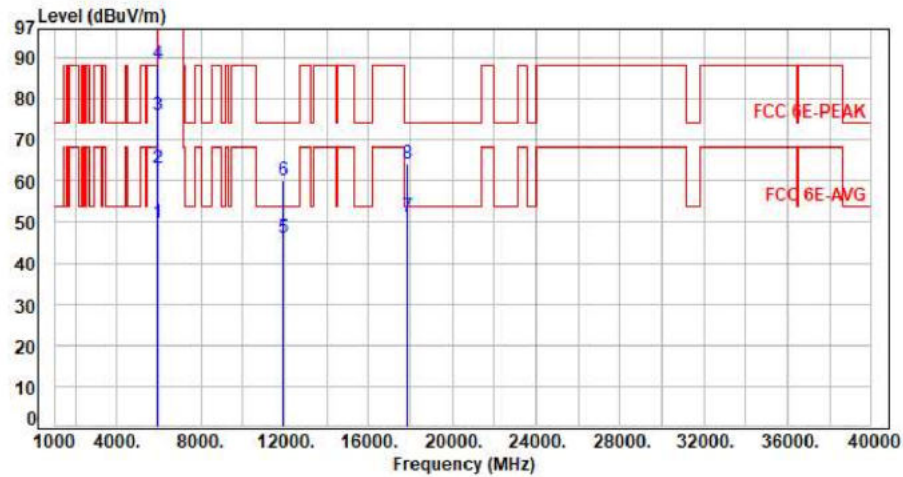

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.15	49.81	68.20	-18.39	Average	100	64	P
2	5925.00	7.66	55.48	63.14	88.20	-25.06	Peak	100	64	P
3	5965.00	7.71	68.29	76.00	200.00	-124.00	Average	100	64	P
4	5965.00	7.71	80.98	88.69	200.00	-111.31	Peak	100	64	P
5	11930.00	18.05	27.96	46.01	54.00	-7.99	Average	100	192	P
6	11930.00	18.05	42.08	60.13	74.00	-13.87	Peak	100	192	P
7	17895.00	27.89	23.25	51.14	54.00	-2.86	Average	100	133	P
8	17895.00	27.89	36.17	64.06	74.00	-9.94	Peak	100	133	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

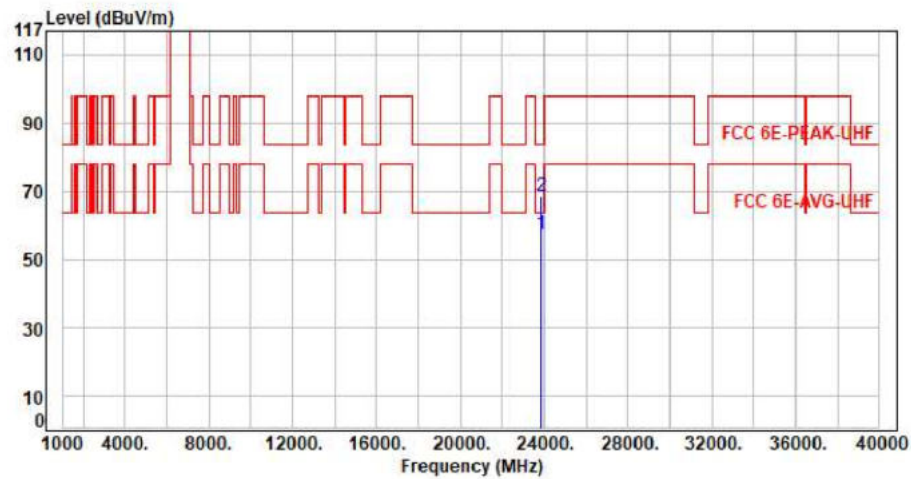


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	46.34	57.54	63.54	-6.00	Average	150	360	P
2	23860.00	11.20	57.15	68.35	83.54	-15.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

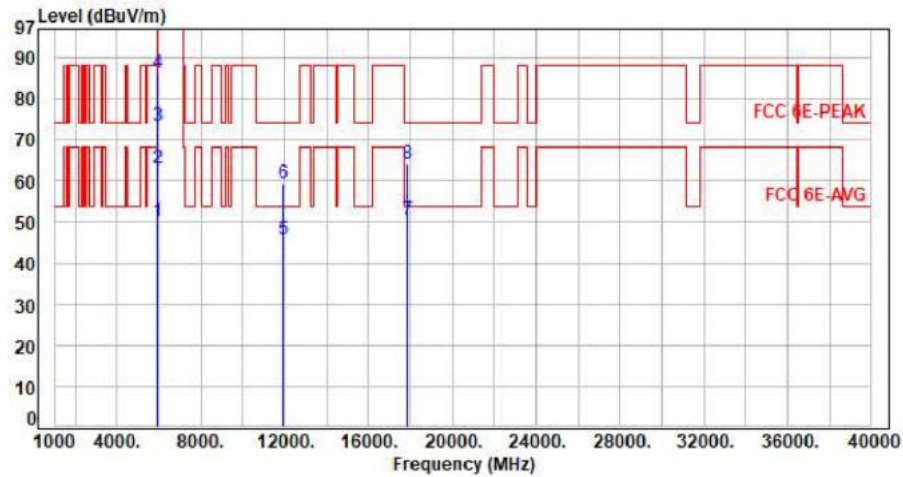

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.46	50.12	68.20	-18.08	Average	110	276	P
2	5925.00	7.66	55.49	63.15	88.20	-25.05	Peak	110	276	P
3	5965.00	7.71	65.59	73.30	200.00	-126.70	Average	110	276	P
4	5965.00	7.71	78.43	86.14	200.00	-113.86	Peak	110	276	P
5	11930.00	18.05	27.79	45.84	54.00	-8.16	Average	100	253	P
6	11930.00	18.05	41.34	59.39	74.00	-14.61	Peak	100	253	P
7	17895.00	27.89	22.77	50.66	54.00	-3.34	Average	100	153	P
8	17895.00	27.89	36.19	64.08	74.00	-9.92	Peak	100	153	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

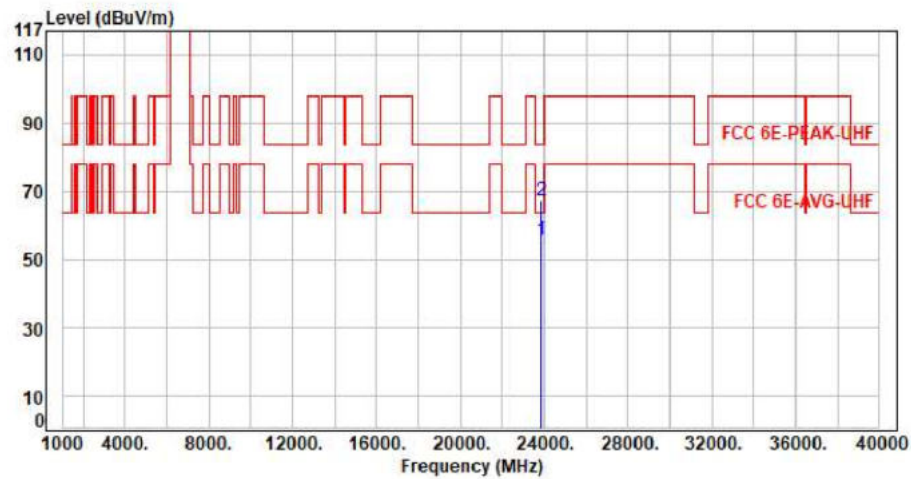


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.39	55.59	63.54	-7.95	Average	150	360	P
2	23860.00	11.20	55.76	66.96	83.54	-16.58	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

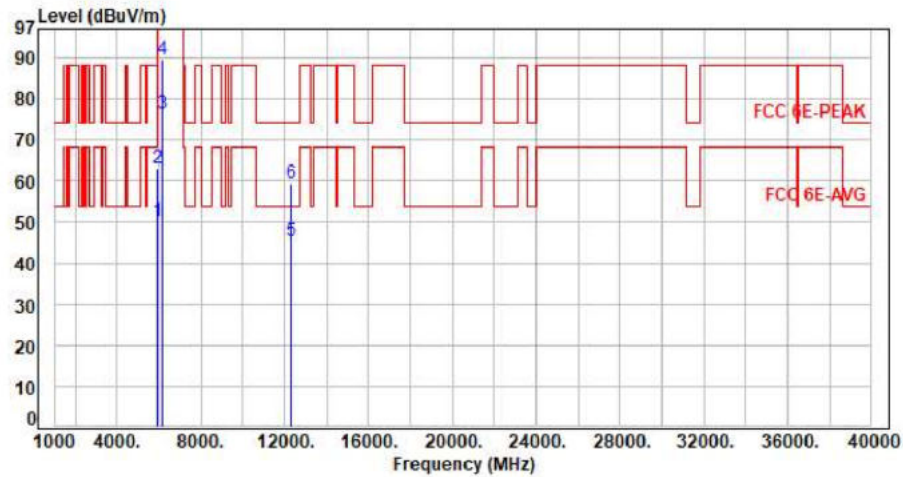


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.48	50.14	68.20	-18.06	Average	100	68	P
2	5925.00	7.66	55.46	63.12	88.20	-25.08	Peak	100	68	P
3	6165.00	8.34	68.05	76.39	200.00	-123.61	Average	100	68	P
4	6165.00	8.34	81.24	89.58	200.00	-110.42	Peak	100	68	P
5	12330.00	17.71	27.68	45.39	54.00	-8.61	Average	100	192	P
6	12330.00	17.71	41.49	59.20	74.00	-14.80	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

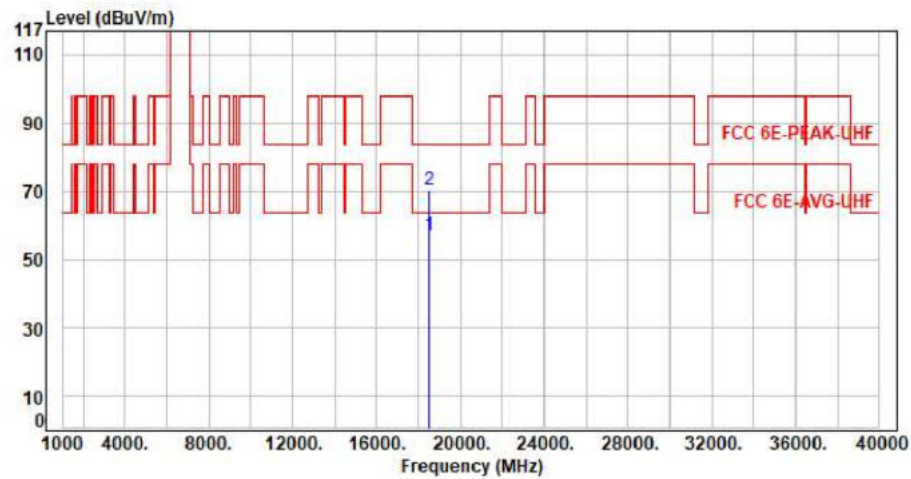


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.71	57.12	63.54	-6.42	Average	150	360	P
2	18495.00	10.41	59.74	70.15	83.54	-13.39	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

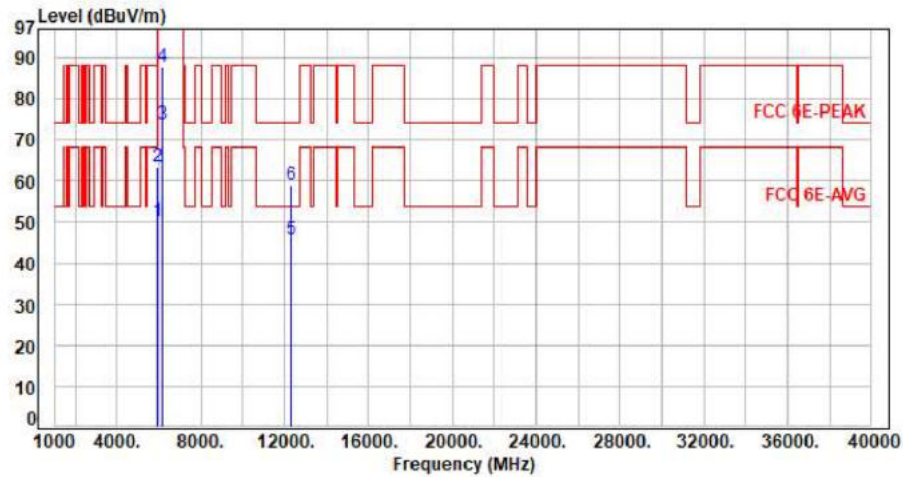


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.42	50.08	68.20	-18.12	Average	116	276	P
2	5925.00	7.66	55.64	63.30	88.20	-24.90	Peak	116	276	P
3	6165.00	8.34	65.25	73.59	200.00	-126.41	Average	116	276	P
4	6165.00	8.34	79.58	87.92	200.00	-112.08	Peak	116	276	P
5	12330.00	17.71	27.96	45.67	54.00	-8.33	Average	100	249	P
6	12330.00	17.71	41.35	59.06	74.00	-14.94	Peak	100	249	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

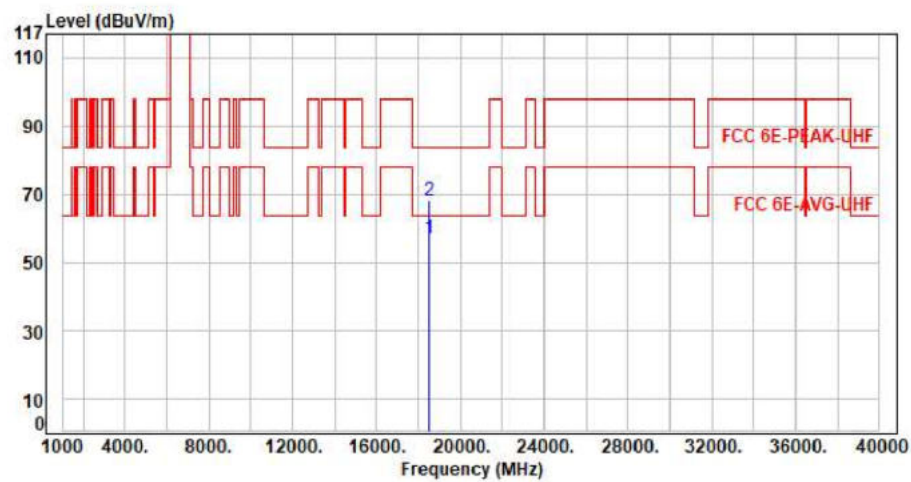

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.51	56.92	63.54	-6.62	Average	150	360	P
2	18495.00	10.41	57.84	68.25	83.54	-15.29	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

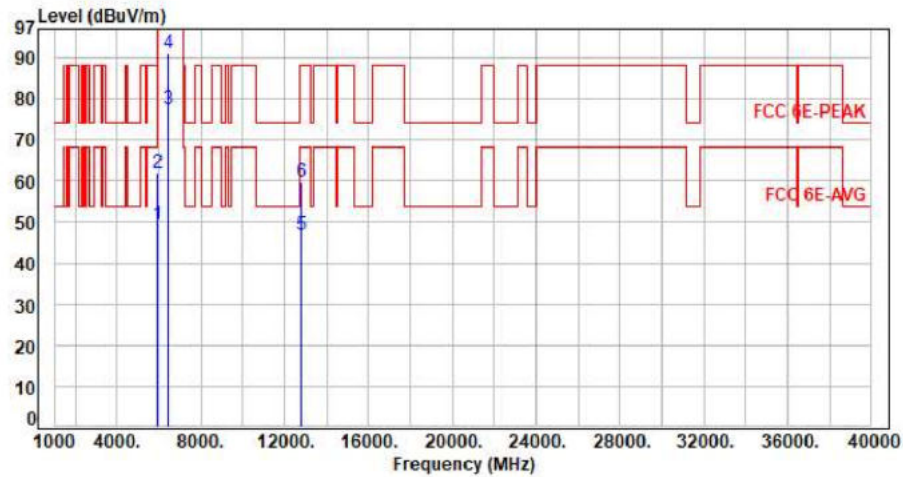


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.74	49.40	68.20	-18.80	Average	100	58	P
2	5925.00	7.66	54.37	62.03	88.20	-26.17	Peak	100	58	P
3	6405.00	8.35	68.96	77.31	200.00	-122.69	Average	100	58	P
4	6405.00	8.35	82.66	91.01	200.00	-108.99	Peak	100	58	P
5	12810.00	18.88	27.86	46.74	68.20	-21.46	Average	100	199	P
6	12810.00	18.88	41.02	59.90	88.20	-28.30	Peak	100	199	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

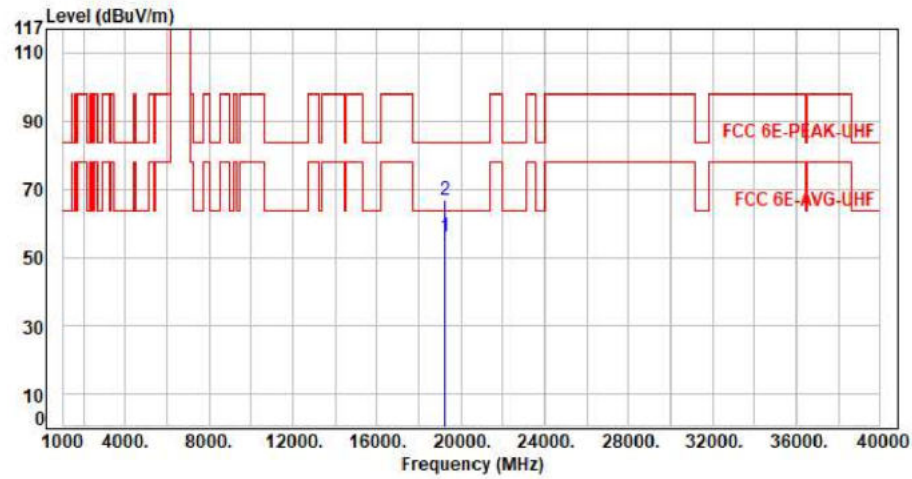


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.89	56.13	63.54	-7.41	Average	150	360	P
2	19215.00	11.24	55.33	66.57	83.54	-16.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

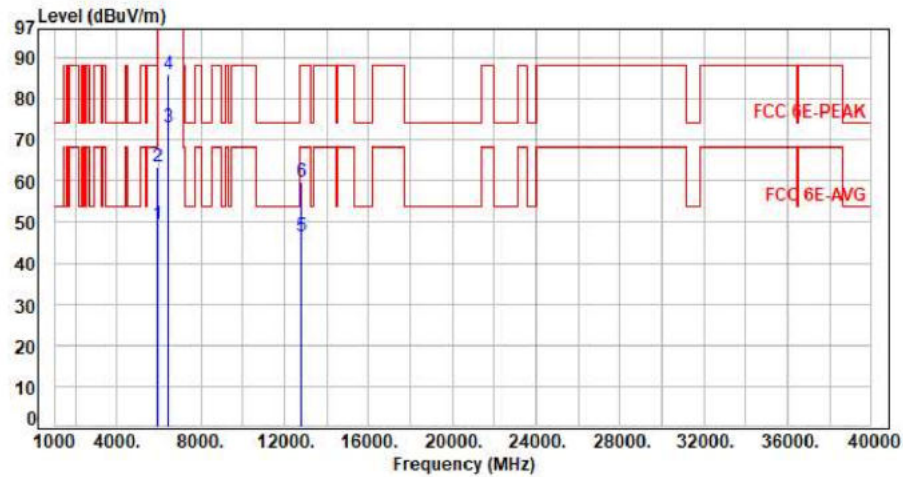


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.75	49.41	68.20	-18.79	Average	107	271	P
2	5925.00	7.66	55.66	63.32	88.20	-24.88	Peak	107	271	P
3	6405.00	8.35	64.55	72.90	200.00	-127.10	Average	107	271	P
4	6405.00	8.35	77.42	85.77	200.00	-114.23	Peak	107	271	P
5	12810.00	18.88	27.76	46.64	68.20	-21.56	Average	100	255	P
6	12810.00	18.88	40.93	59.81	88.20	-28.39	Peak	100	255	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

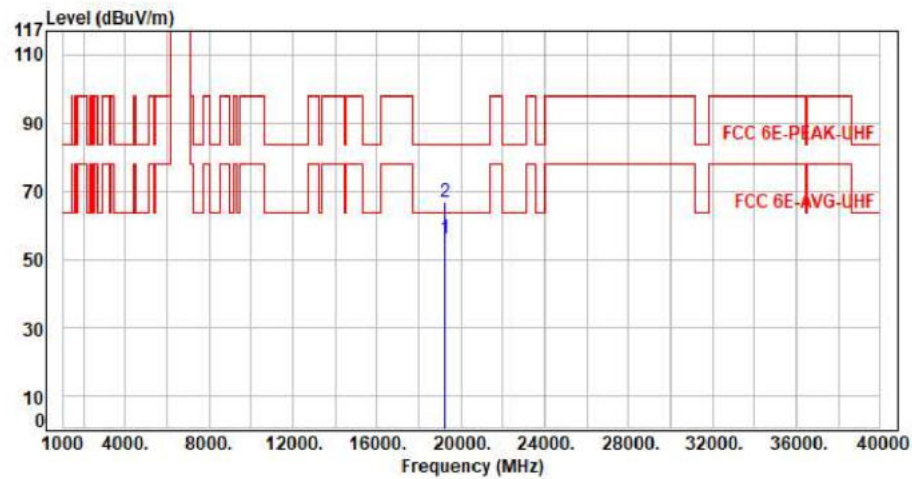


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.65	55.89	63.54	-7.65	Average	150	360	P
2	19215.00	11.24	55.45	66.69	83.54	-16.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

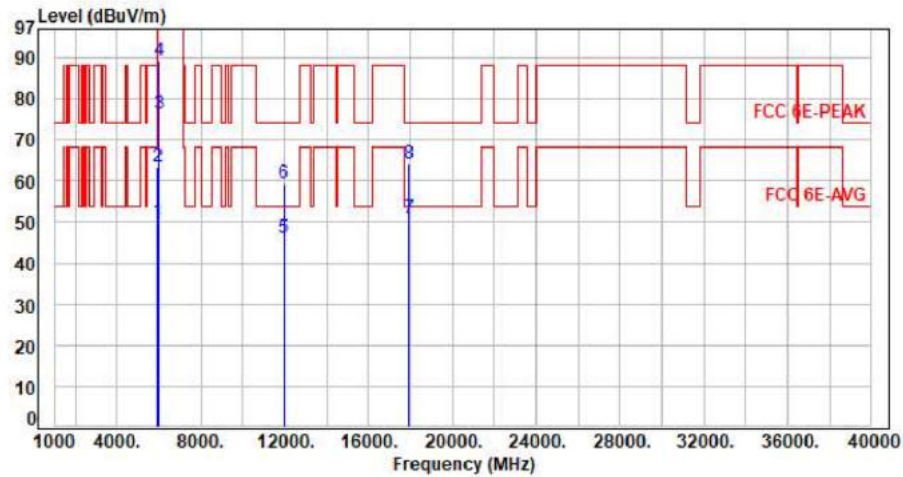

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.63	50.29	68.20	-17.91	Average	100	70	P
2	5925.00	7.66	55.65	63.31	88.20	-24.89	Peak	100	70	P
3	5985.00	7.75	68.52	76.27	200.00	-123.73	Average	100	70	P
4	5985.00	7.75	81.35	89.10	200.00	-110.90	Peak	100	70	P
5	11970.00	18.02	27.91	45.93	54.00	-8.07	Average	100	190	P
6	11970.00	18.02	41.43	59.45	74.00	-14.55	Peak	100	190	P
7	17955.00	28.04	22.76	50.80	54.00	-3.20	Average	100	136	P
8	17955.00	28.04	36.17	64.21	74.00	-9.79	Peak	100	136	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

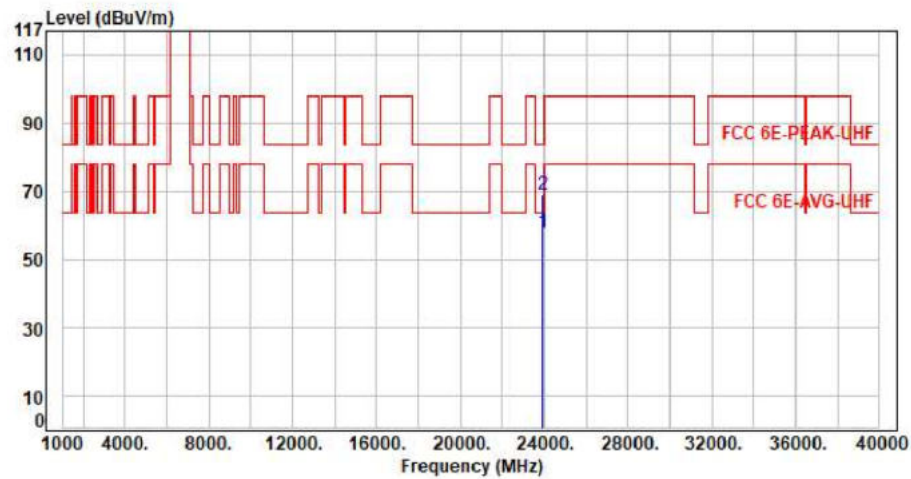

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	46.28	57.64	63.54	-5.90	Average	150	360	P
2	23940.00	11.36	57.54	68.90	83.54	-14.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

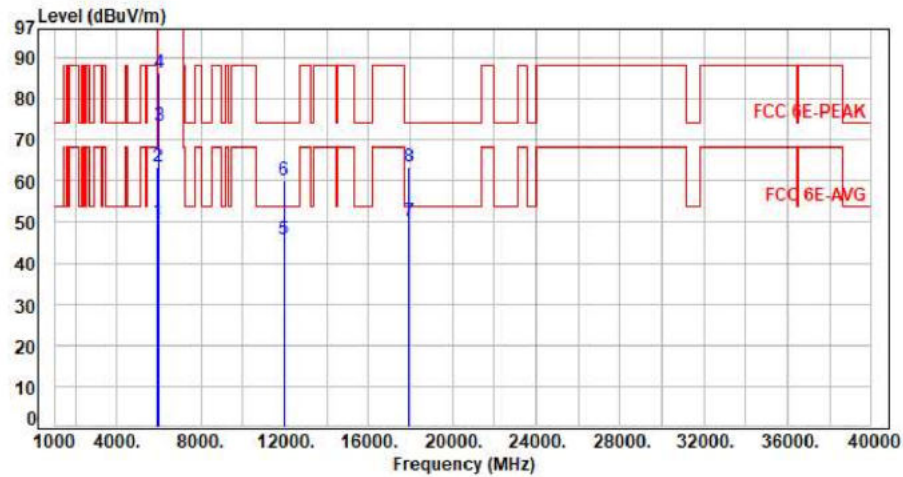

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.39	50.05	68.20	-18.15	Average	112	279	P
2	5925.00	7.66	55.87	63.53	88.20	-24.67	Peak	112	279	P
3	5985.00	7.75	65.79	73.54	200.00	-126.46	Average	112	279	P
4	5985.00	7.75	78.63	86.38	200.00	-113.62	Peak	112	279	P
5	11970.00	18.02	27.88	45.90	54.00	-8.10	Average	100	254	P
6	11970.00	18.02	42.15	60.17	74.00	-13.83	Peak	100	254	P
7	17955.00	28.04	22.19	50.23	54.00	-3.77	Average	100	156	P
8	17955.00	28.04	35.33	63.37	74.00	-10.63	Peak	100	156	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

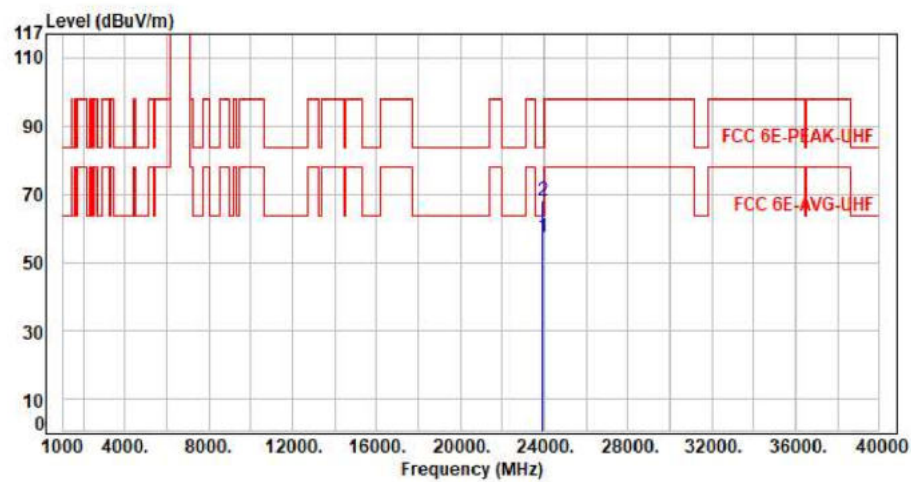


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.83	57.19	63.54	-6.35	Average	150	360	P
2	23940.00	11.36	56.83	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

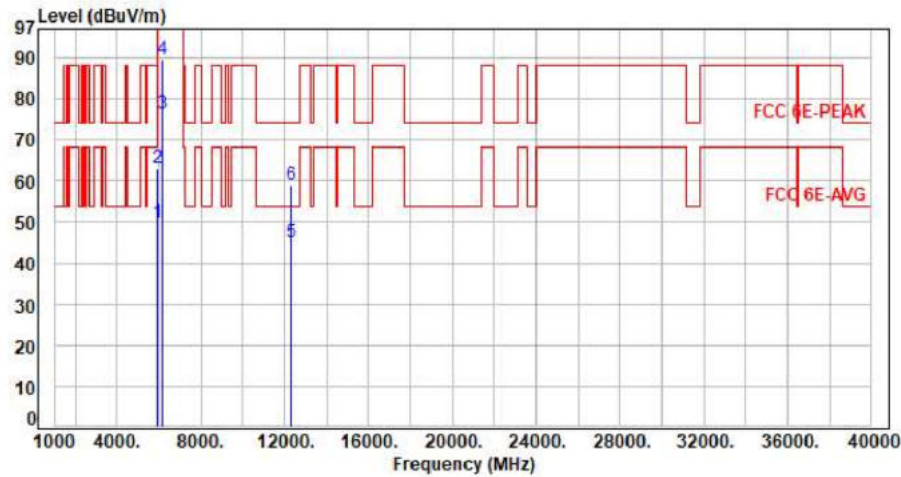


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.06	49.72	68.20	-18.48	Average	107	66	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	107	66	P
3	6145.00	8.31	68.19	76.50	200.00	-123.50	Average	107	66	P
4	6145.00	8.31	81.36	89.67	200.00	-110.33	Peak	107	66	P
5	12290.00	17.62	27.55	45.17	54.00	-8.83	Average	100	194	P
6	12290.00	17.62	41.39	59.01	74.00	-14.99	Peak	100	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

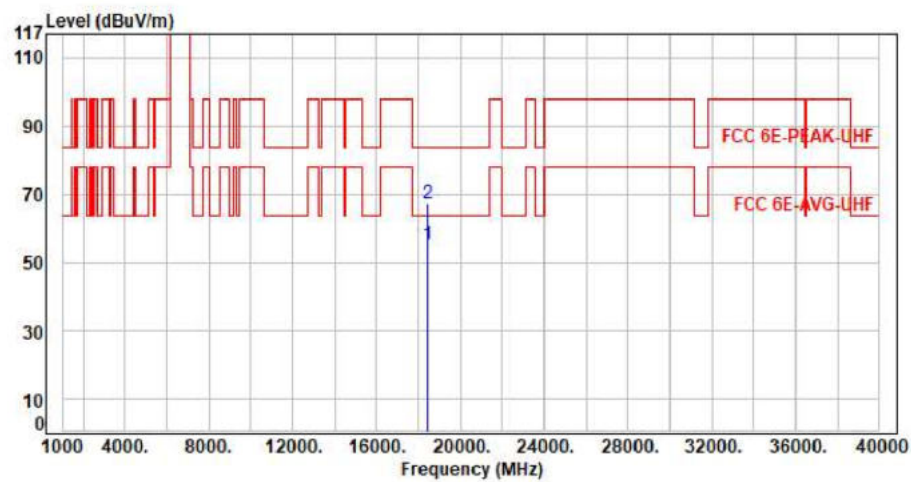

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.98	55.18	63.54	-8.36	Average	150	360	P
2	18435.00	10.20	56.91	67.11	83.54	-16.43	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

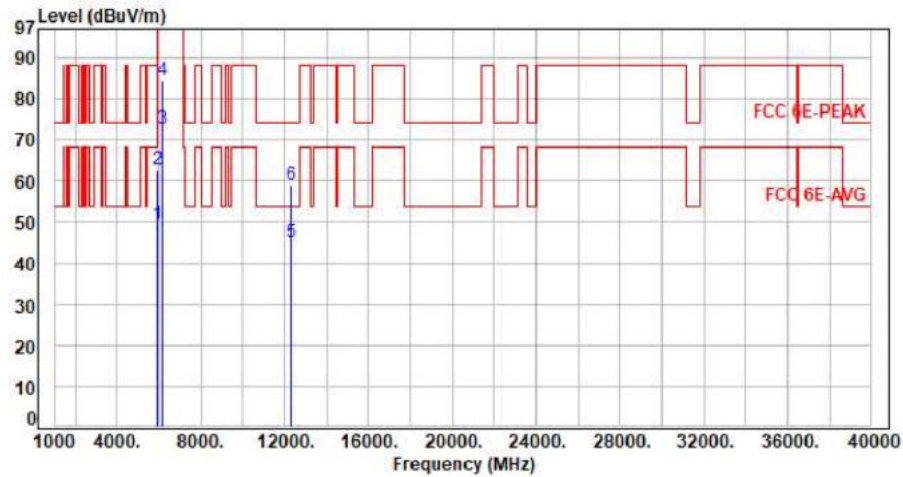

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.90	49.56	68.20	-18.64	Average	130	277	P
2	5925.00	7.66	55.19	62.85	88.20	-25.35	Peak	130	277	P
3	6145.00	8.31	64.23	72.54	200.00	-127.46	Average	130	277	P
4	6145.00	8.31	76.07	84.38	200.00	-115.62	Peak	130	277	P
5	12290.00	17.62	27.52	45.14	54.00	-8.86	Average	100	256	P
6	12290.00	17.62	41.49	59.11	74.00	-14.89	Peak	100	256	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor