




For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

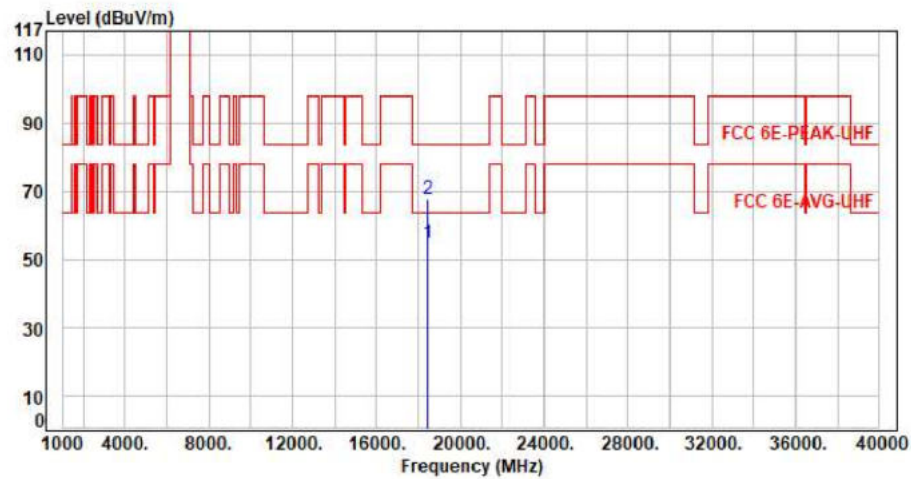


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.53	54.73	63.54	-8.81	Average	150	360	P
2	18435.00	10.20	57.50	67.70	83.54	-15.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

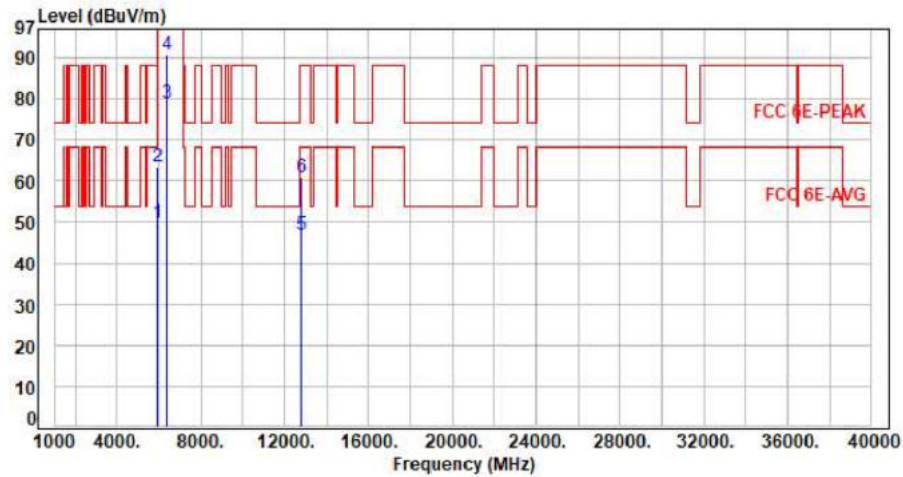


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.00	49.66	68.20	-18.54	Average	100	60	P
2	5925.00	7.66	55.90	63.56	88.20	-24.64	Peak	100	60	P
3	6385.00	8.34	70.75	79.09	200.00	-120.91	Average	100	60	P
4	6385.00	8.34	82.44	90.78	200.00	-109.22	Peak	100	60	P
5	12770.00	18.73	28.24	46.97	68.20	-21.23	Average	100	198	P
6	12770.00	18.73	42.09	60.82	88.20	-27.38	Peak	100	198	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

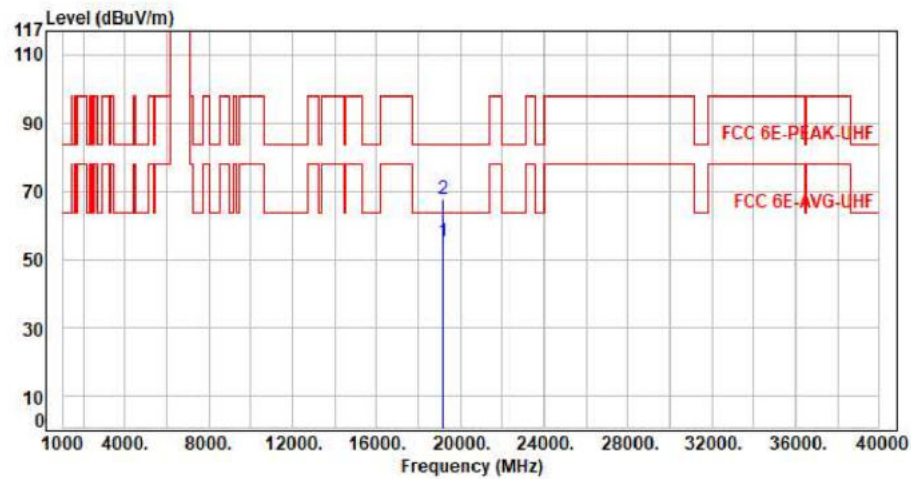

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	43.94	55.28	63.54	-8.26	Average	150	360	P
2	19155.00	11.34	56.07	67.41	83.54	-16.13	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

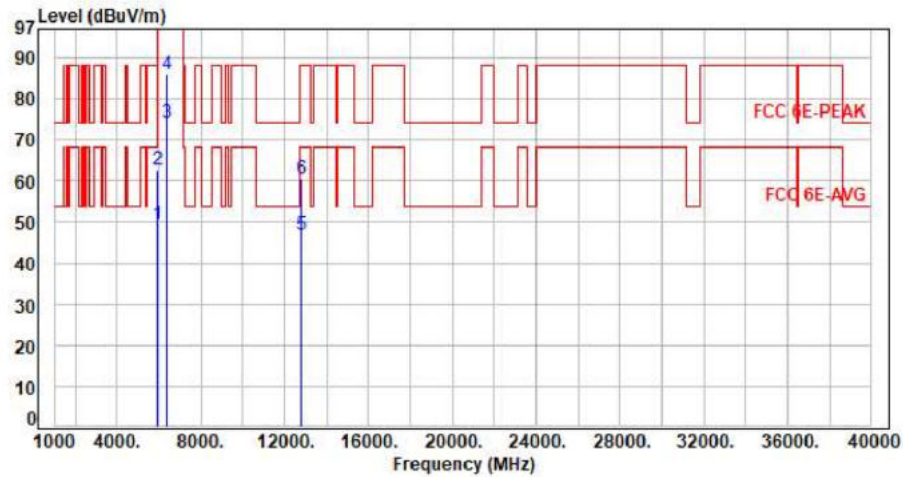


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.75	49.41	68.20	-18.79	Average	107	271	P
2	5925.00	7.66	54.97	62.63	88.20	-25.57	Peak	107	271	P
3	6385.00	8.34	65.86	74.20	200.00	-125.80	Average	107	271	P
4	6385.00	8.34	77.75	86.09	200.00	-113.91	Peak	107	271	P
5	12770.00	18.73	28.05	46.78	68.20	-21.42	Average	100	254	P
6	12770.00	18.73	41.80	60.53	88.20	-27.67	Peak	100	254	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

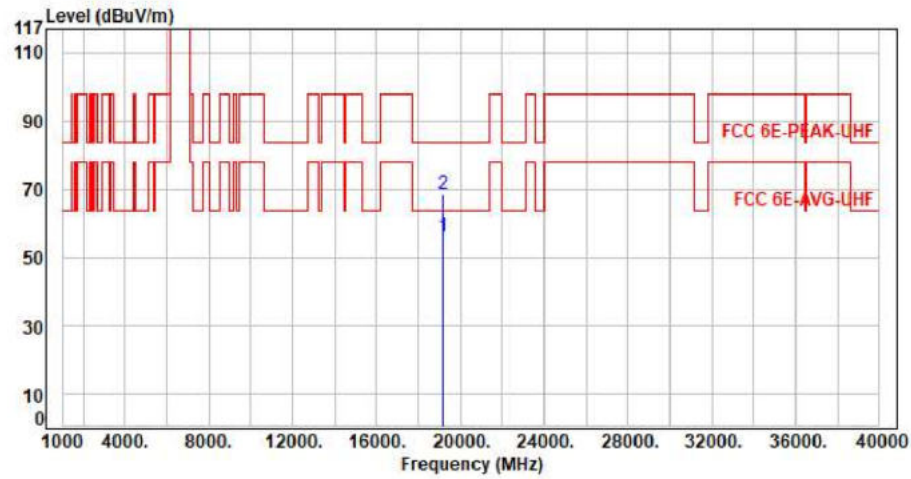


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	44.72	56.06	63.54	-7.48	Average	150	360	P
2	19155.00	11.34	57.15	68.49	83.54	-15.05	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

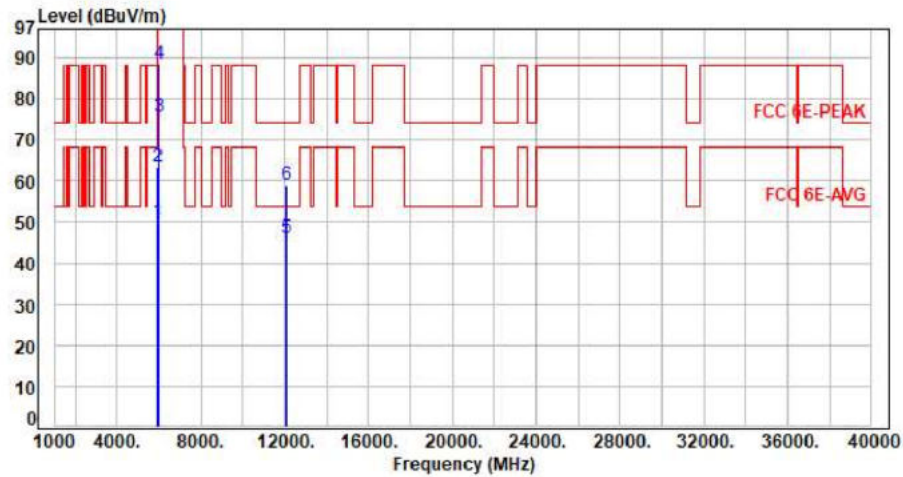


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.58	50.24	68.20	-17.96	Average	100	69	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	100	69	P
3	6025.00	7.91	67.66	75.57	200.00	-124.43	Average	100	69	P
4	6025.00	7.91	80.55	88.46	200.00	-111.54	Peak	100	69	P
5	12050.00	17.81	28.31	46.12	54.00	-7.88	Average	100	192	P
6	12050.00	17.81	41.29	59.10	74.00	-14.90	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

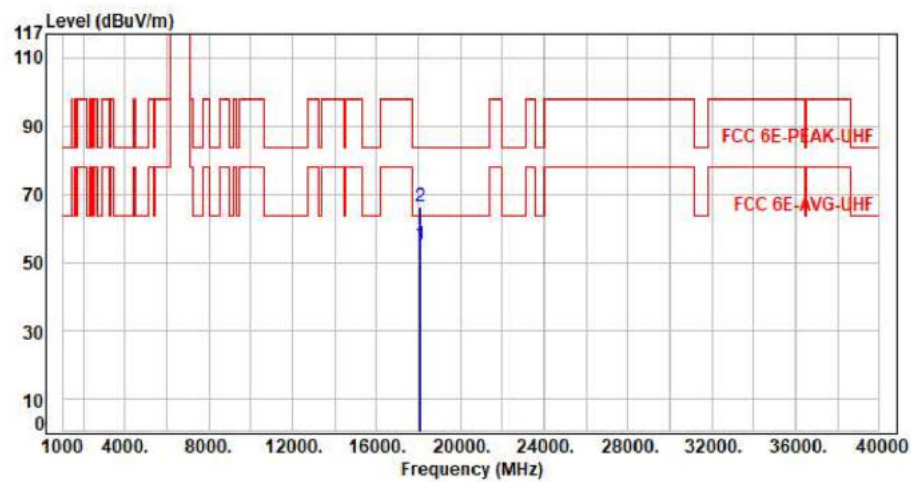

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	45.48	55.38	63.54	-8.16	Average	150	360	P
2	18075.00	9.90	56.32	66.22	83.54	-17.32	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

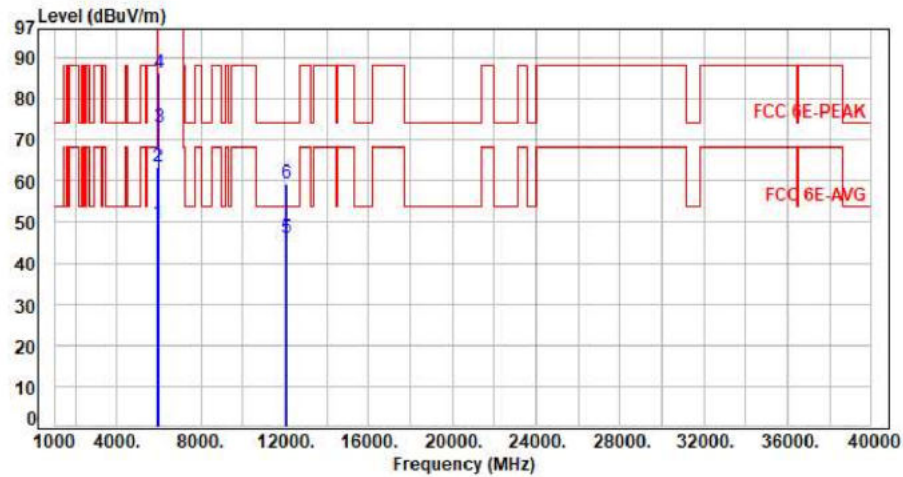


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.27	49.93	68.20	-18.27	Average	115	279	P
2	5925.00	7.66	55.84	63.50	88.20	-24.70	Peak	115	279	P
3	6025.00	7.91	65.23	73.14	200.00	-126.86	Average	115	279	P
4	6025.00	7.91	78.45	86.36	200.00	-113.64	Peak	115	279	P
5	12050.00	17.81	28.31	46.12	54.00	-7.88	Average	100	253	P
6	12050.00	17.81	41.66	59.47	74.00	-14.53	Peak	100	253	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

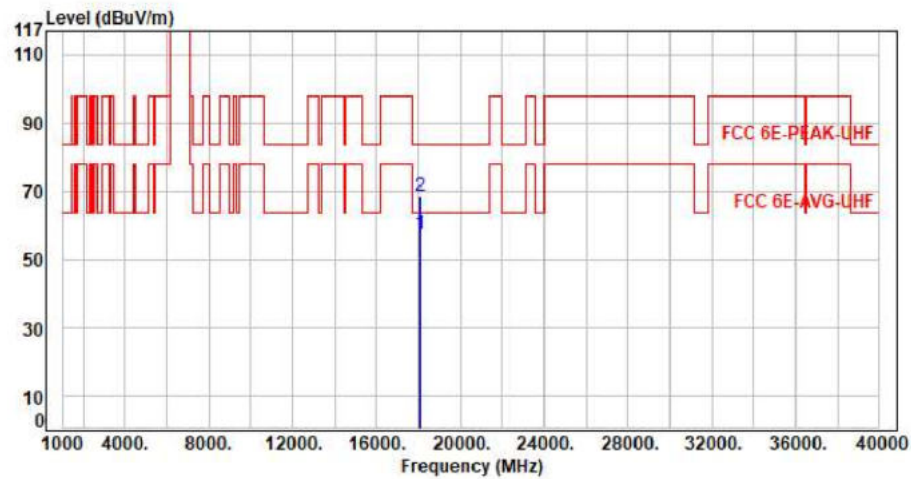


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	47.34	57.24	63.54	-6.30	Average	150	360	P
2	18075.00	9.90	58.77	68.67	83.54	-14.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

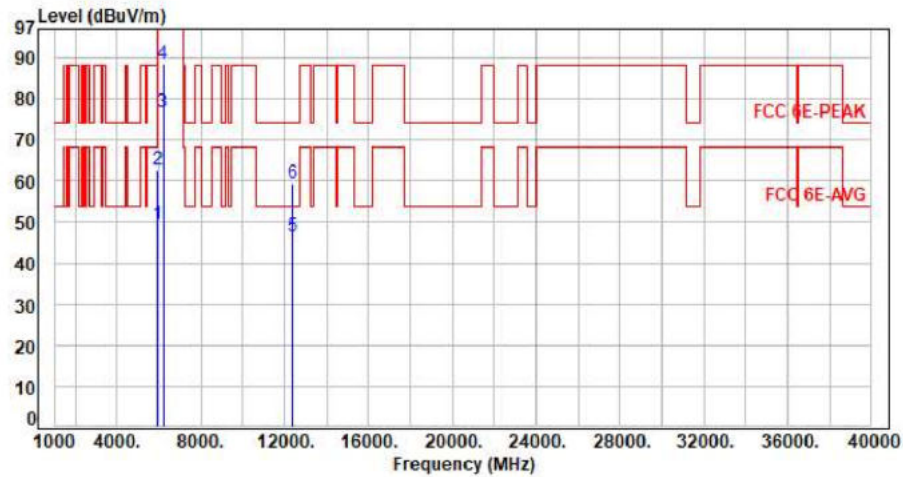


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.76	49.42	68.20	-18.78	Average	223	66	P
2	5925.00	7.66	55.19	62.85	88.20	-25.35	Peak	223	66	P
3	6185.00	8.36	68.35	76.71	200.00	-123.29	Average	223	66	P
4	6185.00	8.36	80.28	88.64	200.00	-111.36	Peak	223	66	P
5	12370.00	17.74	28.68	46.42	54.00	-7.58	Average	100	193	P
6	12370.00	17.74	41.46	59.20	74.00	-14.80	Peak	100	193	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

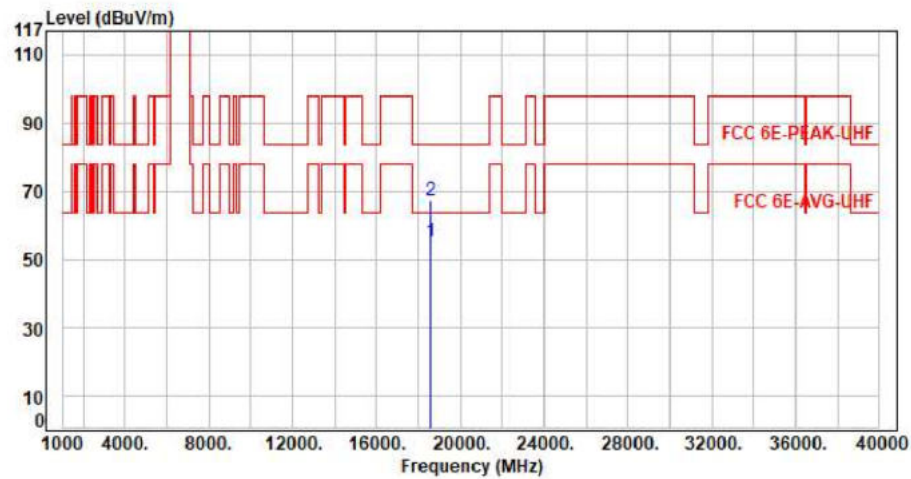


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	44.58	55.24	63.54	-8.30	Average	150	360	P
2	18555.00	10.66	56.42	67.08	83.54	-16.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

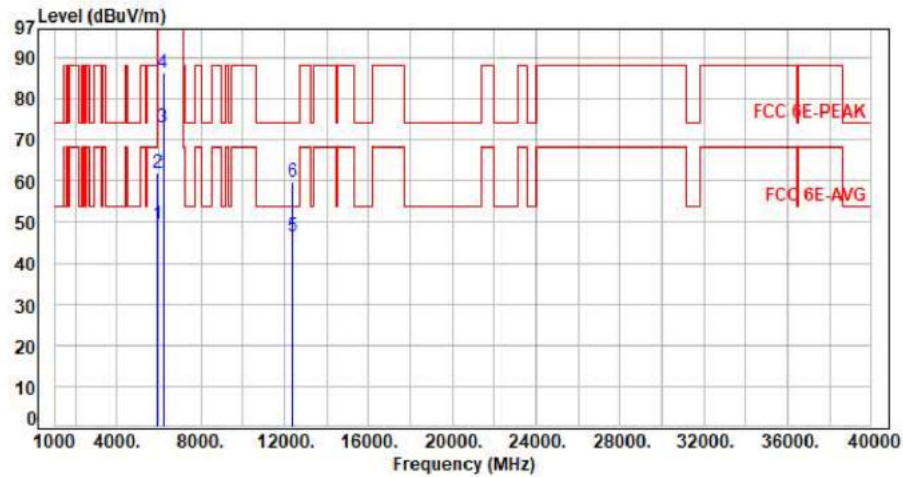


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.70	49.36	68.20	-18.84	Average	175	112	P
2	5925.00	7.66	54.42	62.08	88.20	-26.12	Peak	175	112	P
3	6185.00	8.36	64.65	73.01	200.00	-126.99	Average	175	112	P
4	6185.00	8.36	78.06	86.42	200.00	-113.58	Peak	175	112	P
5	12370.00	17.74	28.75	46.49	54.00	-7.51	Average	100	258	P
6	12370.00	17.74	41.99	59.73	74.00	-14.27	Peak	100	258	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

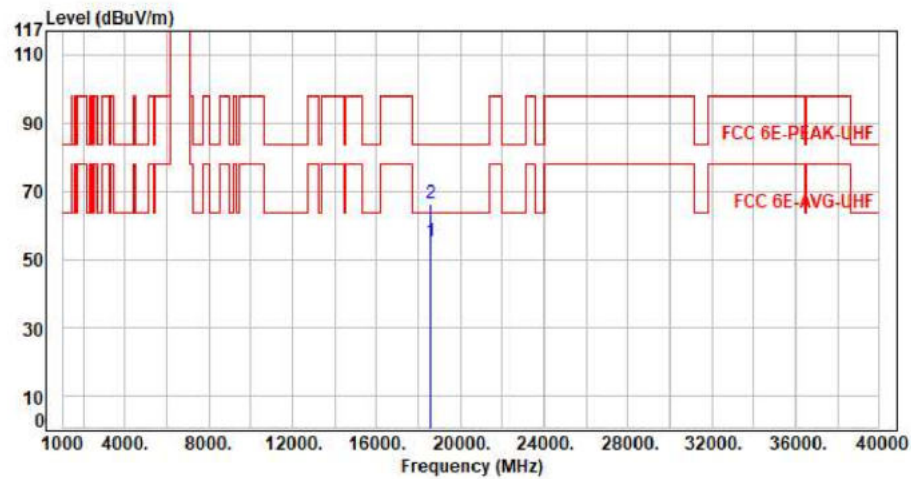


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	44.39	55.05	63.54	-8.49	Average	150	360	P
2	18555.00	10.66	55.52	66.18	83.54	-17.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

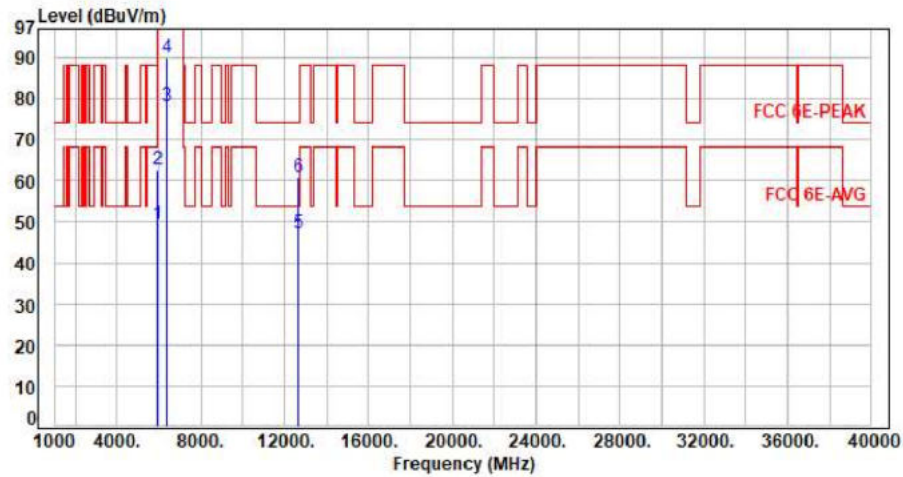


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.74	49.40	68.20	-18.80	Average	100	60	P
2	5925.00	7.66	54.90	62.56	88.20	-25.64	Peak	100	60	P
3	6345.00	8.31	69.93	78.24	200.00	-121.76	Average	100	60	P
4	6345.00	8.31	81.55	89.86	200.00	-110.14	Peak	100	60	P
5	12690.00	18.27	28.81	47.08	54.00	-6.92	Average	100	196	P
6	12690.00	18.27	42.56	60.83	74.00	-13.17	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

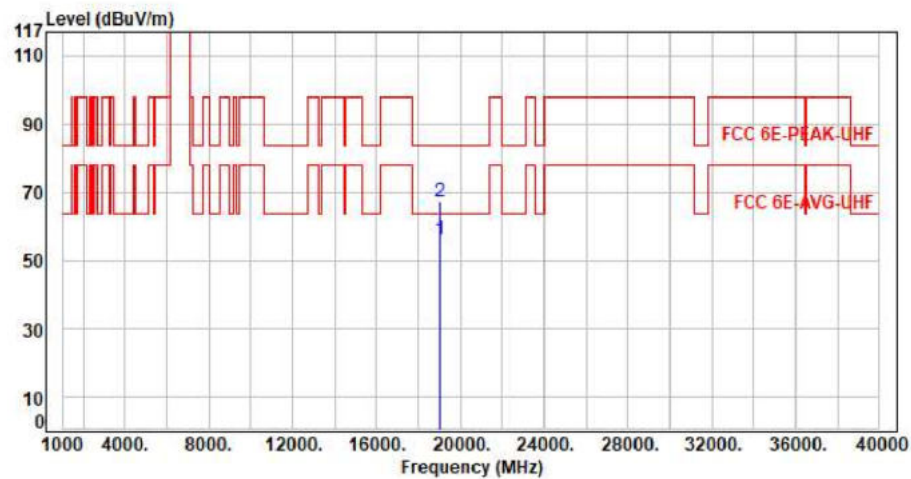


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.45	55.86	63.54	-7.68	Average	150	360	P
2	19035.00	11.41	55.56	66.97	83.54	-16.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

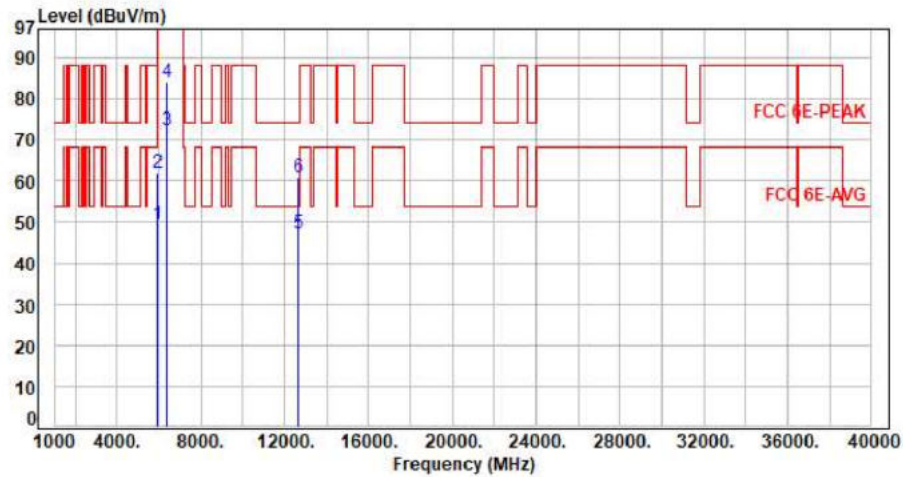


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.77	49.43	68.20	-18.77	Average	100	272	P
2	5925.00	7.66	54.37	62.03	88.20	-26.17	Peak	100	272	P
3	6345.00	8.31	64.01	72.32	200.00	-127.68	Average	100	272	P
4	6345.00	8.31	75.91	84.22	200.00	-115.78	Peak	100	272	P
5	12690.00	18.27	28.77	47.04	54.00	-6.96	Average	100	259	P
6	12690.00	18.27	42.66	60.93	74.00	-13.07	Peak	100	259	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

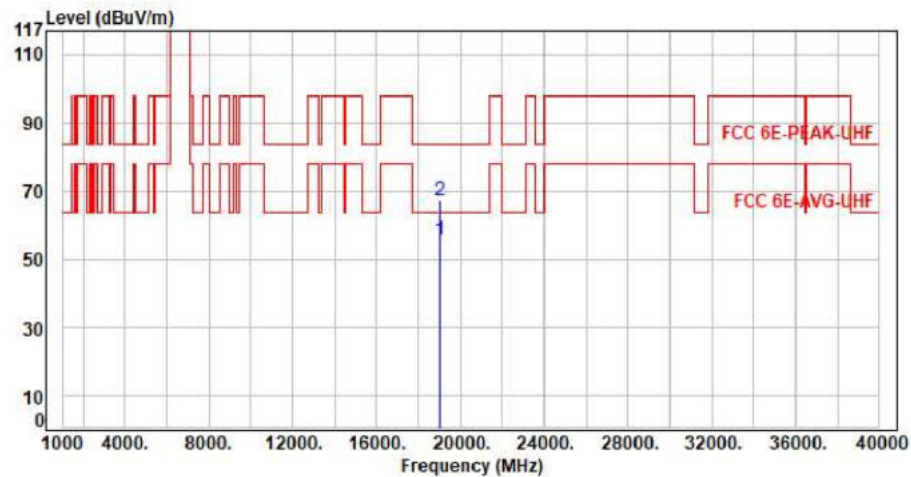


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.13	55.54	63.54	-8.00	Average	150	360	P
2	19035.00	11.41	55.97	67.38	83.54	-16.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

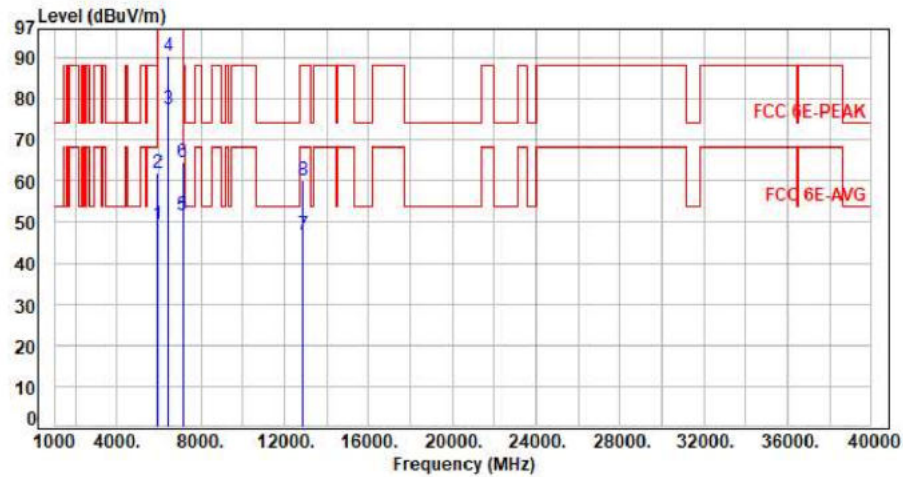

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.67	49.33	68.20	-18.87	Average	101	57	P
2	5925.00	7.66	54.20	61.86	88.20	-26.34	Peak	101	57	P
3	6435.00	8.32	69.18	77.50	200.00	-122.50	Average	101	57	P
4	6435.00	8.32	81.93	90.25	200.00	-109.75	Peak	101	57	P
5	7125.00	10.05	41.57	51.62	68.20	-16.58	Average	101	57	P
6	7125.00	10.05	54.51	64.56	88.20	-23.64	Peak	101	57	P
7	12870.00	19.02	27.92	46.94	68.20	-21.26	Average	100	196	P
8	12870.00	19.02	41.24	60.26	88.20	-27.94	Peak	100	196	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

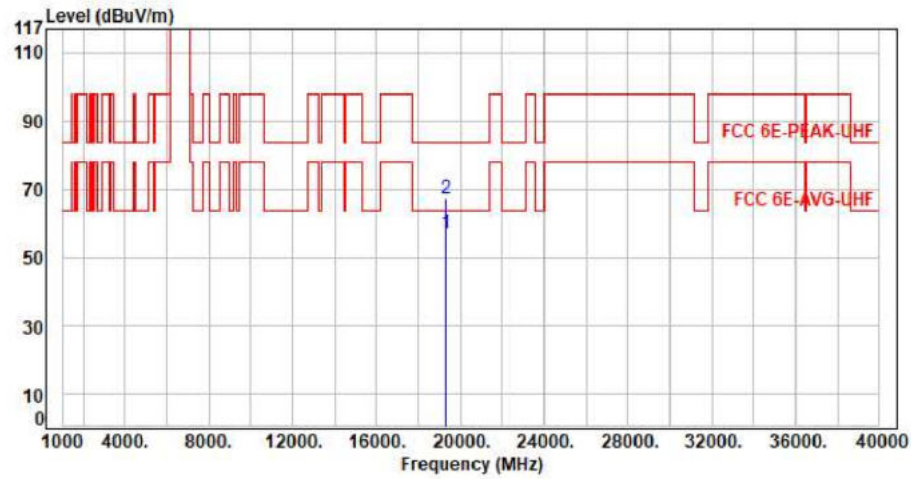


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	45.14	56.75	63.54	-6.79	Average	150	360	P
2	19305.00	11.61	55.78	67.39	83.54	-16.15	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

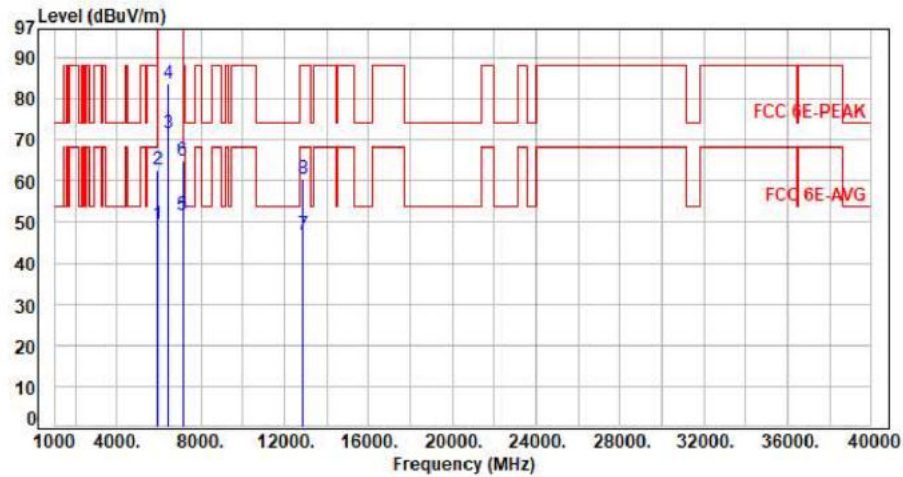

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.68	49.34	68.20	-18.86	Average	100	272	P
2	5925.00	7.66	54.99	62.65	88.20	-25.55	Peak	100	272	P
3	6435.00	8.32	63.14	71.46	200.00	-128.54	Average	100	272	P
4	6435.00	8.32	75.48	83.80	200.00	-116.20	Peak	100	272	P
5	7125.00	10.05	41.48	51.53	68.20	-16.67	Average	100	272	P
6	7125.00	10.05	54.77	64.82	88.20	-23.38	Peak	100	272	P
7	12870.00	19.02	27.79	46.81	68.20	-21.39	Average	100	255	P
8	12870.00	19.02	41.31	60.33	88.20	-27.87	Peak	100	255	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

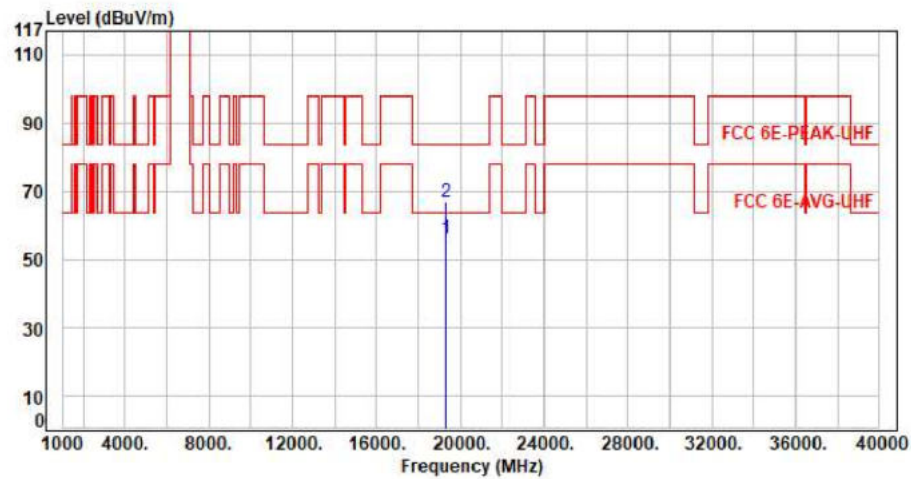


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.37	55.98	63.54	-7.56	Average	150	360	P
2	19305.00	11.61	55.06	66.67	83.54	-16.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

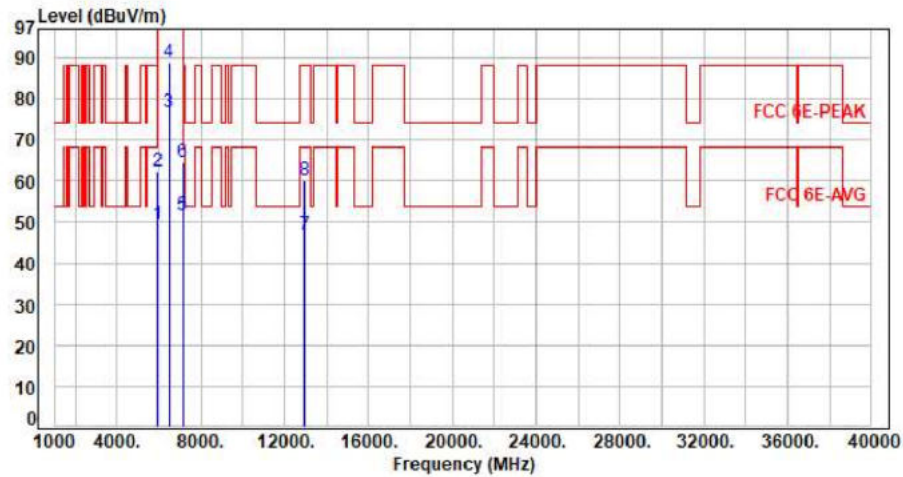

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.62	49.28	68.20	-18.92	Average	100	58	P
2	5925.00	7.66	54.76	62.42	88.20	-25.78	Peak	100	58	P
3	6475.00	8.33	68.37	76.70	200.00	-123.30	Average	100	58	P
4	6475.00	8.33	80.59	88.92	200.00	-111.08	Peak	100	58	P
5	7125.00	10.05	41.52	51.57	68.20	-16.63	Average	100	58	P
6	7125.00	10.05	54.66	64.71	88.20	-23.49	Peak	100	58	P
7	12950.00	19.39	27.62	47.01	68.20	-21.19	Average	100	194	P
8	12950.00	19.39	40.84	60.23	88.20	-27.97	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

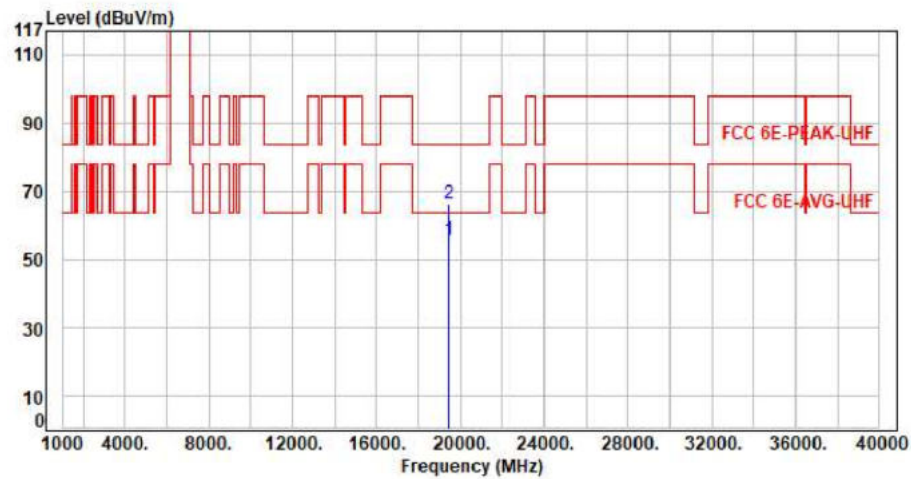


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	43.90	55.65	63.54	-7.89	Average	150	360	P
2	19425.00	11.75	54.72	66.47	83.54	-17.07	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

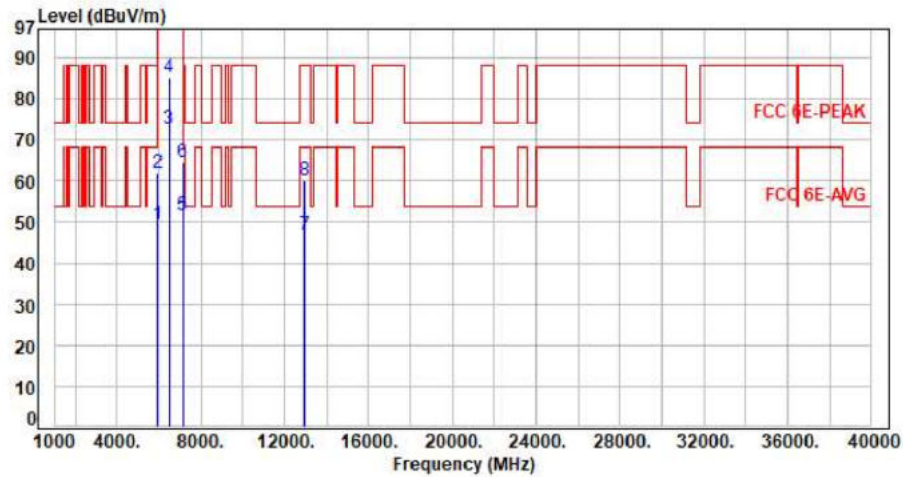

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.66	49.32	68.20	-18.88	Average	122	249	P
2	5925.00	7.66	54.21	61.87	88.20	-26.33	Peak	122	249	P
3	6475.00	8.33	64.33	72.66	200.00	-127.34	Average	122	249	P
4	6475.00	8.33	77.03	85.36	200.00	-114.64	Peak	122	249	P
5	7125.00	10.05	41.61	51.66	68.20	-16.54	Average	122	249	P
6	7125.00	10.05	54.62	64.67	88.20	-23.53	Peak	122	249	P
7	12950.00	19.39	27.50	46.89	68.20	-21.31	Average	100	256	P
8	12950.00	19.39	40.59	59.98	88.20	-28.22	Peak	100	256	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

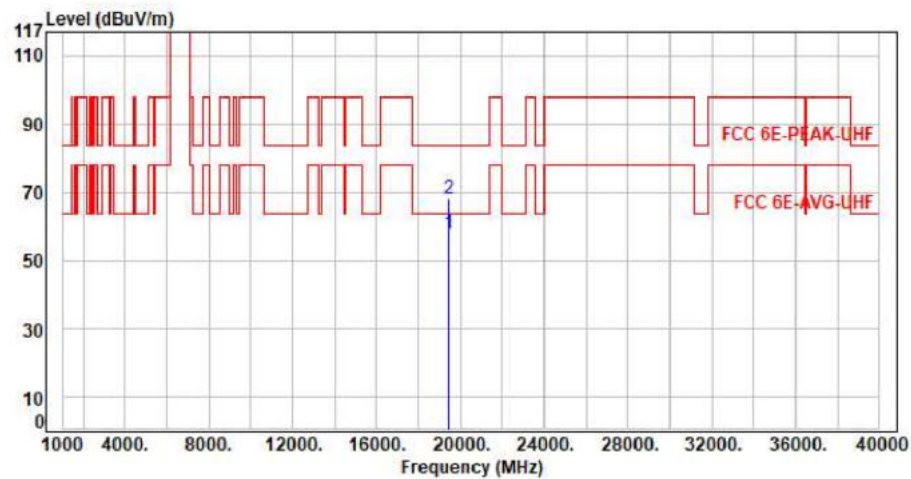


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	46.20	57.95	63.54	-5.59	Average	150	360	P
2	19425.00	11.75	56.28	68.03	83.54	-15.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

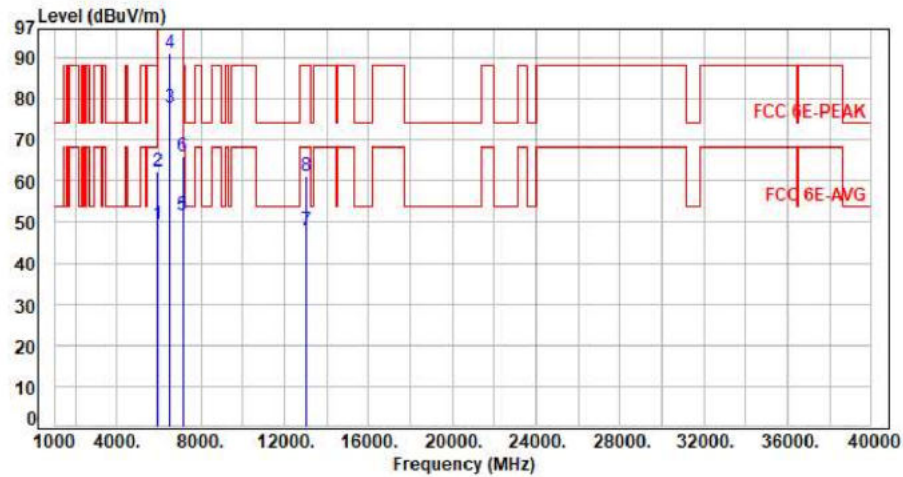

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.67	49.33	68.20	-18.87	Average	130	75	P
2	5925.00	7.66	54.82	62.48	88.20	-25.72	Peak	130	75	P
3	6515.00	8.42	69.39	77.81	200.00	-122.19	Average	130	75	P
4	6515.00	8.42	82.80	91.22	200.00	-108.78	Peak	130	75	P
5	7125.00	10.05	41.59	51.64	68.20	-16.56	Average	130	75	P
6	7125.00	10.05	56.11	66.16	88.20	-22.04	Peak	130	75	P
7	13030.00	19.86	27.90	47.76	68.20	-20.44	Average	100	196	P
8	13030.00	19.86	41.51	61.37	88.20	-26.83	Peak	100	196	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

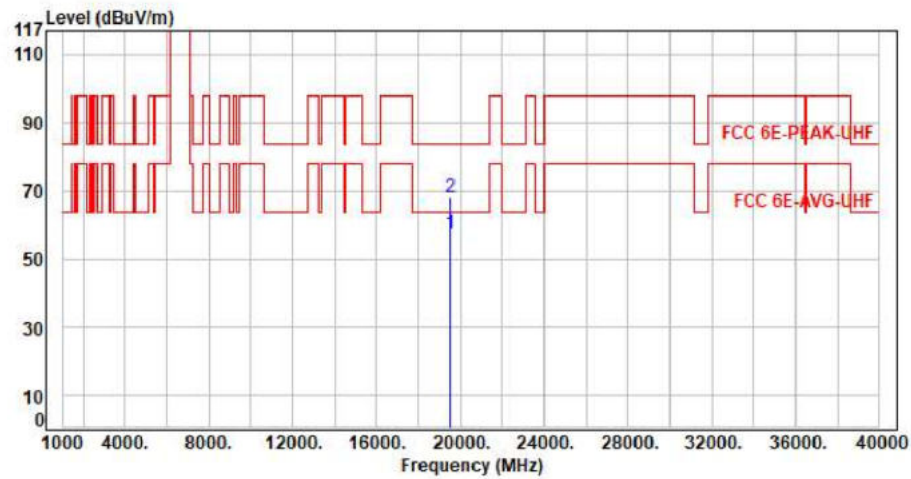


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.99	57.18	63.54	-6.36	Average	150	360	P
2	19545.00	12.19	56.01	68.20	83.54	-15.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

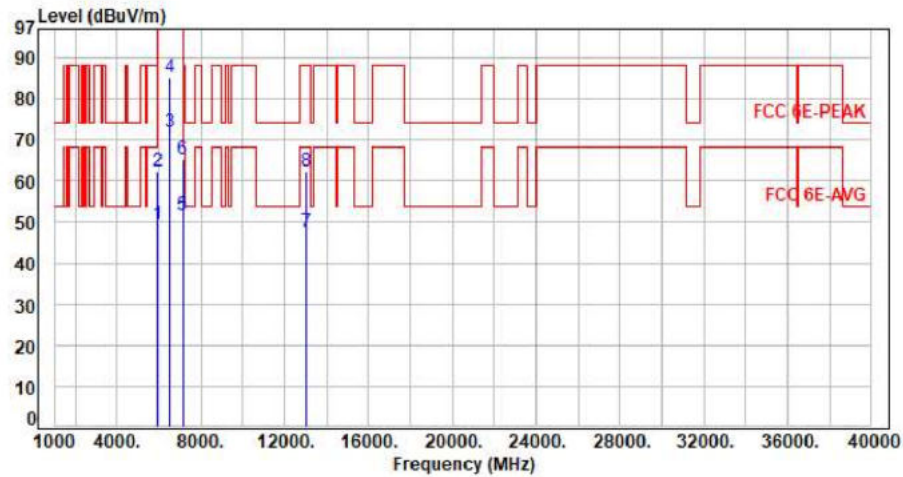

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.67	49.33	68.20	-18.87	Average	127	277	P
2	5925.00	7.66	54.64	62.30	88.20	-25.90	Peak	127	277	P
3	6515.00	8.42	63.63	72.05	200.00	-127.95	Average	127	277	P
4	6515.00	8.42	76.74	85.16	200.00	-114.84	Peak	127	277	P
5	7125.00	10.05	41.51	51.56	68.20	-16.64	Average	127	277	P
6	7125.00	10.05	55.13	65.18	88.20	-23.02	Peak	127	277	P
7	13030.00	19.86	27.89	47.75	68.20	-20.45	Average	100	253	P
8	13030.00	19.86	42.62	62.48	88.20	-25.72	Peak	100	253	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

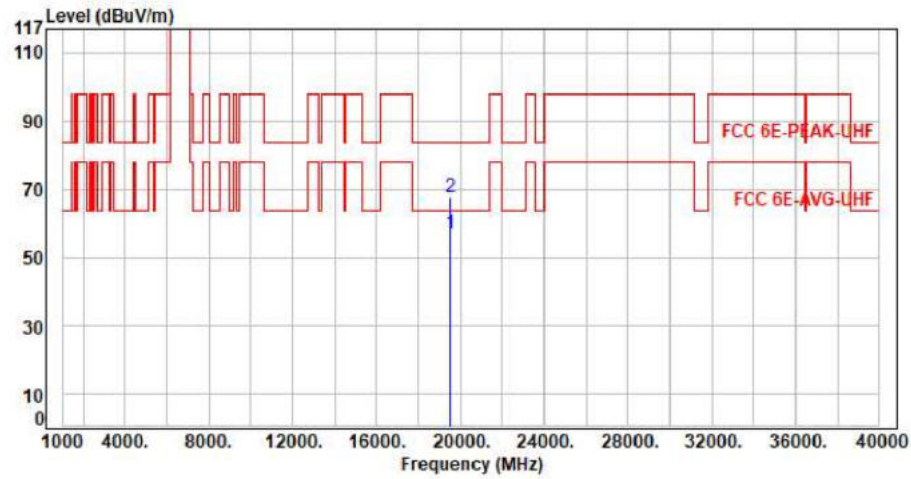


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.94	57.13	63.54	-6.41	Average	150	360	P
2	19545.00	12.19	55.43	67.62	83.54	-15.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

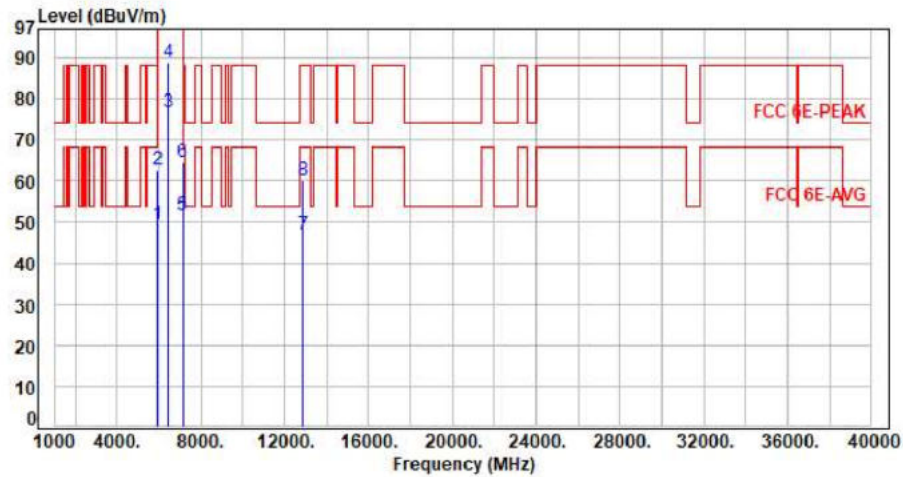


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.75	49.41	68.20	-18.79	Average	100	58	P
2	5925.00	7.66	54.90	62.56	88.20	-25.64	Peak	100	58	P
3	6445.00	8.31	68.27	76.58	200.00	-123.42	Average	100	58	P
4	6445.00	8.31	80.46	88.77	200.00	-111.23	Peak	100	58	P
5	7125.00	10.05	41.53	51.58	68.20	-16.62	Average	100	58	P
6	7125.00	10.05	54.65	64.70	88.20	-23.50	Peak	100	58	P
7	12890.00	19.05	27.87	46.92	68.20	-21.28	Average	100	195	P
8	12890.00	19.05	41.10	60.15	88.20	-28.05	Peak	100	195	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

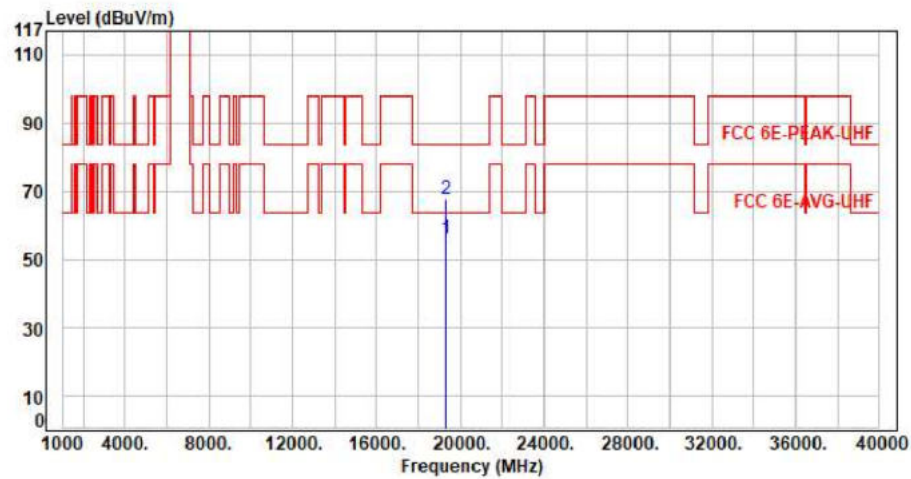


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.28	55.90	63.54	-7.64	Average	150	360	P
2	19335.00	11.62	55.96	67.58	83.54	-15.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

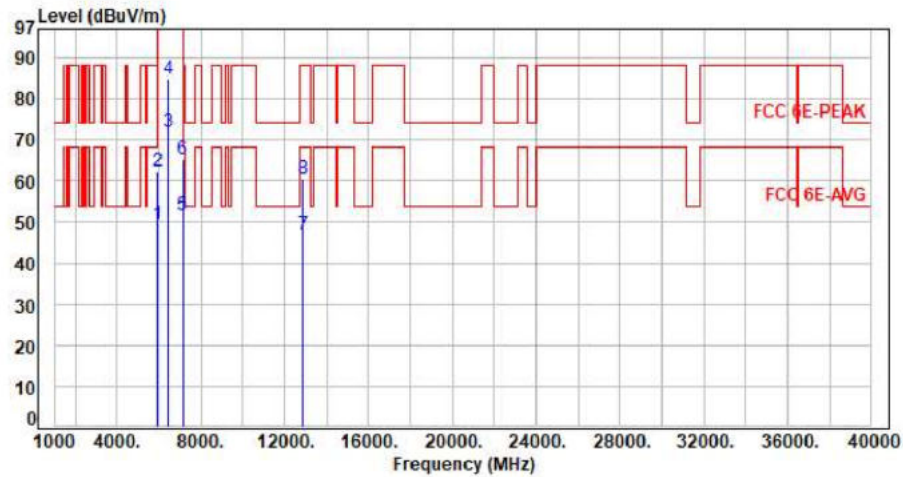

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.69	49.35	68.20	-18.85	Average	120	272	P
2	5925.00	7.66	54.80	62.46	88.20	-25.74	Peak	120	272	P
3	6445.00	8.31	63.64	71.95	200.00	-128.05	Average	120	272	P
4	6445.00	8.31	76.68	84.99	200.00	-115.01	Peak	120	272	P
5	7125.00	10.05	41.47	51.52	68.20	-16.68	Average	120	272	P
6	7125.00	10.05	55.33	65.38	88.20	-22.82	Peak	120	272	P
7	12890.00	19.05	27.89	46.94	68.20	-21.26	Average	100	255	P
8	12890.00	19.05	41.26	60.31	88.20	-27.89	Peak	100	255	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

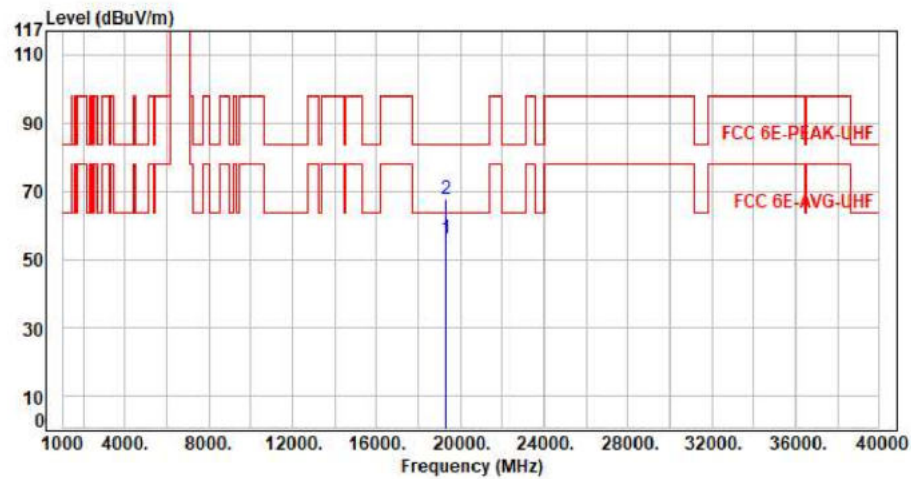


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.53	56.15	63.54	-7.39	Average	150	360	P
2	19335.00	11.62	56.02	67.64	83.54	-15.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

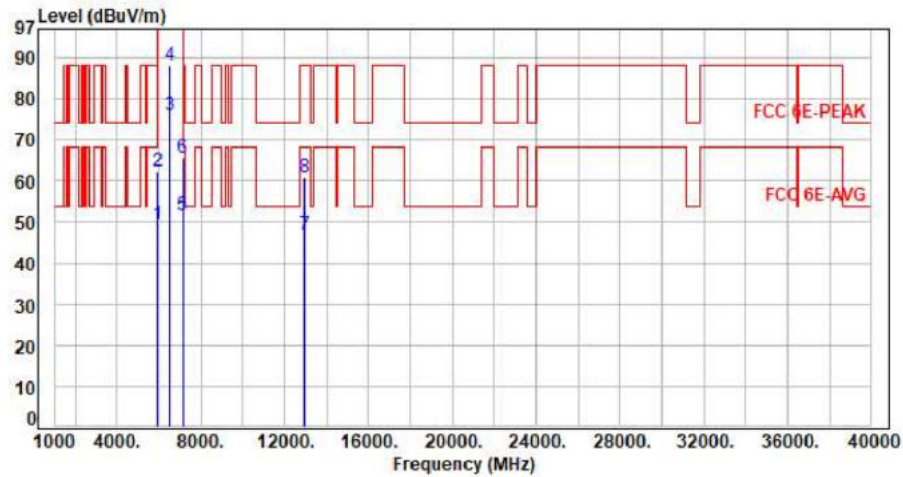

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.77	49.43	68.20	-18.77	Average	100	57	P
2	5925.00	7.66	54.51	62.17	88.20	-26.03	Peak	100	57	P
3	6485.00	8.34	67.79	76.13	200.00	-123.87	Average	100	57	P
4	6485.00	8.34	79.65	87.99	200.00	-112.01	Peak	100	57	P
5	7125.00	10.05	41.51	51.56	68.20	-16.64	Average	100	57	P
6	7125.00	10.05	55.43	65.48	88.20	-22.72	Peak	100	57	P
7	12970.00	19.47	27.53	47.00	68.20	-21.20	Average	100	198	P
8	12970.00	19.47	41.22	60.69	88.20	-27.51	Peak	100	198	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

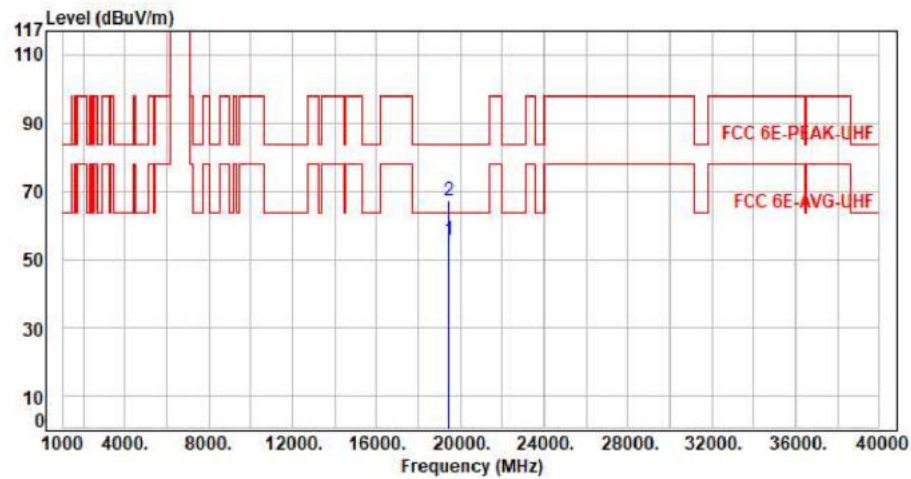


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.18	55.75	63.54	-7.79	Average	150	360	P
2	19455.00	11.57	55.55	67.12	83.54	-16.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

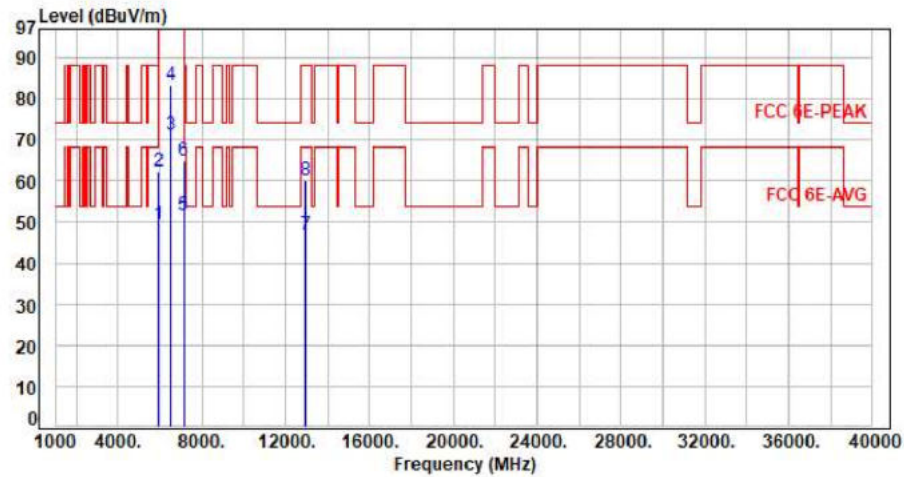


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.71	49.37	68.20	-18.83	Average	100	285	P
2	5925.00	7.66	54.64	62.30	88.20	-25.90	Peak	100	285	P
3	6485.00	8.34	62.71	71.05	200.00	-128.95	Average	100	285	P
4	6485.00	8.34	74.93	83.27	200.00	-116.73	Peak	100	285	P
5	7125.00	10.05	41.53	51.58	68.20	-16.62	Average	100	285	P
6	7125.00	10.05	54.79	64.84	88.20	-23.36	Peak	100	285	P
7	12970.00	19.47	27.32	46.79	68.20	-21.41	Average	100	256	P
8	12970.00	19.47	40.49	59.96	88.20	-28.24	Peak	100	256	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

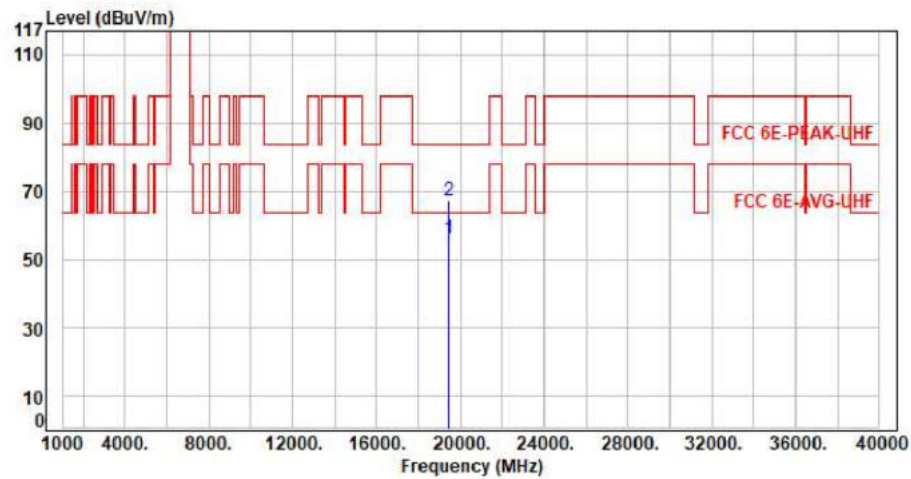


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.47	56.04	63.54	-7.50	Average	150	360	P
2	19455.00	11.57	55.43	67.00	83.54	-16.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

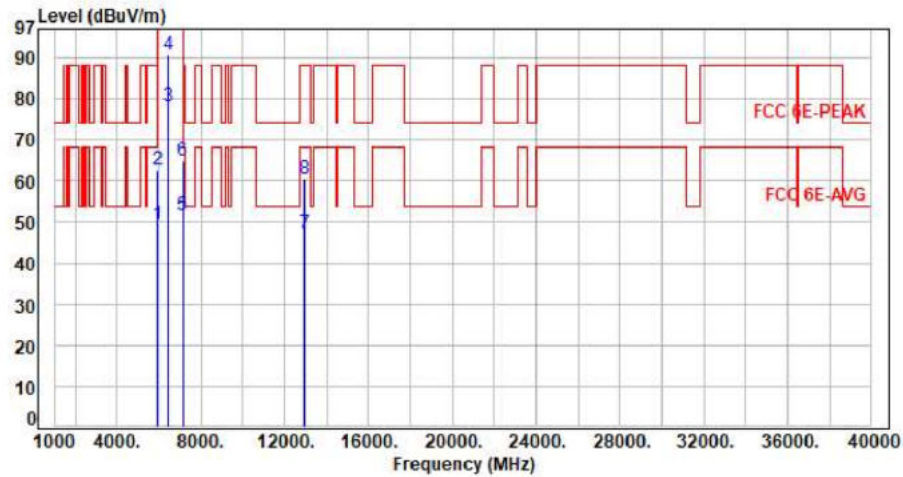

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.75	49.41	68.20	-18.79	Average	100	56	P
2	5925.00	7.66	55.21	62.87	88.20	-25.33	Peak	100	56	P
3	6465.00	8.32	69.92	78.24	200.00	-121.76	Average	100	56	P
4	6465.00	8.32	82.49	90.81	200.00	-109.19	Peak	100	56	P
5	7125.00	10.05	41.57	51.62	68.20	-16.58	Average	100	56	P
6	7125.00	10.05	54.73	64.78	88.20	-23.42	Peak	100	56	P
7	12930.00	19.27	27.85	47.12	68.20	-21.08	Average	100	194	P
8	12930.00	19.27	41.37	60.64	88.20	-27.56	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

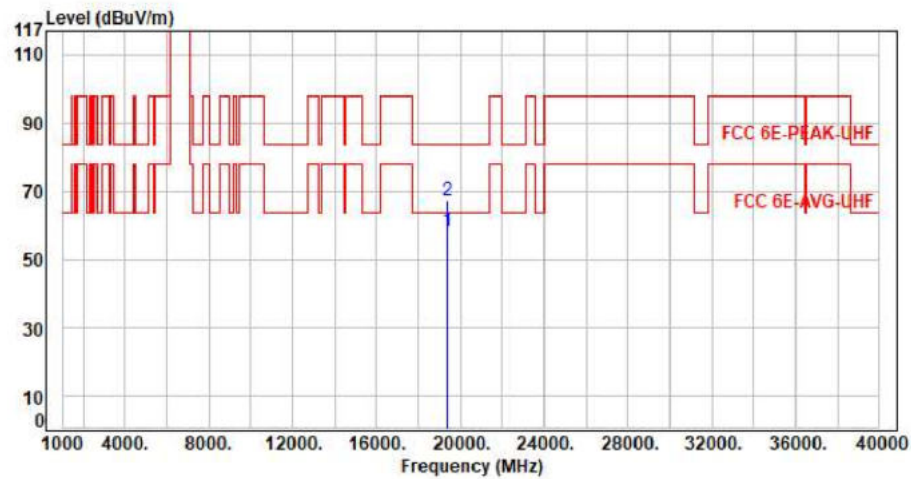


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	46.57	58.48	63.54	-5.06	Average	150	360	P
2	19395.00	11.91	55.08	66.99	83.54	-16.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

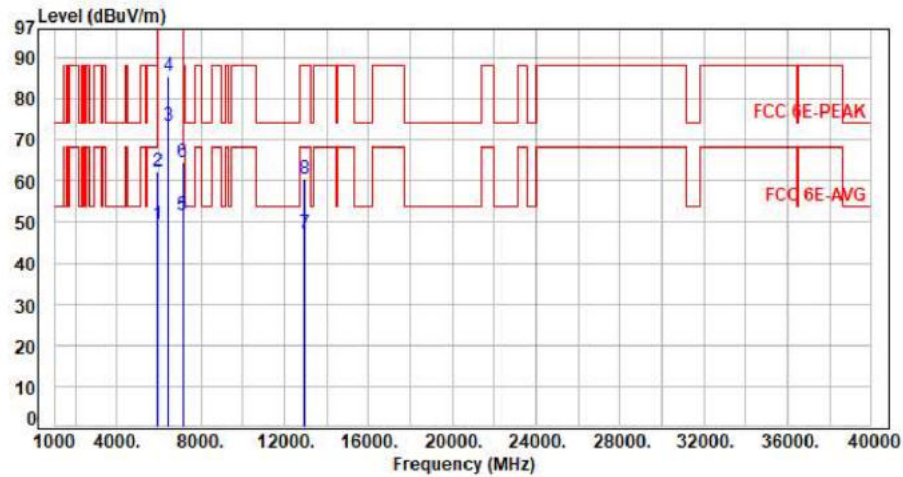

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.73	49.39	68.20	-18.81	Average	119	273	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	119	273	P
3	6465.00	8.32	65.08	73.40	200.00	-126.60	Average	119	273	P
4	6465.00	8.32	77.13	85.45	200.00	-114.55	Peak	119	273	P
5	7125.00	10.05	41.52	51.57	68.20	-16.63	Average	119	273	P
6	7125.00	10.05	54.45	64.50	88.20	-23.70	Peak	119	273	P
7	12930.00	19.27	27.78	47.05	68.20	-21.15	Average	100	258	P
8	12930.00	19.27	41.31	60.58	88.20	-27.62	Peak	100	258	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

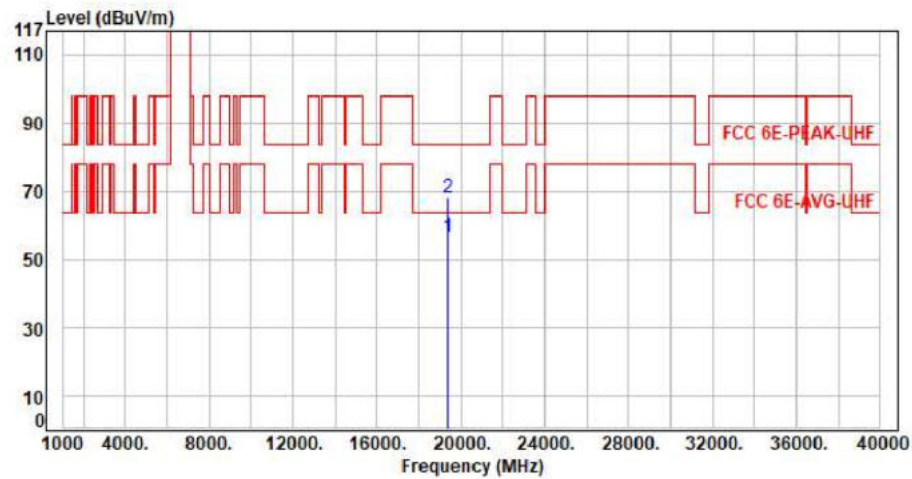


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	44.62	56.53	63.54	-7.01	Average	150	360	P
2	19395.00	11.91	55.97	67.88	83.54	-15.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

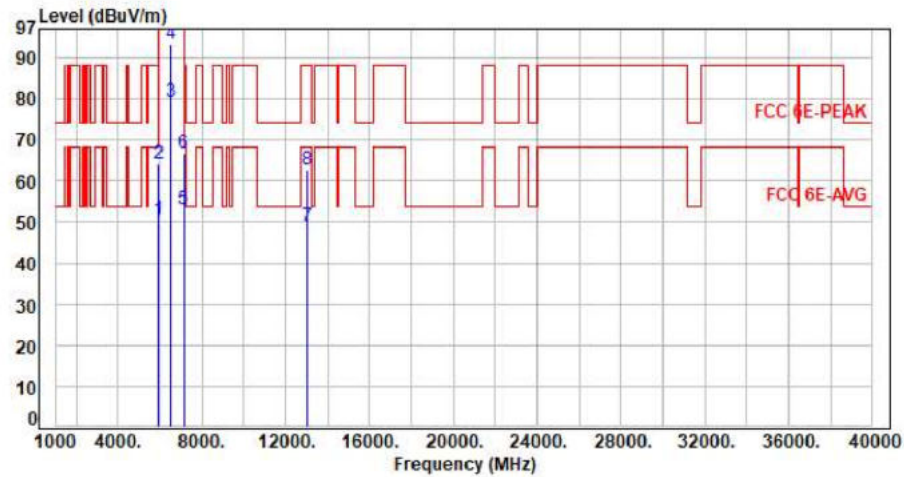

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.05	50.71	68.20	-17.49	Average	100	76	P
2	5925.00	7.66	56.45	64.11	88.20	-24.09	Peak	100	76	P
3	6525.00	8.45	70.89	79.34	200.00	-120.66	Average	100	76	P
4	6525.00	8.45	84.92	93.37	200.00	-106.63	Peak	100	76	P
5	7125.00	10.05	43.05	53.10	68.20	-15.10	Average	100	76	P
6	7125.00	10.05	56.65	66.70	88.20	-21.50	Peak	100	76	P
7	13050.00	20.02	29.02	49.04	68.20	-19.16	Average	100	215	P
8	13050.00	20.02	42.77	62.79	88.20	-25.41	Peak	100	215	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

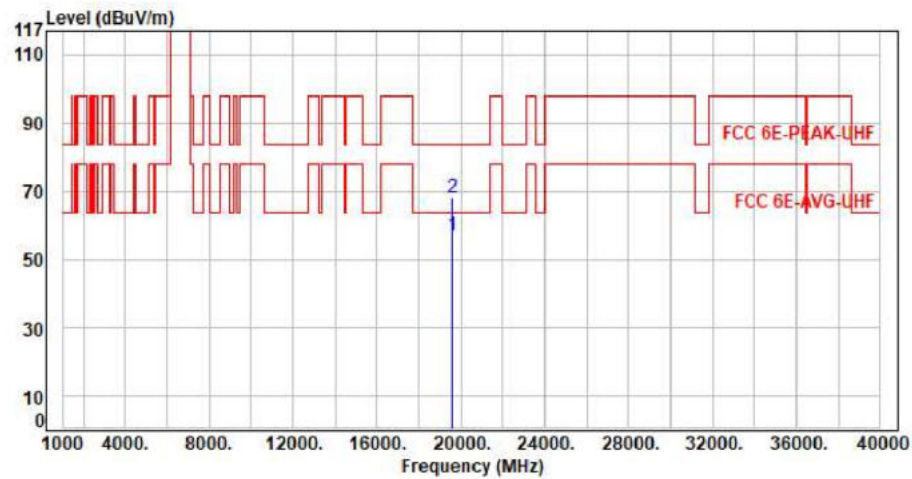

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	44.99	57.01	63.54	-6.53	Average	150	360	P
2	19575.00	12.02	56.08	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

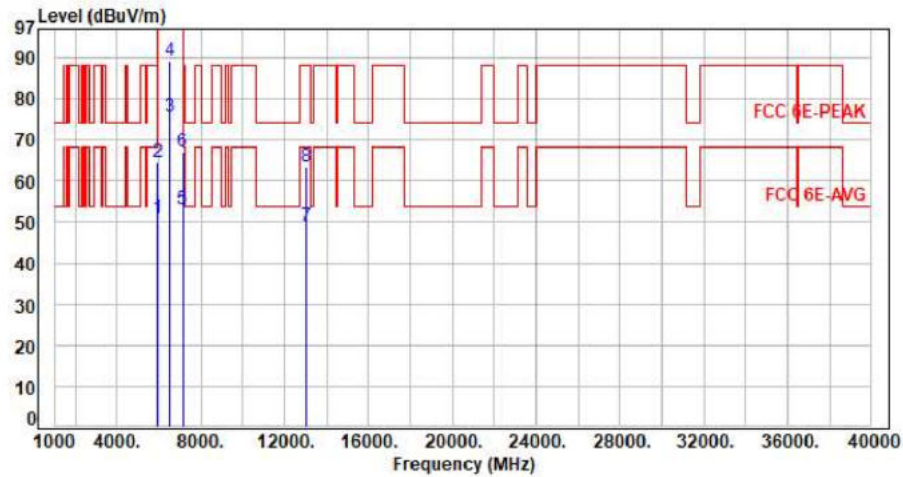


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.16	50.82	68.20	-17.38	Average	148	90	P
2	5925.00	7.66	57.04	64.70	88.20	-23.50	Peak	148	90	P
3	6525.00	8.45	67.33	75.78	200.00	-124.22	Average	148	90	P
4	6525.00	8.45	80.77	89.22	200.00	-110.78	Peak	148	90	P
5	7125.00	10.05	43.06	53.11	68.20	-15.09	Average	148	90	P
6	7125.00	10.05	56.98	67.03	88.20	-21.17	Peak	148	90	P
7	13050.00	20.02	28.91	48.93	68.20	-19.27	Average	100	133	P
8	13050.00	20.02	43.34	63.36	88.20	-24.84	Peak	100	133	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

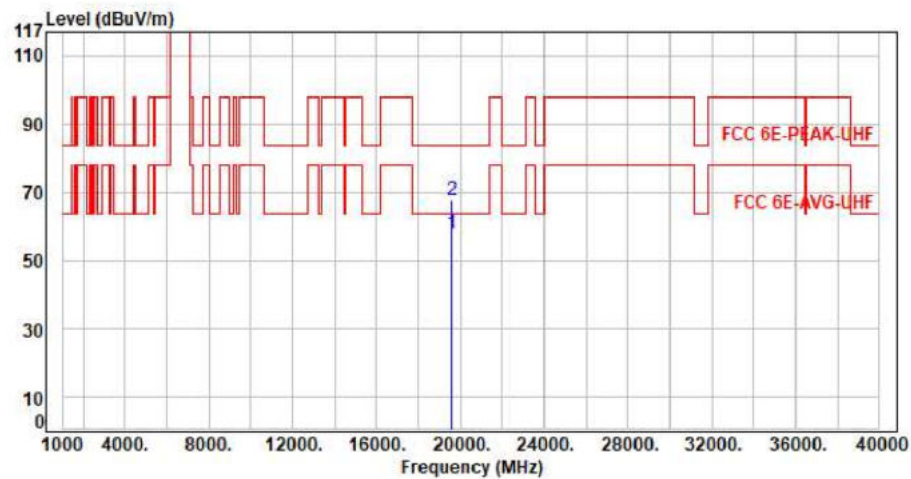


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	46.02	58.04	63.54	-5.50	Average	150	360	P
2	19575.00	12.02	55.52	67.54	83.54	-16.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

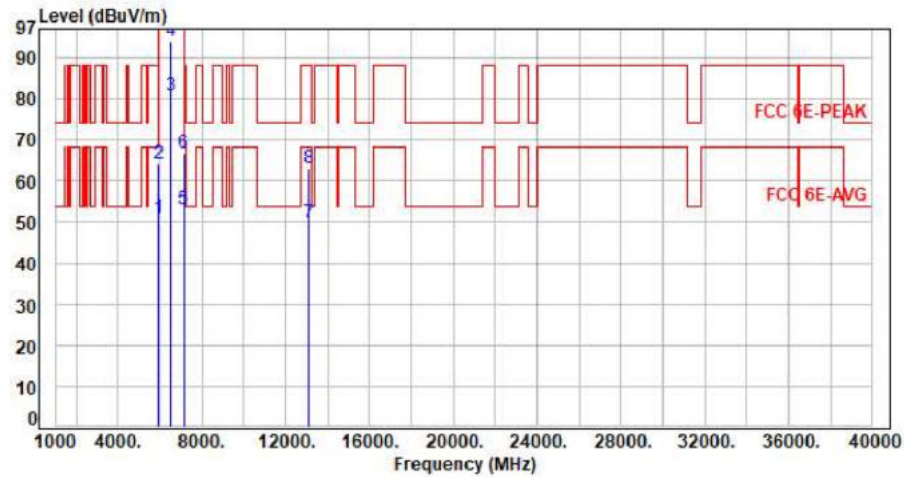

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.11	50.77	68.20	-17.43	Average	255	62	P
2	5925.00	7.66	56.36	64.02	88.20	-24.18	Peak	255	62	P
3	6545.00	8.55	72.05	80.60	200.00	-119.40	Average	255	62	P
4	6545.00	8.55	85.68	94.23	200.00	-105.77	Peak	255	62	P
5	7125.00	10.05	43.06	53.11	68.20	-15.09	Average	255	62	P
6	7125.00	10.05	56.85	66.90	88.20	-21.30	Peak	255	62	P
7	13090.00	20.20	29.55	49.75	68.20	-18.45	Average	100	232	P
8	13090.00	20.20	42.85	63.05	88.20	-25.15	Peak	100	232	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

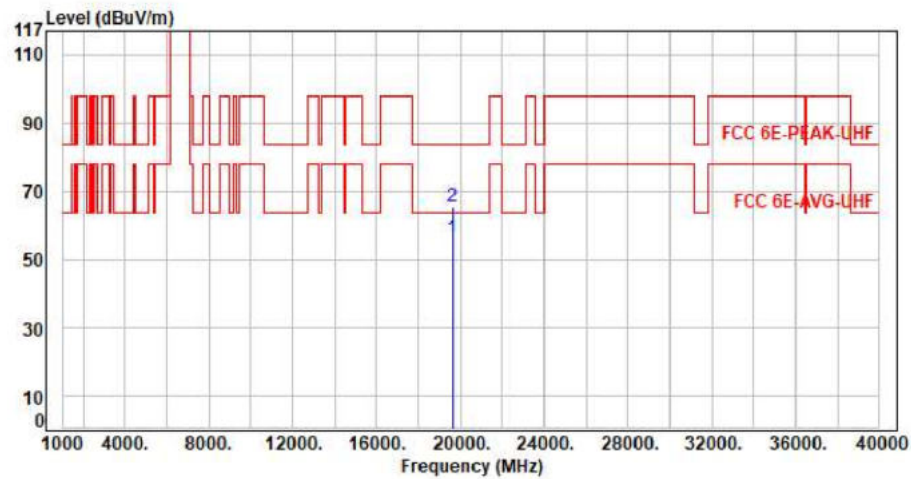


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.52	56.10	63.54	-7.44	Average	150	360	P
2	19635.00	11.58	53.79	65.37	83.54	-18.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

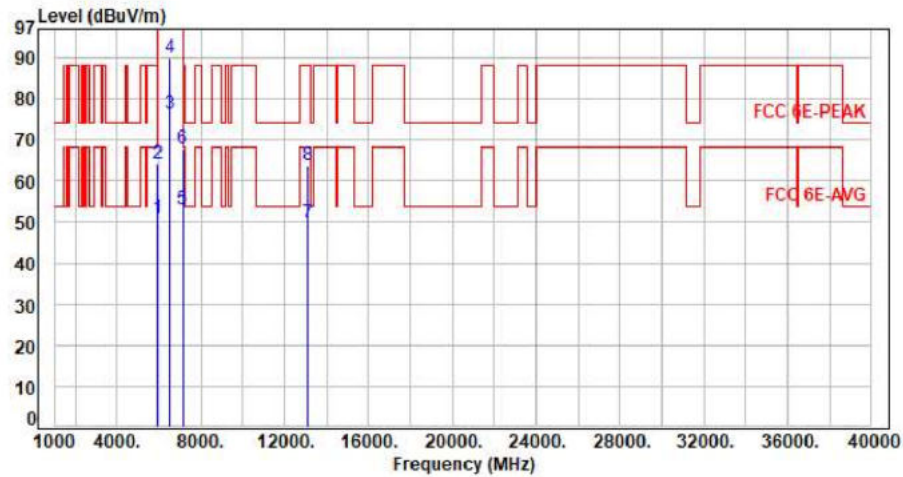

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.16	50.82	68.20	-17.38	Average	140	90	P
2	5925.00	7.66	56.37	64.03	88.20	-24.17	Peak	140	90	P
3	6545.00	8.55	67.86	76.41	200.00	-123.59	Average	140	90	P
4	6545.00	8.55	81.60	90.15	200.00	-109.85	Peak	140	90	P
5	7125.00	10.05	43.09	53.14	68.20	-15.06	Average	140	90	P
6	7125.00	10.05	57.63	67.68	88.20	-20.52	Peak	140	90	P
7	13090.00	20.20	29.54	49.74	68.20	-18.46	Average	100	106	P
8	13090.00	20.20	43.49	63.69	88.20	-24.51	Peak	100	106	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

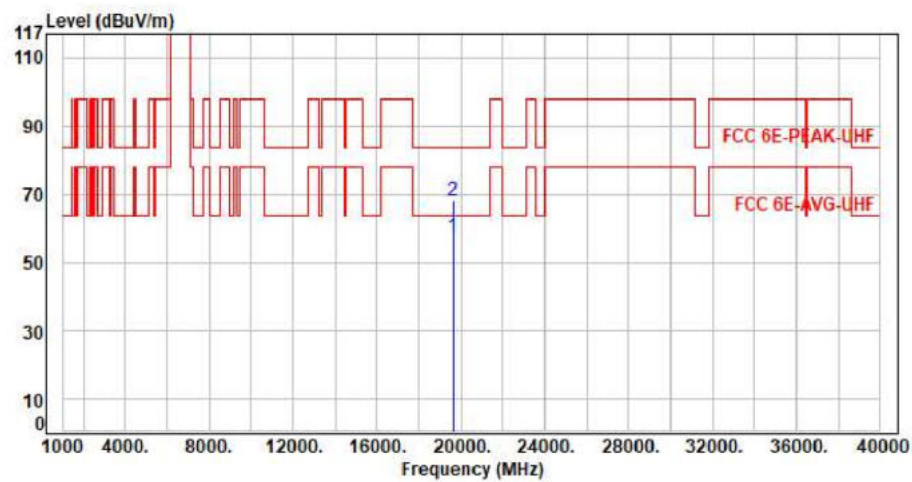

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	45.80	57.38	63.54	-6.16	Average	150	360	P
2	19635.00	11.58	56.29	67.87	83.54	-15.67	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor