




For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

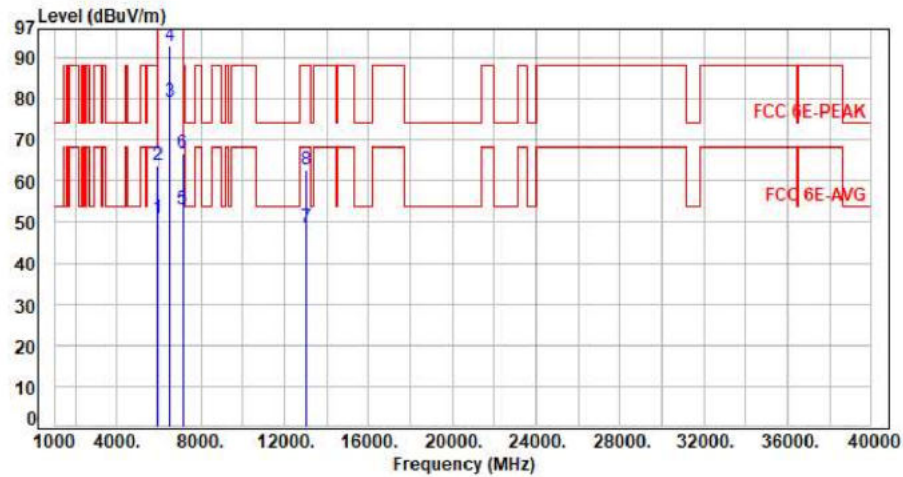

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.13	50.79	68.20	-17.41	Average	100	341	P
2	5925.00	7.66	56.31	63.97	88.20	-24.23	Peak	100	341	P
3	6505.00	8.37	70.88	79.25	200.00	-120.75	Average	100	341	P
4	6505.00	8.37	84.50	92.87	200.00	-107.13	Peak	100	341	P
5	7125.00	10.05	43.05	53.10	68.20	-15.10	Average	100	341	P
6	7125.00	10.05	56.75	66.80	88.20	-21.40	Peak	100	341	P
7	13010.00	19.69	28.91	48.60	68.20	-19.60	Average	100	286	P
8	13010.00	19.69	43.09	62.78	88.20	-25.42	Peak	100	286	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

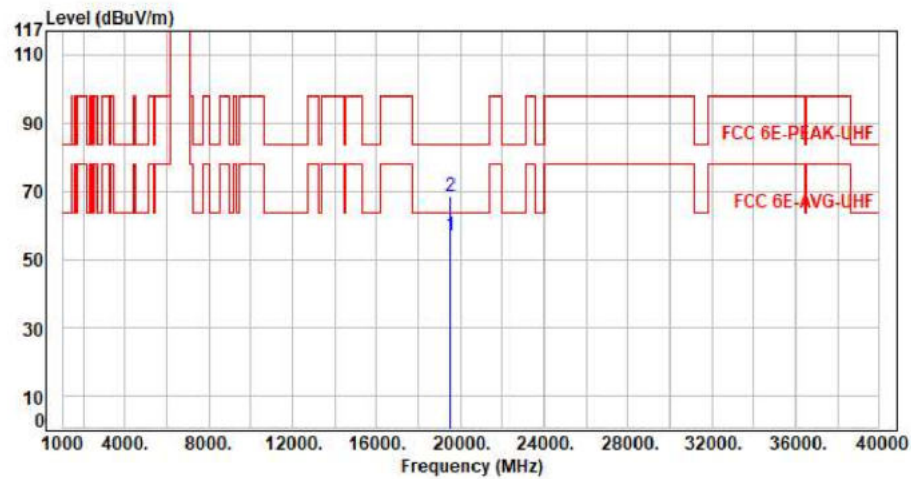


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.08	56.99	63.54	-6.55	Average	150	360	P
2	19515.00	11.91	56.71	68.62	83.54	-14.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

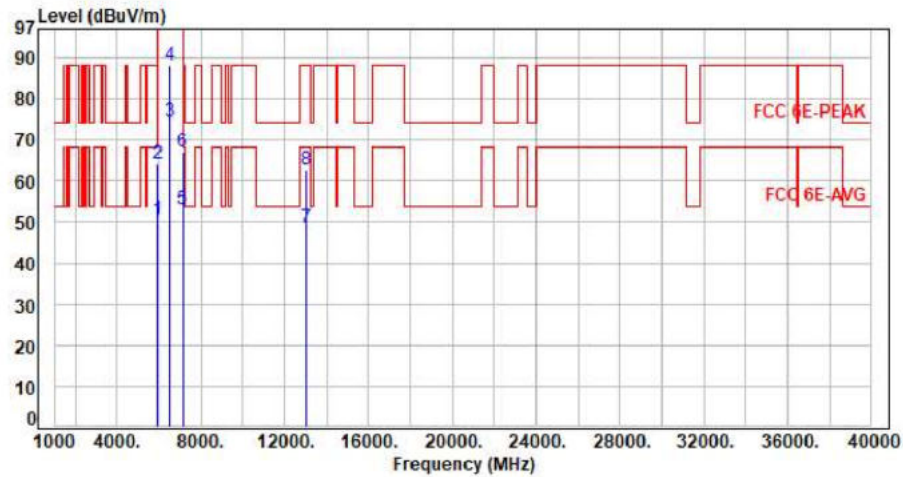

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.03	50.69	68.20	-17.51	Average	103	355	P
2	5925.00	7.66	56.35	64.01	88.20	-24.19	Peak	103	355	P
3	6505.00	8.37	66.12	74.49	200.00	-125.51	Average	103	355	P
4	6505.00	8.37	79.61	87.98	200.00	-112.02	Peak	103	355	P
5	7125.00	10.05	42.99	53.04	68.20	-15.16	Average	103	355	P
6	7125.00	10.05	56.92	66.97	88.20	-21.23	Peak	103	355	P
7	13010.00	19.69	28.90	48.59	68.20	-19.61	Average	100	128	P
8	13010.00	19.69	43.00	62.69	88.20	-25.51	Peak	100	128	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

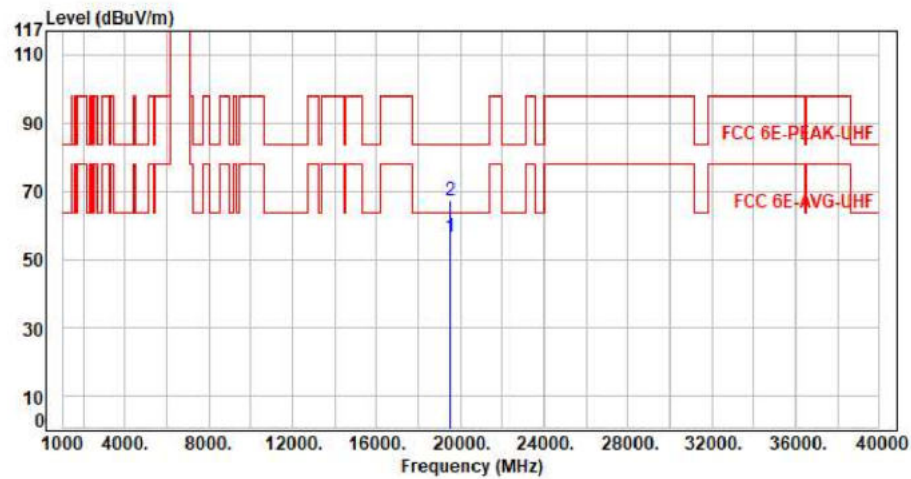


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	44.58	56.49	63.54	-7.05	Average	150	360	P
2	19515.00	11.91	55.32	67.23	83.54	-16.31	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

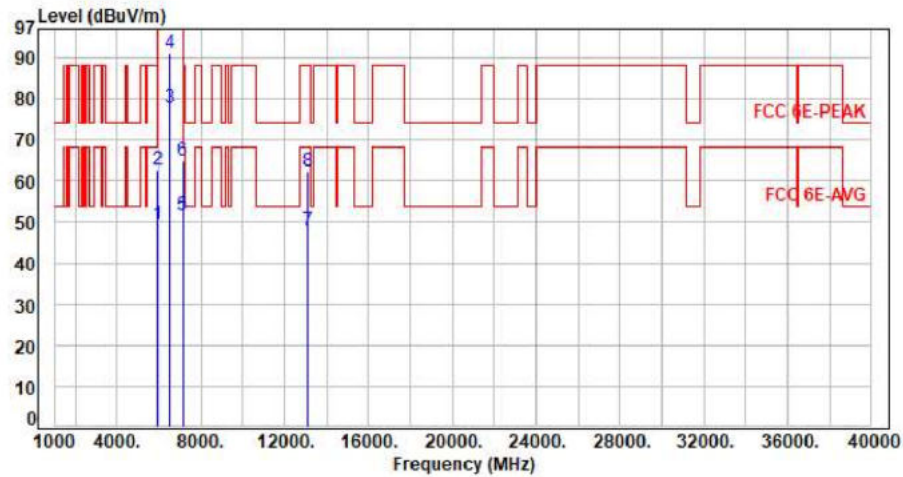

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.72	49.38	68.20	-18.82	Average	115	76	P
2	5925.00	7.66	54.92	62.58	88.20	-25.62	Peak	115	76	P
3	6535.00	8.50	69.20	77.70	200.00	-122.30	Average	115	76	P
4	6535.00	8.50	82.63	91.13	200.00	-108.87	Peak	115	76	P
5	7125.00	10.05	41.45	51.50	68.20	-16.70	Average	115	76	P
6	7125.00	10.05	54.79	64.84	88.20	-23.36	Peak	115	76	P
7	13070.00	20.11	27.69	47.80	68.20	-20.40	Average	100	124	P
8	13070.00	20.11	42.31	62.42	88.20	-25.78	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

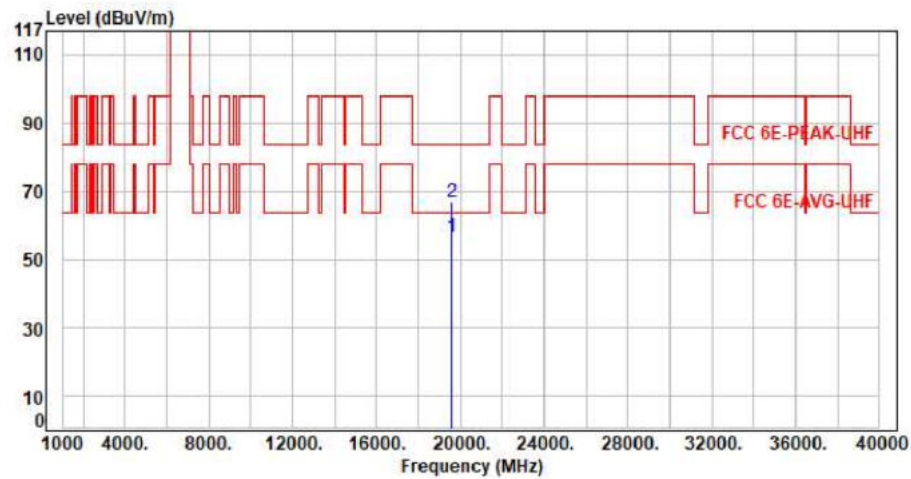


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.65	56.43	63.54	-7.11	Average	150	360	P
2	19605.00	11.78	55.05	66.83	83.54	-16.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

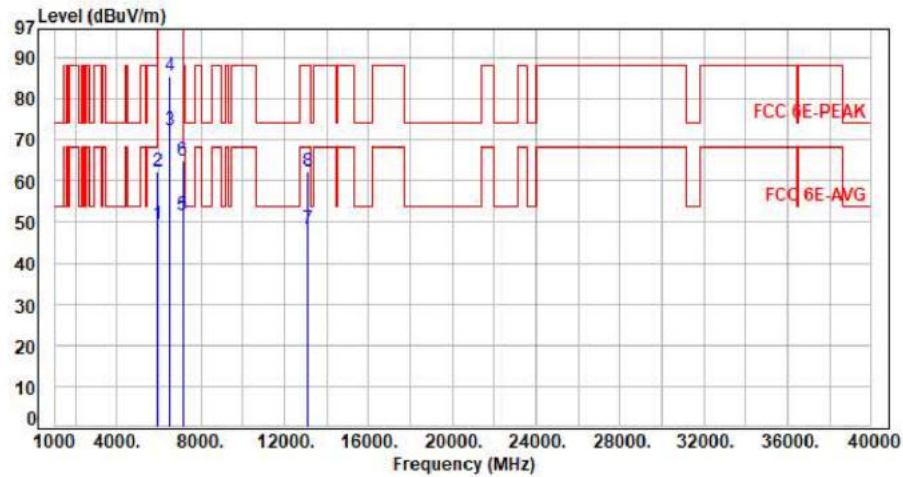

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.72	49.38	68.20	-18.82	Average	138	82	P
2	5925.00	7.66	54.81	62.47	88.20	-25.73	Peak	138	82	P
3	6535.00	8.50	63.77	72.27	200.00	-127.73	Average	138	82	P
4	6535.00	8.50	77.19	85.69	200.00	-114.31	Peak	138	82	P
5	7125.00	10.05	41.45	51.50	68.20	-16.70	Average	138	82	P
6	7125.00	10.05	54.96	65.01	88.20	-23.19	Peak	138	82	P
7	13070.00	20.11	28.31	48.42	68.20	-19.78	Average	100	114	P
8	13070.00	20.11	42.18	62.29	88.20	-25.91	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

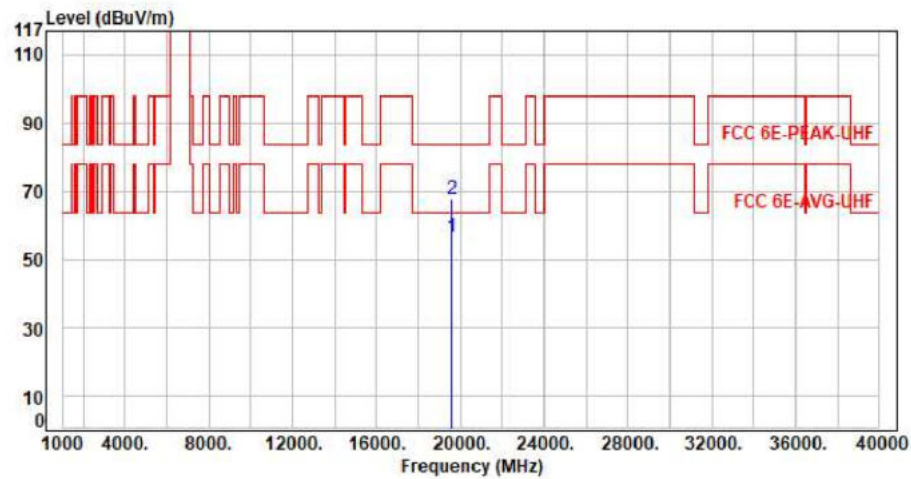

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.82	56.60	63.54	-6.94	Average	150	360	P
2	19605.00	11.78	55.89	67.67	83.54	-15.87	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

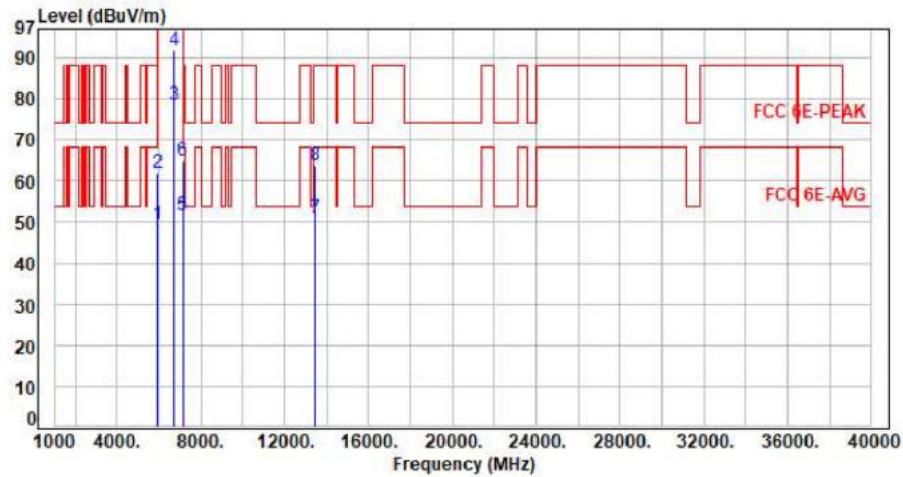


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.61	49.27	68.20	-18.93	Average	100	63	P
2	5925.00	7.66	54.47	62.13	88.20	-26.07	Peak	100	63	P
3	6715.00	9.29	69.38	78.67	200.00	-121.33	Average	100	63	P
4	6715.00	9.29	82.71	92.00	200.00	-108.00	Peak	100	63	P
5	7125.00	10.05	41.57	51.62	68.20	-16.58	Average	100	63	P
6	7125.00	10.05	54.95	65.00	88.20	-23.20	Peak	100	63	P
7	13430.00	21.71	29.15	50.86	68.20	-17.34	Average	100	134	P
8	13430.00	21.71	42.11	63.82	88.20	-24.38	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

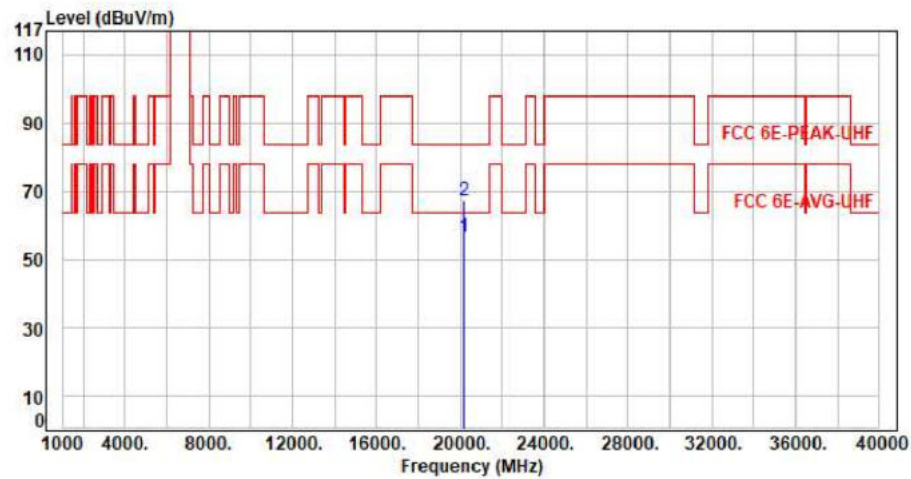


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.24	56.67	63.54	-6.87	Average	150	360	P
2	20145.00	11.43	55.90	67.33	83.54	-16.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

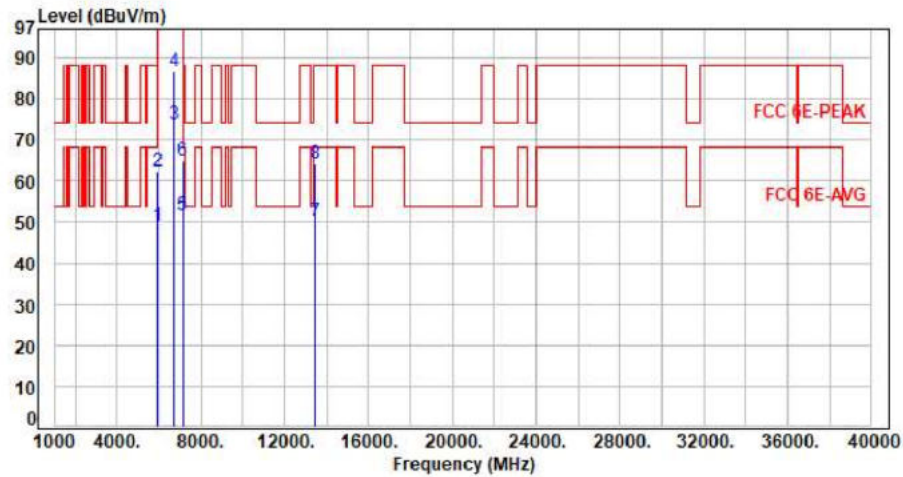

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.57	49.23	68.20	-18.97	Average	108	77	P
2	5925.00	7.66	54.77	62.43	88.20	-25.77	Peak	108	77	P
3	6715.00	9.29	64.33	73.62	200.00	-126.38	Average	108	77	P
4	6715.00	9.29	77.35	86.64	200.00	-113.36	Peak	108	77	P
5	7125.00	10.05	41.45	51.50	68.20	-16.70	Average	108	77	P
6	7125.00	10.05	54.72	64.77	88.20	-23.43	Peak	108	77	P
7	13430.00	21.71	28.63	50.34	68.20	-17.86	Average	100	108	P
8	13430.00	21.71	42.63	64.34	88.20	-23.86	Peak	100	108	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

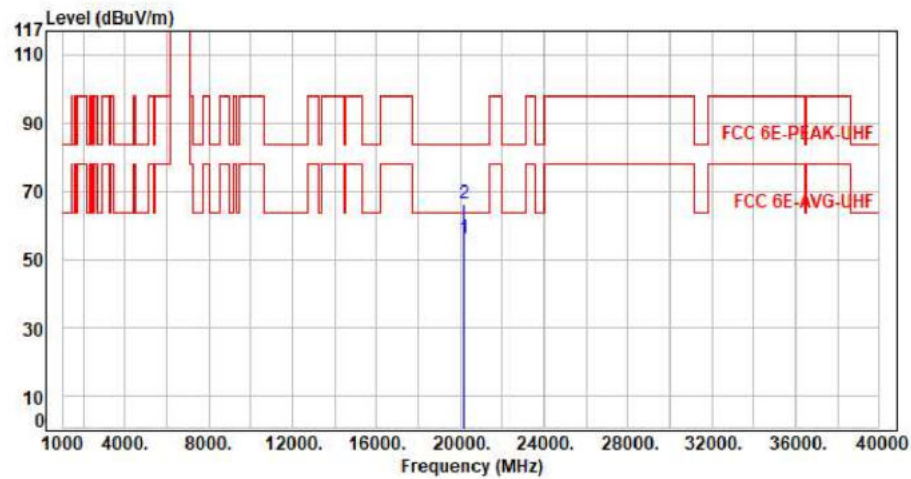


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.67	56.10	63.54	-7.44	Average	150	360	P
2	20145.00	11.43	54.81	66.24	83.54	-17.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

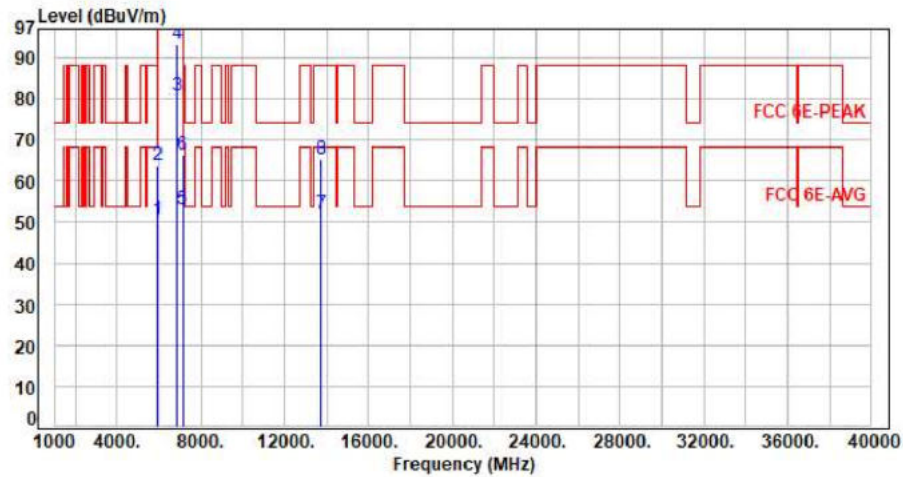

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.01	50.67	68.20	-17.53	Average	100	66	P
2	5925.00	7.66	56.09	63.75	88.20	-24.45	Peak	100	66	P
3	6855.00	9.50	71.28	80.78	200.00	-119.22	Average	100	66	P
4	6855.00	9.50	83.65	93.15	200.00	-106.85	Peak	100	66	P
5	7125.00	10.05	43.16	53.21	68.20	-14.99	Average	100	66	P
6	7125.00	10.05	56.16	66.21	88.20	-21.99	Peak	100	66	P
7	13710.00	22.48	29.67	52.15	68.20	-16.05	Average	100	134	P
8	13710.00	22.48	42.64	65.12	88.20	-23.08	Peak	100	134	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

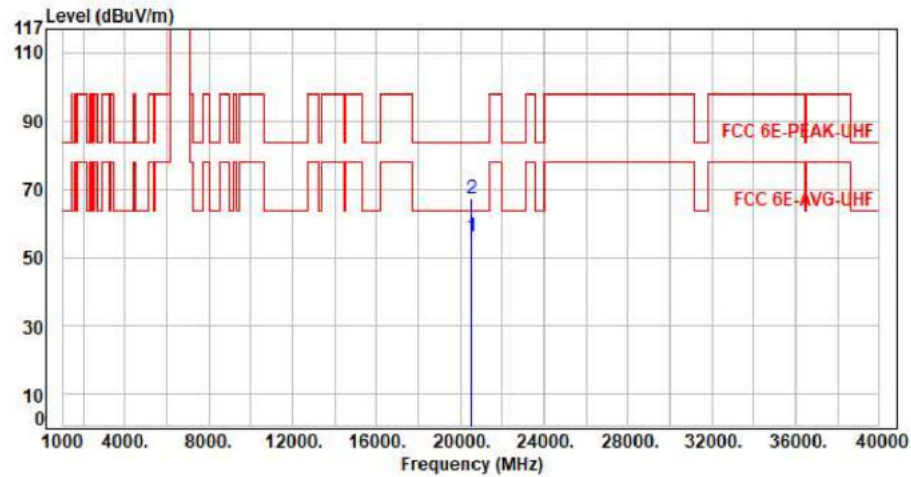


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.88	56.26	63.54	-7.28	Average	150	360	P
2	20565.00	11.38	55.59	66.97	83.54	-16.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

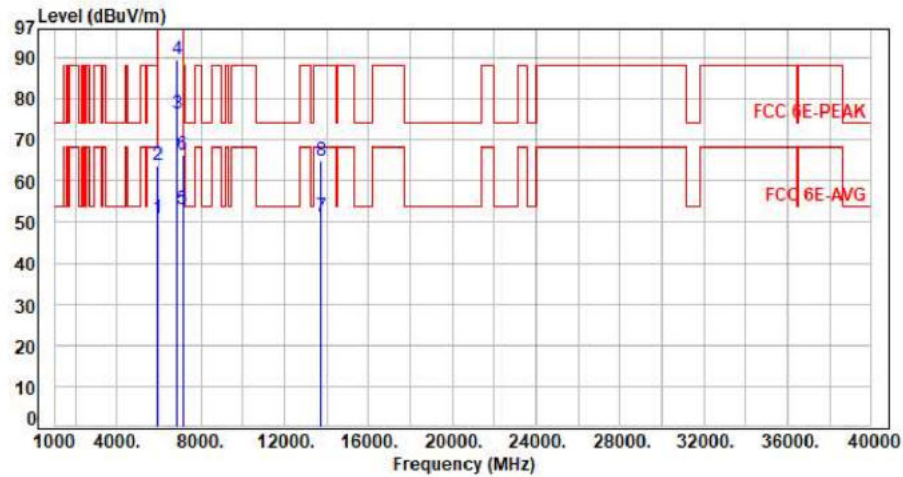

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.06	50.72	68.20	-17.48	Average	126	87	P
2	5925.00	7.66	56.29	63.95	88.20	-24.25	Peak	126	87	P
3	6855.00	9.50	66.83	76.33	200.00	-123.67	Average	126	87	P
4	6855.00	9.50	80.01	89.51	200.00	-110.49	Peak	126	87	P
5	7125.00	10.05	43.07	53.12	68.20	-15.08	Average	126	87	P
6	7125.00	10.05	56.46	66.51	88.20	-21.69	Peak	126	87	P
7	13710.00	22.48	28.67	51.15	68.20	-17.05	Average	100	124	P
8	13710.00	22.48	42.34	64.82	88.20	-23.38	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

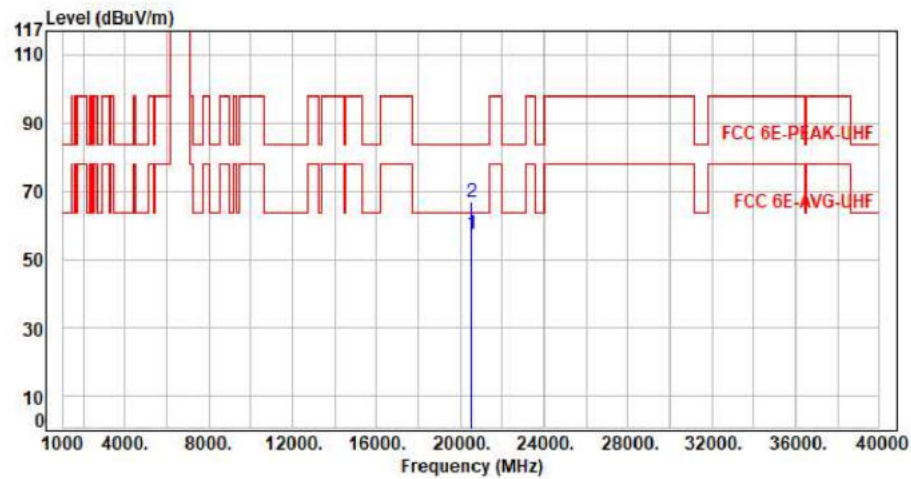


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	45.79	57.17	63.54	-6.37	Average	150	360	P
2	20565.00	11.38	55.21	66.59	83.54	-16.95	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

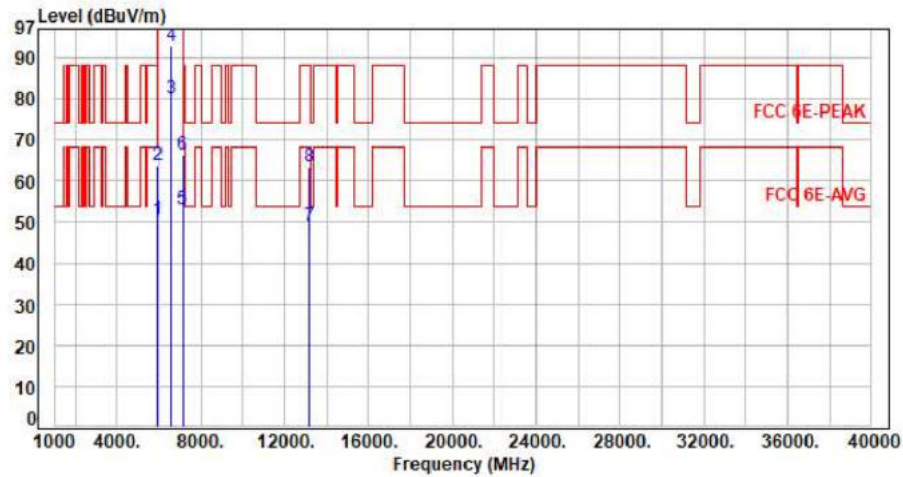

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.01	50.67	68.20	-17.53	Average	100	64	P
2	5925.00	7.66	56.14	63.80	88.20	-24.40	Peak	100	64	P
3	6565.00	8.67	71.47	80.14	200.00	-119.86	Average	100	64	P
4	6565.00	8.67	84.45	93.12	200.00	-106.88	Peak	100	64	P
5	7125.00	10.05	43.14	53.19	68.20	-15.01	Average	100	64	P
6	7125.00	10.05	56.17	66.22	88.20	-21.98	Peak	100	64	P
7	13130.00	20.32	28.65	48.97	68.20	-19.23	Average	100	134	P
8	13130.00	20.32	43.22	63.54	88.20	-24.66	Peak	100	134	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

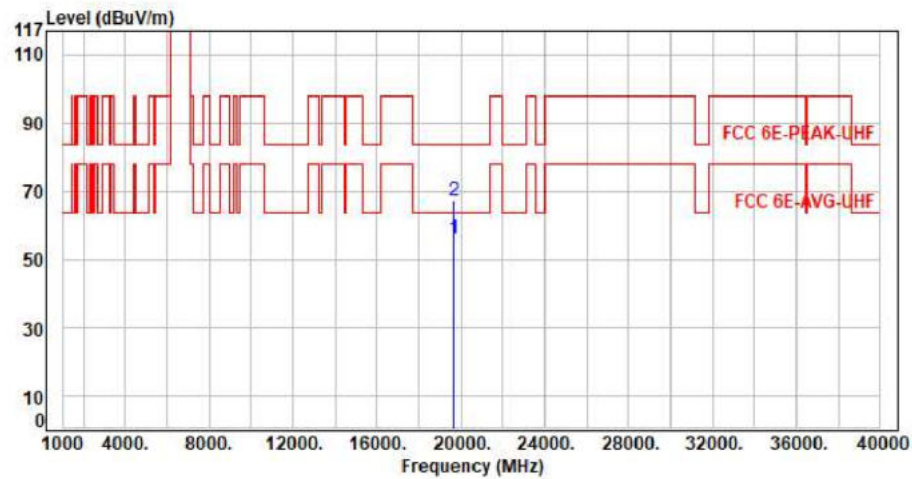

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.65	56.10	63.54	-7.44	Average	150	360	P
2	19695.00	11.45	55.84	67.29	83.54	-16.25	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

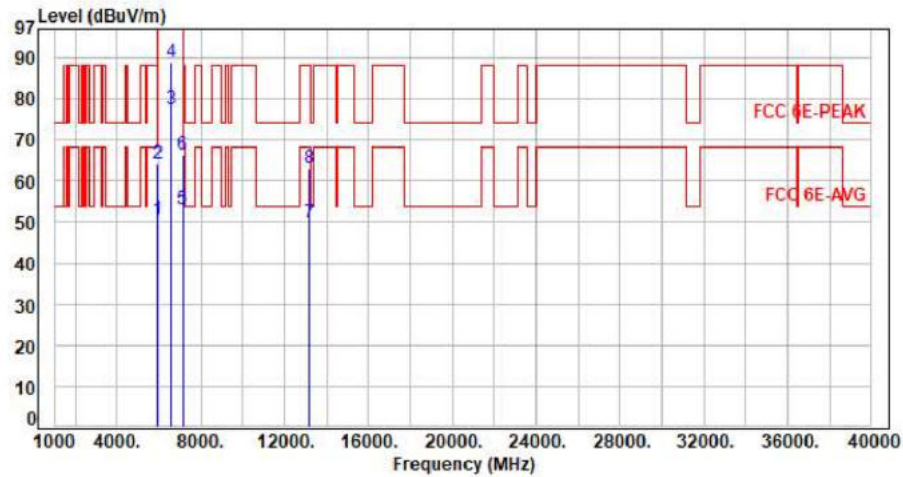

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.98	50.64	68.20	-17.56	Average	120	88	P
2	5925.00	7.66	56.51	64.17	88.20	-24.03	Peak	120	88	P
3	6565.00	8.67	68.76	77.43	200.00	-122.57	Average	120	88	P
4	6565.00	8.67	80.21	88.88	200.00	-111.12	Peak	120	88	P
5	7125.00	10.05	43.06	53.11	68.20	-15.09	Average	120	88	P
6	7125.00	10.05	56.17	66.22	88.20	-21.98	Peak	120	88	P
7	13130.00	20.32	29.63	49.95	68.20	-18.25	Average	100	114	P
8	13130.00	20.32	42.78	63.10	88.20	-25.10	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

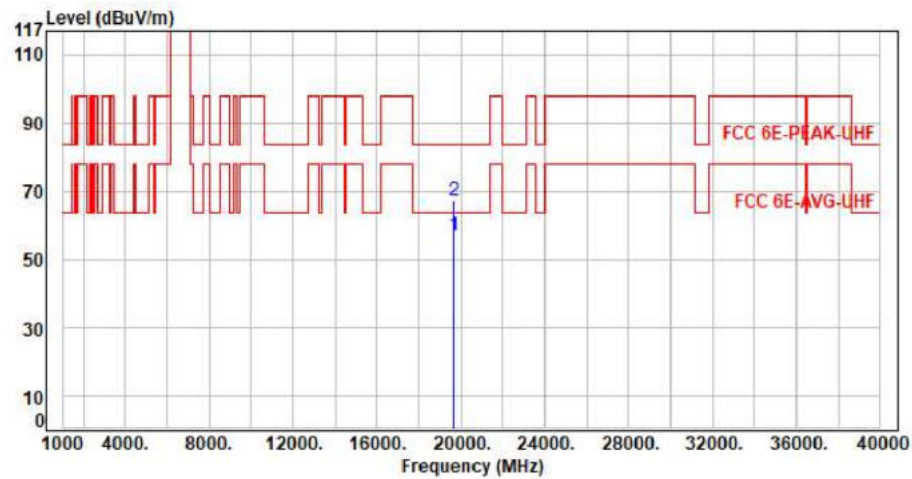

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.62	57.07	63.54	-6.47	Average	150	360	P
2	19695.00	11.45	55.61	67.06	83.54	-16.48	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

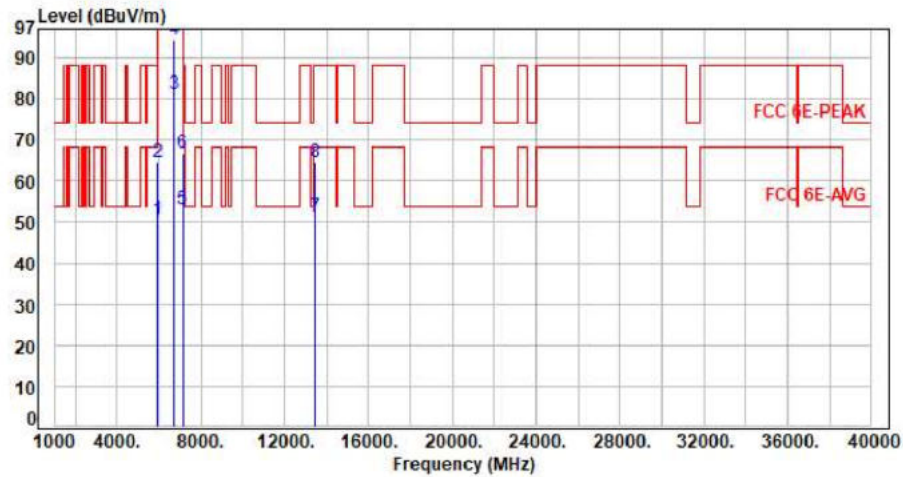

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.02	50.68	68.20	-17.52	Average	100	63	P
2	5925.00	7.66	56.81	64.47	88.20	-23.73	Peak	100	63	P
3	6725.00	9.33	71.70	81.03	200.00	-118.97	Average	100	63	P
4	6725.00	9.33	84.91	94.24	200.00	-105.76	Peak	100	63	P
5	7125.00	10.05	43.23	53.28	68.20	-14.92	Average	100	63	P
6	7125.00	10.05	56.53	66.58	88.20	-21.62	Peak	100	63	P
7	13450.00	21.80	29.63	51.43	68.20	-16.77	Average	100	234	P
8	13450.00	21.80	42.63	64.43	88.20	-23.77	Peak	100	234	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

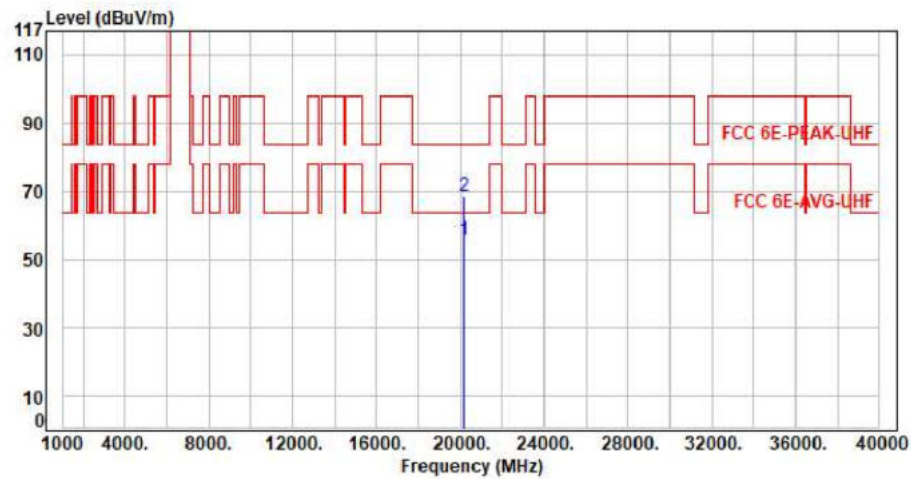

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.33	55.79	63.54	-7.75	Average	150	360	P
2	20175.00	11.46	57.06	68.52	83.54	-15.02	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

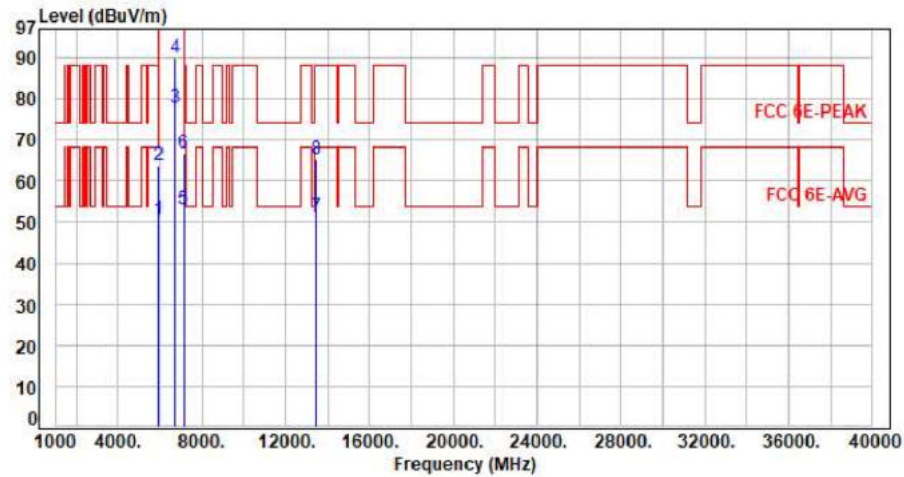

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.04	50.70	68.20	-17.50	Average	127	88	P
2	5925.00	7.66	56.25	63.91	88.20	-24.29	Peak	127	88	P
3	6725.00	9.33	68.47	77.80	200.00	-122.20	Average	127	88	P
4	6725.00	9.33	80.69	90.02	200.00	-109.98	Peak	127	88	P
5	7125.00	10.05	43.05	53.10	68.20	-15.10	Average	127	88	P
6	7125.00	10.05	56.52	66.57	88.20	-21.63	Peak	127	88	P
7	13450.00	21.80	29.63	51.43	68.20	-16.77	Average	100	127	P
8	13450.00	21.80	43.30	65.10	88.20	-23.10	Peak	100	127	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

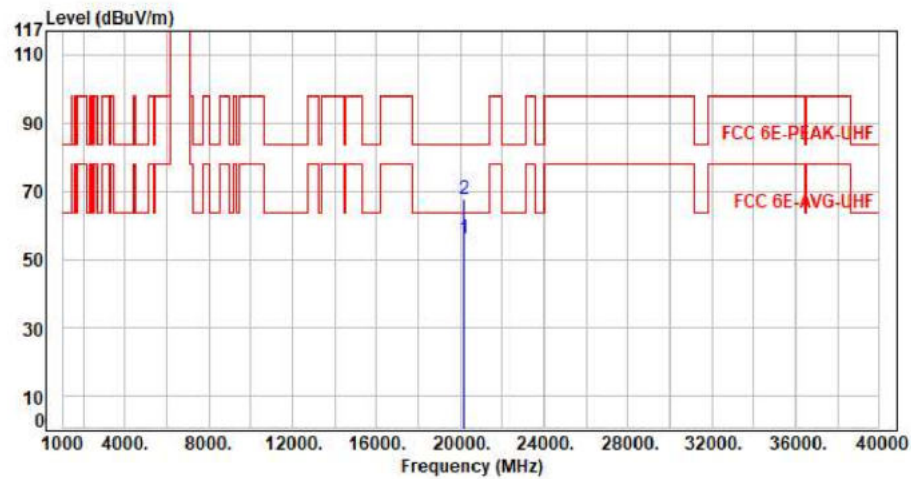


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.56	56.02	63.54	-7.52	Average	150	360	P
2	20175.00	11.46	56.36	67.82	83.54	-15.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

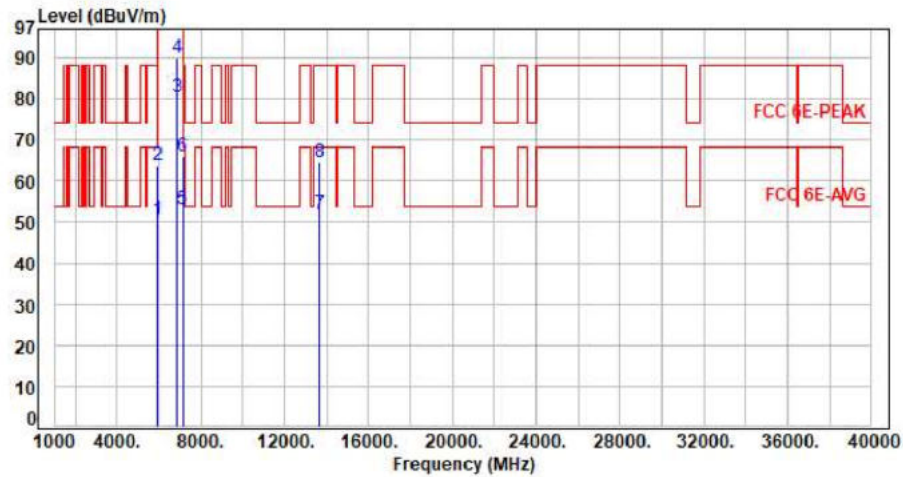

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.96	50.62	68.20	-17.58	Average	100	69	P
2	5925.00	7.66	56.32	63.98	88.20	-24.22	Peak	100	69	P
3	6845.00	9.48	70.85	80.33	200.00	-119.67	Average	100	69	P
4	6845.00	9.48	80.43	89.91	200.00	-110.09	Peak	100	69	P
5	7125.00	10.05	42.98	53.03	68.20	-15.17	Average	100	69	P
6	7125.00	10.05	55.94	65.99	88.20	-22.21	Peak	100	69	P
7	13690.00	22.40	29.63	52.03	68.20	-16.17	Average	100	124	P
8	13690.00	22.40	42.10	64.50	88.20	-23.70	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

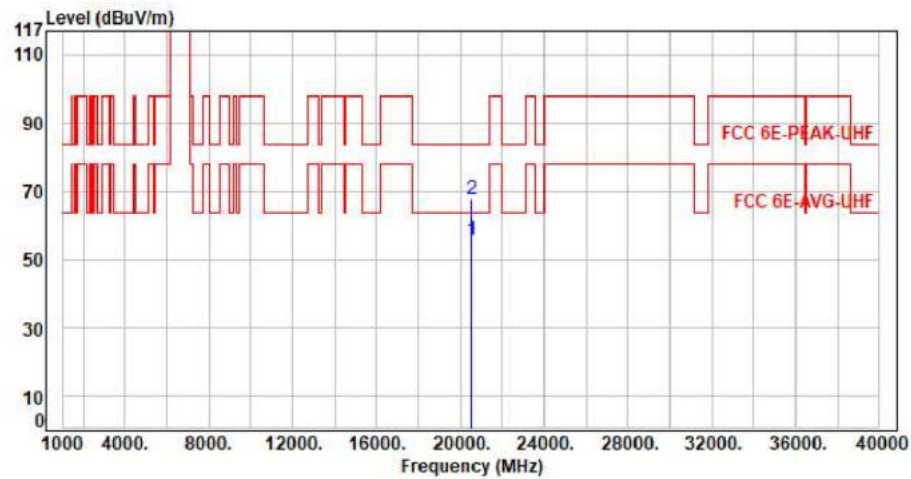


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.09	55.53	63.54	-8.01	Average	150	360	P
2	20535.00	11.44	55.99	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

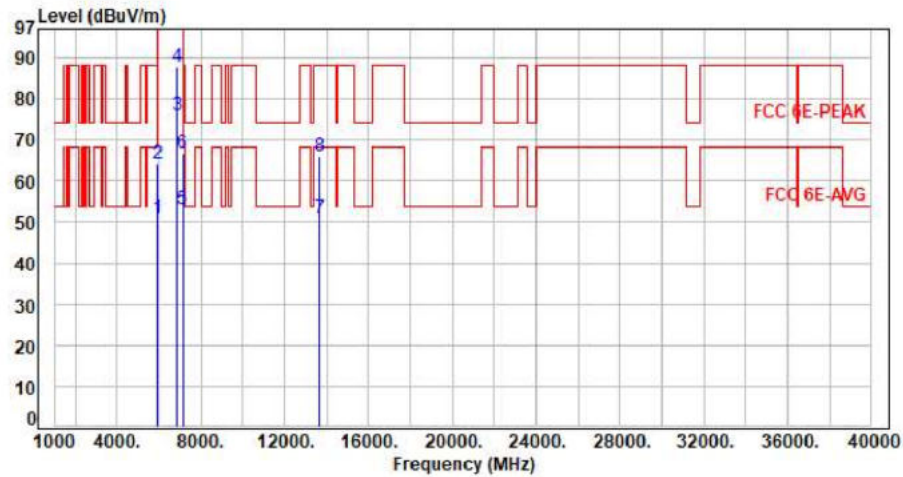

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.06	50.72	68.20	-17.48	Average	137	89	P
2	5925.00	7.66	56.45	64.11	88.20	-24.09	Peak	137	89	P
3	6845.00	9.48	66.34	75.82	200.00	-124.18	Average	137	89	P
4	6845.00	9.48	78.46	87.94	200.00	-112.06	Peak	137	89	P
5	7125.00	10.05	43.19	53.24	68.20	-14.96	Average	137	89	P
6	7125.00	10.05	56.66	66.71	88.20	-21.49	Peak	137	89	P
7	13690.00	22.40	28.63	51.03	68.20	-17.17	Average	100	134	P
8	13690.00	22.40	43.55	65.95	88.20	-22.25	Peak	100	134	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

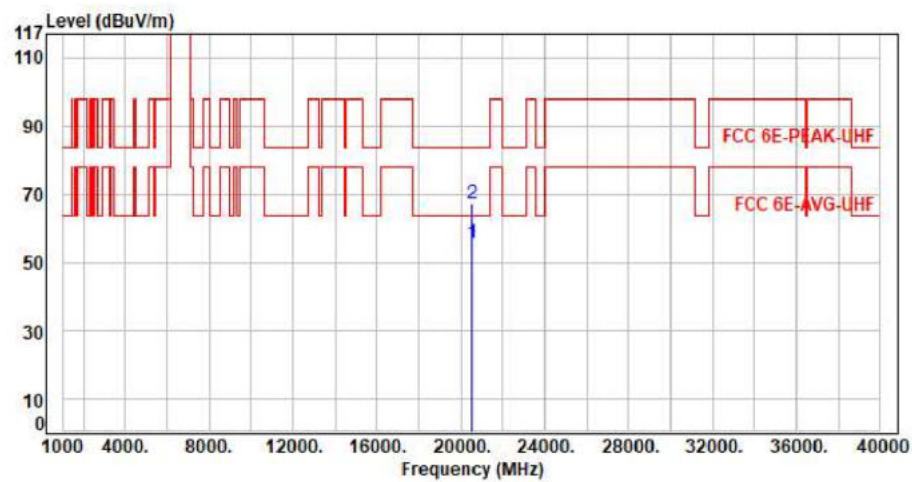

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.22	55.66	63.54	-7.88	Average	150	360	P
2	20535.00	11.44	55.83	67.27	83.54	-16.27	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

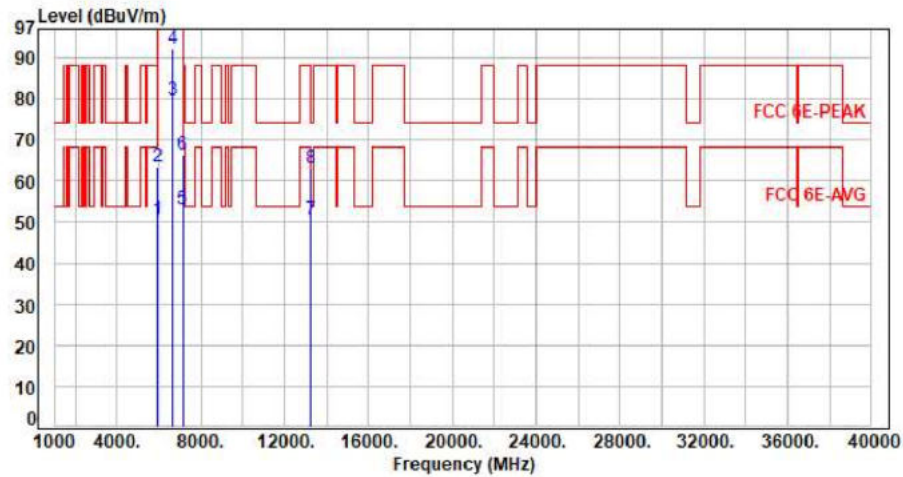

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.82	50.48	68.20	-17.72	Average	100	71	P
2	5925.00	7.66	55.96	63.62	88.20	-24.58	Peak	100	71	P
3	6625.00	8.94	70.59	79.53	200.00	-120.47	Average	100	71	P
4	6625.00	8.94	83.29	92.23	200.00	-107.77	Peak	100	71	P
5	7125.00	10.05	43.12	53.17	68.20	-15.03	Average	100	71	P
6	7125.00	10.05	56.19	66.24	88.20	-21.96	Peak	100	71	P
7	13250.00	21.00	29.64	50.64	54.00	-3.36	Average	100	271	P
8	13250.00	21.00	42.02	63.02	74.00	-10.98	Peak	100	271	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

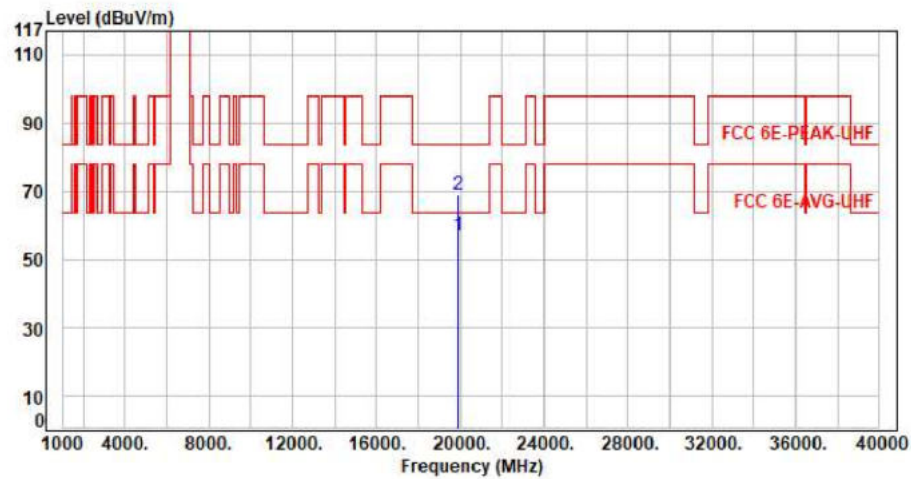

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.92	56.82	63.54	-6.72	Average	150	360	P
2	19875.00	11.90	56.91	68.81	83.54	-14.73	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

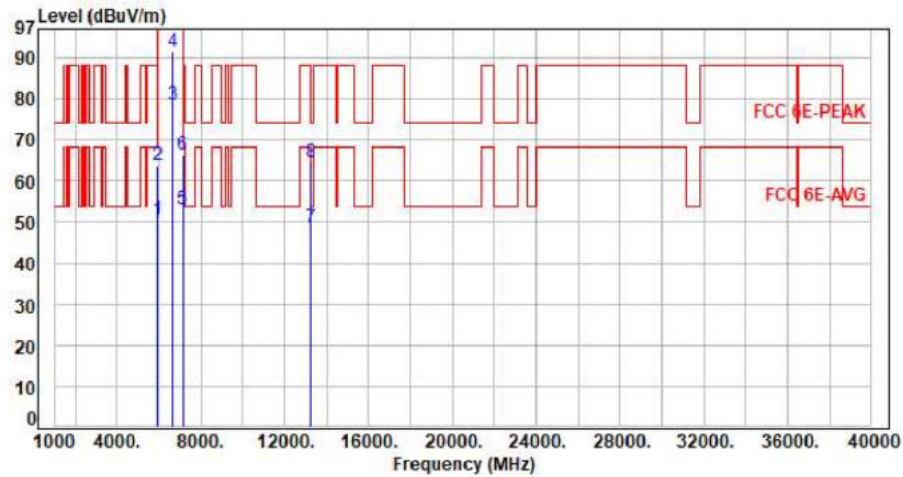

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.95	50.61	68.20	-17.59	Average	144	90	P
2	5925.00	7.66	56.24	63.90	88.20	-24.30	Peak	144	90	P
3	6625.00	8.94	69.44	78.38	200.00	-121.62	Average	144	90	P
4	6625.00	8.94	82.65	91.59	200.00	-108.41	Peak	144	90	P
5	7125.00	10.05	43.20	53.25	68.20	-14.95	Average	144	90	P
6	7125.00	10.05	56.41	66.46	88.20	-21.74	Peak	144	90	P
7	13250.00	21.00	27.64	48.64	54.00	-5.36	Average	100	143	P
8	13250.00	21.00	43.64	64.64	74.00	-9.36	Peak	100	143	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

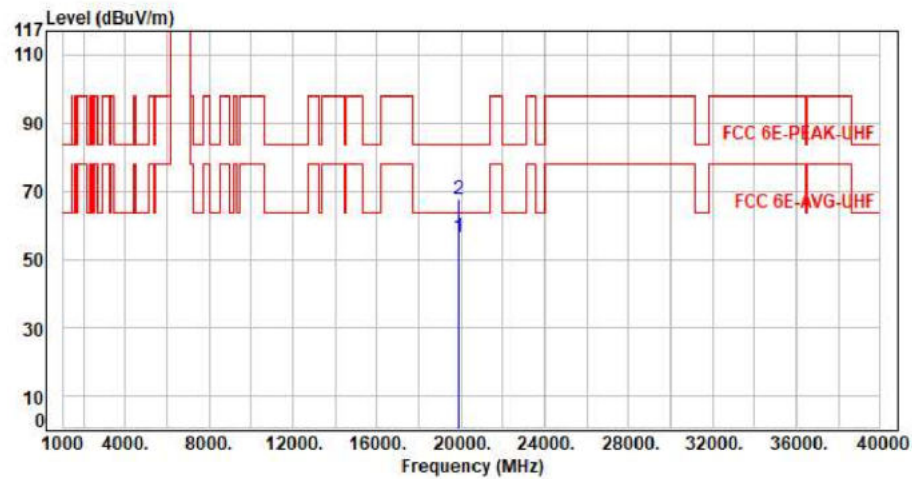

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.69	56.59	63.54	-6.95	Average	150	360	P
2	19875.00	11.90	55.64	67.54	83.54	-16.00	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

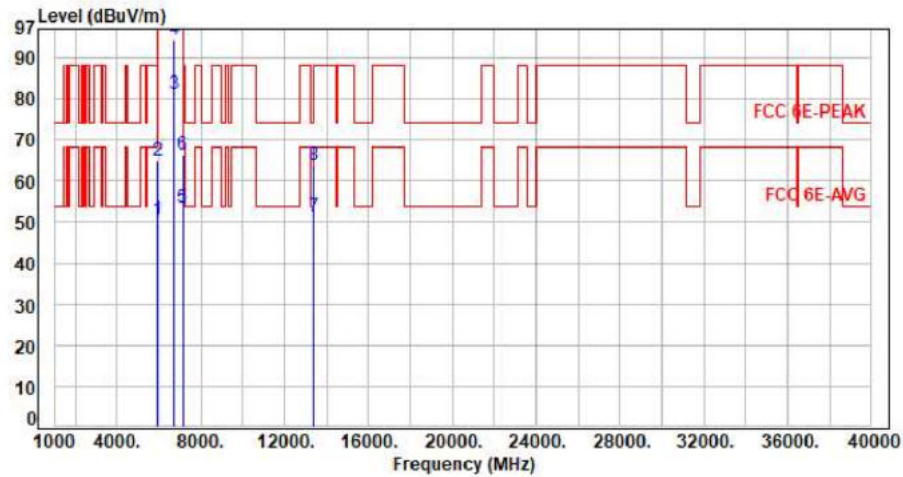


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.98	50.64	68.20	-17.56	Average	100	66	P
2	5925.00	7.66	57.20	64.86	88.20	-23.34	Peak	100	66	P
3	6705.00	9.25	72.01	81.26	200.00	-118.74	Average	100	66	P
4	6705.00	9.25	85.28	94.53	200.00	-105.47	Peak	100	66	P
5	7125.00	10.05	43.33	53.38	68.20	-14.82	Average	100	66	P
6	7125.00	10.05	56.39	66.44	88.20	-21.76	Peak	100	66	P
7	13410.00	21.62	29.63	51.25	68.20	-16.95	Average	100	134	P
8	13410.00	21.62	42.33	63.95	88.20	-24.25	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

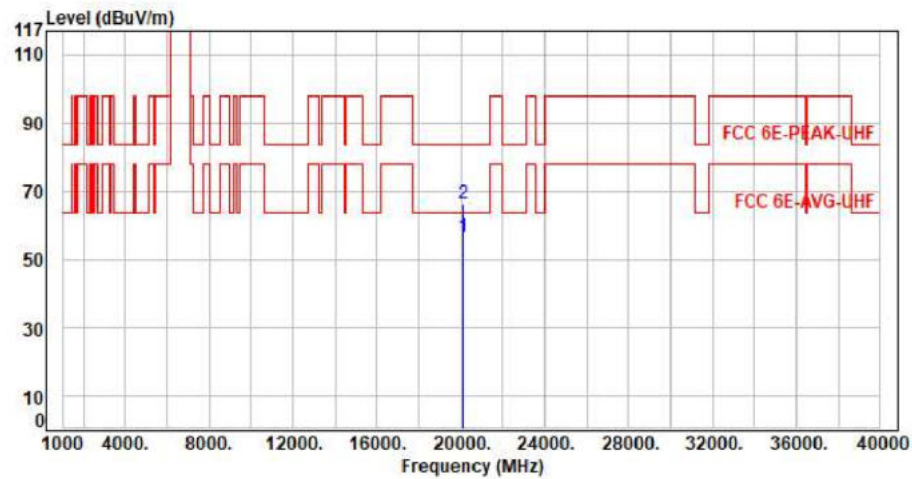


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.06	56.46	63.54	-7.08	Average	150	360	P
2	20115.00	11.40	54.76	66.16	83.54	-17.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

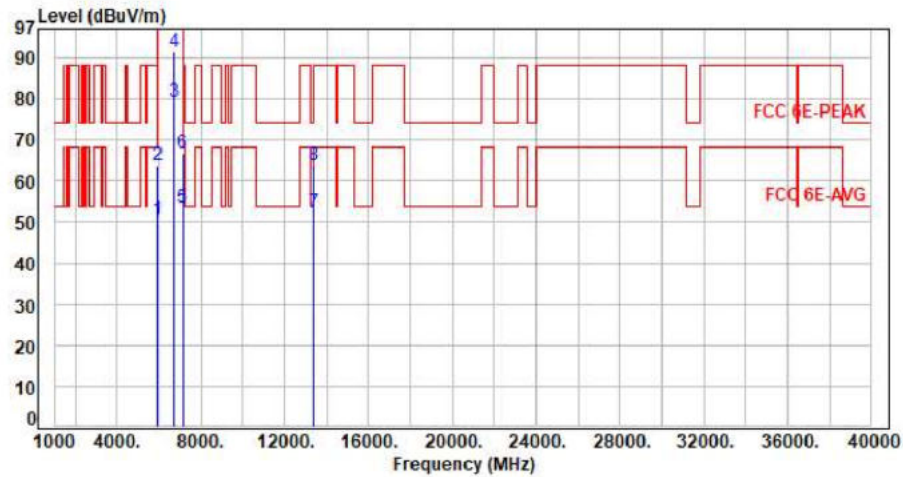

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.96	50.62	68.20	-17.58	Average	123	89	P
2	5925.00	7.66	56.30	63.96	88.20	-24.24	Peak	123	89	P
3	6705.00	9.25	70.23	79.48	200.00	-120.52	Average	123	89	P
4	6705.00	9.25	82.09	91.34	200.00	-108.66	Peak	123	89	P
5	7125.00	10.05	43.59	53.64	68.20	-14.56	Average	123	89	P
6	7125.00	10.05	56.85	66.90	88.20	-21.30	Peak	123	89	P
7	13410.00	21.62	30.63	52.25	68.20	-15.95	Average	100	139	P
8	13410.00	21.62	42.22	63.84	88.20	-24.36	Peak	100	139	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

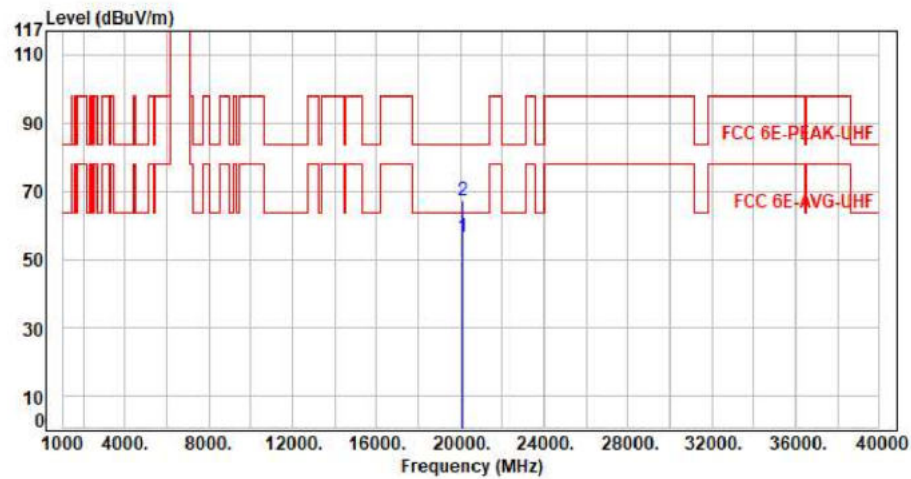


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.07	56.47	63.54	-7.07	Average	150	360	P
2	20115.00	11.40	55.83	67.23	83.54	-16.31	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

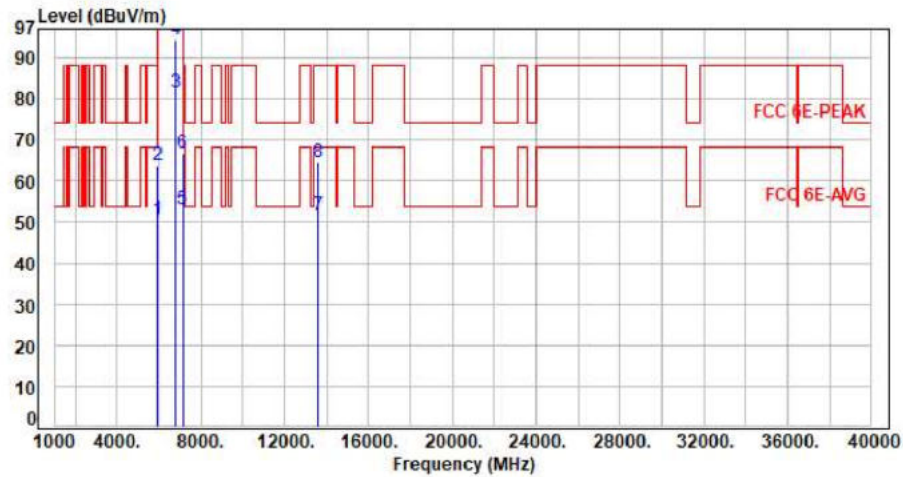

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.90	50.56	68.20	-17.64	Average	100	65	P
2	5925.00	7.66	56.05	63.71	88.20	-24.49	Peak	100	65	P
3	6785.00	9.46	71.87	81.33	200.00	-118.67	Average	100	65	P
4	6785.00	9.46	84.80	94.26	200.00	-105.74	Peak	100	65	P
5	7125.00	10.05	43.23	53.28	68.20	-14.92	Average	100	65	P
6	7125.00	10.05	56.61	66.66	88.20	-21.54	Peak	100	65	P
7	13570.00	22.06	29.70	51.76	68.20	-16.44	Average	100	133	P
8	13570.00	22.06	42.36	64.42	88.20	-23.78	Peak	100	133	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

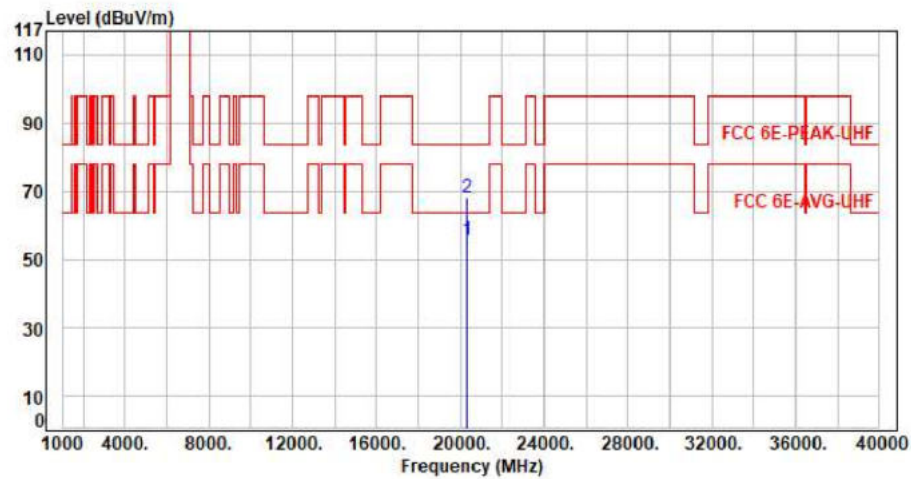


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.55	55.61	63.54	-7.93	Average	150	360	P
2	20355.00	11.06	56.85	67.91	83.54	-15.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

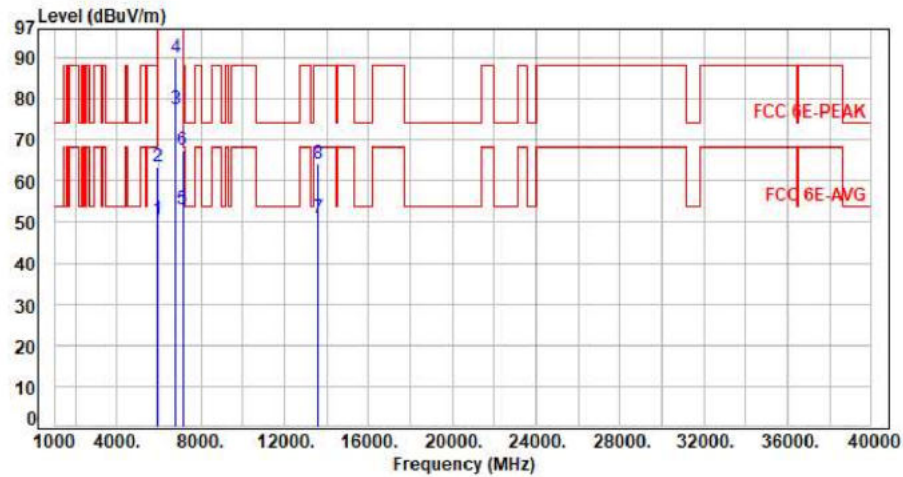


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.94	50.60	68.20	-17.60	Average	130	90	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	130	90	P
3	6785.00	9.46	67.86	77.32	200.00	-122.68	Average	130	90	P
4	6785.00	9.46	80.39	89.85	200.00	-110.15	Peak	130	90	P
5	7125.00	10.05	43.14	53.19	68.20	-15.01	Average	130	90	P
6	7125.00	10.05	57.37	67.42	88.20	-20.78	Peak	130	90	P
7	13570.00	22.06	28.92	50.98	68.20	-17.22	Average	100	180	P
8	13570.00	22.06	42.12	64.18	88.20	-24.02	Peak	100	180	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

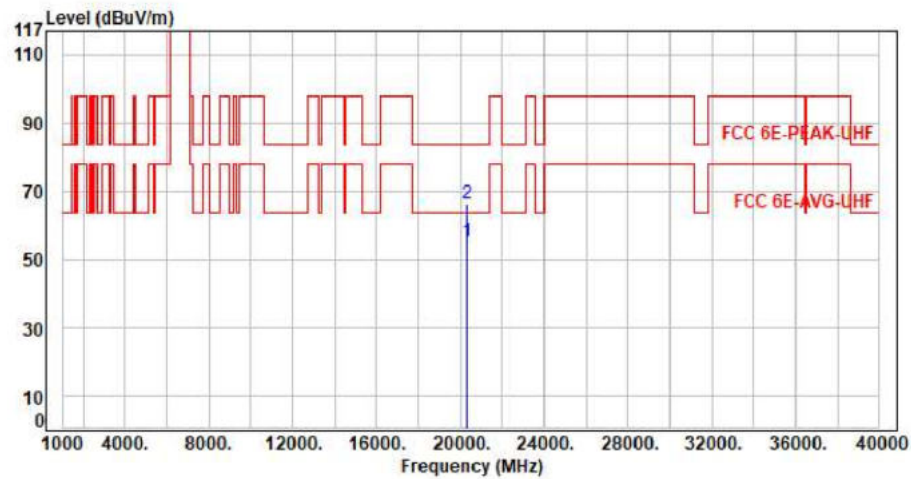

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.31	55.37	63.54	-8.17	Average	150	360	P
2	20355.00	11.06	55.35	66.41	83.54	-17.13	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

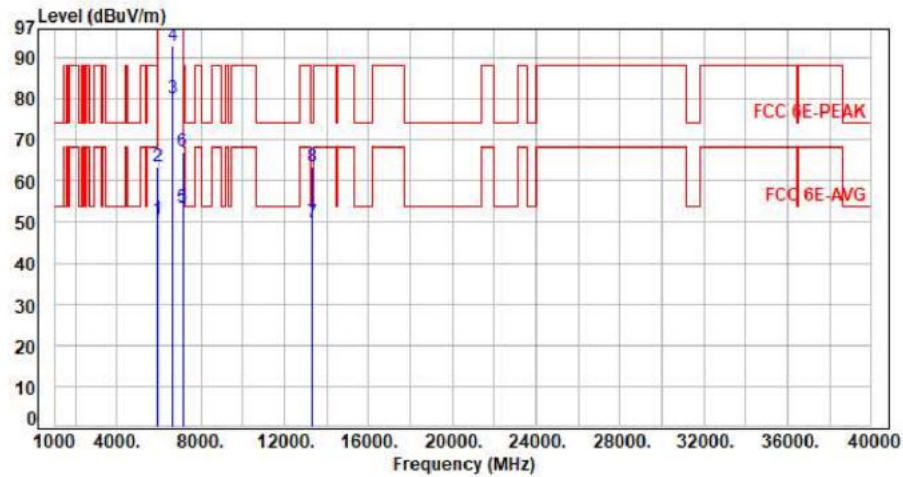

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.94	50.60	68.20	-17.60	Average	100	66	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	100	66	P
3	6665.00	9.08	71.06	80.14	200.00	-119.86	Average	100	66	P
4	6665.00	9.08	83.82	92.90	200.00	-107.10	Peak	100	66	P
5	7125.00	10.05	43.27	53.32	68.20	-14.88	Average	100	66	P
6	7125.00	10.05	57.03	67.08	88.20	-21.12	Peak	100	66	P
7	13330.00	21.30	28.67	49.97	54.00	-4.03	Average	100	162	P
8	13330.00	21.30	42.23	63.53	74.00	-10.47	Peak	100	162	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

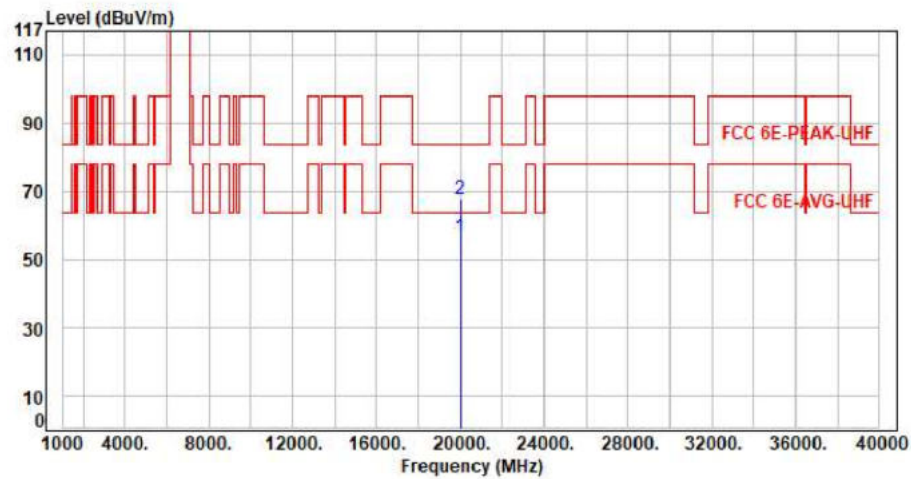


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	44.62	56.32	63.54	-7.22	Average	150	360	P
2	19995.00	11.70	55.79	67.49	83.54	-16.05	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

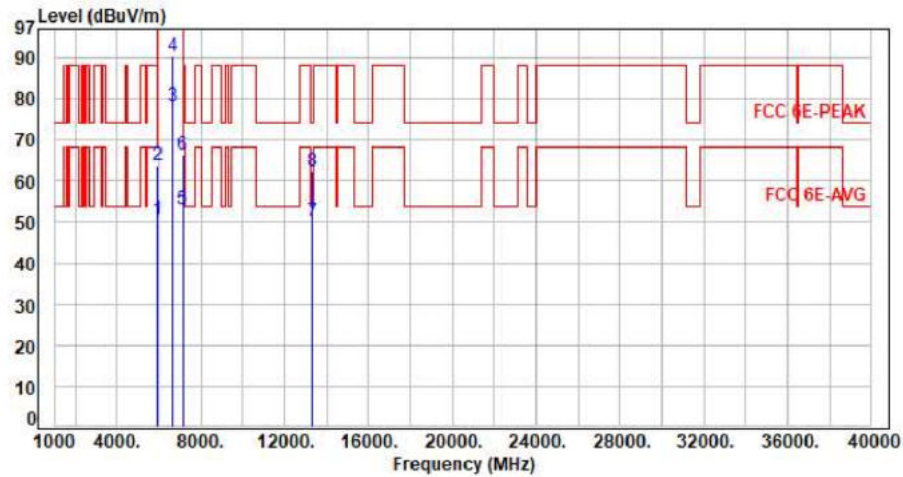


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.89	50.55	68.20	-17.65	Average	122	90	P
2	5925.00	7.66	55.99	63.65	88.20	-24.55	Peak	122	90	P
3	6665.00	9.08	69.01	78.09	200.00	-121.91	Average	122	90	P
4	6665.00	9.08	81.23	90.31	200.00	-109.69	Peak	122	90	P
5	7125.00	10.05	43.13	53.18	68.20	-15.02	Average	122	90	P
6	7125.00	10.05	56.16	66.21	88.20	-21.99	Peak	122	90	P
7	13330.00	21.30	29.00	50.30	54.00	-3.70	Average	100	129	P
8	13330.00	21.30	41.14	62.44	74.00	-11.56	Peak	100	129	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

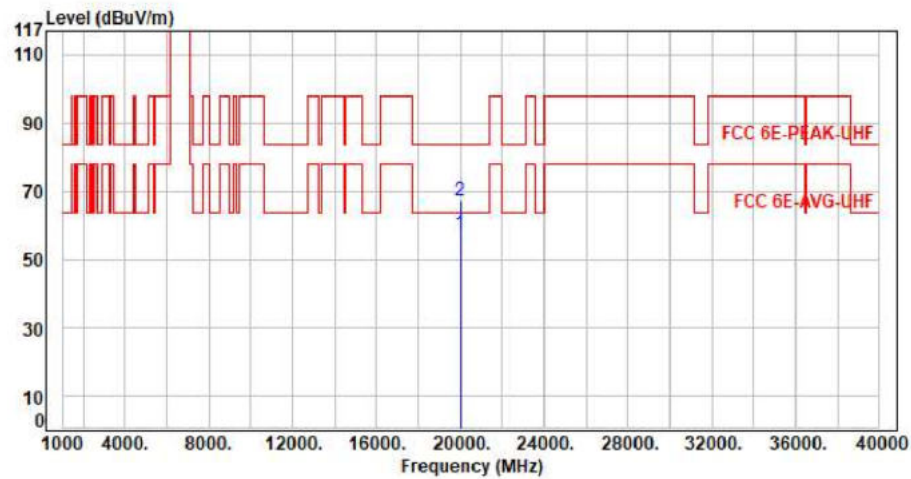

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.50	57.20	63.54	-6.34	Average	150	360	P
2	19995.00	11.70	55.51	67.21	83.54	-16.33	Peak	150	360	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor





For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

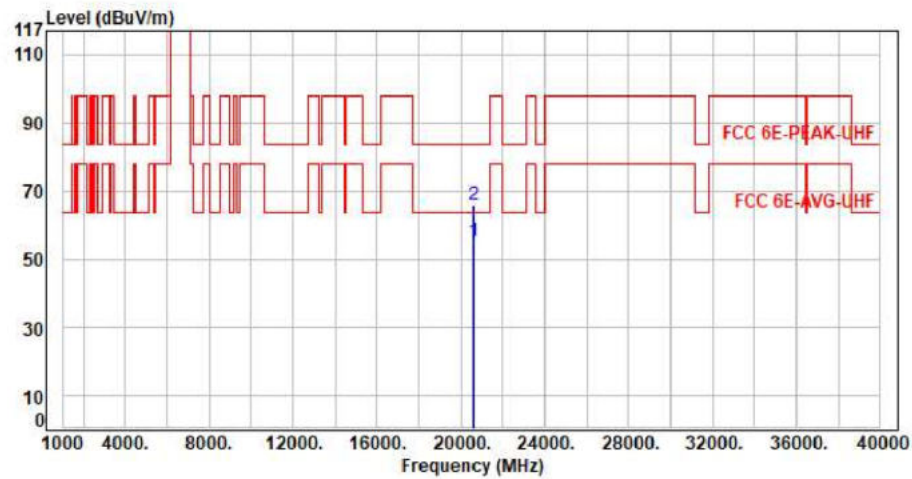


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	44.13	55.27	63.54	-8.27	Average	150	360	P
2	20625.00	11.14	54.78	65.92	83.54	-17.62	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

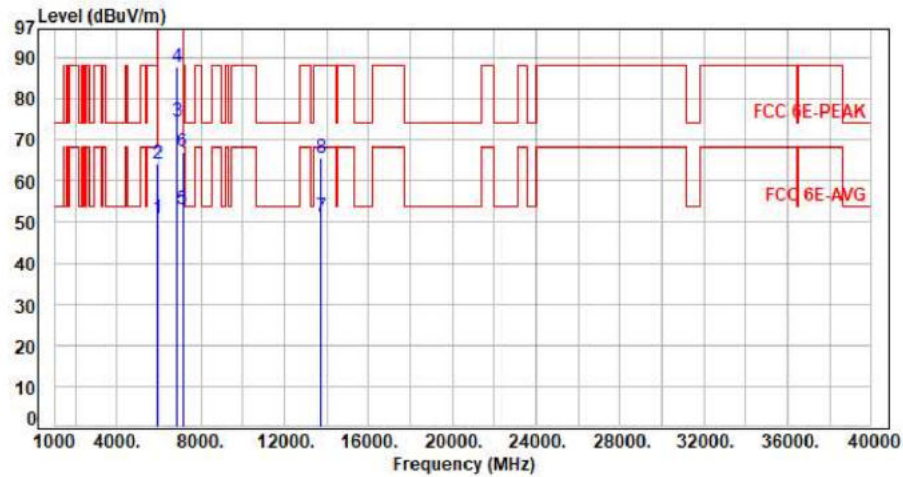


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.09	50.75	68.20	-17.45	Average	136	87	P
2	5925.00	7.66	56.50	64.16	88.20	-24.04	Peak	136	87	P
3	6875.00	9.55	65.01	74.56	200.00	-125.44	Average	136	87	P
4	6875.00	9.55	78.34	87.89	200.00	-112.11	Peak	136	87	P
5	7125.00	10.05	43.09	53.14	68.20	-15.06	Average	136	87	P
6	7125.00	10.05	56.90	66.95	88.20	-21.25	Peak	136	87	P
7	13750.00	22.65	28.54	51.19	68.20	-17.01	Average	100	159	P
8	13750.00	22.65	42.88	65.53	88.20	-22.67	Peak	100	159	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

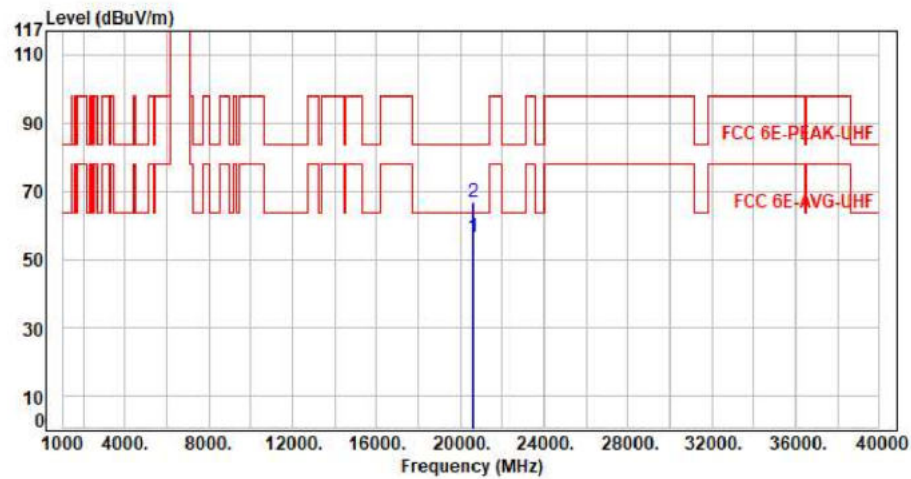


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.15	56.29	63.54	-7.25	Average	150	360	P
2	20625.00	11.14	55.48	66.62	83.54	-16.92	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

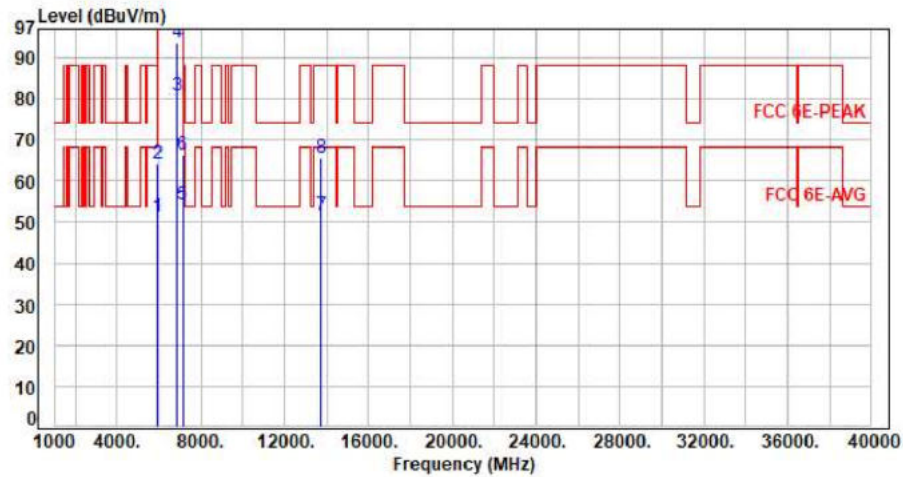

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.43	51.09	68.20	-17.11	Average	245	291	P
2	5925.00	7.66	56.41	64.07	88.20	-24.13	Peak	245	291	P
3	6885.00	9.56	71.30	80.86	200.00	-119.14	Average	245	291	P
4	6885.00	9.56	84.11	93.67	200.00	-106.33	Peak	245	291	P
5	7125.00	10.05	43.99	54.04	68.20	-14.16	Average	245	291	P
6	7125.00	10.05	56.21	66.26	88.20	-21.94	Peak	245	291	P
7	13770.00	22.69	29.07	51.76	68.20	-16.44	Average	100	282	P
8	13770.00	22.69	43.12	65.81	88.20	-22.39	Peak	100	282	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor