




For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

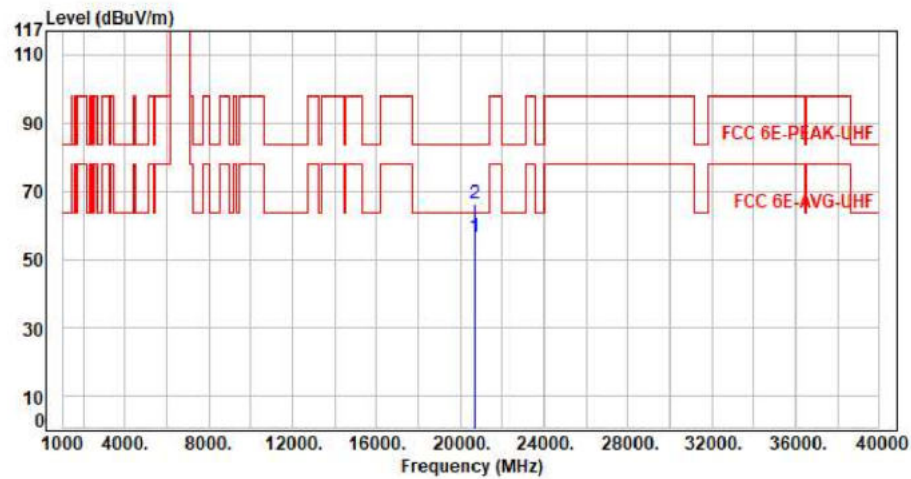


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.51	56.50	63.54	-7.04	Average	150	360	P
2	20655.00	10.99	55.42	66.41	83.54	-17.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

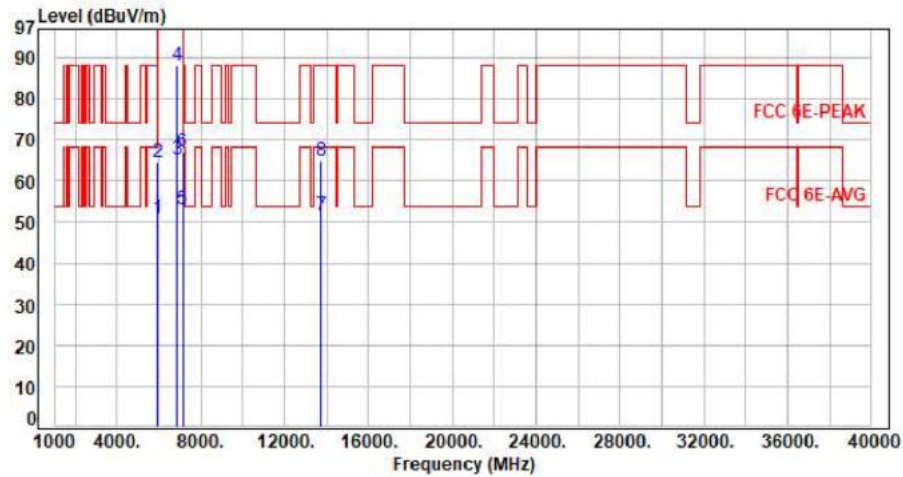

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.13	50.79	68.20	-17.41	Average	157	108	P
2	5925.00	7.66	56.79	64.45	88.20	-23.75	Peak	157	108	P
3	6885.00	9.56	55.69	65.25	200.00	-134.75	Average	157	108	P
4	6885.00	9.56	78.58	88.14	200.00	-111.86	Peak	157	108	P
5	7125.00	10.05	43.02	53.07	68.20	-15.13	Average	157	108	P
6	7125.00	10.05	56.89	66.94	88.20	-21.26	Peak	157	108	P
7	13770.00	22.69	28.77	51.46	68.20	-16.74	Average	100	135	P
8	13770.00	22.69	42.04	64.73	88.20	-23.47	Peak	100	135	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

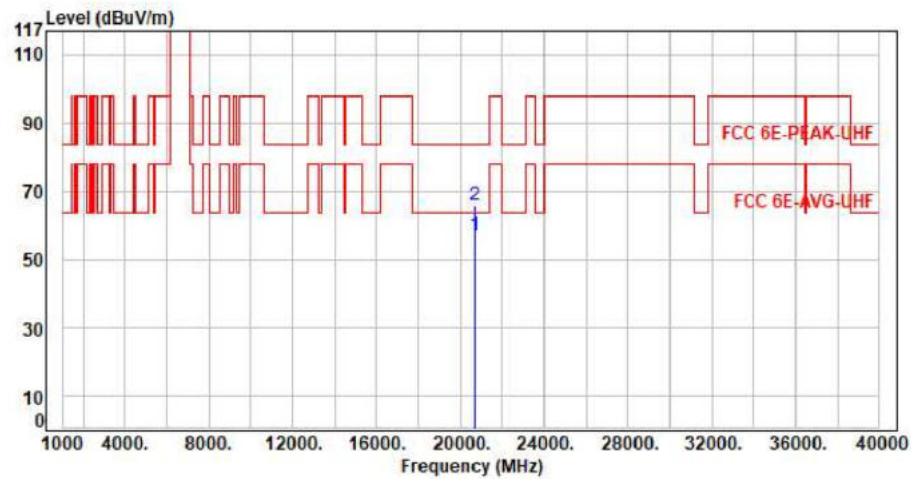


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.98	56.97	63.54	-6.57	Average	150	360	P
2	20655.00	10.99	54.91	65.90	83.54	-17.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

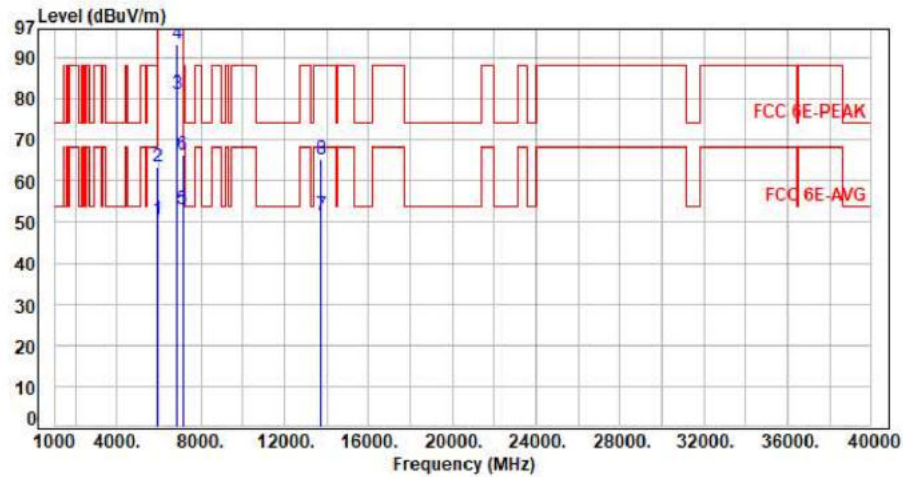

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.02	50.68	68.20	-17.52	Average	242	292	P
2	5925.00	7.66	55.93	63.59	88.20	-24.61	Peak	242	292	P
3	6865.00	9.52	71.75	81.27	200.00	-118.73	Average	242	292	P
4	6865.00	9.52	83.89	93.41	200.00	-106.59	Peak	242	292	P
5	7125.00	10.05	42.96	53.01	68.20	-15.19	Average	242	292	P
6	7125.00	10.05	56.43	66.48	88.20	-21.72	Peak	242	292	P
7	13730.00	22.57	28.94	51.51	68.20	-16.69	Average	100	280	P
8	13730.00	22.57	42.59	65.16	88.20	-23.04	Peak	100	280	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

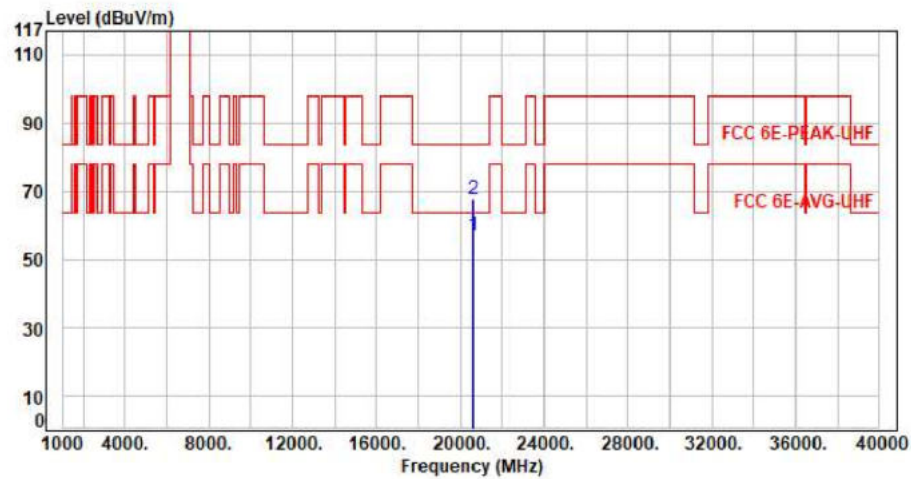


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.68	56.99	63.54	-6.55	Average	150	360	P
2	20595.00	11.31	56.09	67.40	83.54	-16.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

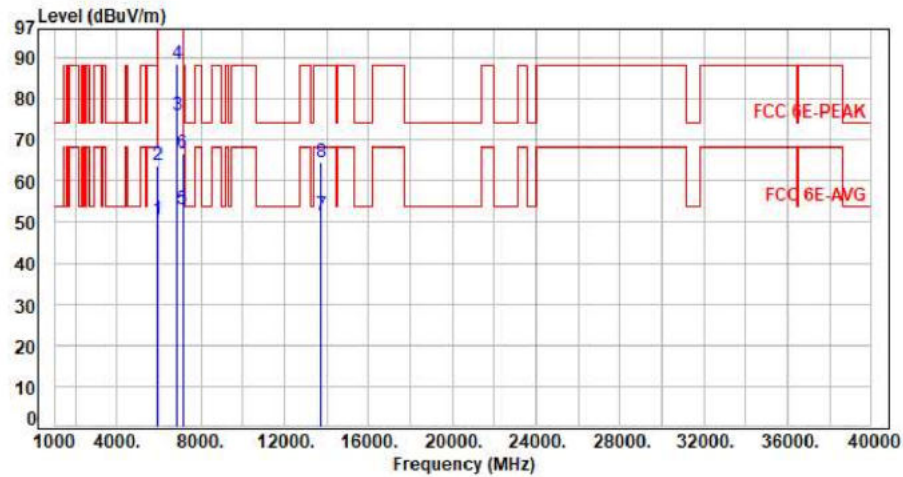

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.02	50.68	68.20	-17.52	Average	156	107	P
2	5925.00	7.66	56.00	63.66	88.20	-24.54	Peak	156	107	P
3	6865.00	9.52	66.32	75.84	200.00	-124.16	Average	156	107	P
4	6865.00	9.52	79.06	88.58	200.00	-111.42	Peak	156	107	P
5	7125.00	10.05	43.12	53.17	68.20	-15.03	Average	156	107	P
6	7125.00	10.05	56.76	66.81	88.20	-21.39	Peak	156	107	P
7	13730.00	22.57	28.89	51.46	68.20	-16.74	Average	100	157	P
8	13730.00	22.57	41.83	64.40	88.20	-23.80	Peak	100	157	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

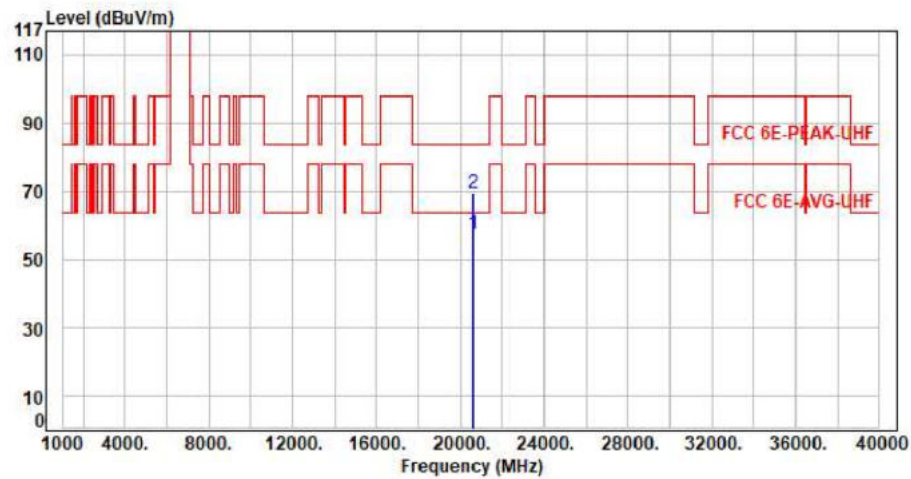


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	45.98	57.29	63.54	-6.25	Average	150	360	P
2	20595.00	11.31	57.87	69.18	83.54	-14.36	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

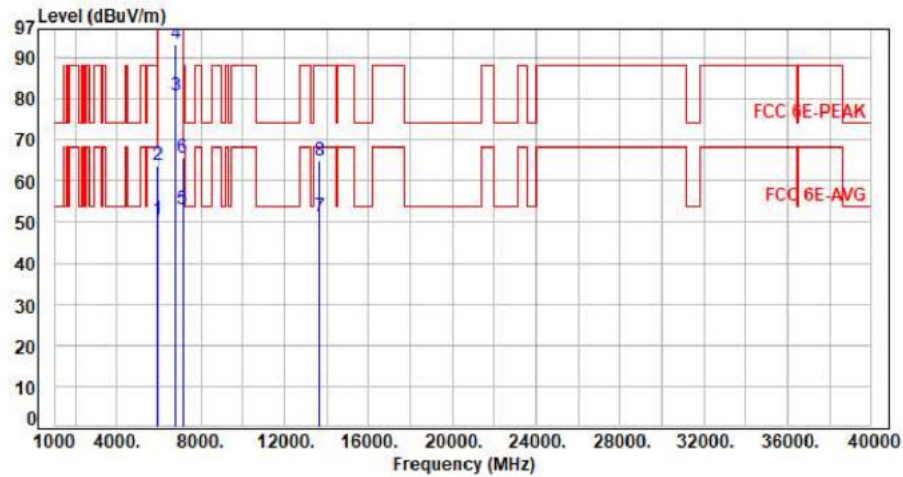

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.95	50.61	68.20	-17.59	Average	244	290	P
2	5925.00	7.66	56.18	63.84	88.20	-24.36	Peak	244	290	P
3	6825.00	9.47	71.31	80.78	200.00	-119.22	Average	244	290	P
4	6825.00	9.47	83.77	93.24	200.00	-106.76	Peak	244	290	P
5	7125.00	10.05	43.02	53.07	68.20	-15.13	Average	244	290	P
6	7125.00	10.05	55.77	65.82	88.20	-22.38	Peak	244	290	P
7	13650.00	22.24	28.98	51.22	68.20	-16.98	Average	100	288	P
8	13650.00	22.24	42.54	64.78	88.20	-23.42	Peak	100	288	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

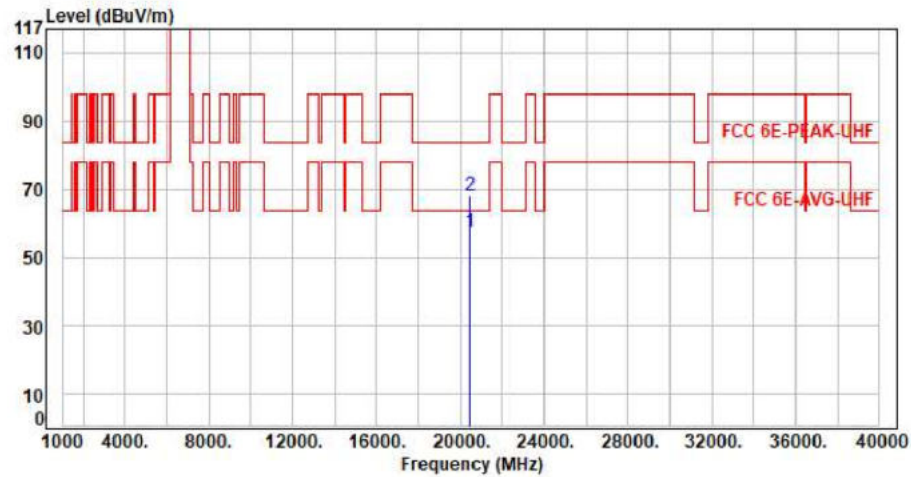


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	45.87	57.32	63.54	-6.22	Average	150	360	P
2	20475.00	11.45	56.57	68.02	83.54	-15.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

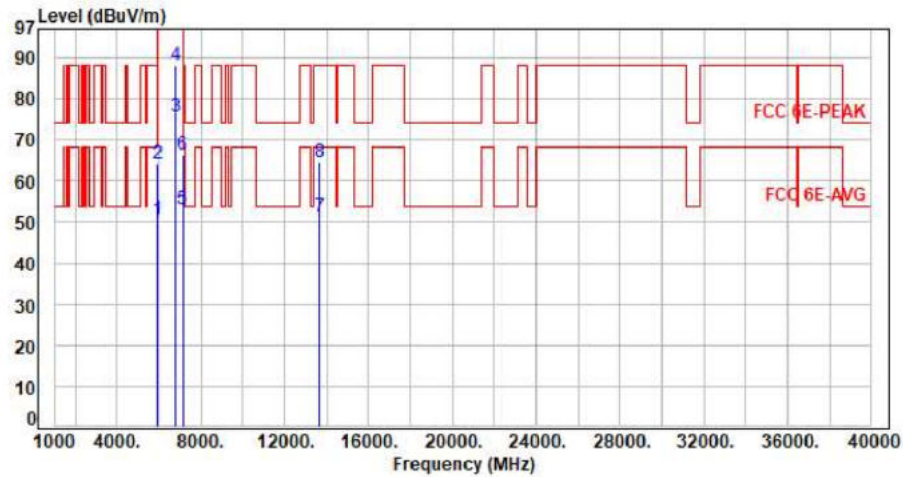

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	43.02	50.68	68.20	-17.52	Average	124	88	P
2	5925.00	7.66	56.48	64.14	88.20	-24.06	Peak	124	88	P
3	6825.00	9.47	66.26	75.73	200.00	-124.27	Average	124	88	P
4	6825.00	9.47	78.82	88.29	200.00	-111.71	Peak	124	88	P
5	7125.00	10.05	43.04	53.09	68.20	-15.11	Average	124	88	P
6	7125.00	10.05	56.51	66.56	88.20	-21.64	Peak	124	88	P
7	13650.00	22.24	28.87	51.11	68.20	-17.09	Average	100	158	P
8	13650.00	22.24	42.25	64.49	88.20	-23.71	Peak	100	158	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

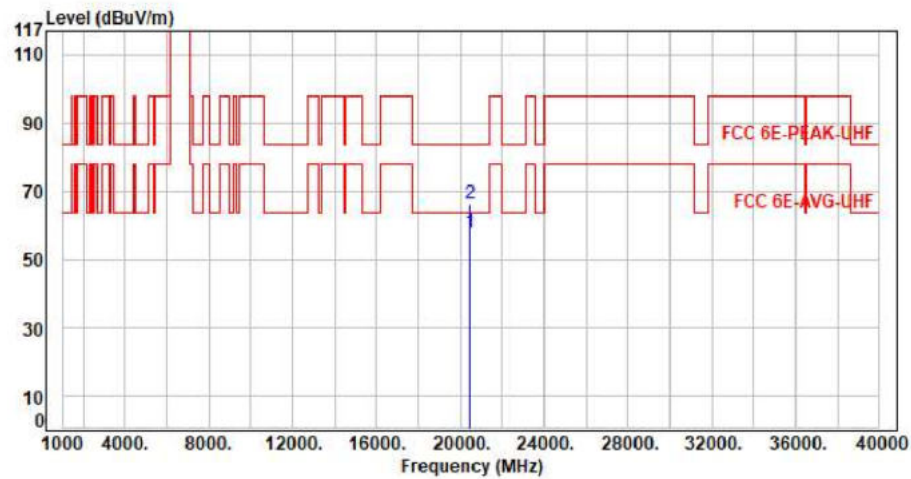


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	46.58	58.03	63.54	-5.51	Average	150	360	P
2	20475.00	11.45	54.67	66.12	83.54	-17.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

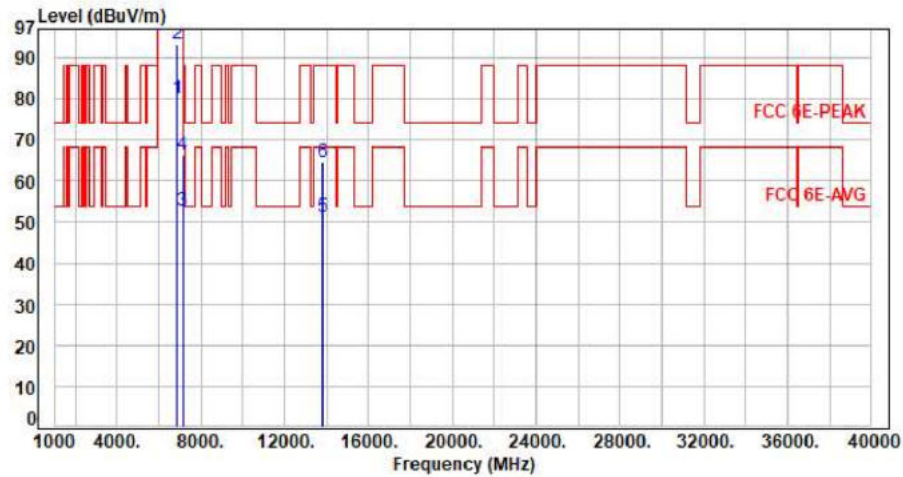


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	70.31	79.90	200.00	-120.10	Average	100	65	P
2	6895.00	9.59	83.61	93.20	200.00	-106.80	Peak	100	65	P
3	7125.00	10.05	42.86	52.91	68.20	-15.29	Average	100	65	P
4	7125.00	10.05	56.44	66.49	88.20	-21.71	Peak	100	65	P
5	13790.00	22.74	28.58	51.32	68.20	-16.88	Average	100	114	P
6	13790.00	22.74	41.75	64.49	88.20	-23.71	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

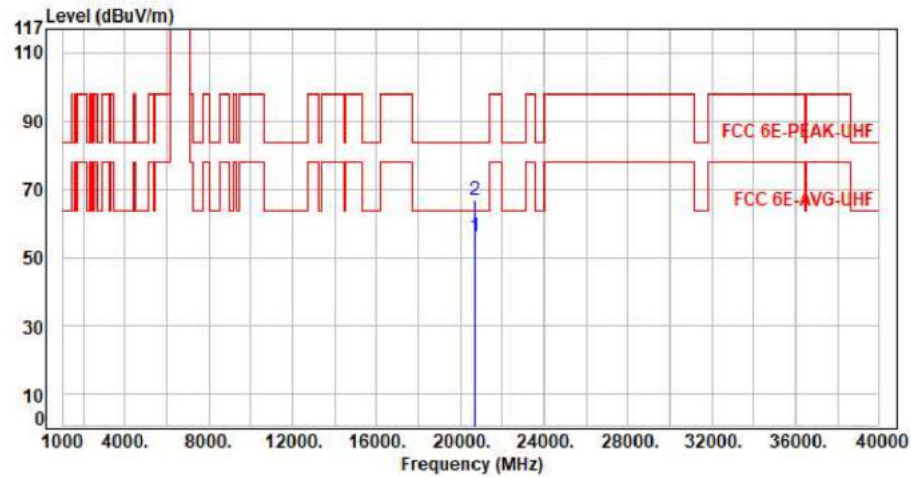


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.91	55.95	63.54	-7.59	Average	150	360	P
2	20685.00	11.04	55.56	66.60	83.54	-16.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

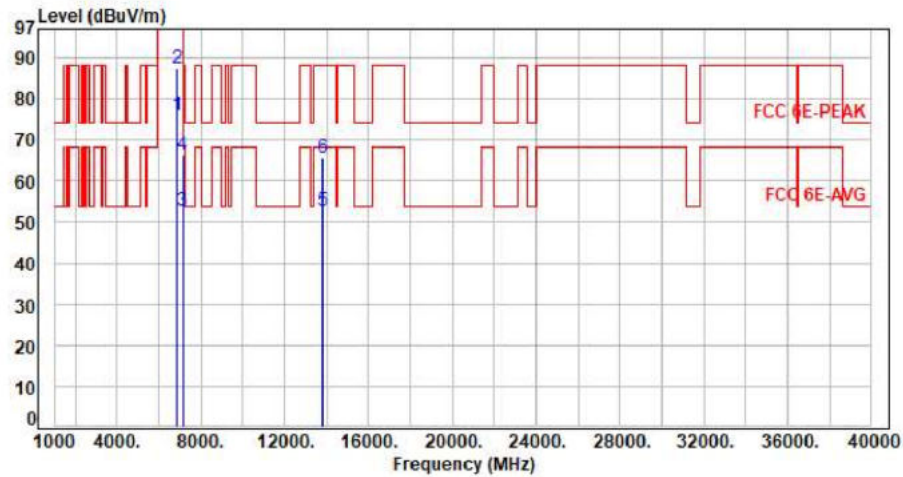


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	66.34	75.93	200.00	-124.07	Average	141	89	P
2	6895.00	9.59	77.73	87.32	200.00	-112.68	Peak	141	89	P
3	7125.00	10.05	42.83	52.88	68.20	-15.32	Average	141	89	P
4	7125.00	10.05	56.37	66.42	88.20	-21.78	Peak	141	89	P
5	13790.00	22.74	29.85	52.59	68.20	-15.61	Average	100	221	P
6	13790.00	22.74	42.78	65.52	88.20	-22.68	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

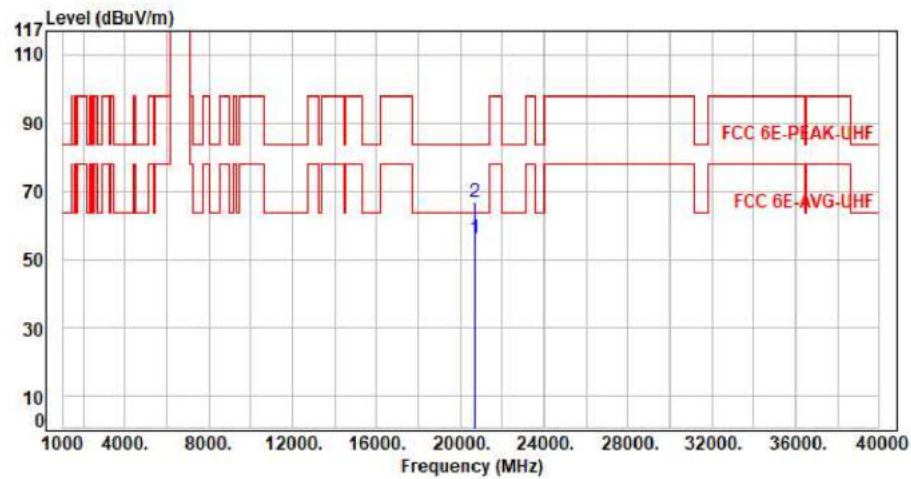


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.95	55.99	63.54	-7.55	Average	150	360	P
2	20685.00	11.04	55.56	66.60	83.54	-16.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

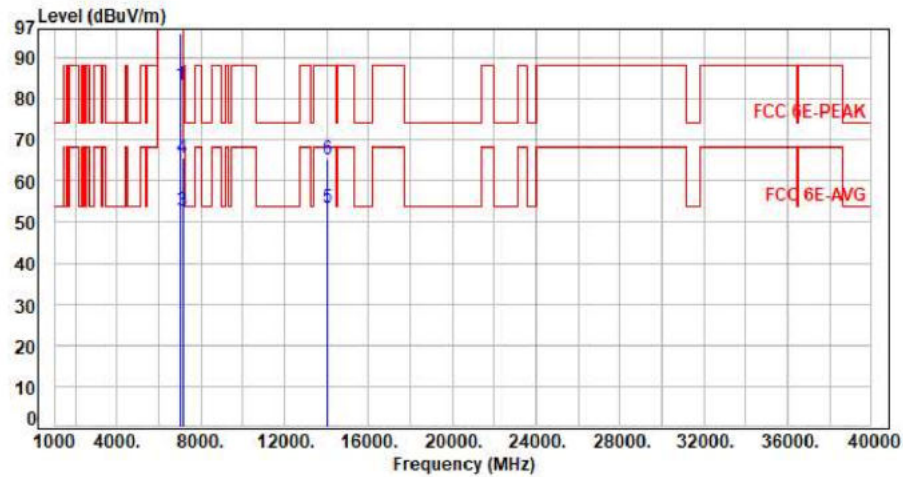


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	73.51	83.19	200.00	-116.81	Average	100	297	P
2	7015.00	9.68	86.24	95.92	200.00	-104.08	Peak	100	297	P
3	7125.00	10.05	42.83	52.88	68.20	-15.32	Average	100	297	P
4	7125.00	10.05	55.62	65.67	88.20	-22.53	Peak	100	297	P
5	14030.00	23.39	30.01	53.40	68.20	-14.80	Average	100	219	P
6	14030.00	23.39	41.75	65.14	88.20	-23.06	Peak	100	219	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

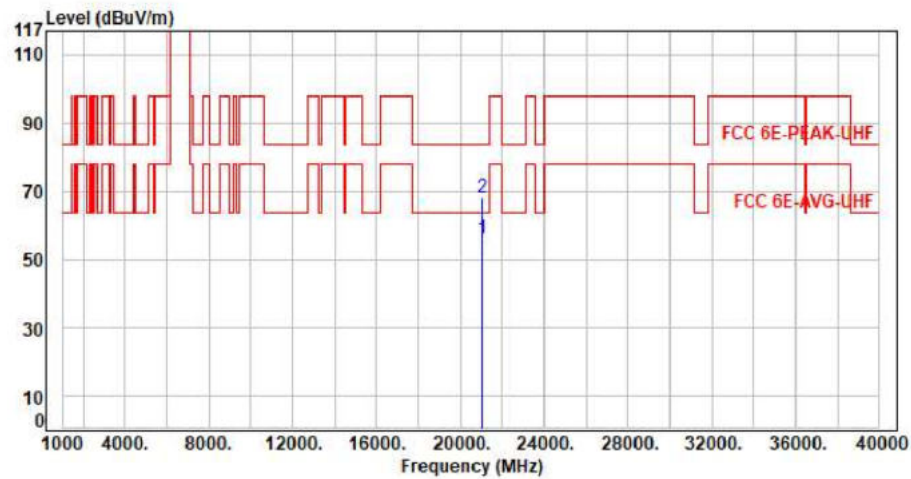


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.42	55.92	63.54	-7.62	Average	150	360	P
2	21045.00	11.50	56.78	68.28	83.54	-15.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

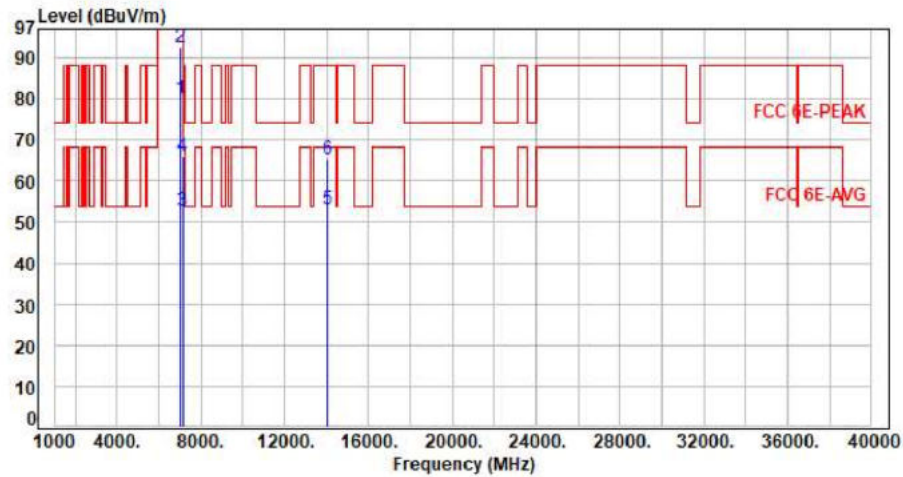


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	70.44	80.12	200.00	-119.88	Average	400	360	P
2	7015.00	9.68	82.96	92.64	200.00	-107.36	Peak	400	360	P
3	7125.00	10.05	42.76	52.81	68.20	-15.39	Average	400	360	P
4	7125.00	10.05	55.98	66.03	88.20	-22.17	Peak	400	360	P
5	14030.00	23.39	29.66	53.05	68.20	-15.15	Average	100	224	P
6	14030.00	23.39	42.02	65.41	88.20	-22.79	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

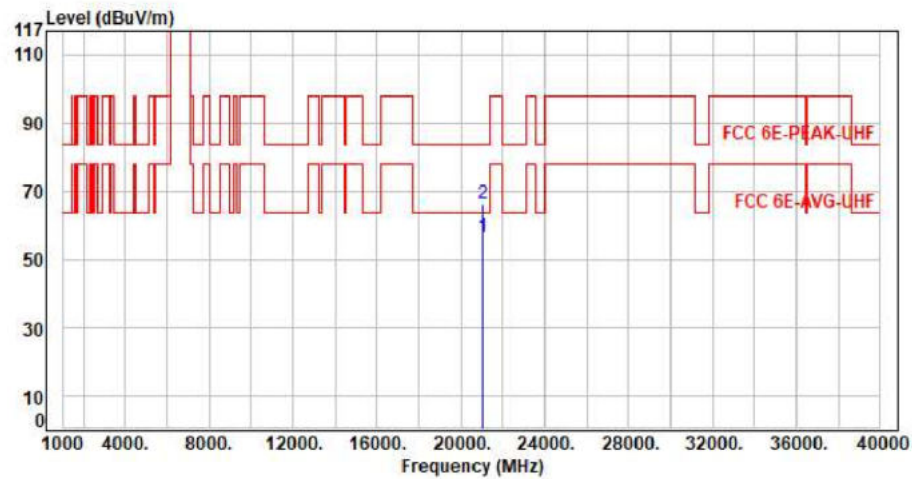


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.98	56.48	63.54	-7.06	Average	150	360	P
2	21045.00	11.50	54.78	66.28	83.54	-17.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

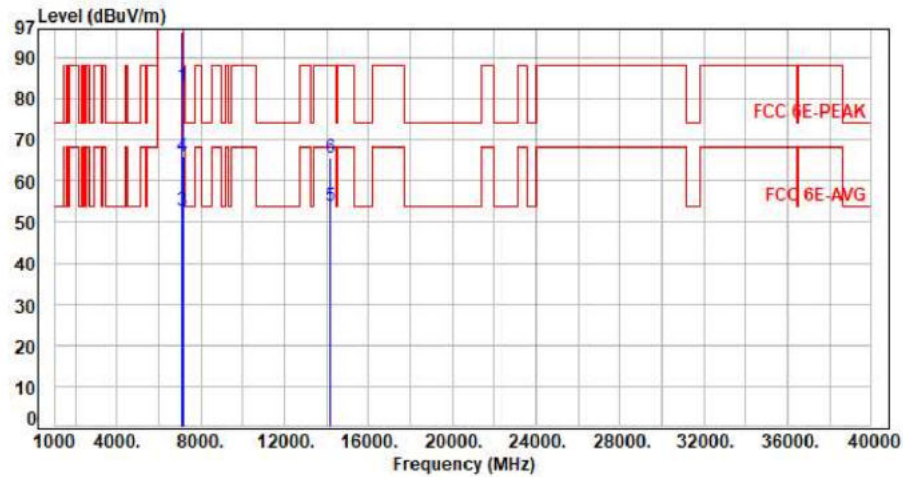


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	73.03	82.99	200.00	-117.01	Average	100	328	P
2	7095.00	9.96	86.12	96.08	200.00	-103.92	Peak	100	328	P
3	7125.00	10.05	42.82	52.87	68.20	-15.33	Average	100	328	P
4	7125.00	10.05	56.12	66.17	88.20	-22.03	Peak	100	328	P
5	14190.00	23.79	29.88	53.67	68.20	-14.53	Average	100	223	P
6	14190.00	23.79	41.68	65.47	88.20	-22.73	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

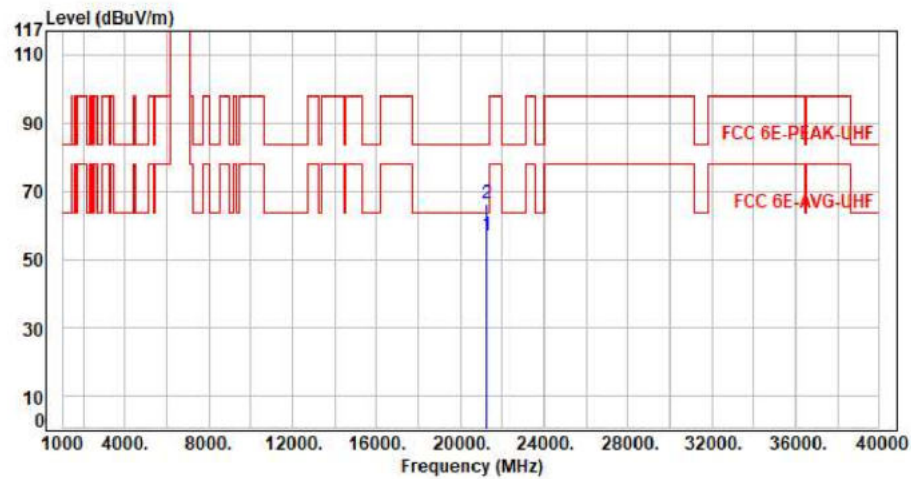


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.09	56.89	63.54	-6.65	Average	150	360	P
2	21285.00	11.80	54.53	66.33	83.54	-17.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

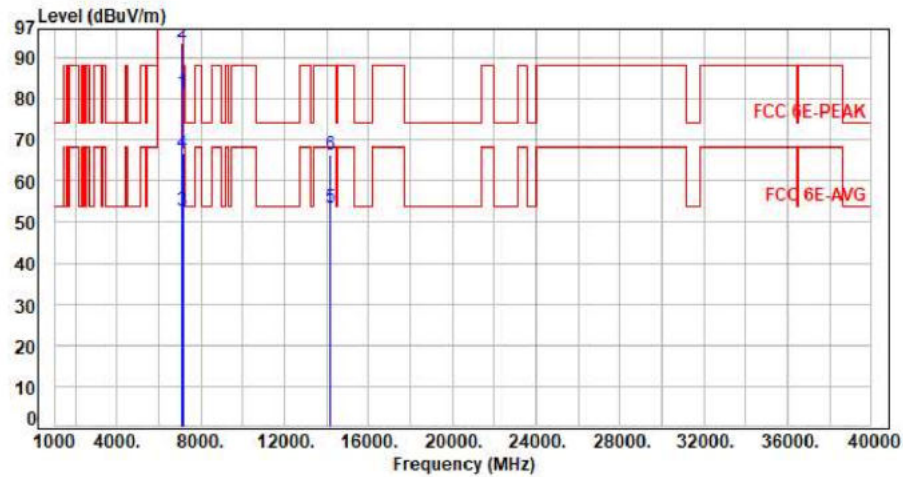


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	71.72	81.68	200.00	-118.32	Average	392	360	P
2	7095.00	9.96	83.90	93.86	200.00	-106.14	Peak	392	360	P
3	7125.00	10.05	42.76	52.81	68.20	-15.39	Average	392	360	P
4	7125.00	10.05	56.74	66.79	88.20	-21.41	Peak	392	360	P
5	14190.00	23.79	29.73	53.52	68.20	-14.68	Average	100	331	P
6	14190.00	23.79	42.46	66.25	88.20	-21.95	Peak	100	331	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

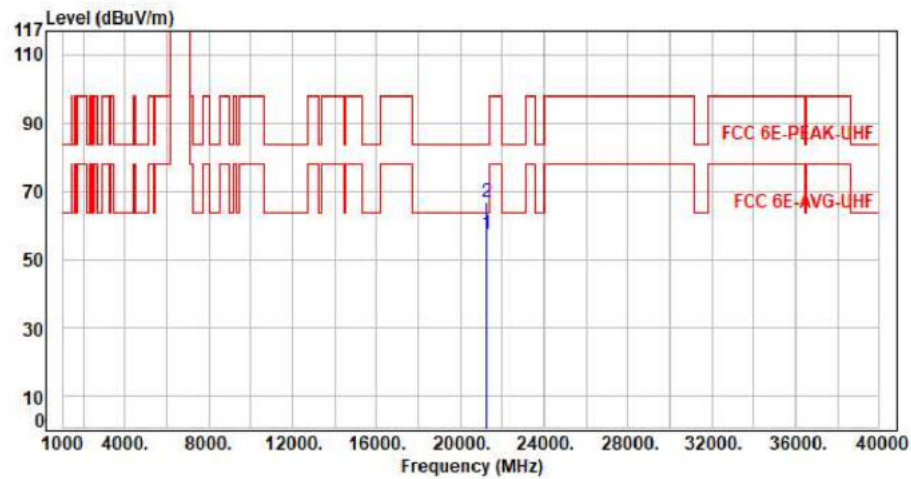


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.73	57.53	63.54	-6.01	Average	150	360	P
2	21285.00	11.80	54.95	66.75	83.54	-16.79	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

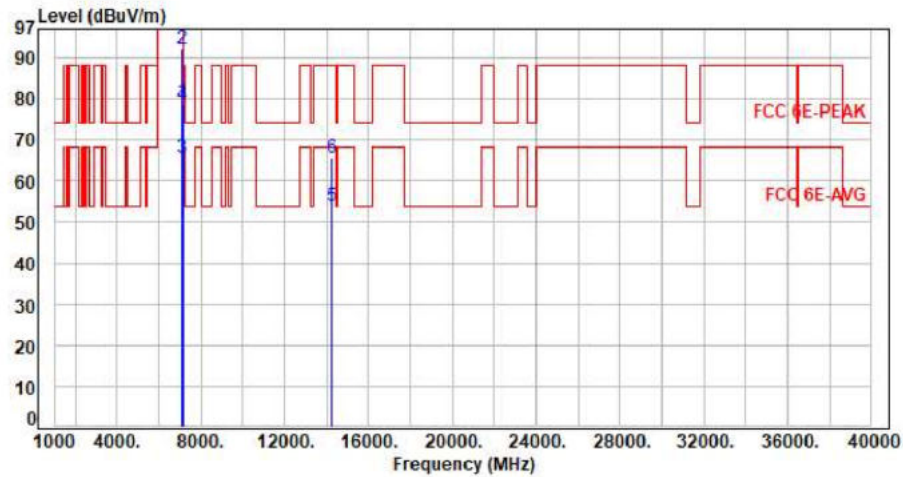


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	69.15	79.17	200.00	-120.83	Average	100	328	P
2	7115.00	10.02	82.16	92.18	200.00	-107.82	Peak	100	328	P
3	7125.00	10.05	55.56	65.61	68.20	-2.59	Average	100	328	P
4	7125.00	10.05	68.50	78.55	88.20	-9.65	Peak	100	328	P
5	14230.00	23.94	29.85	53.79	68.20	-14.41	Average	100	360	P
6	14230.00	23.94	41.58	65.52	88.20	-22.68	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

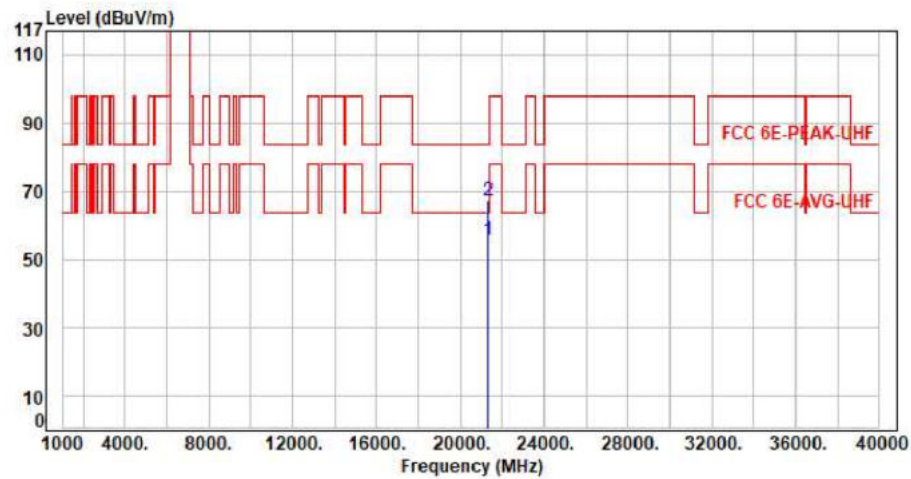


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	44.32	55.68	63.54	-7.86	Average	150	360	P
2	21345.00	11.36	55.84	67.20	83.54	-16.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

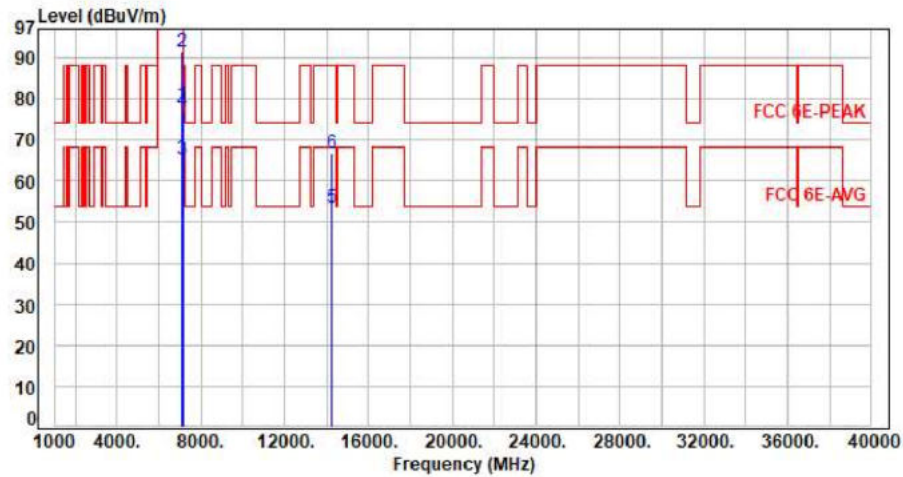


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	68.44	78.46	200.00	-121.54	Average	389	360	P
2	7115.00	10.02	81.43	91.45	200.00	-108.55	Peak	389	360	P
3	7125.00	10.05	55.25	65.30	68.20	-2.90	Average	389	360	P
4	7125.00	10.05	67.18	77.23	88.20	-10.97	Peak	389	360	P
5	14230.00	23.94	29.61	53.55	68.20	-14.65	Average	100	144	P
6	14230.00	23.94	42.82	66.76	88.20	-21.44	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

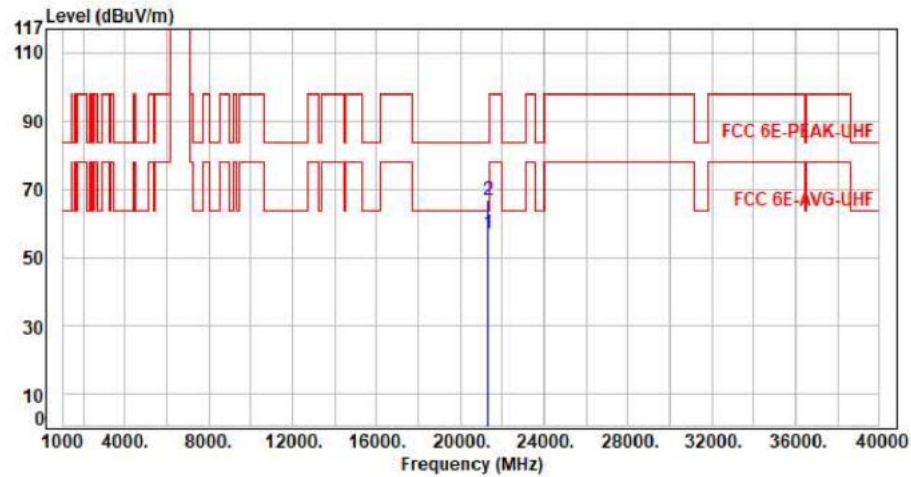


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.72	57.08	63.54	-6.46	Average	150	360	P
2	21345.00	11.36	55.43	66.79	83.54	-16.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

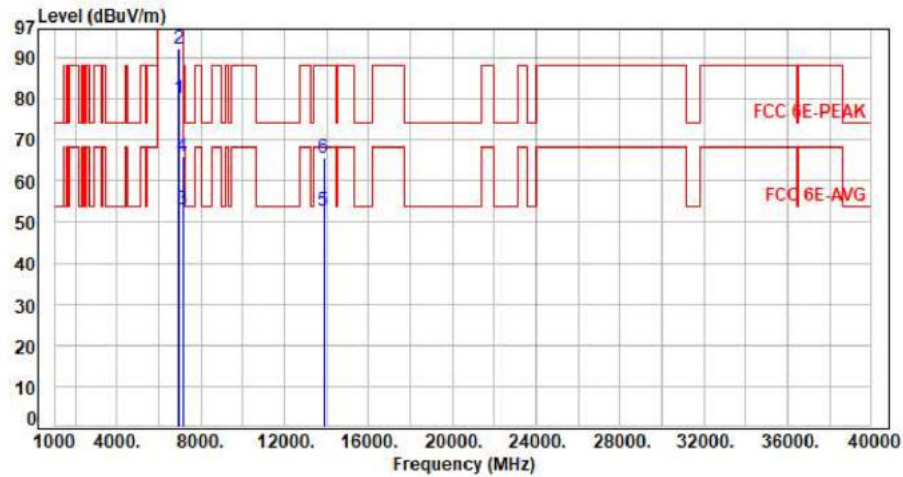


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	70.41	80.02	200.00	-119.98	Average	100	68	P
2	6925.00	9.61	82.48	92.09	200.00	-107.91	Peak	100	68	P
3	7125.00	10.05	42.90	52.95	68.20	-15.25	Average	100	68	P
4	7125.00	10.05	56.15	66.20	88.20	-22.00	Peak	100	68	P
5	13850.00	22.86	29.92	52.78	68.20	-15.42	Average	100	124	P
6	13850.00	22.86	42.68	65.54	88.20	-22.66	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

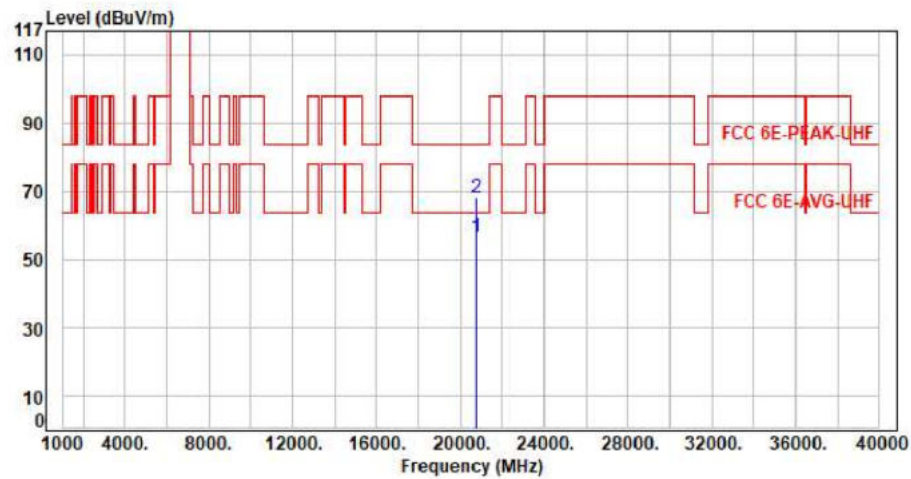


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	44.95	56.34	63.54	-7.20	Average	150	360	P
2	20775.00	11.39	56.71	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

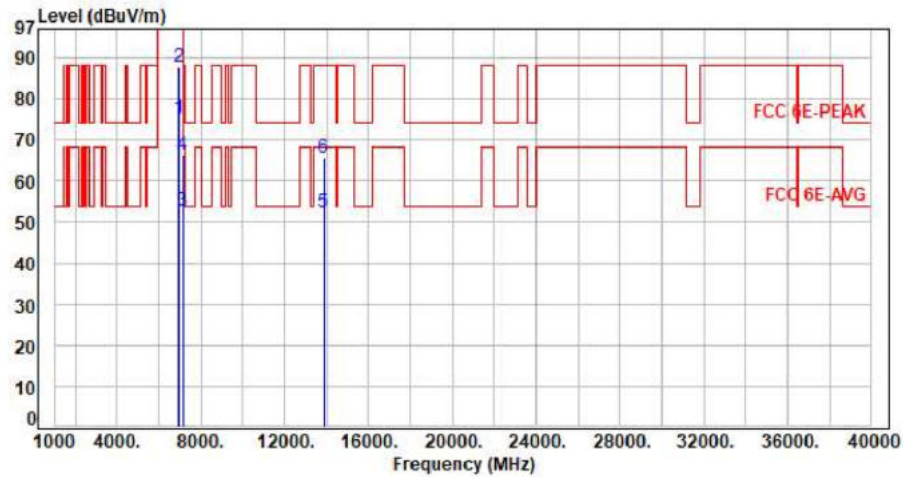


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	65.58	75.19	200.00	-124.81	Average	142	88	P
2	6925.00	9.61	78.10	87.71	200.00	-112.29	Peak	142	88	P
3	7125.00	10.05	42.82	52.87	68.20	-15.33	Average	142	88	P
4	7125.00	10.05	56.40	66.45	88.20	-21.75	Peak	142	88	P
5	13850.00	22.86	29.63	52.49	68.20	-15.71	Average	100	134	P
6	13850.00	22.86	42.90	65.76	88.20	-22.44	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

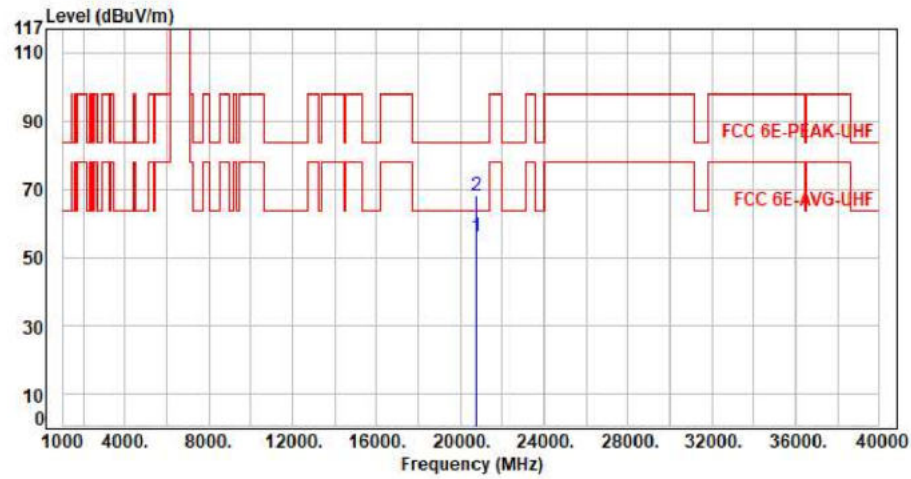


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	44.57	55.96	63.54	-7.58	Average	150	360	P
2	20775.00	11.39	56.71	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

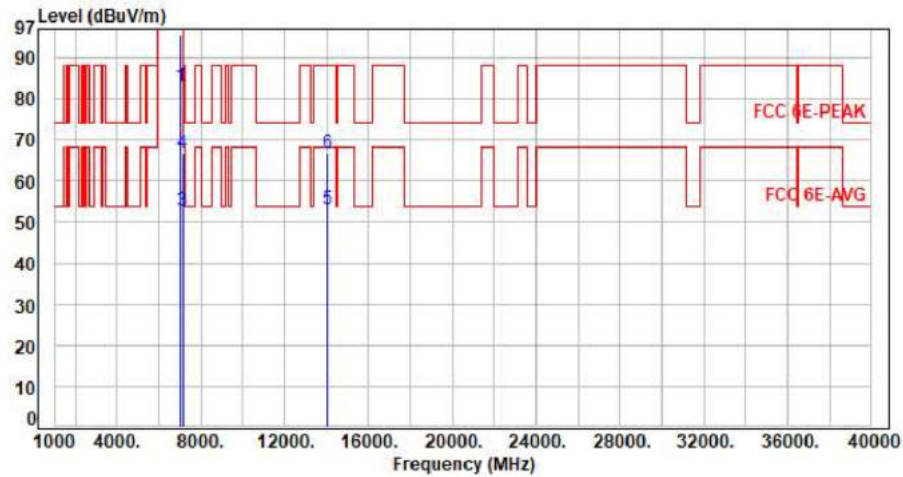


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	73.33	82.98	200.00	-117.02	Average	100	67	P
2	7005.00	9.65	86.00	95.65	200.00	-104.35	Peak	100	67	P
3	7125.00	10.05	42.79	52.84	68.20	-15.36	Average	100	67	P
4	7125.00	10.05	56.64	66.69	88.20	-21.51	Peak	100	67	P
5	14010.00	23.32	29.68	53.00	68.20	-15.20	Average	100	124	P
6	14010.00	23.32	43.33	66.65	88.20	-21.55	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

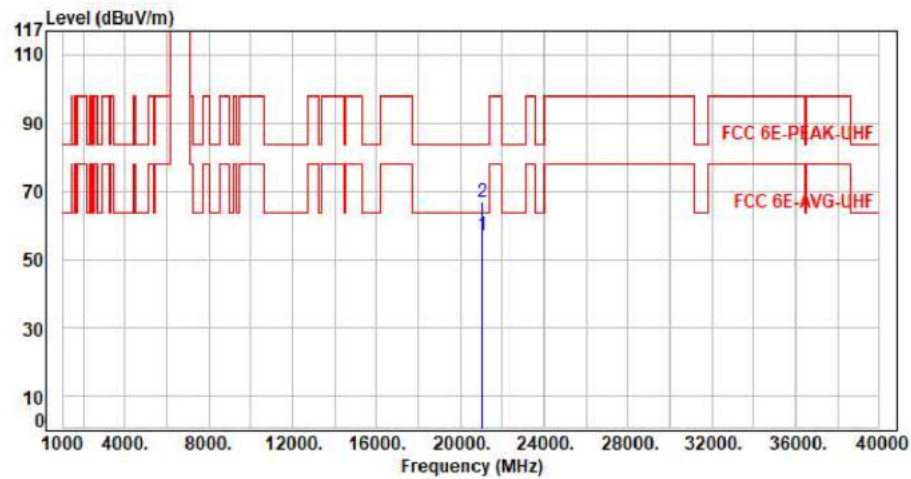


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.32	56.80	63.54	-6.74	Average	150	360	P
2	21015.00	11.48	55.10	66.58	83.54	-16.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

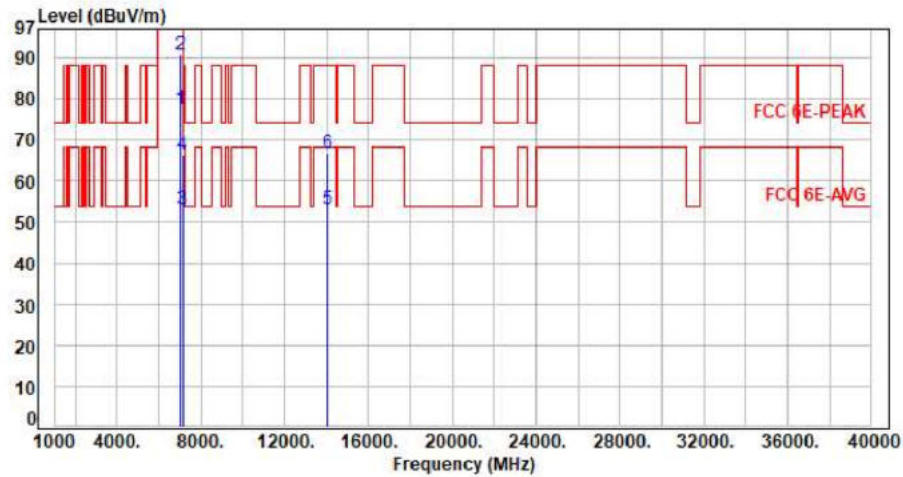


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	67.88	77.53	200.00	-122.47	Average	123	86	P
2	7005.00	9.65	81.02	90.67	200.00	-109.33	Peak	123	86	P
3	7125.00	10.05	42.88	52.93	68.20	-15.27	Average	123	86	P
4	7125.00	10.05	56.42	66.47	88.20	-21.73	Peak	123	86	P
5	14010.00	23.32	29.77	53.09	68.20	-15.11	Average	100	121	P
6	14010.00	23.32	43.33	66.65	88.20	-21.55	Peak	100	121	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

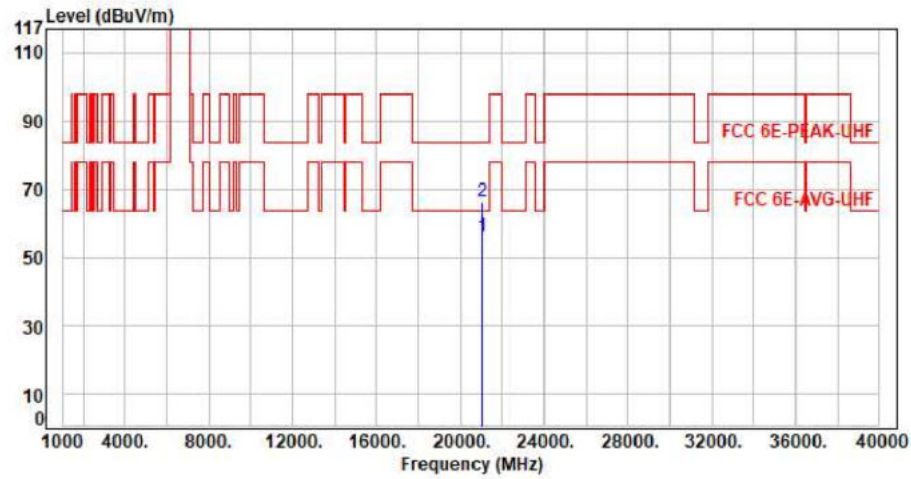


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	44.67	56.15	63.54	-7.39	Average	150	360	P
2	21015.00	11.48	54.81	66.29	83.54	-17.25	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

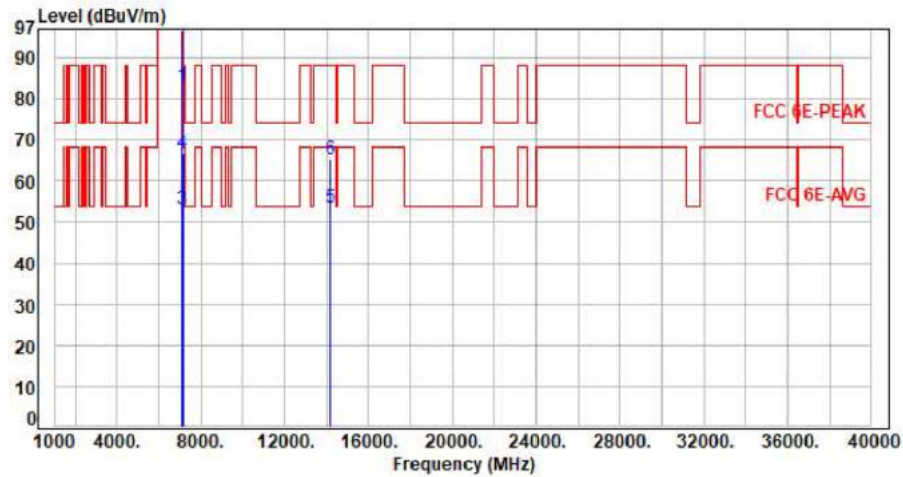


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	73.16	83.07	200.00	-116.93	Average	100	328	P
2	7085.00	9.91	86.78	96.69	200.00	-103.31	Peak	100	328	P
3	7125.00	10.05	42.90	52.95	68.20	-15.25	Average	100	328	P
4	7125.00	10.05	56.70	66.75	88.20	-21.45	Peak	100	328	P
5	14170.00	23.72	29.68	53.40	68.20	-14.80	Average	100	114	P
6	14170.00	23.72	41.71	65.43	88.20	-22.77	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

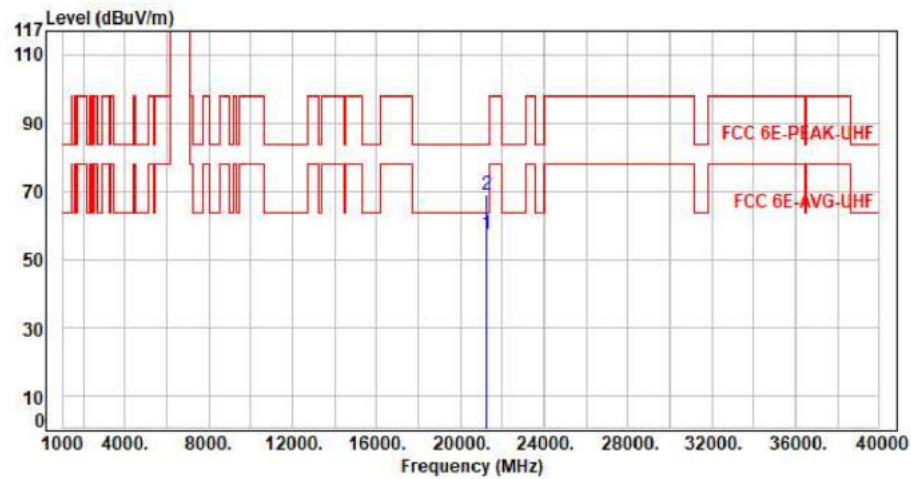


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.65	57.49	63.54	-6.05	Average	150	360	P
2	21255.00	11.84	56.99	68.83	83.54	-14.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

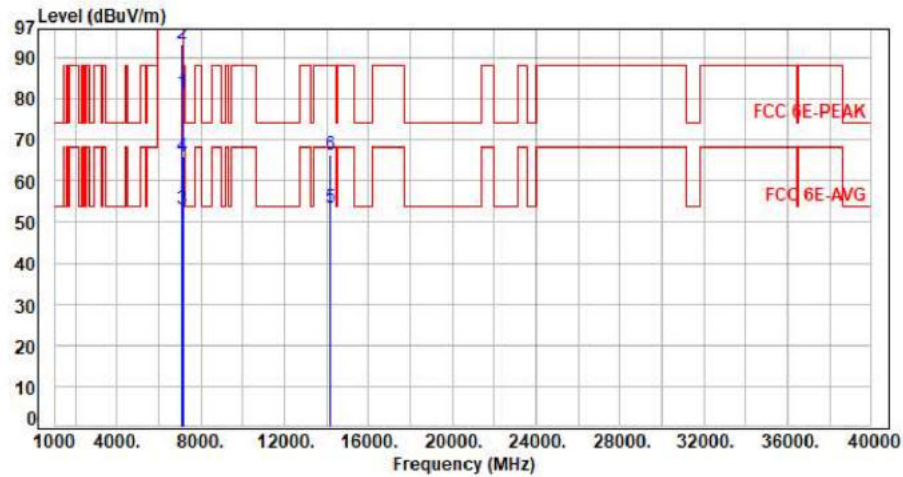


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	71.50	81.41	200.00	-118.59	Average	388	352	P
2	7085.00	9.91	83.50	93.41	200.00	-106.59	Peak	388	352	P
3	7125.00	10.05	42.91	52.96	68.20	-15.24	Average	388	352	P
4	7125.00	10.05	56.09	66.14	88.20	-22.06	Peak	388	352	P
5	14170.00	23.72	29.79	53.51	68.20	-14.69	Average	100	142	P
6	14170.00	23.72	42.64	66.36	88.20	-21.84	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

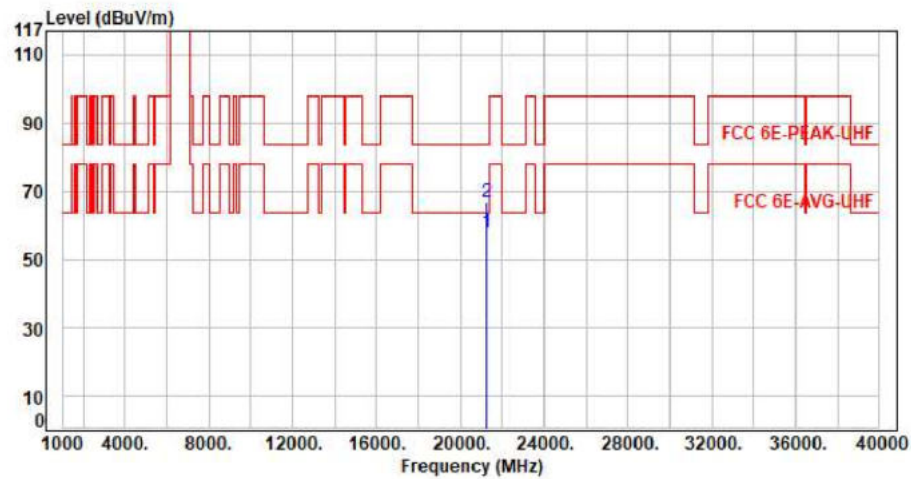

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.88	57.72	63.54	-5.82	Average	150	360	P
2	21255.00	11.84	54.91	66.75	83.54	-16.79	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

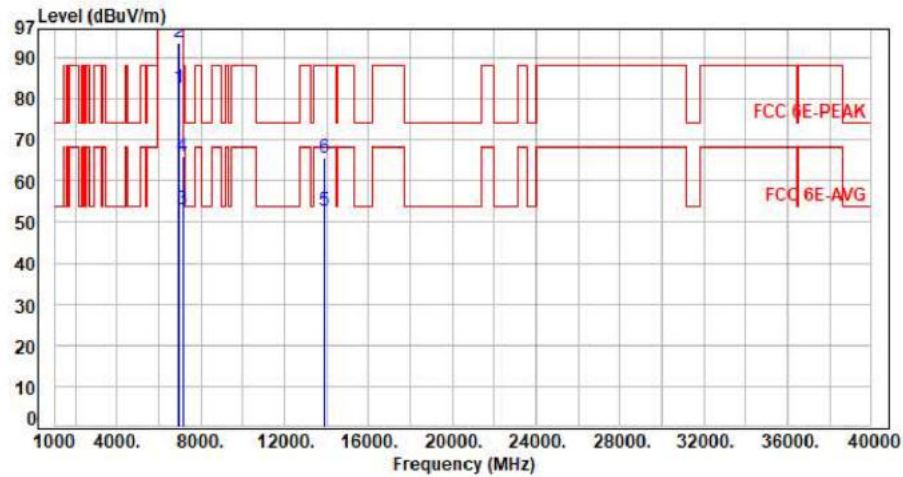


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	72.95	82.57	200.00	-117.43	Average	100	69	P
2	6945.00	9.62	83.92	93.54	200.00	-106.46	Peak	100	69	P
3	7125.00	10.05	42.92	52.97	68.20	-15.23	Average	100	69	P
4	7125.00	10.05	56.04	66.09	88.20	-22.11	Peak	100	69	P
5	13890.00	22.95	29.91	52.86	68.20	-15.34	Average	100	129	P
6	13890.00	22.95	42.88	65.83	88.20	-22.37	Peak	100	129	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

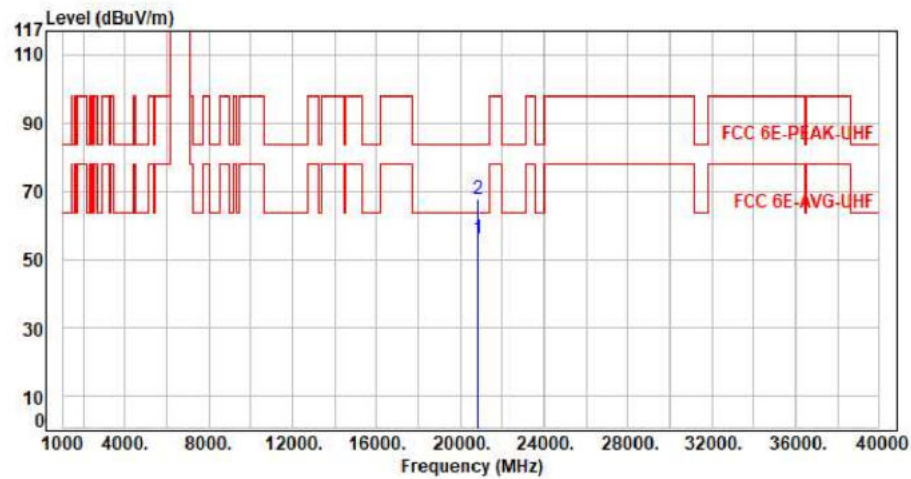

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	44.61	56.01	63.54	-7.53	Average	150	360	P
2	20835.00	11.40	56.05	67.45	83.54	-16.09	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

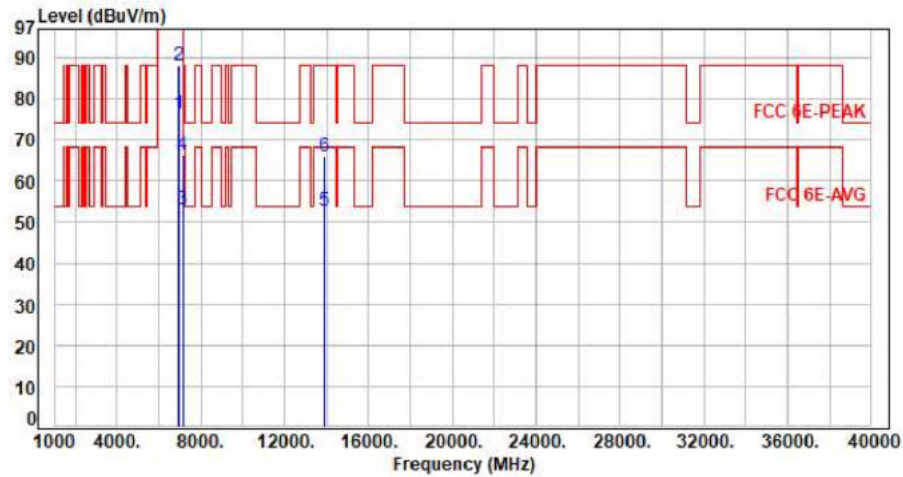


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	66.67	76.29	200.00	-123.71	Average	144	87	P
2	6945.00	9.62	78.69	88.31	200.00	-111.69	Peak	144	87	P
3	7125.00	10.05	42.94	52.99	68.20	-15.21	Average	144	87	P
4	7125.00	10.05	56.20	66.25	88.20	-21.95	Peak	144	87	P
5	13890.00	22.95	29.91	52.86	68.20	-15.34	Average	100	168	P
6	13890.00	22.95	42.89	65.84	88.20	-22.36	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

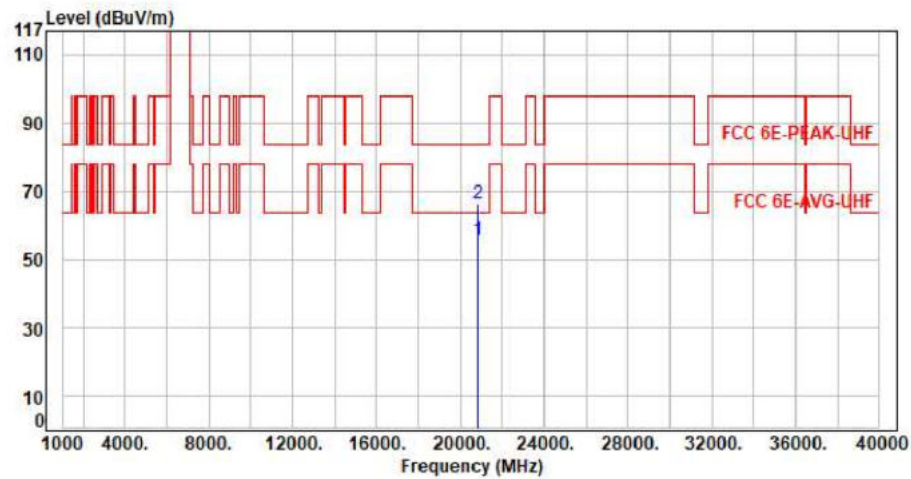


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	44.18	55.58	63.54	-7.96	Average	150	360	P
2	20835.00	11.40	54.74	66.14	83.54	-17.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

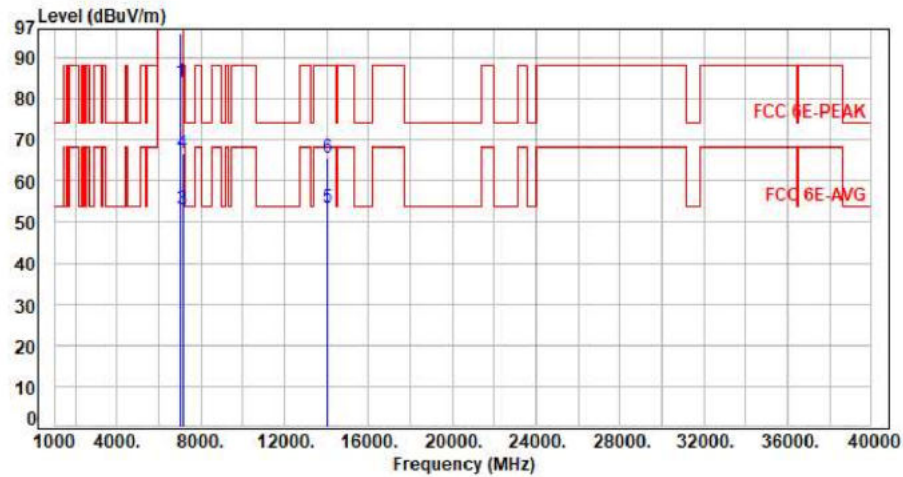


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	74.23	83.94	200.00	-116.06	Average	100	68	P
2	7025.00	9.71	86.19	95.90	200.00	-104.10	Peak	100	68	P
3	7125.00	10.05	42.89	52.94	68.20	-15.26	Average	100	68	P
4	7125.00	10.05	56.52	66.57	88.20	-21.63	Peak	100	68	P
5	14050.00	23.47	29.93	53.40	68.20	-14.80	Average	100	139	P
6	14050.00	23.47	42.03	65.50	88.20	-22.70	Peak	100	139	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

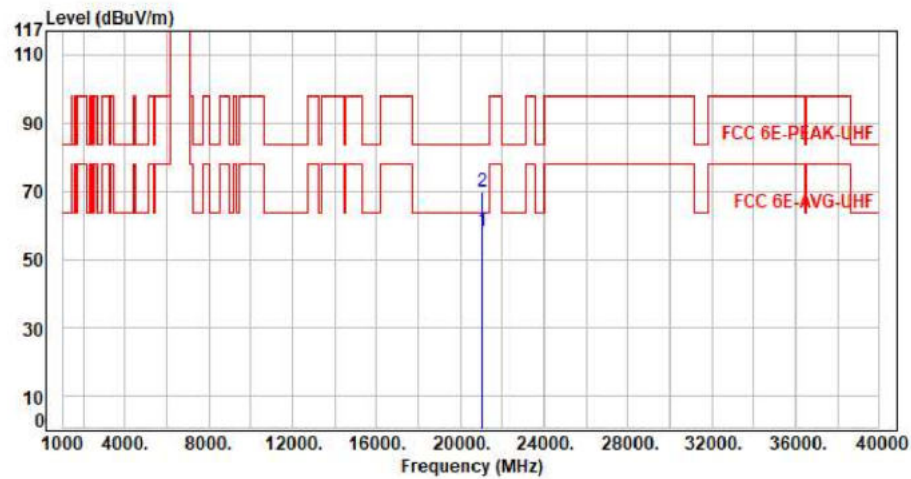


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	46.56	58.08	63.54	-5.46	Average	150	360	P
2	21075.00	11.52	58.21	69.73	83.54	-13.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

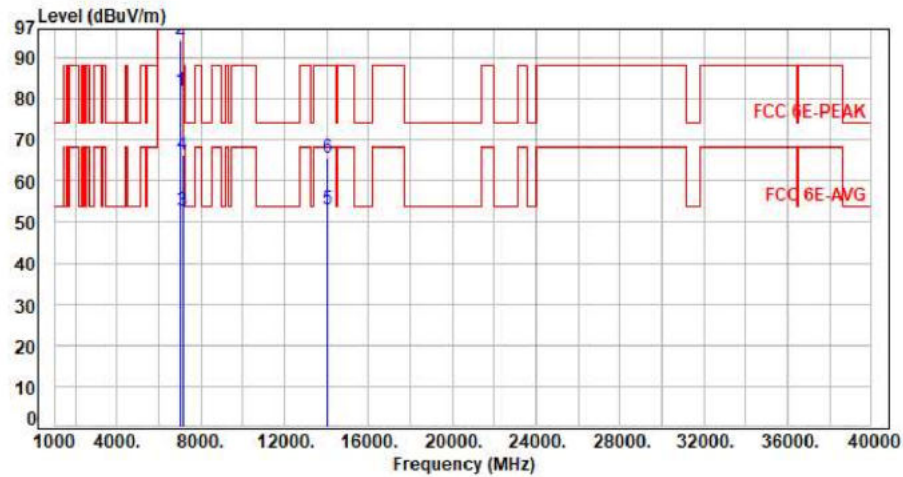


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	72.15	81.86	200.00	-118.14	Average	400	348	P
2	7025.00	9.71	84.78	94.49	200.00	-105.51	Peak	400	348	P
3	7125.00	10.05	42.87	52.92	68.20	-15.28	Average	400	348	P
4	7125.00	10.05	56.51	66.56	88.20	-21.64	Peak	400	348	P
5	14050.00	23.47	29.68	53.15	68.20	-15.05	Average	100	184	P
6	14050.00	23.47	42.09	65.56	88.20	-22.64	Peak	100	184	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

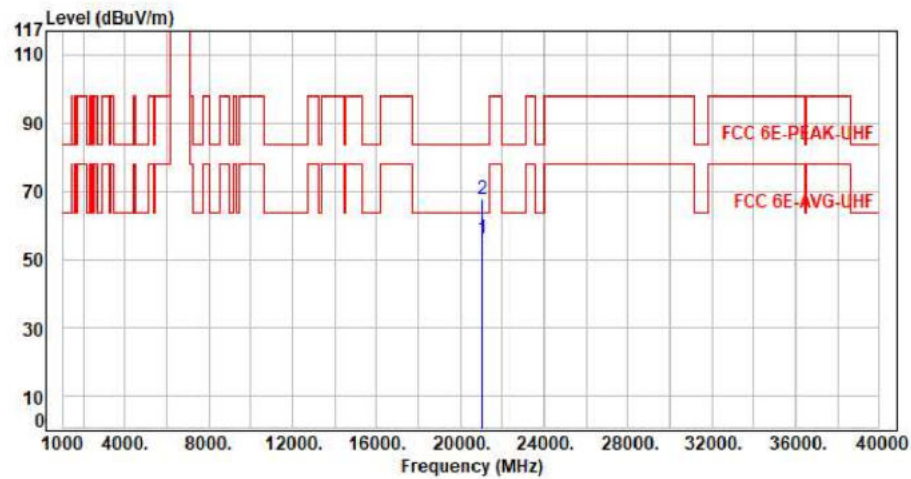


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	44.69	56.21	63.54	-7.33	Average	150	360	P
2	21075.00	11.52	56.18	67.70	83.54	-15.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

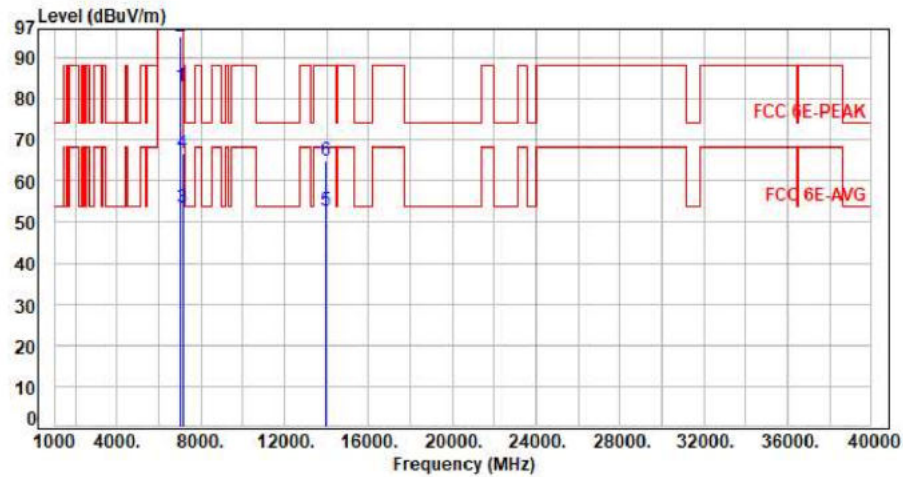


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	73.22	82.85	200.00	-117.15	Average	120	70	P
2	6985.00	9.63	85.67	95.30	200.00	-104.70	Peak	120	70	P
3	7125.00	10.05	43.52	53.57	68.20	-14.63	Average	120	70	P
4	7125.00	10.05	56.63	66.68	88.20	-21.52	Peak	120	70	P
5	13970.00	23.15	29.59	52.74	68.20	-15.46	Average	100	171	P
6	13970.00	23.15	41.91	65.06	88.20	-23.14	Peak	100	171	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

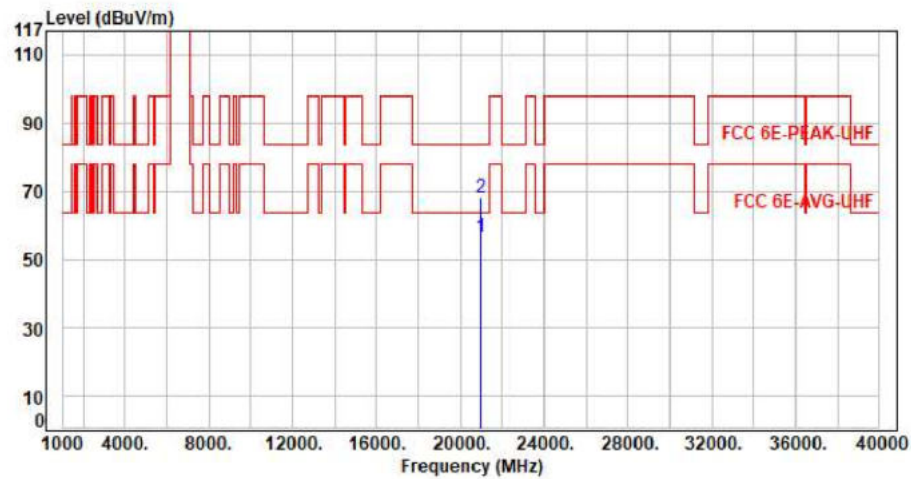

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.91	56.39	63.54	-7.15	Average	150	360	P
2	20955.00	11.48	56.43	67.91	83.54	-15.63	Peak	150	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor