




For CRIUS N310-G1-Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

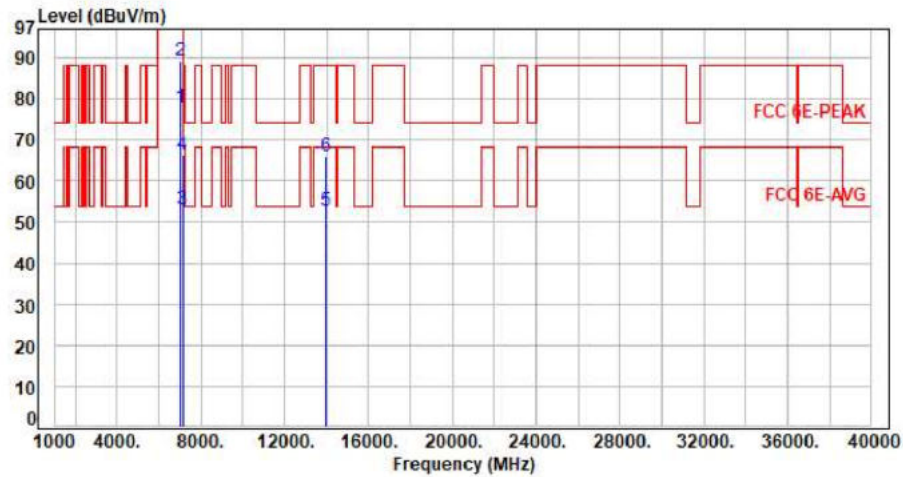


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	68.18	77.81	200.00	-122.19	Average	140	85	P
2	6985.00	9.63	79.68	89.31	200.00	-110.69	Peak	140	85	P
3	7125.00	10.05	43.16	53.21	68.20	-14.99	Average	140	85	P
4	7125.00	10.05	56.40	66.45	88.20	-21.75	Peak	140	85	P
5	13970.00	23.15	29.72	52.87	68.20	-15.33	Average	100	185	P
6	13970.00	23.15	43.00	66.15	88.20	-22.05	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N310-G1-Mimo

Test Mode : 2TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

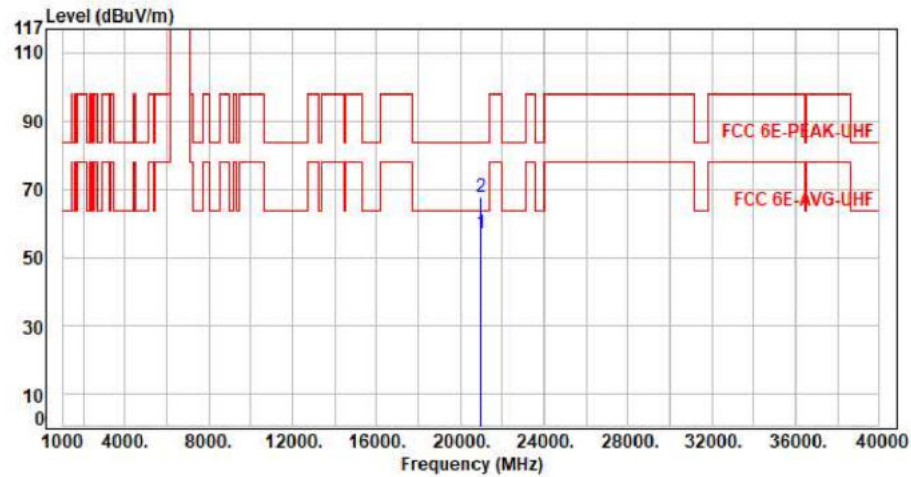


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.67	57.15	63.54	-6.39	Average	150	360	P
2	20955.00	11.48	55.95	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

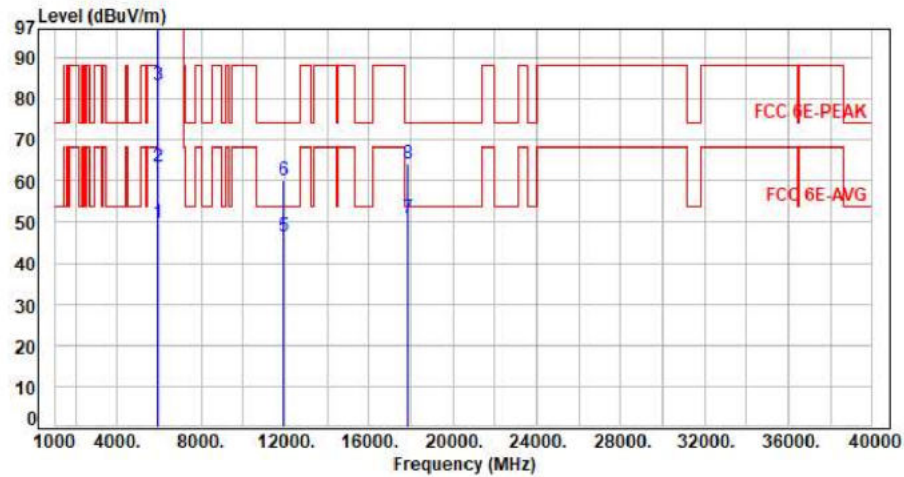

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	291	349	P
2	5925.00	7.66	55.79	63.45	88.20	-24.75	Peak	291	349	P
3	5955.00	7.68	75.66	83.34	200.00	-116.66	Average	291	349	P
4	5955.00	7.68	89.18	96.86	200.00	-103.14	Peak	291	349	P
5	11910.00	18.06	28.24	46.30	54.00	-7.70	Average	100	220	P
6	11910.00	18.06	41.96	60.02	74.00	-13.98	Peak	100	220	P
7	17865.00	27.77	22.98	50.75	54.00	-3.25	Average	100	194	P
8	17865.00	27.77	36.26	64.03	74.00	-9.97	Peak	100	194	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

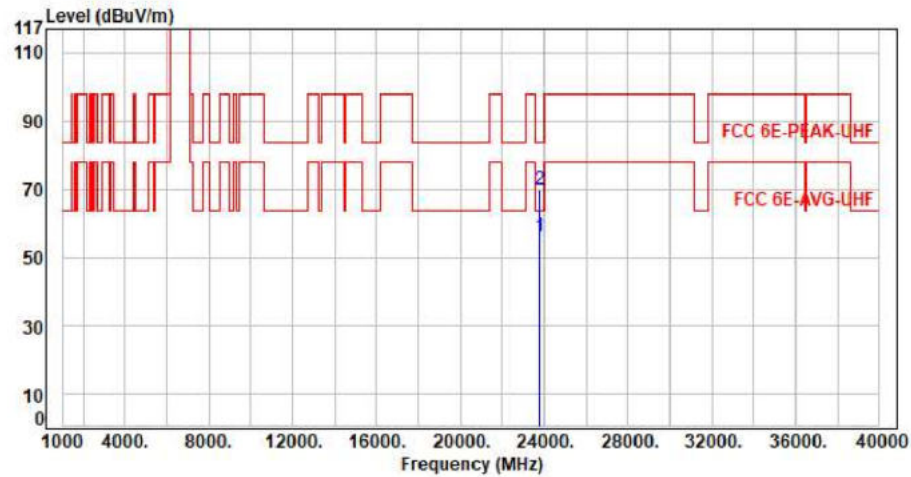


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.93	56.12	63.54	-7.42	Average	150	360	P
2	23820.00	11.19	58.77	69.96	83.54	-13.58	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

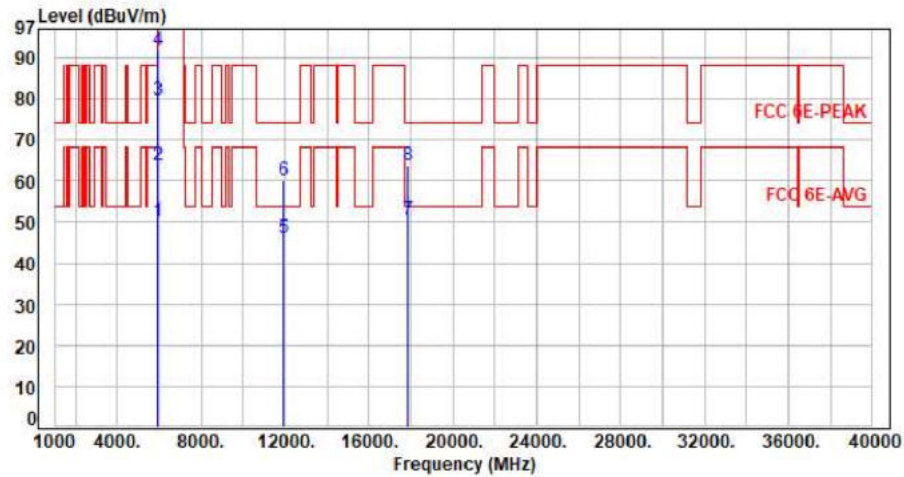


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.32	49.98	68.20	-18.22	Average	395	285	P
2	5925.00	7.66	56.17	63.83	88.20	-24.37	Peak	395	285	P
3	5955.00	7.68	71.85	79.53	200.00	-120.47	Average	395	285	P
4	5955.00	7.68	84.04	91.72	200.00	-108.28	Peak	395	285	P
5	11910.00	18.06	28.16	46.22	54.00	-7.78	Average	100	146	P
6	11910.00	18.06	42.09	60.15	74.00	-13.85	Peak	100	146	P
7	17865.00	27.77	22.88	50.65	54.00	-3.35	Average	100	308	P
8	17865.00	27.77	35.99	63.76	74.00	-10.24	Peak	100	308	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

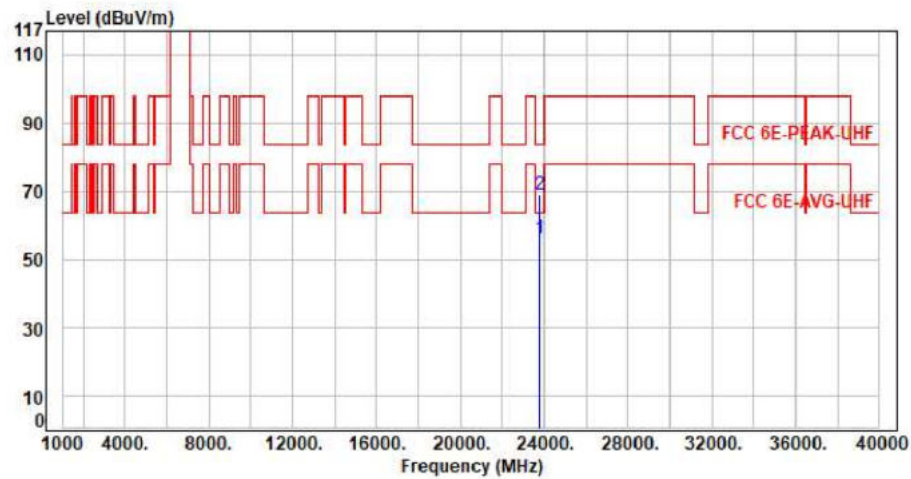


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.72	55.91	63.54	-7.63	Average	150	360	P
2	23820.00	11.19	57.63	68.82	83.54	-14.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

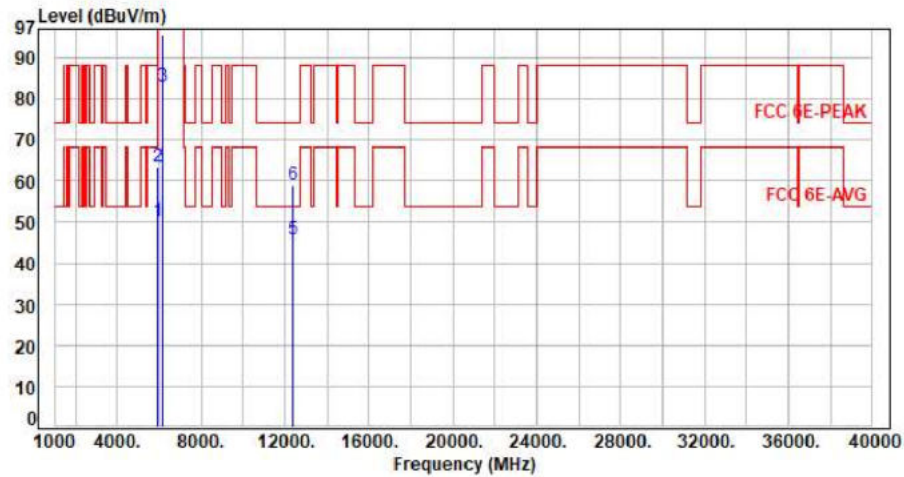


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.42	50.08	68.20	-18.12	Average	293	352	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	293	352	P
3	6175.00	8.35	74.62	82.97	200.00	-117.03	Average	293	352	P
4	6175.00	8.35	87.19	95.54	200.00	-104.46	Peak	293	352	P
5	12350.00	17.76	27.80	45.56	54.00	-8.44	Average	100	221	P
6	12350.00	17.76	41.07	58.83	74.00	-15.17	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

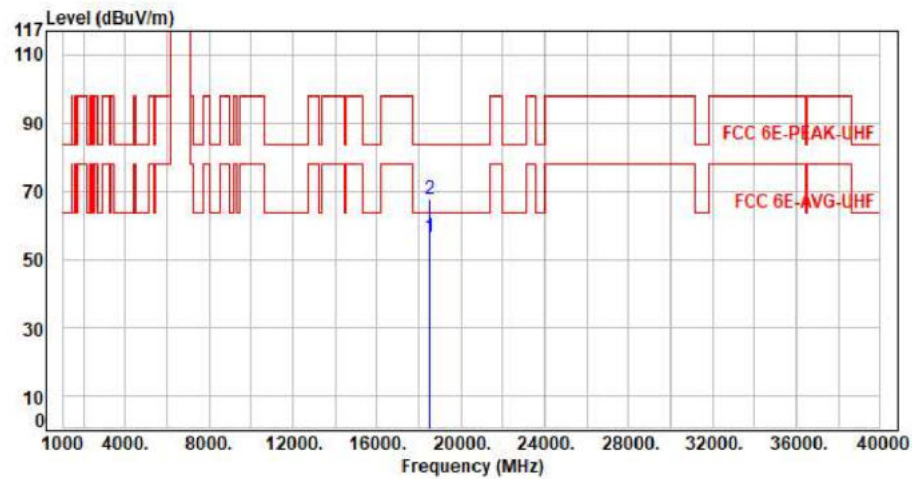


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	45.75	56.30	63.54	-7.24	Average	150	360	P
2	18525.00	10.55	57.25	67.80	83.54	-15.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

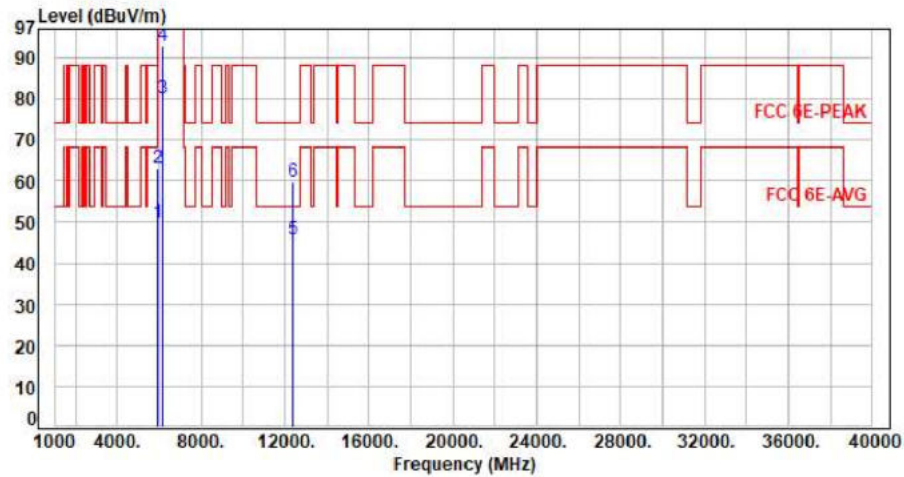


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.16	49.82	68.20	-18.38	Average	389	287	P
2	5925.00	7.66	55.49	63.15	88.20	-25.05	Peak	389	287	P
3	6175.00	8.35	71.85	80.20	200.00	-119.80	Average	389	287	P
4	6175.00	8.35	84.69	93.04	200.00	-106.96	Peak	389	287	P
5	12350.00	17.76	28.08	45.84	54.00	-8.16	Average	100	148	P
6	12350.00	17.76	41.88	59.64	74.00	-14.36	Peak	100	148	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

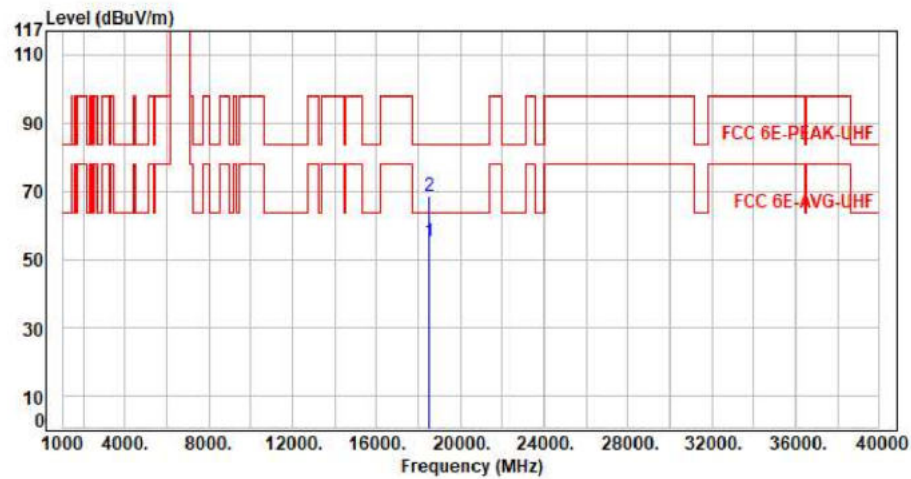

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	44.60	55.15	63.54	-8.39	Average	150	360	P
2	18525.00	10.55	58.15	68.70	83.54	-14.84	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

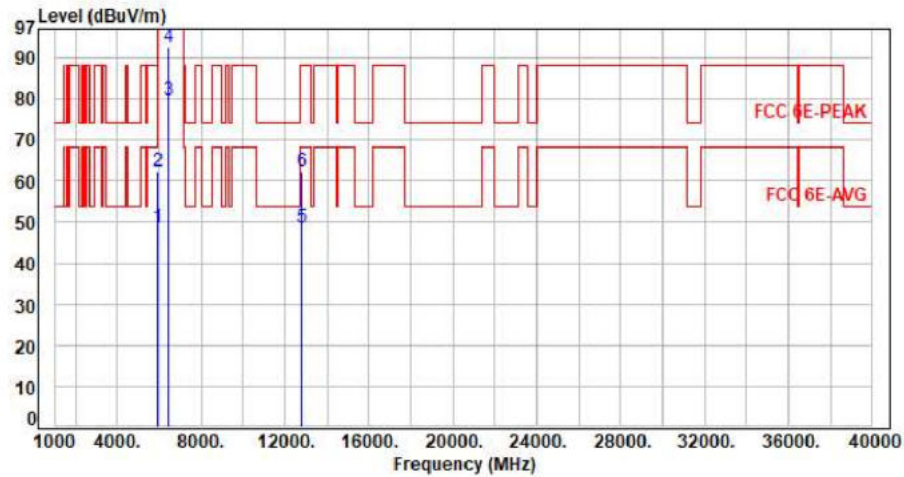


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.06	48.72	68.20	-19.48	Average	100	27	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	100	27	P
3	6415.00	8.34	71.36	79.70	200.00	-120.30	Average	100	27	P
4	6415.00	8.34	84.40	92.74	200.00	-107.26	Peak	100	27	P
5	12830.00	18.92	29.61	48.53	68.20	-19.67	Average	100	138	P
6	12830.00	18.92	43.41	62.33	88.20	-25.87	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

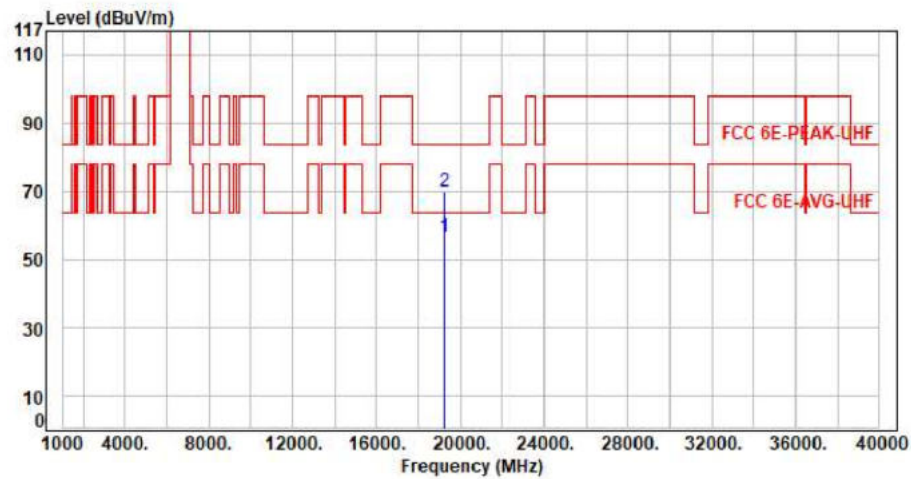


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.27	56.64	63.54	-6.90	Average	150	360	P
2	19245.00	11.37	58.54	69.91	83.54	-13.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

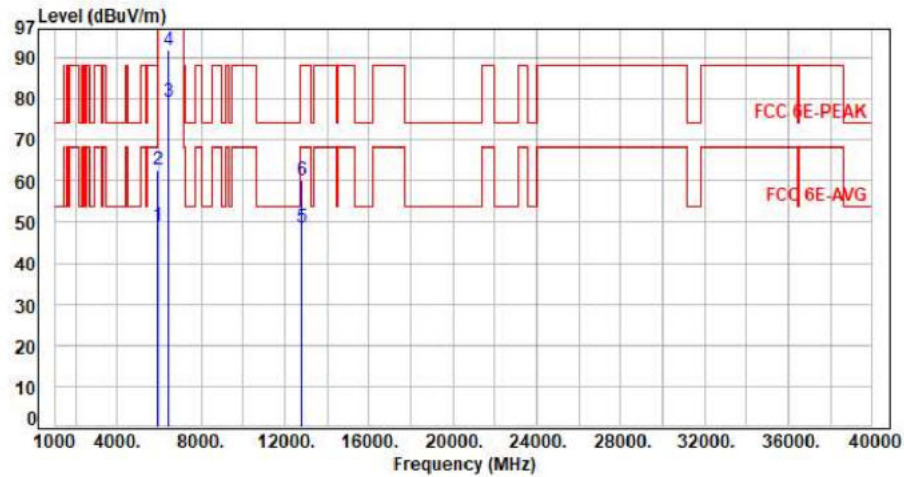


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.21	48.87	68.20	-19.33	Average	397	80	P
2	5925.00	7.66	54.88	62.54	88.20	-25.66	Peak	397	80	P
3	6415.00	8.34	70.97	79.31	200.00	-120.69	Average	397	80	P
4	6415.00	8.34	83.64	91.98	200.00	-108.02	Peak	397	80	P
5	12830.00	18.92	29.68	48.60	68.20	-19.60	Average	100	161	P
6	12830.00	18.92	41.36	60.28	88.20	-27.92	Peak	100	161	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

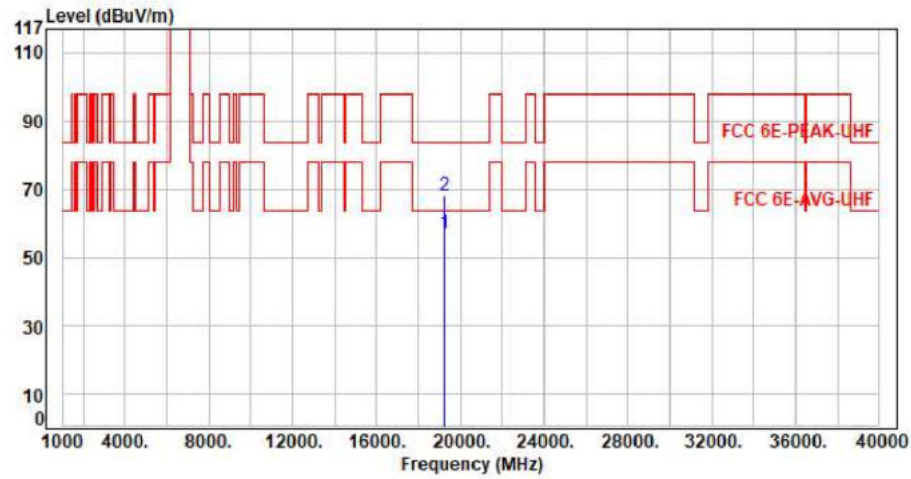


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.52	56.89	63.54	-6.65	Average	150	360	P
2	19245.00	11.37	56.77	68.14	83.54	-15.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

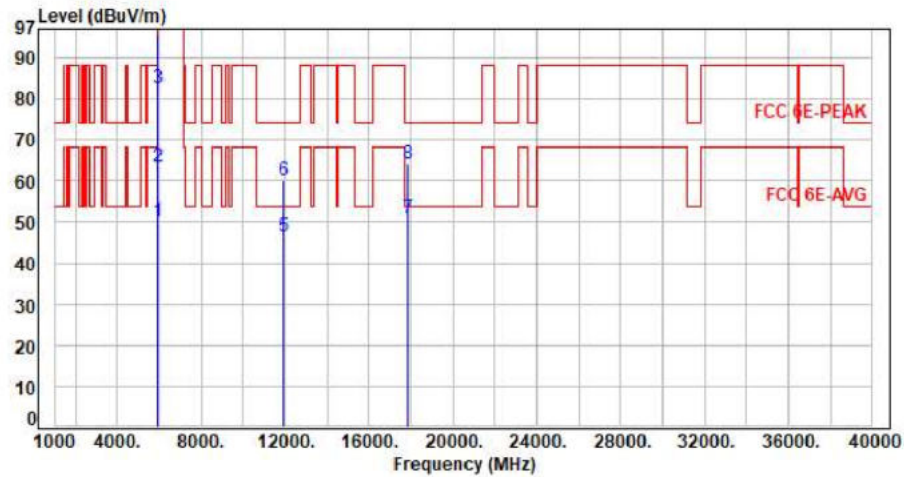


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.39	50.05	68.20	-18.15	Average	294	355	P
2	5925.00	7.66	55.88	63.54	88.20	-24.66	Peak	294	355	P
3	5965.00	7.71	74.97	82.68	200.00	-117.32	Average	294	355	P
4	5965.00	7.71	87.68	95.39	200.00	-104.61	Peak	294	355	P
5	11930.00	18.05	28.50	46.55	54.00	-7.45	Average	100	217	P
6	11930.00	18.05	42.08	60.13	74.00	-13.87	Peak	100	217	P
7	17895.00	27.89	22.90	50.79	54.00	-3.21	Average	100	196	P
8	17895.00	27.89	36.46	64.35	74.00	-9.65	Peak	100	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

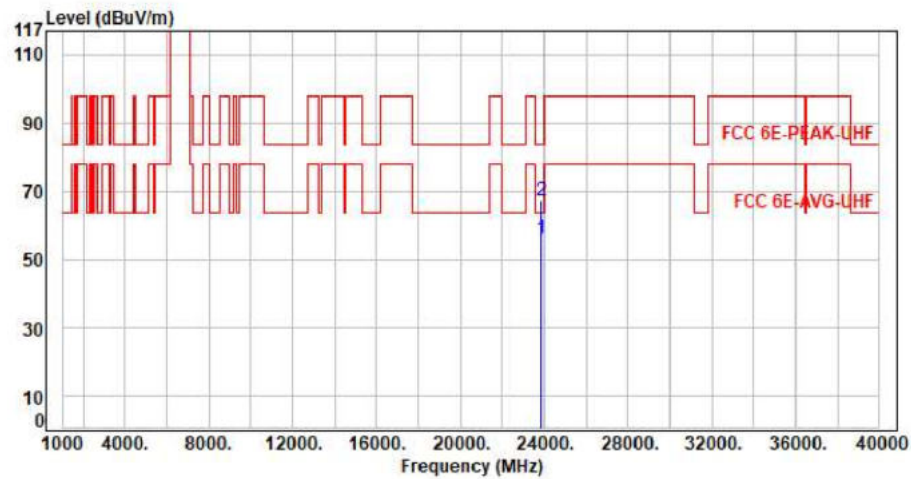


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.81	56.01	63.54	-7.53	Average	150	360	P
2	23860.00	11.20	55.96	67.16	83.54	-16.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

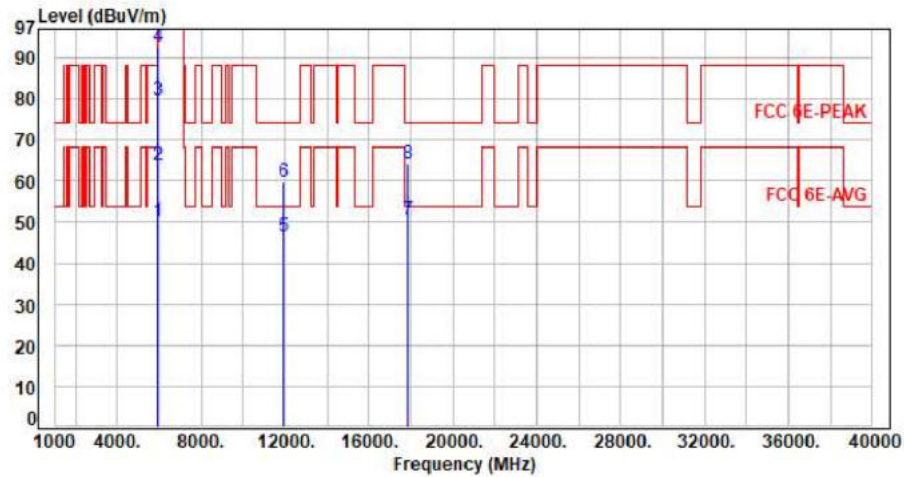

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.58	50.24	68.20	-17.96	Average	400	285	P
2	5925.00	7.66	56.08	63.74	88.20	-24.46	Peak	400	285	P
3	5965.00	7.71	71.97	79.68	200.00	-120.32	Average	400	285	P
4	5965.00	7.71	84.88	92.59	200.00	-107.41	Peak	400	285	P
5	11930.00	18.05	28.29	46.34	54.00	-7.66	Average	100	150	P
6	11930.00	18.05	41.65	59.70	74.00	-14.30	Peak	100	150	P
7	17895.00	27.89	22.78	50.67	54.00	-3.33	Average	100	312	P
8	17895.00	27.89	36.19	64.08	74.00	-9.92	Peak	100	312	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

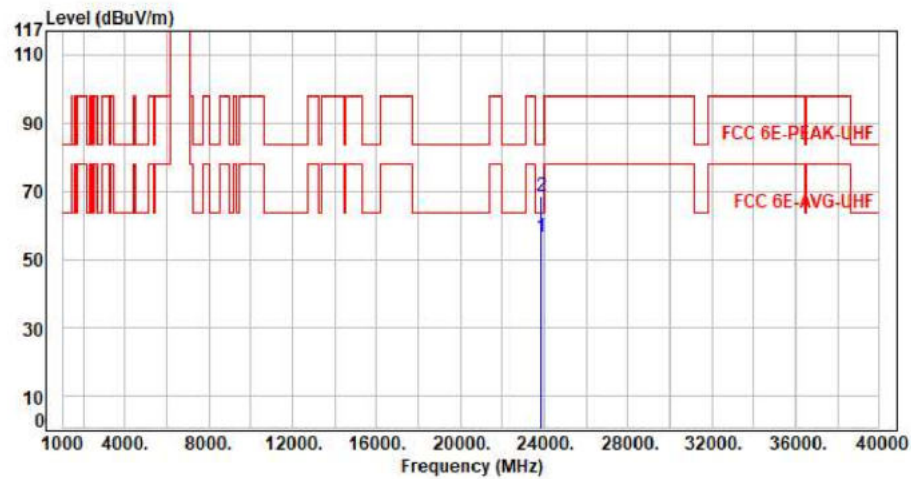


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	45.09	56.29	63.54	-7.25	Average	150	360	P
2	23860.00	11.20	57.34	68.54	83.54	-15.00	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

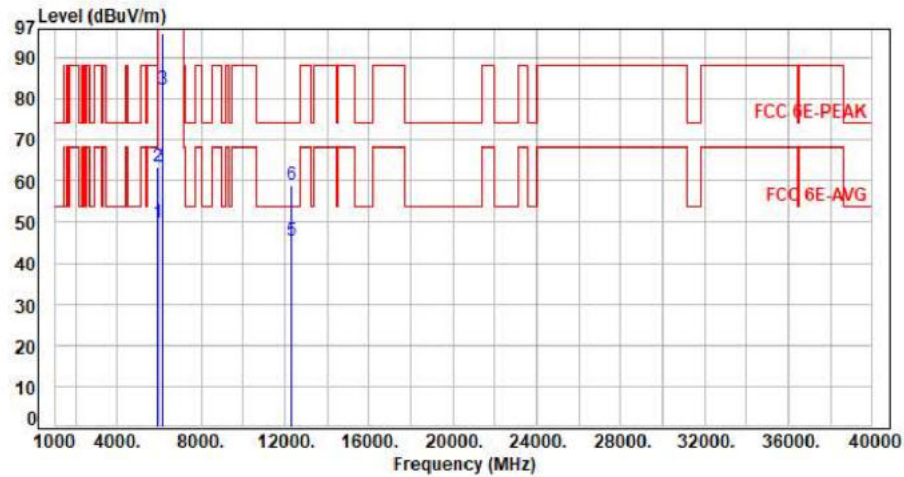


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.30	49.96	68.20	-18.24	Average	293	348	P
2	5925.00	7.66	55.81	63.47	88.20	-24.73	Peak	293	348	P
3	6165.00	8.34	73.94	82.28	200.00	-117.72	Average	293	348	P
4	6165.00	8.34	87.58	95.92	200.00	-104.08	Peak	293	348	P
5	12330.00	17.71	27.82	45.53	54.00	-8.47	Average	100	190	P
6	12330.00	17.71	41.32	59.03	74.00	-14.97	Peak	100	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

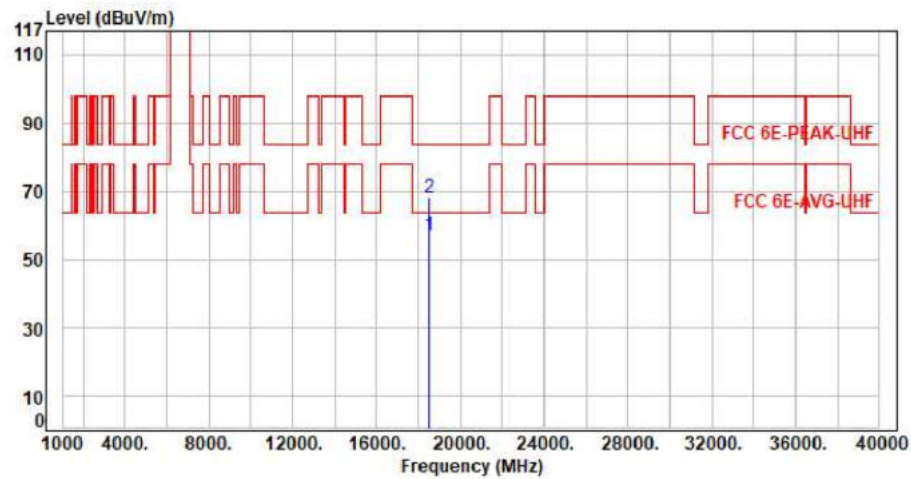


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.61	57.02	63.54	-6.52	Average	150	360	P
2	18495.00	10.41	57.49	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

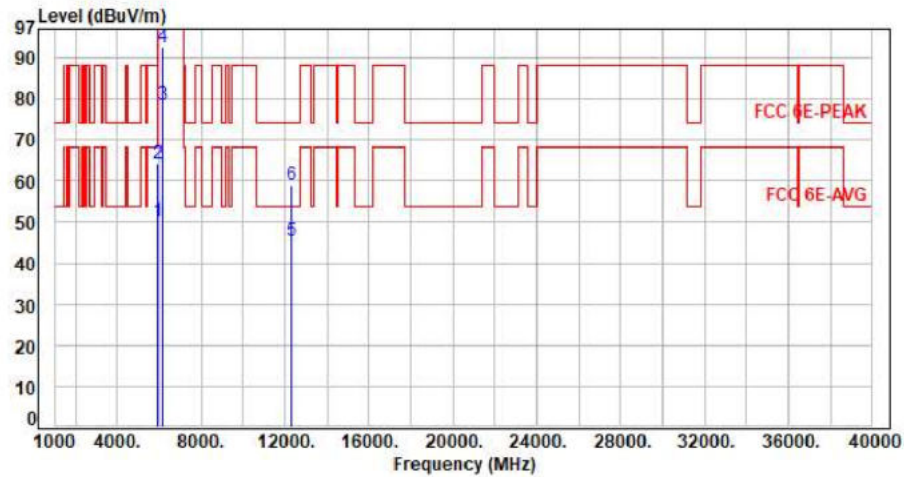

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.58	50.24	68.20	-17.96	Average	390	288	P
2	5925.00	7.66	56.39	64.05	88.20	-24.15	Peak	390	288	P
3	6165.00	8.34	70.34	78.68	200.00	-121.32	Average	390	288	P
4	6165.00	8.34	84.07	92.41	200.00	-107.59	Peak	390	288	P
5	12330.00	17.71	27.82	45.53	54.00	-8.47	Average	100	144	P
6	12330.00	17.71	41.33	59.04	74.00	-14.96	Peak	100	144	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

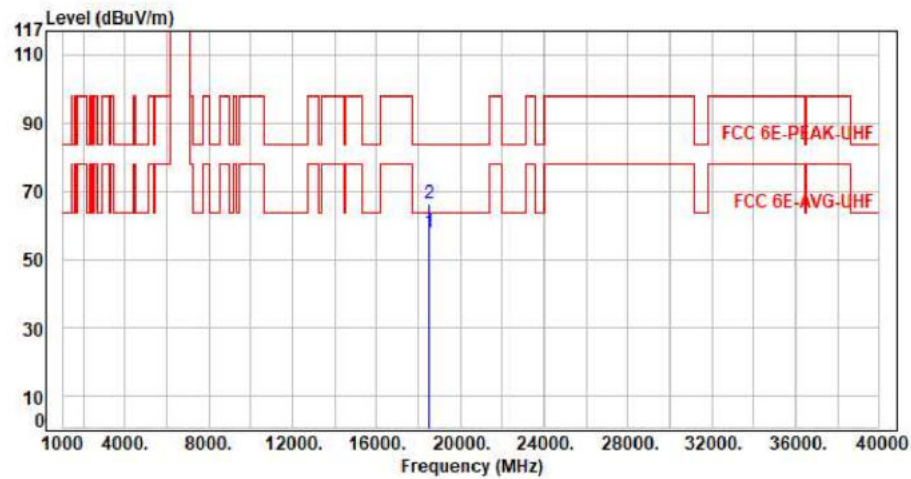


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	47.61	58.02	63.54	-5.52	Average	150	360	P
2	18495.00	10.41	55.69	66.10	83.54	-17.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

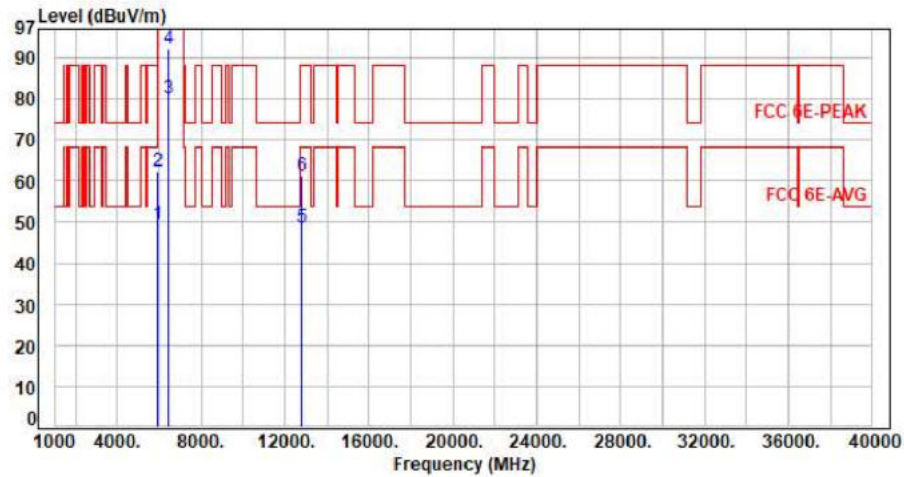

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.72	49.38	68.20	-18.82	Average	104	26	P
2	5925.00	7.66	54.68	62.34	88.20	-25.86	Peak	104	26	P
3	6405.00	8.35	71.52	79.87	200.00	-120.13	Average	104	26	P
4	6405.00	8.35	83.86	92.21	200.00	-107.79	Peak	104	26	P
5	12810.00	18.88	29.76	48.64	68.20	-19.56	Average	100	274	P
6	12810.00	18.88	42.18	61.06	88.20	-27.14	Peak	100	274	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

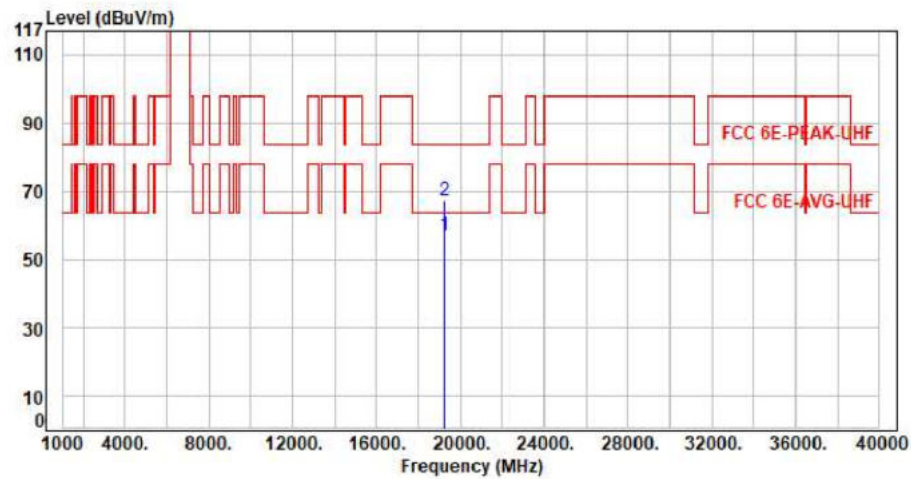


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	45.59	56.83	63.54	-6.71	Average	150	360	P
2	19215.00	11.24	55.93	67.17	83.54	-16.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

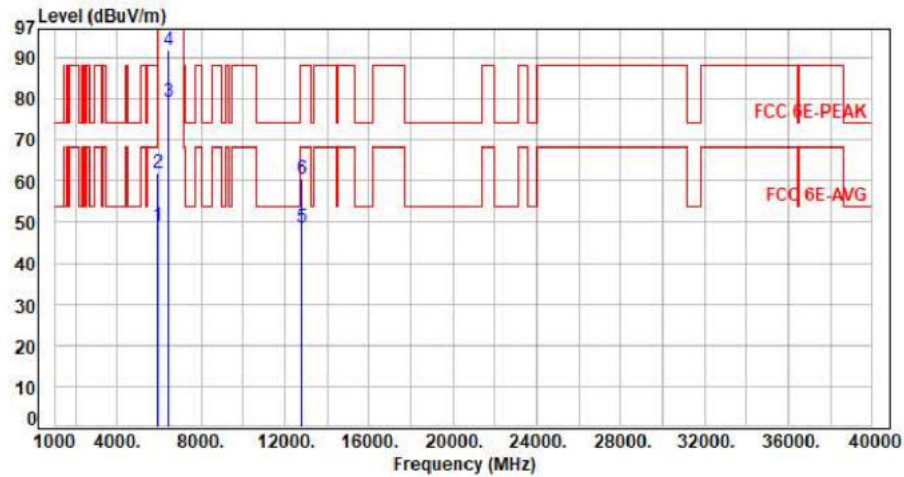


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.33	48.99	68.20	-19.21	Average	398	80	P
2	5925.00	7.66	54.18	61.84	88.20	-26.36	Peak	398	80	P
3	6405.00	8.35	70.87	79.22	200.00	-120.78	Average	398	80	P
4	6405.00	8.35	83.66	92.01	200.00	-107.99	Peak	398	80	P
5	12810.00	18.88	29.64	48.52	68.20	-19.68	Average	100	114	P
6	12810.00	18.88	41.57	60.45	88.20	-27.75	Peak	100	114	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

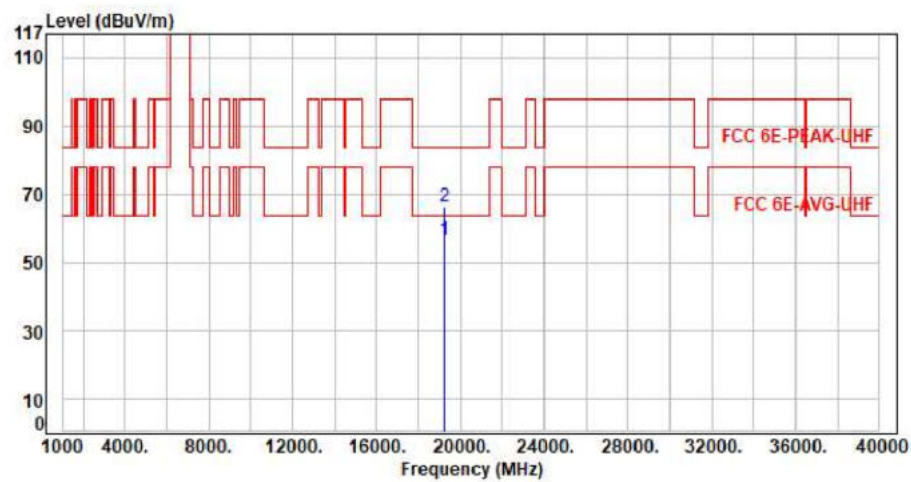

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	45.35	56.59	63.54	-6.95	Average	150	360	P
2	19215.00	11.24	55.25	66.49	83.54	-17.05	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

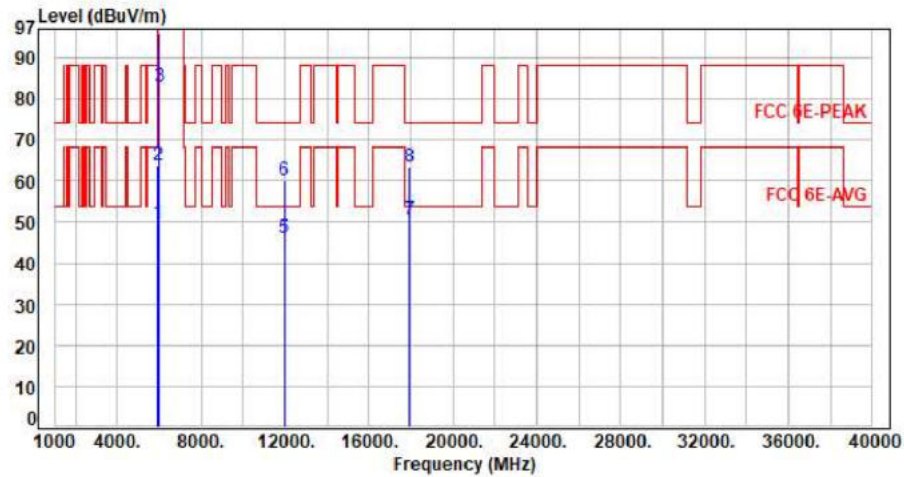


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.27	49.93	68.20	-18.27	Average	285	344	P
2	5925.00	7.66	56.27	63.93	88.20	-24.27	Peak	285	344	P
3	5985.00	7.75	75.18	82.93	200.00	-117.07	Average	285	344	P
4	5985.00	7.75	88.28	96.03	200.00	-103.97	Peak	285	344	P
5	11970.00	18.02	28.18	46.20	54.00	-7.80	Average	100	222	P
6	11970.00	18.02	42.05	60.07	74.00	-13.93	Peak	100	222	P
7	17955.00	28.04	22.47	50.51	54.00	-3.49	Average	100	197	P
8	17955.00	28.04	35.35	63.39	74.00	-10.61	Peak	100	197	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

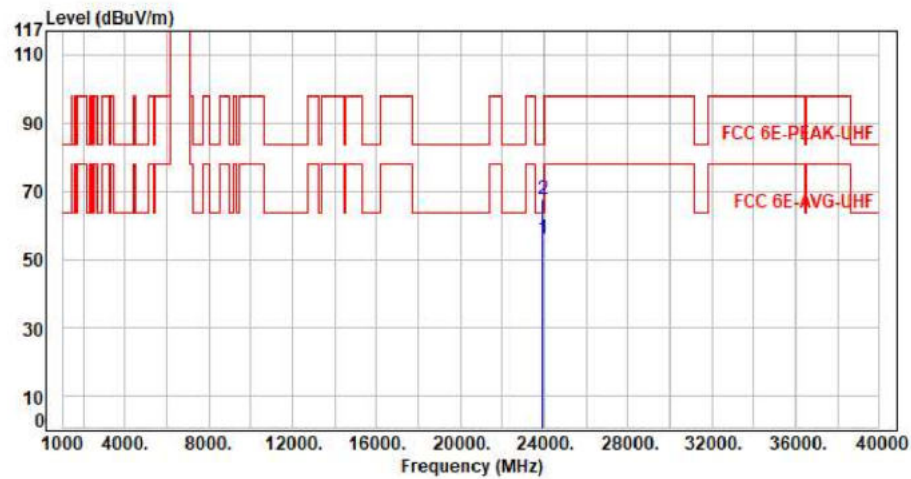


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	44.91	56.27	63.54	-7.27	Average	150	360	P
2	23940.00	11.36	56.34	67.70	83.54	-15.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

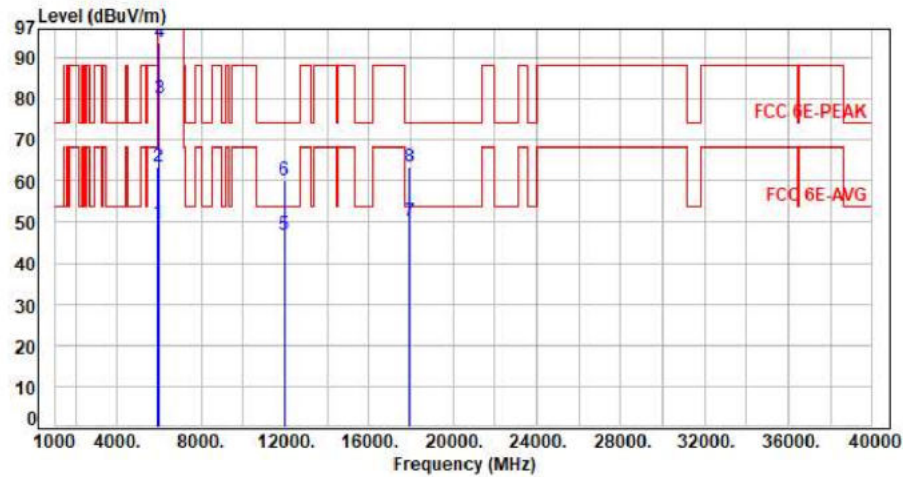

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.27	49.93	68.20	-18.27	Average	390	291	P
2	5925.00	7.66	55.87	63.53	88.20	-24.67	Peak	390	291	P
3	5985.00	7.75	72.24	79.99	200.00	-120.01	Average	390	291	P
4	5985.00	7.75	85.79	93.54	200.00	-106.46	Peak	390	291	P
5	11970.00	18.02	28.76	46.78	54.00	-7.22	Average	100	150	P
6	11970.00	18.02	42.20	60.22	74.00	-13.78	Peak	100	150	P
7	17955.00	28.04	22.19	50.23	54.00	-3.77	Average	100	312	P
8	17955.00	28.04	35.43	63.47	74.00	-10.53	Peak	100	312	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

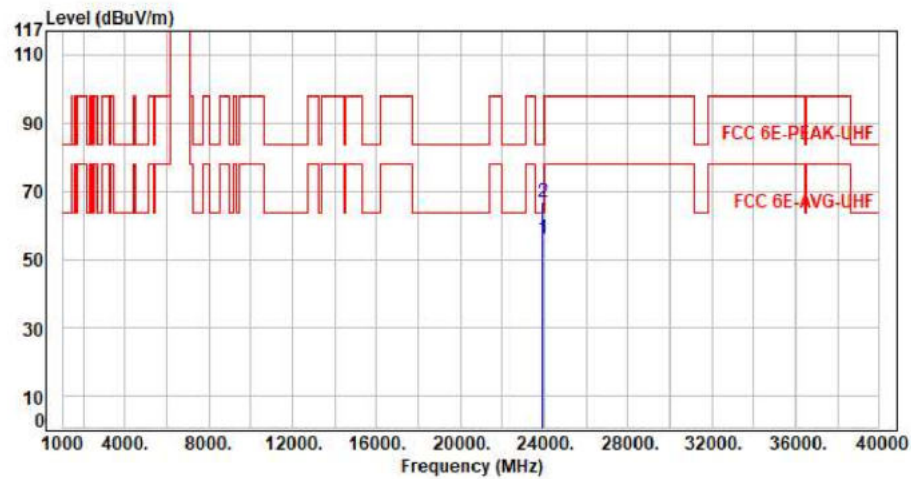


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	44.83	56.19	63.54	-7.35	Average	150	360	P
2	23940.00	11.36	55.46	66.82	83.54	-16.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

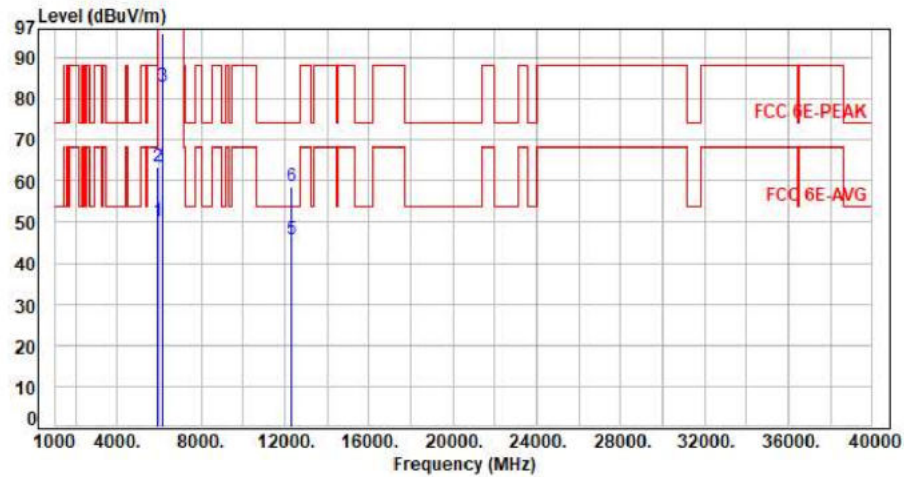


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	284	349	P
2	5925.00	7.66	55.72	63.38	88.20	-24.82	Peak	284	349	P
3	6145.00	8.31	74.56	82.87	200.00	-117.13	Average	284	349	P
4	6145.00	8.31	87.66	95.97	200.00	-104.03	Peak	284	349	P
5	12290.00	17.62	28.00	45.62	54.00	-8.38	Average	100	231	P
6	12290.00	17.62	41.14	58.76	74.00	-15.24	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

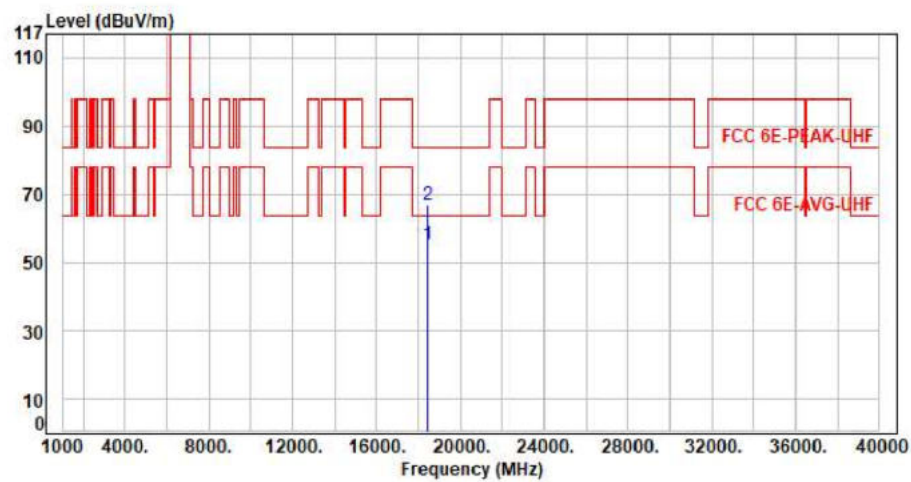

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	45.18	55.38	63.54	-8.16	Average	150	360	P
2	18435.00	10.20	56.41	66.61	83.54	-16.93	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

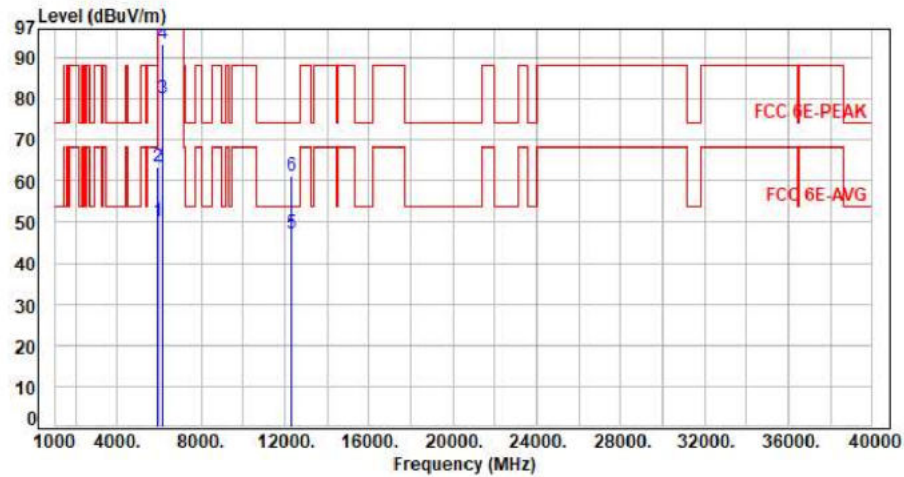


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.45	50.11	68.20	-18.09	Average	385	286	P
2	5925.00	7.66	55.72	63.38	88.20	-24.82	Peak	385	286	P
3	6145.00	8.31	71.58	79.89	200.00	-120.11	Average	385	286	P
4	6145.00	8.31	85.17	93.48	200.00	-106.52	Peak	385	286	P
5	12290.00	17.62	29.68	47.30	54.00	-6.70	Average	100	153	P
6	12290.00	17.62	43.71	61.33	74.00	-12.67	Peak	100	153	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

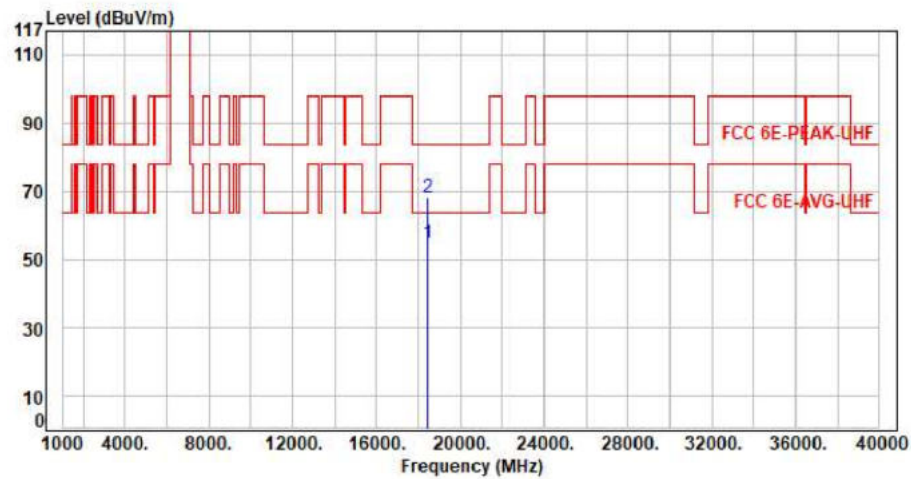


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.33	54.53	63.54	-9.01	Average	150	360	P
2	18435.00	10.20	57.70	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

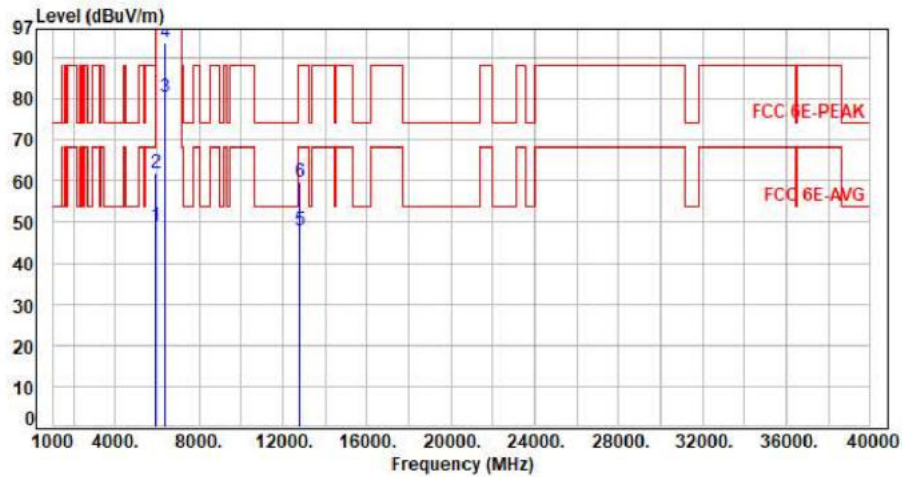


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.28	48.94	68.20	-19.26	Average	100	28	P
2	5925.00	7.66	54.38	62.04	88.20	-26.16	Peak	100	28	P
3	6385.00	8.34	72.24	80.58	200.00	-119.42	Average	100	28	P
4	6385.00	8.34	85.51	93.85	200.00	-106.15	Peak	100	28	P
5	12770.00	18.73	29.04	47.77	68.20	-20.43	Average	100	224	P
6	12770.00	18.73	40.96	59.69	88.20	-28.51	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

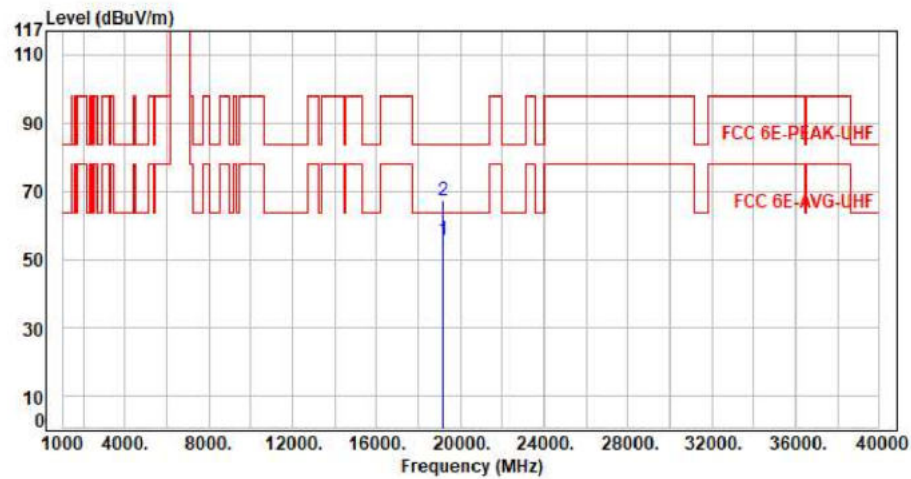


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	44.34	55.68	63.54	-7.86	Average	150	360	P
2	19155.00	11.34	55.77	67.11	83.54	-16.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

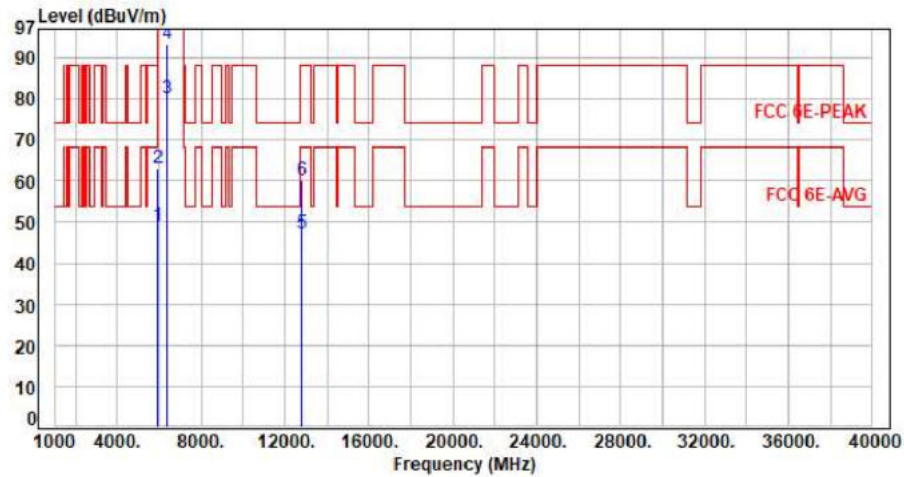


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.23	48.89	68.20	-19.31	Average	382	77	P
2	5925.00	7.66	55.28	62.94	88.20	-25.26	Peak	382	77	P
3	6385.00	8.34	71.78	80.12	200.00	-119.88	Average	382	77	P
4	6385.00	8.34	85.13	93.47	200.00	-106.53	Peak	382	77	P
5	12770.00	18.73	28.64	47.37	68.20	-20.83	Average	100	125	P
6	12770.00	18.73	41.37	60.10	88.20	-28.10	Peak	100	125	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

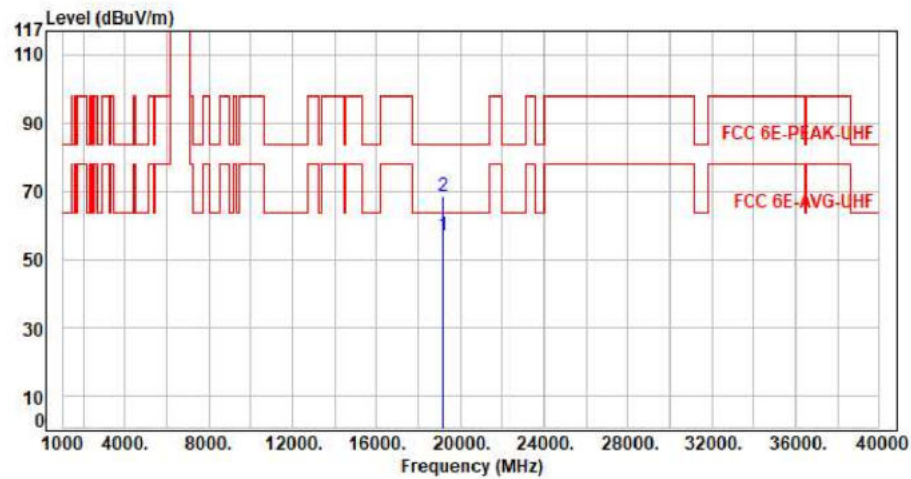


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	45.62	56.96	63.54	-6.58	Average	150	360	P
2	19155.00	11.34	57.35	68.69	83.54	-14.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

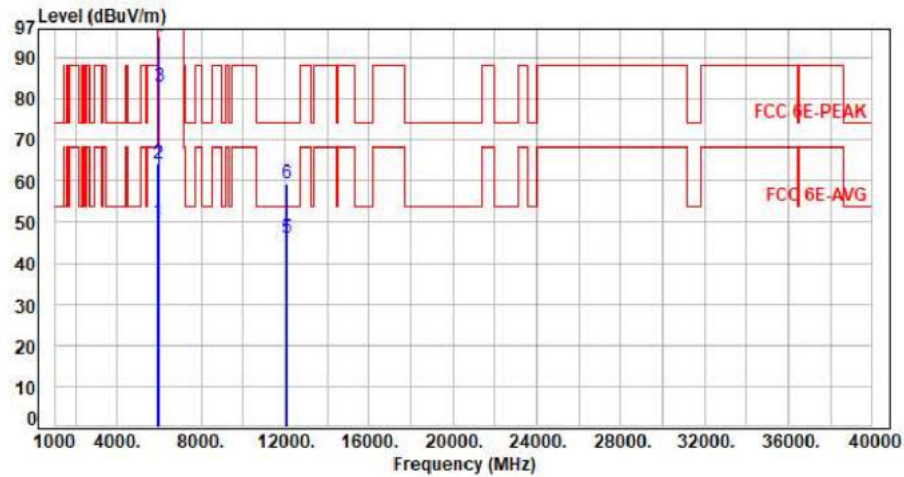


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.58	50.24	68.20	-17.96	Average	280	345	P
2	5925.00	7.66	56.40	64.06	88.20	-24.14	Peak	280	345	P
3	6025.00	7.91	74.89	82.80	200.00	-117.20	Average	280	345	P
4	6025.00	7.91	87.28	95.19	200.00	-104.81	Peak	280	345	P
5	12050.00	17.81	28.35	46.16	54.00	-7.84	Average	100	215	P
6	12050.00	17.81	41.44	59.25	74.00	-14.75	Peak	100	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

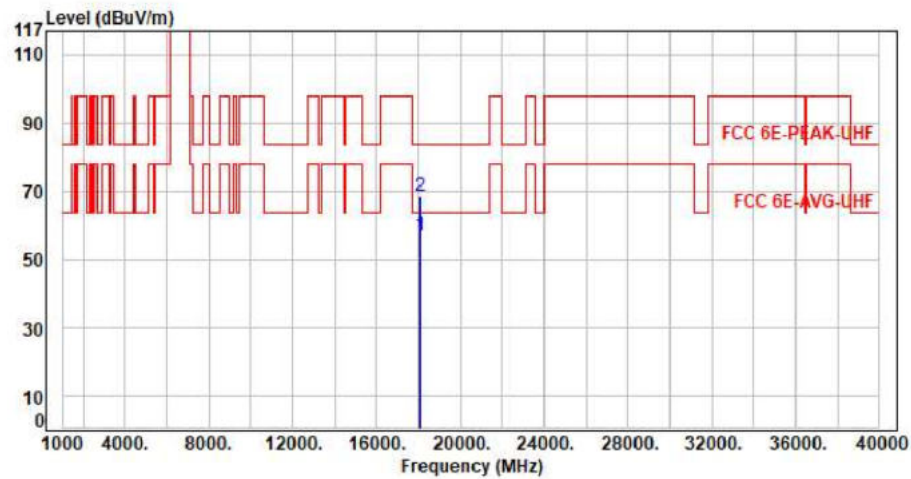


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	47.23	57.13	63.54	-6.41	Average	150	360	P
2	18075.00	9.90	58.77	68.67	83.54	-14.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

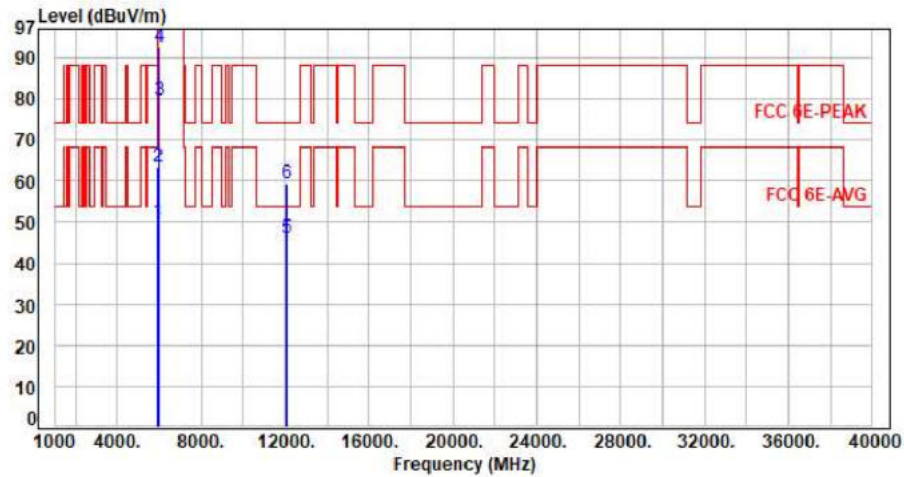


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.58	50.24	68.20	-17.96	Average	392	289	P
2	5925.00	7.66	55.83	63.49	88.20	-24.71	Peak	392	289	P
3	6025.00	7.91	71.86	79.77	200.00	-120.23	Average	392	289	P
4	6025.00	7.91	84.79	92.70	200.00	-107.30	Peak	392	289	P
5	12050.00	17.81	28.12	45.93	54.00	-8.07	Average	100	151	P
6	12050.00	17.81	41.70	59.51	74.00	-14.49	Peak	100	151	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

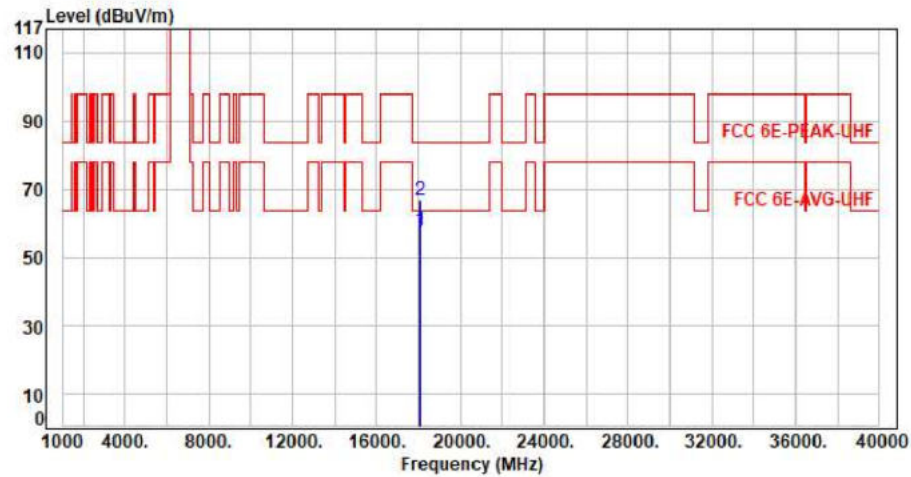


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	48.04	57.94	63.54	-5.60	Average	150	360	P
2	18075.00	9.90	56.92	66.82	83.54	-16.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

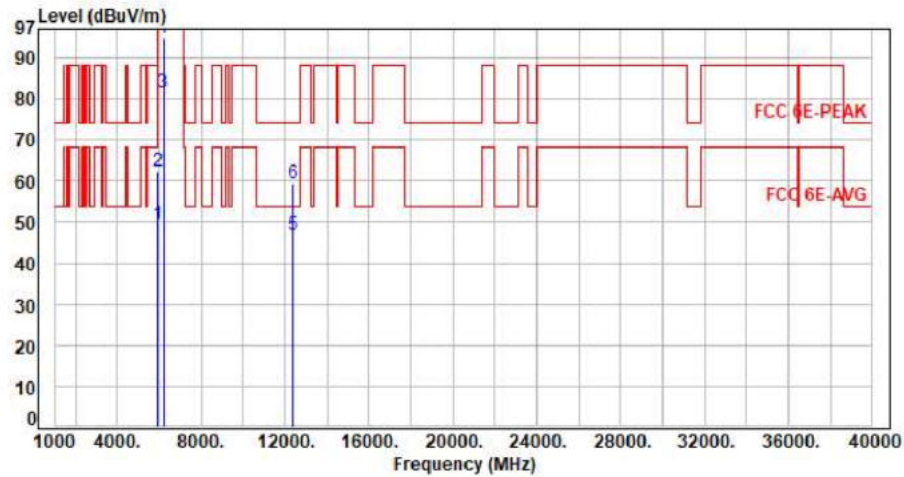


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.58	49.24	68.20	-18.96	Average	298	351	P
2	5925.00	7.66	54.71	62.37	88.20	-25.83	Peak	298	351	P
3	6185.00	8.36	73.18	81.54	200.00	-118.46	Average	298	351	P
4	6185.00	8.36	86.42	94.78	200.00	-105.22	Peak	298	351	P
5	12370.00	17.74	29.18	46.92	54.00	-7.08	Average	100	225	P
6	12370.00	17.74	41.68	59.42	74.00	-14.58	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

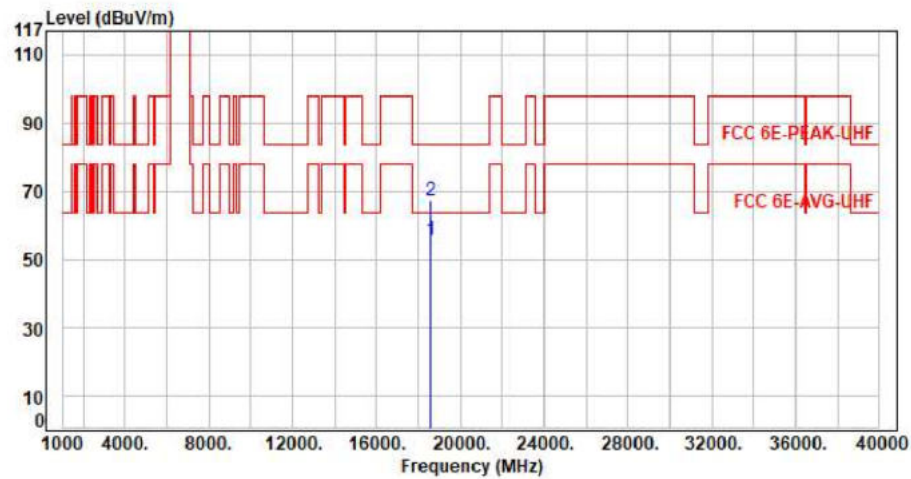


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.08	55.74	63.54	-7.80	Average	150	360	P
2	18555.00	10.66	56.62	67.28	83.54	-16.26	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

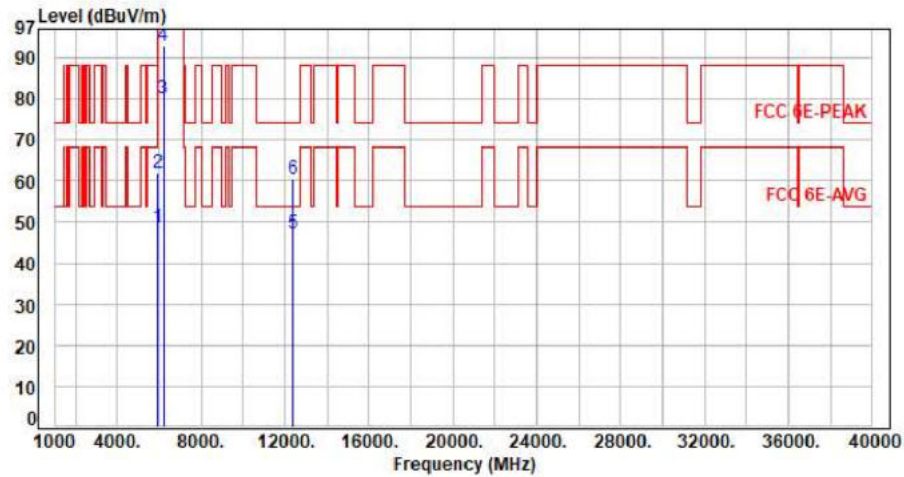


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.05	48.71	68.20	-19.49	Average	364	280	P
2	5925.00	7.66	54.36	62.02	88.20	-26.18	Peak	364	280	P
3	6185.00	8.36	71.64	80.00	200.00	-120.00	Average	364	280	P
4	6185.00	8.36	84.62	92.98	200.00	-107.02	Peak	364	280	P
5	12370.00	17.74	29.41	47.15	54.00	-6.85	Average	100	158	P
6	12370.00	17.74	42.64	60.38	74.00	-13.62	Peak	100	158	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

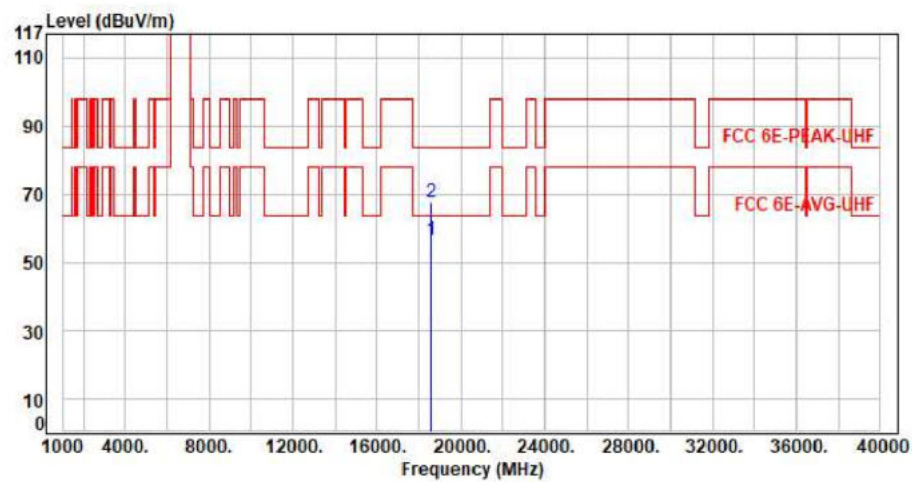

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	45.89	56.55	63.54	-6.99	Average	150	360	P
2	18555.00	10.66	56.82	67.48	83.54	-16.06	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

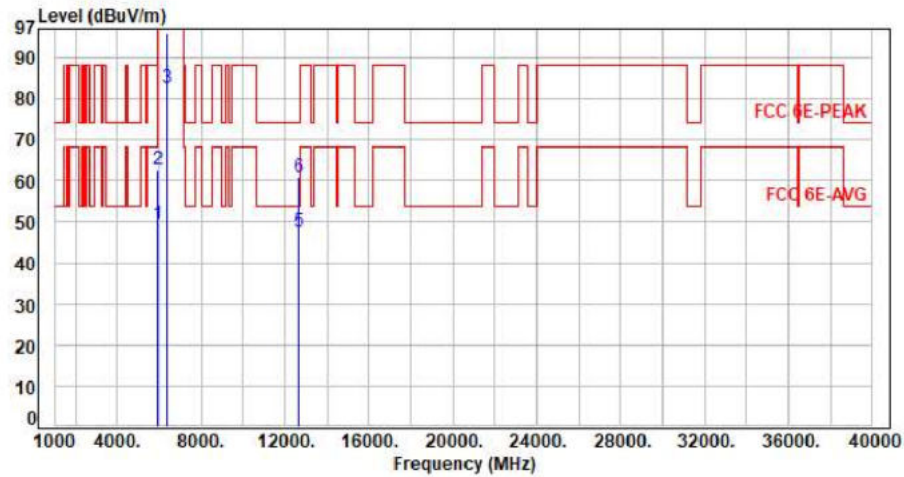


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.63	49.29	68.20	-18.91	Average	264	32	P
2	5925.00	7.66	54.88	62.54	88.20	-25.66	Peak	264	32	P
3	6345.00	8.31	74.37	82.68	200.00	-117.32	Average	264	32	P
4	6345.00	8.31	87.61	95.92	200.00	-104.08	Peak	264	32	P
5	12690.00	18.27	29.31	47.58	54.00	-6.42	Average	100	146	P
6	12690.00	18.27	42.61	60.88	74.00	-13.12	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

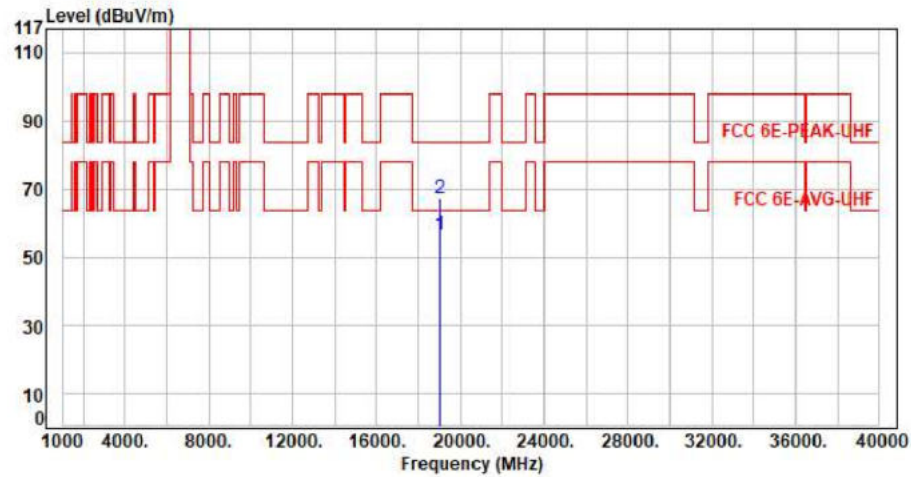


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	45.05	56.46	63.54	-7.08	Average	150	360	P
2	19035.00	11.41	55.76	67.17	83.54	-16.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

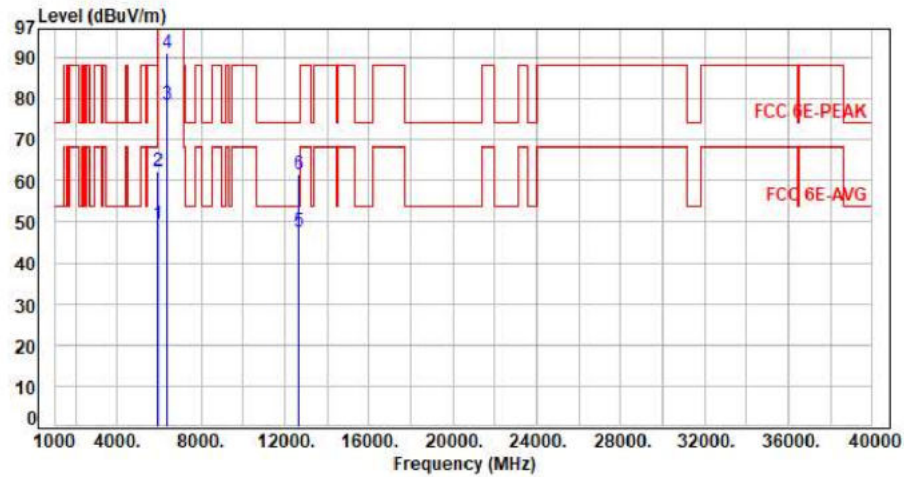

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	41.72	49.38	68.20	-18.82	Average	383	77	P
2	5925.00	7.66	54.62	62.28	88.20	-25.92	Peak	383	77	P
3	6345.00	8.31	70.19	78.50	200.00	-121.50	Average	383	77	P
4	6345.00	8.31	82.83	91.14	200.00	-108.86	Peak	383	77	P
5	12690.00	18.27	29.16	47.43	54.00	-6.57	Average	100	138	P
6	12690.00	18.27	43.18	61.45	74.00	-12.55	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor