




For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

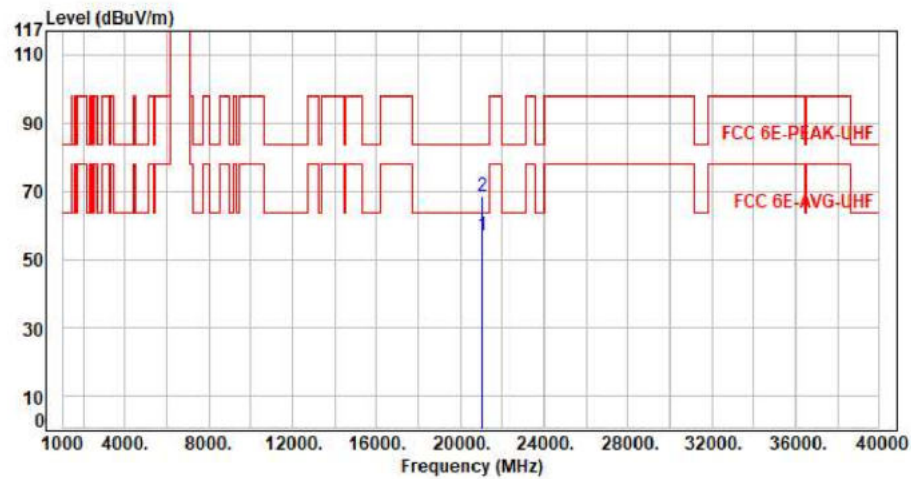


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.32	56.82	63.54	-6.72	Average	150	360	P
2	21045.00	11.50	57.08	68.58	83.54	-14.96	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

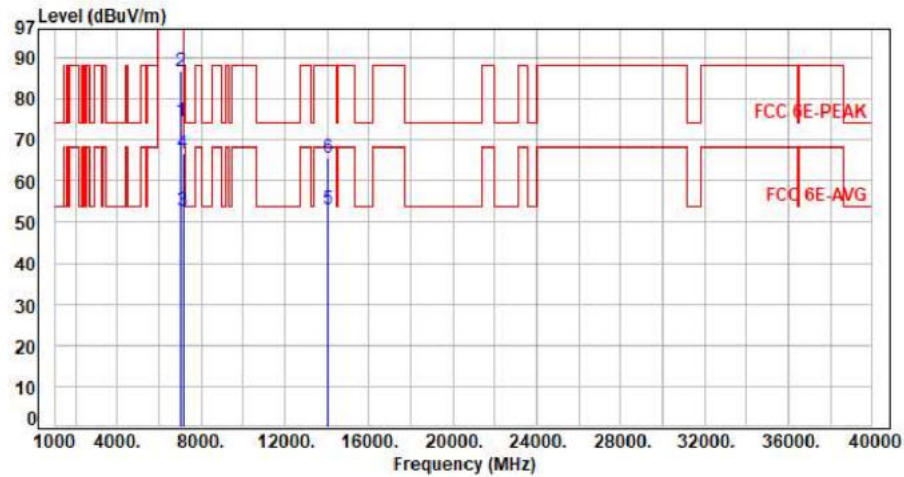


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	64.67	74.35	200.00	-125.65	Average	100	151	P
2	7015.00	9.68	76.92	86.60	200.00	-113.40	Peak	100	151	P
3	7125.00	10.05	42.64	52.69	68.20	-15.51	Average	100	151	P
4	7125.00	10.05	56.65	66.70	88.20	-21.50	Peak	100	151	P
5	14030.00	23.39	29.61	53.00	68.20	-15.20	Average	100	221	P
6	14030.00	23.39	42.18	65.57	88.20	-22.63	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

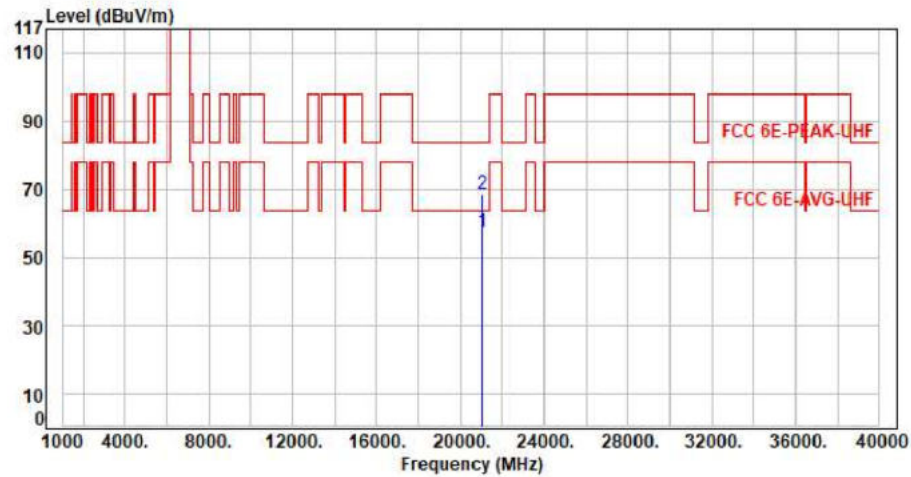


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	45.98	57.48	63.54	-6.06	Average	150	360	P
2	21045.00	11.50	56.88	68.38	83.54	-15.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

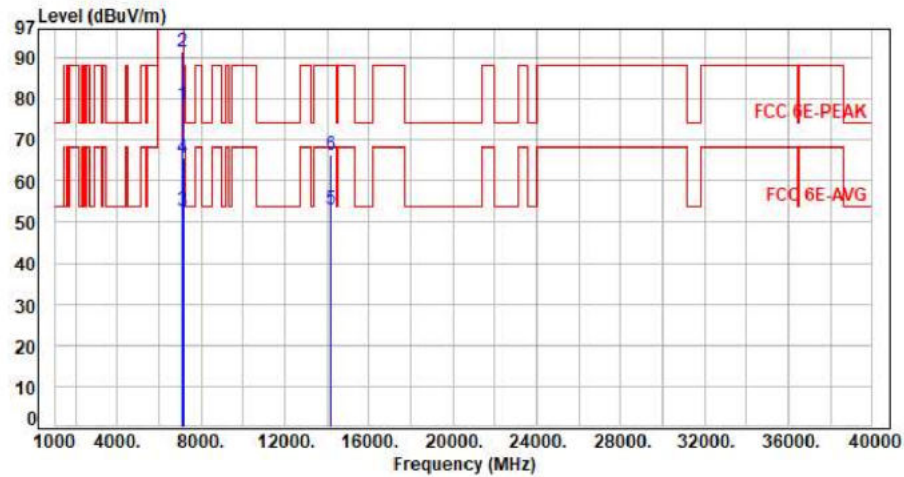


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	68.75	78.71	200.00	-121.29	Average	394	317	P
2	7095.00	9.96	81.54	91.50	200.00	-108.50	Peak	394	317	P
3	7125.00	10.05	42.66	52.71	68.20	-15.49	Average	394	317	P
4	7125.00	10.05	55.62	65.67	88.20	-22.53	Peak	394	317	P
5	14190.00	23.79	29.18	52.97	68.20	-15.23	Average	100	146	P
6	14190.00	23.79	42.61	66.40	88.20	-21.80	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

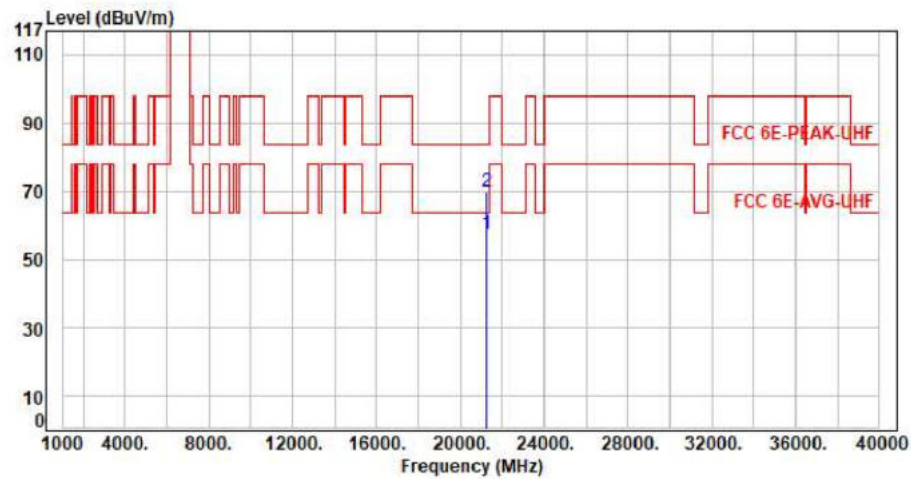


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.59	57.39	63.54	-6.15	Average	150	360	P
2	21285.00	11.80	57.83	69.63	83.54	-13.91	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

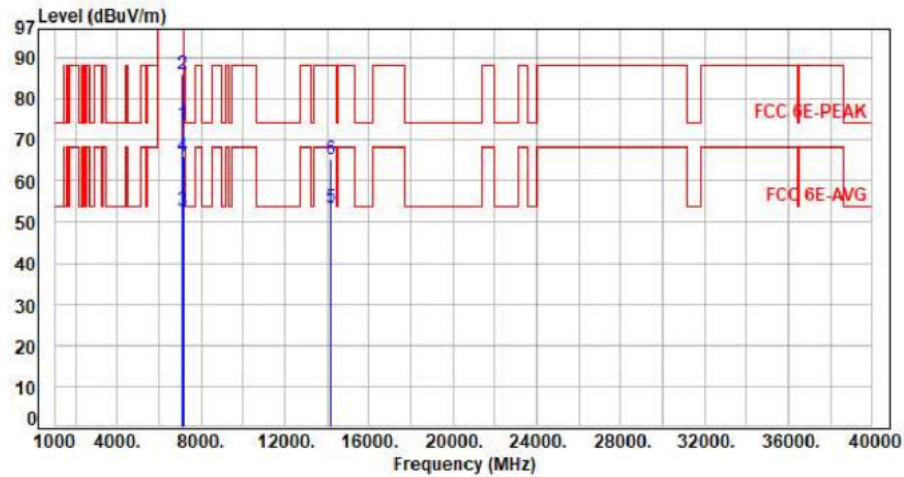


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	63.90	73.86	200.00	-126.14	Average	122	103	P
2	7095.00	9.96	76.14	86.10	200.00	-113.90	Peak	122	103	P
3	7125.00	10.05	42.65	52.70	68.20	-15.50	Average	122	103	P
4	7125.00	10.05	55.95	66.00	88.20	-22.20	Peak	122	103	P
5	14190.00	23.79	29.51	53.30	68.20	-14.90	Average	100	146	P
6	14190.00	23.79	41.53	65.32	88.20	-22.88	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

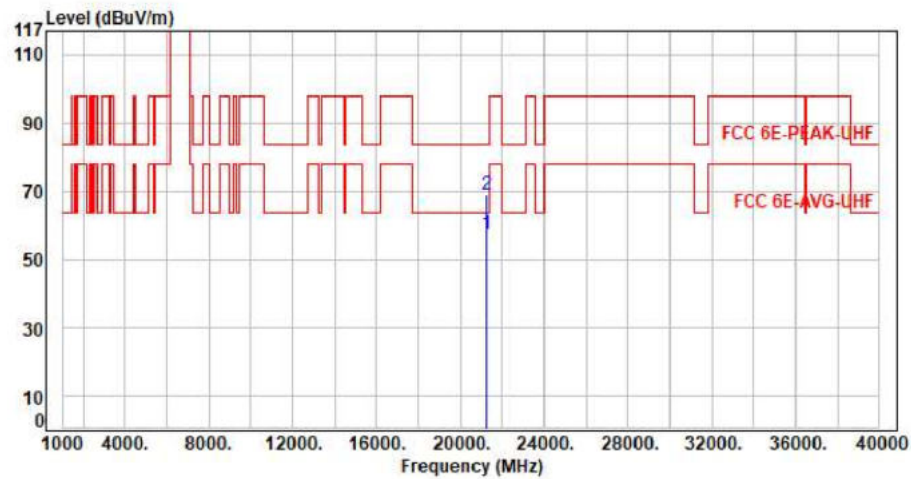


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	45.53	57.33	63.54	-6.21	Average	150	360	P
2	21285.00	11.80	57.05	68.85	83.54	-14.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

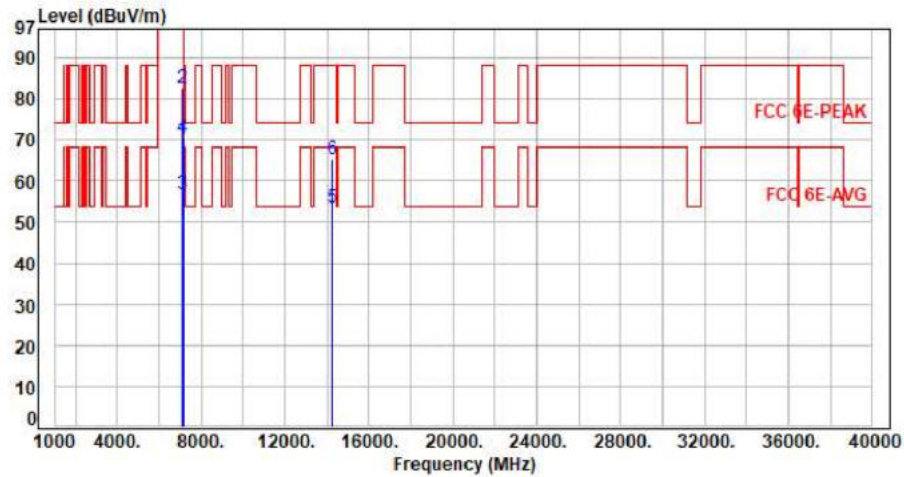


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	60.06	70.08	200.00	-129.92	Average	100	345	P
2	7115.00	10.02	72.71	82.73	200.00	-117.27	Peak	100	345	P
3	7125.00	10.05	46.92	56.97	68.20	-11.23	Average	100	345	P
4	7125.00	10.05	60.36	70.41	88.20	-17.79	Peak	100	345	P
5	14230.00	23.94	29.58	53.52	68.20	-14.68	Average	100	225	P
6	14230.00	23.94	41.27	65.21	88.20	-22.99	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

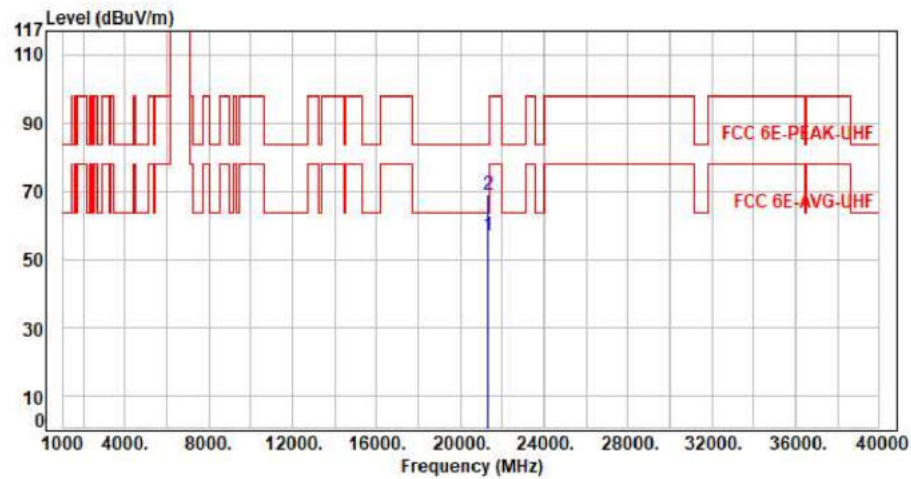


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.42	56.78	63.54	-6.76	Average	150	360	P
2	21345.00	11.36	57.74	69.10	83.54	-14.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

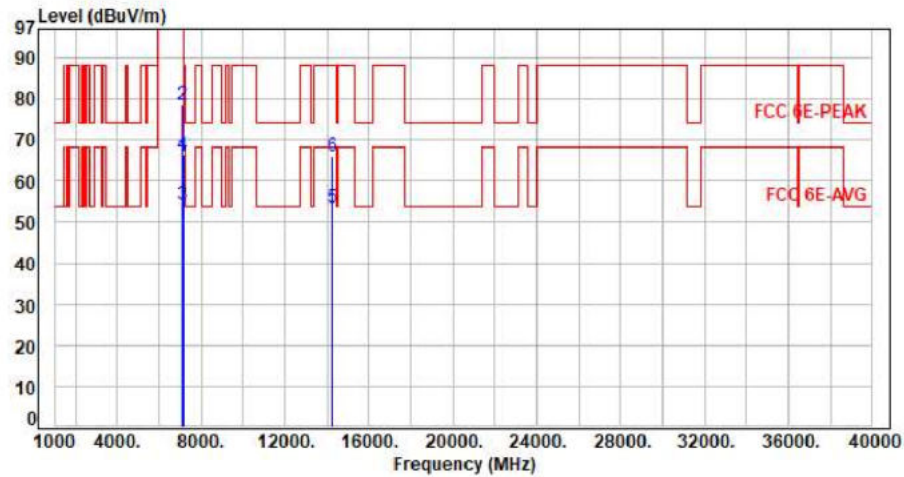


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	55.85	65.87	200.00	-134.13	Average	100	218	P
2	7115.00	10.02	68.56	78.58	200.00	-121.42	Peak	100	218	P
3	7125.00	10.05	44.09	54.14	68.20	-14.06	Average	100	218	P
4	7125.00	10.05	56.31	66.36	88.20	-21.84	Peak	100	218	P
5	14230.00	23.94	29.61	53.55	68.20	-14.65	Average	100	134	P
6	14230.00	23.94	42.18	66.12	88.20	-22.08	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

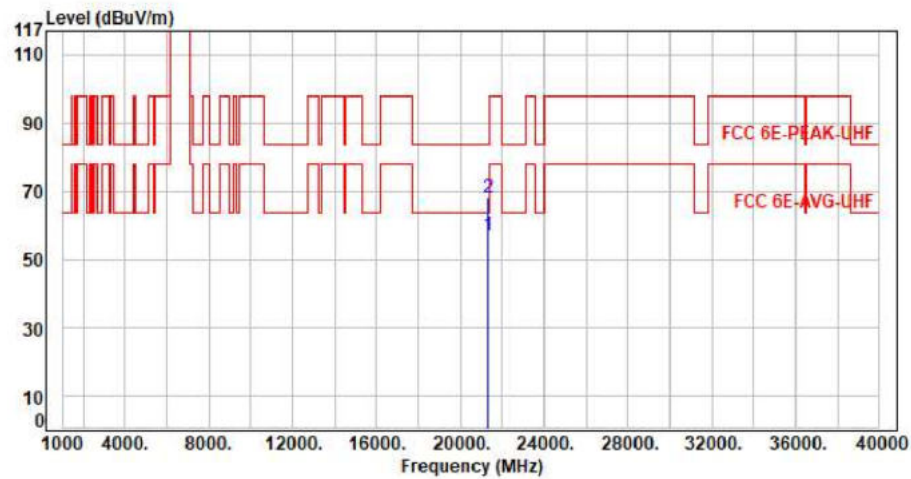


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	45.62	56.98	63.54	-6.56	Average	150	360	P
2	21345.00	11.36	56.83	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

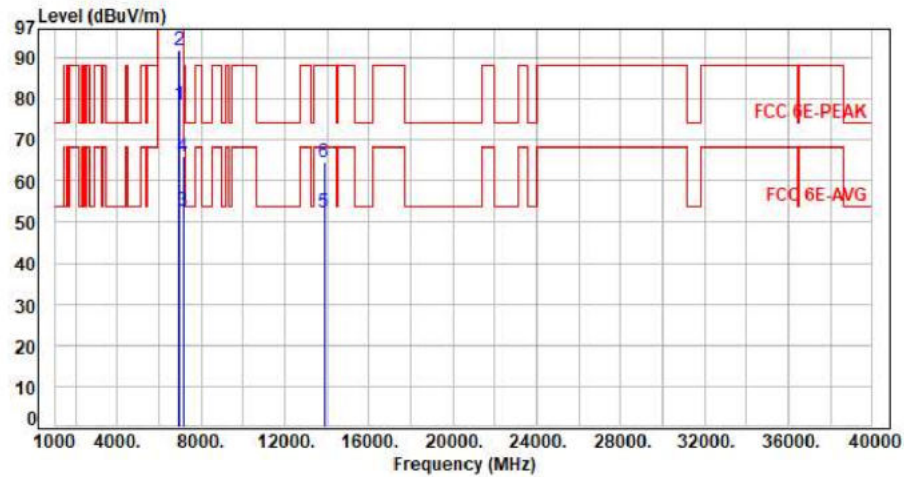


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	69.05	78.66	200.00	-121.34	Average	123	348	P
2	6925.00	9.61	82.17	91.78	200.00	-108.22	Peak	123	348	P
3	7125.00	10.05	42.82	52.87	68.20	-15.33	Average	123	348	P
4	7125.00	10.05	55.83	65.88	88.20	-22.32	Peak	123	348	P
5	13850.00	22.86	29.64	52.50	68.20	-15.70	Average	100	123	P
6	13850.00	22.86	41.61	64.47	88.20	-23.73	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

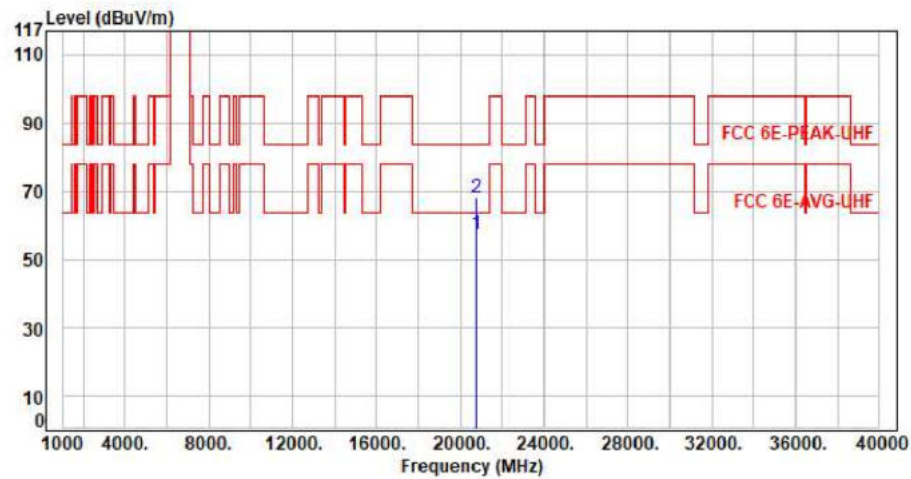


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.85	57.24	63.54	-6.30	Average	150	360	P
2	20775.00	11.39	56.71	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

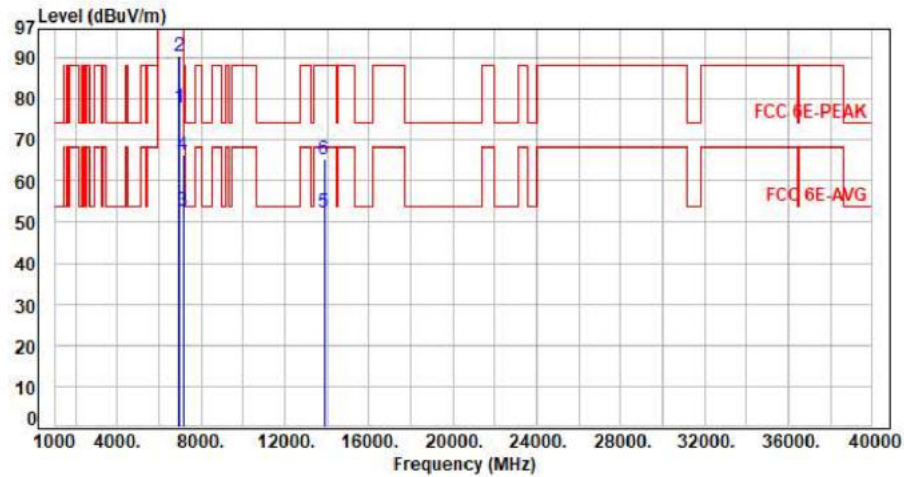


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	68.32	77.93	200.00	-122.07	Average	399	278	P
2	6925.00	9.61	80.73	90.34	200.00	-109.66	Peak	399	278	P
3	7125.00	10.05	42.87	52.92	68.20	-15.28	Average	399	278	P
4	7125.00	10.05	56.28	66.33	88.20	-21.87	Peak	399	278	P
5	13850.00	22.86	29.48	52.34	68.20	-15.86	Average	100	143	P
6	13850.00	22.86	42.36	65.22	88.20	-22.98	Peak	100	143	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

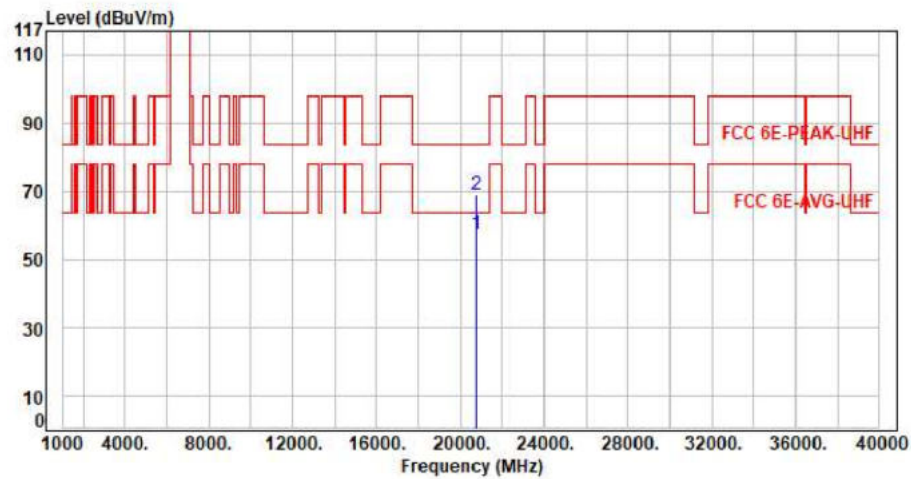


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	45.97	57.36	63.54	-6.18	Average	150	360	P
2	20775.00	11.39	57.41	68.80	83.54	-14.74	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

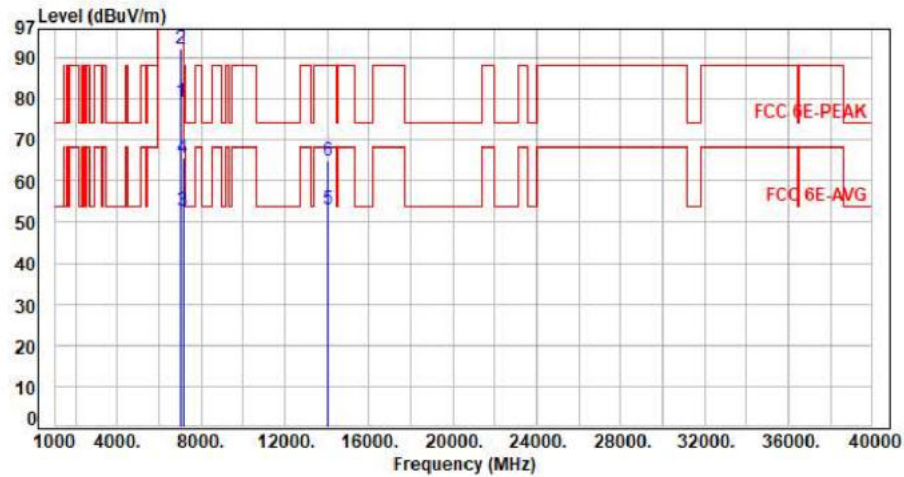


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	69.67	79.32	200.00	-120.68	Average	110	347	P
2	7005.00	9.65	82.44	92.09	200.00	-107.91	Peak	110	347	P
3	7125.00	10.05	42.83	52.88	68.20	-15.32	Average	110	347	P
4	7125.00	10.05	55.55	65.60	88.20	-22.60	Peak	110	347	P
5	14010.00	23.32	29.74	53.06	68.20	-15.14	Average	100	220	P
6	14010.00	23.32	41.68	65.00	88.20	-23.20	Peak	100	220	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

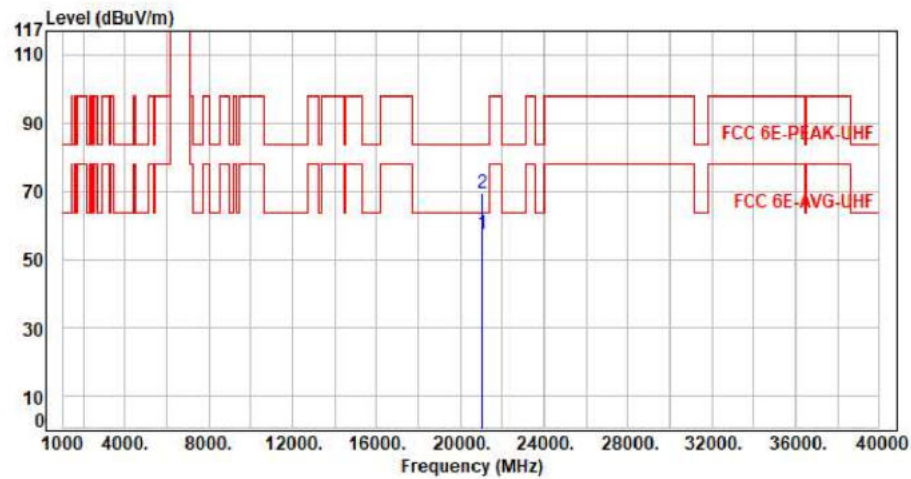


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.82	57.30	63.54	-6.24	Average	150	360	P
2	21015.00	11.48	57.90	69.38	83.54	-14.16	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

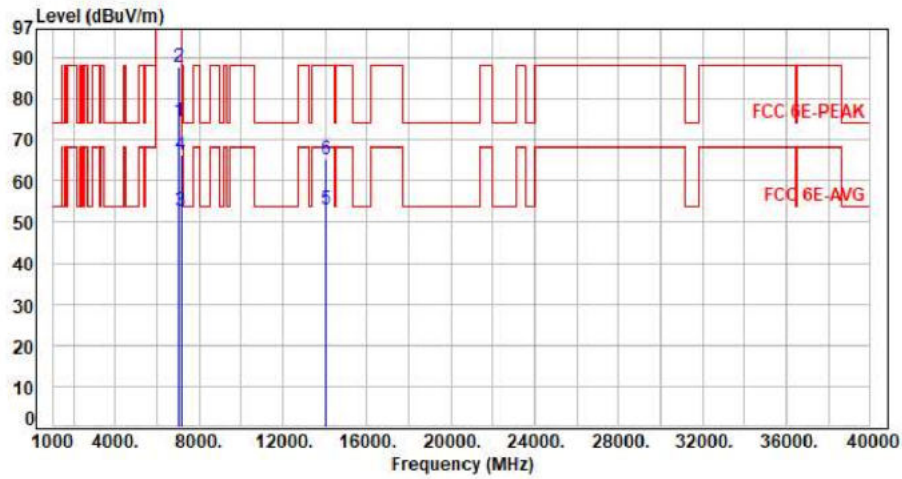


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	64.90	74.55	200.00	-125.45	Average	100	153	P
2	7005.00	9.65	77.95	87.60	200.00	-112.40	Peak	100	153	P
3	7125.00	10.05	42.86	52.91	68.20	-15.29	Average	100	153	P
4	7125.00	10.05	56.22	66.27	88.20	-21.93	Peak	100	153	P
5	14010.00	23.32	29.63	52.95	68.20	-15.25	Average	100	146	P
6	14010.00	23.32	41.92	65.24	88.20	-22.96	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

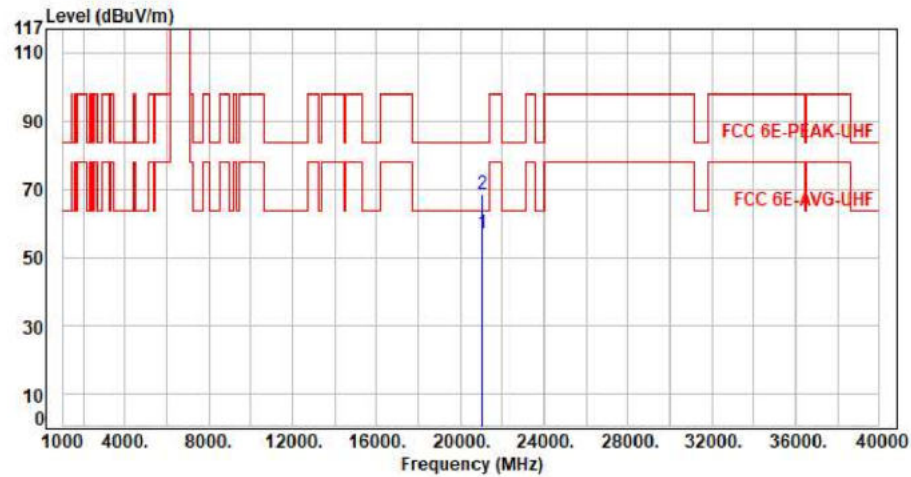


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	45.37	56.85	63.54	-6.69	Average	150	360	P
2	21015.00	11.48	57.01	68.49	83.54	-15.05	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

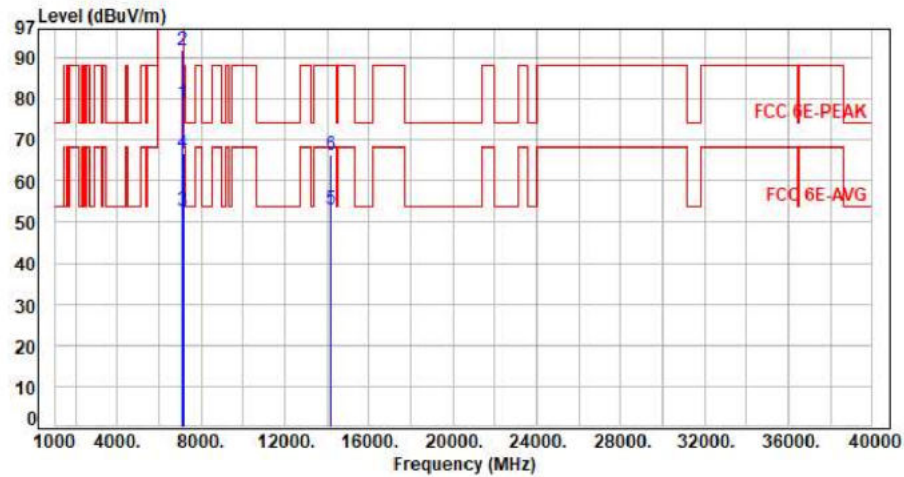


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	68.93	78.84	200.00	-121.16	Average	100	347	P
2	7085.00	9.91	82.00	91.91	200.00	-108.09	Peak	100	347	P
3	7125.00	10.05	42.87	52.92	68.20	-15.28	Average	100	347	P
4	7125.00	10.05	56.86	66.91	88.20	-21.29	Peak	100	347	P
5	14170.00	23.72	29.52	53.24	68.20	-14.96	Average	100	146	P
6	14170.00	23.72	42.51	66.23	88.20	-21.97	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

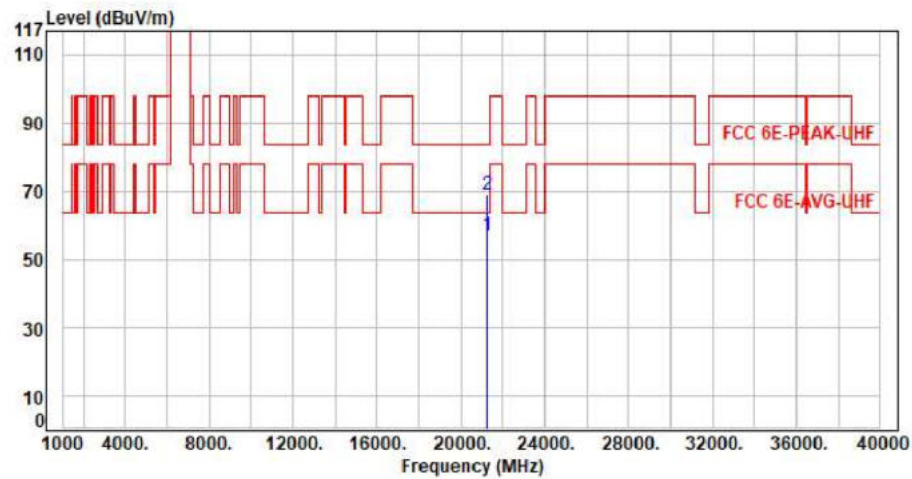

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	44.95	56.79	63.54	-6.75	Average	150	360	P
2	21255.00	11.84	56.99	68.83	83.54	-14.71	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

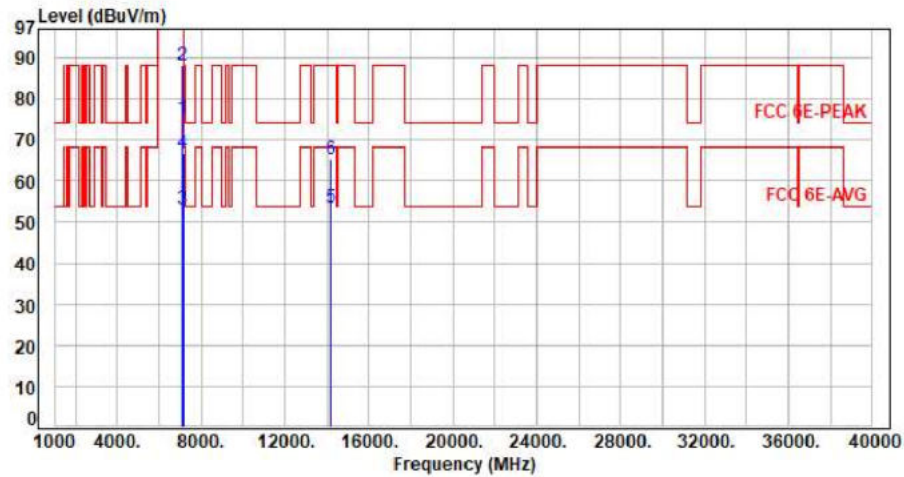


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	65.43	75.34	200.00	-124.66	Average	100	220	P
2	7085.00	9.91	78.38	88.29	200.00	-111.71	Peak	100	220	P
3	7125.00	10.05	42.96	53.01	68.20	-15.19	Average	100	220	P
4	7125.00	10.05	56.53	66.58	88.20	-21.62	Peak	100	220	P
5	14170.00	23.72	29.81	53.53	68.20	-14.67	Average	100	146	P
6	14170.00	23.72	41.68	65.40	88.20	-22.80	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

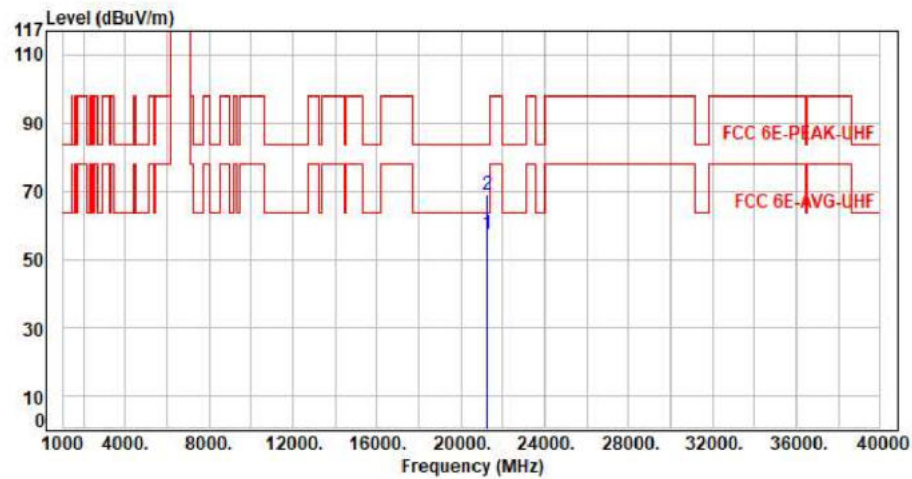


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.58	57.42	63.54	-6.12	Average	150	360	P
2	21255.00	11.84	57.01	68.85	83.54	-14.69	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

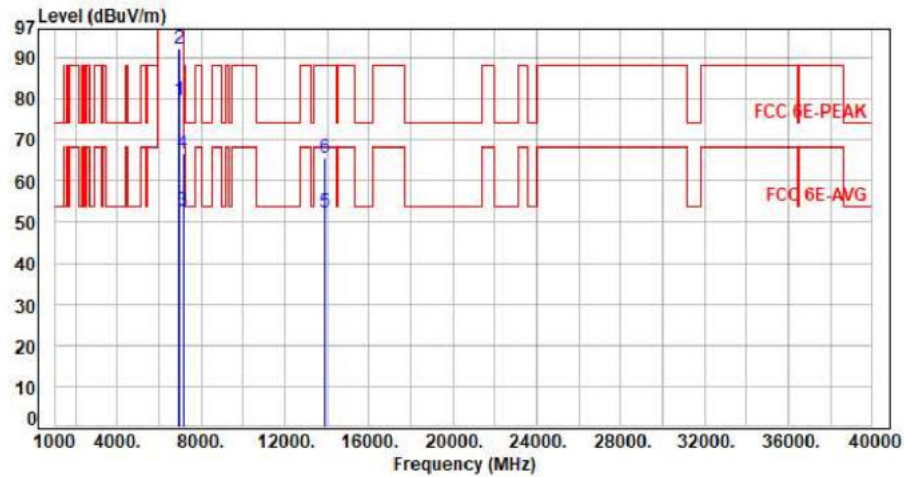


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	69.94	79.56	200.00	-120.44	Average	101	347	P
2	6945.00	9.62	82.48	92.10	200.00	-107.90	Peak	101	347	P
3	7125.00	10.05	42.83	52.88	68.20	-15.32	Average	101	347	P
4	7125.00	10.05	56.74	66.79	88.20	-21.41	Peak	101	347	P
5	13890.00	22.95	29.61	52.56	68.20	-15.64	Average	100	138	P
6	13890.00	22.95	42.61	65.56	88.20	-22.64	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

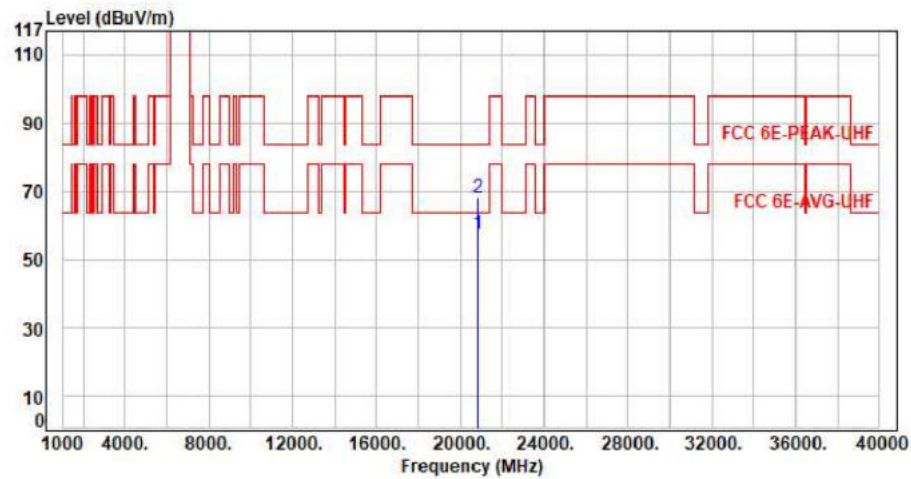

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.81	57.21	63.54	-6.33	Average	150	360	P
2	20835.00	11.40	56.65	68.05	83.54	-15.49	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

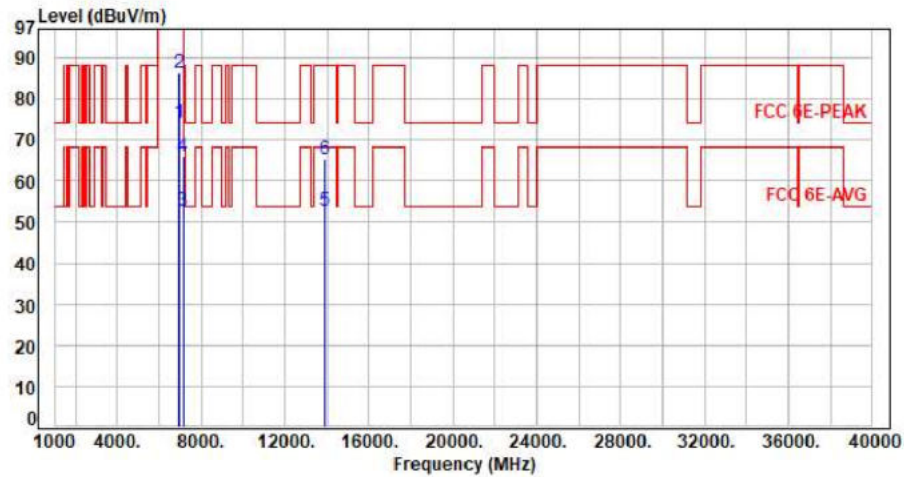


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	64.63	74.25	200.00	-125.75	Average	105	151	P
2	6945.00	9.62	76.64	86.26	200.00	-113.74	Peak	105	151	P
3	7125.00	10.05	42.80	52.85	68.20	-15.35	Average	105	151	P
4	7125.00	10.05	56.14	66.19	88.20	-22.01	Peak	105	151	P
5	13890.00	22.95	29.62	52.57	68.20	-15.63	Average	100	123	P
6	13890.00	22.95	42.51	65.46	88.20	-22.74	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

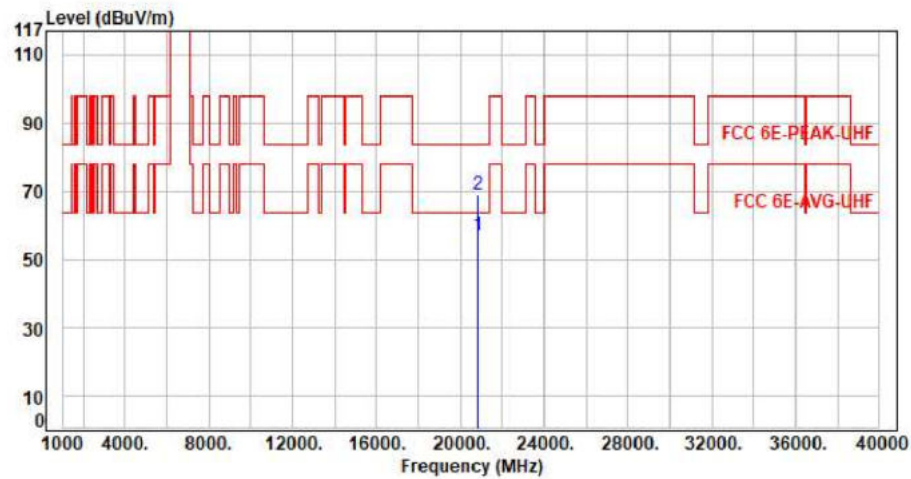


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.38	56.78	63.54	-6.76	Average	150	360	P
2	20835.00	11.40	57.64	69.04	83.54	-14.50	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

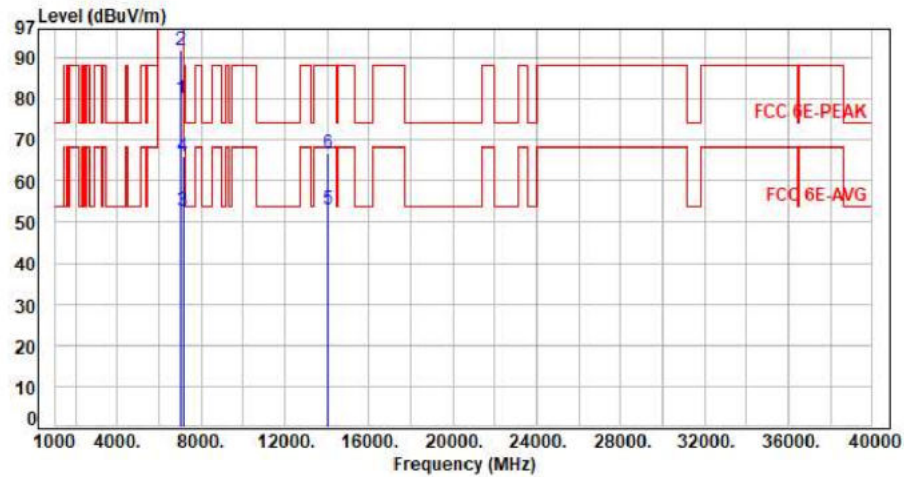


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	70.20	79.91	200.00	-120.09	Average	100	313	P
2	7025.00	9.71	82.29	92.00	200.00	-108.00	Peak	100	313	P
3	7125.00	10.05	42.69	52.74	68.20	-15.46	Average	100	313	P
4	7125.00	10.05	56.15	66.20	88.20	-22.00	Peak	100	313	P
5	14050.00	23.47	29.51	52.98	68.20	-15.22	Average	100	215	P
6	14050.00	23.47	43.19	66.66	88.20	-21.54	Peak	100	215	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

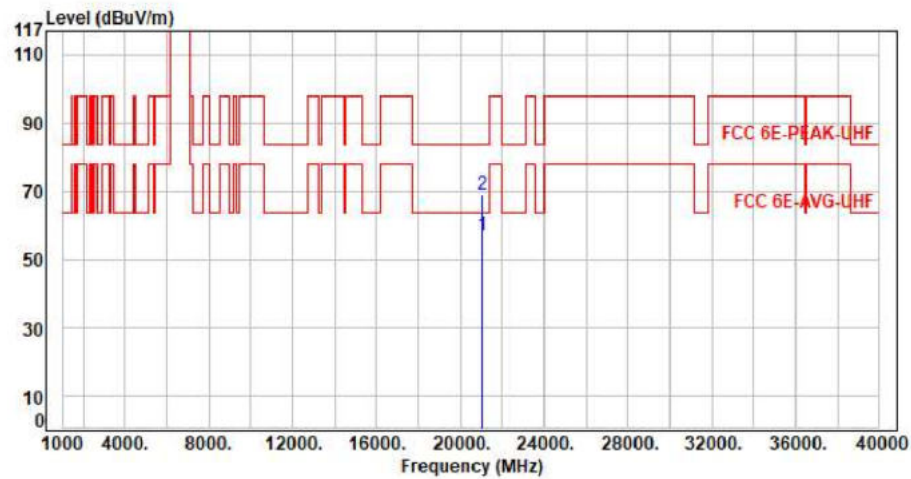


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.26	56.78	63.54	-6.76	Average	150	360	P
2	21075.00	11.52	57.41	68.93	83.54	-14.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

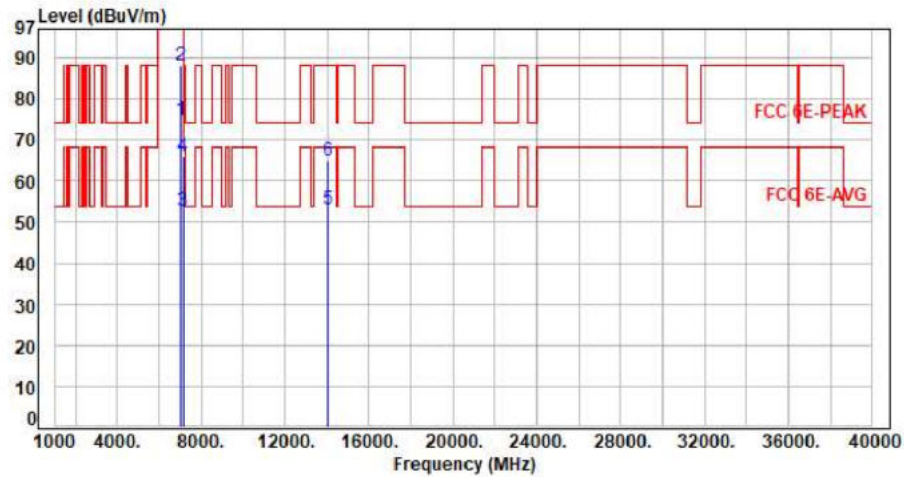


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	65.23	74.94	200.00	-125.06	Average	100	220	P
2	7025.00	9.71	78.27	87.98	200.00	-112.02	Peak	100	220	P
3	7125.00	10.05	42.73	52.78	68.20	-15.42	Average	100	220	P
4	7125.00	10.05	56.00	66.05	88.20	-22.15	Peak	100	220	P
5	14050.00	23.47	29.60	53.07	68.20	-15.13	Average	100	192	P
6	14050.00	23.47	41.28	64.75	88.20	-23.45	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

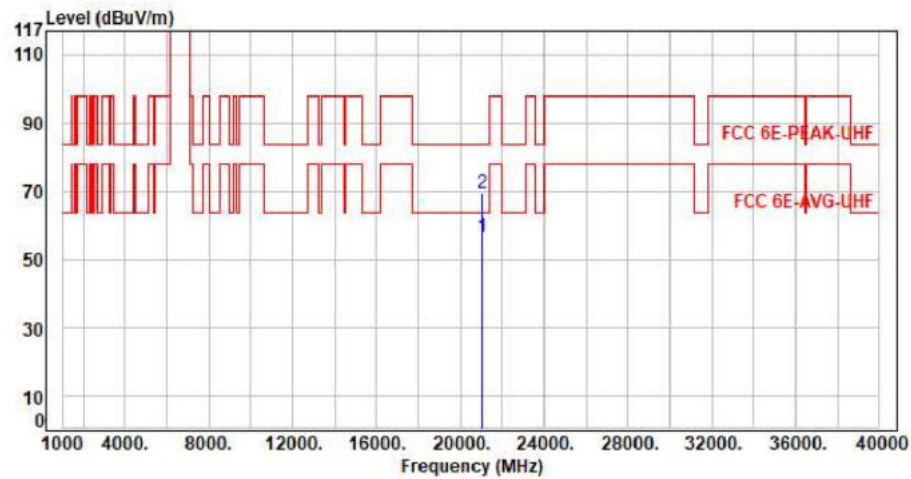

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.09	56.61	63.54	-6.93	Average	150	360	P
2	21075.00	11.52	57.68	69.20	83.54	-14.34	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

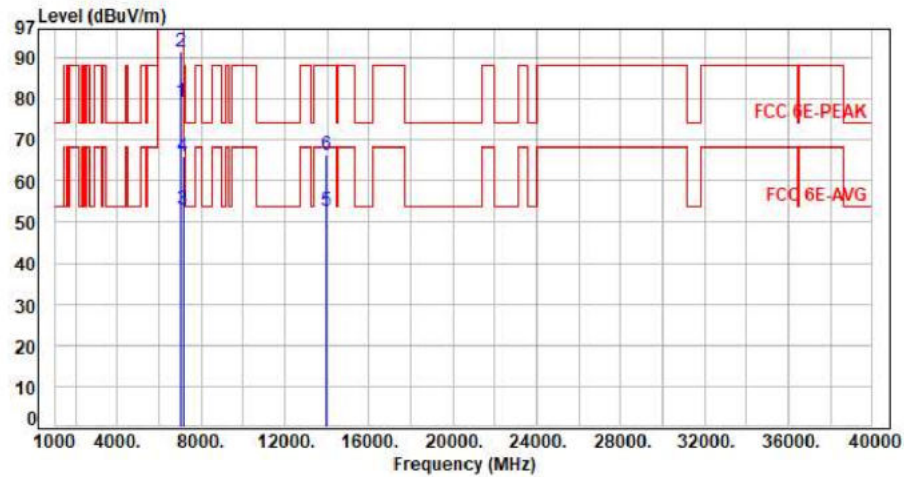


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	69.48	79.11	200.00	-120.89	Average	100	313	P
2	6985.00	9.63	81.83	91.46	200.00	-108.54	Peak	100	313	P
3	7125.00	10.05	42.94	52.99	68.20	-15.21	Average	100	313	P
4	7125.00	10.05	56.03	66.08	88.20	-22.12	Peak	100	313	P
5	13970.00	23.15	29.64	52.79	68.20	-15.41	Average	100	174	P
6	13970.00	23.15	43.22	66.37	88.20	-21.83	Peak	100	174	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

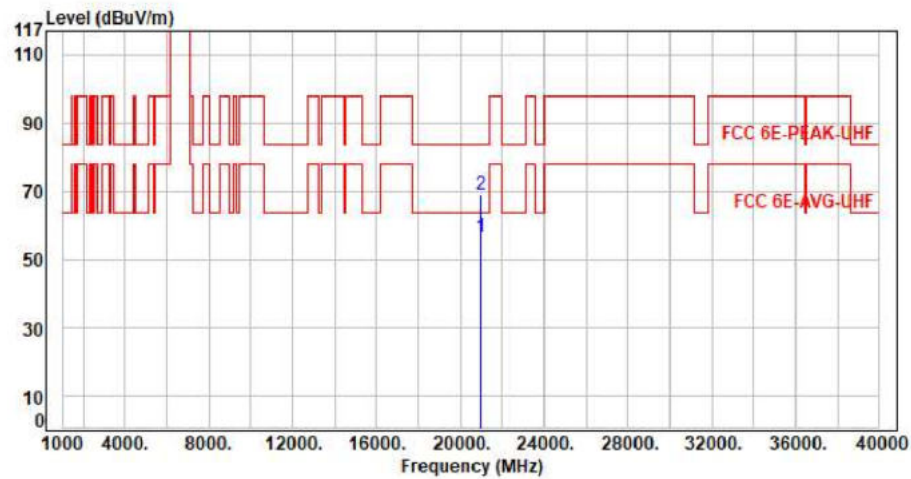


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.81	56.29	63.54	-7.25	Average	150	360	P
2	20955.00	11.48	57.33	68.81	83.54	-14.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

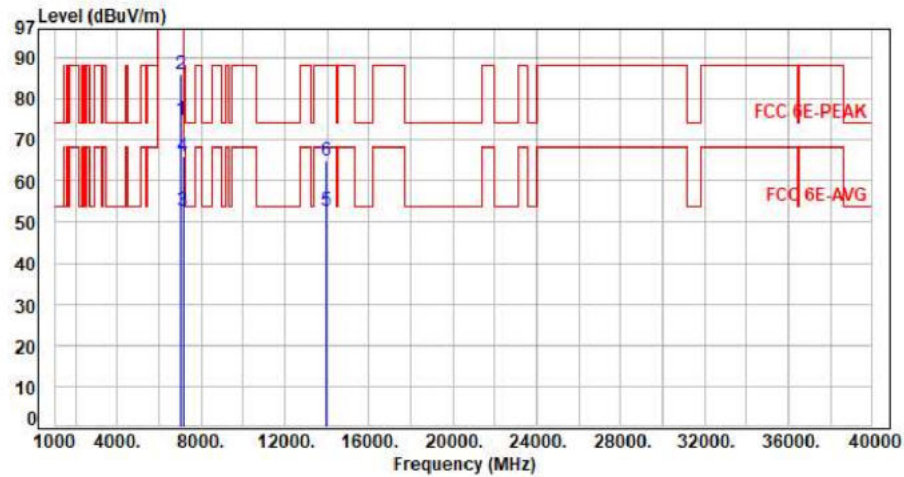


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	65.14	74.77	200.00	-125.23	Average	100	154	P
2	6985.00	9.63	76.43	86.06	200.00	-113.94	Peak	100	154	P
3	7125.00	10.05	42.73	52.78	68.20	-15.42	Average	100	154	P
4	7125.00	10.05	55.92	65.97	88.20	-22.23	Peak	100	154	P
5	13970.00	23.15	29.77	52.92	68.20	-15.28	Average	100	142	P
6	13970.00	23.15	41.69	64.84	88.20	-23.36	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Aux

Test Mode : 1TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

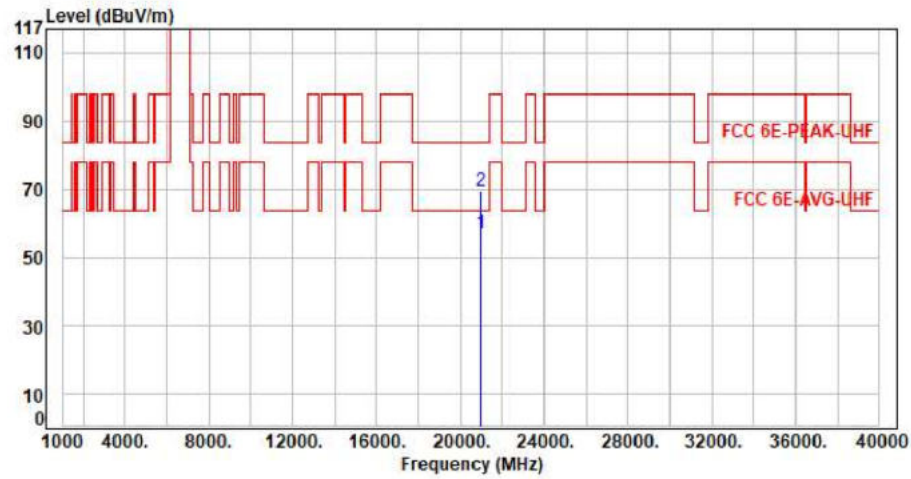


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.27	56.75	63.54	-6.79	Average	150	360	P
2	20955.00	11.48	57.85	69.33	83.54	-14.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

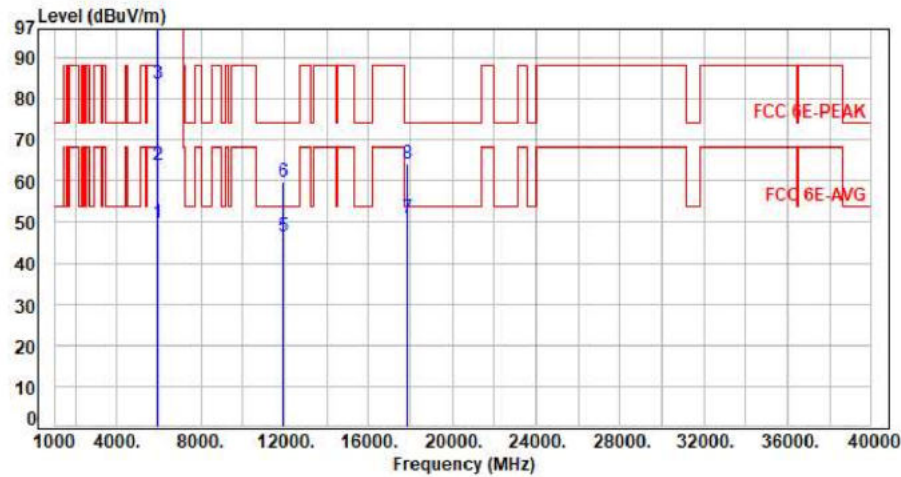

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.28	49.94	68.20	-18.26	Average	307	8	P
2	5925.00	7.66	56.29	63.95	88.20	-24.25	Peak	307	8	P
3	5955.00	7.68	75.97	83.65	200.00	-116.35	Average	307	8	P
4	5955.00	7.68	89.39	97.07	200.00	-102.93	Peak	307	8	P
5	11910.00	18.06	28.37	46.43	54.00	-7.57	Average	100	230	P
6	11910.00	18.06	41.78	59.84	74.00	-14.16	Peak	100	230	P
7	17865.00	27.77	23.06	50.83	54.00	-3.17	Average	100	284	P
8	17865.00	27.77	36.42	64.19	74.00	-9.81	Peak	100	284	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

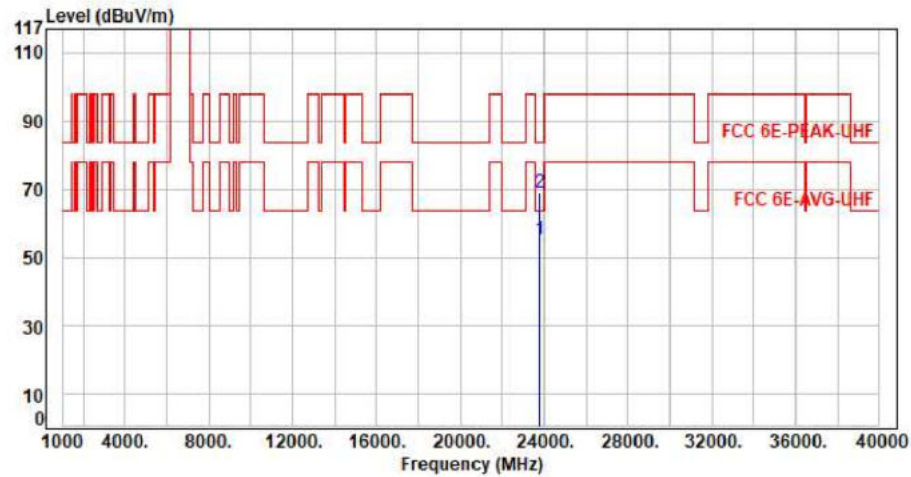


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.07	55.26	63.54	-8.28	Average	150	360	P
2	23820.00	11.19	57.76	68.95	83.54	-14.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

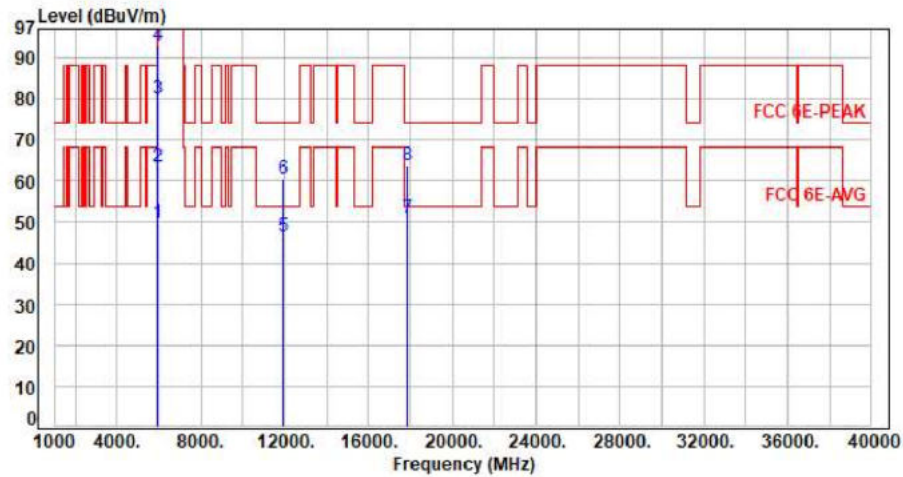

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.22	49.88	68.20	-18.32	Average	400	84	P
2	5925.00	7.66	55.65	63.31	88.20	-24.89	Peak	400	84	P
3	5955.00	7.68	72.48	80.16	200.00	-119.84	Average	400	84	P
4	5955.00	7.68	85.32	93.00	200.00	-107.00	Peak	400	84	P
5	11910.00	18.06	28.33	46.39	54.00	-7.61	Average	100	142	P
6	11910.00	18.06	42.33	60.39	74.00	-13.61	Peak	100	142	P
7	17865.00	27.77	23.19	50.96	54.00	-3.04	Average	100	49	P
8	17865.00	27.77	36.12	63.89	74.00	-10.11	Peak	100	49	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

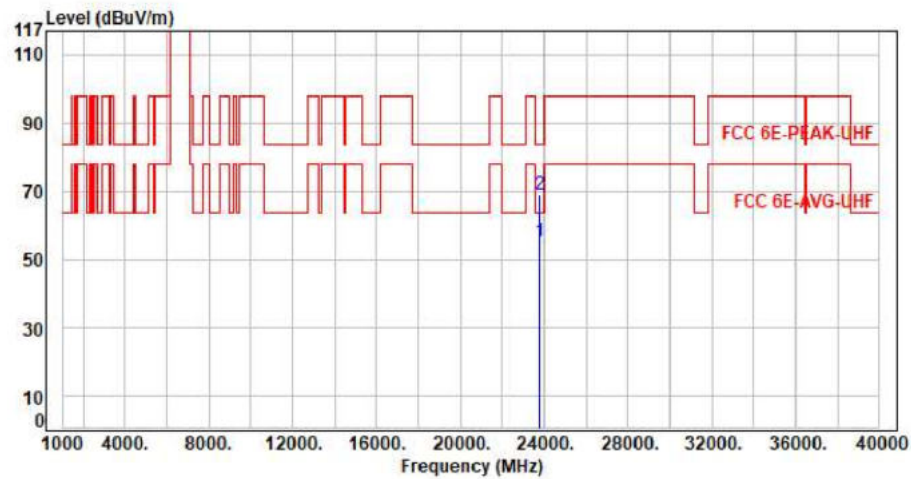


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	44.18	55.37	63.54	-8.17	Average	150	360	P
2	23820.00	11.19	57.74	68.93	83.54	-14.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

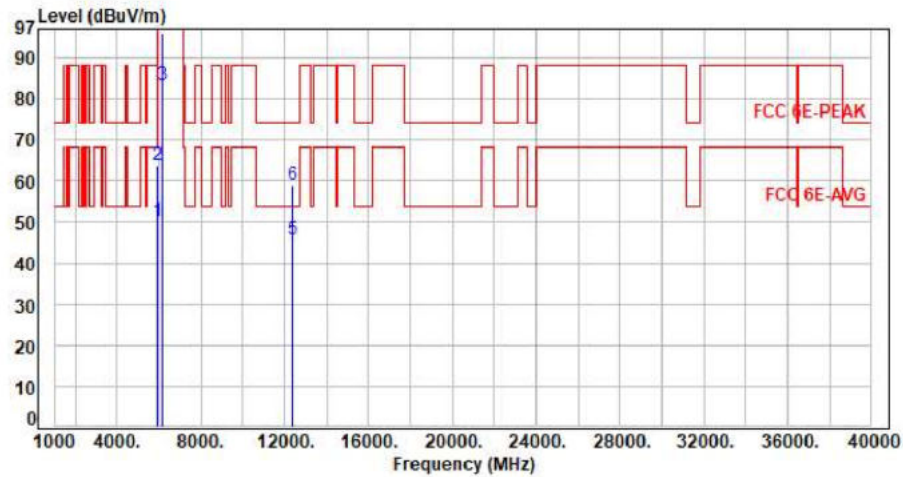


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.35	50.01	68.20	-18.19	Average	299	11	P
2	5925.00	7.66	56.17	63.83	88.20	-24.37	Peak	299	11	P
3	6175.00	8.35	74.84	83.19	200.00	-116.81	Average	299	11	P
4	6175.00	8.35	87.57	95.92	200.00	-104.08	Peak	299	11	P
5	12350.00	17.76	27.99	45.75	54.00	-8.25	Average	100	227	P
6	12350.00	17.76	41.22	58.98	74.00	-15.02	Peak	100	227	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

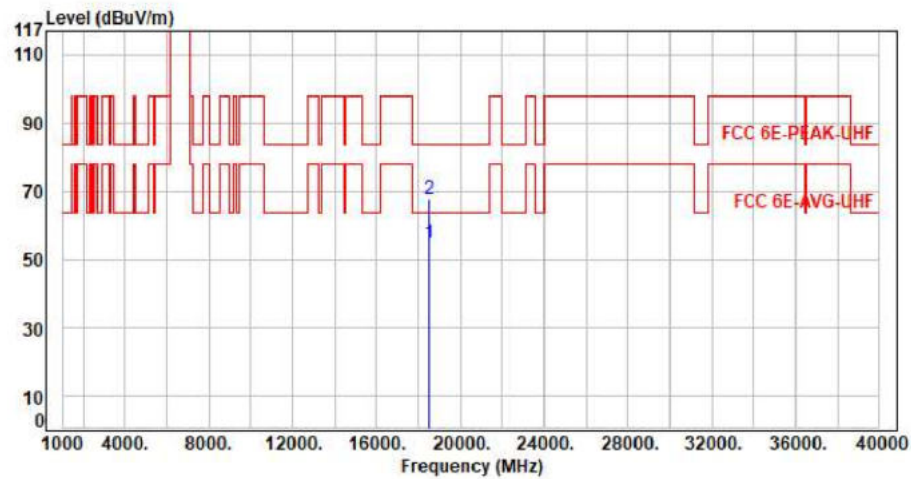


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	44.37	54.92	63.54	-8.62	Average	150	360	P
2	18525.00	10.55	57.24	67.79	83.54	-15.75	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

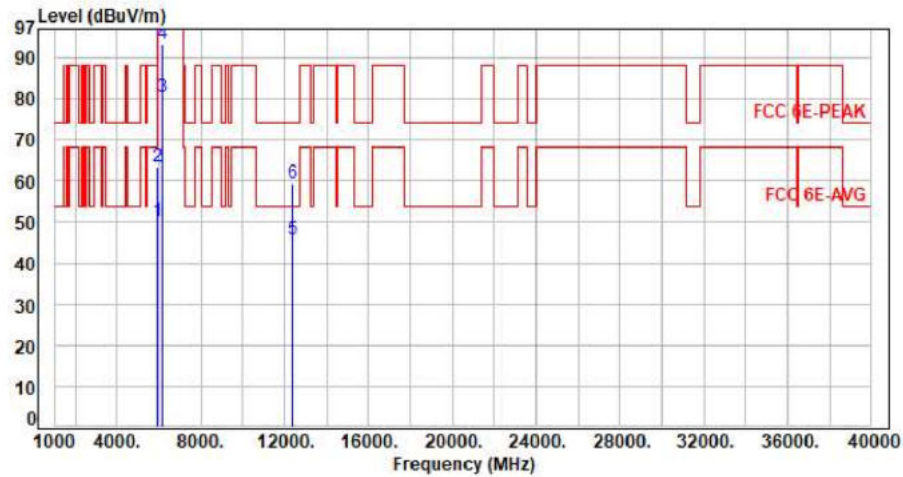


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	394	84	P
2	5925.00	7.66	55.72	63.38	88.20	-24.82	Peak	394	84	P
3	6175.00	8.35	72.04	80.39	200.00	-119.61	Average	394	84	P
4	6175.00	8.35	84.95	93.30	200.00	-106.70	Peak	394	84	P
5	12350.00	17.76	27.90	45.66	54.00	-8.34	Average	100	126	P
6	12350.00	17.76	41.53	59.29	74.00	-14.71	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

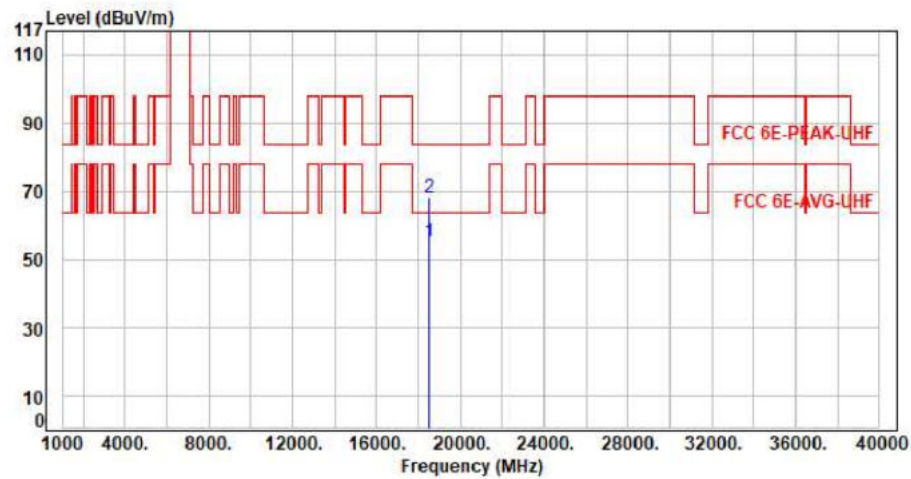


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	44.55	55.10	63.54	-8.44	Average	150	360	P
2	18525.00	10.55	57.71	68.26	83.54	-15.28	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

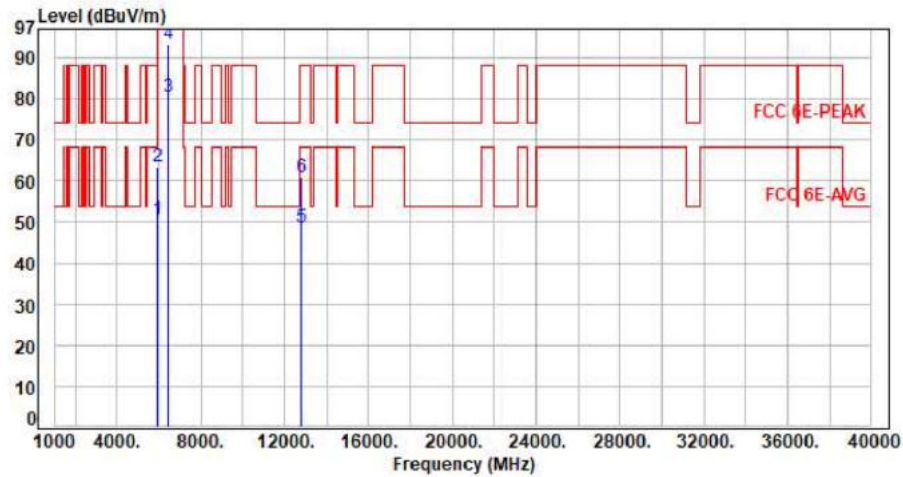


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.83	50.49	68.20	-17.71	Average	100	18	P
2	5925.00	7.66	55.87	63.53	88.20	-24.67	Peak	100	18	P
3	6415.00	8.34	72.21	80.55	200.00	-119.45	Average	100	18	P
4	6415.00	8.34	84.80	93.14	200.00	-106.86	Peak	100	18	P
5	12830.00	18.92	29.62	48.54	68.20	-19.66	Average	100	224	P
6	12830.00	18.92	41.84	60.76	88.20	-27.44	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

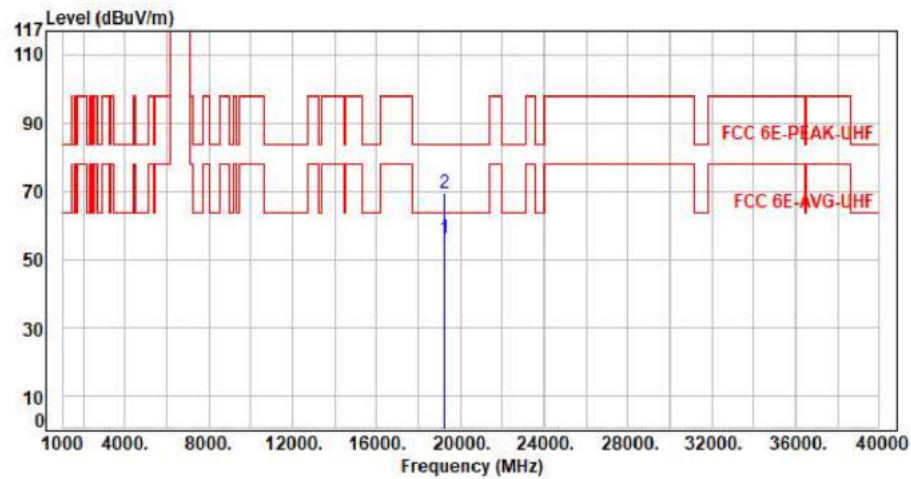


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	44.67	56.04	63.54	-7.50	Average	150	360	P
2	19245.00	11.37	57.94	69.31	83.54	-14.23	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

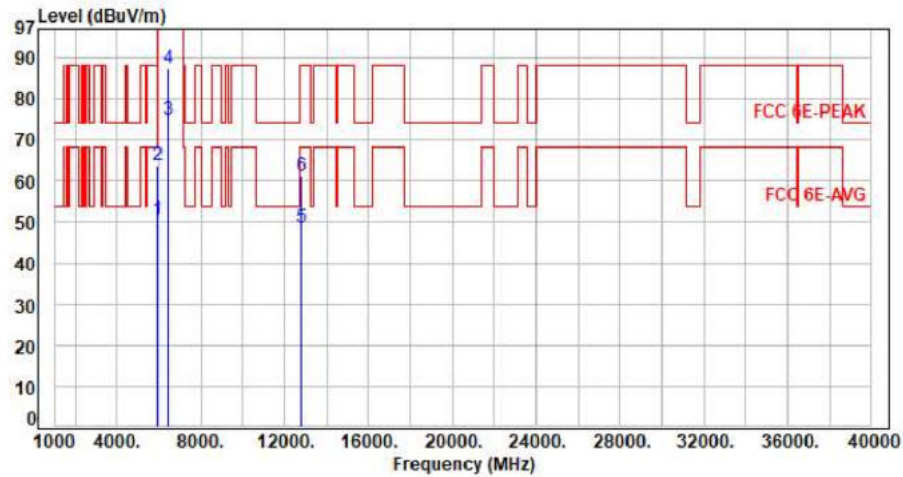


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.85	50.51	68.20	-17.69	Average	132	85	P
2	5925.00	7.66	56.10	63.76	88.20	-24.44	Peak	132	85	P
3	6415.00	8.34	66.58	74.92	200.00	-125.08	Average	132	85	P
4	6415.00	8.34	79.14	87.48	200.00	-112.52	Peak	132	85	P
5	12830.00	18.92	29.70	48.62	68.20	-19.58	Average	100	145	P
6	12830.00	18.92	42.19	61.11	88.20	-27.09	Peak	100	145	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

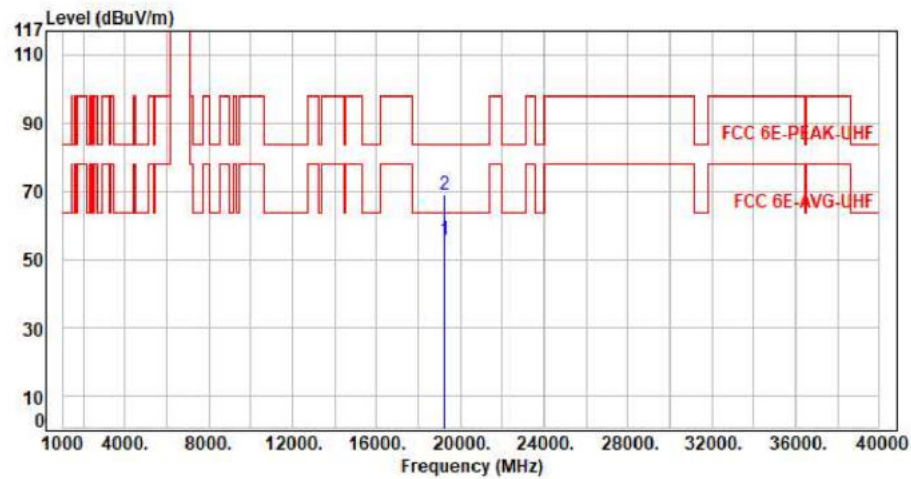


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	44.12	55.49	63.54	-8.05	Average	150	360	P
2	19245.00	11.37	57.57	68.94	83.54	-14.60	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

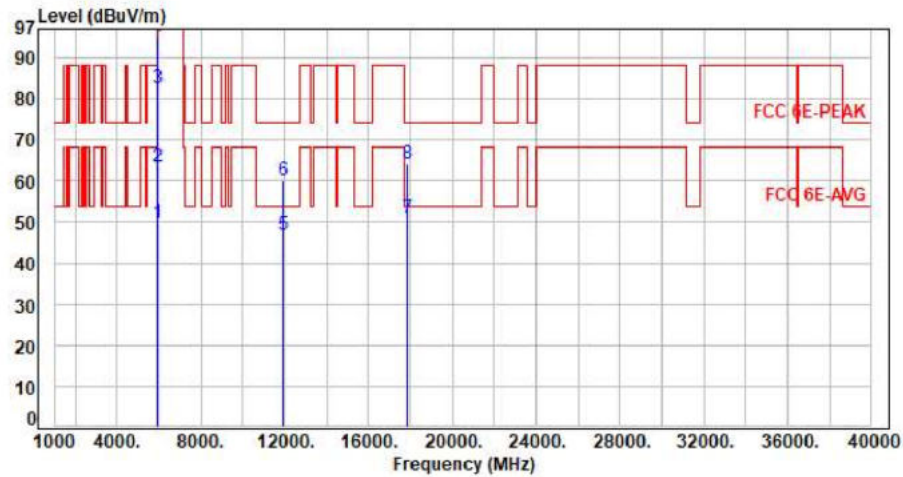

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.19	49.85	68.20	-18.35	Average	307	8	P
2	5925.00	7.66	55.76	63.42	88.20	-24.78	Peak	307	8	P
3	5965.00	7.71	74.80	82.51	200.00	-117.49	Average	307	8	P
4	5965.00	7.71	87.52	95.23	200.00	-104.77	Peak	307	8	P
5	11930.00	18.05	28.66	46.71	54.00	-7.29	Average	100	224	P
6	11930.00	18.05	41.90	59.95	74.00	-14.05	Peak	100	224	P
7	17895.00	27.89	23.04	50.93	54.00	-3.07	Average	100	286	P
8	17895.00	27.89	36.30	64.19	74.00	-9.81	Peak	100	286	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

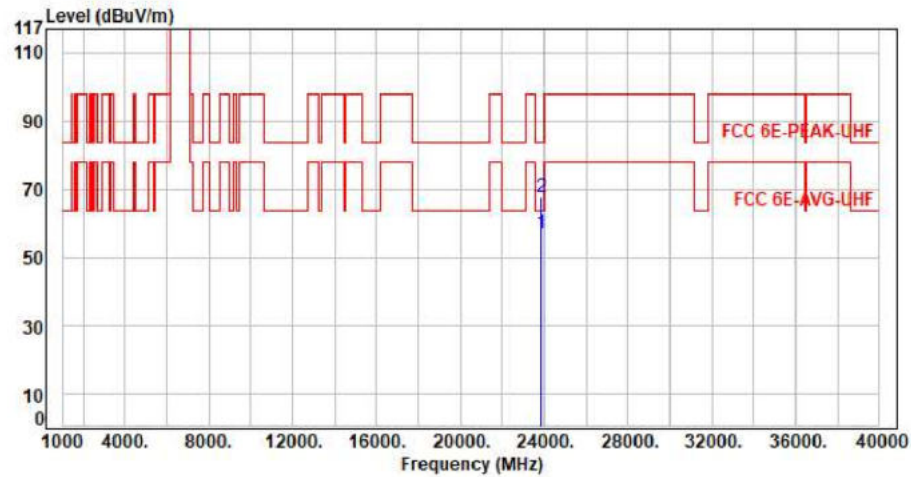

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	45.76	56.96	63.54	-6.58	Average	150	360	P
2	23860.00	11.20	56.25	67.45	83.54	-16.09	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor