




For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

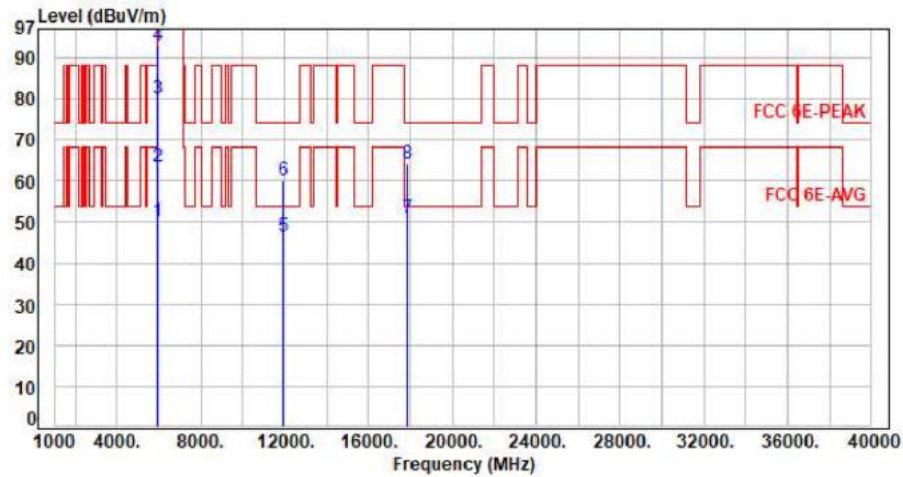

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	393	85	P
2	5925.00	7.66	55.95	63.61	88.20	-24.59	Peak	393	85	P
3	5965.00	7.71	72.38	80.09	200.00	-119.91	Average	393	85	P
4	5965.00	7.71	85.19	92.90	200.00	-107.10	Peak	393	85	P
5	11930.00	18.05	28.54	46.59	54.00	-7.41	Average	100	125	P
6	11930.00	18.05	41.97	60.02	74.00	-13.98	Peak	100	125	P
7	17895.00	27.89	22.90	50.79	54.00	-3.21	Average	100	48	P
8	17895.00	27.89	36.37	64.26	74.00	-9.74	Peak	100	48	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

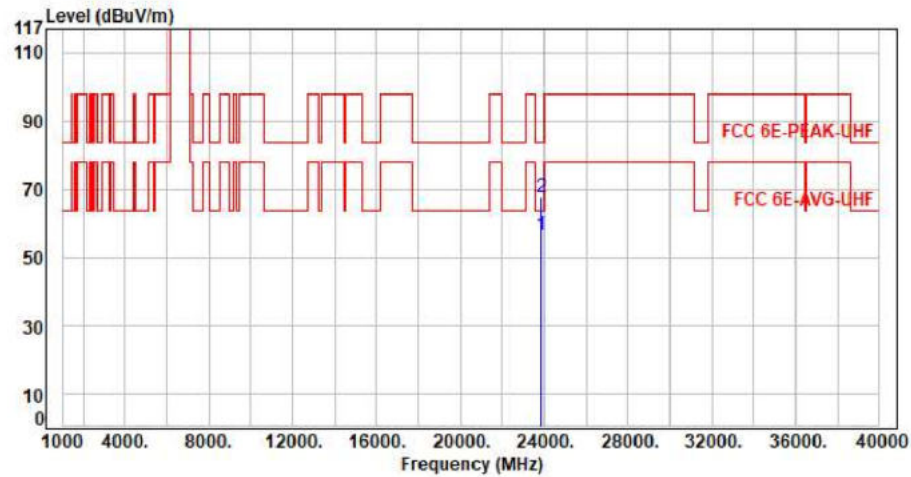


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	45.29	56.49	63.54	-7.05	Average	150	360	P
2	23860.00	11.20	56.44	67.64	83.54	-15.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

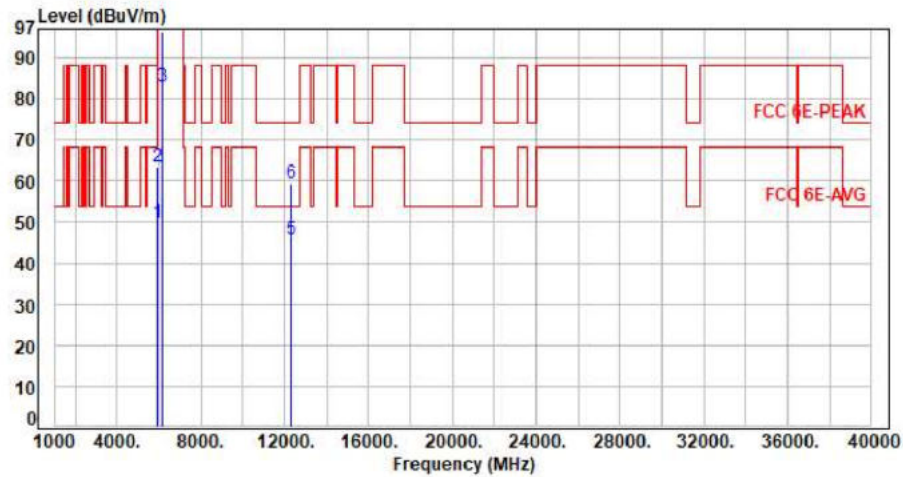


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.12	49.78	68.20	-18.42	Average	259	24	P
2	5925.00	7.66	55.68	63.34	88.20	-24.86	Peak	259	24	P
3	6165.00	8.34	74.57	82.91	200.00	-117.09	Average	259	24	P
4	6165.00	8.34	88.10	96.44	200.00	-103.56	Peak	259	24	P
5	12330.00	17.71	27.96	45.67	54.00	-8.33	Average	100	226	P
6	12330.00	17.71	41.54	59.25	74.00	-14.75	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

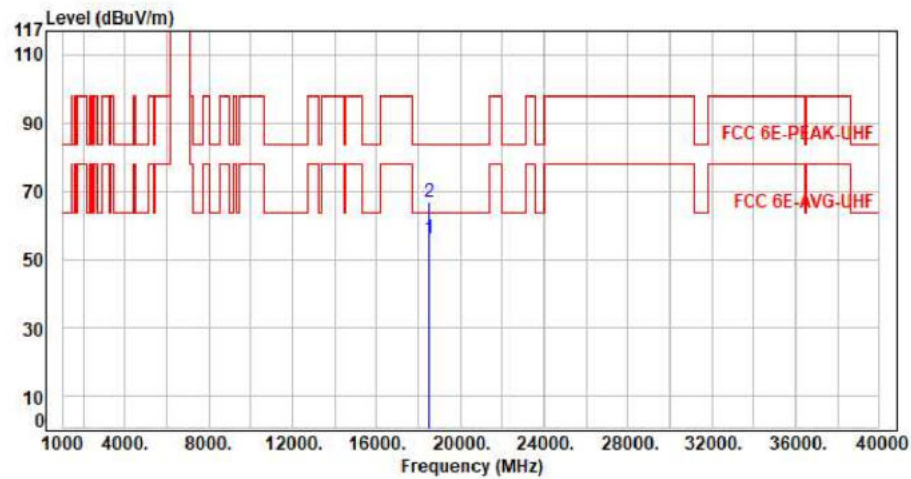

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	45.56	55.97	63.54	-7.57	Average	150	360	P
2	18495.00	10.41	56.44	66.85	83.54	-16.69	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

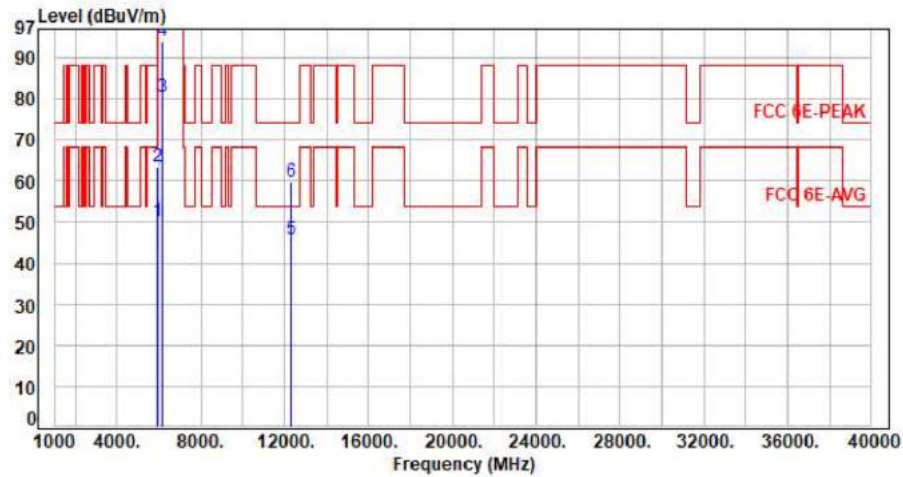


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.32	49.98	68.20	-18.22	Average	392	79	P
2	5925.00	7.66	55.76	63.42	88.20	-24.78	Peak	392	79	P
3	6165.00	8.34	71.94	80.28	200.00	-119.72	Average	392	79	P
4	6165.00	8.34	85.62	93.96	200.00	-106.04	Peak	392	79	P
5	12330.00	17.71	27.89	45.60	54.00	-8.40	Average	100	123	P
6	12330.00	17.71	41.86	59.57	74.00	-14.43	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

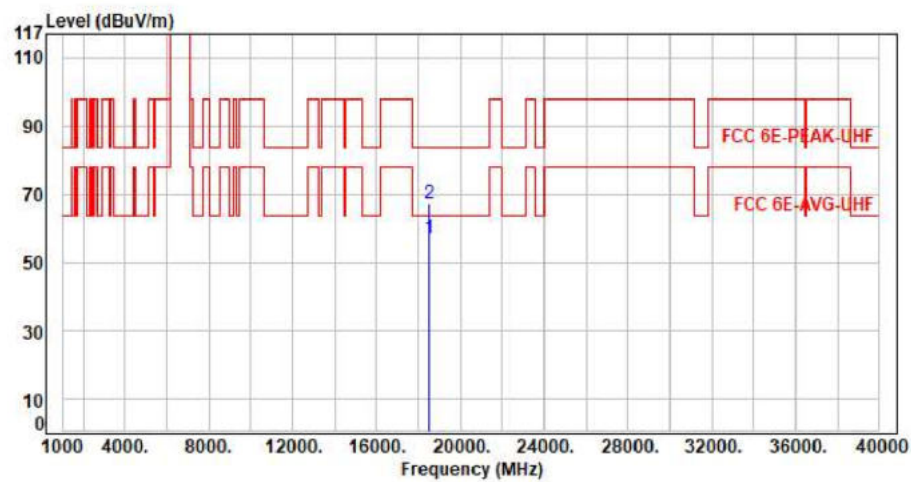

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18495.00	10.41	46.31	56.72	63.54	-6.82	Average	150	360	P
2	18495.00	10.41	56.84	67.25	83.54	-16.29	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

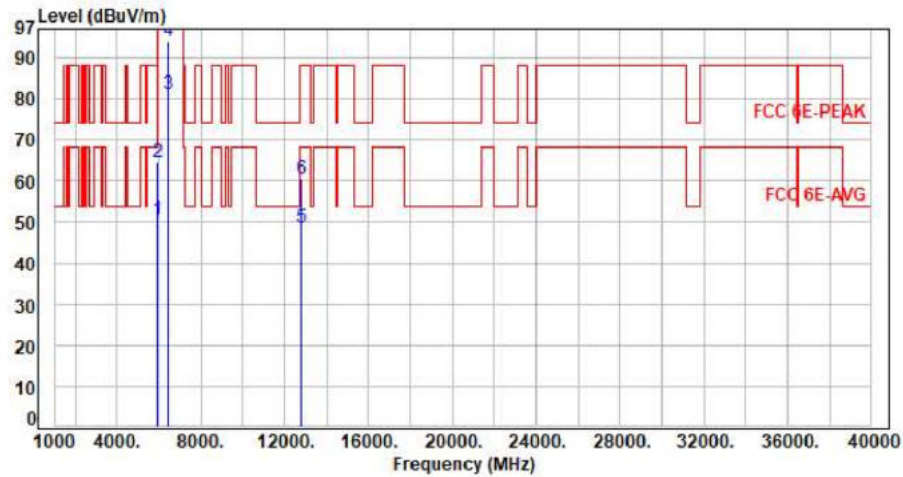


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.81	50.47	68.20	-17.73	Average	300	16	P
2	5925.00	7.66	56.82	64.48	88.20	-23.72	Peak	300	16	P
3	6405.00	8.35	72.89	81.24	200.00	-118.76	Average	300	16	P
4	6405.00	8.35	85.86	94.21	200.00	-105.79	Peak	300	16	P
5	12810.00	18.88	29.77	48.65	68.20	-19.55	Average	100	223	P
6	12810.00	18.88	41.76	60.64	88.20	-27.56	Peak	100	223	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

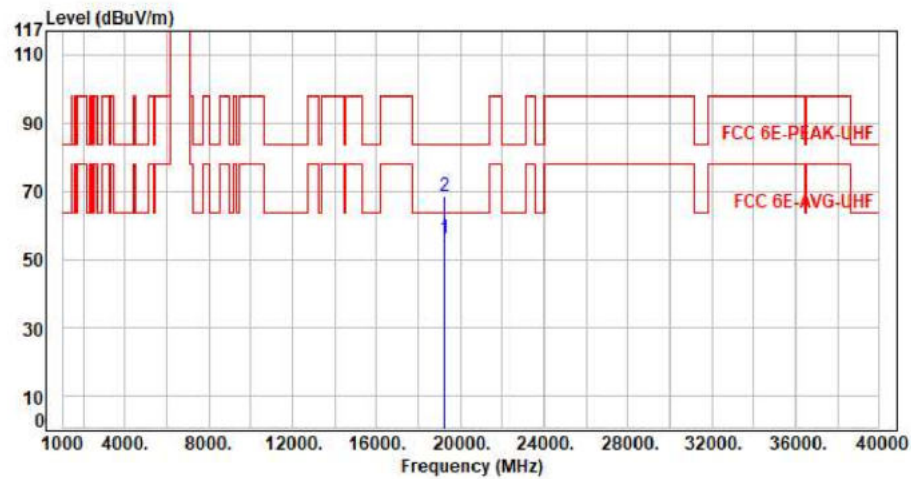


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.89	56.13	63.54	-7.41	Average	150	360	P
2	19215.00	11.24	57.33	68.57	83.54	-14.97	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

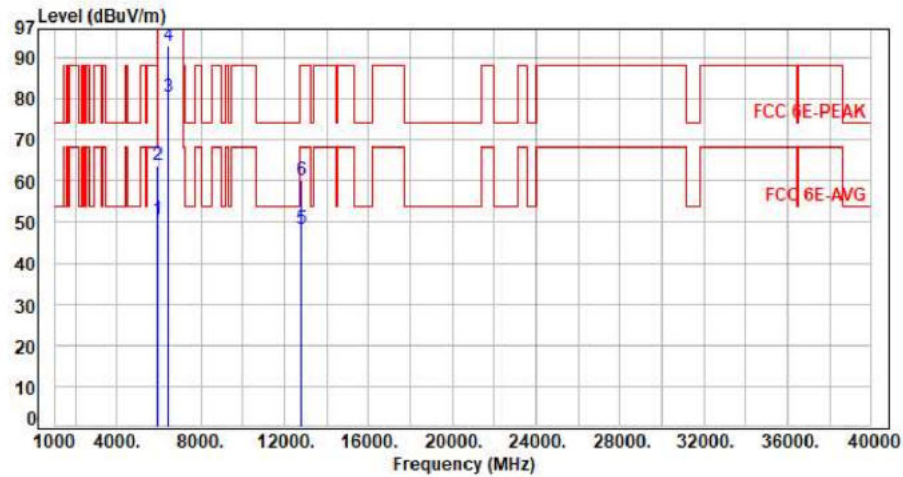


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	397	94	P
2	5925.00	7.66	56.20	63.86	88.20	-24.34	Peak	397	94	P
3	6405.00	8.35	71.92	80.27	200.00	-119.73	Average	397	94	P
4	6405.00	8.35	84.63	92.98	200.00	-107.02	Peak	397	94	P
5	12810.00	18.88	29.51	48.39	68.20	-19.81	Average	100	138	P
6	12810.00	18.88	41.38	60.26	88.20	-27.94	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

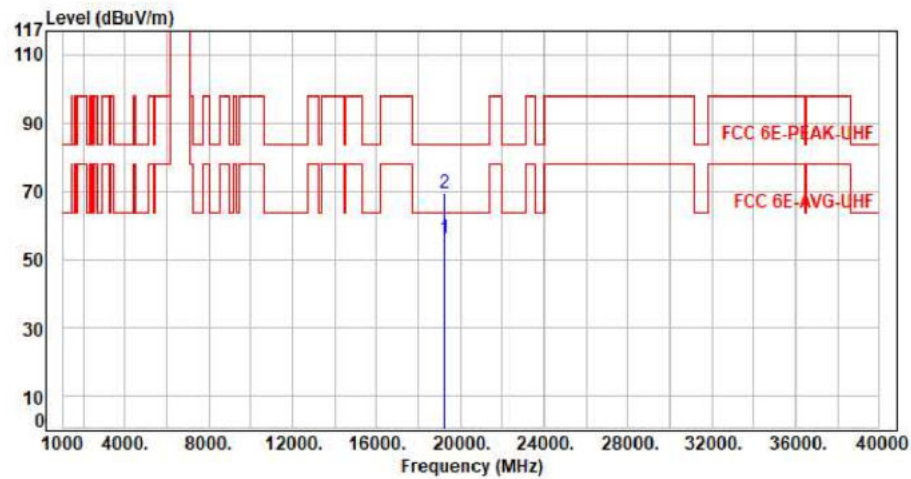


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	44.65	55.89	63.54	-7.65	Average	150	360	P
2	19215.00	11.24	57.95	69.19	83.54	-14.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

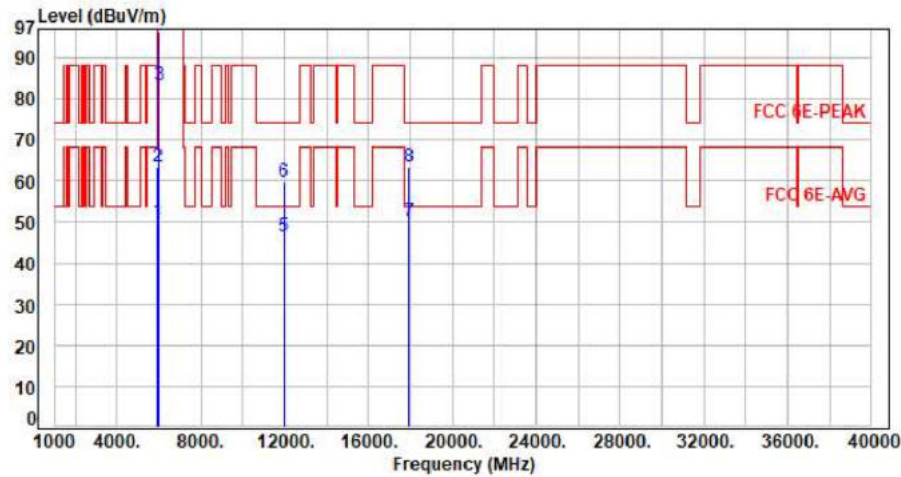

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	302	8	P
2	5925.00	7.66	55.72	63.38	88.20	-24.82	Peak	302	8	P
3	5985.00	7.75	75.44	83.19	200.00	-116.81	Average	302	8	P
4	5985.00	7.75	88.49	96.24	200.00	-103.76	Peak	302	8	P
5	11970.00	18.02	28.57	46.59	54.00	-7.41	Average	100	232	P
6	11970.00	18.02	41.88	59.90	74.00	-14.10	Peak	100	232	P
7	17955.00	28.04	22.10	50.14	54.00	-3.86	Average	100	284	P
8	17955.00	28.04	35.43	63.47	74.00	-10.53	Peak	100	284	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

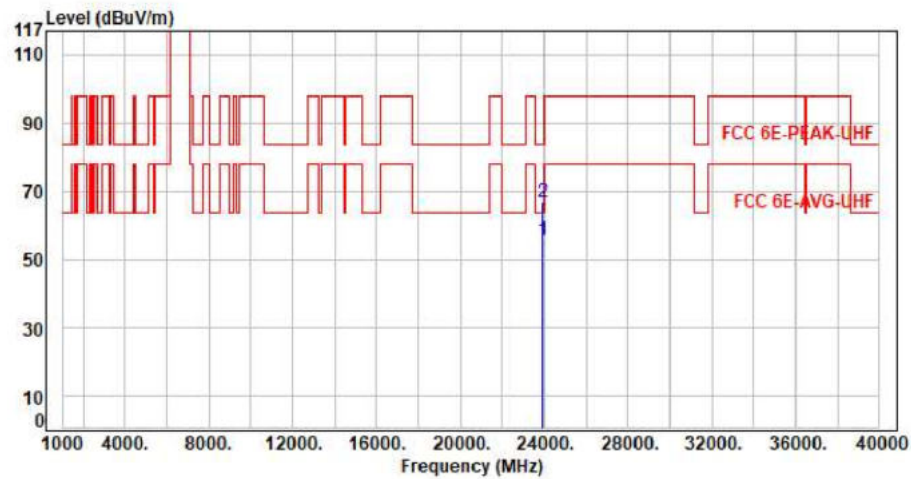

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	44.18	55.54	63.54	-8.00	Average	150	360	P
2	23940.00	11.36	55.44	66.80	83.54	-16.74	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

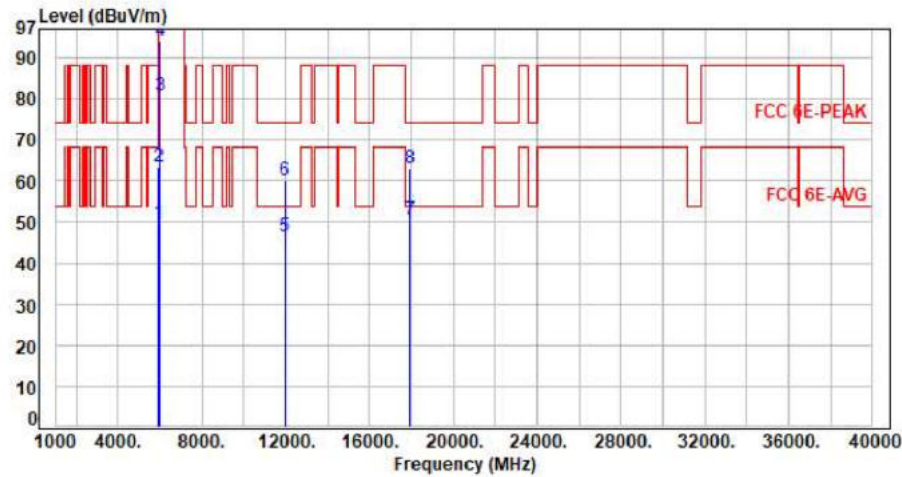

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.18	49.84	68.20	-18.36	Average	397	86	P
2	5925.00	7.66	55.64	63.30	88.20	-24.90	Peak	397	86	P
3	5985.00	7.75	72.97	80.72	200.00	-119.28	Average	397	86	P
4	5985.00	7.75	86.18	93.93	200.00	-106.07	Peak	397	86	P
5	11970.00	18.02	28.27	46.29	54.00	-7.71	Average	100	153	P
6	11970.00	18.02	41.95	59.97	74.00	-14.03	Peak	100	153	P
7	17955.00	28.04	22.56	50.60	54.00	-3.40	Average	100	48	P
8	17955.00	28.04	34.89	62.93	74.00	-11.07	Peak	100	48	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

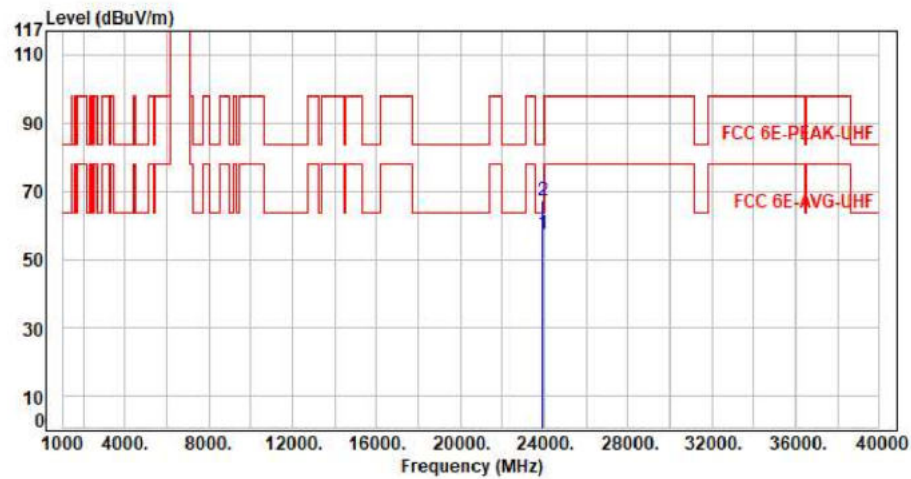


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	46.13	57.49	63.54	-6.05	Average	150	360	P
2	23940.00	11.36	55.73	67.09	83.54	-16.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

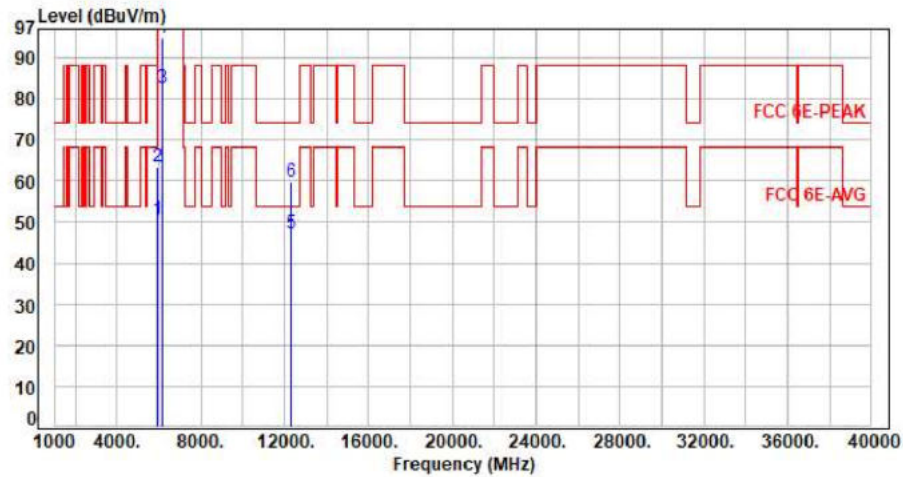


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	100	40	P
2	5925.00	7.66	55.66	63.32	88.20	-24.88	Peak	100	40	P
3	6145.00	8.31	74.30	82.61	200.00	-117.39	Average	100	40	P
4	6145.00	8.31	86.65	94.96	200.00	-105.04	Peak	100	40	P
5	12290.00	17.62	29.67	47.29	54.00	-6.71	Average	100	241	P
6	12290.00	17.62	42.20	59.82	74.00	-14.18	Peak	100	241	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

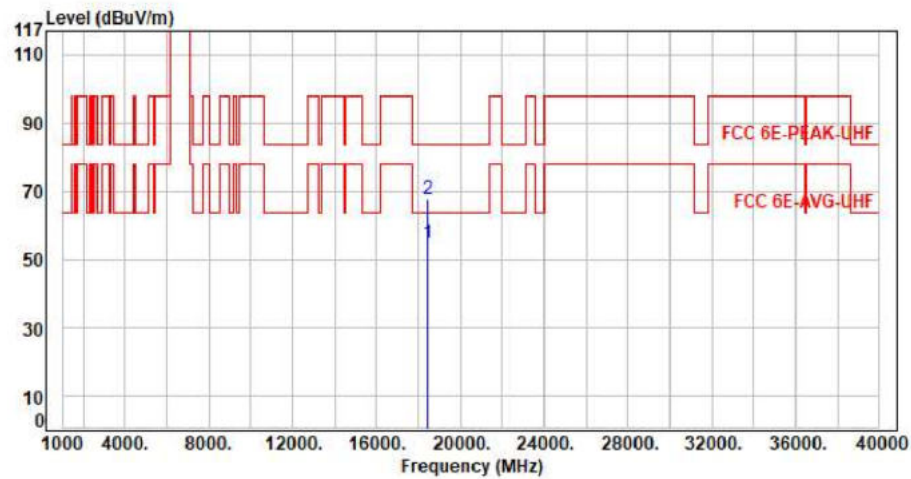


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.48	54.68	63.54	-8.86	Average	150	360	P
2	18435.00	10.20	57.41	67.61	83.54	-15.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

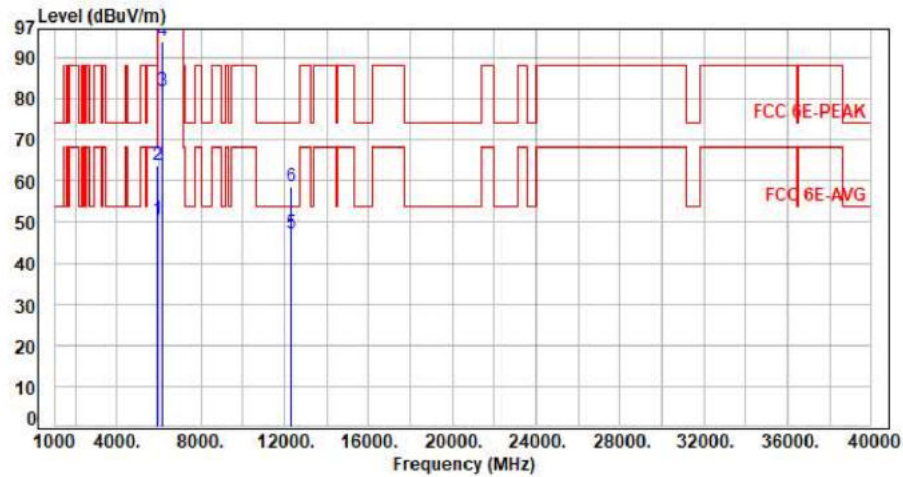


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.94	50.60	68.20	-17.60	Average	400	86	P
2	5925.00	7.66	56.02	63.68	88.20	-24.52	Peak	400	86	P
3	6145.00	8.31	73.74	82.05	200.00	-117.95	Average	400	86	P
4	6145.00	8.31	85.60	93.91	200.00	-106.09	Peak	400	86	P
5	12290.00	17.62	29.62	47.24	54.00	-6.76	Average	100	154	P
6	12290.00	17.62	41.12	58.74	74.00	-15.26	Peak	100	154	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

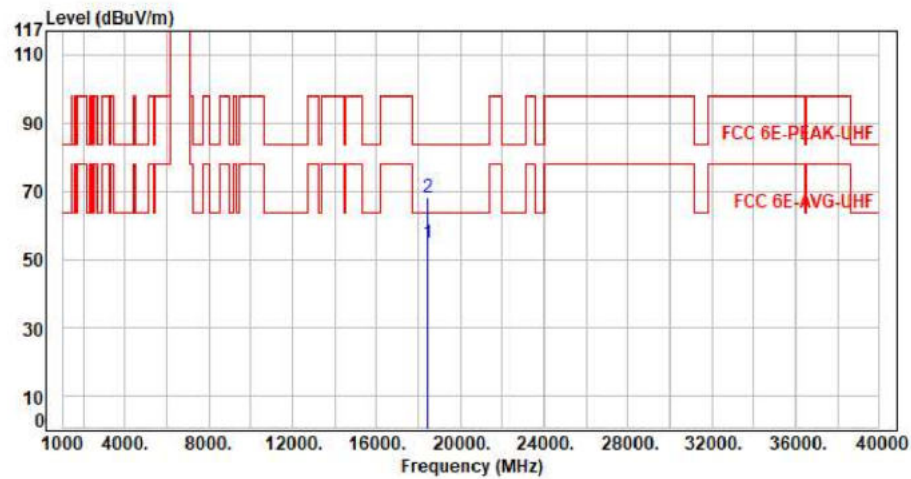


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	44.33	54.53	63.54	-9.01	Average	150	360	P
2	18435.00	10.20	57.90	68.10	83.54	-15.44	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

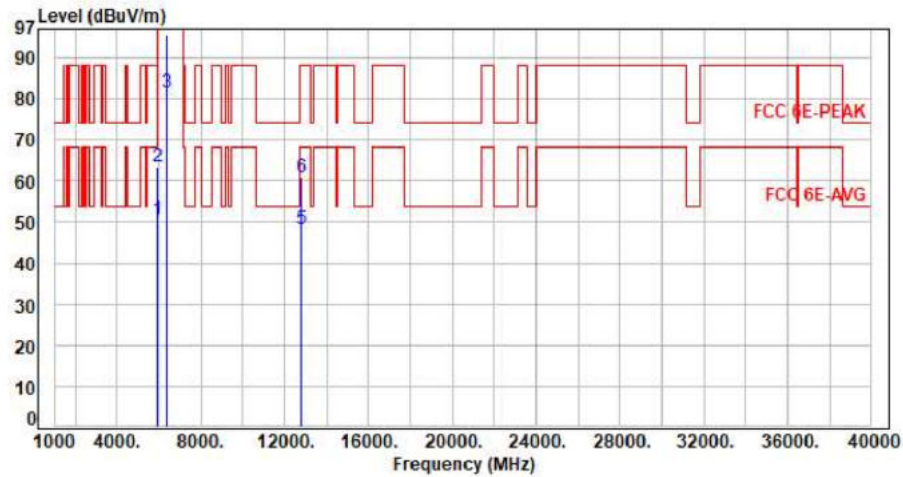


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.86	50.52	68.20	-17.68	Average	299	15	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	299	15	P
3	6385.00	8.34	73.30	81.64	200.00	-118.36	Average	299	15	P
4	6385.00	8.34	87.10	95.44	200.00	-104.56	Peak	299	15	P
5	12770.00	18.73	29.64	48.37	68.20	-19.83	Average	100	188	P
6	12770.00	18.73	42.09	60.82	88.20	-27.38	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

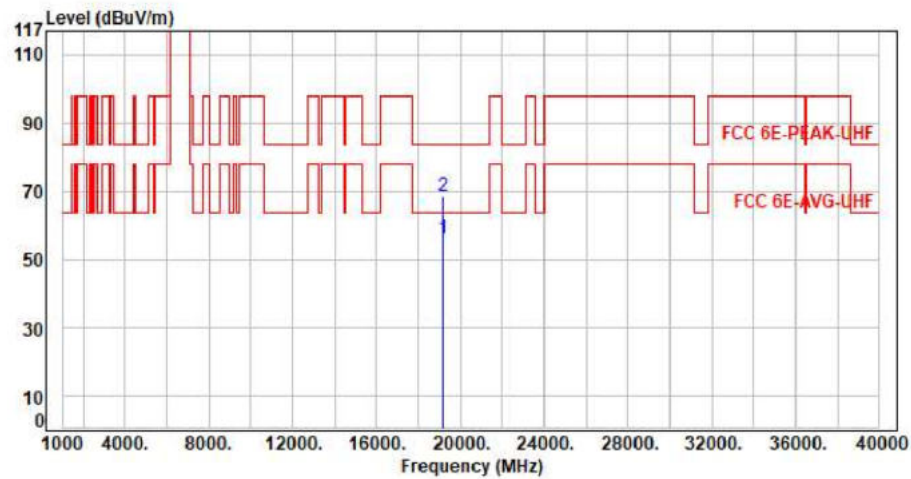


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	44.74	56.08	63.54	-7.46	Average	150	360	P
2	19155.00	11.34	57.27	68.61	83.54	-14.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

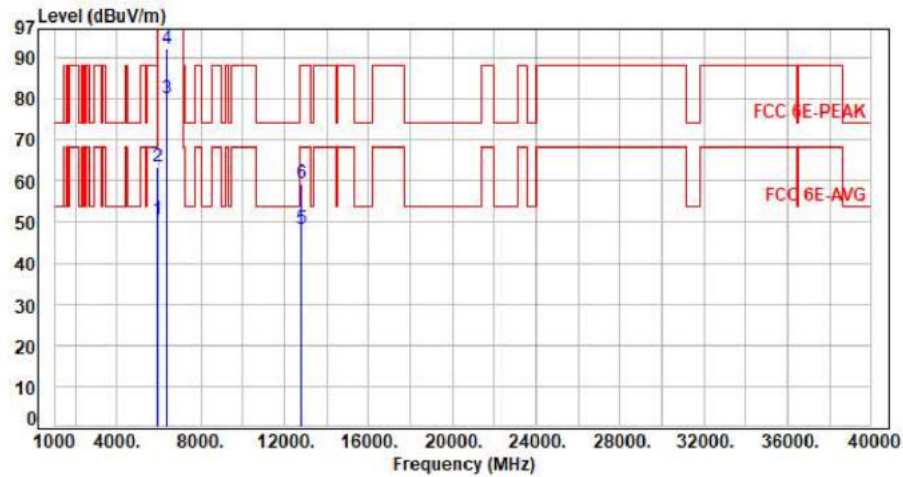


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.87	50.53	68.20	-17.67	Average	399	83	P
2	5925.00	7.66	55.62	63.28	88.20	-24.92	Peak	399	83	P
3	6385.00	8.34	71.62	79.96	200.00	-120.04	Average	399	83	P
4	6385.00	8.34	84.04	92.38	200.00	-107.62	Peak	399	83	P
5	12770.00	18.73	29.76	48.49	68.20	-19.71	Average	100	224	P
6	12770.00	18.73	40.80	59.53	88.20	-28.67	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH87 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

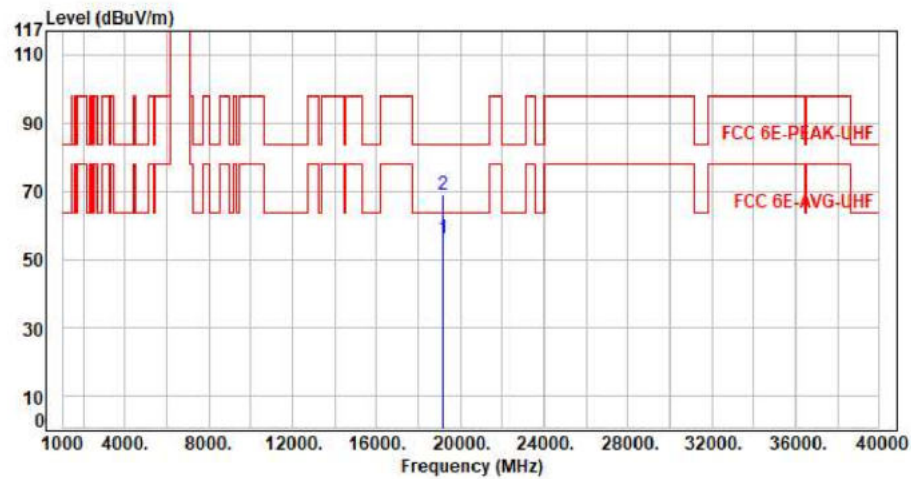


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19155.00	11.34	44.72	56.06	63.54	-7.48	Average	150	360	P
2	19155.00	11.34	57.55	68.89	83.54	-14.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

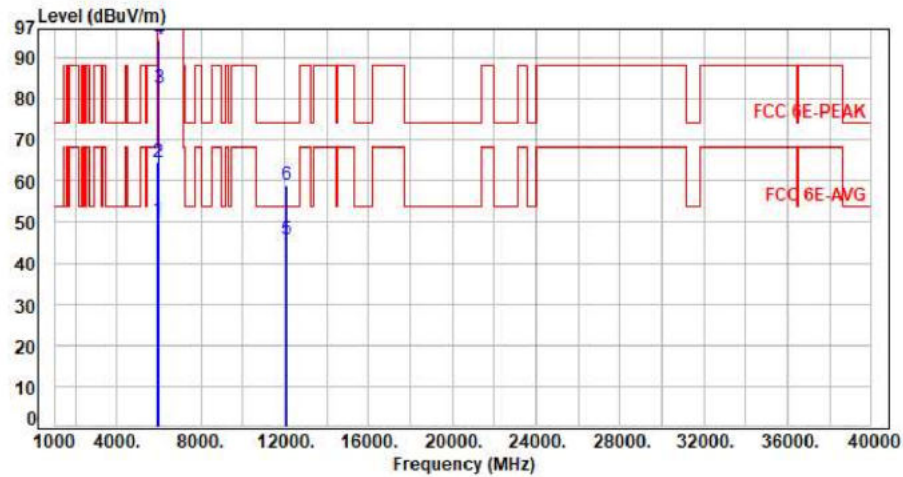


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.89	50.55	68.20	-17.65	Average	100	54	P
2	5925.00	7.66	56.79	64.45	88.20	-23.75	Peak	100	54	P
3	6025.00	7.91	74.68	82.59	200.00	-117.41	Average	100	54	P
4	6025.00	7.91	86.47	94.38	200.00	-105.62	Peak	100	54	P
5	12050.00	17.81	28.10	45.91	54.00	-8.09	Average	100	231	P
6	12050.00	17.81	41.03	58.84	74.00	-15.16	Peak	100	231	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

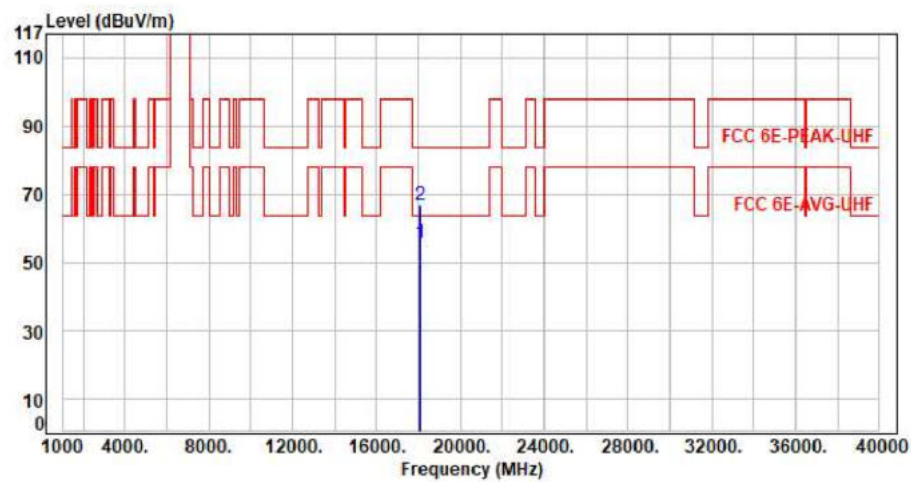

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	45.68	55.58	63.54	-7.96	Average	150	360	P
2	18075.00	9.90	56.87	66.77	83.54	-16.77	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

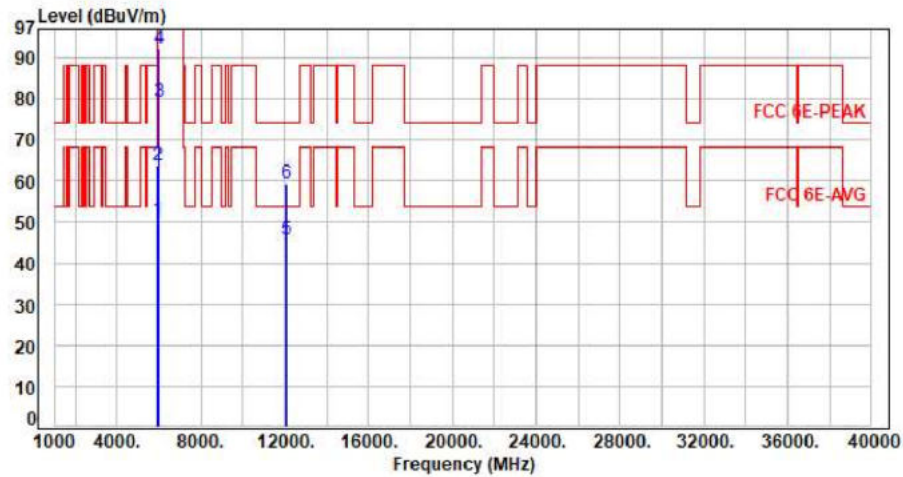


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	126	84	P
2	5925.00	7.66	56.25	63.91	88.20	-24.29	Peak	126	84	P
3	6025.00	7.91	71.54	79.45	200.00	-120.55	Average	126	84	P
4	6025.00	7.91	84.32	92.23	200.00	-107.77	Peak	126	84	P
5	12050.00	17.81	27.97	45.78	54.00	-8.22	Average	100	138	P
6	12050.00	17.81	41.43	59.24	74.00	-14.76	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x160 CH15 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

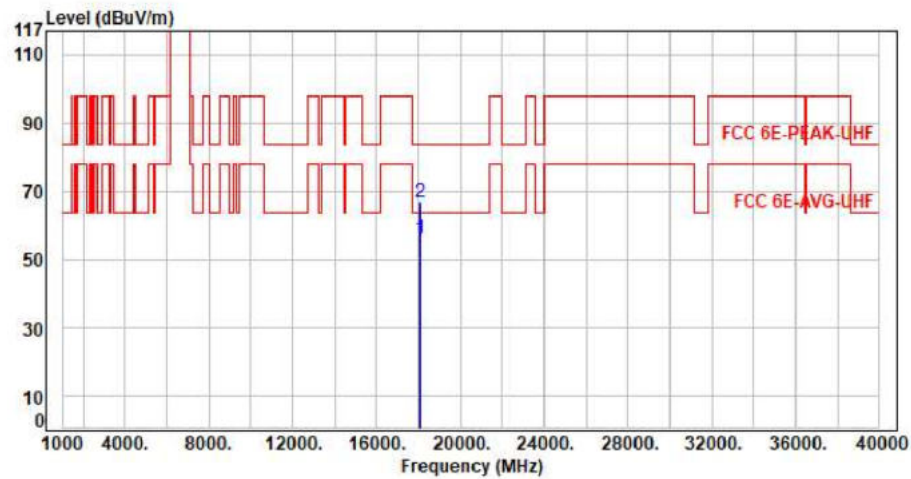


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18075.00	9.90	46.14	56.04	63.54	-7.50	Average	150	360	P
2	18075.00	9.90	56.77	66.67	83.54	-16.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

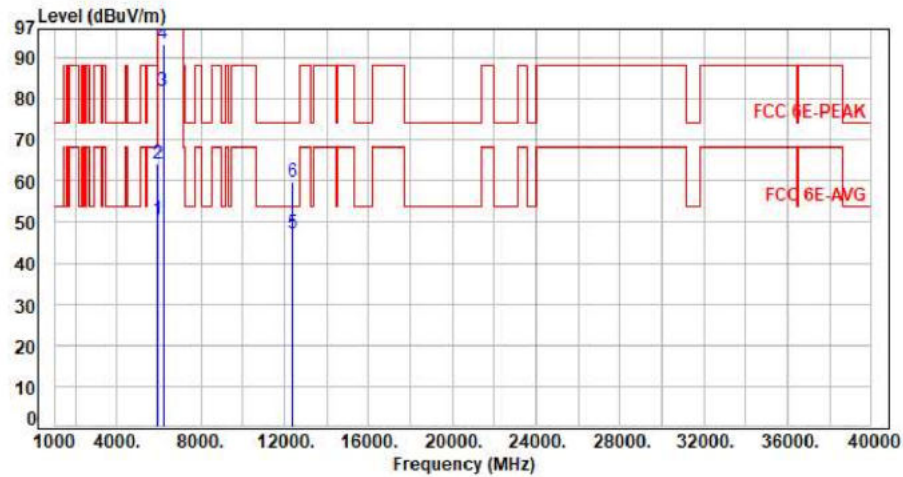


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.97	50.63	68.20	-17.57	Average	100	39	P
2	5925.00	7.66	56.34	64.00	88.20	-24.20	Peak	100	39	P
3	6185.00	8.36	73.50	81.86	200.00	-118.14	Average	100	39	P
4	6185.00	8.36	84.98	93.34	200.00	-106.66	Peak	100	39	P
5	12370.00	17.74	29.61	47.35	54.00	-6.65	Average	100	224	P
6	12370.00	17.74	42.16	59.90	74.00	-14.10	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

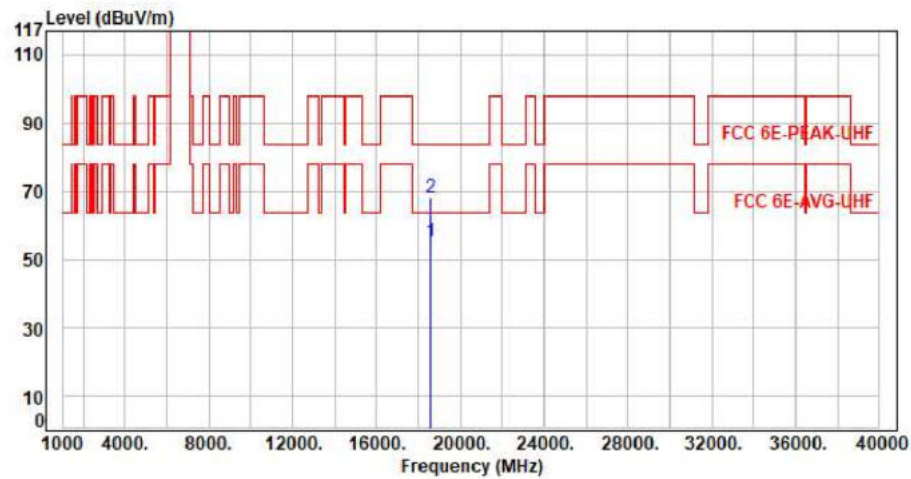


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	44.68	55.34	63.54	-8.20	Average	150	360	P
2	18555.00	10.66	57.42	68.08	83.54	-15.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

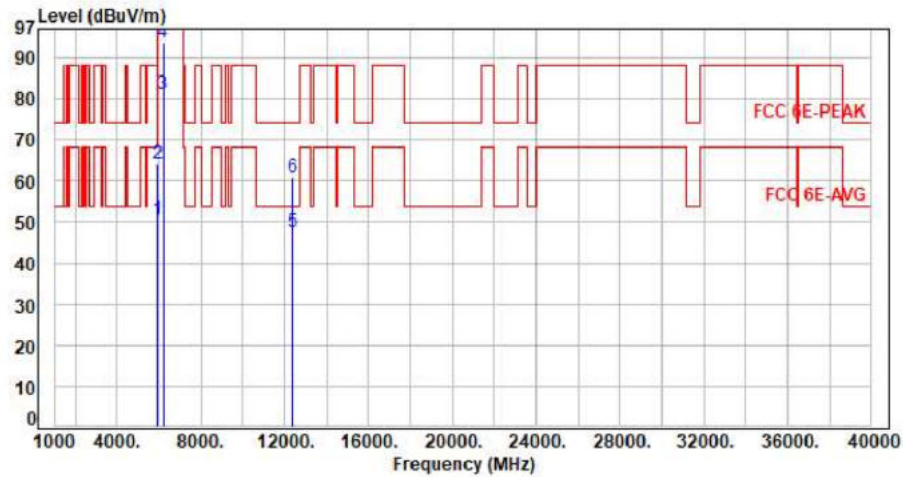


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.81	50.47	68.20	-17.73	Average	395	85	P
2	5925.00	7.66	56.63	64.29	88.20	-23.91	Peak	395	85	P
3	6185.00	8.36	72.96	81.32	200.00	-118.68	Average	395	85	P
4	6185.00	8.36	85.42	93.78	200.00	-106.22	Peak	395	85	P
5	12370.00	17.74	29.66	47.40	54.00	-6.60	Average	100	110	P
6	12370.00	17.74	43.18	60.92	74.00	-13.08	Peak	100	110	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH47 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

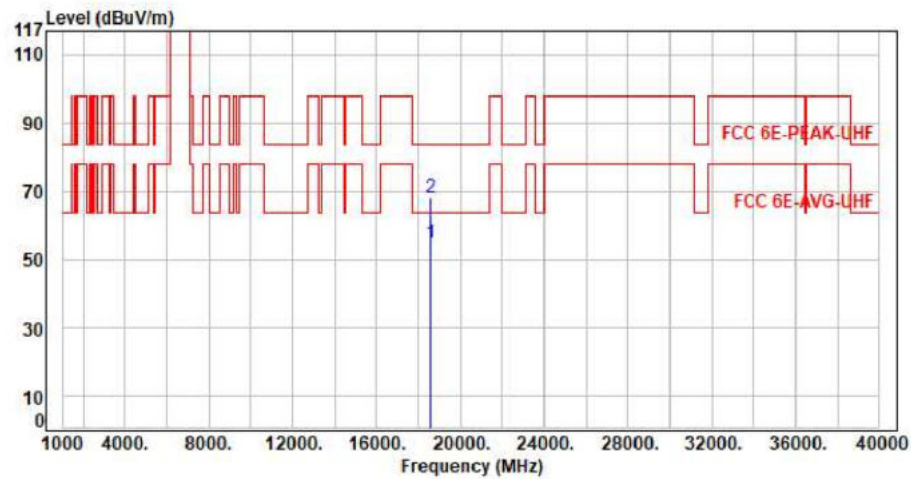


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18555.00	10.66	44.19	54.85	63.54	-8.69	Average	150	360	P
2	18555.00	10.66	57.42	68.08	83.54	-15.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

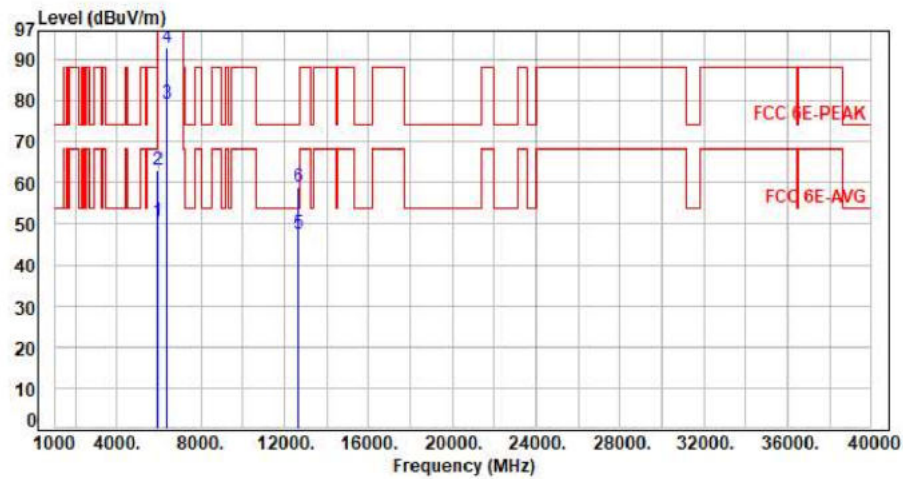


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	100	15	P
2	5925.00	7.66	55.45	63.11	88.20	-25.09	Peak	100	15	P
3	6345.00	8.31	71.12	79.43	200.00	-120.57	Average	100	15	P
4	6345.00	8.31	84.81	93.12	200.00	-106.88	Peak	100	15	P
5	12690.00	18.27	29.14	47.41	54.00	-6.59	Average	100	221	P
6	12690.00	18.27	40.68	58.95	74.00	-15.05	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

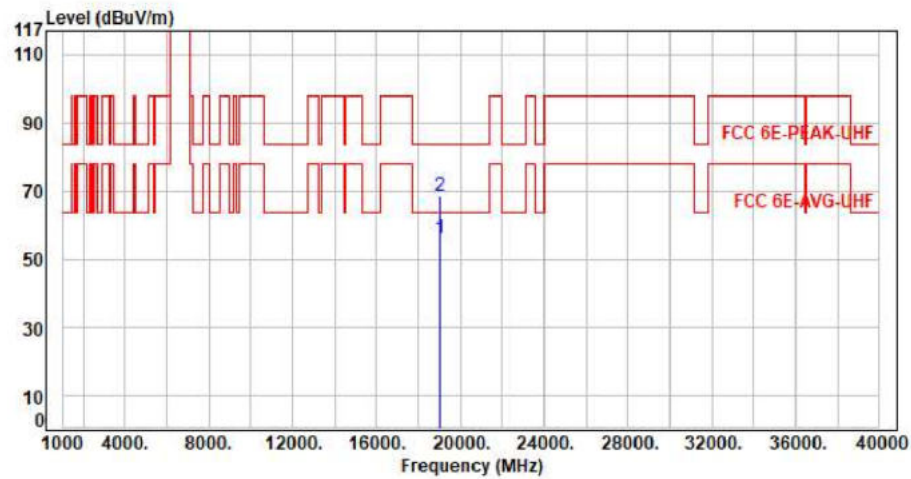


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.85	56.26	63.54	-7.28	Average	150	360	P
2	19035.00	11.41	57.26	68.67	83.54	-14.87	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

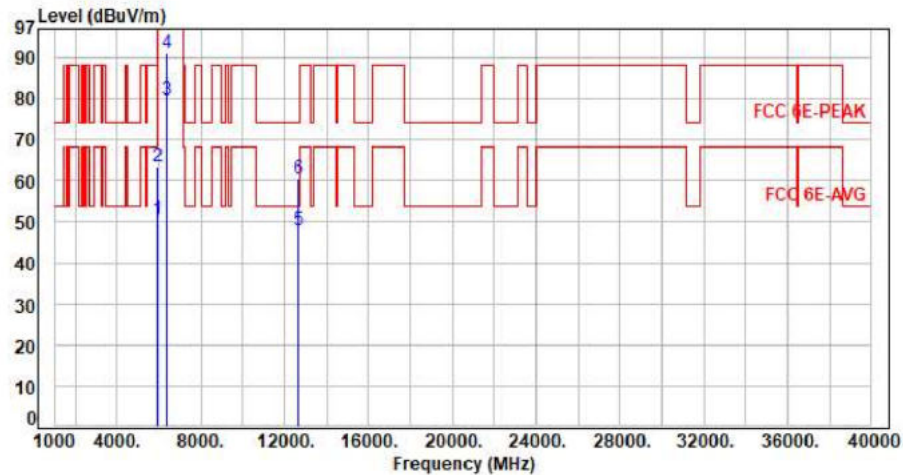


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.86	50.52	68.20	-17.68	Average	393	85	P
2	5925.00	7.66	55.93	63.59	88.20	-24.61	Peak	393	85	P
3	6345.00	8.31	71.30	79.61	200.00	-120.39	Average	393	85	P
4	6345.00	8.31	82.93	91.24	200.00	-108.76	Peak	393	85	P
5	12690.00	18.27	29.66	47.93	54.00	-6.07	Average	100	134	P
6	12690.00	18.27	42.09	60.36	74.00	-13.64	Peak	100	134	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH79 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

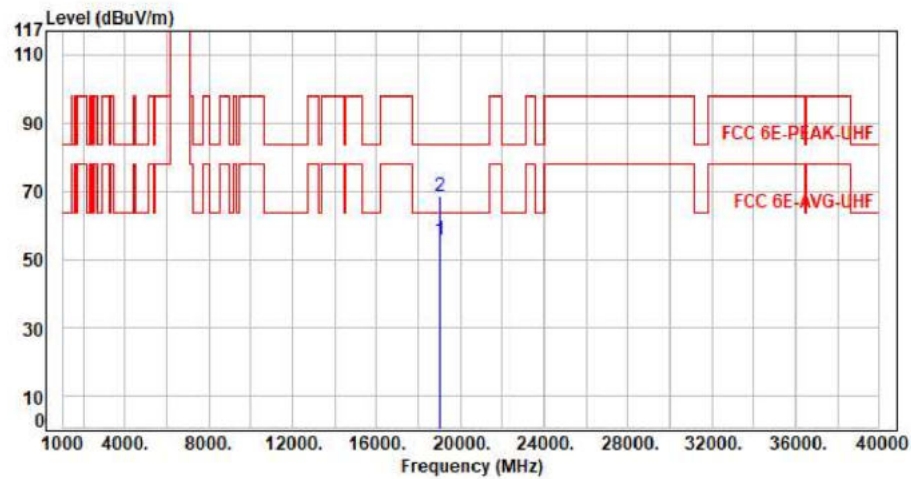


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19035.00	11.41	44.03	55.44	63.54	-8.10	Average	150	360	P
2	19035.00	11.41	57.27	68.68	83.54	-14.86	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

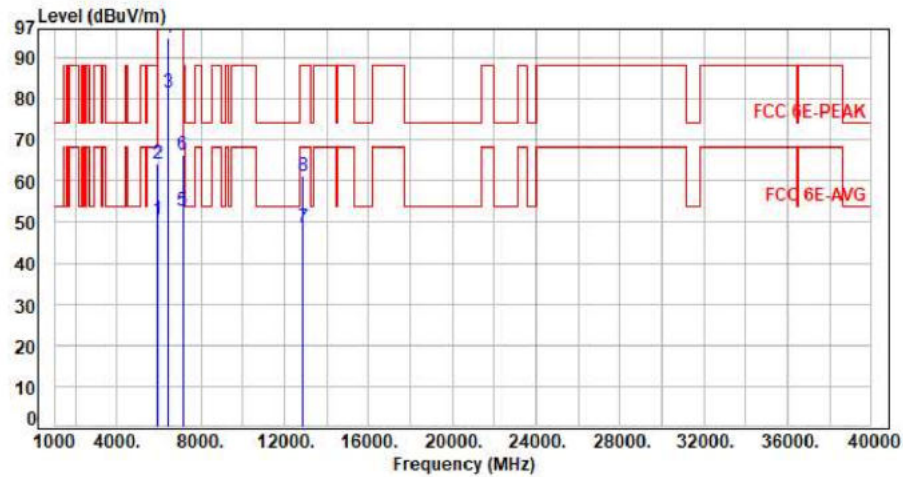

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.77	50.43	68.20	-17.77	Average	296	17	P
2	5925.00	7.66	56.39	64.05	88.20	-24.15	Peak	296	17	P
3	6435.00	8.32	73.22	81.54	200.00	-118.46	Average	296	17	P
4	6435.00	8.32	86.48	94.80	200.00	-105.20	Peak	296	17	P
5	7125.00	10.05	42.79	52.84	68.20	-15.36	Average	296	17	P
6	7125.00	10.05	56.40	66.45	88.20	-21.75	Peak	296	17	P
7	12870.00	19.02	29.65	48.67	68.20	-19.53	Average	100	114	P
8	12870.00	19.02	42.18	61.20	88.20	-27.00	Peak	100	114	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

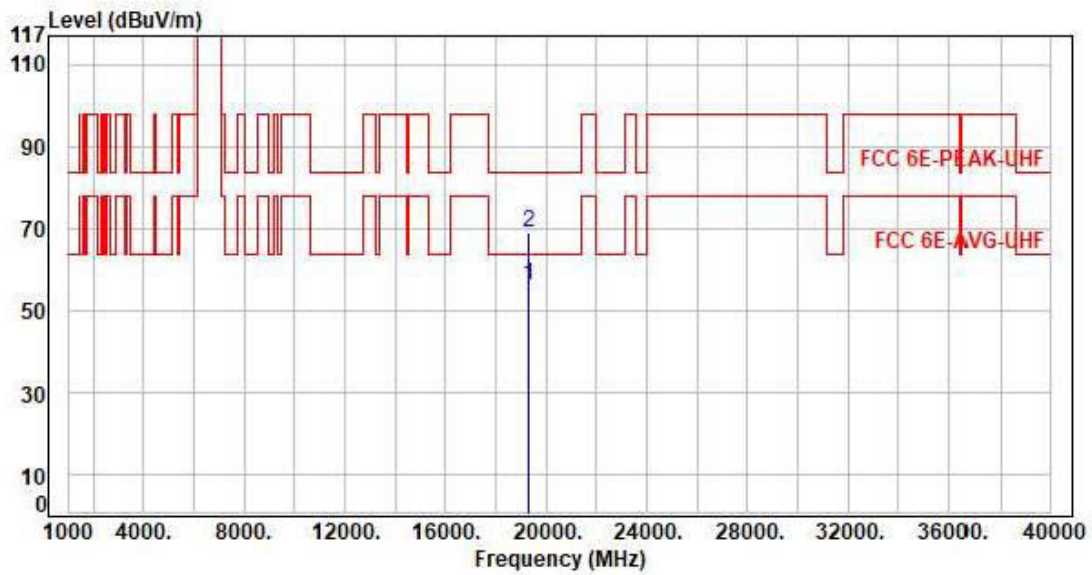

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.36	55.97	63.54	-7.57	Average	150	360	P
2	19305.00	11.61	57.18	68.79	83.54	-14.75	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

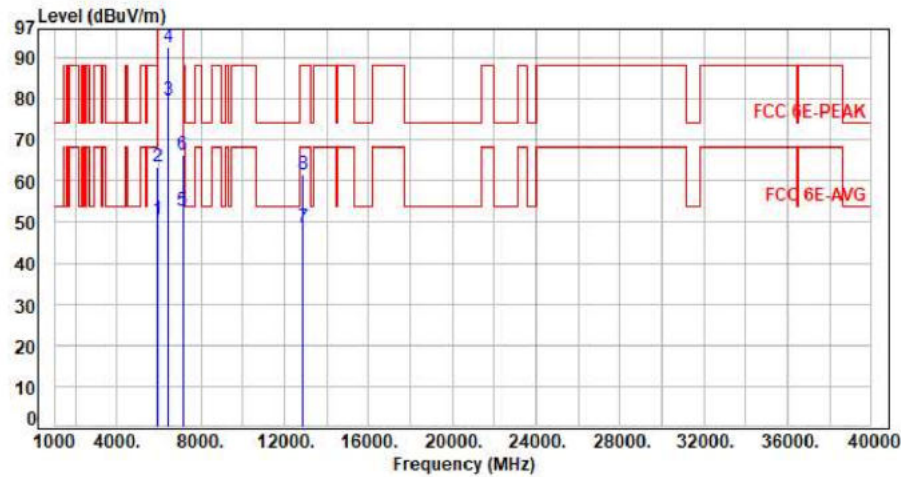

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.85	50.51	68.20	-17.69	Average	395	94	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	395	94	P
3	6435.00	8.32	71.17	79.49	200.00	-120.51	Average	395	94	P
4	6435.00	8.32	84.41	92.73	200.00	-107.27	Peak	395	94	P
5	7125.00	10.05	42.69	52.74	68.20	-15.46	Average	395	94	P
6	7125.00	10.05	56.23	66.28	88.20	-21.92	Peak	395	94	P
7	12870.00	19.02	29.65	48.67	68.20	-19.53	Average	100	131	P
8	12870.00	19.02	42.60	61.62	88.20	-26.58	Peak	100	131	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH97 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

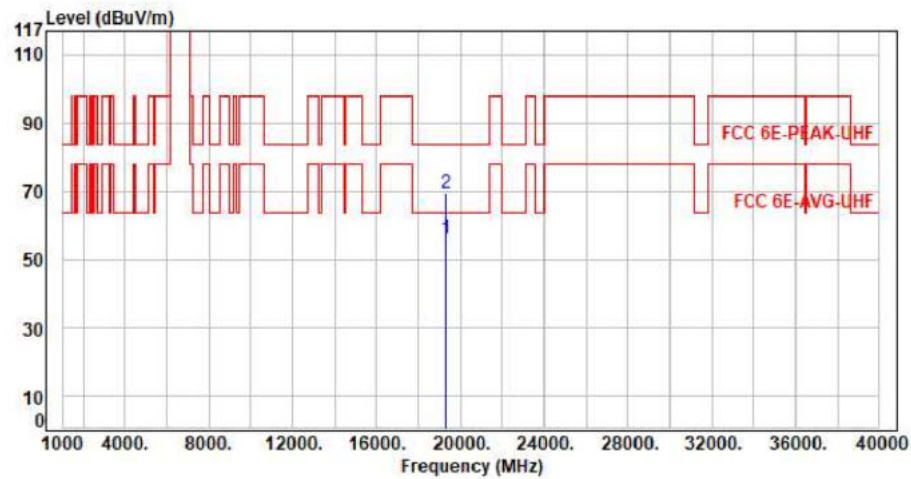


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19305.00	11.61	44.49	56.10	63.54	-7.44	Average	150	360	P
2	19305.00	11.61	57.86	69.47	83.54	-14.07	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

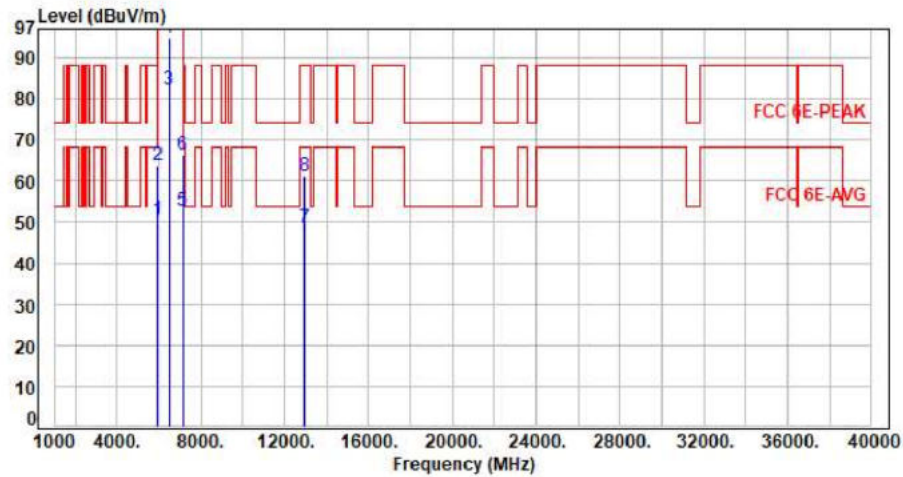

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.84	50.50	68.20	-17.70	Average	305	18	P
2	5925.00	7.66	55.98	63.64	88.20	-24.56	Peak	305	18	P
3	6475.00	8.33	73.98	82.31	200.00	-117.69	Average	305	18	P
4	6475.00	8.33	86.62	94.95	200.00	-105.05	Peak	305	18	P
5	7125.00	10.05	42.75	52.80	68.20	-15.40	Average	305	18	P
6	7125.00	10.05	56.18	66.23	88.20	-21.97	Peak	305	18	P
7	12950.00	19.39	29.18	48.57	68.20	-19.63	Average	100	225	P
8	12950.00	19.39	41.67	61.06	88.20	-27.14	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

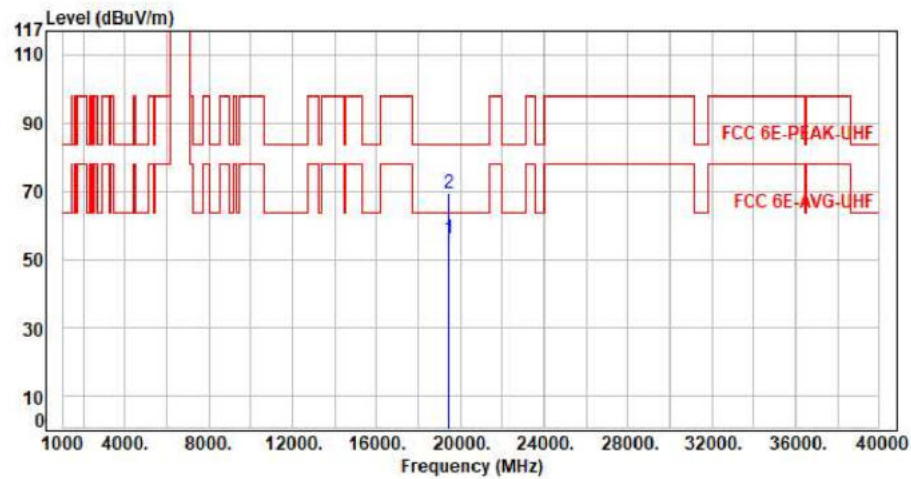

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.52	56.27	63.54	-7.27	Average	150	360	P
2	19425.00	11.75	57.62	69.37	83.54	-14.17	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

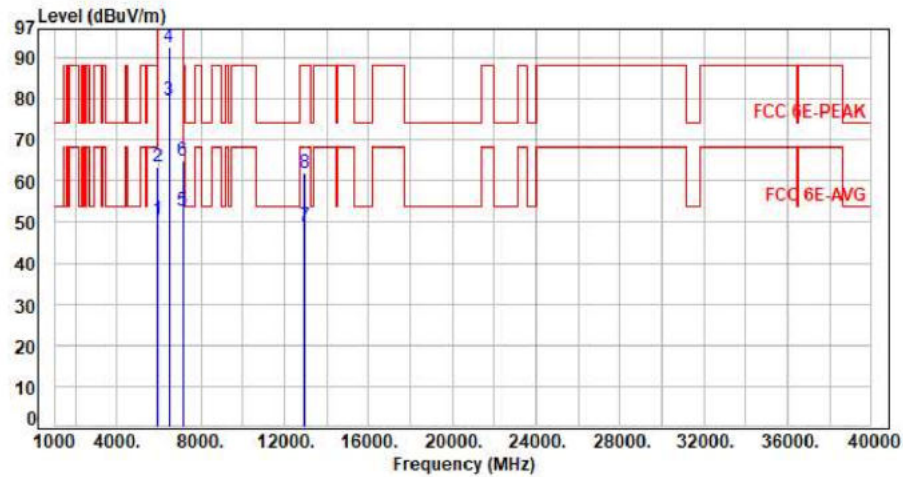

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.84	50.50	68.20	-17.70	Average	397	92	P
2	5925.00	7.66	55.69	63.35	88.20	-24.85	Peak	397	92	P
3	6475.00	8.33	71.38	79.71	200.00	-120.29	Average	397	92	P
4	6475.00	8.33	84.23	92.56	200.00	-107.44	Peak	397	92	P
5	7125.00	10.05	42.67	52.72	68.20	-15.48	Average	397	92	P
6	7125.00	10.05	54.98	65.03	88.20	-23.17	Peak	397	92	P
7	12950.00	19.39	29.61	49.00	68.20	-19.20	Average	100	127	P
8	12950.00	19.39	42.61	62.00	88.20	-26.20	Peak	100	127	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH105 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

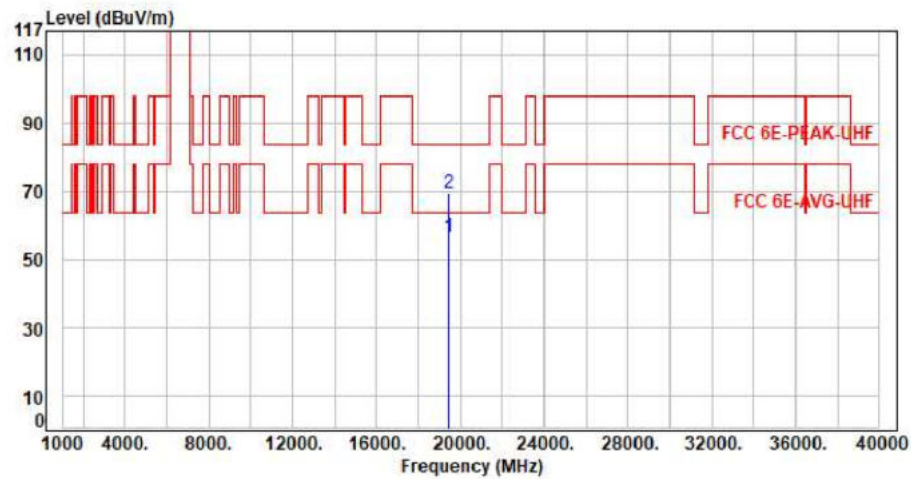


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19425.00	11.75	44.65	56.40	63.54	-7.14	Average	150	360	P
2	19425.00	11.75	57.68	69.43	83.54	-14.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

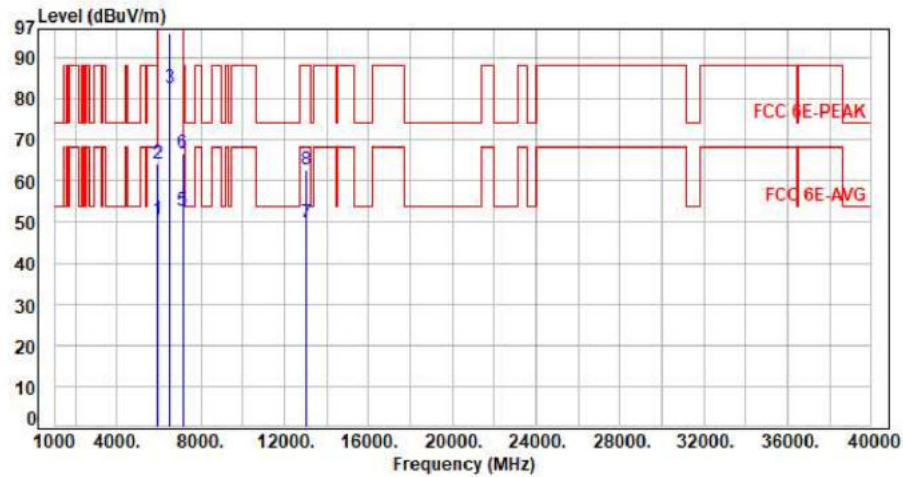

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	302	18	P
2	5925.00	7.66	56.69	64.35	88.20	-23.85	Peak	302	18	P
3	6515.00	8.42	74.11	82.53	200.00	-117.47	Average	302	18	P
4	6515.00	8.42	87.40	95.82	200.00	-104.18	Peak	302	18	P
5	7125.00	10.05	42.61	52.66	68.20	-15.54	Average	302	18	P
6	7125.00	10.05	56.63	66.68	88.20	-21.52	Peak	302	18	P
7	13030.00	19.86	29.86	49.72	68.20	-18.48	Average	100	310	P
8	13030.00	19.86	42.98	62.84	88.20	-25.36	Peak	100	310	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

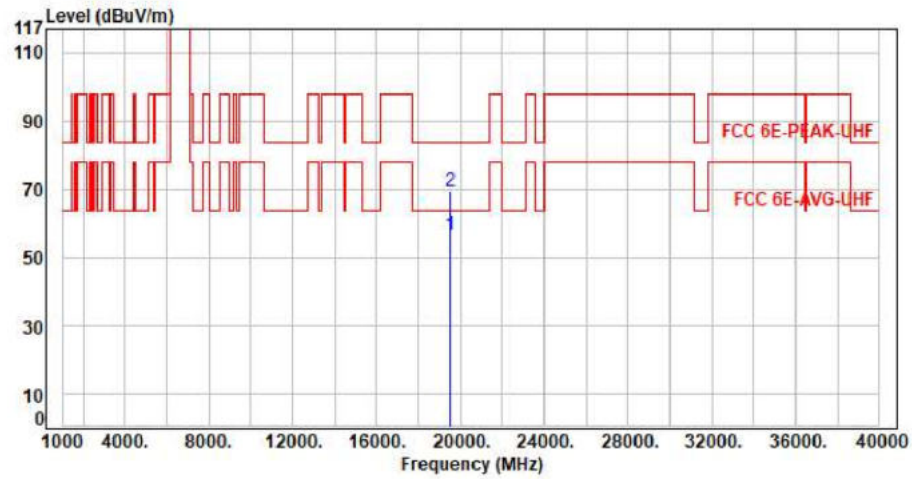


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.12	56.31	63.54	-7.23	Average	150	360	P
2	19545.00	12.19	57.41	69.60	83.54	-13.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

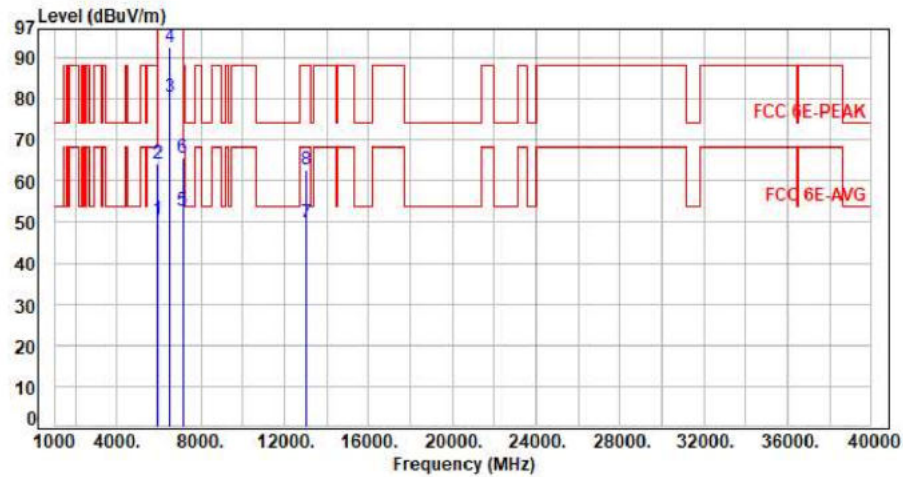

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	387	93	P
2	5925.00	7.66	56.47	64.13	88.20	-24.07	Peak	387	93	P
3	6515.00	8.42	71.83	80.25	200.00	-119.75	Average	387	93	P
4	6515.00	8.42	84.05	92.47	200.00	-107.53	Peak	387	93	P
5	7125.00	10.05	42.58	52.63	68.20	-15.57	Average	387	93	P
6	7125.00	10.05	55.70	65.75	88.20	-22.45	Peak	387	93	P
7	13030.00	19.86	29.87	49.73	68.20	-18.47	Average	100	149	P
8	13030.00	19.86	42.80	62.66	88.20	-25.54	Peak	100	149	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH113 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

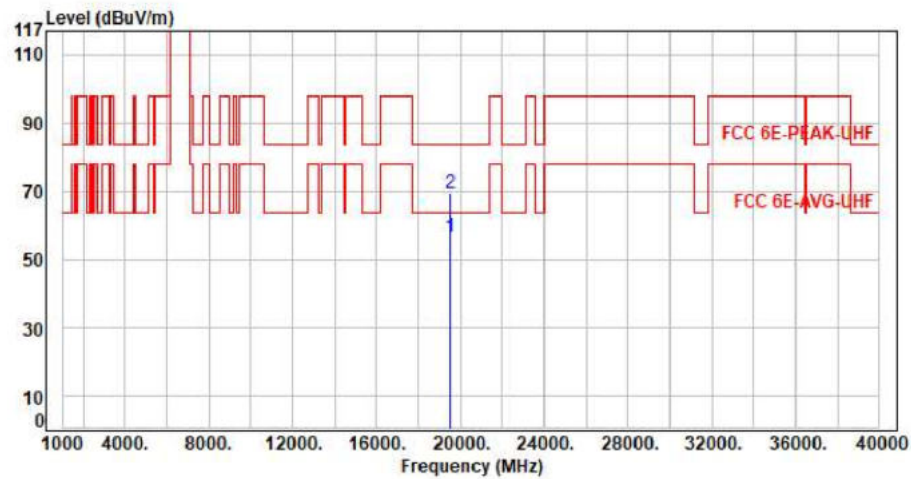


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19545.00	12.19	44.44	56.63	63.54	-6.91	Average	150	360	P
2	19545.00	12.19	57.33	69.52	83.54	-14.02	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

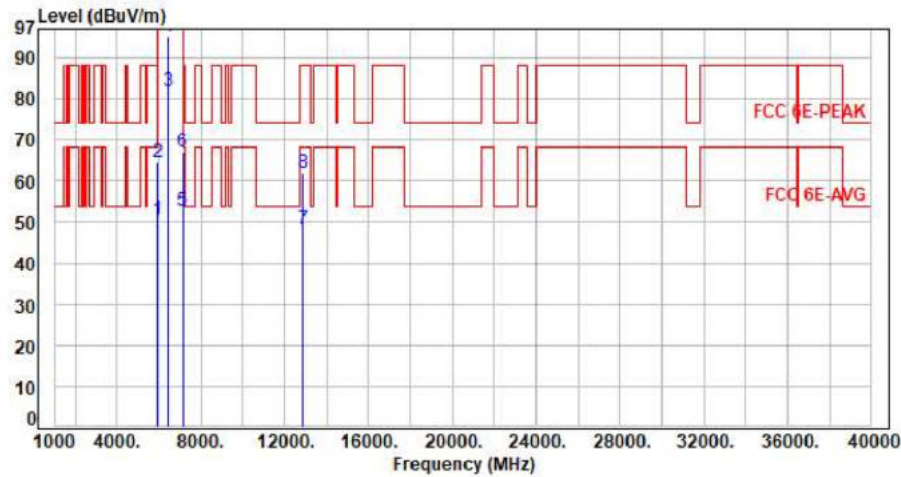


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.76	50.42	68.20	-17.78	Average	322	18	P
2	5925.00	7.66	56.91	64.57	88.20	-23.63	Peak	322	18	P
3	6445.00	8.31	73.39	81.70	200.00	-118.30	Average	322	18	P
4	6445.00	8.31	86.83	95.14	200.00	-104.86	Peak	322	18	P
5	7125.00	10.05	42.67	52.72	68.20	-15.48	Average	322	18	P
6	7125.00	10.05	57.00	67.05	88.20	-21.15	Peak	322	18	P
7	12890.00	19.05	29.17	48.22	68.20	-19.98	Average	100	229	P
8	12890.00	19.05	42.89	61.94	88.20	-26.26	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

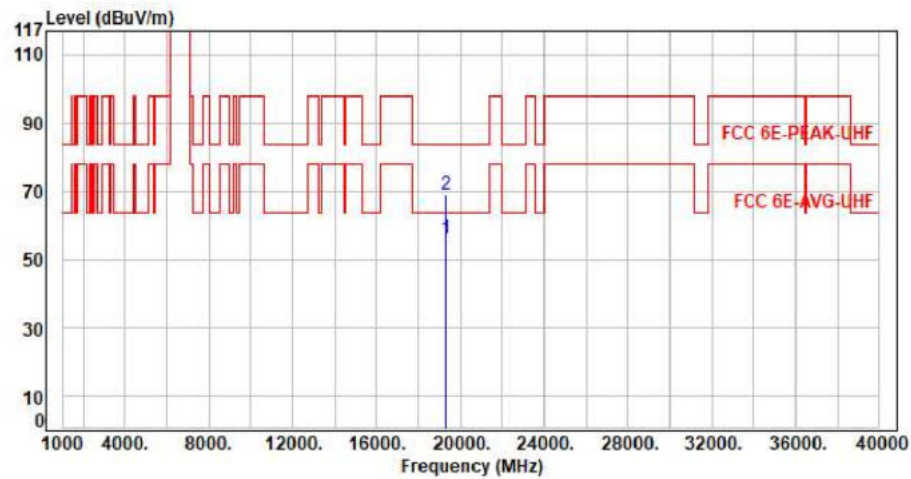


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.48	56.10	63.54	-7.44	Average	150	360	P
2	19335.00	11.62	57.36	68.98	83.54	-14.56	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

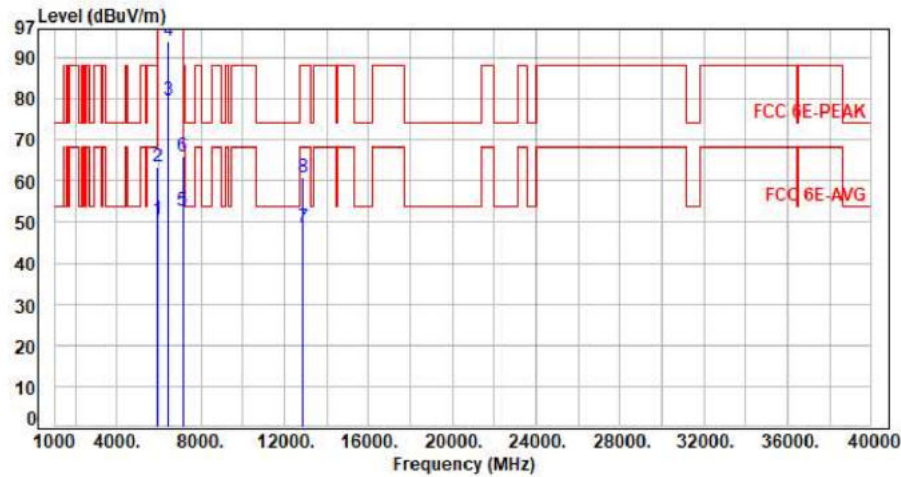

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.87	50.53	68.20	-17.67	Average	400	94	P
2	5925.00	7.66	55.90	63.56	88.20	-24.64	Peak	400	94	P
3	6445.00	8.31	71.25	79.56	200.00	-120.44	Average	400	94	P
4	6445.00	8.31	85.57	93.88	200.00	-106.12	Peak	400	94	P
5	7125.00	10.05	42.71	52.76	68.20	-15.44	Average	400	94	P
6	7125.00	10.05	56.03	66.08	88.20	-22.12	Peak	400	94	P
7	12890.00	19.05	29.66	48.71	68.20	-19.49	Average	100	165	P
8	12890.00	19.05	41.90	60.95	88.20	-27.25	Peak	100	165	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor