




For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH99 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

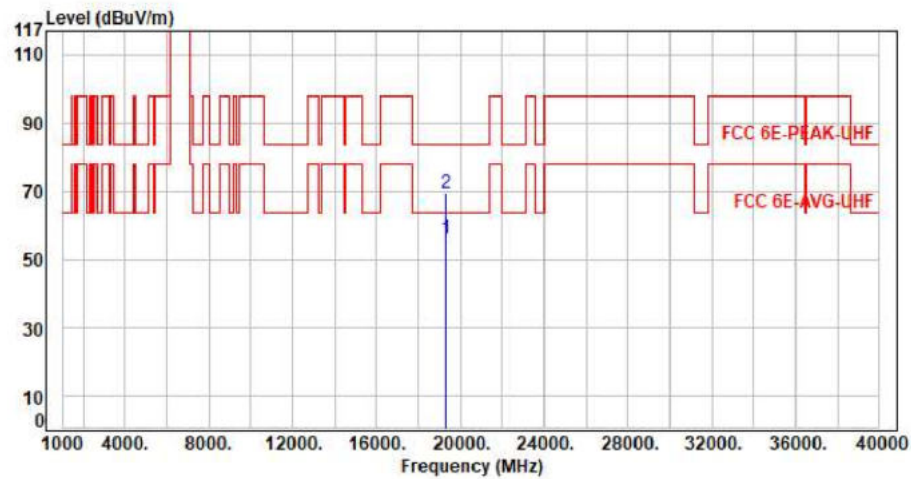


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19335.00	11.62	44.43	56.05	63.54	-7.49	Average	150	360	P
2	19335.00	11.62	57.72	69.34	83.54	-14.20	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

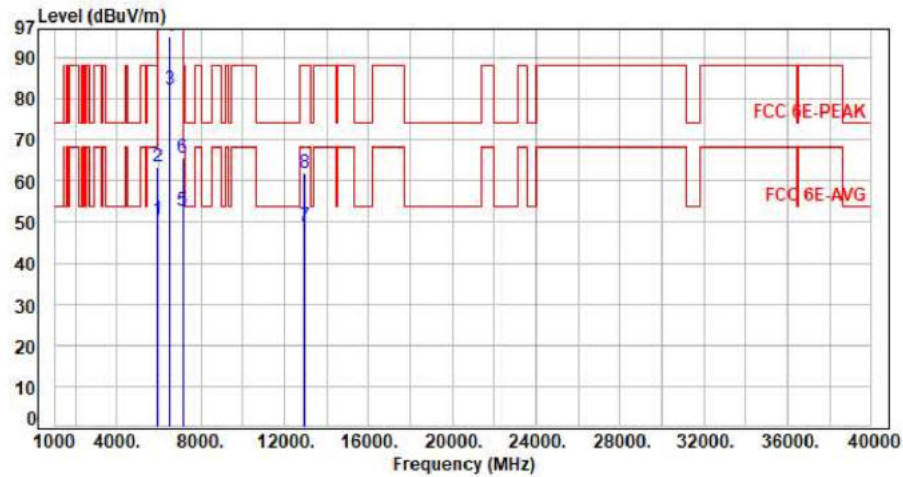


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.74	50.40	68.20	-17.80	Average	306	17	P
2	5925.00	7.66	55.82	63.48	88.20	-24.72	Peak	306	17	P
3	6485.00	8.34	73.78	82.12	200.00	-117.88	Average	306	17	P
4	6485.00	8.34	86.86	95.20	200.00	-104.80	Peak	306	17	P
5	7125.00	10.05	42.62	52.67	68.20	-15.53	Average	306	17	P
6	7125.00	10.05	55.52	65.57	88.20	-22.63	Peak	306	17	P
7	12970.00	19.47	29.41	48.88	68.20	-19.32	Average	100	192	P
8	12970.00	19.47	42.65	62.12	88.20	-26.08	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

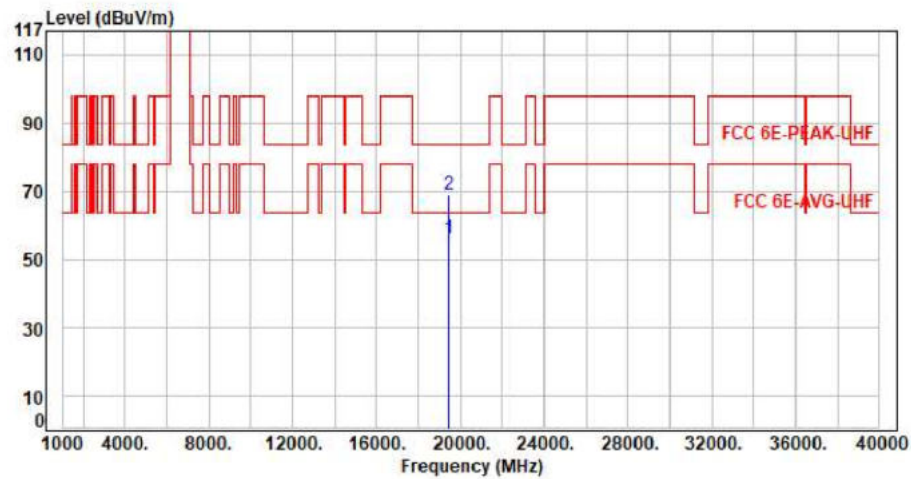


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.38	55.95	63.54	-7.59	Average	150	360	P
2	19455.00	11.57	57.55	69.12	83.54	-14.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

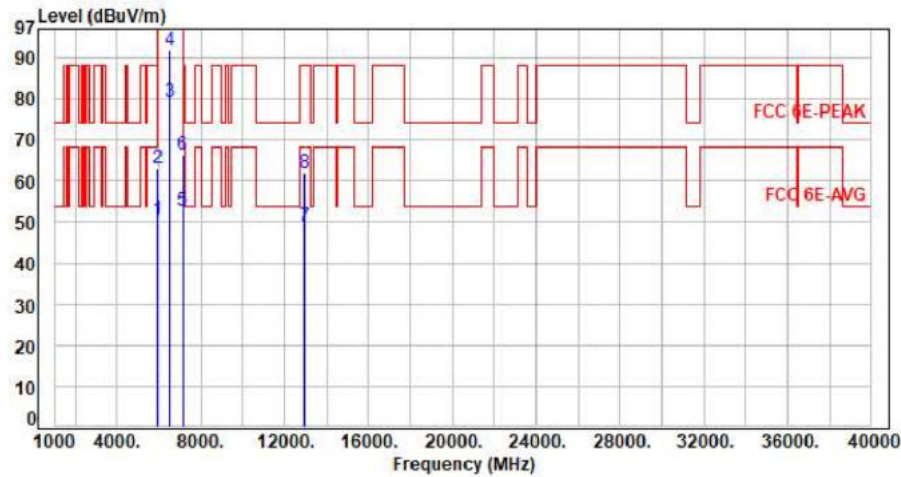


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.84	50.50	68.20	-17.70	Average	387	94	P
2	5925.00	7.66	55.45	63.11	88.20	-25.09	Peak	387	94	P
3	6485.00	8.34	70.89	79.23	200.00	-120.77	Average	387	94	P
4	6485.00	8.34	83.66	92.00	200.00	-108.00	Peak	387	94	P
5	7125.00	10.05	42.72	52.77	68.20	-15.43	Average	387	94	P
6	7125.00	10.05	56.18	66.23	88.20	-21.97	Peak	387	94	P
7	12970.00	19.47	29.76	49.23	68.20	-18.97	Average	100	225	P
8	12970.00	19.47	42.31	61.78	88.20	-26.42	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH107 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

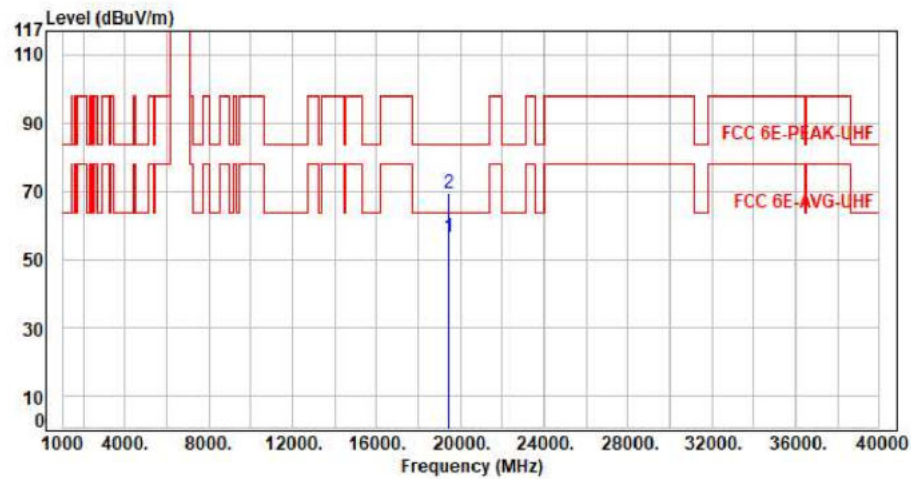


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19455.00	11.57	44.97	56.54	63.54	-7.00	Average	150	360	P
2	19455.00	11.57	57.83	69.40	83.54	-14.14	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

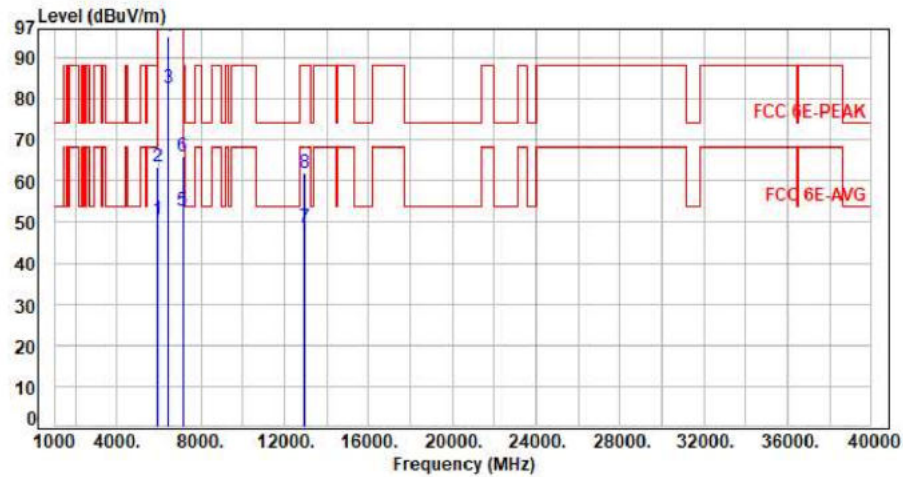

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	306	18	P
2	5925.00	7.66	55.86	63.52	88.20	-24.68	Peak	306	18	P
3	6465.00	8.32	74.23	82.55	200.00	-117.45	Average	306	18	P
4	6465.00	8.32	86.95	95.27	200.00	-104.73	Peak	306	18	P
5	7125.00	10.05	42.73	52.78	68.20	-15.42	Average	306	18	P
6	7125.00	10.05	56.15	66.20	88.20	-22.00	Peak	306	18	P
7	12930.00	19.27	29.50	48.77	68.20	-19.43	Average	100	124	P
8	12930.00	19.27	42.68	61.95	88.20	-26.25	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

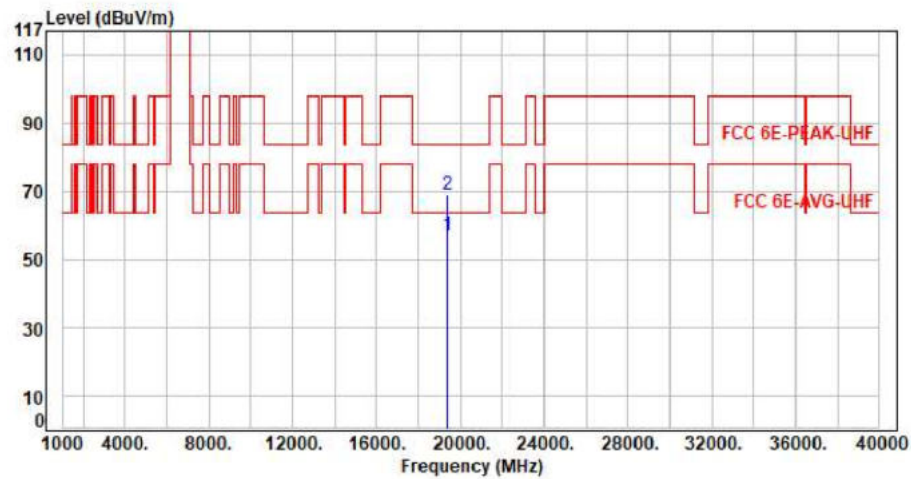


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	44.87	56.78	63.54	-6.76	Average	150	360	P
2	19395.00	11.91	57.18	69.09	83.54	-14.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

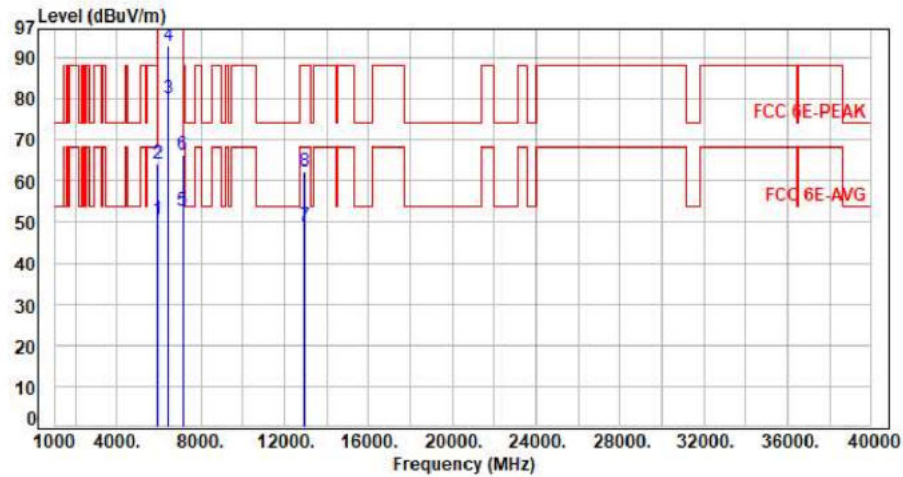

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.86	50.52	68.20	-17.68	Average	400	95	P
2	5925.00	7.66	56.42	64.08	88.20	-24.12	Peak	400	95	P
3	6465.00	8.32	71.89	80.21	200.00	-119.79	Average	400	95	P
4	6465.00	8.32	84.46	92.78	200.00	-107.22	Peak	400	95	P
5	7125.00	10.05	42.80	52.85	68.20	-15.35	Average	400	95	P
6	7125.00	10.05	56.31	66.36	88.20	-21.84	Peak	400	95	P
7	12930.00	19.27	29.66	48.93	68.20	-19.27	Average	100	119	P
8	12930.00	19.27	43.07	62.34	88.20	-25.86	Peak	100	119	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH103 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

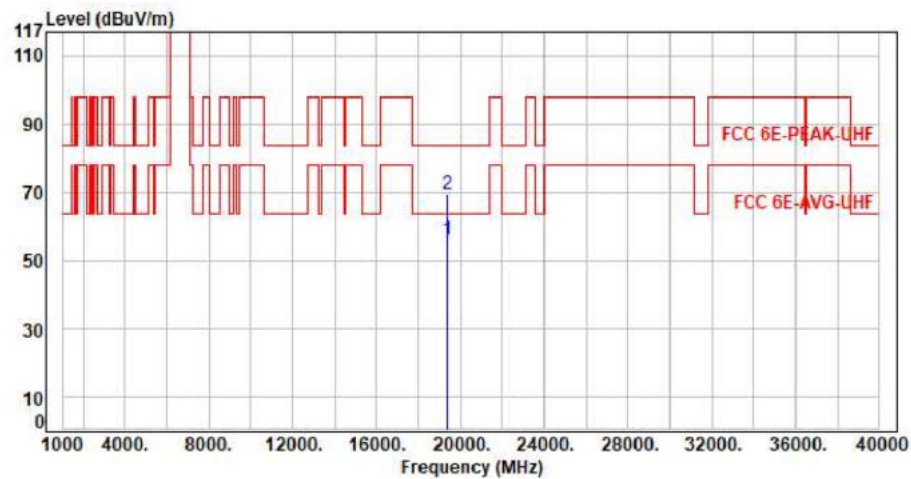


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19395.00	11.91	44.22	56.13	63.54	-7.41	Average	150	360	P
2	19395.00	11.91	57.57	69.48	83.54	-14.06	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

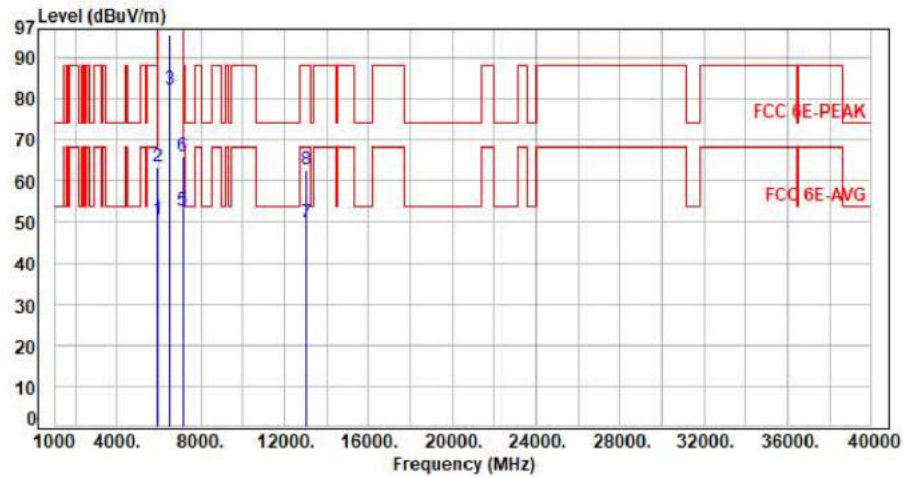

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	315	18	P
2	5925.00	7.66	55.73	63.39	88.20	-24.81	Peak	315	18	P
3	6525.00	8.45	73.92	82.37	200.00	-117.63	Average	315	18	P
4	6525.00	8.45	87.20	95.65	200.00	-104.35	Peak	315	18	P
5	7125.00	10.05	42.74	52.79	68.20	-15.41	Average	315	18	P
6	7125.00	10.05	56.06	66.11	88.20	-22.09	Peak	315	18	P
7	13050.00	20.02	29.84	49.86	68.20	-18.34	Average	100	191	P
8	13050.00	20.02	42.81	62.83	88.20	-25.37	Peak	100	191	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

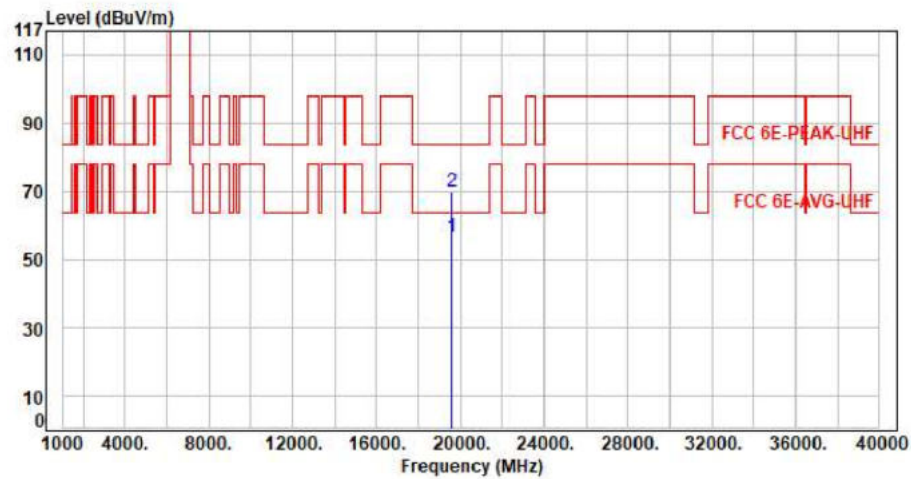


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	44.69	56.71	63.54	-6.83	Average	150	360	P
2	19575.00	12.02	57.88	69.90	83.54	-13.64	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

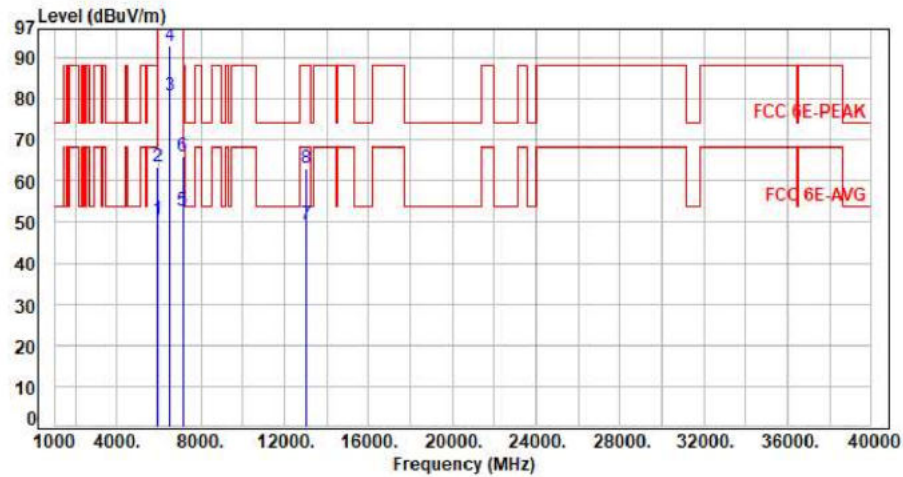

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	400	93	P
2	5925.00	7.66	55.63	63.29	88.20	-24.91	Peak	400	93	P
3	6525.00	8.45	72.16	80.61	200.00	-119.39	Average	400	93	P
4	6525.00	8.45	84.47	92.92	200.00	-107.08	Peak	400	93	P
5	7125.00	10.05	42.71	52.76	68.20	-15.44	Average	400	93	P
6	7125.00	10.05	56.04	66.09	88.20	-22.11	Peak	400	93	P
7	13050.00	20.02	29.58	49.60	68.20	-18.60	Average	100	155	P
8	13050.00	20.02	42.91	62.93	88.20	-25.27	Peak	100	155	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH115 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

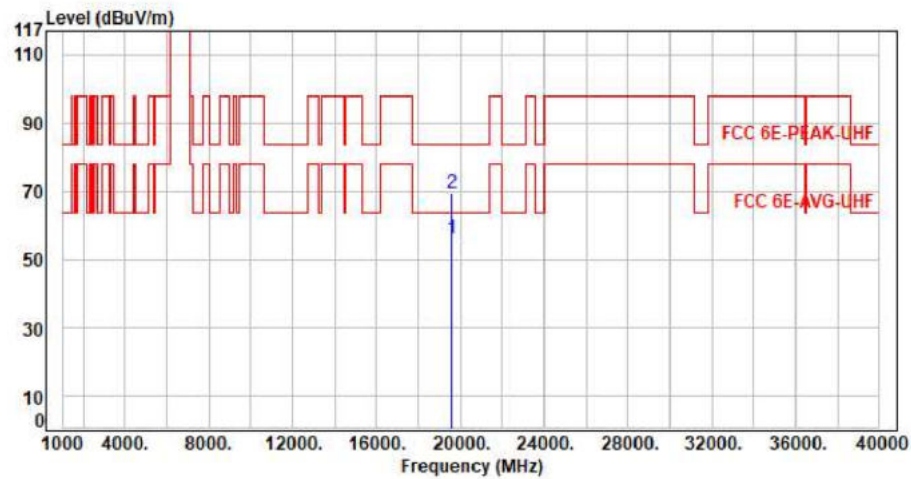


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19575.00	12.02	44.22	56.24	63.54	-7.30	Average	150	360	P
2	19575.00	12.02	57.42	69.44	83.54	-14.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

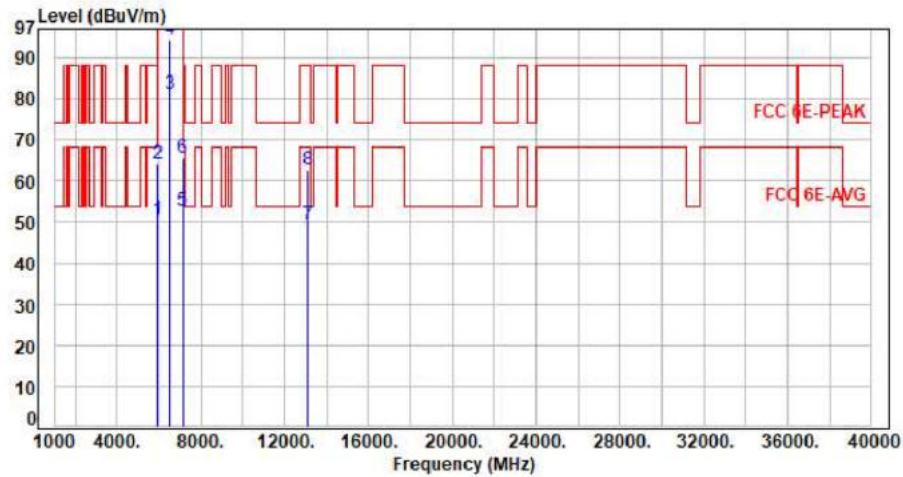


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.88	50.54	68.20	-17.66	Average	100	32	P
2	5925.00	7.66	56.35	64.01	88.20	-24.19	Peak	100	32	P
3	6545.00	8.55	72.77	81.32	200.00	-118.68	Average	100	32	P
4	6545.00	8.55	85.87	94.42	200.00	-105.58	Peak	100	32	P
5	7125.00	10.05	42.66	52.71	68.20	-15.49	Average	100	32	P
6	7125.00	10.05	55.78	65.83	88.20	-22.37	Peak	100	32	P
7	13090.00	20.20	29.18	49.38	68.20	-18.82	Average	100	119	P
8	13090.00	20.20	42.61	62.81	88.20	-25.39	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

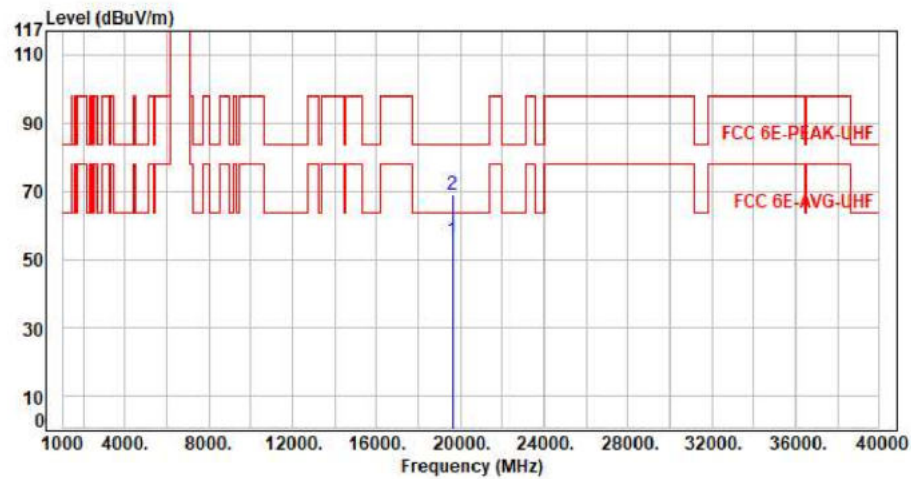


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.22	55.80	63.54	-7.74	Average	150	360	P
2	19635.00	11.58	57.19	68.77	83.54	-14.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

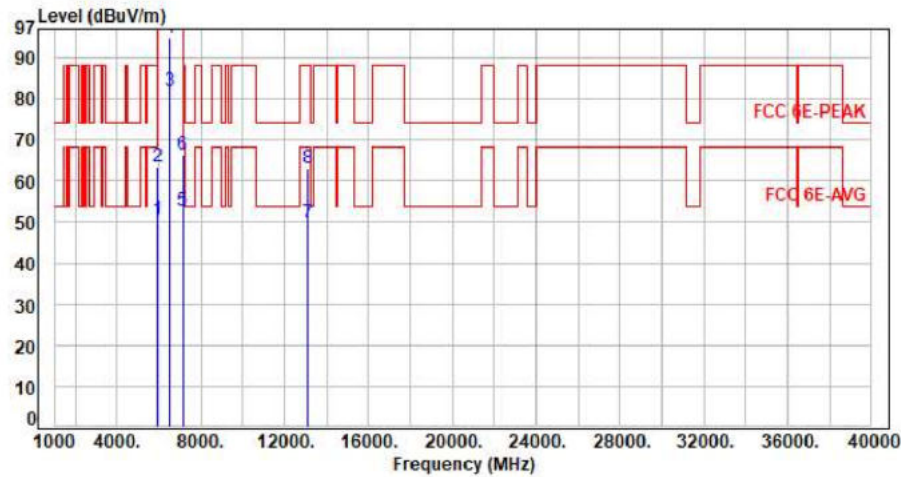

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	397	93	P
2	5925.00	7.66	55.86	63.52	88.20	-24.68	Peak	397	93	P
3	6545.00	8.55	73.34	81.89	200.00	-118.11	Average	397	93	P
4	6545.00	8.55	86.41	94.96	200.00	-105.04	Peak	397	93	P
5	7125.00	10.05	42.85	52.90	68.20	-15.30	Average	397	93	P
6	7125.00	10.05	56.34	66.39	88.20	-21.81	Peak	397	93	P
7	13090.00	20.20	29.77	49.97	68.20	-18.23	Average	100	225	P
8	13090.00	20.20	42.91	63.11	88.20	-25.09	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

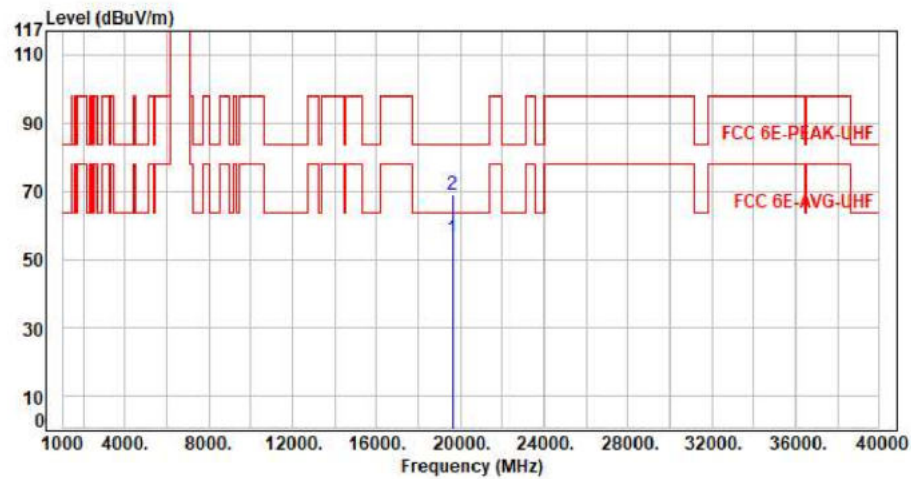


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	44.40	55.98	63.54	-7.56	Average	150	360	P
2	19635.00	11.58	57.19	68.77	83.54	-14.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

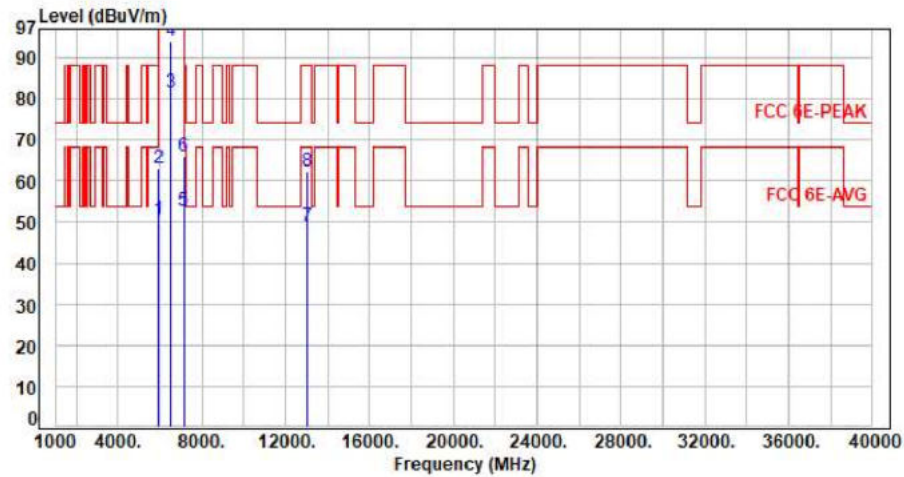

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.86	50.52	68.20	-17.68	Average	329	17	P
2	5925.00	7.66	55.42	63.08	88.20	-25.12	Peak	329	17	P
3	6505.00	8.37	73.23	81.60	200.00	-118.40	Average	329	17	P
4	6505.00	8.37	85.63	94.00	200.00	-106.00	Peak	329	17	P
5	7125.00	10.05	42.65	52.70	68.20	-15.50	Average	329	17	P
6	7125.00	10.05	55.84	65.89	88.20	-22.31	Peak	329	17	P
7	13010.00	19.69	29.47	49.16	68.20	-19.04	Average	100	165	P
8	13010.00	19.69	42.60	62.29	88.20	-25.91	Peak	100	165	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

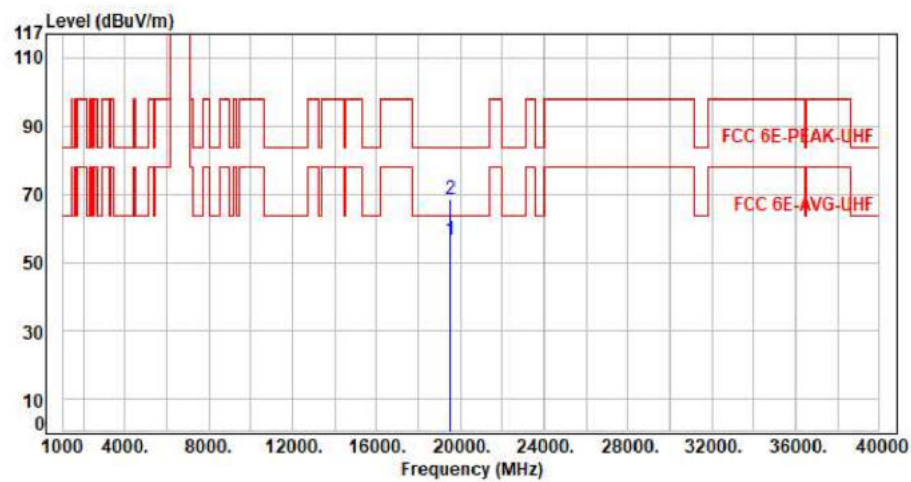

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	44.48	56.39	63.54	-7.15	Average	150	360	P
2	19515.00	11.91	56.71	68.62	83.54	-14.92	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

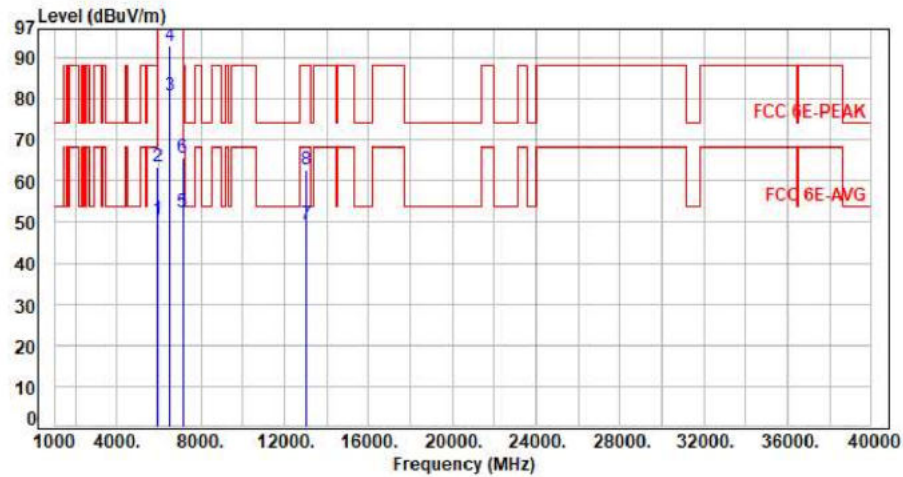


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.80	50.46	68.20	-17.74	Average	400	83	P
2	5925.00	7.66	55.62	63.28	88.20	-24.92	Peak	400	83	P
3	6505.00	8.37	72.44	80.81	200.00	-119.19	Average	400	83	P
4	6505.00	8.37	84.60	92.97	200.00	-107.03	Peak	400	83	P
5	7125.00	10.05	42.14	52.19	68.20	-16.01	Average	400	83	P
6	7125.00	10.05	55.72	65.77	88.20	-22.43	Peak	400	83	P
7	13010.00	19.69	29.66	49.35	68.20	-18.85	Average	100	119	P
8	13010.00	19.69	42.90	62.59	88.20	-25.61	Peak	100	119	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

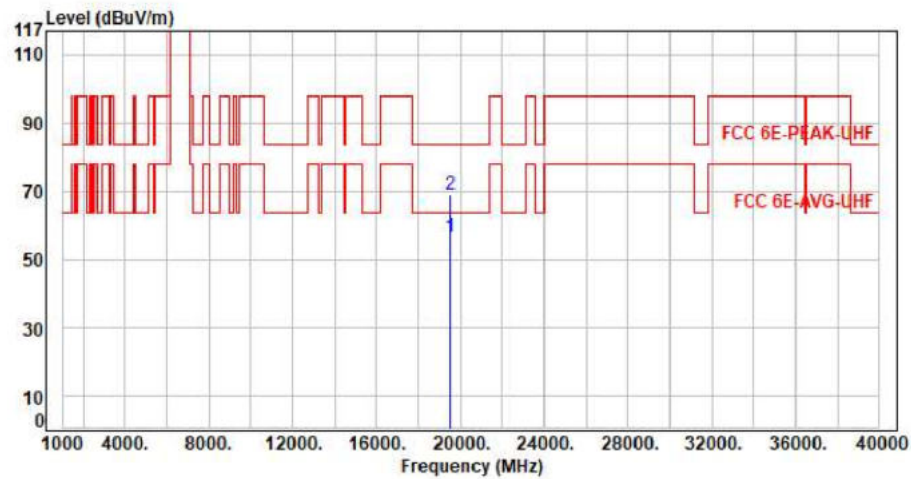


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	44.78	56.69	63.54	-6.85	Average	150	360	P
2	19515.00	11.91	57.12	69.03	83.54	-14.51	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

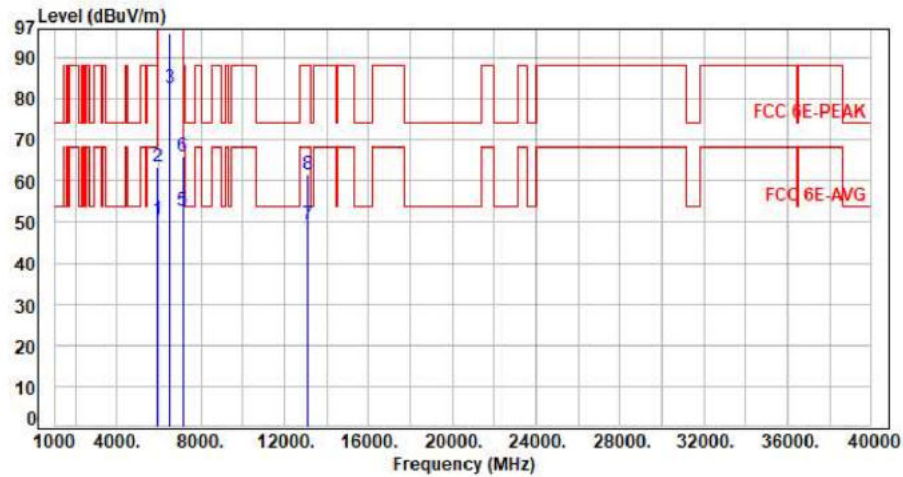


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.80	50.46	68.20	-17.74	Average	301	18	P
2	5925.00	7.66	55.89	63.55	88.20	-24.65	Peak	301	18	P
3	6535.00	8.50	74.14	82.64	200.00	-117.36	Average	301	18	P
4	6535.00	8.50	87.27	95.77	200.00	-104.23	Peak	301	18	P
5	7125.00	10.05	42.72	52.77	68.20	-15.43	Average	301	18	P
6	7125.00	10.05	56.07	66.12	88.20	-22.08	Peak	301	18	P
7	13070.00	20.11	29.41	49.52	68.20	-18.68	Average	100	138	P
8	13070.00	20.11	41.58	61.69	88.20	-26.51	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

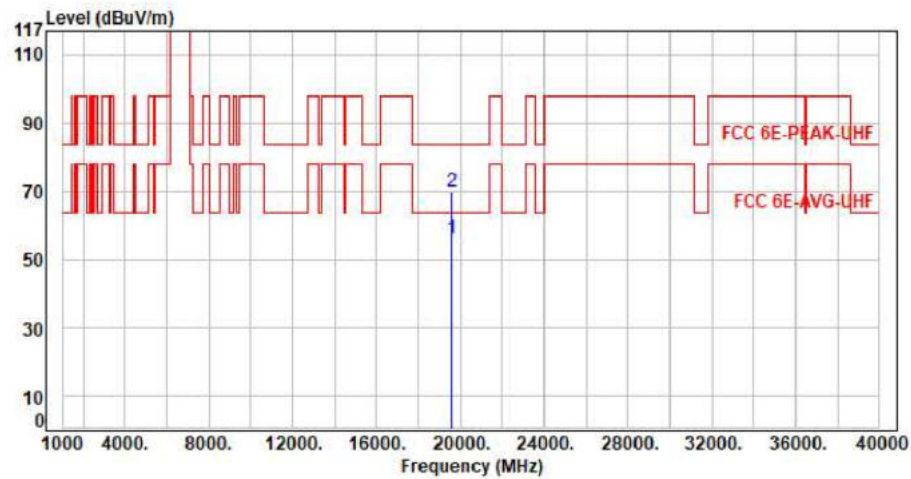


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.25	56.03	63.54	-7.51	Average	150	360	P
2	19605.00	11.78	57.95	69.73	83.54	-13.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

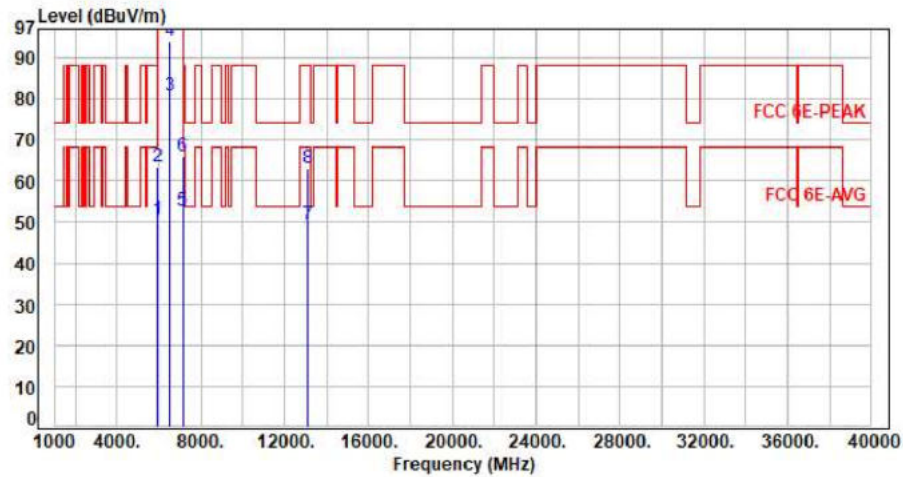


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	399	94	P
2	5925.00	7.66	55.84	63.50	88.20	-24.70	Peak	399	94	P
3	6535.00	8.50	72.37	80.87	200.00	-119.13	Average	399	94	P
4	6535.00	8.50	85.47	93.97	200.00	-106.03	Peak	399	94	P
5	7125.00	10.05	42.69	52.74	68.20	-15.46	Average	399	94	P
6	7125.00	10.05	55.93	65.98	88.20	-22.22	Peak	399	94	P
7	13070.00	20.11	29.41	49.52	68.20	-18.68	Average	100	181	P
8	13070.00	20.11	42.85	62.96	88.20	-25.24	Peak	100	181	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

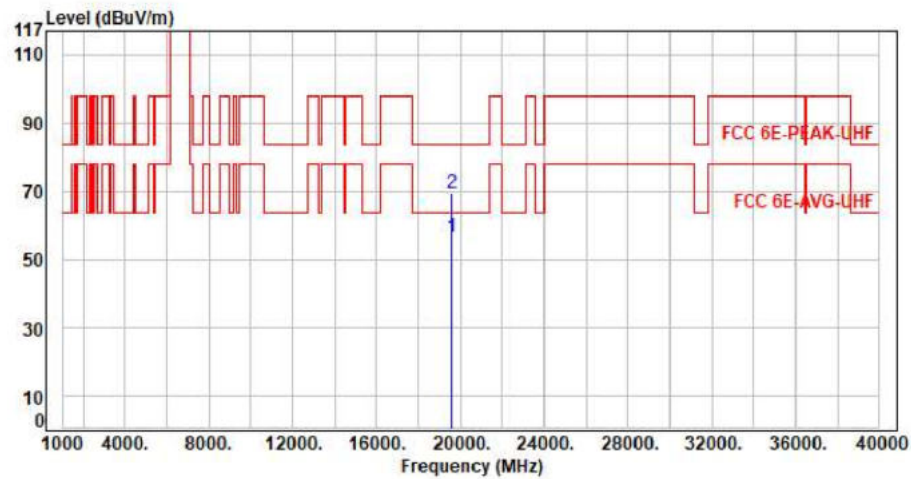


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	44.52	56.30	63.54	-7.24	Average	150	360	P
2	19605.00	11.78	57.59	69.37	83.54	-14.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

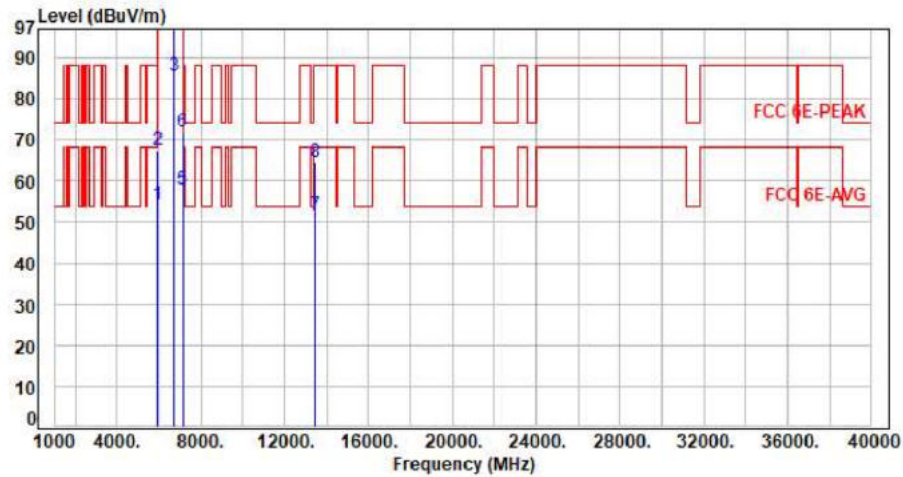

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	46.74	54.40	68.20	-13.80	Average	274	7	P
2	5925.00	7.66	59.79	67.45	88.20	-20.75	Peak	274	7	P
3	6715.00	9.29	76.36	85.65	200.00	-114.35	Average	274	7	P
4	6715.00	9.29	88.63	97.92	200.00	-102.08	Peak	274	7	P
5	7125.00	10.05	47.78	57.83	68.20	-10.37	Average	274	7	P
6	7125.00	10.05	62.03	72.08	88.20	-16.12	Peak	274	7	P
7	13430.00	21.71	29.76	51.47	68.20	-16.73	Average	100	221	P
8	13430.00	21.71	42.81	64.52	88.20	-23.68	Peak	100	221	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

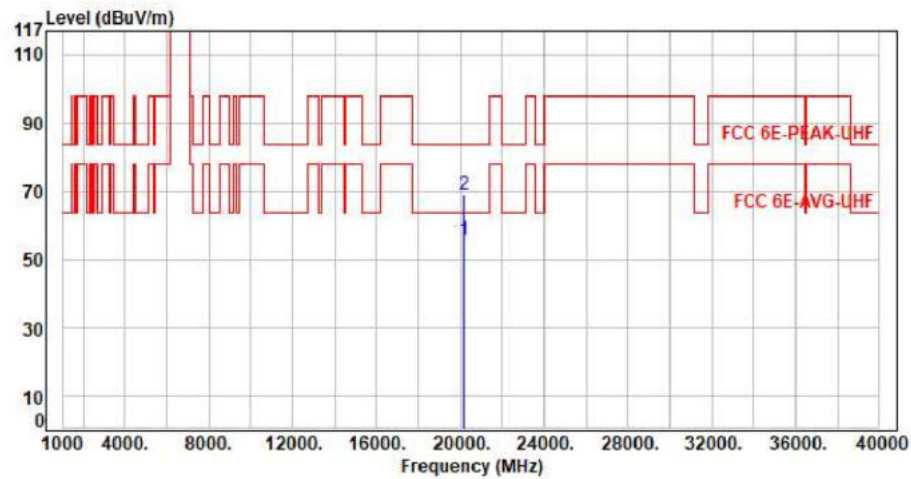


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.14	55.57	63.54	-7.97	Average	150	360	P
2	20145.00	11.43	57.40	68.83	83.54	-14.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

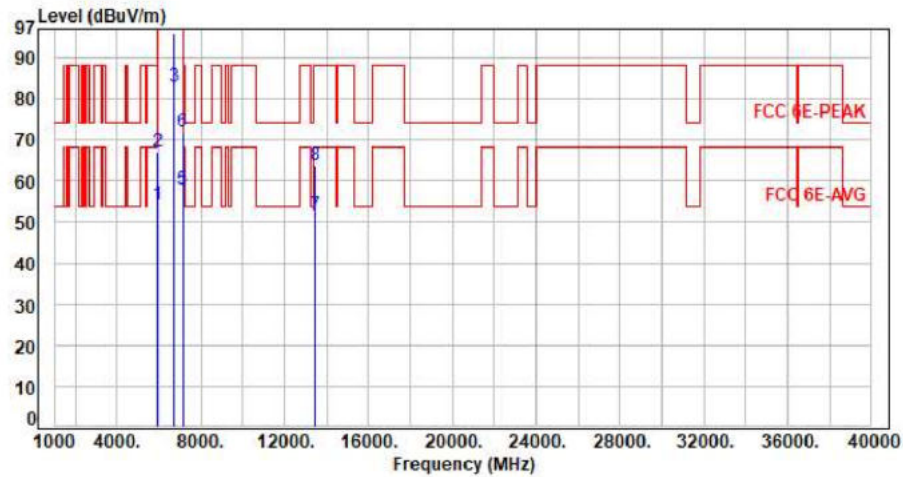

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	46.71	54.37	68.20	-13.83	Average	397	287	P
2	5925.00	7.66	59.56	67.22	88.20	-20.98	Peak	397	287	P
3	6715.00	9.29	73.70	82.99	200.00	-117.01	Average	397	287	P
4	6715.00	9.29	86.46	95.75	200.00	-104.25	Peak	397	287	P
5	7125.00	10.05	47.68	57.73	68.20	-10.47	Average	397	287	P
6	7125.00	10.05	61.97	72.02	88.20	-16.18	Peak	397	287	P
7	13430.00	21.71	29.75	51.46	68.20	-16.74	Average	100	224	P
8	13430.00	21.71	42.18	63.89	88.20	-24.31	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

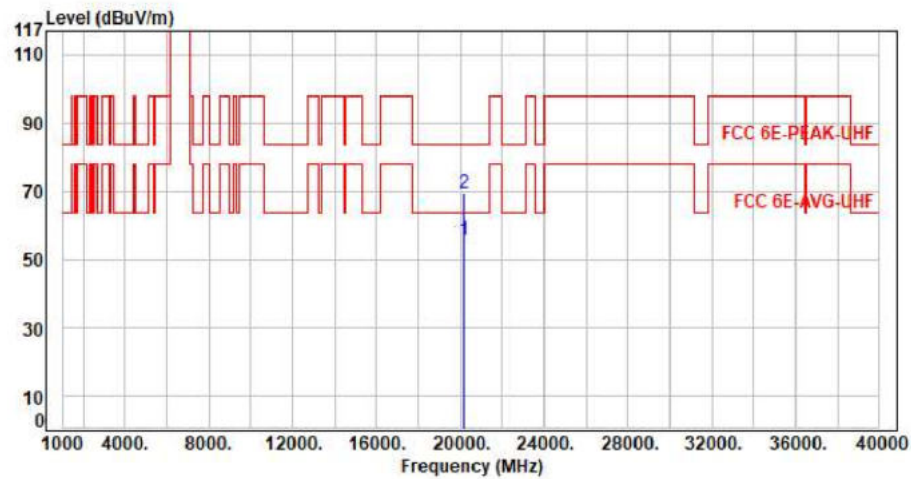


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	44.17	55.60	63.54	-7.94	Average	150	360	P
2	20145.00	11.43	57.81	69.24	83.54	-14.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

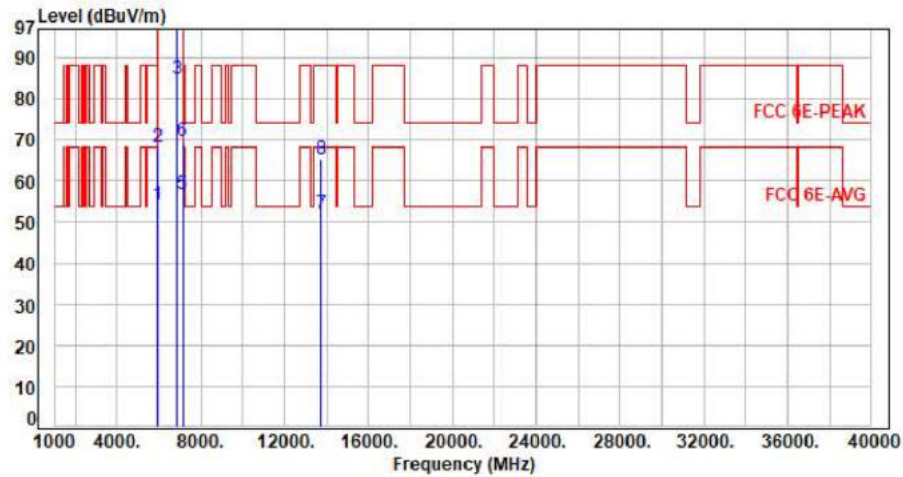


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	46.72	54.38	68.20	-13.82	Average	100	0	P
2	5925.00	7.66	60.47	68.13	88.20	-20.07	Peak	100	0	P
3	6855.00	9.50	75.33	84.83	200.00	-115.17	Average	100	0	P
4	6855.00	9.50	89.00	98.50	200.00	-101.50	Peak	100	0	P
5	7125.00	10.05	46.77	56.82	68.20	-11.38	Average	100	0	P
6	7125.00	10.05	59.71	69.76	88.20	-18.44	Peak	100	0	P
7	13710.00	22.48	29.69	52.17	68.20	-16.03	Average	100	157	P
8	13710.00	22.48	42.92	65.40	88.20	-22.80	Peak	100	157	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

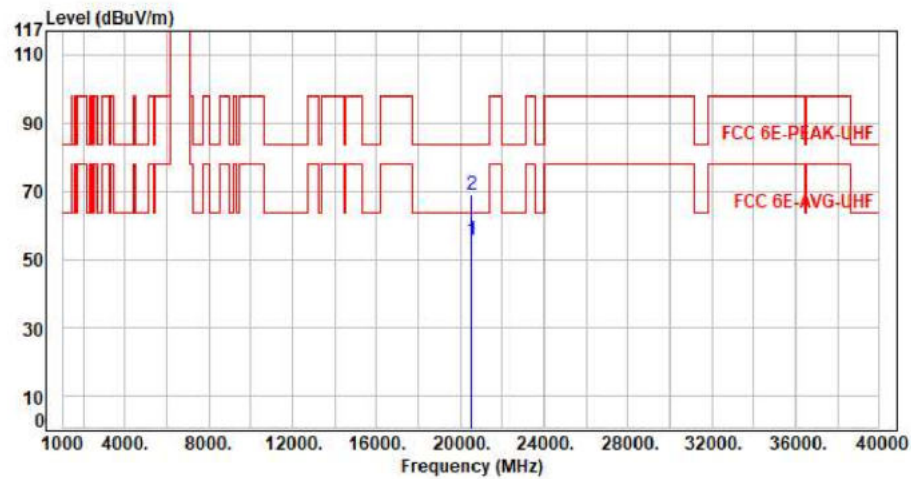

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.28	55.66	63.54	-7.88	Average	150	360	P
2	20565.00	11.38	57.39	68.77	83.54	-14.77	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

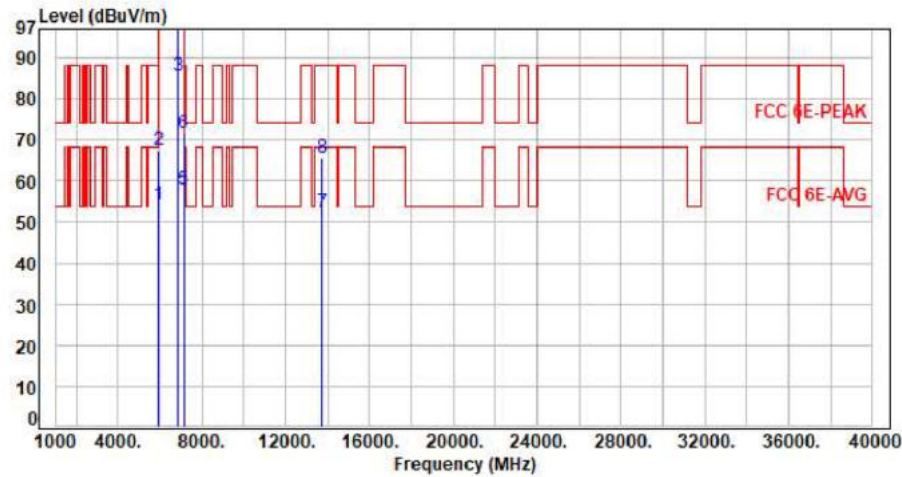

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	46.71	54.37	68.20	-13.83	Average	399	286	P
2	5925.00	7.66	59.87	67.53	88.20	-20.67	Peak	399	286	P
3	6855.00	9.50	75.90	85.40	200.00	-114.60	Average	399	286	P
4	6855.00	9.50	88.37	97.87	200.00	-102.13	Peak	399	286	P
5	7125.00	10.05	47.68	57.73	68.20	-10.47	Average	399	286	P
6	7125.00	10.05	61.35	71.40	88.20	-16.80	Peak	399	286	P
7	13710.00	22.48	29.77	52.25	68.20	-15.95	Average	110	148	P
8	13710.00	22.48	43.09	65.57	88.20	-22.63	Peak	110	148	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

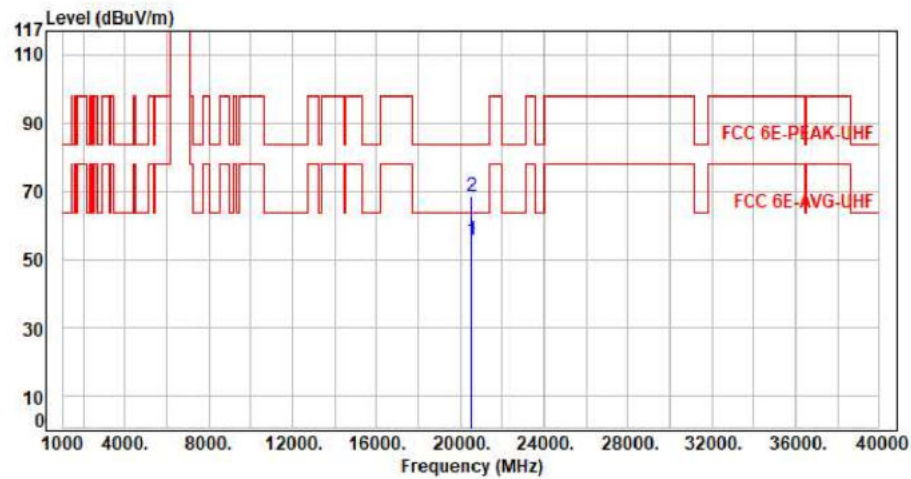


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	44.39	55.77	63.54	-7.77	Average	150	360	P
2	20565.00	11.38	57.31	68.69	83.54	-14.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

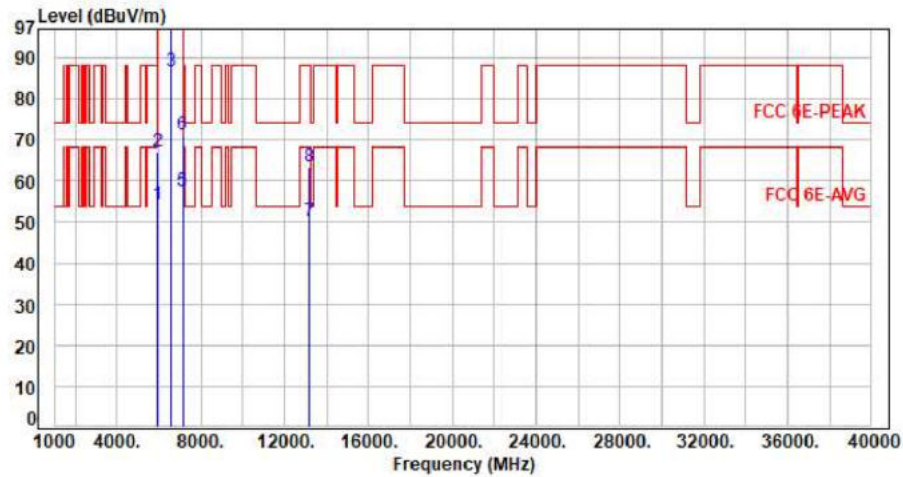

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	46.67	54.33	68.20	-13.87	Average	312	18	P
2	5925.00	7.66	59.58	67.24	88.20	-20.96	Peak	312	18	P
3	6565.00	8.67	78.16	86.83	200.00	-113.17	Average	312	18	P
4	6565.00	8.67	91.34	100.01	200.00	-99.99	Peak	312	18	P
5	7125.00	10.05	47.65	57.70	68.20	-10.50	Average	312	18	P
6	7125.00	10.05	61.27	71.32	88.20	-16.88	Peak	312	18	P
7	13130.00	20.32	29.76	50.08	68.20	-18.12	Average	100	186	P
8	13130.00	20.32	43.08	63.40	88.20	-24.80	Peak	100	186	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

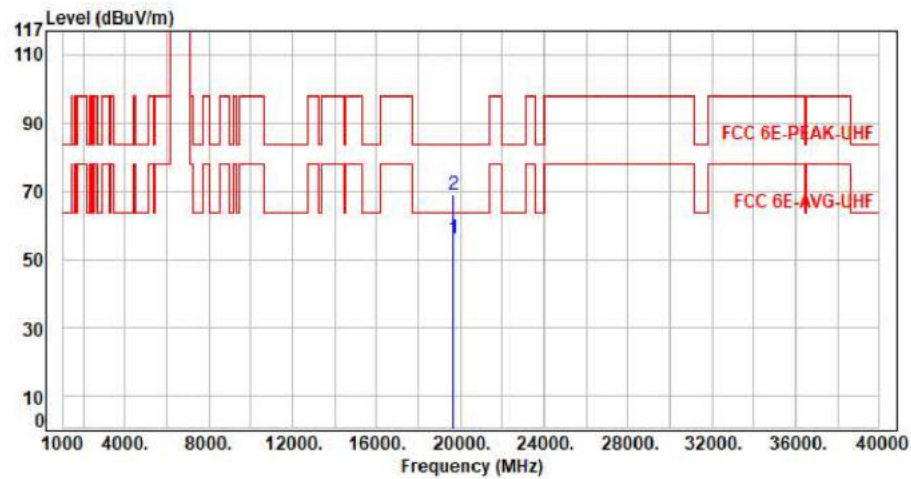


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.55	56.00	63.54	-7.54	Average	150	360	P
2	19695.00	11.45	57.54	68.99	83.54	-14.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

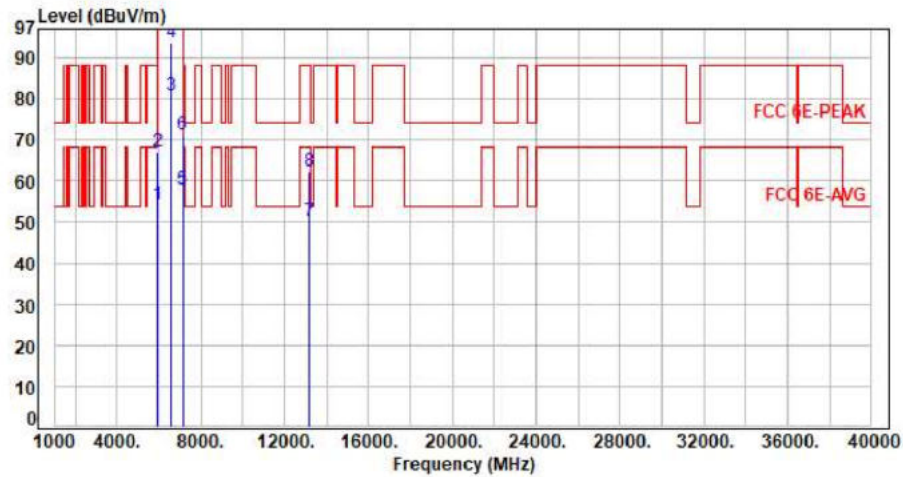


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	46.70	54.36	68.20	-13.84	Average	400	30	P
2	5925.00	7.66	59.62	67.28	88.20	-20.92	Peak	400	30	P
3	6565.00	8.67	71.93	80.60	200.00	-119.40	Average	400	30	P
4	6565.00	8.67	84.92	93.59	200.00	-106.41	Peak	400	30	P
5	7125.00	10.05	47.69	57.74	68.20	-10.46	Average	400	30	P
6	7125.00	10.05	60.98	71.03	88.20	-17.17	Peak	400	30	P
7	13130.00	20.32	29.76	50.08	68.20	-18.12	Average	100	155	P
8	13130.00	20.32	41.86	62.18	88.20	-26.02	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

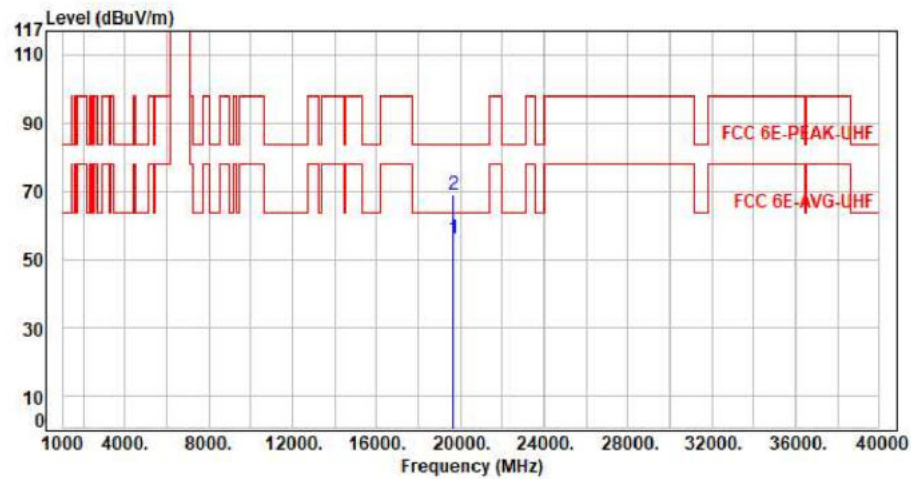


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	44.42	55.87	63.54	-7.67	Average	150	360	P
2	19695.00	11.45	57.71	69.16	83.54	-14.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

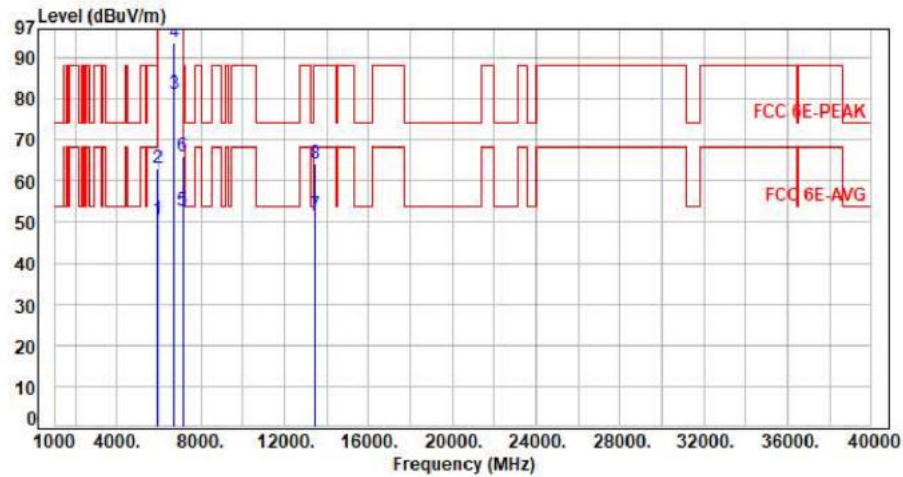

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	274	8	P
2	5925.00	7.66	55.48	63.14	88.20	-25.06	Peak	274	8	P
3	6725.00	9.33	71.86	81.19	200.00	-118.81	Average	274	8	P
4	6725.00	9.33	84.22	93.55	200.00	-106.45	Peak	274	8	P
5	7125.00	10.05	42.65	52.70	68.20	-15.50	Average	274	8	P
6	7125.00	10.05	55.82	65.87	88.20	-22.33	Peak	274	8	P
7	13450.00	21.80	29.88	51.68	68.20	-16.52	Average	100	129	P
8	13450.00	21.80	42.31	64.11	88.20	-24.09	Peak	100	129	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

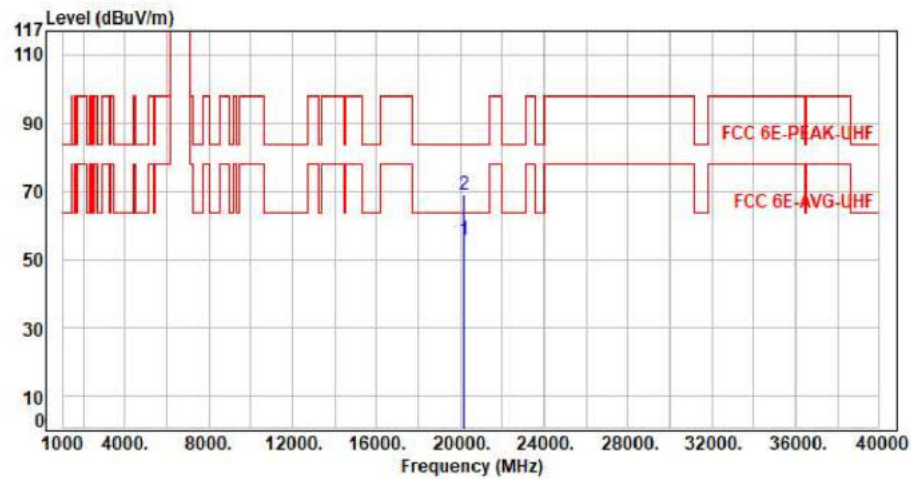


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.33	55.79	63.54	-7.75	Average	150	360	P
2	20175.00	11.46	57.56	69.02	83.54	-14.52	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

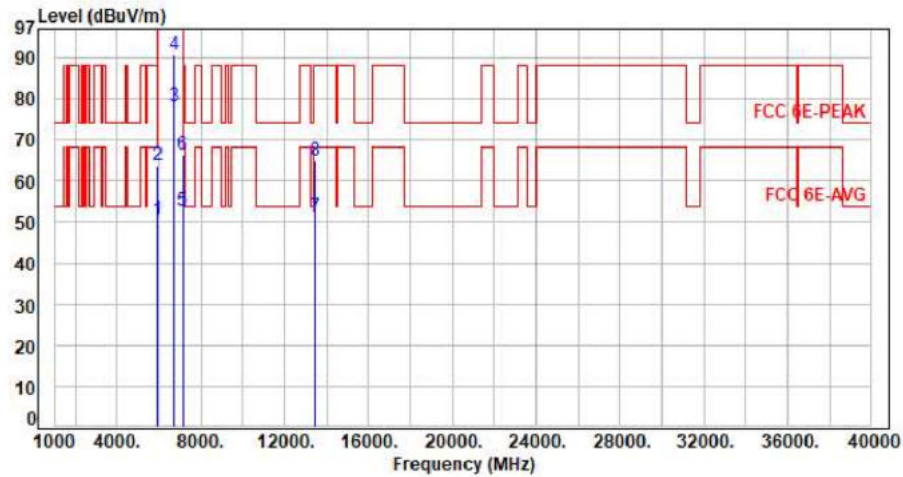


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.77	50.43	68.20	-17.77	Average	398	288	P
2	5925.00	7.66	55.99	63.65	88.20	-24.55	Peak	398	288	P
3	6725.00	9.33	68.97	78.30	200.00	-121.70	Average	398	288	P
4	6725.00	9.33	81.49	90.82	200.00	-109.18	Peak	398	288	P
5	7125.00	10.05	42.66	52.71	68.20	-15.49	Average	398	288	P
6	7125.00	10.05	56.32	66.37	88.20	-21.83	Peak	398	288	P
7	13450.00	21.80	29.44	51.24	68.20	-16.96	Average	100	144	P
8	13450.00	21.80	43.08	64.88	88.20	-23.32	Peak	100	144	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

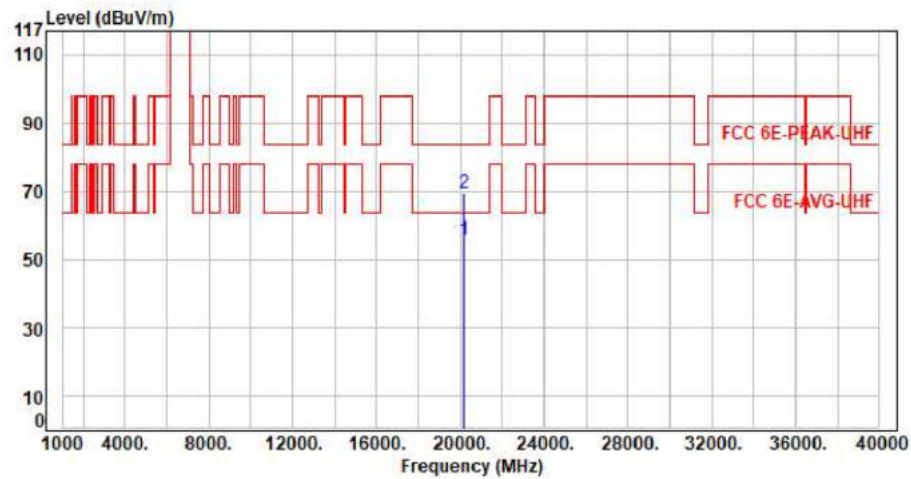


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	44.26	55.72	63.54	-7.82	Average	150	360	P
2	20175.00	11.46	57.86	69.32	83.54	-14.22	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

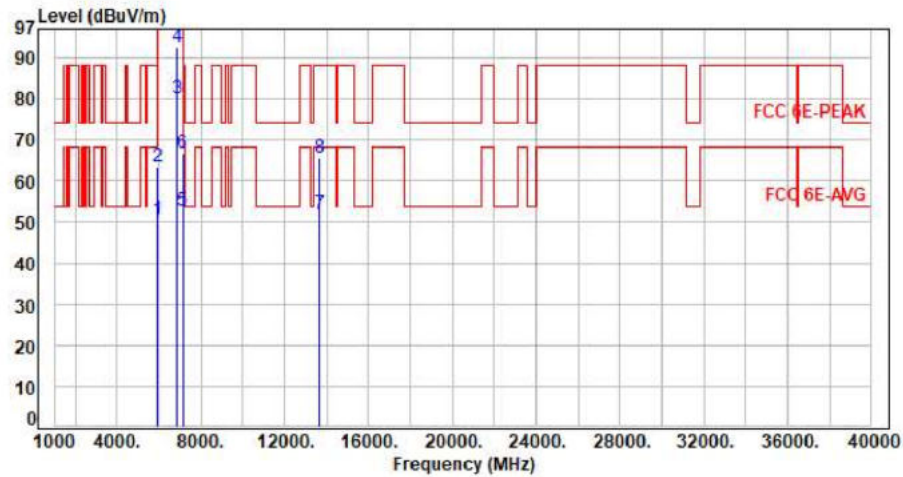


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.76	50.42	68.20	-17.78	Average	100	0	P
2	5925.00	7.66	55.96	63.62	88.20	-24.58	Peak	100	0	P
3	6845.00	9.48	70.61	80.09	200.00	-119.91	Average	100	0	P
4	6845.00	9.48	83.26	92.74	200.00	-107.26	Peak	100	0	P
5	7125.00	10.05	42.69	52.74	68.20	-15.46	Average	100	0	P
6	7125.00	10.05	56.69	66.74	88.20	-21.46	Peak	100	0	P
7	13690.00	22.40	29.77	52.17	68.20	-16.03	Average	100	258	P
8	13690.00	22.40	43.08	65.48	88.20	-22.72	Peak	100	258	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

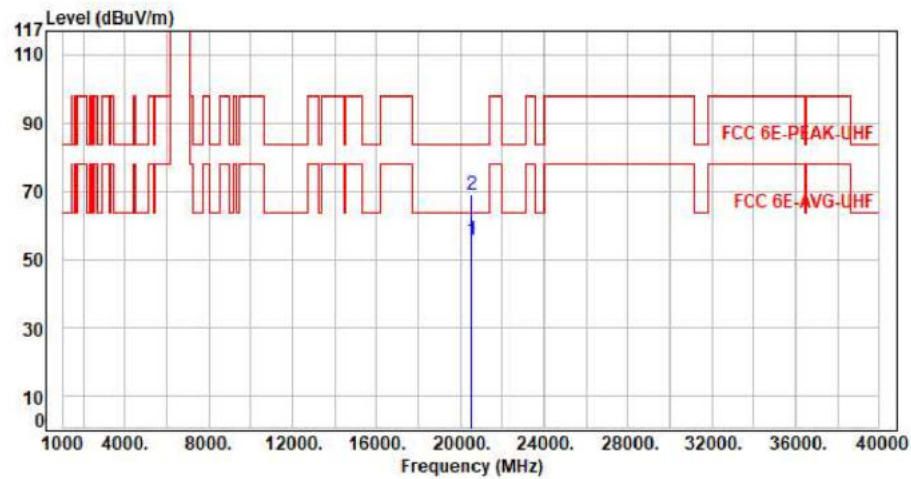


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.19	55.63	63.54	-7.91	Average	150	360	P
2	20535.00	11.44	57.39	68.83	83.54	-14.71	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

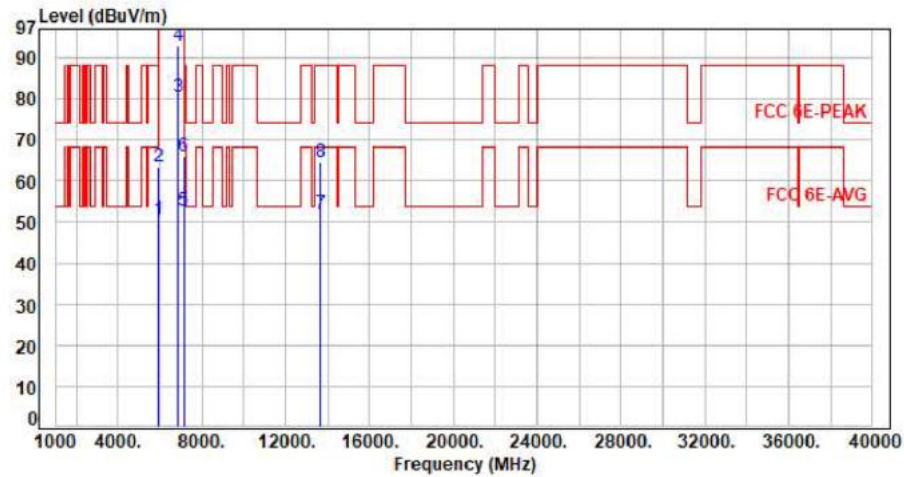

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.83	50.49	68.20	-17.71	Average	400	286	P
2	5925.00	7.66	55.63	63.29	88.20	-24.91	Peak	400	286	P
3	6845.00	9.48	70.97	80.45	200.00	-119.55	Average	400	286	P
4	6845.00	9.48	83.57	93.05	200.00	-106.95	Peak	400	286	P
5	7125.00	10.05	42.64	52.69	68.20	-15.51	Average	400	286	P
6	7125.00	10.05	55.89	65.94	88.20	-22.26	Peak	400	286	P
7	13690.00	22.40	29.75	52.15	68.20	-16.05	Average	100	158	P
8	13690.00	22.40	42.08	64.48	88.20	-23.72	Peak	100	158	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

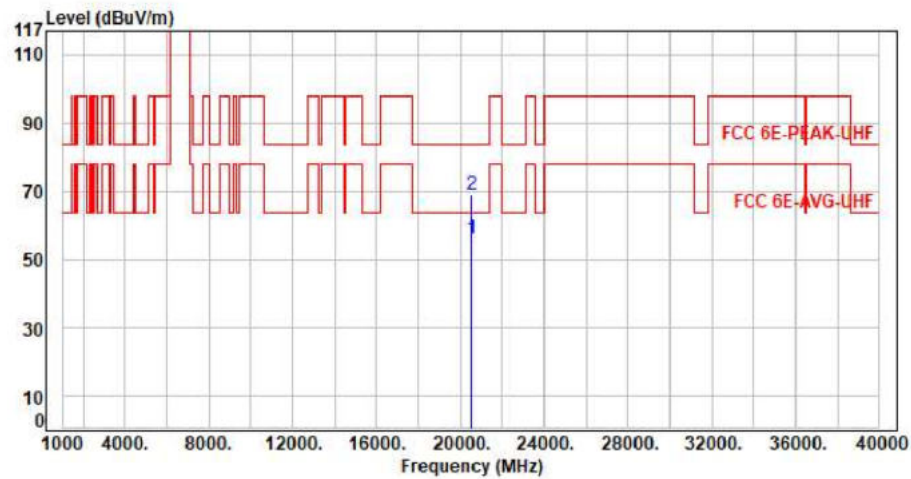


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	44.72	56.16	63.54	-7.38	Average	150	360	P
2	20535.00	11.44	57.53	68.97	83.54	-14.57	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

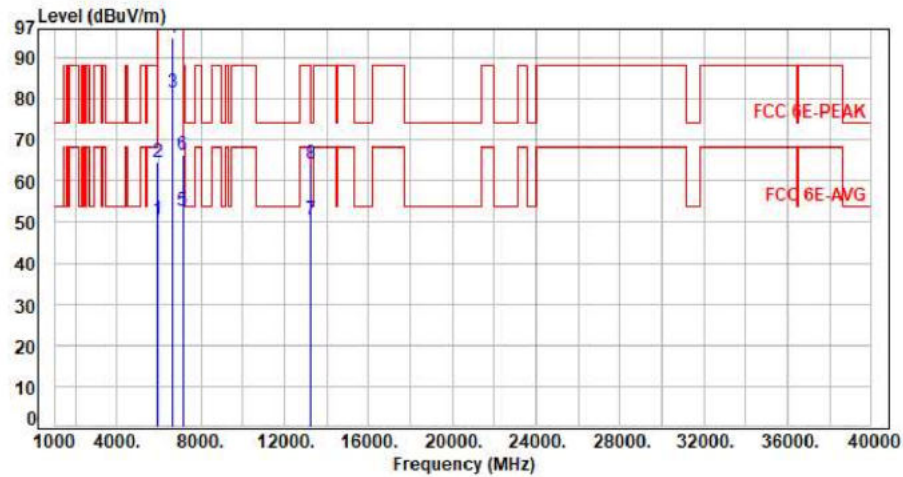


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.83	50.49	68.20	-17.71	Average	100	33	P
2	5925.00	7.66	56.71	64.37	88.20	-23.83	Peak	100	33	P
3	6625.00	8.94	72.65	81.59	200.00	-118.41	Average	100	33	P
4	6625.00	8.94	85.89	94.83	200.00	-105.17	Peak	100	33	P
5	7125.00	10.05	42.74	52.79	68.20	-15.41	Average	100	33	P
6	7125.00	10.05	56.20	66.25	88.20	-21.95	Peak	100	33	P
7	13250.00	21.00	29.67	50.67	54.00	-3.33	Average	100	155	P
8	13250.00	21.00	43.09	64.09	74.00	-9.91	Peak	100	155	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

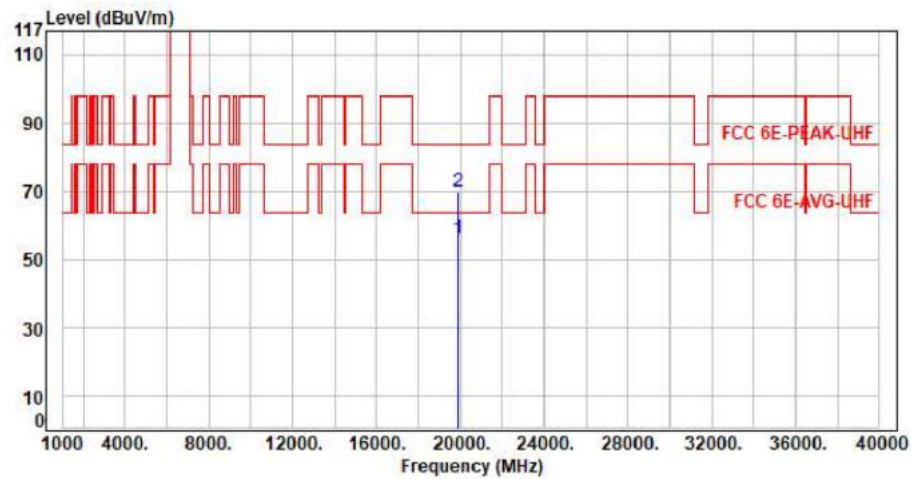


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.12	56.02	63.54	-7.52	Average	150	360	P
2	19875.00	11.90	57.81	69.71	83.54	-13.83	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

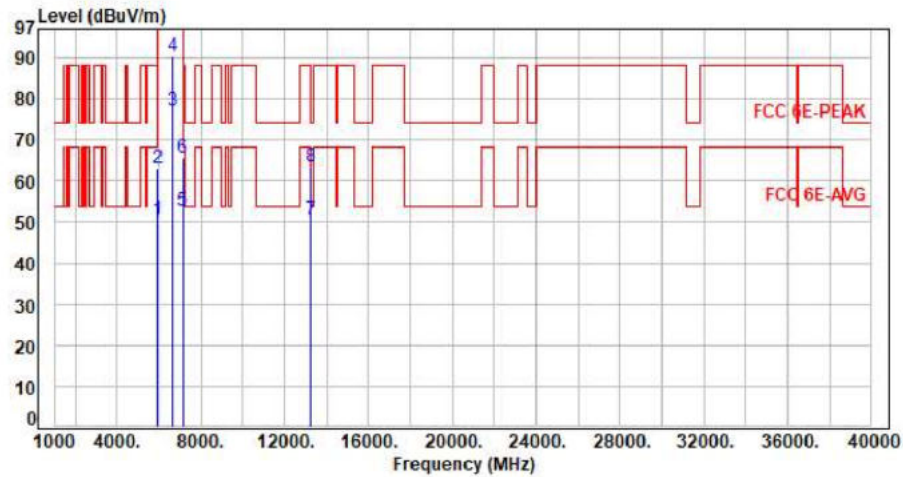

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.75	50.41	68.20	-17.79	Average	393	35	P
2	5925.00	7.66	55.51	63.17	88.20	-25.03	Peak	393	35	P
3	6625.00	8.94	67.97	76.91	200.00	-123.09	Average	393	35	P
4	6625.00	8.94	81.58	90.52	200.00	-109.48	Peak	393	35	P
5	7125.00	10.05	42.67	52.72	68.20	-15.48	Average	393	35	P
6	7125.00	10.05	55.52	65.57	88.20	-22.63	Peak	393	35	P
7	13250.00	21.00	29.65	50.65	54.00	-3.35	Average	100	114	P
8	13250.00	21.00	42.62	63.62	74.00	-10.38	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

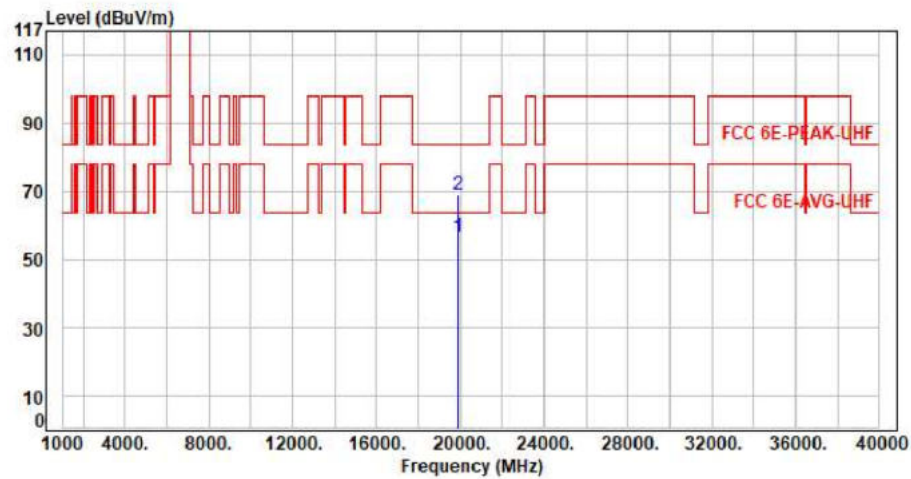

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	44.59	56.49	63.54	-7.05	Average	150	360	P
2	19875.00	11.90	57.24	69.14	83.54	-14.40	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor