




For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

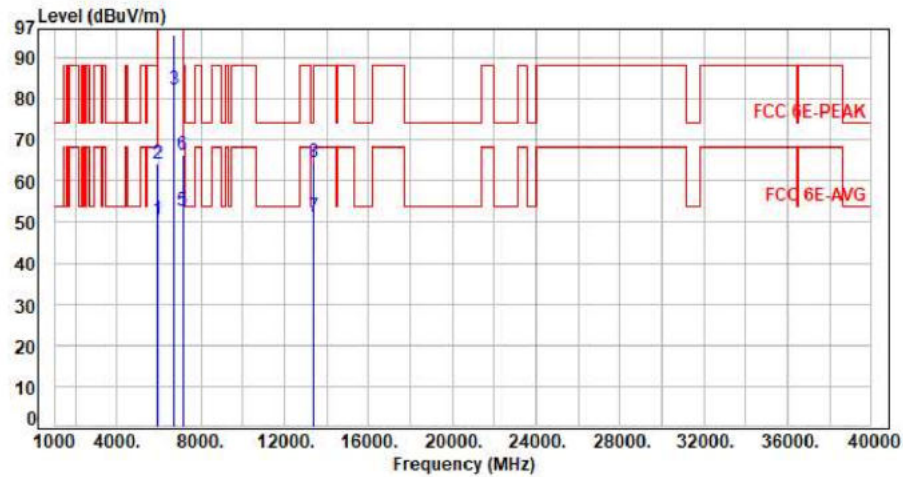

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	100	360	P
2	5925.00	7.66	56.47	64.13	88.20	-24.07	Peak	100	360	P
3	6705.00	9.25	72.91	82.16	200.00	-117.84	Average	100	360	P
4	6705.00	9.25	86.26	95.51	200.00	-104.49	Peak	100	360	P
5	7125.00	10.05	42.69	52.74	68.20	-15.46	Average	100	360	P
6	7125.00	10.05	56.27	66.32	88.20	-21.88	Peak	100	360	P
7	13410.00	21.62	29.76	51.38	68.20	-16.82	Average	100	285	P
8	13410.00	21.62	43.09	64.71	88.20	-23.49	Peak	100	285	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

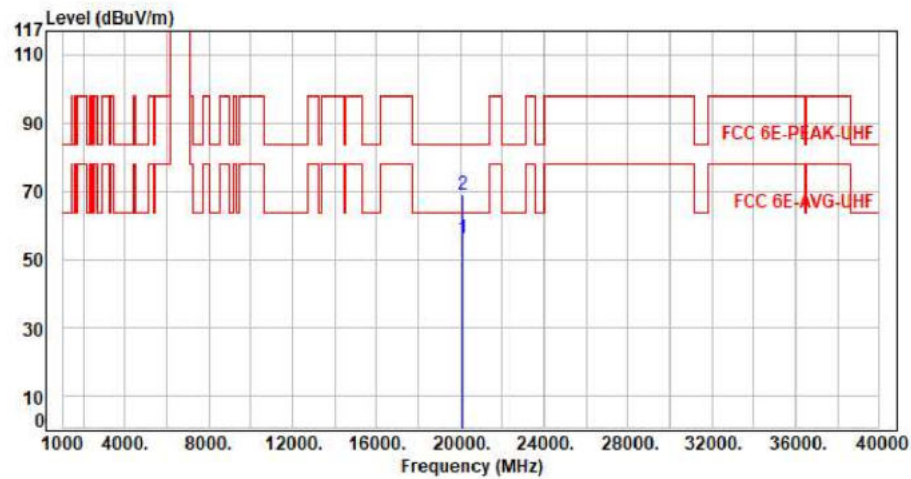


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	44.46	55.86	63.54	-7.68	Average	150	360	P
2	20115.00	11.40	57.36	68.76	83.54	-14.78	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

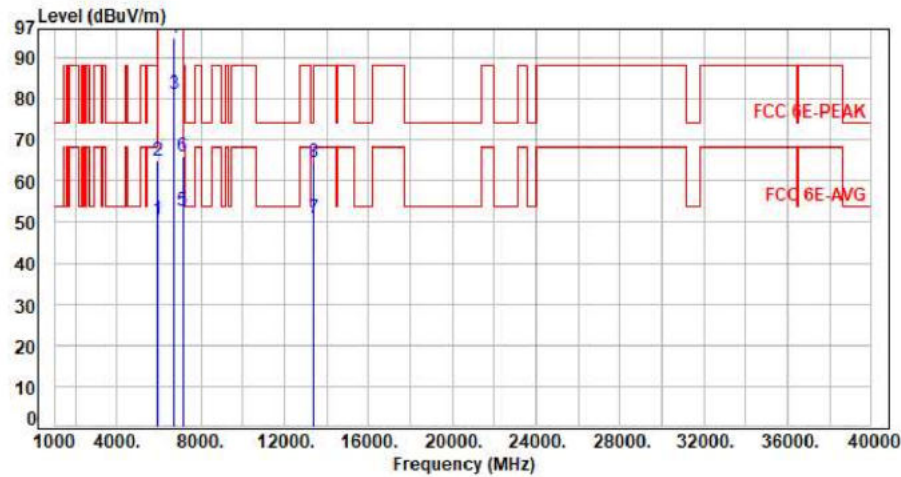

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	400	287	P
2	5925.00	7.66	57.10	64.76	88.20	-23.44	Peak	400	287	P
3	6705.00	9.25	71.88	81.13	200.00	-118.87	Average	400	287	P
4	6705.00	9.25	85.53	94.78	200.00	-105.22	Peak	400	287	P
5	7125.00	10.05	42.54	52.59	68.20	-15.61	Average	400	287	P
6	7125.00	10.05	55.91	65.96	88.20	-22.24	Peak	400	287	P
7	13410.00	21.62	29.44	51.06	68.20	-17.14	Average	100	146	P
8	13410.00	21.62	43.09	64.71	88.20	-23.49	Peak	100	146	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

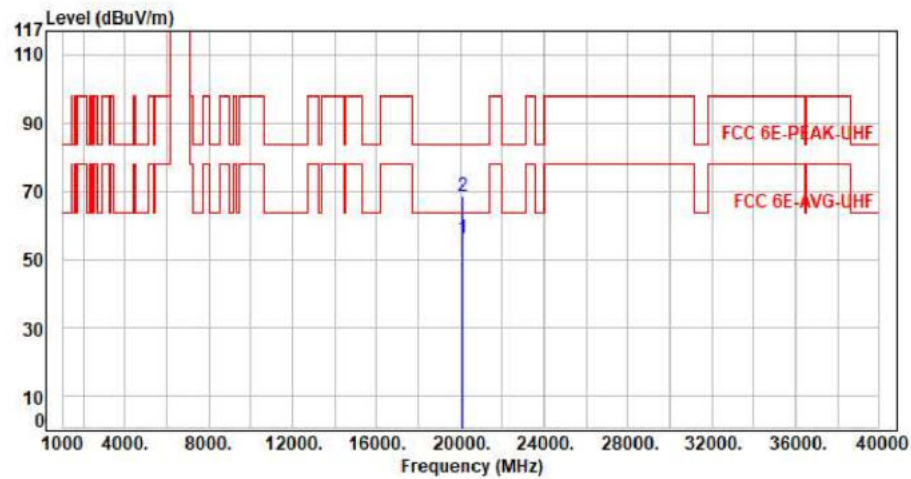


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	44.67	56.07	63.54	-7.47	Average	150	360	P
2	20115.00	11.40	57.13	68.53	83.54	-15.01	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

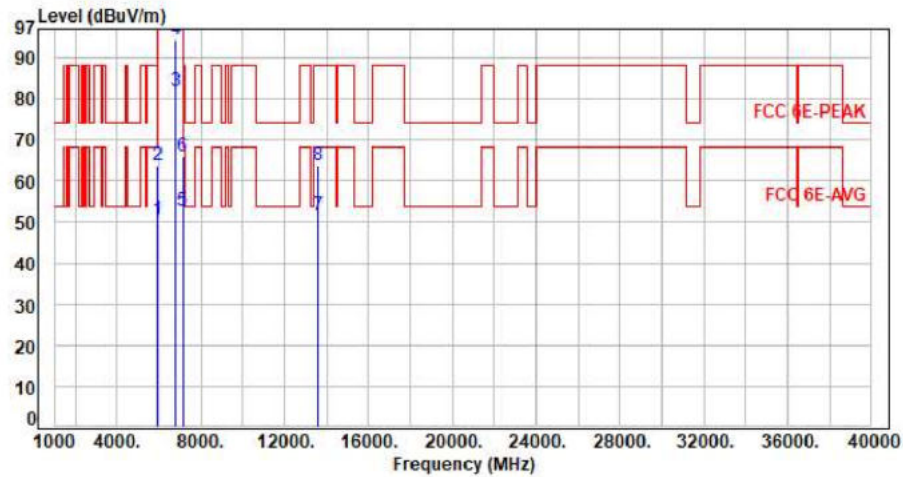


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.79	50.45	68.20	-17.75	Average	100	357	P
2	5925.00	7.66	56.16	63.82	88.20	-24.38	Peak	100	357	P
3	6785.00	9.46	72.40	81.86	200.00	-118.14	Average	100	357	P
4	6785.00	9.46	85.06	94.52	200.00	-105.48	Peak	100	357	P
5	7125.00	10.05	42.71	52.76	68.20	-15.44	Average	100	357	P
6	7125.00	10.05	56.04	66.09	88.20	-22.11	Peak	100	357	P
7	13570.00	22.06	29.48	51.54	68.20	-16.66	Average	100	166	P
8	13570.00	22.06	41.72	63.78	88.20	-24.42	Peak	100	166	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

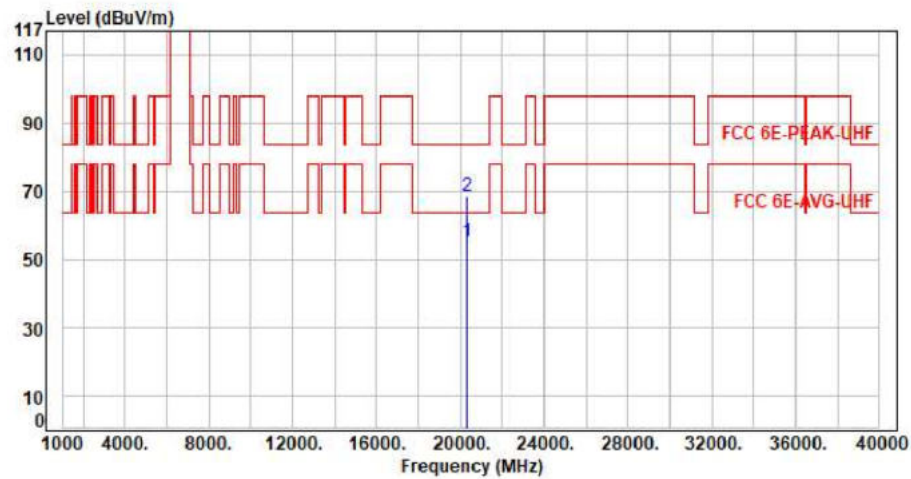


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.25	55.31	63.54	-8.23	Average	150	360	P
2	20355.00	11.06	57.45	68.51	83.54	-15.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

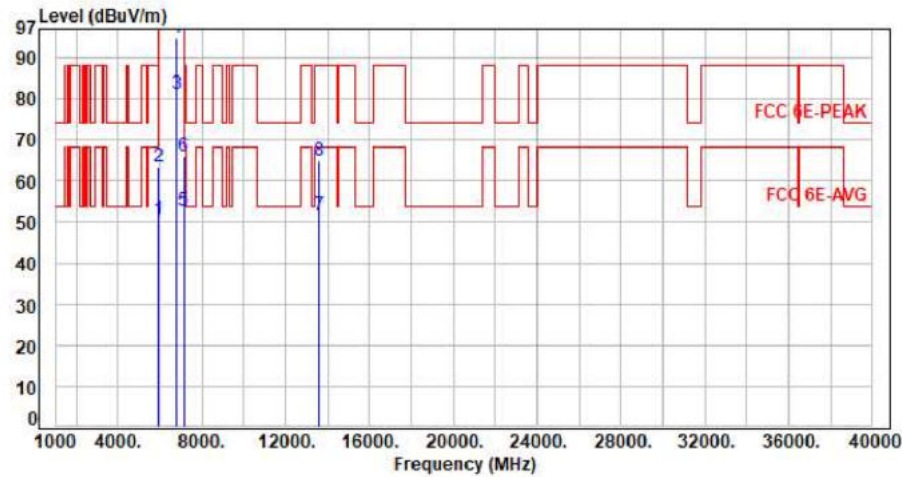

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	389	288	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	389	288	P
3	6785.00	9.46	71.81	81.27	200.00	-118.73	Average	389	288	P
4	6785.00	9.46	85.36	94.82	200.00	-105.18	Peak	389	288	P
5	7125.00	10.05	42.68	52.73	68.20	-15.47	Average	389	288	P
6	7125.00	10.05	55.82	65.87	88.20	-22.33	Peak	389	288	P
7	13570.00	22.06	29.75	51.81	68.20	-16.39	Average	100	224	P
8	13570.00	22.06	43.02	65.08	88.20	-23.12	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

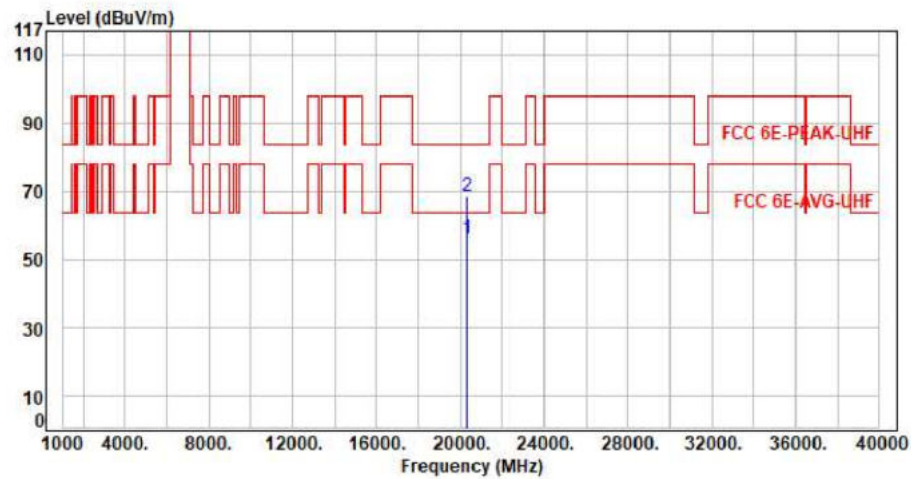

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	44.81	55.87	63.54	-7.67	Average	150	360	P
2	20355.00	11.06	57.25	68.31	83.54	-15.23	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

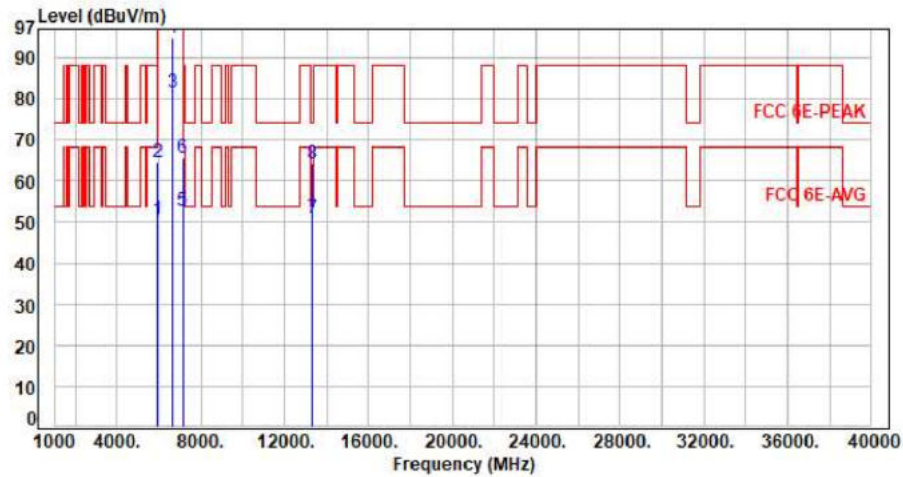


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.73	50.39	68.20	-17.81	Average	400	32	P
2	5925.00	7.66	56.82	64.48	88.20	-23.72	Peak	400	32	P
3	6665.00	9.08	72.52	81.60	200.00	-118.40	Average	400	32	P
4	6665.00	9.08	85.67	94.75	200.00	-105.25	Peak	400	32	P
5	7125.00	10.05	42.79	52.84	68.20	-15.36	Average	400	32	P
6	7125.00	10.05	55.70	65.75	88.20	-22.45	Peak	400	32	P
7	13330.00	21.30	29.49	50.79	54.00	-3.21	Average	100	152	P
8	13330.00	21.30	42.82	64.12	74.00	-9.88	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

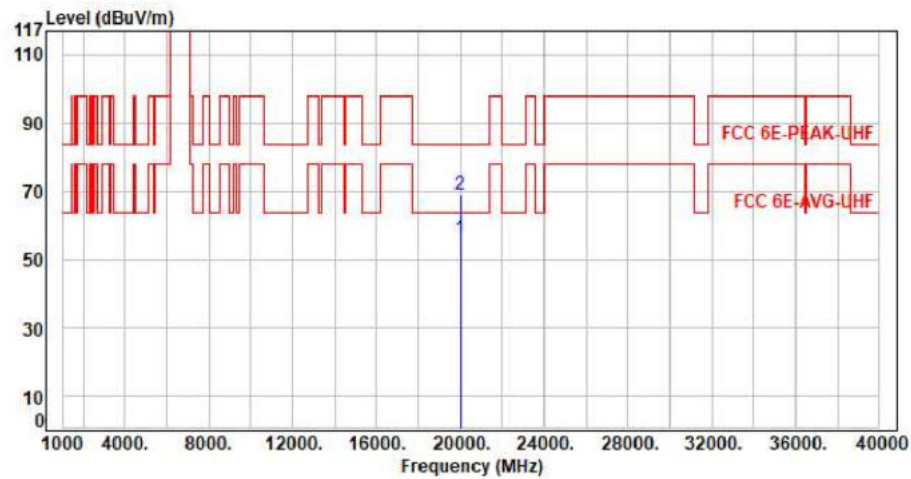


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	44.48	56.18	63.54	-7.36	Average	150	360	P
2	19995.00	11.70	57.29	68.99	83.54	-14.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

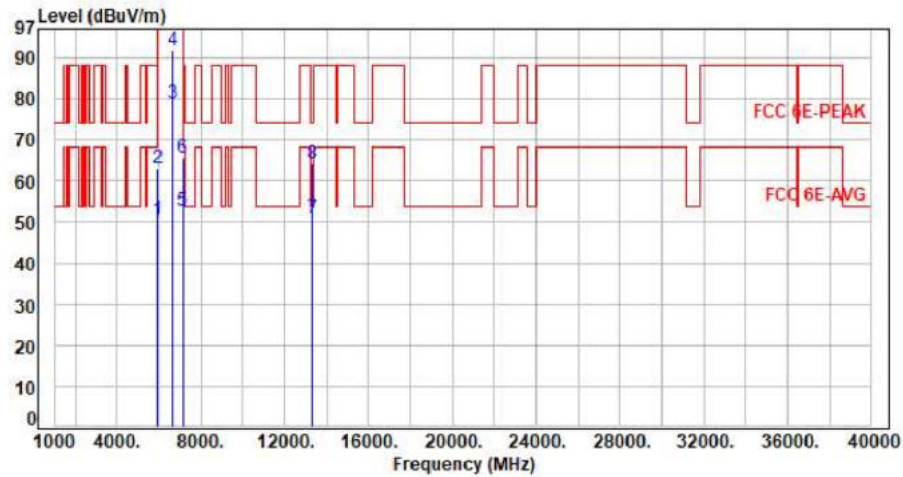

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.78	50.44	68.20	-17.76	Average	393	288	P
2	5925.00	7.66	55.42	63.08	88.20	-25.12	Peak	393	288	P
3	6665.00	9.08	69.91	78.99	200.00	-121.01	Average	393	288	P
4	6665.00	9.08	82.86	91.94	200.00	-108.06	Peak	393	288	P
5	7125.00	10.05	42.70	52.75	68.20	-15.45	Average	393	288	P
6	7125.00	10.05	55.73	65.78	88.20	-22.42	Peak	393	288	P
7	13330.00	21.30	29.45	50.75	54.00	-3.25	Average	100	185	P
8	13330.00	21.30	42.92	64.22	74.00	-9.78	Peak	100	185	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

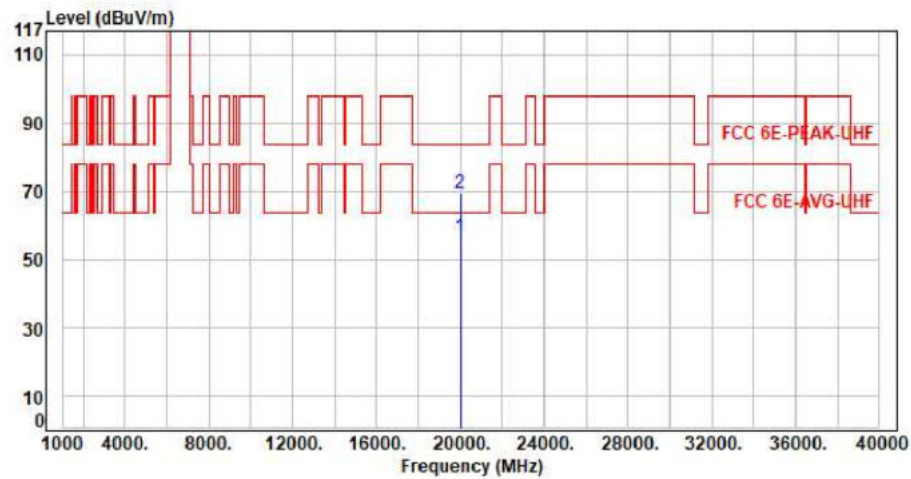


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	44.65	56.35	63.54	-7.19	Average	150	360	P
2	19995.00	11.70	57.51	69.21	83.54	-14.33	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

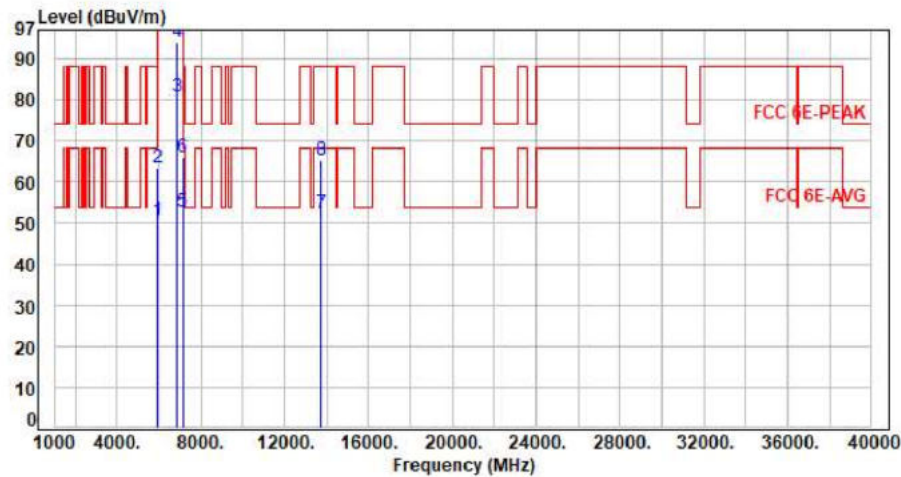

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.88	50.54	68.20	-17.66	Average	100	360	P
2	5925.00	7.66	55.82	63.48	88.20	-24.72	Peak	100	360	P
3	6875.00	9.55	71.11	80.66	200.00	-119.34	Average	100	360	P
4	6875.00	9.55	84.32	93.87	200.00	-106.13	Peak	100	360	P
5	7125.00	10.05	42.76	52.81	68.20	-15.39	Average	100	360	P
6	7125.00	10.05	55.96	66.01	88.20	-22.19	Peak	100	360	P
7	13750.00	22.65	29.75	52.40	68.20	-15.80	Average	100	186	P
8	13750.00	22.65	42.61	65.26	88.20	-22.94	Peak	100	186	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

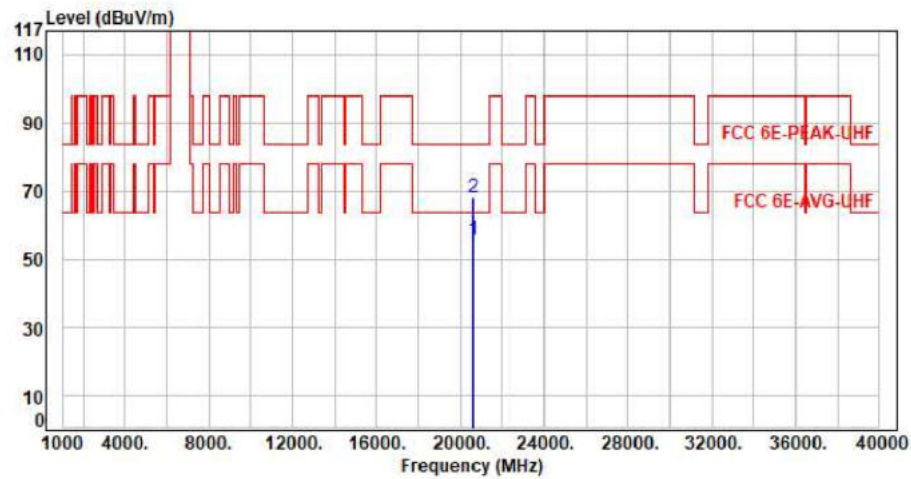


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	44.33	55.47	63.54	-8.07	Average	150	360	P
2	20625.00	11.14	56.79	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

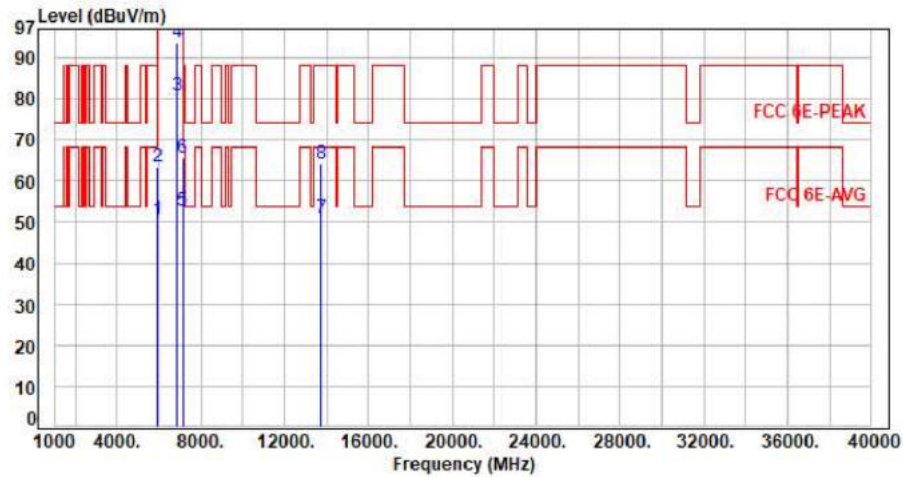


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.99	50.65	68.20	-17.55	Average	396	281	P
2	5925.00	7.66	55.91	63.57	88.20	-24.63	Peak	396	281	P
3	6875.00	9.55	71.28	80.83	200.00	-119.17	Average	396	281	P
4	6875.00	9.55	84.04	93.59	200.00	-106.41	Peak	396	281	P
5	7125.00	10.05	42.67	52.72	68.20	-15.48	Average	396	281	P
6	7125.00	10.05	55.71	65.76	88.20	-22.44	Peak	396	281	P
7	13750.00	22.65	28.09	50.74	68.20	-17.46	Average	100	126	P
8	13750.00	22.65	41.68	64.33	88.20	-23.87	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

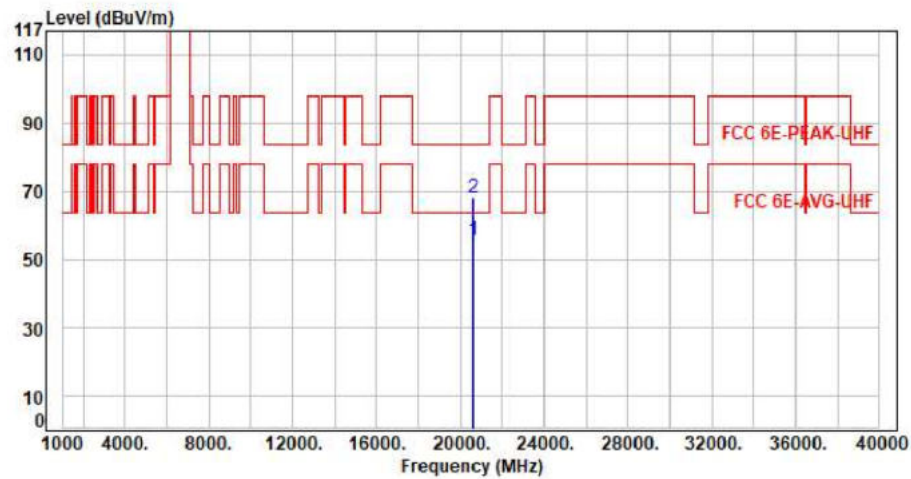


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	44.45	55.59	63.54	-7.95	Average	150	360	P
2	20625.00	11.14	56.98	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

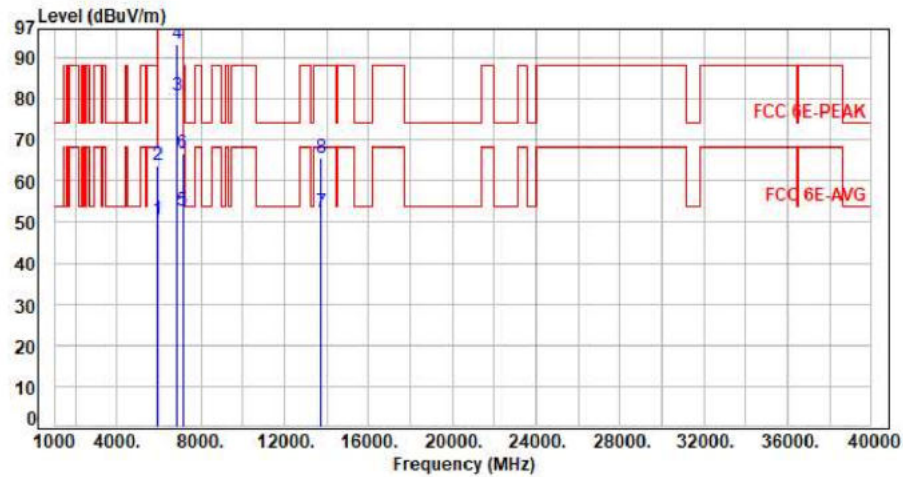


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.92	50.58	68.20	-17.62	Average	100	352	P
2	5925.00	7.66	56.01	63.67	88.20	-24.53	Peak	100	352	P
3	6885.00	9.56	71.13	80.69	200.00	-119.31	Average	100	352	P
4	6885.00	9.56	83.77	93.33	200.00	-106.67	Peak	100	352	P
5	7125.00	10.05	42.75	52.80	68.20	-15.40	Average	100	352	P
6	7125.00	10.05	56.83	66.88	88.20	-21.32	Peak	100	352	P
7	13770.00	22.69	29.84	52.53	68.20	-15.67	Average	100	116	P
8	13770.00	22.69	42.91	65.60	88.20	-22.60	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

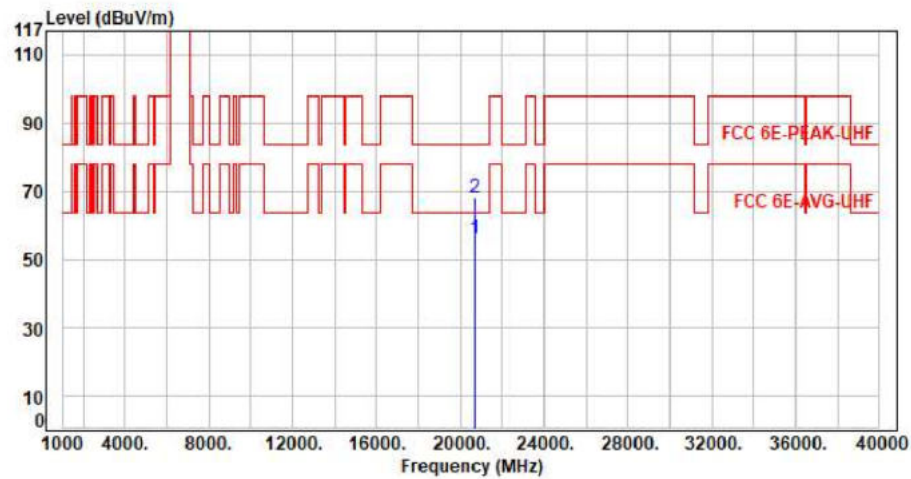


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	45.01	56.00	63.54	-7.54	Average	150	360	P
2	20655.00	10.99	57.12	68.11	83.54	-15.43	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

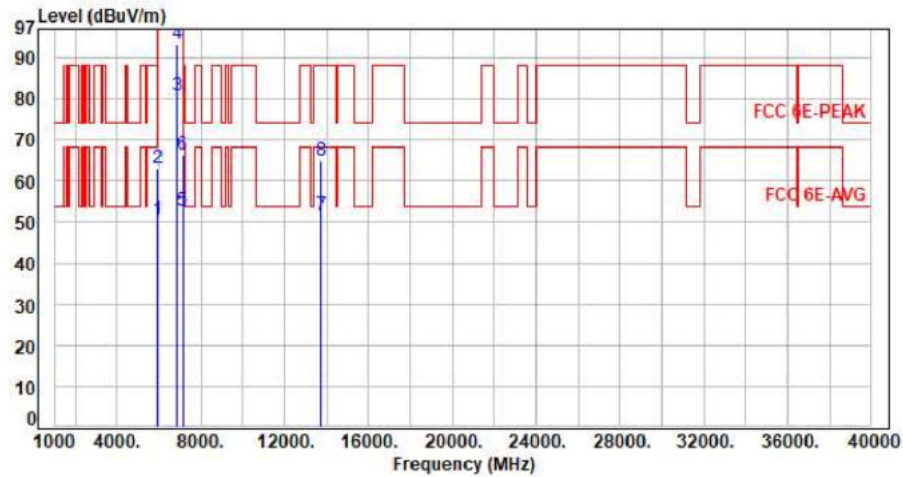

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.89	50.55	68.20	-17.65	Average	396	281	P
2	5925.00	7.66	55.44	63.10	88.20	-25.10	Peak	396	281	P
3	6885.00	9.56	71.05	80.61	200.00	-119.39	Average	396	281	P
4	6885.00	9.56	83.77	93.33	200.00	-106.67	Peak	396	281	P
5	7125.00	10.05	42.82	52.87	68.20	-15.33	Average	396	281	P
6	7125.00	10.05	56.51	66.56	88.20	-21.64	Peak	396	281	P
7	13770.00	22.69	28.96	51.65	68.20	-16.55	Average	100	166	P
8	13770.00	22.69	42.09	64.78	88.20	-23.42	Peak	100	166	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

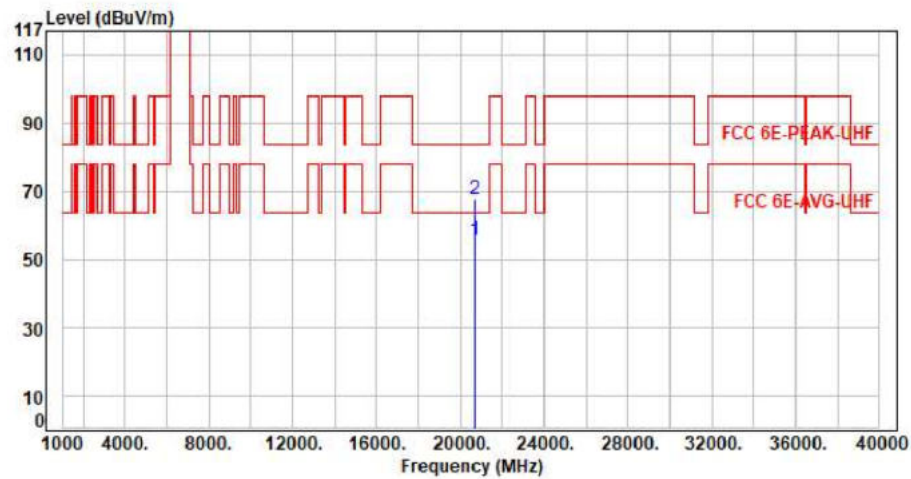


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20655.00	10.99	44.78	55.77	63.54	-7.77	Average	150	360	P
2	20655.00	10.99	56.61	67.60	83.54	-15.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

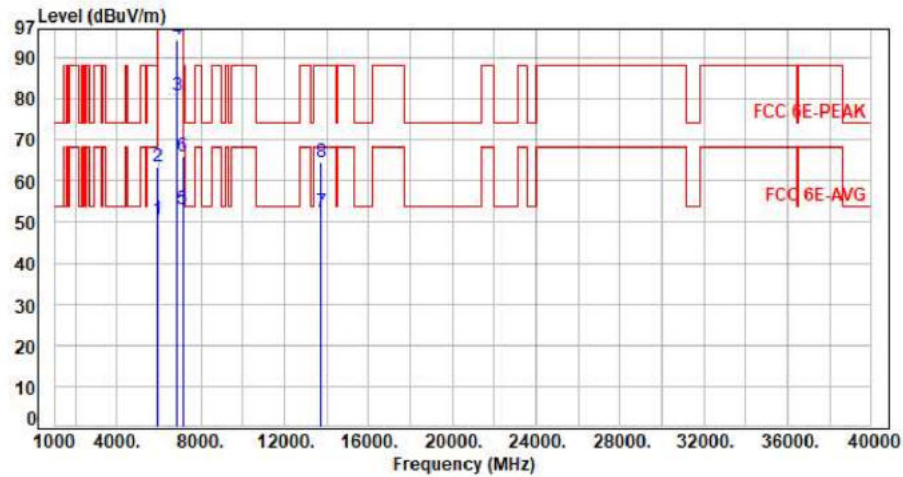

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.95	50.61	68.20	-17.59	Average	100	1	P
2	5925.00	7.66	55.71	63.37	88.20	-24.83	Peak	100	1	P
3	6865.00	9.52	71.36	80.88	200.00	-119.12	Average	100	1	P
4	6865.00	9.52	84.79	94.31	200.00	-105.69	Peak	100	1	P
5	7125.00	10.05	42.95	53.00	68.20	-15.20	Average	100	1	P
6	7125.00	10.05	55.92	65.97	88.20	-22.23	Peak	100	1	P
7	13730.00	22.57	29.68	52.25	68.20	-15.95	Average	100	167	P
8	13730.00	22.57	41.88	64.45	88.20	-23.75	Peak	100	167	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

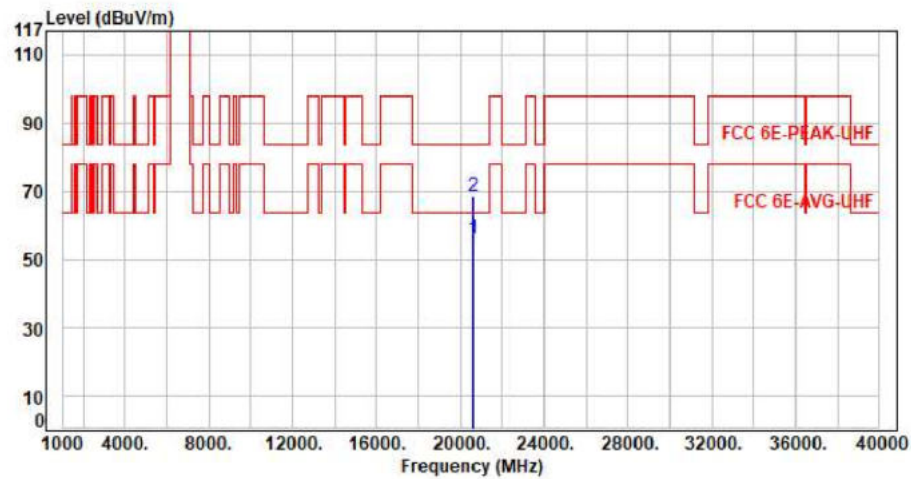


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	44.68	55.99	63.54	-7.55	Average	150	360	P
2	20595.00	11.31	57.39	68.70	83.54	-14.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

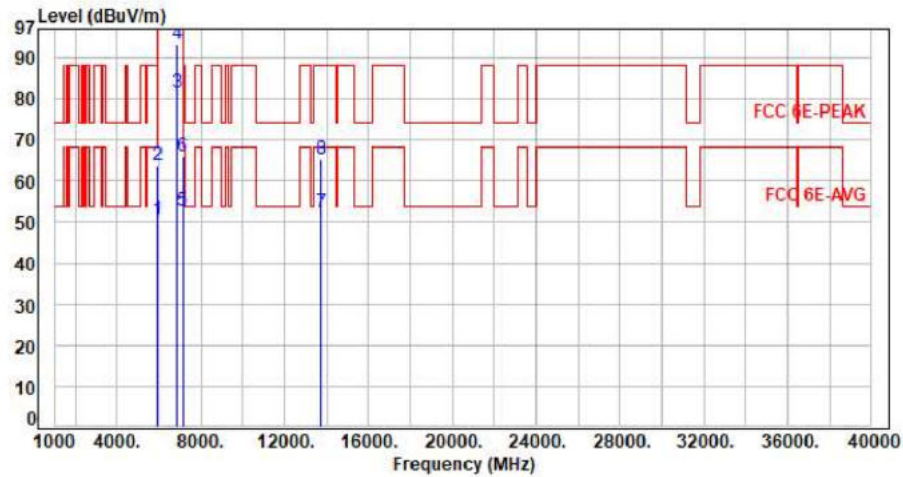


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.88	50.54	68.20	-17.66	Average	395	287	P
2	5925.00	7.66	56.05	63.71	88.20	-24.49	Peak	395	287	P
3	6865.00	9.52	71.97	81.49	200.00	-118.51	Average	395	287	P
4	6865.00	9.52	83.87	93.39	200.00	-106.61	Peak	395	287	P
5	7125.00	10.05	42.82	52.87	68.20	-15.33	Average	395	287	P
6	7125.00	10.05	55.88	65.93	88.20	-22.27	Peak	395	287	P
7	13730.00	22.57	29.76	52.33	68.20	-15.87	Average	100	167	P
8	13730.00	22.57	42.61	65.18	88.20	-23.02	Peak	100	167	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH183 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

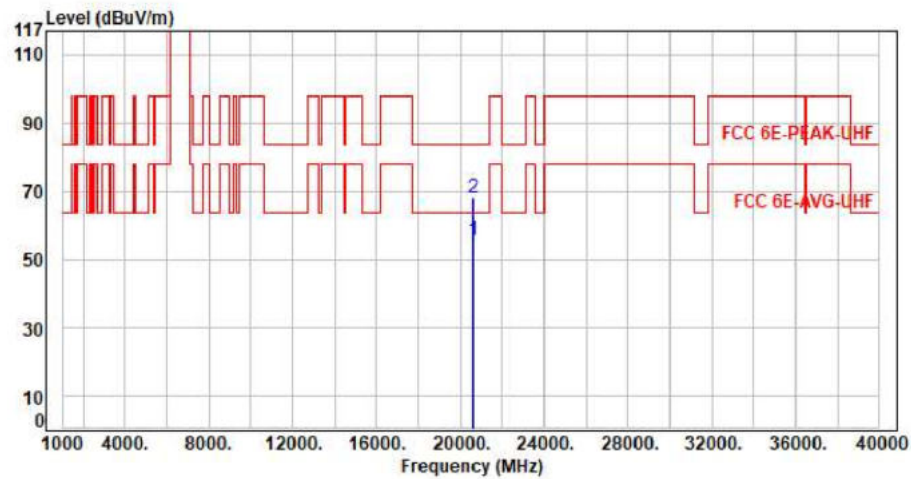


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20595.00	11.31	44.38	55.69	63.54	-7.85	Average	150	360	P
2	20595.00	11.31	56.57	67.88	83.54	-15.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

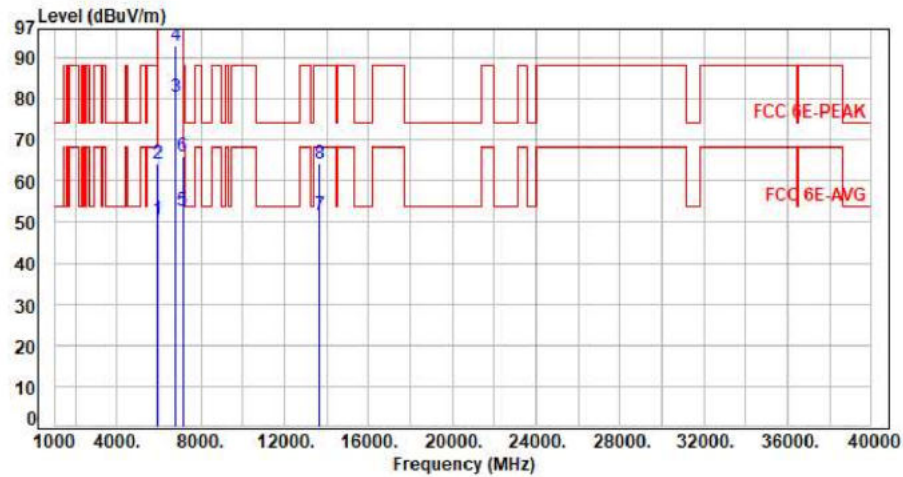


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.80	50.46	68.20	-17.74	Average	100	358	P
2	5925.00	7.66	56.42	64.08	88.20	-24.12	Peak	100	358	P
3	6825.00	9.47	71.06	80.53	200.00	-119.47	Average	100	358	P
4	6825.00	9.47	83.56	93.03	200.00	-106.97	Peak	100	358	P
5	7125.00	10.05	42.74	52.79	68.20	-15.41	Average	100	358	P
6	7125.00	10.05	55.81	65.86	88.20	-22.34	Peak	100	358	P
7	13650.00	22.24	29.46	51.70	68.20	-16.50	Average	100	152	P
8	13650.00	22.24	42.09	64.33	88.20	-23.87	Peak	100	152	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

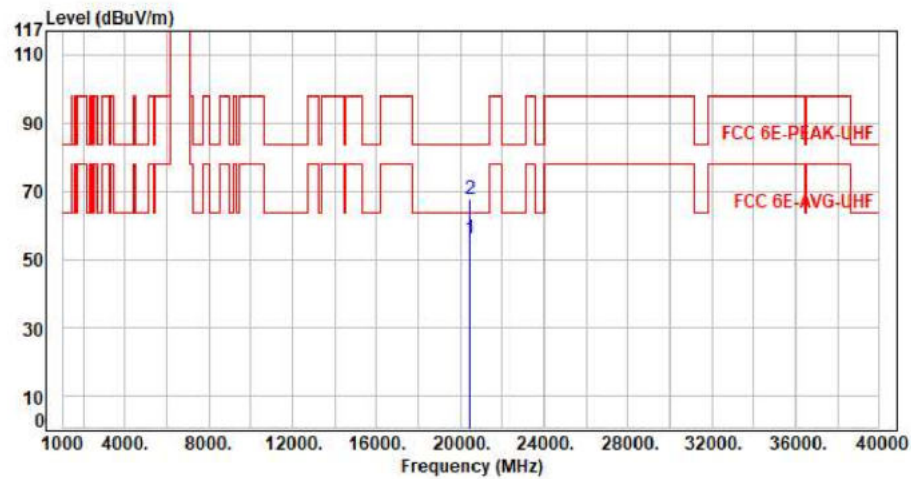


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	44.47	55.92	63.54	-7.62	Average	150	360	P
2	20475.00	11.45	56.27	67.72	83.54	-15.82	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

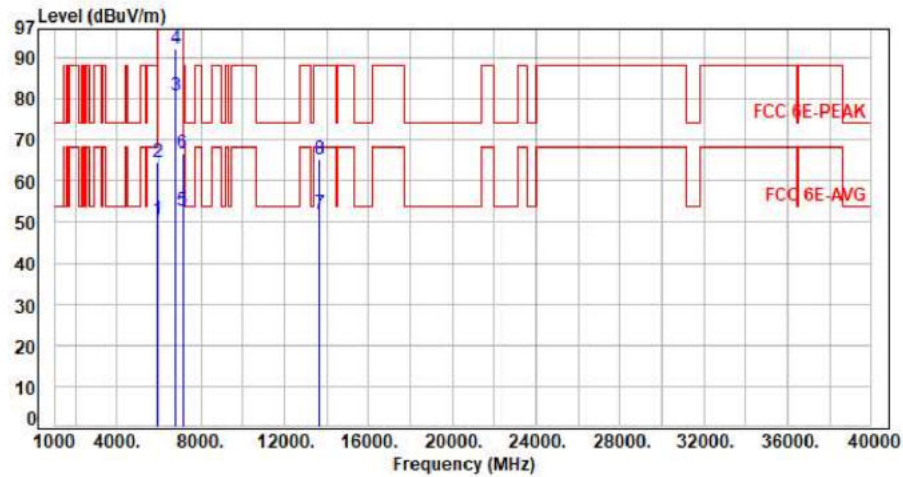

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.81	50.47	68.20	-17.73	Average	399	287	P
2	5925.00	7.66	56.79	64.45	88.20	-23.75	Peak	399	287	P
3	6825.00	9.47	71.41	80.88	200.00	-119.12	Average	399	287	P
4	6825.00	9.47	82.89	92.36	200.00	-107.64	Peak	399	287	P
5	7125.00	10.05	42.75	52.80	68.20	-15.40	Average	399	287	P
6	7125.00	10.05	56.57	66.62	88.20	-21.58	Peak	399	287	P
7	13650.00	22.24	29.82	52.06	68.20	-16.14	Average	100	195	P
8	13650.00	22.24	43.06	65.30	88.20	-22.90	Peak	100	195	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x160 CH175 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

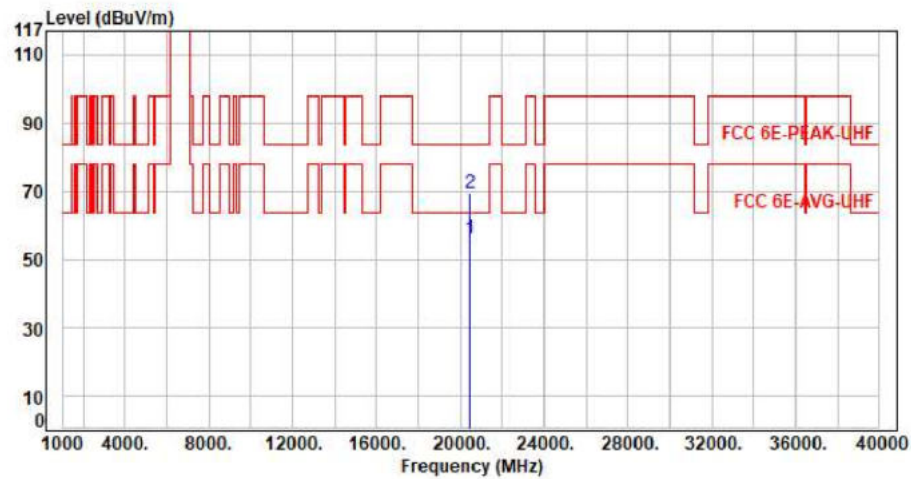


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20475.00	11.45	44.48	55.93	63.54	-7.61	Average	150	360	P
2	20475.00	11.45	57.77	69.22	83.54	-14.32	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

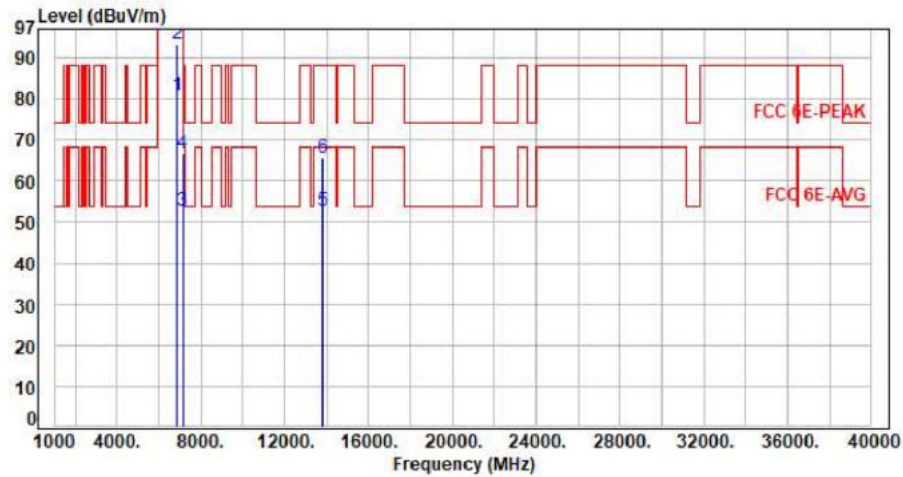


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	71.06	80.65	200.00	-119.35	Average	296	360	P
2	6895.00	9.59	83.65	93.24	200.00	-106.76	Peak	296	360	P
3	7125.00	10.05	42.63	52.68	68.20	-15.52	Average	296	360	P
4	7125.00	10.05	56.75	66.80	88.20	-21.40	Peak	296	360	P
5	13790.00	22.74	29.87	52.61	68.20	-15.59	Average	100	328	P
6	13790.00	22.74	43.07	65.81	88.20	-22.39	Peak	100	328	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

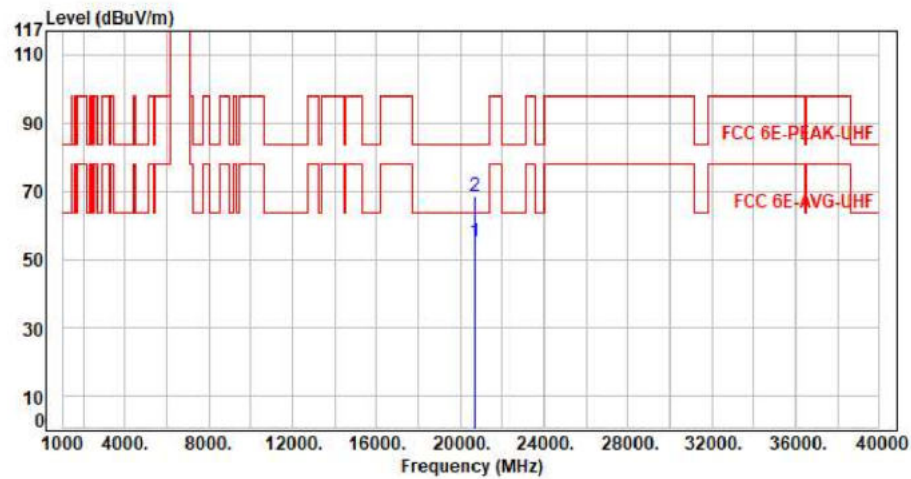


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.31	55.35	63.54	-8.19	Average	150	360	P
2	20685.00	11.04	57.66	68.70	83.54	-14.84	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

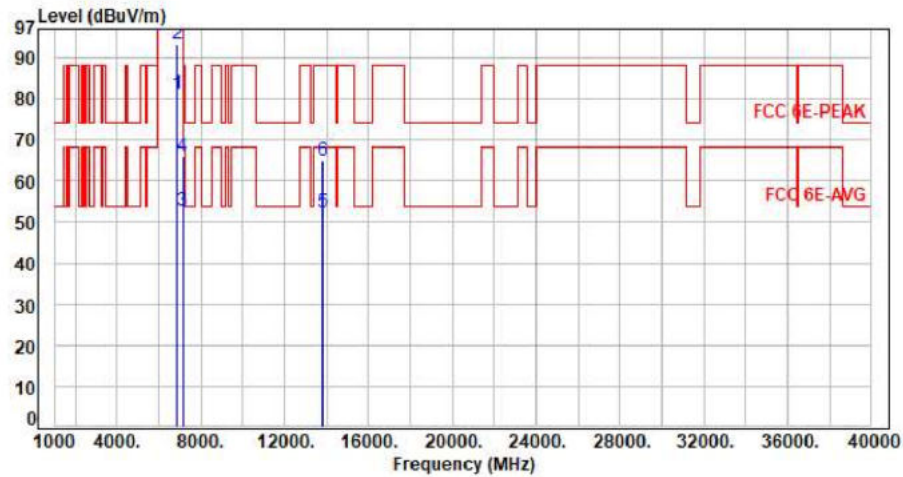


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6895.00	9.59	71.45	81.04	200.00	-118.96	Average	394	288	P
2	6895.00	9.59	83.79	93.38	200.00	-106.62	Peak	394	288	P
3	7125.00	10.05	42.69	52.74	68.20	-15.46	Average	394	288	P
4	7125.00	10.05	55.91	65.96	88.20	-22.24	Peak	394	288	P
5	13790.00	22.74	29.66	52.40	68.20	-15.80	Average	100	112	P
6	13790.00	22.74	42.17	64.91	88.20	-23.29	Peak	100	112	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH189 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

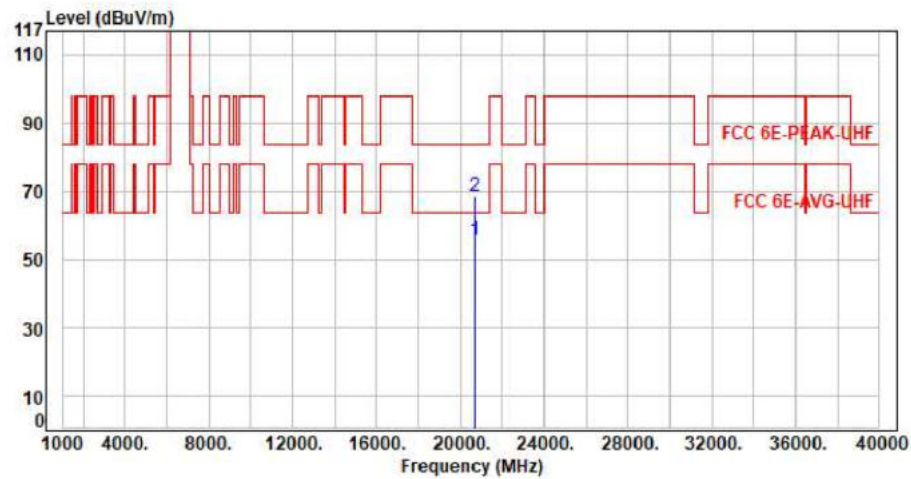


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20685.00	11.04	44.55	55.59	63.54	-7.95	Average	150	360	P
2	20685.00	11.04	57.56	68.60	83.54	-14.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

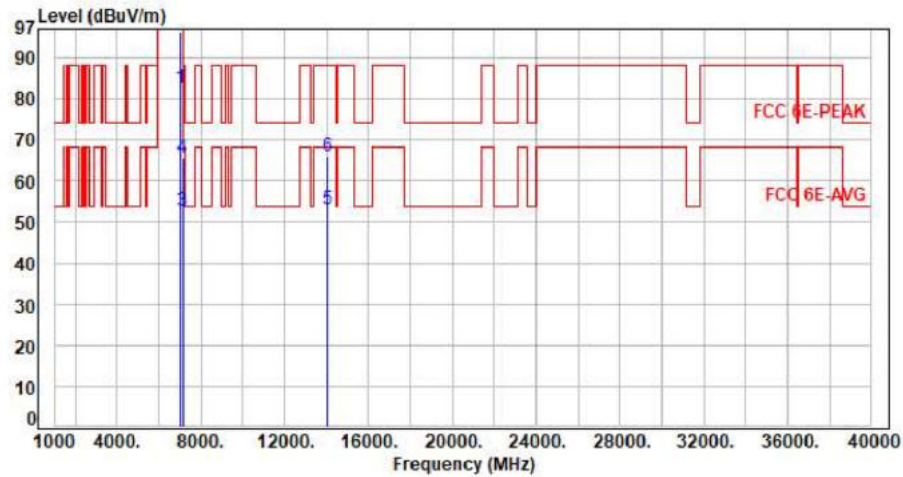


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	72.94	82.62	200.00	-117.38	Average	100	13	P
2	7015.00	9.68	86.77	96.45	200.00	-103.55	Peak	100	13	P
3	7125.00	10.05	42.54	52.59	68.20	-15.61	Average	100	13	P
4	7125.00	10.05	55.65	65.70	88.20	-22.50	Peak	100	13	P
5	14030.00	23.39	29.64	53.03	68.20	-15.17	Average	100	229	P
6	14030.00	23.39	42.81	66.20	88.20	-22.00	Peak	100	229	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

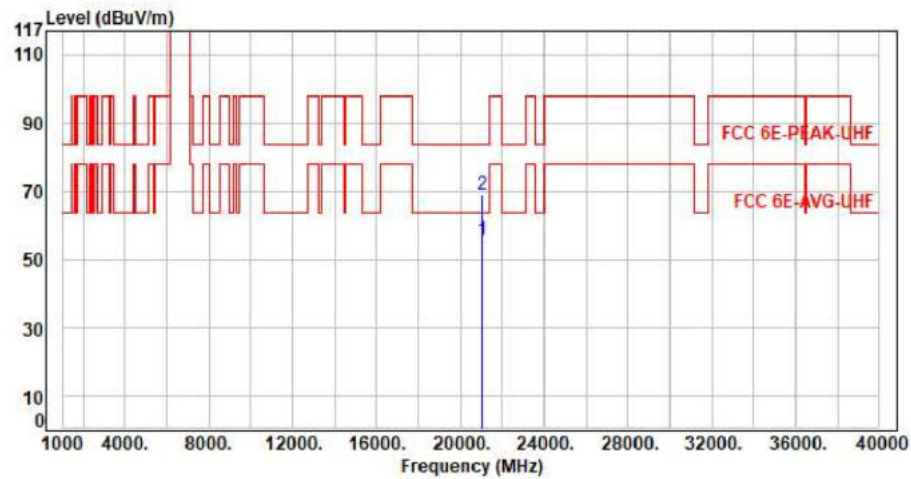


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.22	55.72	63.54	-7.82	Average	150	360	P
2	21045.00	11.50	57.58	69.08	83.54	-14.46	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

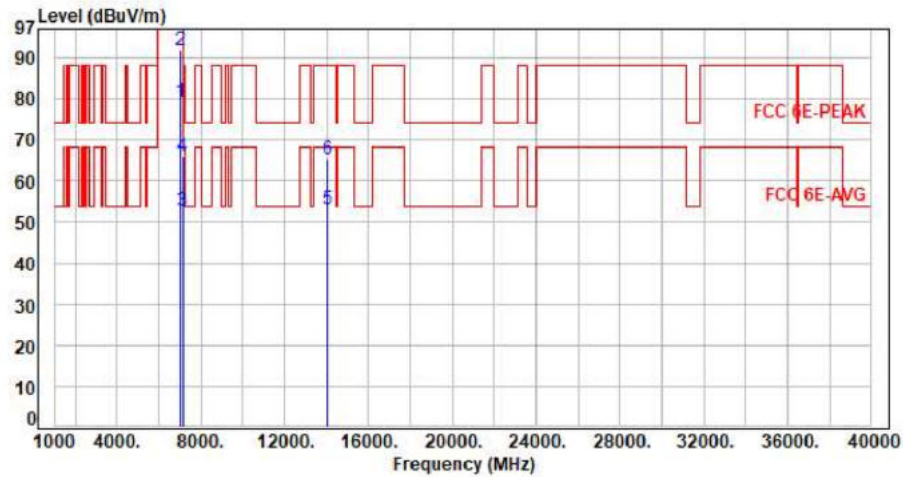


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7015.00	9.68	69.54	79.22	200.00	-120.78	Average	298	282	P
2	7015.00	9.68	82.22	91.90	200.00	-108.10	Peak	298	282	P
3	7125.00	10.05	42.64	52.69	68.20	-15.51	Average	298	282	P
4	7125.00	10.05	56.08	66.13	88.20	-22.07	Peak	298	282	P
5	14030.00	23.39	29.76	53.15	68.20	-15.05	Average	100	123	P
6	14030.00	23.39	42.06	65.45	88.20	-22.75	Peak	100	123	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH213 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

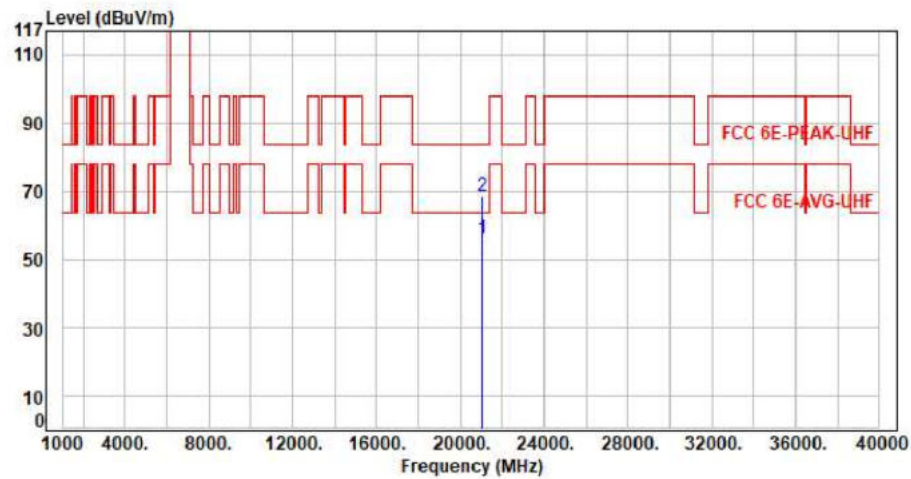


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21045.00	11.50	44.58	56.08	63.54	-7.46	Average	150	360	P
2	21045.00	11.50	57.18	68.68	83.54	-14.86	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

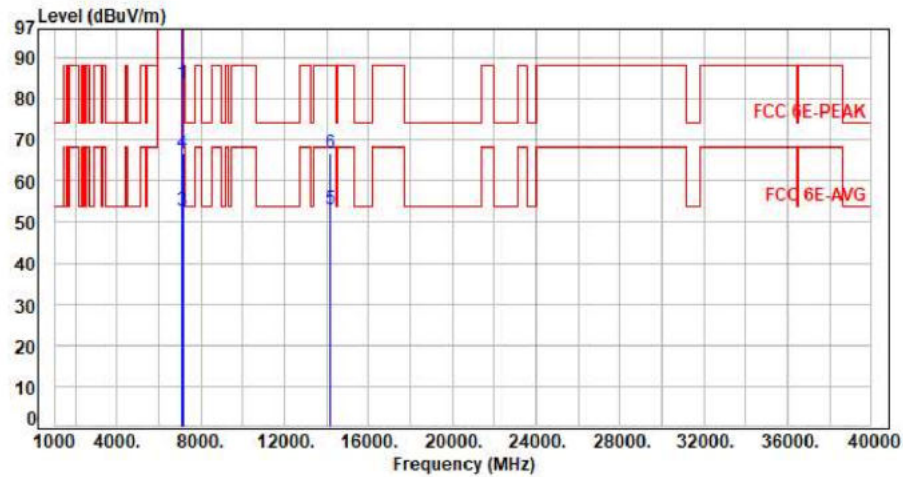


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	73.93	83.89	200.00	-116.11	Average	284	17	P
2	7095.00	9.96	87.21	97.17	200.00	-102.83	Peak	284	17	P
3	7125.00	10.05	42.77	52.82	68.20	-15.38	Average	284	17	P
4	7125.00	10.05	56.56	66.61	88.20	-21.59	Peak	284	17	P
5	14190.00	23.79	29.48	53.27	68.20	-14.93	Average	100	185	P
6	14190.00	23.79	43.09	66.88	88.20	-21.32	Peak	100	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

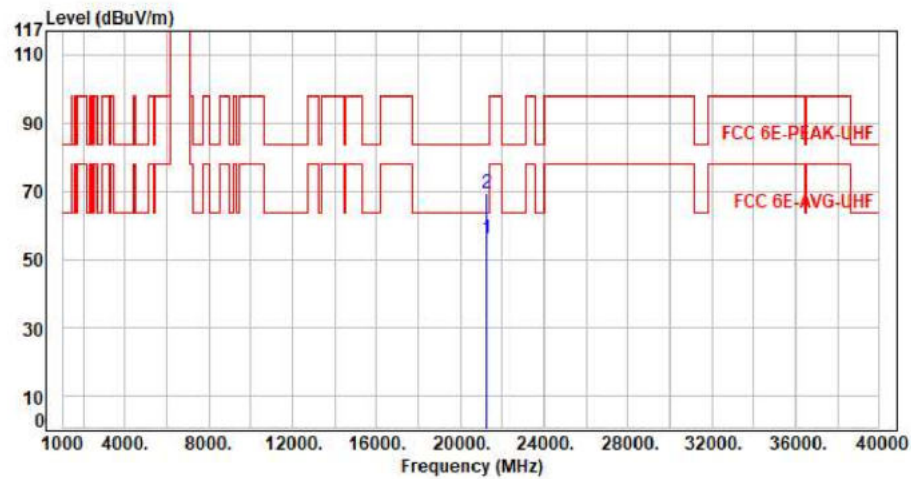

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.39	56.19	63.54	-7.35	Average	150	360	P
2	21285.00	11.80	57.63	69.43	83.54	-14.11	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

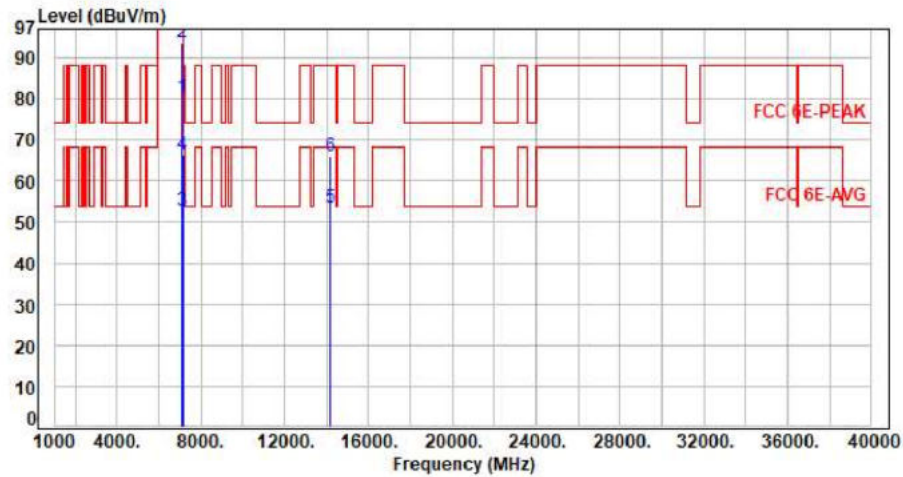


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7095.00	9.96	70.61	80.57	200.00	-119.43	Average	345	274	P
2	7095.00	9.96	83.86	93.82	200.00	-106.18	Peak	345	274	P
3	7125.00	10.05	42.62	52.67	68.20	-15.53	Average	345	274	P
4	7125.00	10.05	56.43	66.48	88.20	-21.72	Peak	345	274	P
5	14190.00	23.79	29.66	53.45	68.20	-14.75	Average	100	126	P
6	14190.00	23.79	42.09	65.88	88.20	-22.32	Peak	100	126	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH229 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

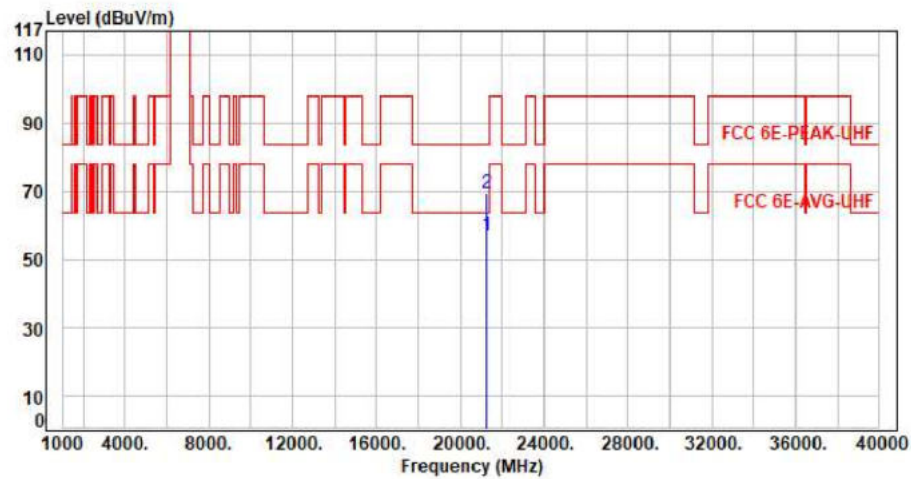


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21285.00	11.80	44.93	56.73	63.54	-6.81	Average	150	360	P
2	21285.00	11.80	57.55	69.35	83.54	-14.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

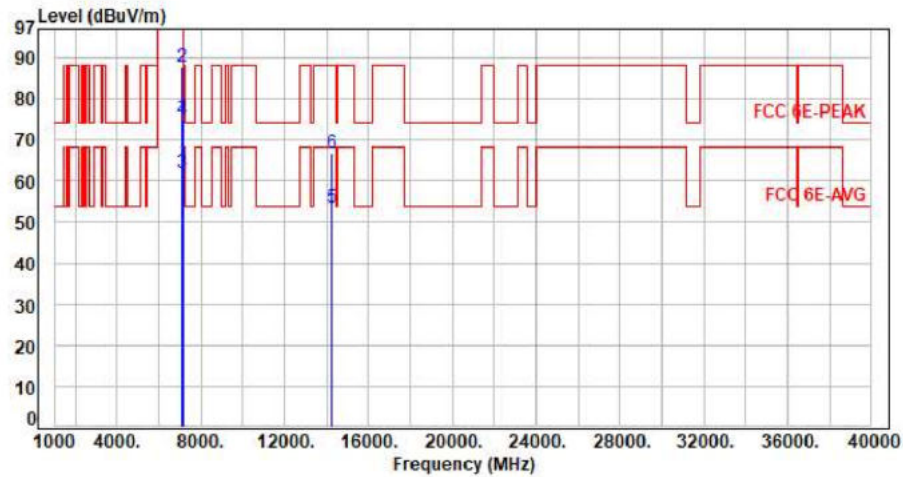


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	65.77	75.79	200.00	-124.21	Average	100	16	P
2	7115.00	10.02	77.87	87.89	200.00	-112.11	Peak	100	16	P
3	7125.00	10.05	51.75	61.80	68.20	-6.40	Average	100	16	P
4	7125.00	10.05	64.86	74.91	88.20	-13.29	Peak	100	16	P
5	14230.00	23.94	29.47	53.41	68.20	-14.79	Average	100	296	P
6	14230.00	23.94	42.81	66.75	88.20	-21.45	Peak	100	296	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

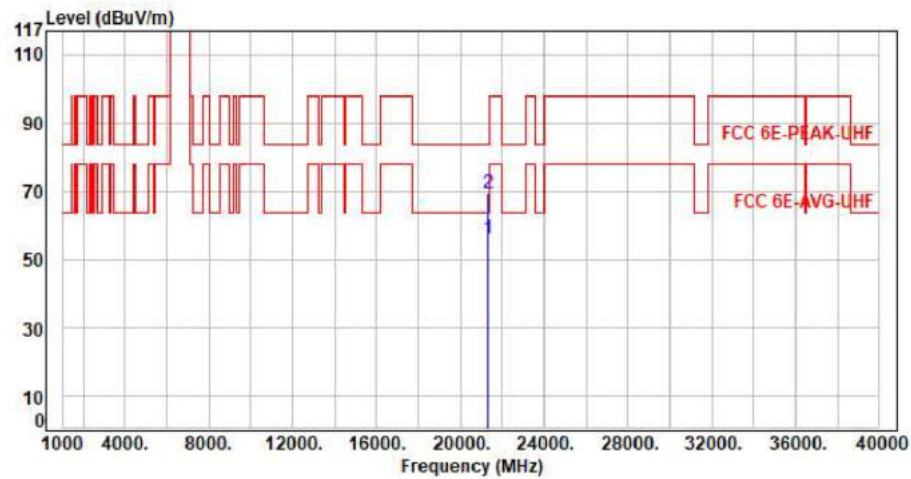


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	44.52	55.88	63.54	-7.66	Average	150	360	P
2	21345.00	11.36	57.84	69.20	83.54	-14.34	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

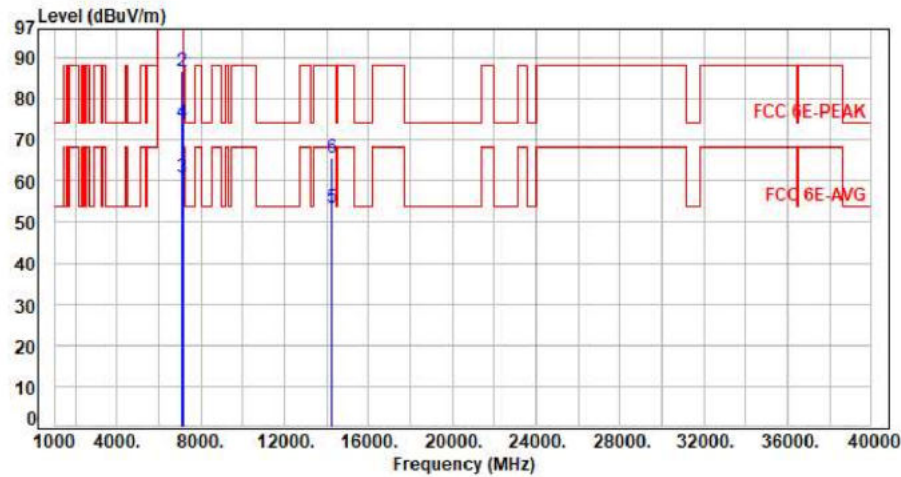


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7115.00	10.02	63.76	73.78	200.00	-126.22	Average	390	321	P
2	7115.00	10.02	76.66	86.68	200.00	-113.32	Peak	390	321	P
3	7125.00	10.05	50.76	60.81	68.20	-7.39	Average	390	321	P
4	7125.00	10.05	63.99	74.04	88.20	-14.16	Peak	390	321	P
5	14230.00	23.94	29.64	53.58	68.20	-14.62	Average	100	224	P
6	14230.00	23.94	41.78	65.72	88.20	-22.48	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x20 CH233 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

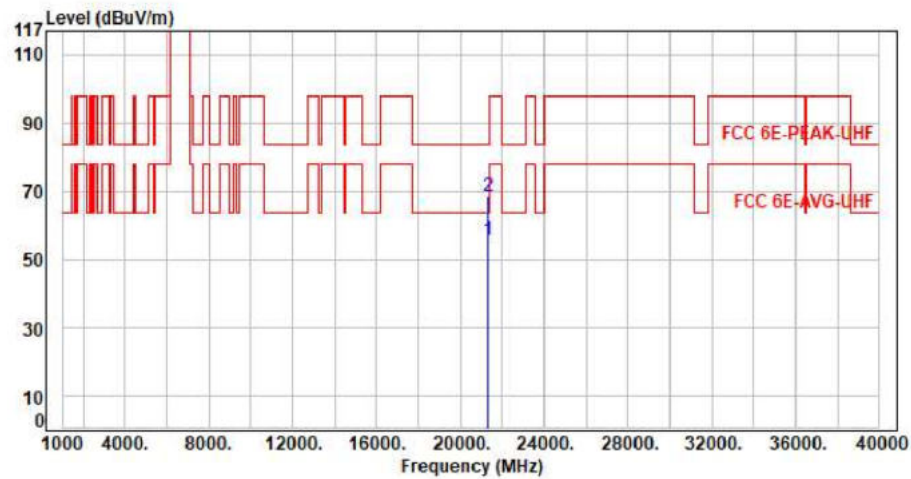


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21345.00	11.36	44.42	55.78	63.54	-7.76	Average	150	360	P
2	21345.00	11.36	57.33	68.69	83.54	-14.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

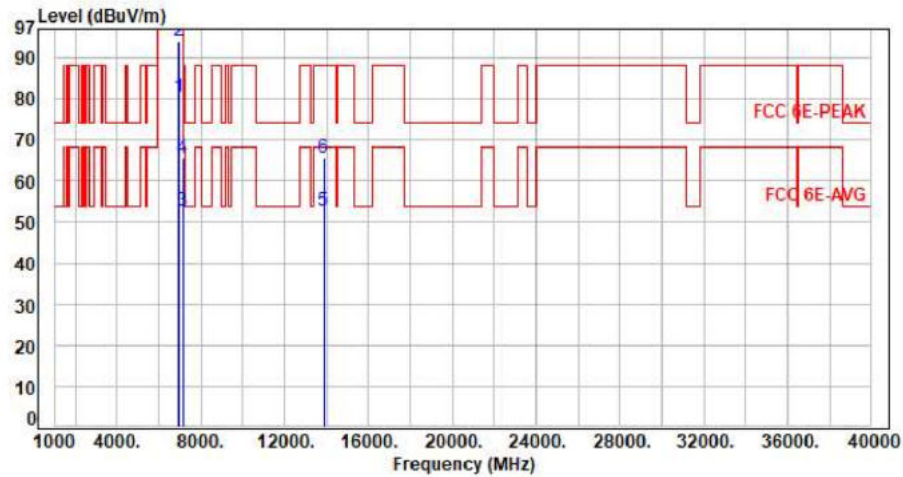


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	70.62	80.23	200.00	-119.77	Average	170	11	P
2	6925.00	9.61	84.54	94.15	200.00	-105.85	Peak	170	11	P
3	7125.00	10.05	42.67	52.72	68.20	-15.48	Average	170	11	P
4	7125.00	10.05	55.49	65.54	88.20	-22.66	Peak	170	11	P
5	13850.00	22.86	29.88	52.74	68.20	-15.46	Average	100	225	P
6	13850.00	22.86	42.82	65.68	88.20	-22.52	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

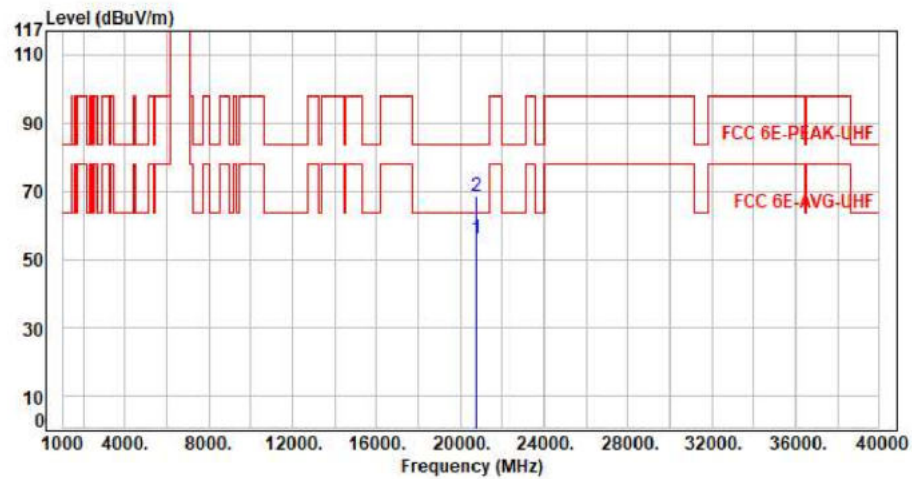


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	44.75	56.14	63.54	-7.40	Average	150	360	P
2	20775.00	11.39	57.21	68.60	83.54	-14.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

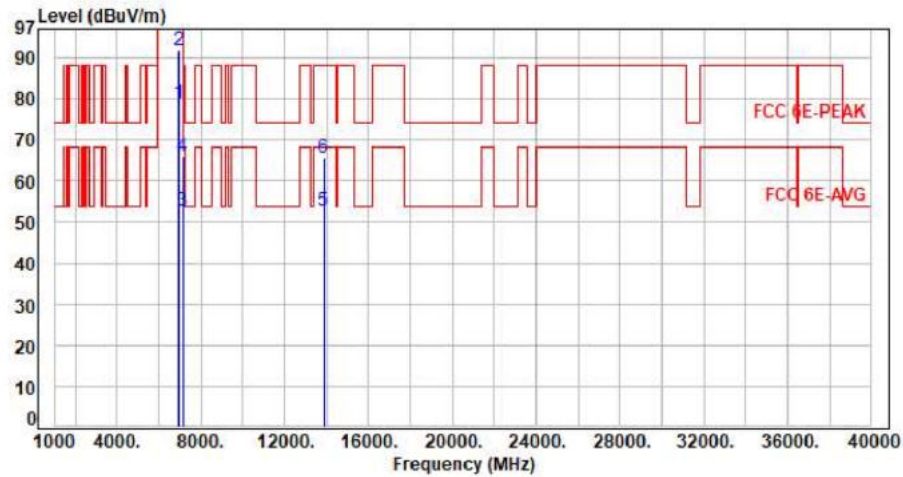


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6925.00	9.61	69.48	79.09	200.00	-120.91	Average	354	277	P
2	6925.00	9.61	82.18	91.79	200.00	-108.21	Peak	354	277	P
3	7125.00	10.05	42.64	52.69	68.20	-15.51	Average	354	277	P
4	7125.00	10.05	56.01	66.06	88.20	-22.14	Peak	354	277	P
5	13850.00	22.86	29.87	52.73	68.20	-15.47	Average	100	332	P
6	13850.00	22.86	42.91	65.77	88.20	-22.43	Peak	100	332	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH195 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

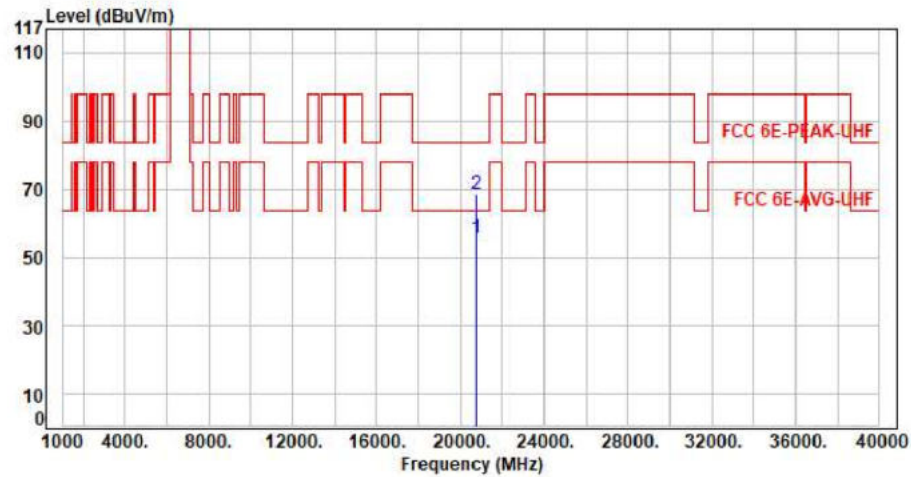


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20775.00	11.39	44.07	55.46	63.54	-8.08	Average	150	360	P
2	20775.00	11.39	57.21	68.60	83.54	-14.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

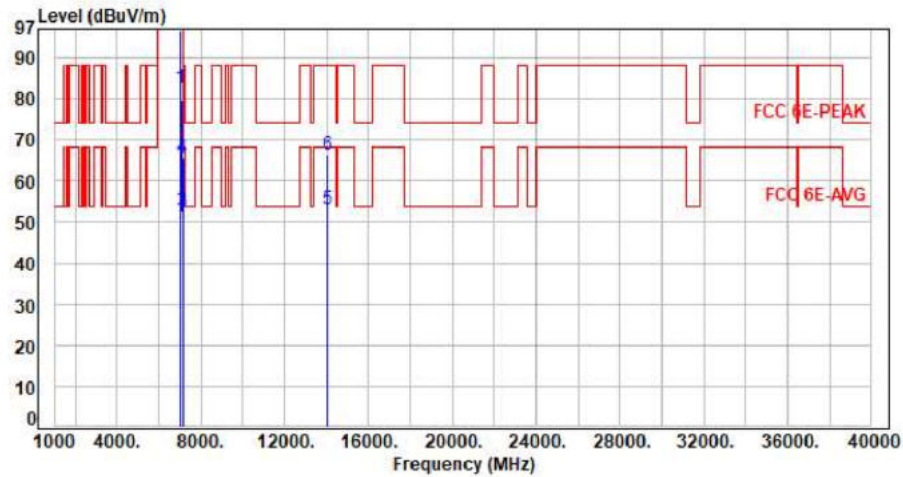

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	73.12	82.77	200.00	-117.23	Average	100	15	P
2	7005.00	9.65	86.79	96.44	200.00	-103.56	Peak	100	15	P
3	7125.00	10.05	42.61	52.66	68.20	-15.54	Average	100	15	P
4	7125.00	10.05	55.58	65.63	88.20	-22.57	Peak	100	15	P
5	14010.00	23.32	29.86	53.18	68.20	-15.02	Average	100	159	P
6	14010.00	23.32	42.91	66.23	88.20	-21.97	Peak	100	159	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor