




For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

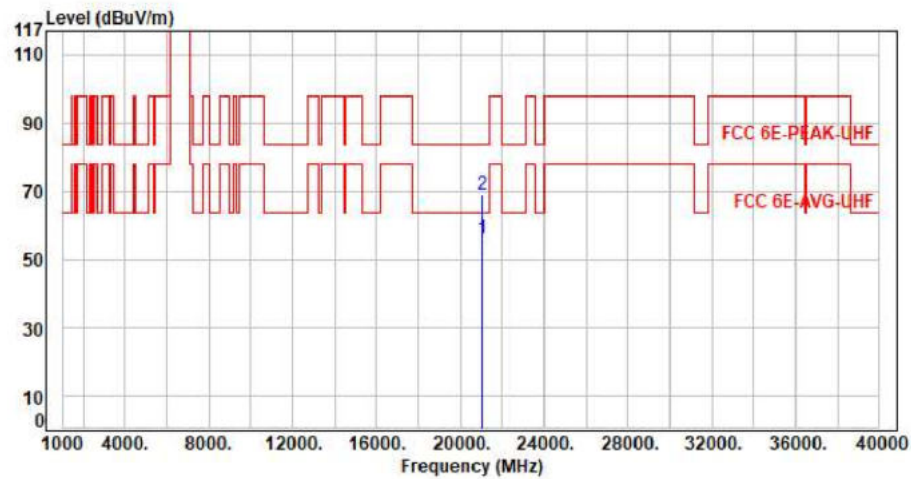


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	44.72	56.20	63.54	-7.34	Average	150	360	P
2	21015.00	11.48	57.40	68.88	83.54	-14.66	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

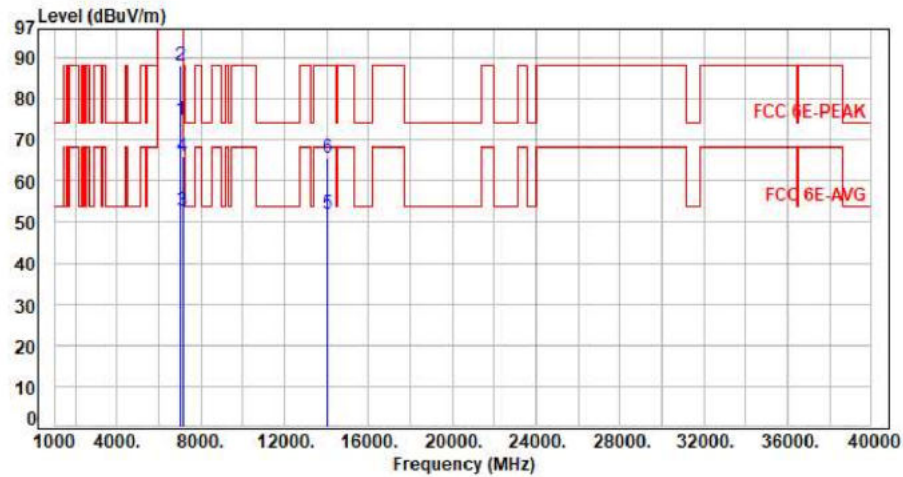


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7005.00	9.65	65.25	74.90	200.00	-125.10	Average	100	283	P
2	7005.00	9.65	78.58	88.23	200.00	-111.77	Peak	100	283	P
3	7125.00	10.05	42.62	52.67	68.20	-15.53	Average	100	283	P
4	7125.00	10.05	55.84	65.89	88.20	-22.31	Peak	100	283	P
5	14010.00	23.32	28.66	51.98	68.20	-16.22	Average	100	128	P
6	14010.00	23.32	42.51	65.83	88.20	-22.37	Peak	100	128	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH211 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

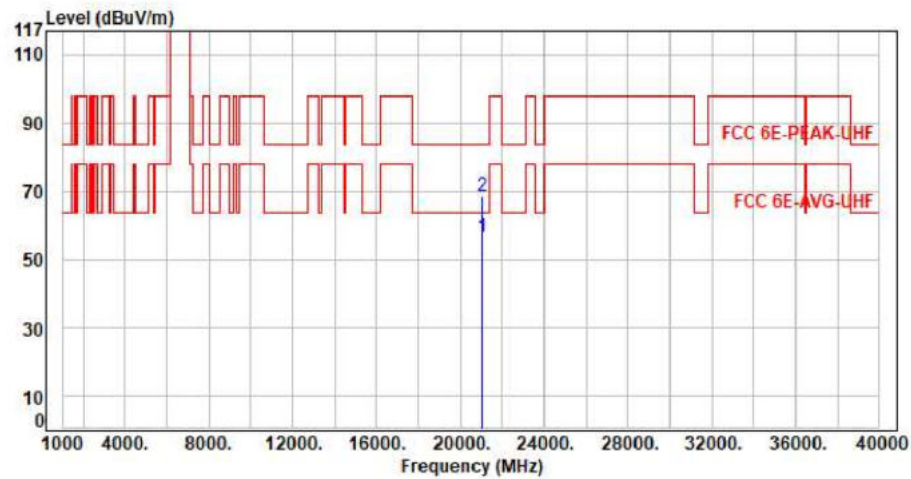


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21015.00	11.48	44.87	56.35	63.54	-7.19	Average	150	360	P
2	21015.00	11.48	57.11	68.59	83.54	-14.95	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

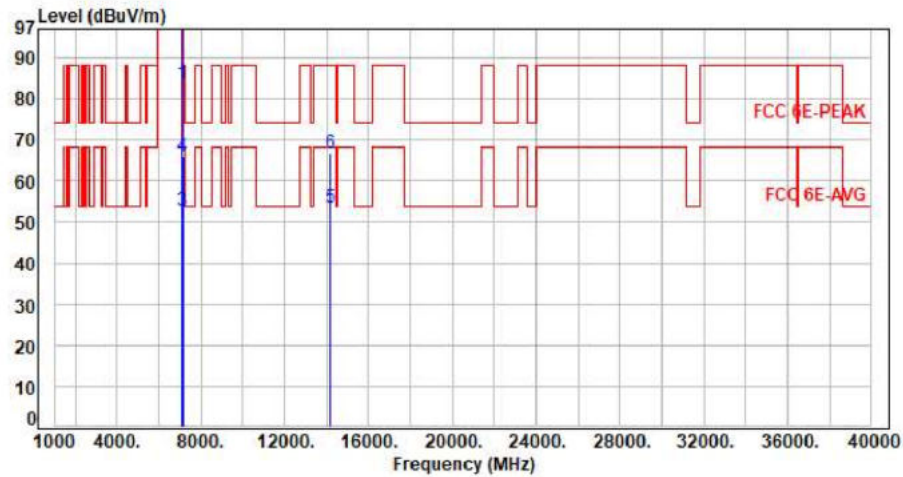


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	73.96	83.87	200.00	-116.13	Average	100	16	P
2	7085.00	9.91	87.24	97.15	200.00	-102.85	Peak	100	16	P
3	7125.00	10.05	42.57	52.62	68.20	-15.58	Average	100	16	P
4	7125.00	10.05	56.11	66.16	88.20	-22.04	Peak	100	16	P
5	14170.00	23.72	29.64	53.36	68.20	-14.84	Average	100	118	P
6	14170.00	23.72	42.87	66.59	88.20	-21.61	Peak	100	118	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

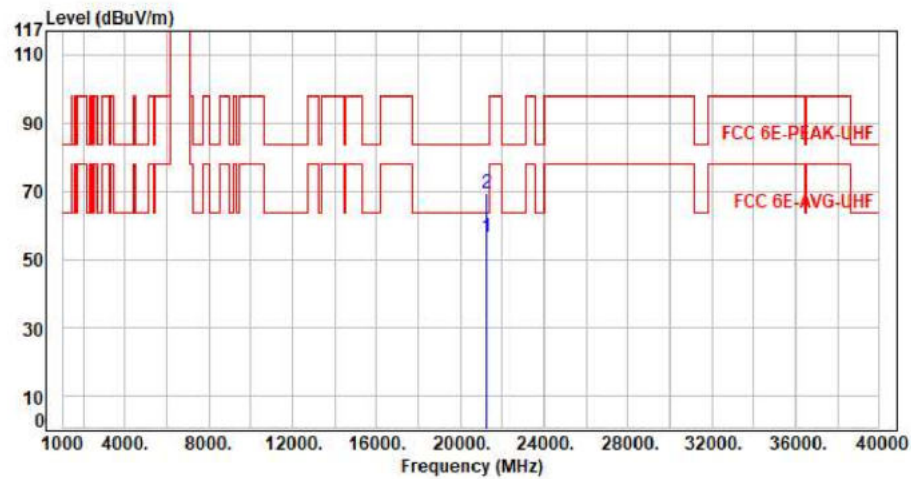


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	44.65	56.49	63.54	-7.05	Average	150	360	P
2	21255.00	11.84	57.59	69.43	83.54	-14.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

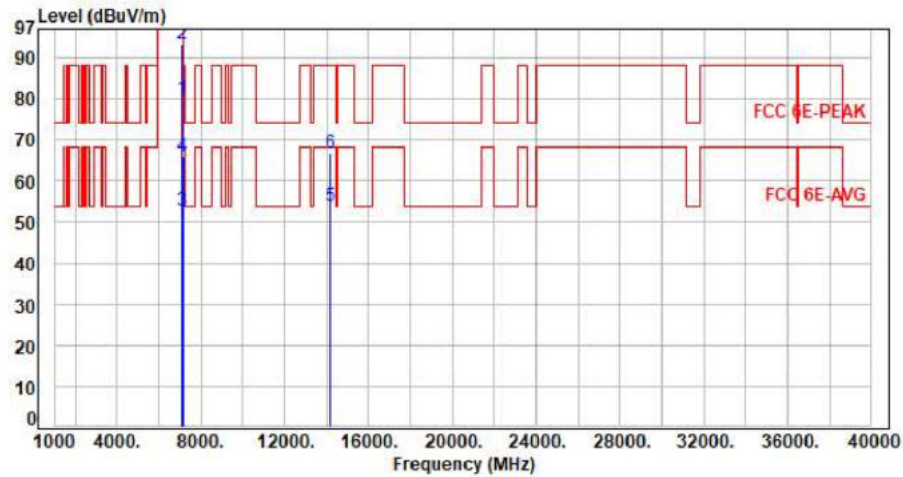


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7085.00	9.91	70.30	80.21	200.00	-119.79	Average	355	274	P
2	7085.00	9.91	83.51	93.42	200.00	-106.58	Peak	355	274	P
3	7125.00	10.05	42.63	52.68	68.20	-15.52	Average	355	274	P
4	7125.00	10.05	56.04	66.09	88.20	-22.11	Peak	355	274	P
5	14170.00	23.72	29.96	53.68	68.20	-14.52	Average	100	159	P
6	14170.00	23.72	42.87	66.59	88.20	-21.61	Peak	100	159	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

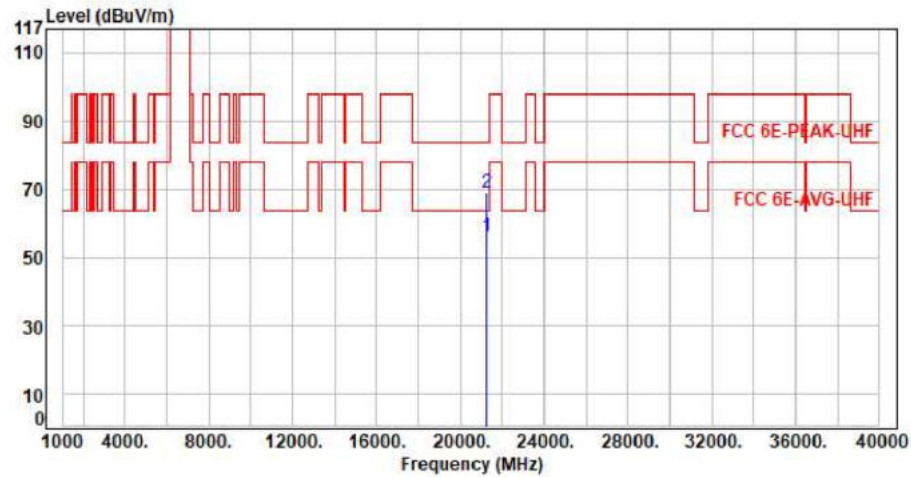


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	44.28	56.12	63.54	-7.42	Average	150	360	P
2	21255.00	11.84	57.11	68.95	83.54	-14.59	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

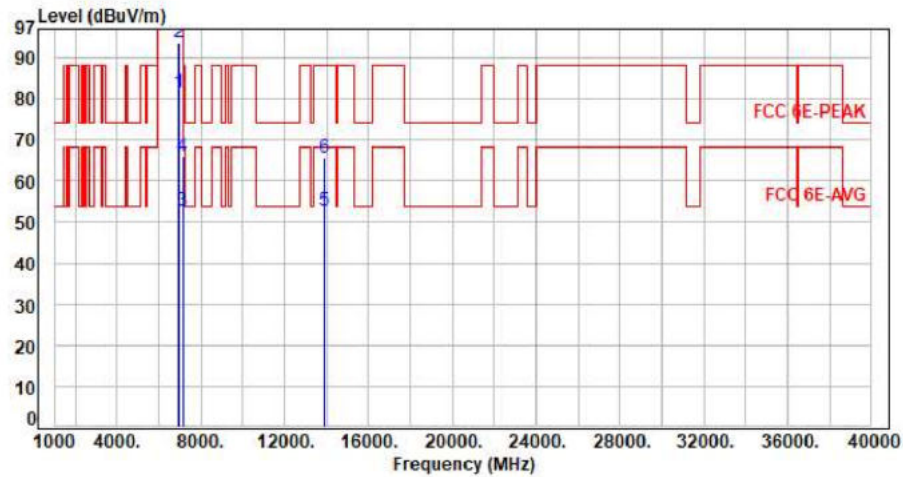


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	71.89	81.51	200.00	-118.49	Average	100	10	P
2	6945.00	9.62	83.93	93.55	200.00	-106.45	Peak	100	10	P
3	7125.00	10.05	42.67	52.72	68.20	-15.48	Average	100	10	P
4	7125.00	10.05	55.92	65.97	88.20	-22.23	Peak	100	10	P
5	13890.00	22.95	29.66	52.61	68.20	-15.59	Average	100	251	P
6	13890.00	22.95	42.78	65.73	88.20	-22.47	Peak	100	251	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

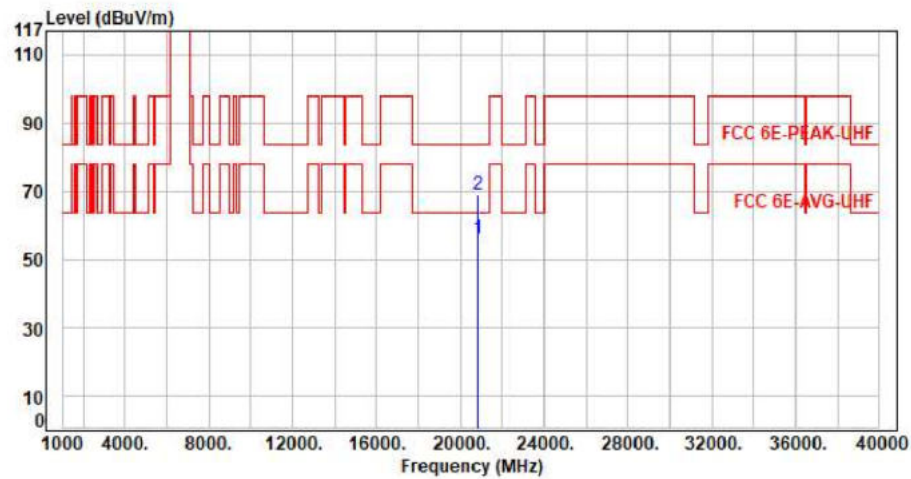


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	44.61	56.01	63.54	-7.53	Average	150	360	P
2	20835.00	11.40	57.35	68.75	83.54	-14.79	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

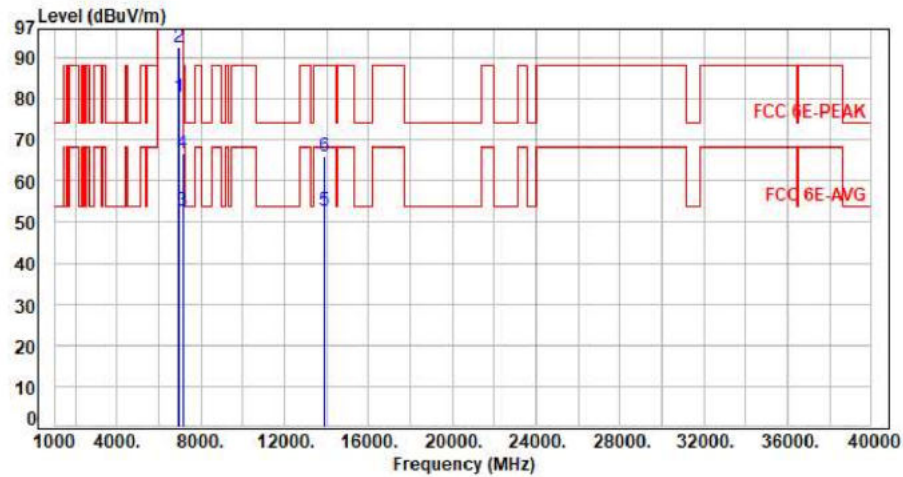


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	70.63	80.25	200.00	-119.75	Average	400	277	P
2	6945.00	9.62	82.81	92.43	200.00	-107.57	Peak	400	277	P
3	7125.00	10.05	42.85	52.90	68.20	-15.30	Average	400	277	P
4	7125.00	10.05	56.72	66.77	88.20	-21.43	Peak	400	277	P
5	13890.00	22.95	29.66	52.61	68.20	-15.59	Average	100	151	P
6	13890.00	22.95	42.94	65.89	88.20	-22.31	Peak	100	151	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

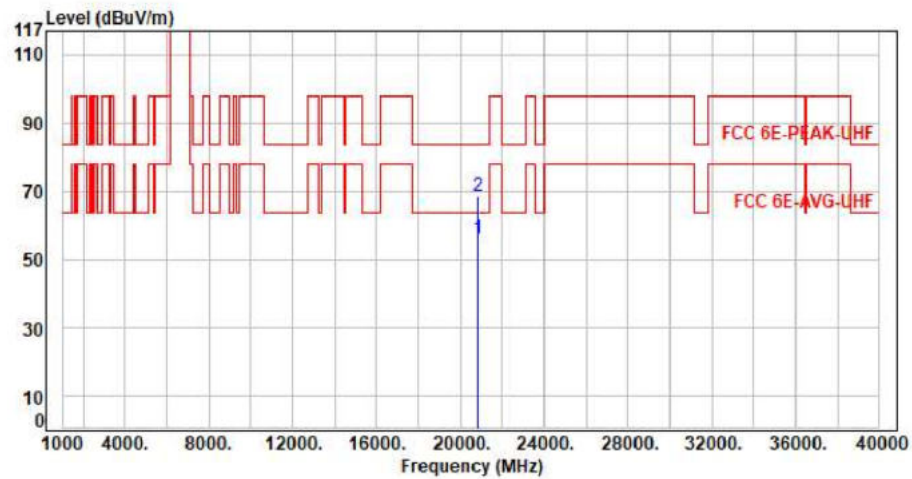

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	44.78	56.18	63.54	-7.36	Average	150	360	P
2	20835.00	11.40	56.94	68.34	83.54	-15.20	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

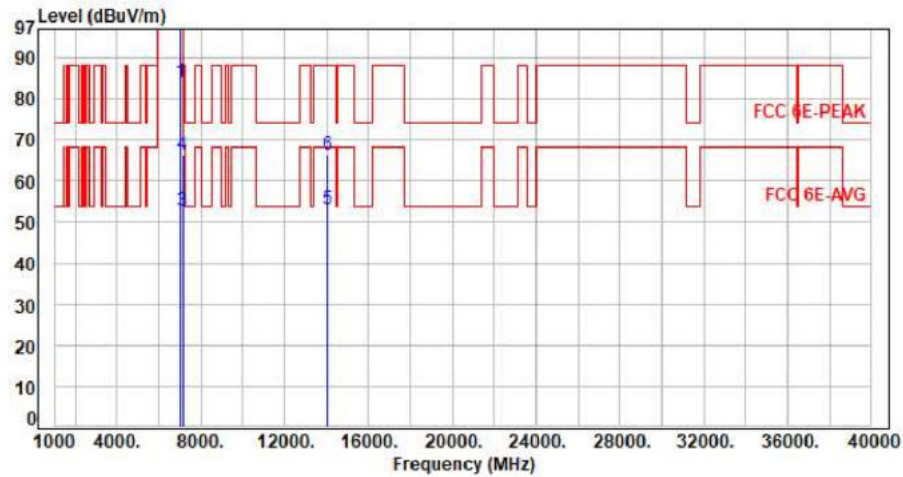


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	74.22	83.93	200.00	-116.07	Average	395	13	P
2	7025.00	9.71	87.56	97.27	200.00	-102.73	Peak	395	13	P
3	7125.00	10.05	42.59	52.64	68.20	-15.56	Average	395	13	P
4	7125.00	10.05	56.16	66.21	88.20	-21.99	Peak	395	13	P
5	14050.00	23.47	29.77	53.24	68.20	-14.96	Average	100	108	P
6	14050.00	23.47	42.81	66.28	88.20	-21.92	Peak	100	108	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

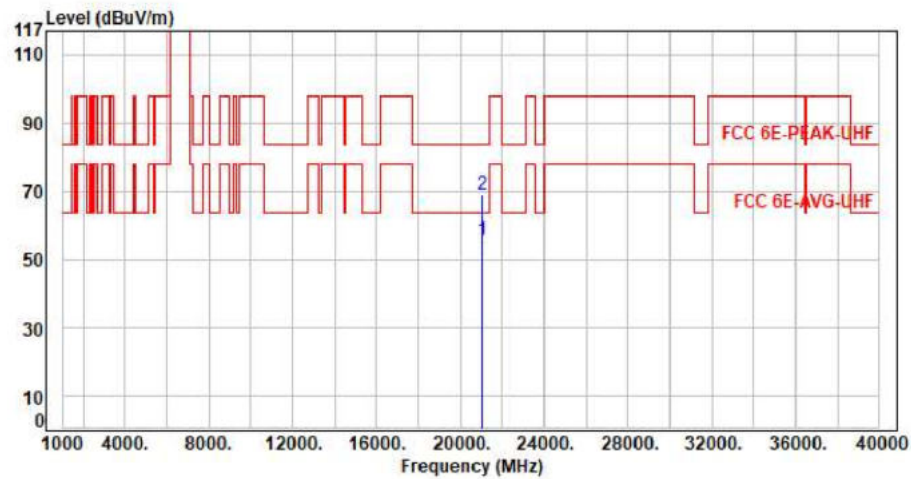


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	44.16	55.68	63.54	-7.86	Average	150	360	P
2	21075.00	11.52	57.21	68.73	83.54	-14.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

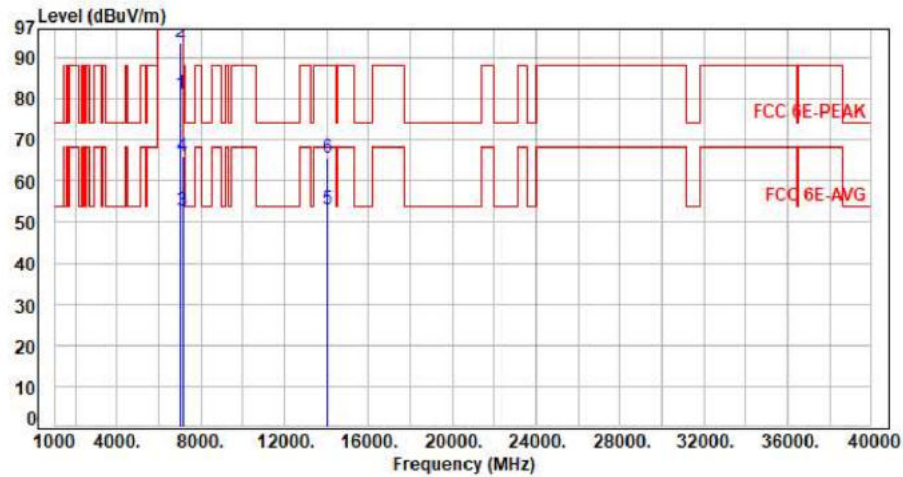


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	71.38	81.09	200.00	-118.91	Average	396	283	P
2	7025.00	9.71	83.81	93.52	200.00	-106.48	Peak	396	283	P
3	7125.00	10.05	42.62	52.67	68.20	-15.53	Average	396	283	P
4	7125.00	10.05	56.04	66.09	88.20	-22.11	Peak	396	283	P
5	14050.00	23.47	29.64	53.11	68.20	-15.09	Average	100	164	P
6	14050.00	23.47	42.09	65.56	88.20	-22.64	Peak	100	164	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

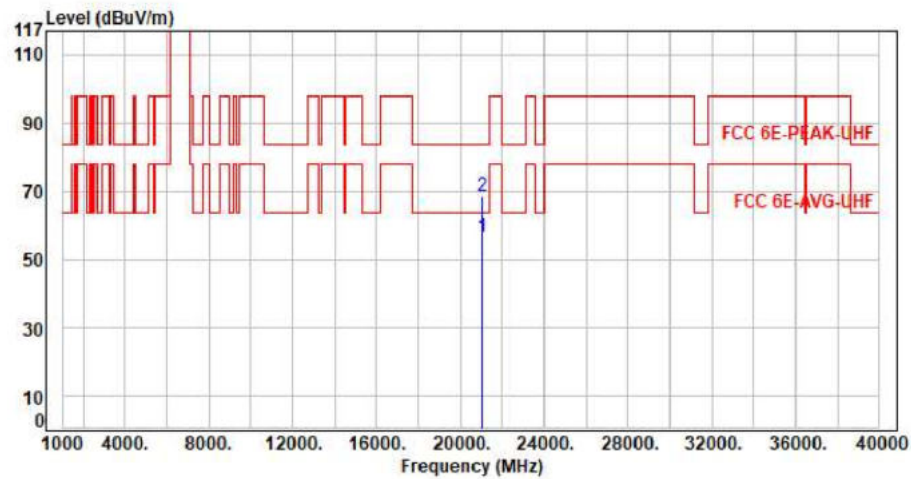


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	44.89	56.41	63.54	-7.13	Average	150	360	P
2	21075.00	11.52	57.08	68.60	83.54	-14.94	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

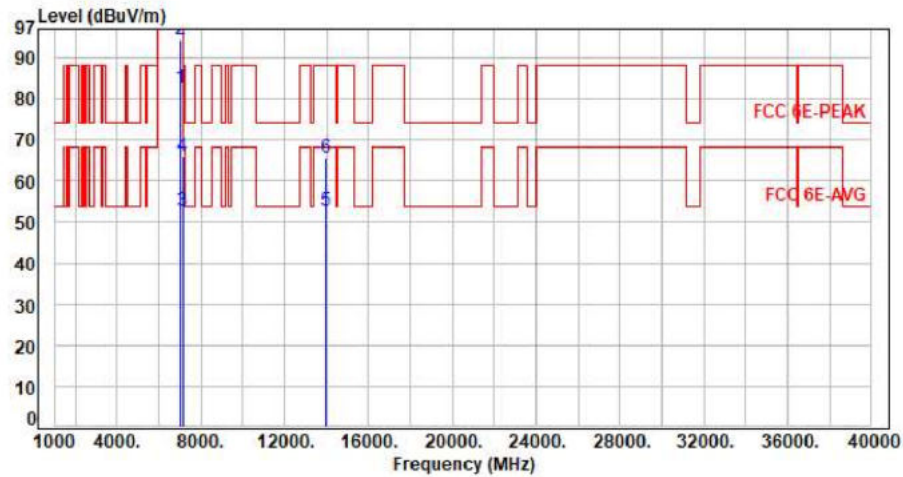


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	73.00	82.63	200.00	-117.37	Average	100	14	P
2	6985.00	9.63	84.87	94.50	200.00	-105.50	Peak	100	14	P
3	7125.00	10.05	42.86	52.91	68.20	-15.29	Average	100	14	P
4	7125.00	10.05	55.83	65.88	88.20	-22.32	Peak	100	14	P
5	13970.00	23.15	29.67	52.82	68.20	-15.38	Average	100	146	P
6	13970.00	23.15	42.52	65.67	88.20	-22.53	Peak	100	146	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

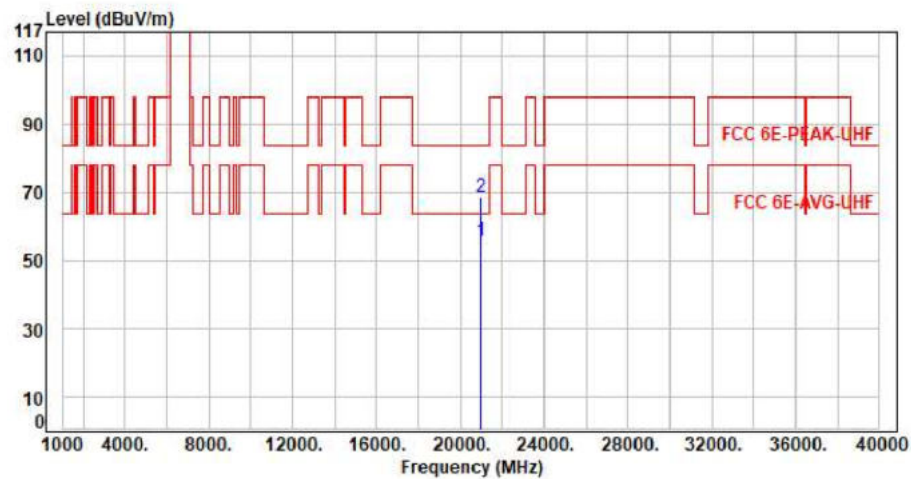

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.21	55.69	63.54	-7.85	Average	150	360	P
2	20955.00	11.48	57.23	68.71	83.54	-14.83	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

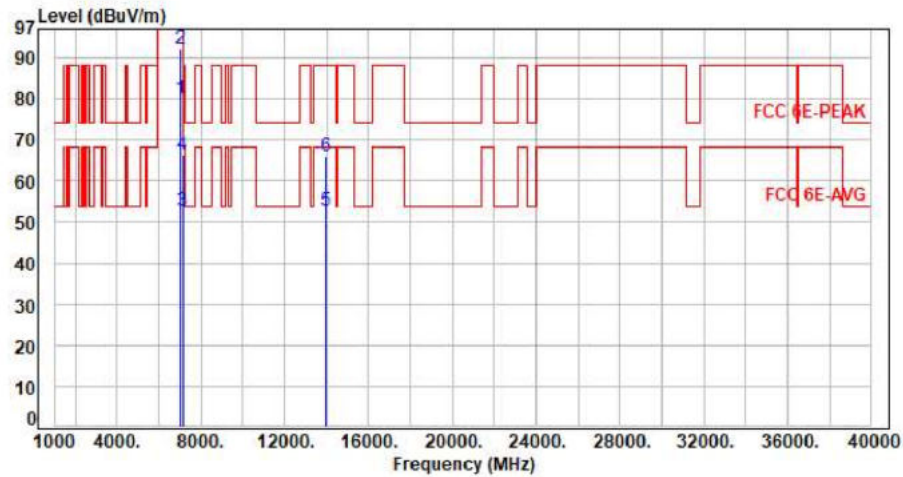


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	70.35	79.98	200.00	-120.02	Average	395	281	P
2	6985.00	9.63	82.55	92.18	200.00	-107.82	Peak	395	281	P
3	7125.00	10.05	42.74	52.79	68.20	-15.41	Average	395	281	P
4	7125.00	10.05	56.26	66.31	88.20	-21.89	Peak	395	281	P
5	13970.00	23.15	29.54	52.69	68.20	-15.51	Average	100	275	P
6	13970.00	23.15	42.98	66.13	88.20	-22.07	Peak	100	275	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Main

Test Mode : 1TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

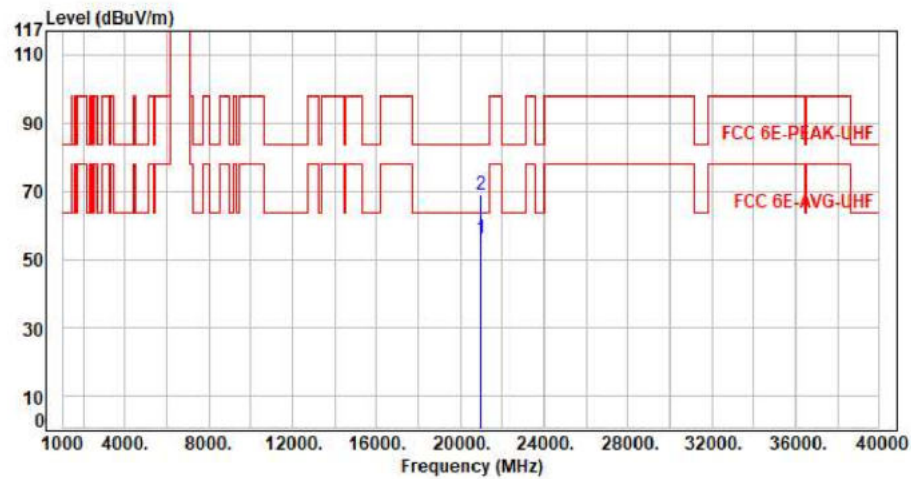


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	44.47	55.95	63.54	-7.59	Average	150	360	P
2	20955.00	11.48	57.65	69.13	83.54	-14.41	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

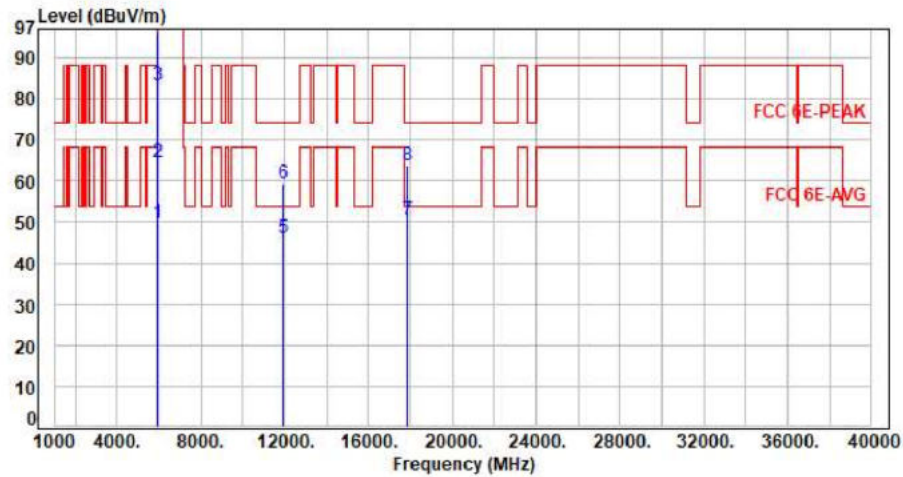


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.24	49.90	68.20	-18.30	Average	280	19	P
2	5925.00	7.66	56.86	64.52	88.20	-23.68	Peak	280	19	P
3	5955.00	7.68	75.57	83.25	200.00	-116.75	Average	280	19	P
4	5955.00	7.68	88.03	95.71	200.00	-104.29	Peak	280	19	P
5	11910.00	18.06	28.14	46.20	54.00	-7.80	Average	100	222	P
6	11910.00	18.06	41.42	59.48	74.00	-14.52	Peak	100	222	P
7	17865.00	27.77	22.78	50.55	54.00	-3.45	Average	100	168	P
8	17865.00	27.77	36.14	63.91	74.00	-10.09	Peak	100	168	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

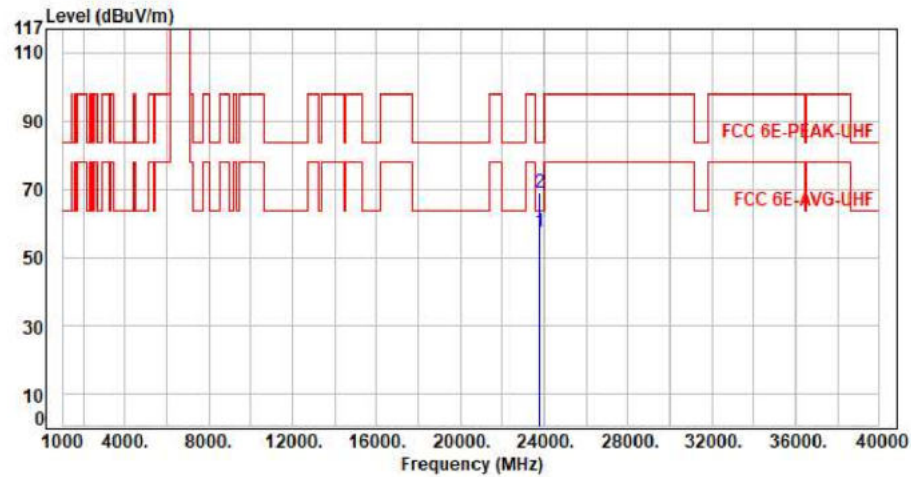


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	46.07	57.26	63.54	-6.28	Average	150	360	P
2	23820.00	11.19	57.86	69.05	83.54	-14.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

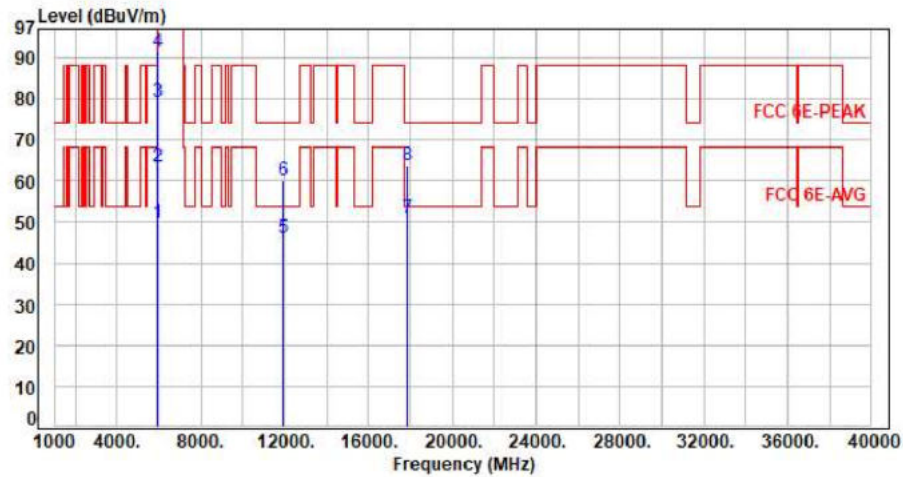


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.08	49.74	68.20	-18.46	Average	372	284	P
2	5925.00	7.66	55.93	63.59	88.20	-24.61	Peak	372	284	P
3	5955.00	7.68	71.70	79.38	200.00	-120.62	Average	372	284	P
4	5955.00	7.68	83.84	91.52	200.00	-108.48	Peak	372	284	P
5	11910.00	18.06	28.11	46.17	54.00	-7.83	Average	100	119	P
6	11910.00	18.06	42.08	60.14	74.00	-13.86	Peak	100	119	P
7	17865.00	27.77	23.09	50.86	54.00	-3.14	Average	100	138	P
8	17865.00	27.77	36.04	63.81	74.00	-10.19	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH01 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

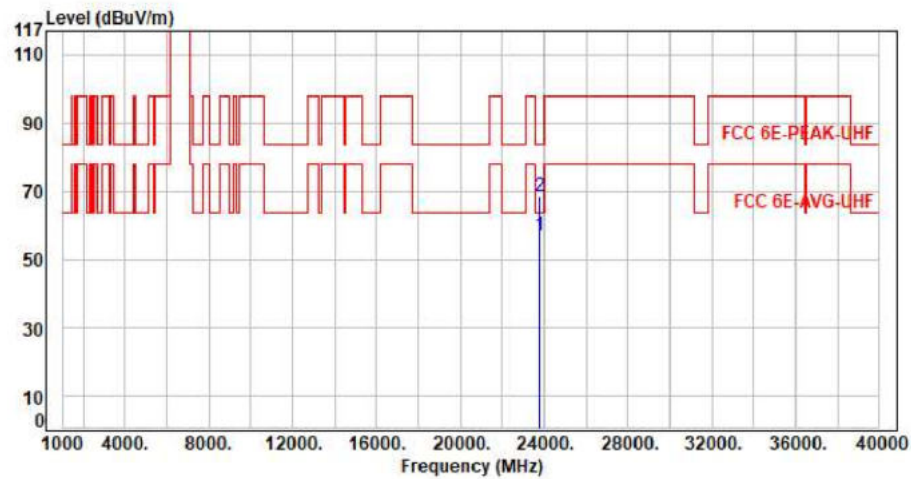


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23820.00	11.19	45.78	56.97	63.54	-6.57	Average	150	360	P
2	23820.00	11.19	57.14	68.33	83.54	-15.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

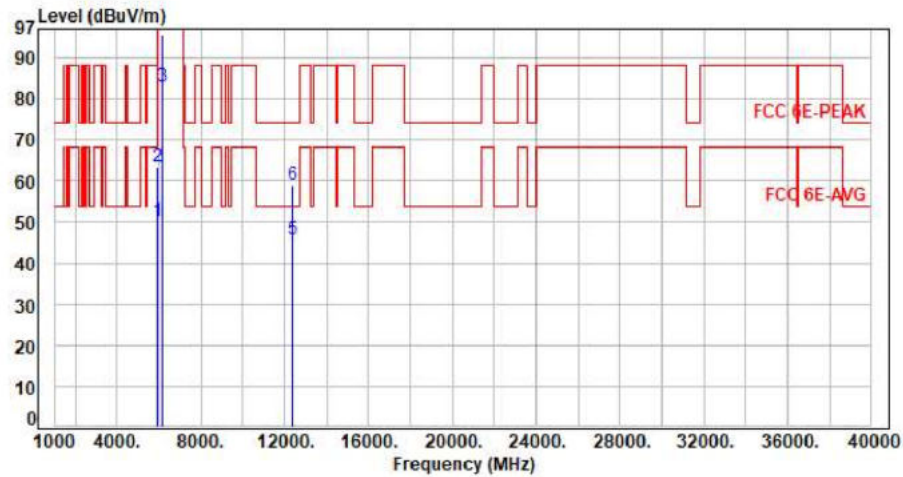


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.58	50.24	68.20	-17.96	Average	277	18	P
2	5925.00	7.66	55.87	63.53	88.20	-24.67	Peak	277	18	P
3	6175.00	8.35	74.55	82.90	200.00	-117.10	Average	277	18	P
4	6175.00	8.35	87.23	95.58	200.00	-104.42	Peak	277	18	P
5	12350.00	17.76	27.79	45.55	54.00	-8.45	Average	100	235	P
6	12350.00	17.76	41.11	58.87	74.00	-15.13	Peak	100	235	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

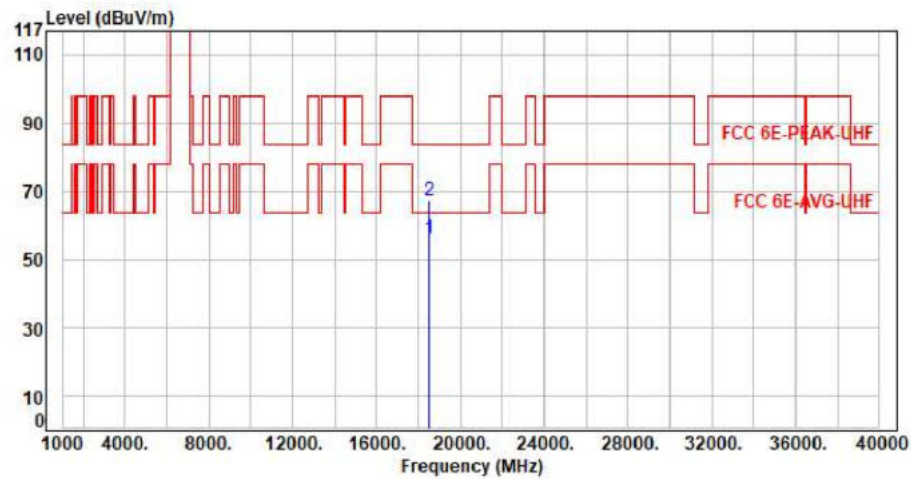


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	45.67	56.22	63.54	-7.32	Average	150	360	P
2	18525.00	10.55	56.44	66.99	83.54	-16.55	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

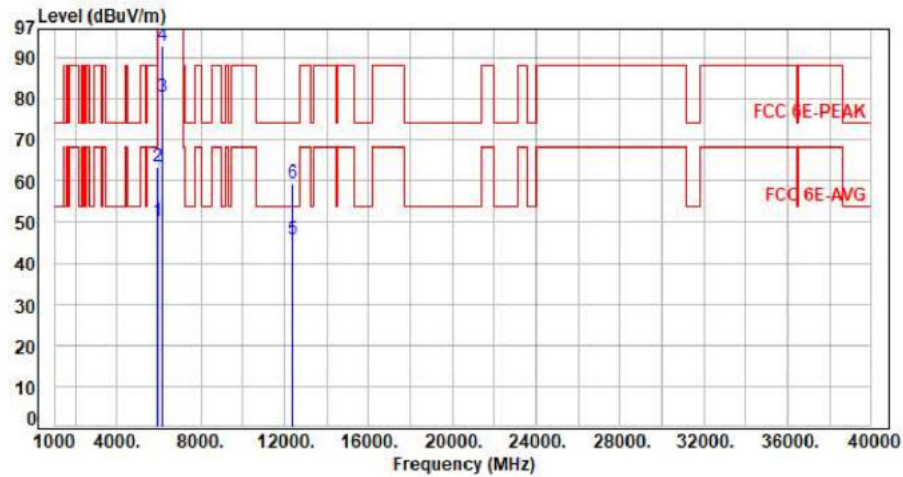


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.63	50.29	68.20	-17.91	Average	374	285	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	374	285	P
3	6175.00	8.35	71.89	80.24	200.00	-119.76	Average	374	285	P
4	6175.00	8.35	84.74	93.09	200.00	-106.91	Peak	374	285	P
5	12350.00	17.76	28.02	45.78	54.00	-8.22	Average	100	115	P
6	12350.00	17.76	41.68	59.44	74.00	-14.56	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH45 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

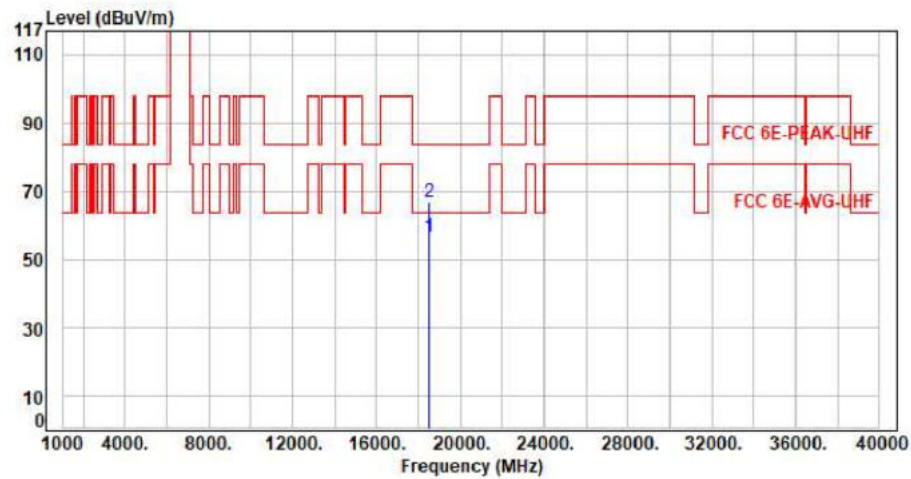


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18525.00	10.55	45.95	56.50	63.54	-7.04	Average	150	360	P
2	18525.00	10.55	56.11	66.66	83.54	-16.88	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

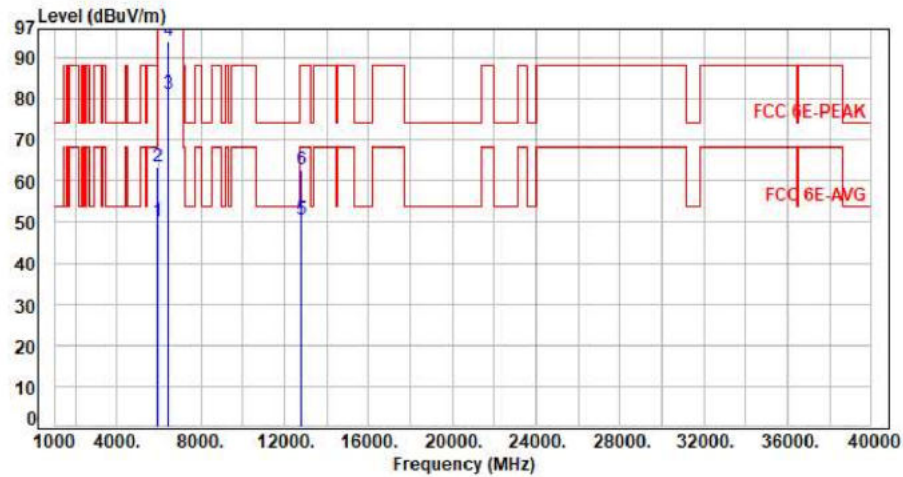


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.34	50.00	68.20	-18.20	Average	296	5	P
2	5925.00	7.66	55.81	63.47	88.20	-24.73	Peak	296	5	P
3	6415.00	8.34	72.86	81.20	200.00	-118.80	Average	296	5	P
4	6415.00	8.34	85.53	93.87	200.00	-106.13	Peak	296	5	P
5	12830.00	18.92	31.50	50.42	68.20	-17.78	Average	100	124	P
6	12830.00	18.92	43.93	62.85	88.20	-25.35	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

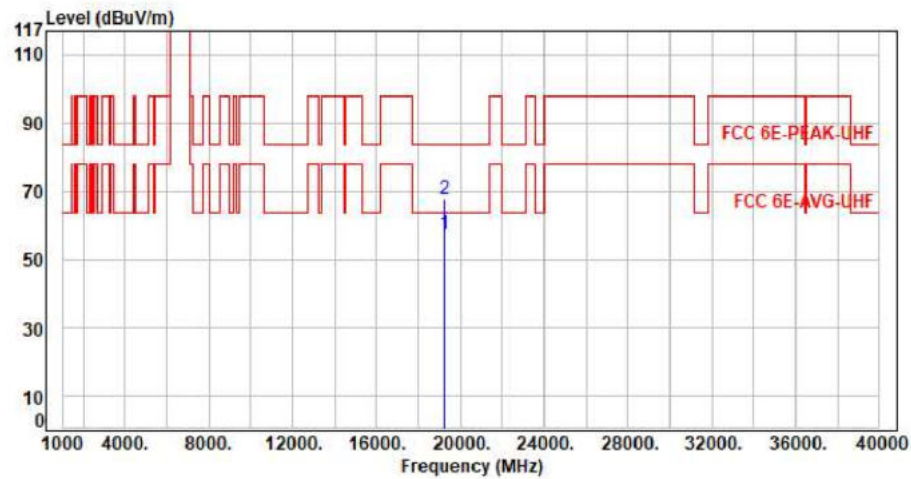


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.97	57.34	63.54	-6.20	Average	150	360	P
2	19245.00	11.37	56.44	67.81	83.54	-15.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

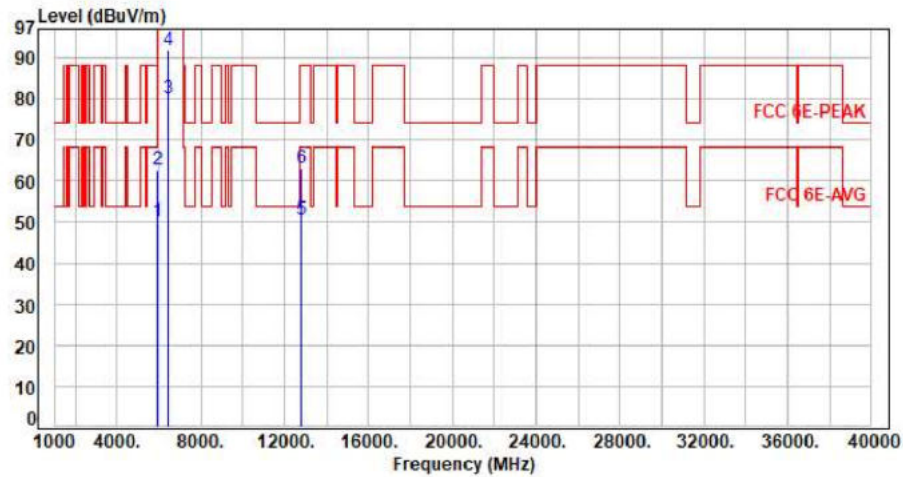


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.35	50.01	68.20	-18.19	Average	395	81	P
2	5925.00	7.66	55.13	62.79	88.20	-25.41	Peak	395	81	P
3	6415.00	8.34	71.51	79.85	200.00	-120.15	Average	395	81	P
4	6415.00	8.34	83.66	92.00	200.00	-108.00	Peak	395	81	P
5	12830.00	18.92	31.56	50.48	68.20	-17.72	Average	100	188	P
6	12830.00	18.92	44.16	63.08	88.20	-25.12	Peak	100	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH93 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

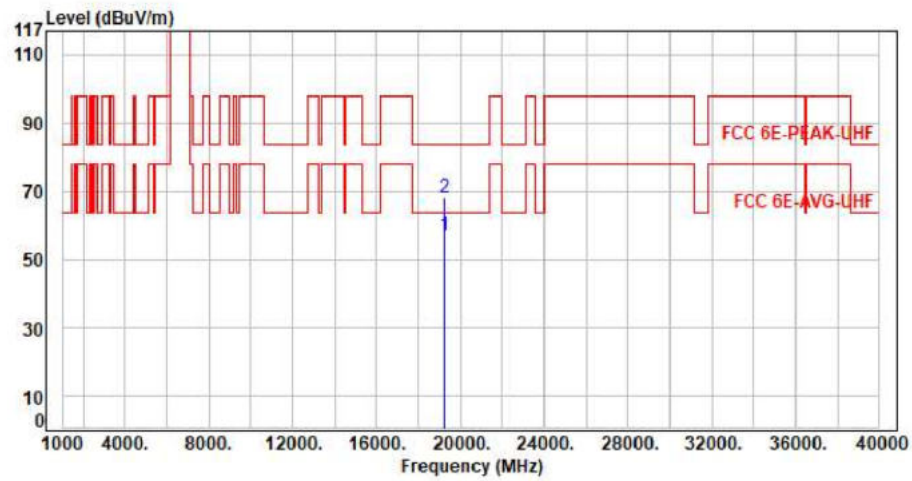


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19245.00	11.37	45.42	56.79	63.54	-6.75	Average	150	360	P
2	19245.00	11.37	56.87	68.24	83.54	-15.30	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

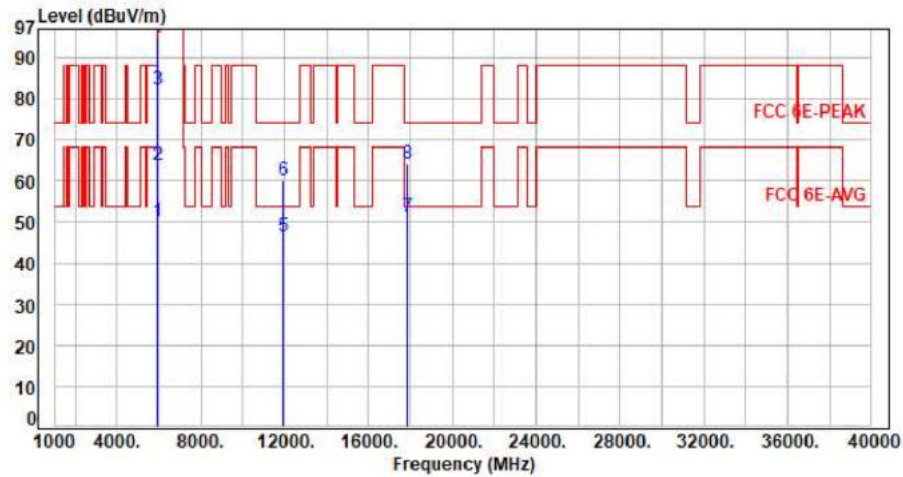

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.50	50.16	68.20	-18.04	Average	280	20	P
2	5925.00	7.66	55.97	63.63	88.20	-24.57	Peak	280	20	P
3	5965.00	7.71	74.48	82.19	200.00	-117.81	Average	280	20	P
4	5965.00	7.71	87.11	94.82	200.00	-105.18	Peak	280	20	P
5	11930.00	18.05	28.49	46.54	54.00	-7.46	Average	100	228	P
6	11930.00	18.05	42.12	60.17	74.00	-13.83	Peak	100	228	P
7	17895.00	27.89	23.24	51.13	54.00	-2.87	Average	100	287	P
8	17895.00	27.89	36.35	64.24	74.00	-9.76	Peak	100	287	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

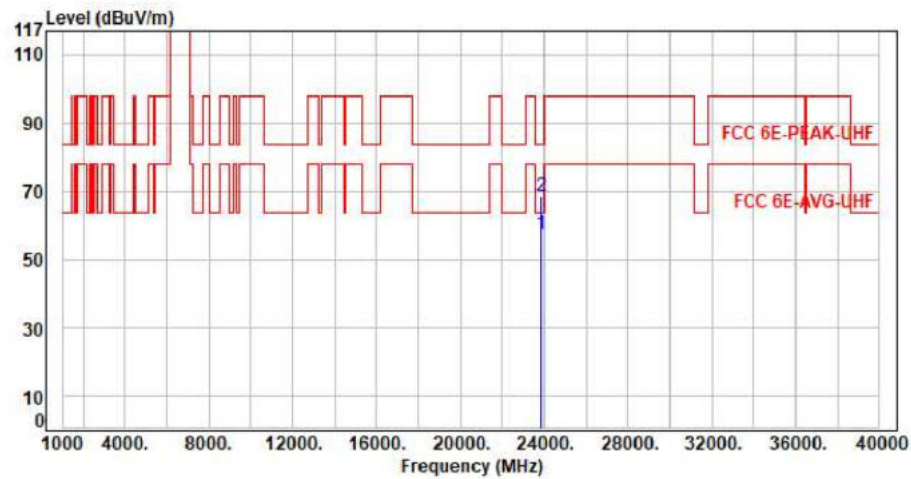


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	46.34	57.54	63.54	-6.00	Average	150	360	P
2	23860.00	11.20	57.15	68.35	83.54	-15.19	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

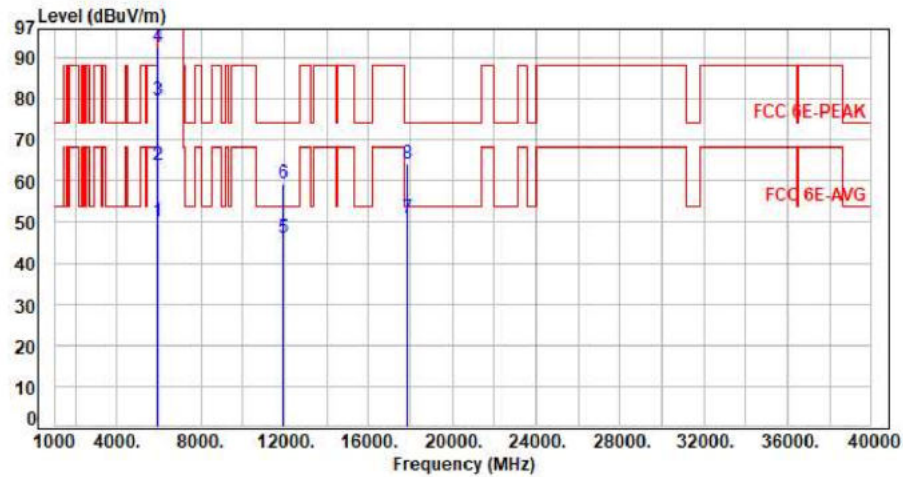

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.51	50.17	68.20	-18.03	Average	377	289	P
2	5925.00	7.66	56.23	63.89	88.20	-24.31	Peak	377	289	P
3	5965.00	7.71	71.89	79.60	200.00	-120.40	Average	377	289	P
4	5965.00	7.71	84.88	92.59	200.00	-107.41	Peak	377	289	P
5	11930.00	18.05	28.09	46.14	54.00	-7.86	Average	100	116	P
6	11930.00	18.05	41.48	59.53	74.00	-14.47	Peak	100	116	P
7	17895.00	27.89	23.01	50.90	54.00	-3.10	Average	100	140	P
8	17895.00	27.89	36.19	64.08	74.00	-9.92	Peak	100	140	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH03 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

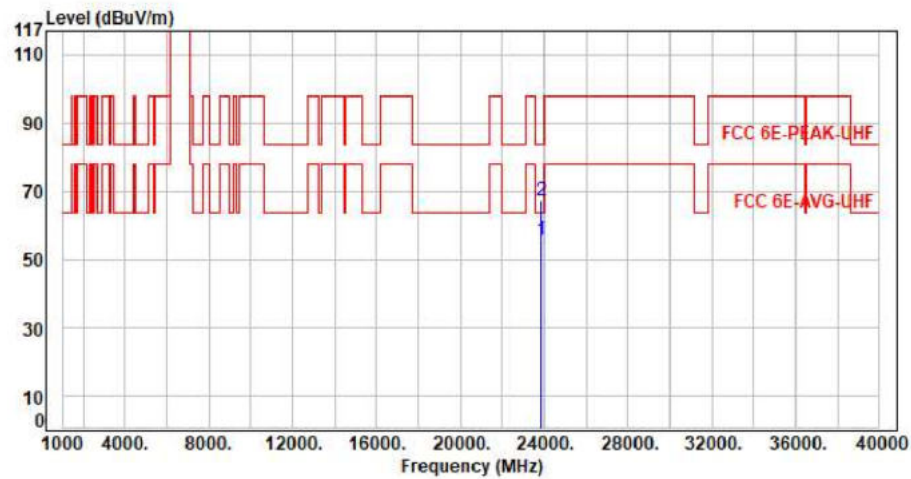


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	44.39	55.59	63.54	-7.95	Average	150	360	P
2	23860.00	11.20	55.76	66.96	83.54	-16.58	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

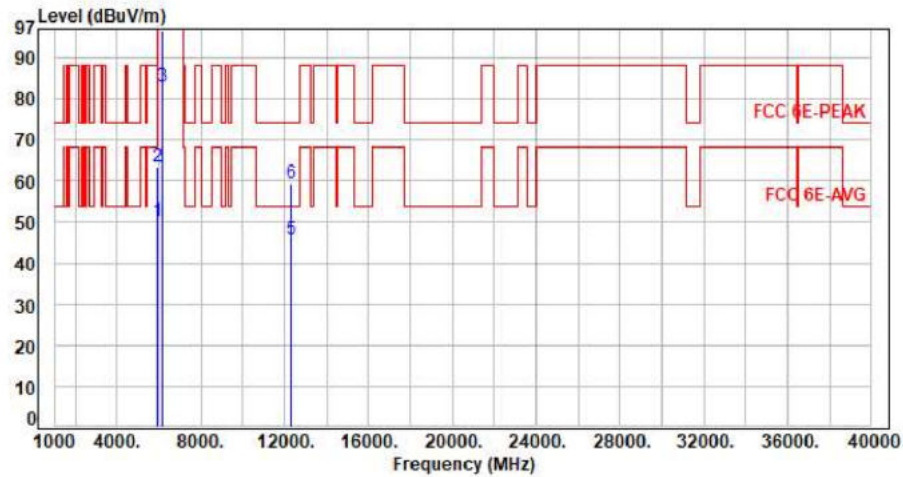


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.42	50.08	68.20	-18.12	Average	283	23	P
2	5925.00	7.66	55.84	63.50	88.20	-24.70	Peak	283	23	P
3	6165.00	8.34	74.68	83.02	200.00	-116.98	Average	283	23	P
4	6165.00	8.34	88.39	96.73	200.00	-103.27	Peak	283	23	P
5	12330.00	17.71	28.11	45.82	54.00	-8.18	Average	100	232	P
6	12330.00	17.71	41.77	59.48	74.00	-14.52	Peak	100	232	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

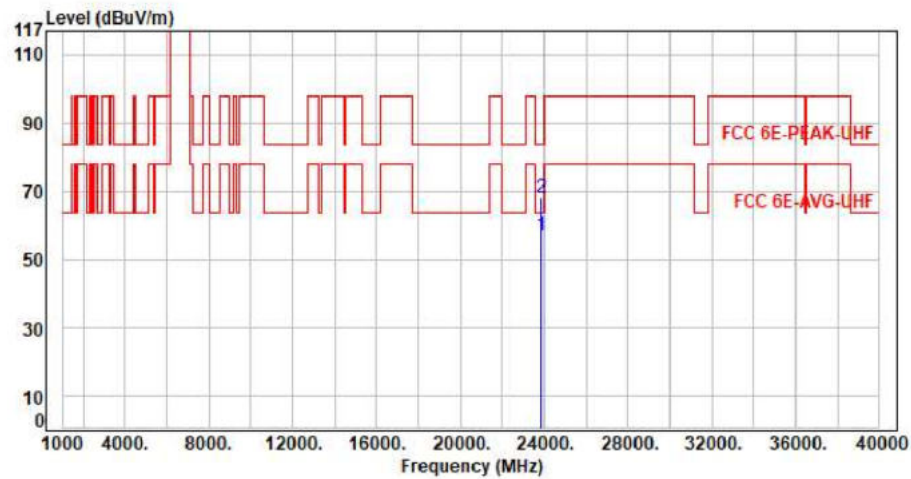

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23860.00	11.20	45.67	56.87	63.54	-6.67	Average	150	360	P
2	23860.00	11.20	56.70	67.90	83.54	-15.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

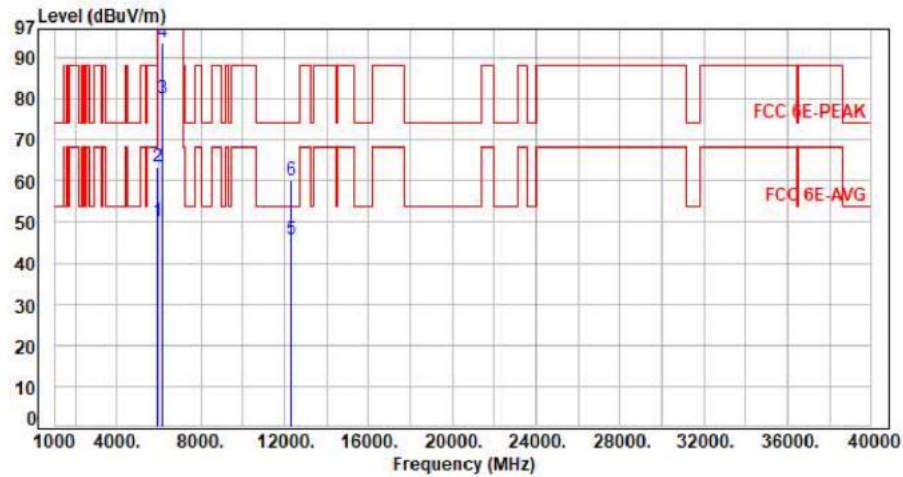


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.50	50.16	68.20	-18.04	Average	372	282	P
2	5925.00	7.66	55.94	63.60	88.20	-24.60	Peak	372	282	P
3	6165.00	8.34	71.69	80.03	200.00	-119.97	Average	372	282	P
4	6165.00	8.34	85.48	93.82	200.00	-106.18	Peak	372	282	P
5	12330.00	17.71	28.12	45.83	54.00	-8.17	Average	100	116	P
6	12330.00	17.71	42.23	59.94	74.00	-14.06	Peak	100	116	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x40 CH43 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

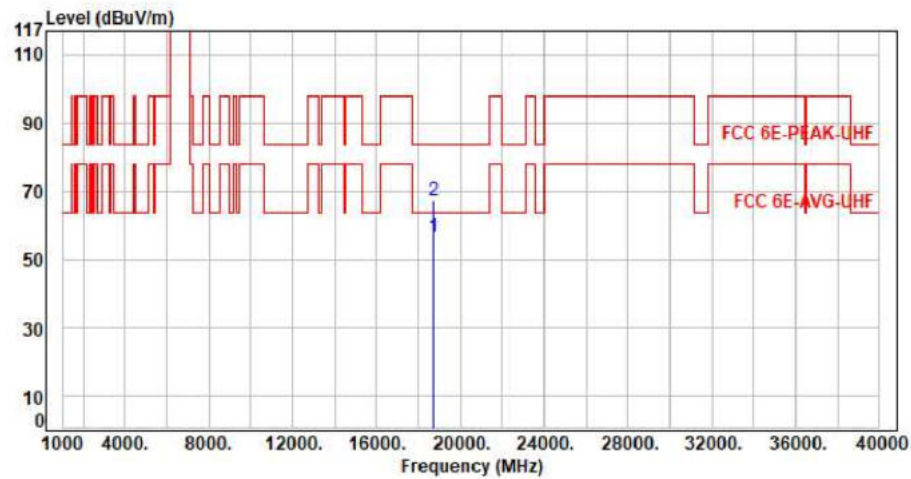


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18735.00	10.87	45.46	56.33	63.54	-7.21	Average	150	360	P
2	18735.00	10.87	56.29	67.16	83.54	-16.38	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

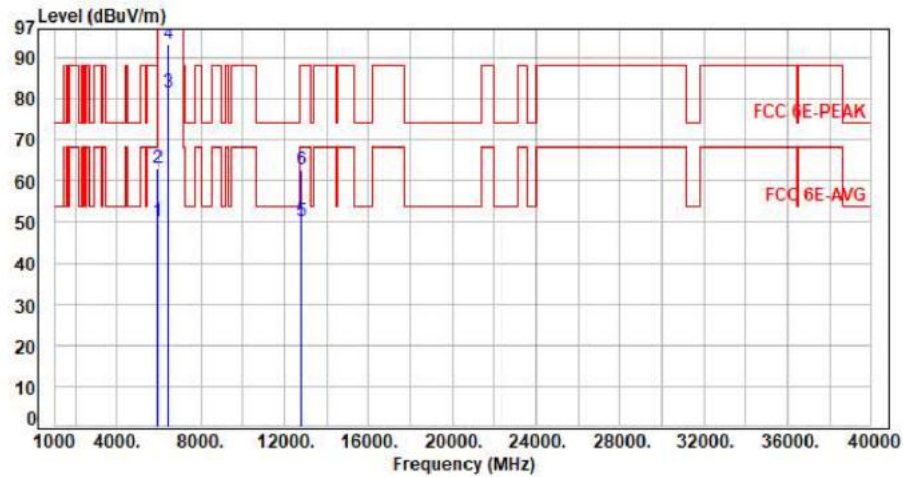


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.37	50.03	68.20	-18.17	Average	286	16	P
2	5925.00	7.66	55.35	63.01	88.20	-25.19	Peak	286	16	P
3	6405.00	8.35	73.12	81.47	200.00	-118.53	Average	286	16	P
4	6405.00	8.35	85.08	93.43	200.00	-106.57	Peak	286	16	P
5	12810.00	18.88	31.43	50.31	68.20	-17.89	Average	100	221	P
6	12810.00	18.88	43.91	62.79	88.20	-25.41	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

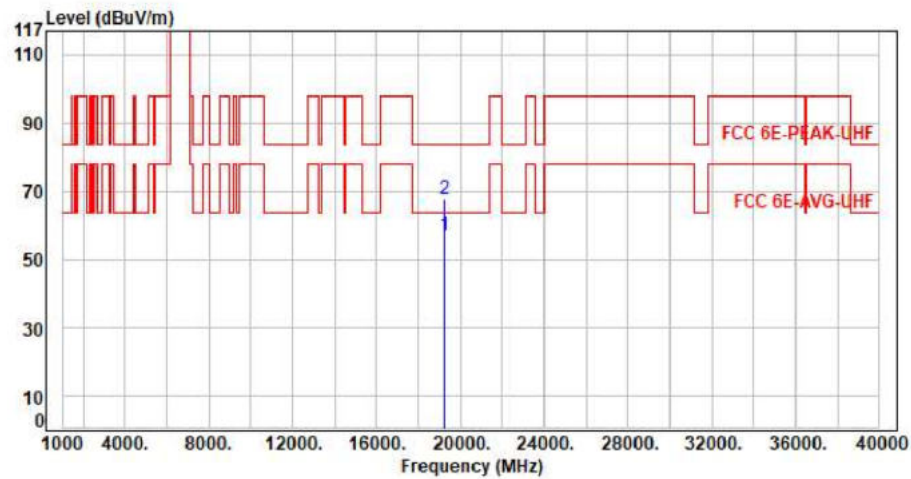


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	45.69	56.93	63.54	-6.61	Average	150	360	P
2	19215.00	11.24	56.53	67.77	83.54	-15.77	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

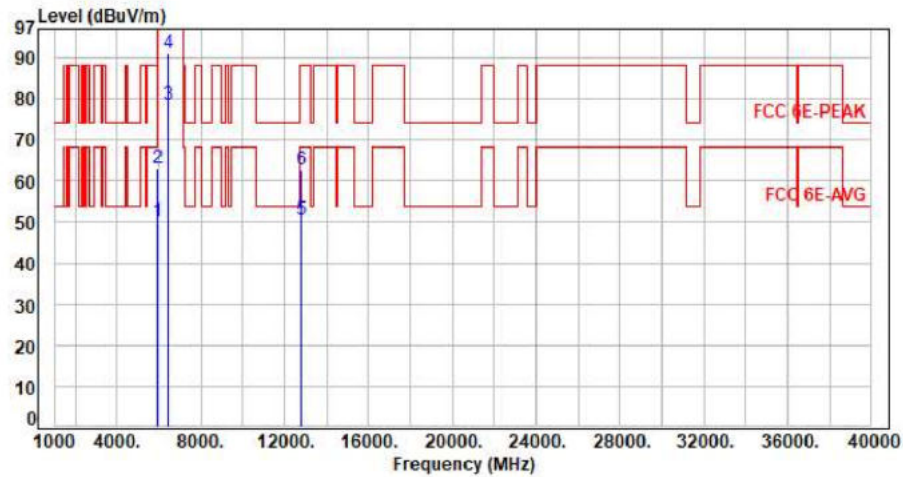


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.35	50.01	68.20	-18.19	Average	393	92	P
2	5925.00	7.66	55.38	63.04	88.20	-25.16	Peak	393	92	P
3	6405.00	8.35	70.31	78.66	200.00	-121.34	Average	393	92	P
4	6405.00	8.35	82.74	91.09	200.00	-108.91	Peak	393	92	P
5	12810.00	18.88	31.72	50.60	68.20	-17.60	Average	100	331	P
6	12810.00	18.88	43.78	62.66	88.20	-25.54	Peak	100	331	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH91 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

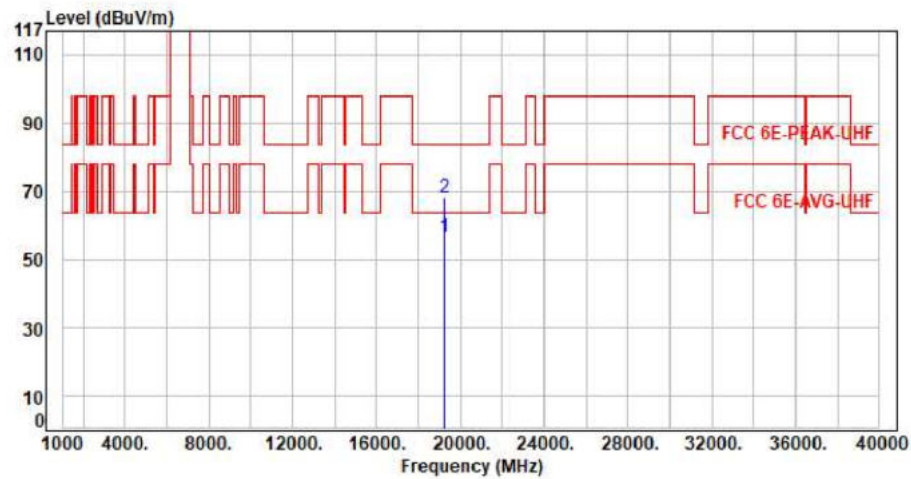


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19215.00	11.24	45.45	56.69	63.54	-6.85	Average	150	360	P
2	19215.00	11.24	56.65	67.89	83.54	-15.65	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

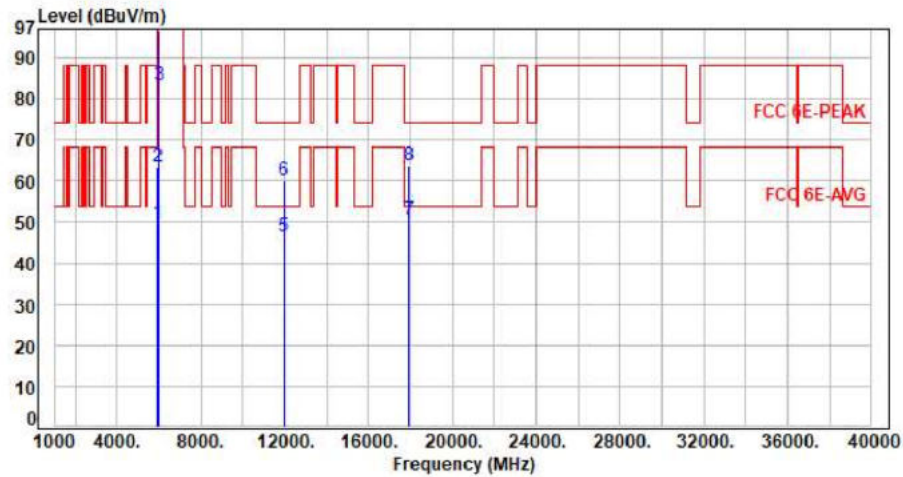

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.17	49.83	68.20	-18.37	Average	294	27	P
2	5925.00	7.66	55.92	63.58	88.20	-24.62	Peak	294	27	P
3	5985.00	7.75	75.57	83.32	200.00	-116.68	Average	294	27	P
4	5985.00	7.75	88.76	96.51	200.00	-103.49	Peak	294	27	P
5	11970.00	18.02	28.43	46.45	54.00	-7.55	Average	100	225	P
6	11970.00	18.02	42.14	60.16	74.00	-13.84	Peak	100	225	P
7	17955.00	28.04	22.56	50.60	54.00	-3.40	Average	100	296	P
8	17955.00	28.04	35.80	63.84	74.00	-10.16	Peak	100	296	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

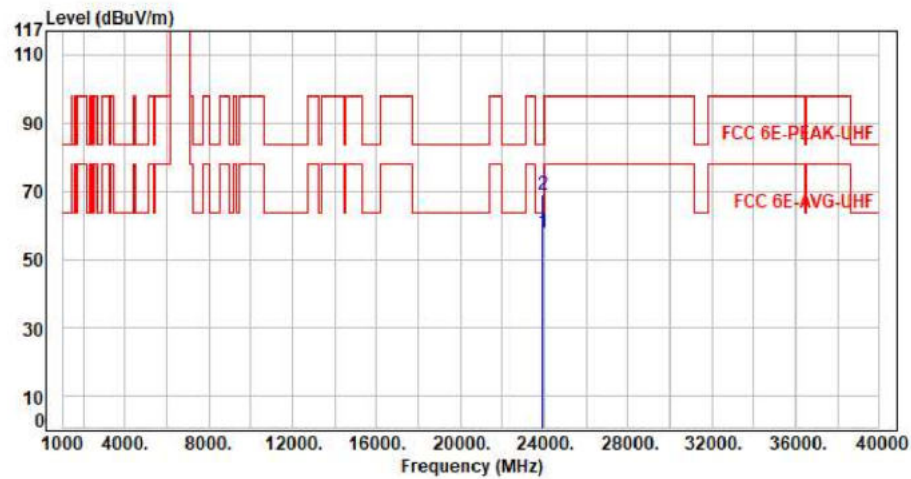

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	46.28	57.64	63.54	-5.90	Average	150	360	P
2	23940.00	11.36	57.54	68.90	83.54	-14.64	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

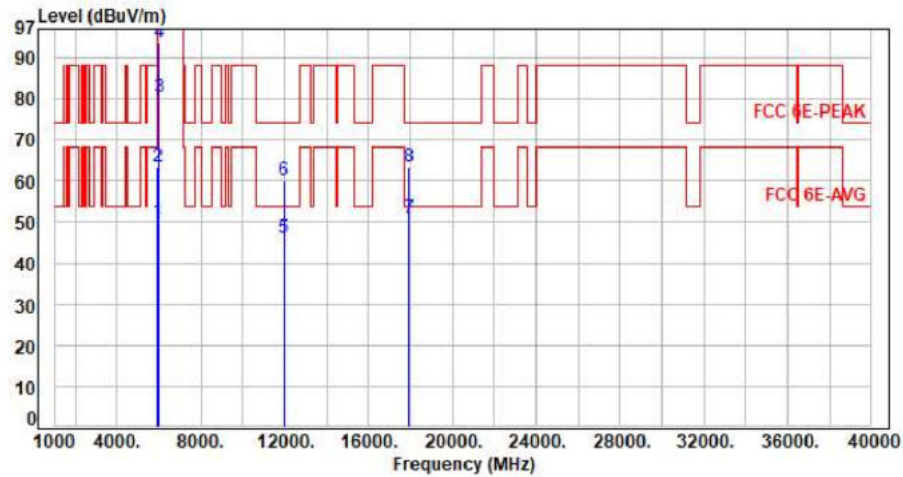


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.32	49.98	68.20	-18.22	Average	385	274	P
2	5925.00	7.66	55.84	63.50	88.20	-24.70	Peak	385	274	P
3	5985.00	7.75	72.58	80.33	200.00	-119.67	Average	385	274	P
4	5985.00	7.75	85.82	93.57	200.00	-106.43	Peak	385	274	P
5	11970.00	18.02	28.09	46.11	54.00	-7.89	Average	100	123	P
6	11970.00	18.02	42.09	60.11	74.00	-13.89	Peak	100	123	P
7	17955.00	28.04	22.79	50.83	54.00	-3.17	Average	100	136	P
8	17955.00	28.04	35.33	63.37	74.00	-10.63	Peak	100	136	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH07 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

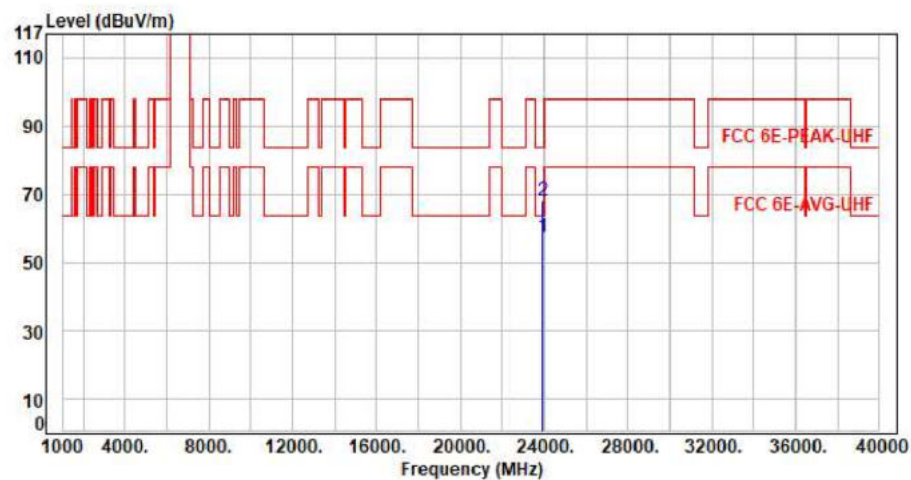

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	23940.00	11.36	45.83	57.19	63.54	-6.35	Average	150	360	P
2	23940.00	11.36	56.83	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

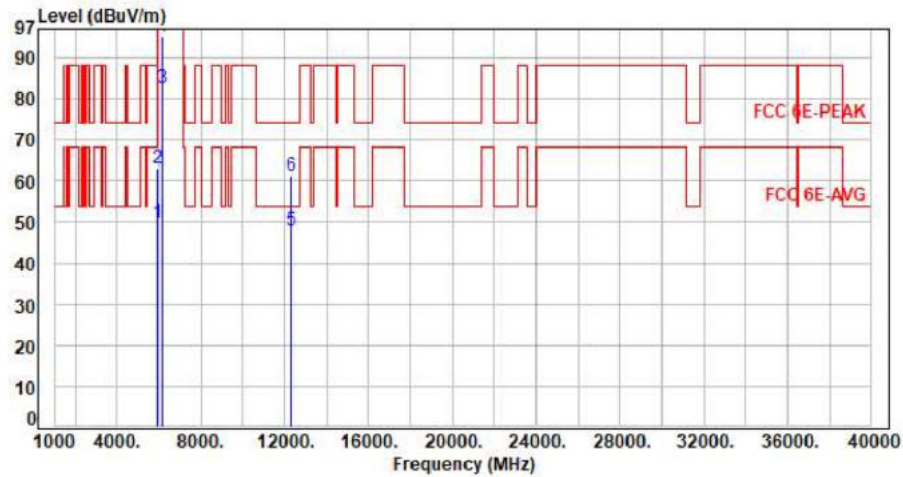


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.23	49.89	68.20	-18.31	Average	296	22	P
2	5925.00	7.66	55.37	63.03	88.20	-25.17	Peak	296	22	P
3	6145.00	8.31	74.38	82.69	200.00	-117.31	Average	296	22	P
4	6145.00	8.31	86.97	95.28	200.00	-104.72	Peak	296	22	P
5	12290.00	17.62	30.48	48.10	54.00	-5.90	Average	100	219	P
6	12290.00	17.62	43.72	61.34	74.00	-12.66	Peak	100	219	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH39 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

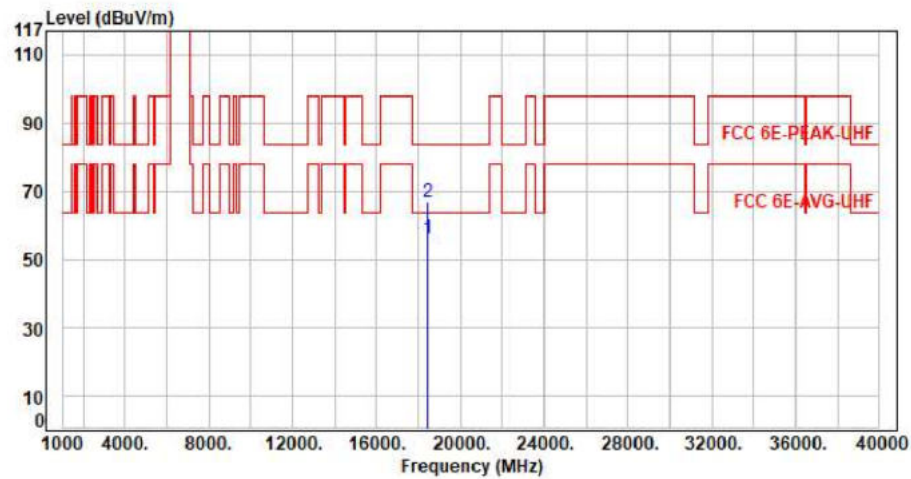

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	18435.00	10.20	45.98	56.18	63.54	-7.36	Average	150	360	P
2	18435.00	10.20	56.61	66.81	83.54	-16.73	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor