




For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH119 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

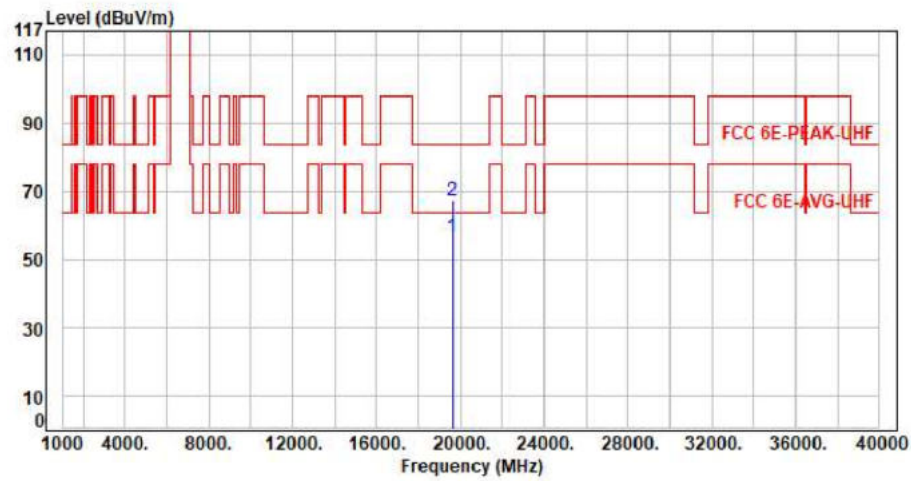


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19635.00	11.58	45.10	56.68	63.54	-6.86	Average	150	360	P
2	19635.00	11.58	55.79	67.37	83.54	-16.17	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

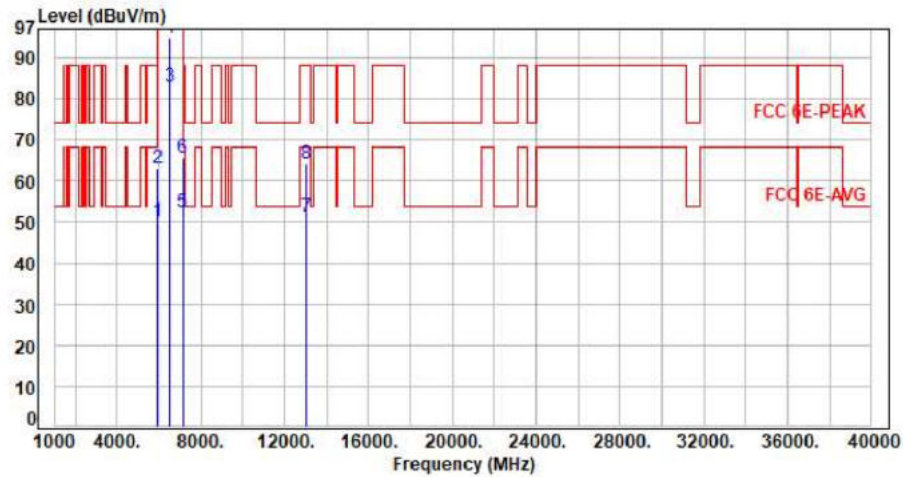

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.63	50.29	68.20	-17.91	Average	303	15	P
2	5925.00	7.66	55.56	63.22	88.20	-24.98	Peak	303	15	P
3	6505.00	8.37	74.76	83.13	200.00	-116.87	Average	303	15	P
4	6505.00	8.37	86.29	94.66	200.00	-105.34	Peak	303	15	P
5	7125.00	10.05	42.35	52.40	68.20	-15.80	Average	303	15	P
6	7125.00	10.05	55.68	65.73	88.20	-22.47	Peak	303	15	P
7	13010.00	19.69	31.58	51.27	68.20	-16.93	Average	100	224	P
8	13010.00	19.69	44.35	64.04	88.20	-24.16	Peak	100	224	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

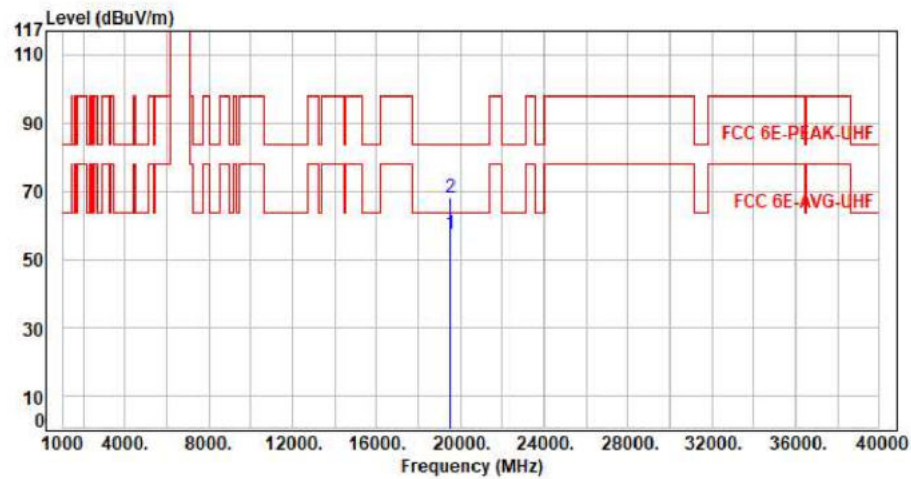


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.48	57.39	63.54	-6.15	Average	150	360	P
2	19515.00	11.91	56.21	68.12	83.54	-15.42	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

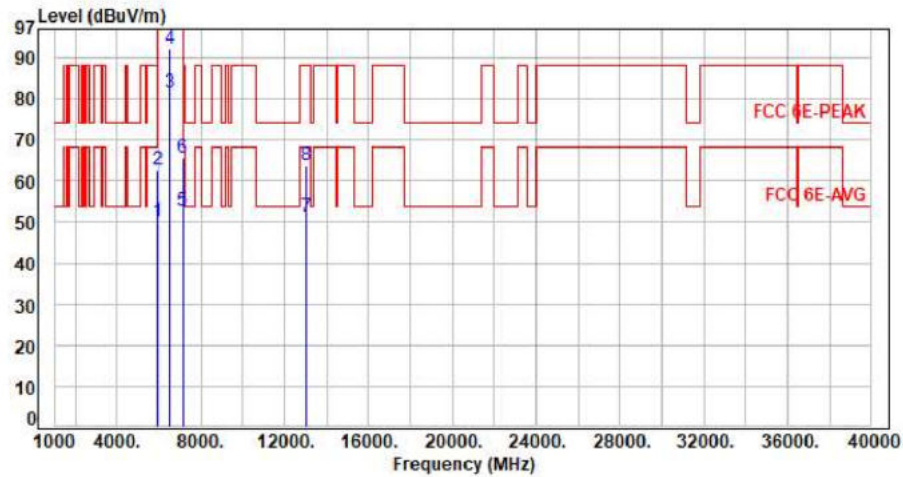

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.63	50.29	68.20	-17.91	Average	400	84	P
2	5925.00	7.66	54.98	62.64	88.20	-25.56	Peak	400	84	P
3	6505.00	8.37	73.07	81.44	200.00	-118.56	Average	400	84	P
4	6505.00	8.37	83.88	92.25	200.00	-107.75	Peak	400	84	P
5	7125.00	10.05	42.60	52.65	68.20	-15.55	Average	400	84	P
6	7125.00	10.05	55.68	65.73	88.20	-22.47	Peak	400	84	P
7	13010.00	19.69	31.56	51.25	68.20	-16.95	Average	100	148	P
8	13010.00	19.69	44.10	63.79	88.20	-24.41	Peak	100	148	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH111 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

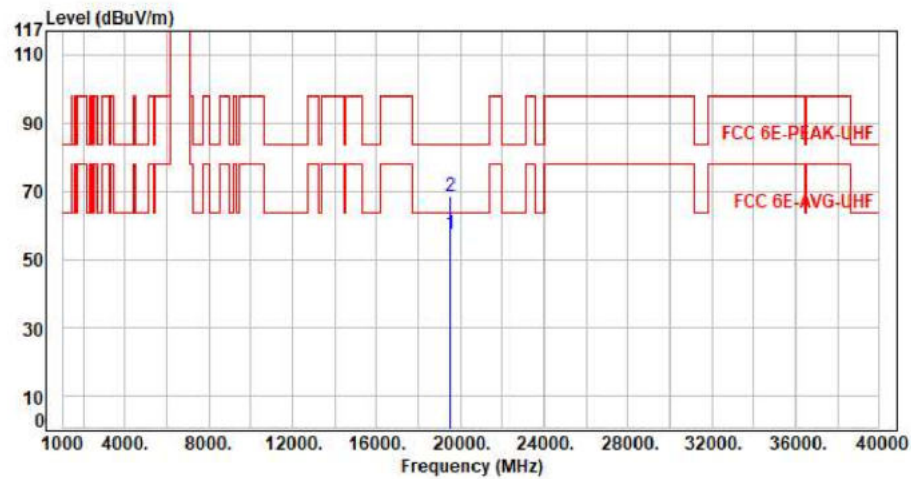

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19515.00	11.91	45.28	57.19	63.54	-6.35	Average	150	360	P
2	19515.00	11.91	56.62	68.53	83.54	-15.01	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

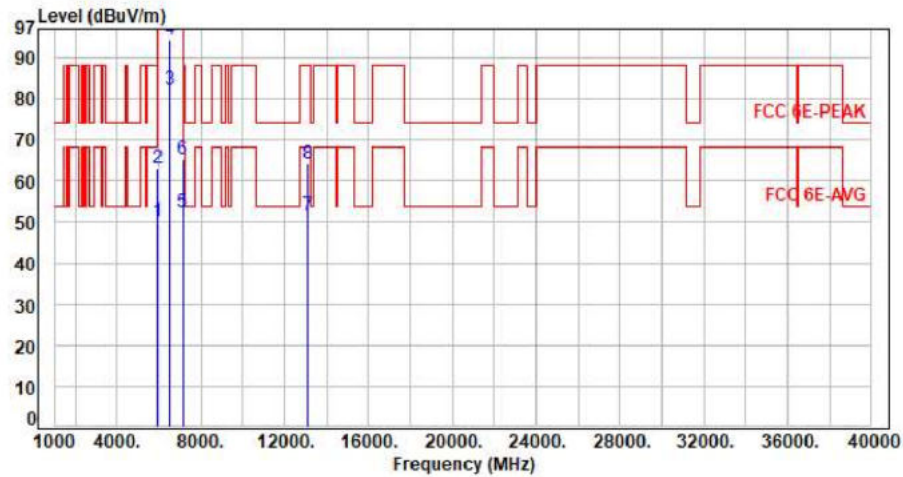


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.46	50.12	68.20	-18.08	Average	290	19	P
2	5925.00	7.66	55.24	62.90	88.20	-25.30	Peak	290	19	P
3	6535.00	8.50	73.70	82.20	200.00	-117.80	Average	290	19	P
4	6535.00	8.50	85.82	94.32	200.00	-105.68	Peak	290	19	P
5	7125.00	10.05	42.26	52.31	68.20	-15.89	Average	290	19	P
6	7125.00	10.05	55.25	65.30	88.20	-22.90	Peak	290	19	P
7	13070.00	20.11	31.59	51.70	68.20	-16.50	Average	100	124	P
8	13070.00	20.11	44.12	64.23	88.20	-23.97	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

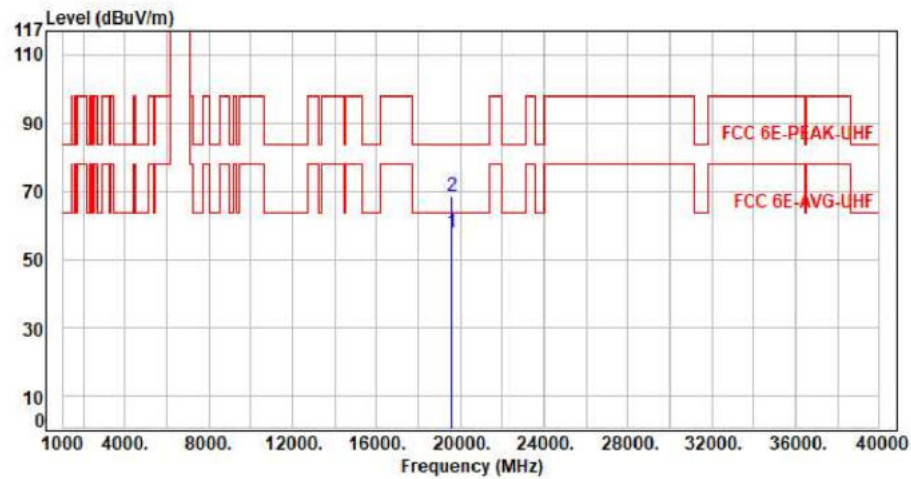


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	45.85	57.63	63.54	-5.91	Average	150	360	P
2	19605.00	11.78	56.95	68.73	83.54	-14.81	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

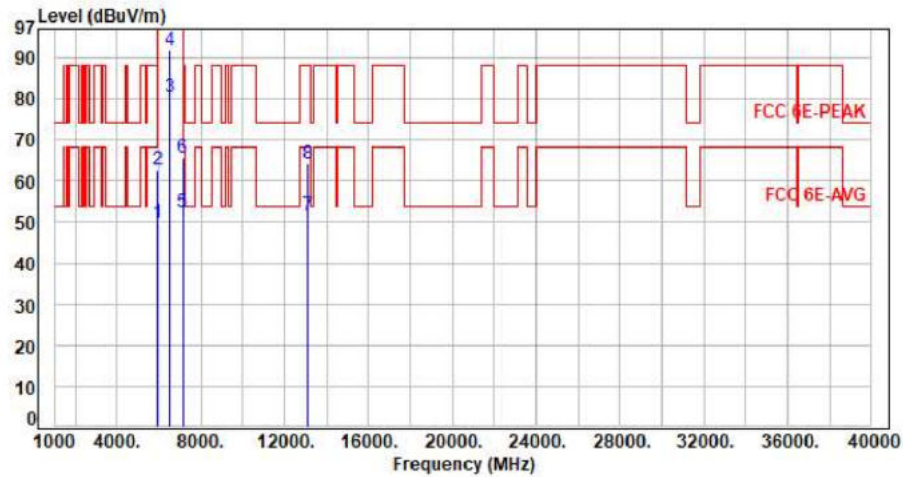

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.28	49.94	68.20	-18.26	Average	400	88	P
2	5925.00	7.66	55.14	62.80	88.20	-25.40	Peak	400	88	P
3	6535.00	8.50	71.81	80.31	200.00	-119.69	Average	400	88	P
4	6535.00	8.50	83.40	91.90	200.00	-108.10	Peak	400	88	P
5	7125.00	10.05	42.46	52.51	68.20	-15.69	Average	400	88	P
6	7125.00	10.05	55.73	65.78	88.20	-22.42	Peak	400	88	P
7	13070.00	20.11	31.58	51.69	68.20	-16.51	Average	100	141	P
8	13070.00	20.11	43.99	64.10	88.20	-24.10	Peak	100	141	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH117 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

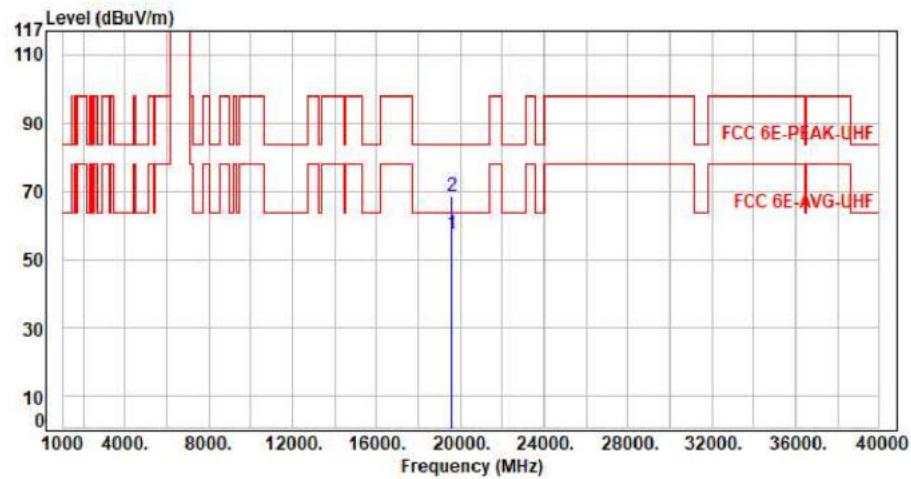


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19605.00	11.78	45.82	57.60	63.54	-5.94	Average	150	360	P
2	19605.00	11.78	56.69	68.47	83.54	-15.07	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

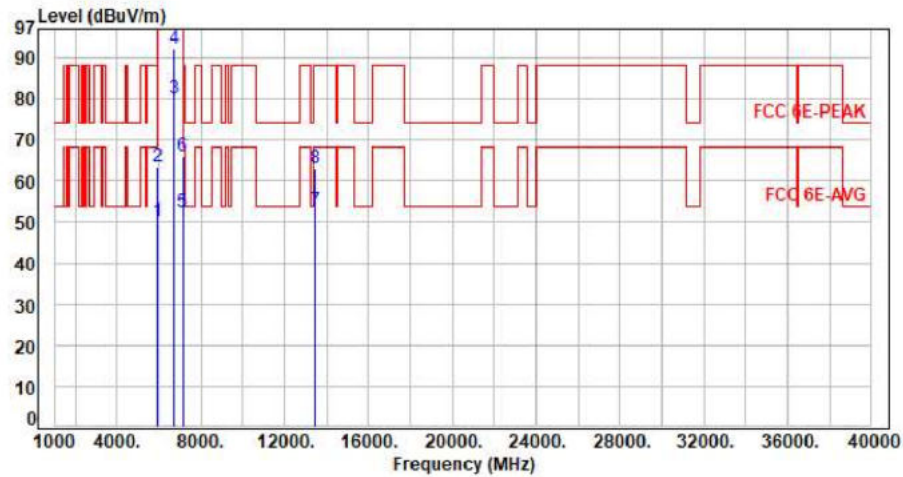

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	275	23	P
2	5925.00	7.66	55.70	63.36	88.20	-24.84	Peak	275	23	P
3	6715.00	9.29	70.90	80.19	200.00	-119.81	Average	275	23	P
4	6715.00	9.29	82.94	92.23	200.00	-107.77	Peak	275	23	P
5	7125.00	10.05	42.34	52.39	68.20	-15.81	Average	275	23	P
6	7125.00	10.05	55.86	65.91	88.20	-22.29	Peak	275	23	P
7	13430.00	21.71	31.21	52.92	68.20	-15.28	Average	100	158	P
8	13430.00	21.71	41.39	63.10	88.20	-25.10	Peak	100	158	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

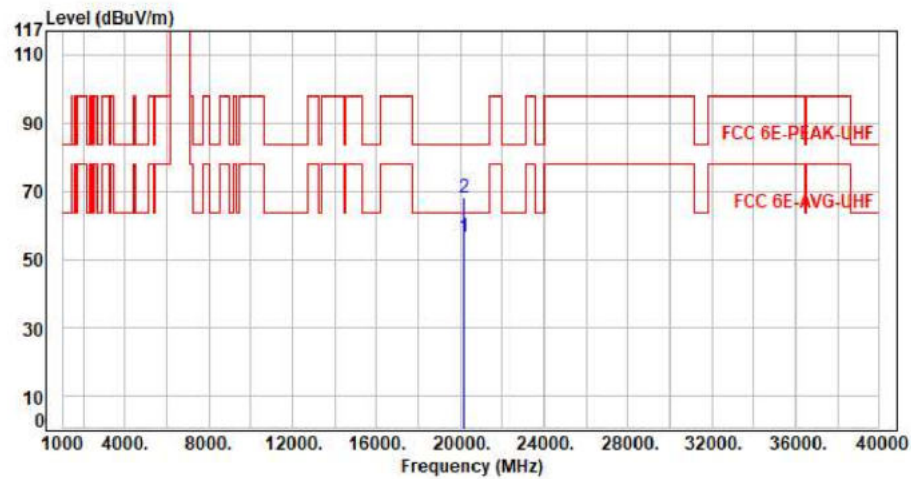

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.24	56.67	63.54	-6.87	Average	150	360	P
2	20145.00	11.43	56.50	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

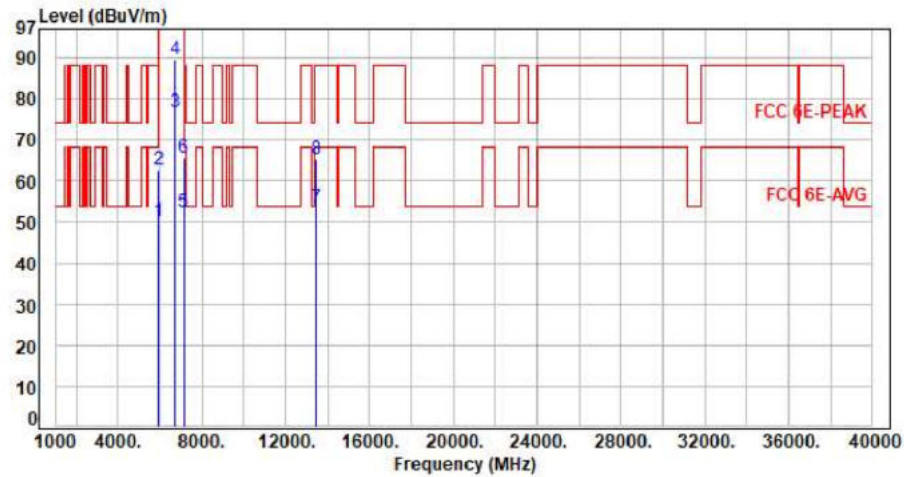

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.36	50.02	68.20	-18.18	Average	393	336	P
2	5925.00	7.66	55.14	62.80	88.20	-25.40	Peak	393	336	P
3	6715.00	9.29	67.42	76.71	200.00	-123.29	Average	393	336	P
4	6715.00	9.29	80.43	89.72	200.00	-110.28	Peak	393	336	P
5	7125.00	10.05	42.36	52.41	68.20	-15.79	Average	393	336	P
6	7125.00	10.05	55.53	65.58	88.20	-22.62	Peak	393	336	P
7	13430.00	21.71	31.69	53.40	68.20	-14.80	Average	100	225	P
8	13430.00	21.71	43.59	65.30	88.20	-22.90	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH153 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

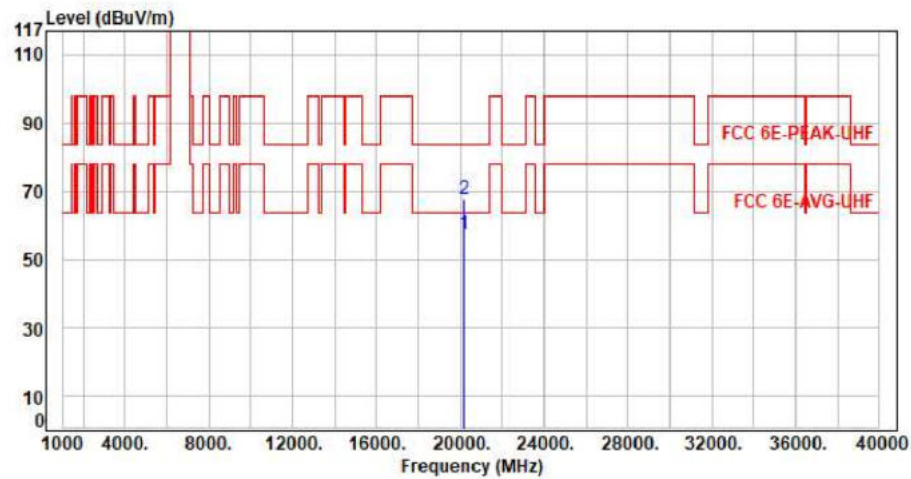


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20145.00	11.43	45.87	57.30	63.54	-6.24	Average	150	360	P
2	20145.00	11.43	56.01	67.44	83.54	-16.10	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

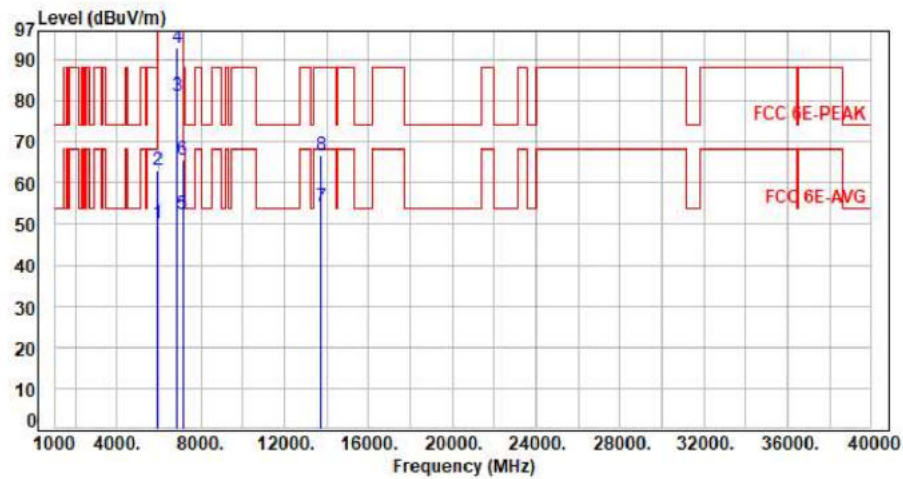

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.47	50.13	68.20	-18.07	Average	269	26	P
2	5925.00	7.66	55.45	63.11	88.20	-25.09	Peak	269	26	P
3	6855.00	9.50	71.74	81.24	200.00	-118.76	Average	269	26	P
4	6855.00	9.50	83.28	92.78	200.00	-107.22	Peak	269	26	P
5	7125.00	10.05	42.39	52.44	68.20	-15.76	Average	269	26	P
6	7125.00	10.05	55.48	65.53	88.20	-22.67	Peak	269	26	P
7	13710.00	22.48	31.65	54.13	68.20	-14.07	Average	100	145	P
8	13710.00	22.48	44.28	66.76	88.20	-21.44	Peak	100	145	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

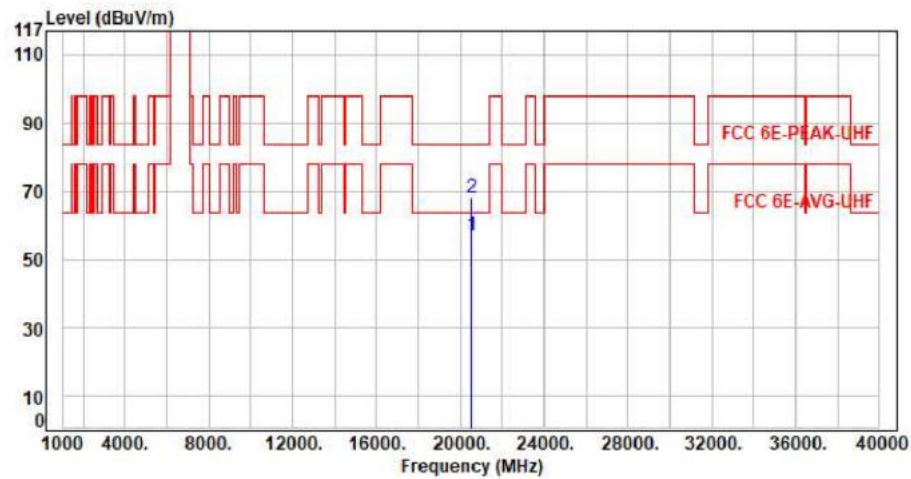


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	45.68	57.06	63.54	-6.48	Average	150	360	P
2	20565.00	11.38	56.79	68.17	83.54	-15.37	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

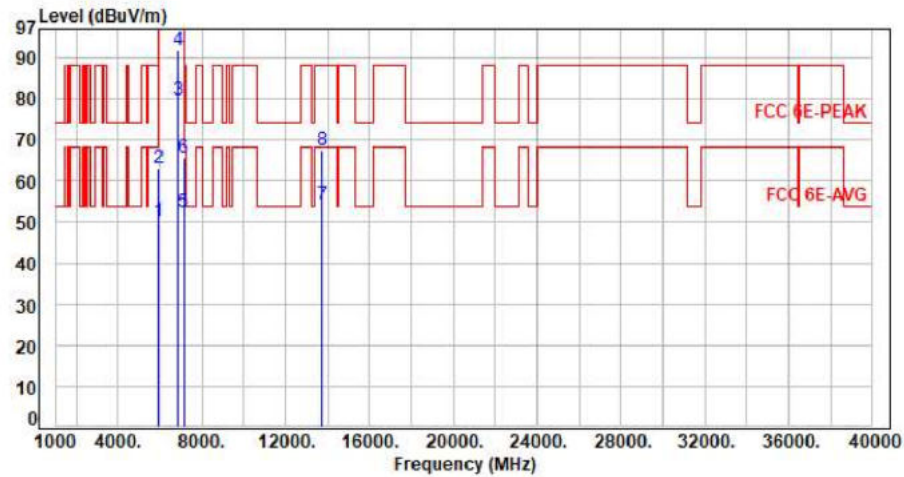

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.53	50.19	68.20	-18.01	Average	400	285	P
2	5925.00	7.66	55.32	62.98	88.20	-25.22	Peak	400	285	P
3	6855.00	9.50	70.10	79.60	200.00	-120.40	Average	400	285	P
4	6855.00	9.50	82.25	91.75	200.00	-108.25	Peak	400	285	P
5	7125.00	10.05	42.41	52.46	68.20	-15.74	Average	400	285	P
6	7125.00	10.05	55.73	65.78	88.20	-22.42	Peak	400	285	P
7	13710.00	22.48	31.59	54.07	68.20	-14.13	Average	100	124	P
8	13710.00	22.48	45.11	67.59	88.20	-20.61	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH181 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

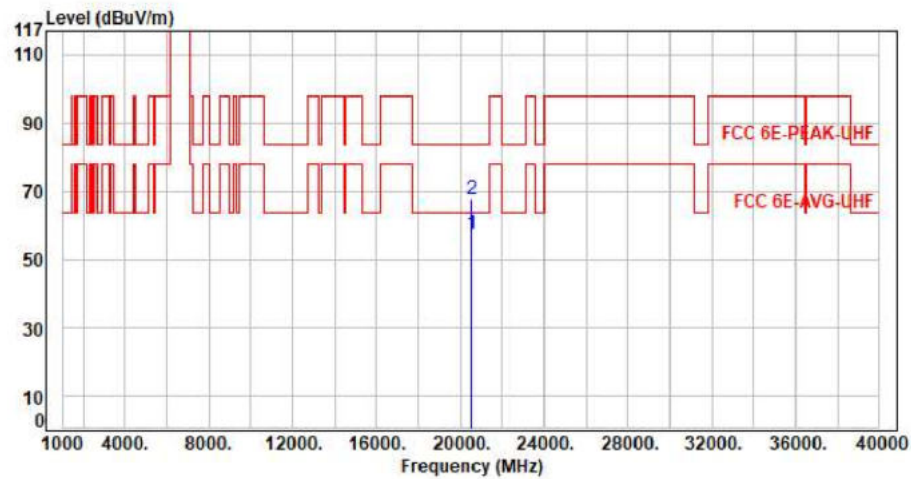


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20565.00	11.38	45.79	57.17	63.54	-6.37	Average	150	360	P
2	20565.00	11.38	56.31	67.69	83.54	-15.85	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

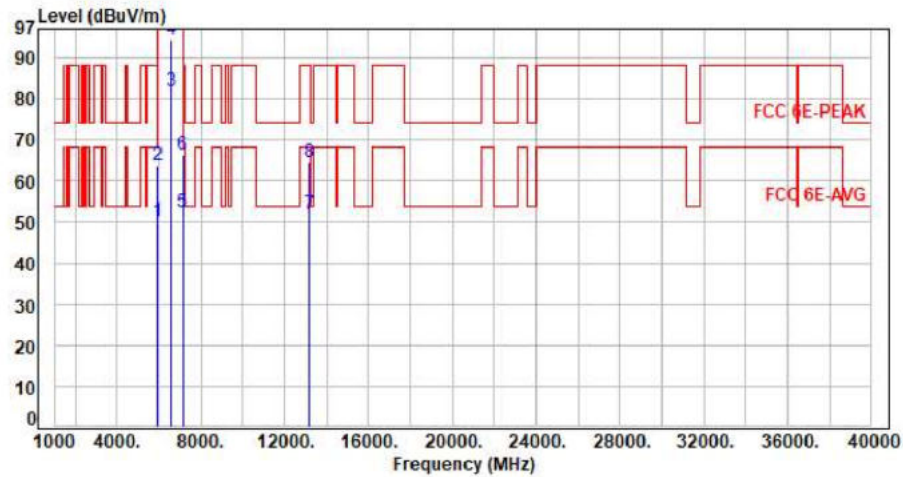


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	300	7	P
2	5925.00	7.66	56.02	63.68	88.20	-24.52	Peak	300	7	P
3	6565.00	8.67	73.18	81.85	200.00	-118.15	Average	300	7	P
4	6565.00	8.67	85.68	94.35	200.00	-105.65	Peak	300	7	P
5	7125.00	10.05	42.46	52.51	68.20	-15.69	Average	300	7	P
6	7125.00	10.05	56.26	66.31	88.20	-21.89	Peak	300	7	P
7	13130.00	20.32	31.68	52.00	68.20	-16.20	Average	100	225	P
8	13130.00	20.32	44.18	64.50	88.20	-23.70	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

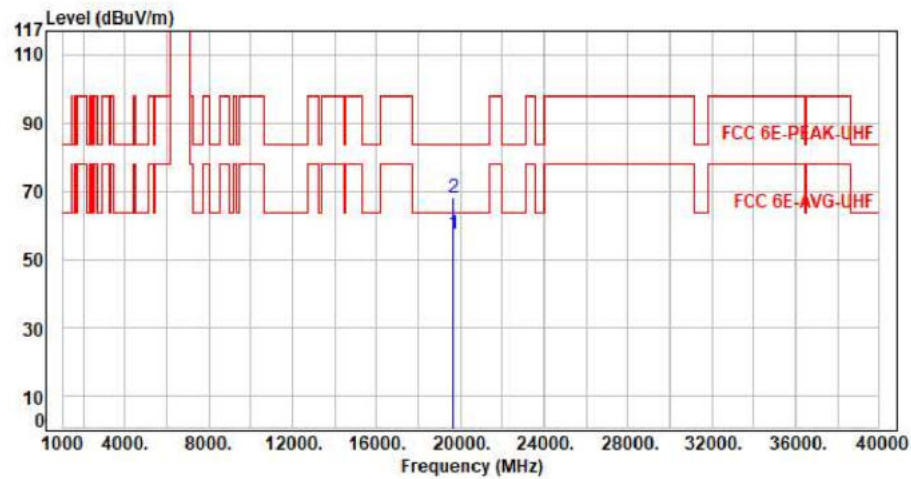


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.75	57.20	63.54	-6.34	Average	150	360	P
2	19695.00	11.45	56.74	68.19	83.54	-15.35	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

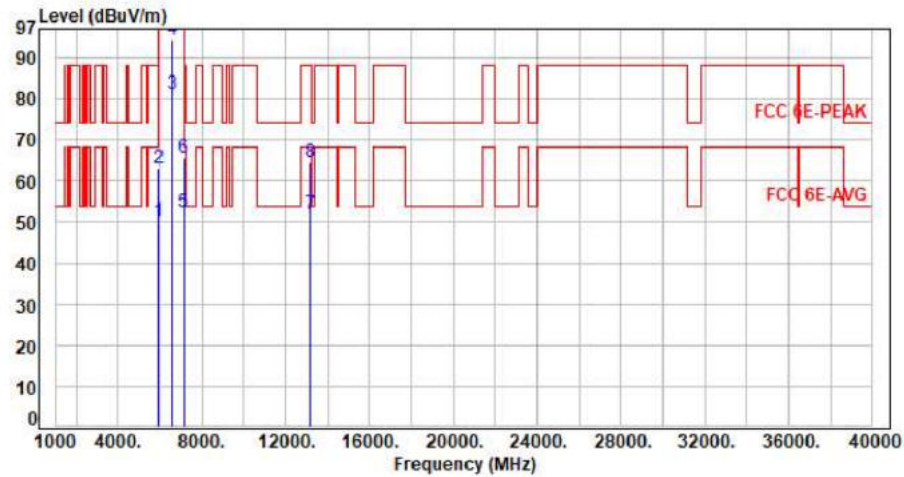


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.44	50.10	68.20	-18.10	Average	400	85	P
2	5925.00	7.66	55.34	63.00	88.20	-25.20	Peak	400	85	P
3	6565.00	8.67	72.51	81.18	200.00	-118.82	Average	400	85	P
4	6565.00	8.67	85.81	94.48	200.00	-105.52	Peak	400	85	P
5	7125.00	10.05	42.39	52.44	68.20	-15.76	Average	400	85	P
6	7125.00	10.05	55.73	65.78	88.20	-22.42	Peak	400	85	P
7	13130.00	20.32	31.85	52.17	68.20	-16.03	Average	100	142	P
8	13130.00	20.32	44.22	64.54	88.20	-23.66	Peak	100	142	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH123 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

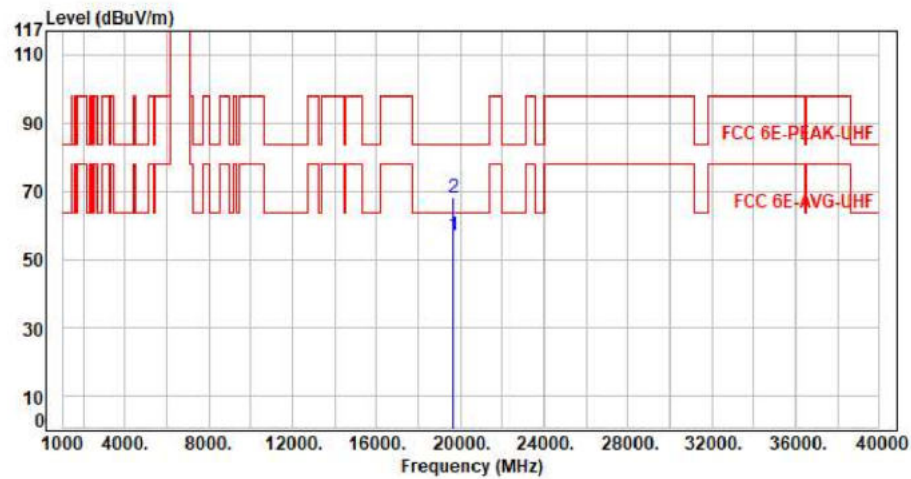


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19695.00	11.45	45.62	57.07	63.54	-6.47	Average	150	360	P
2	19695.00	11.45	56.41	67.86	83.54	-15.68	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

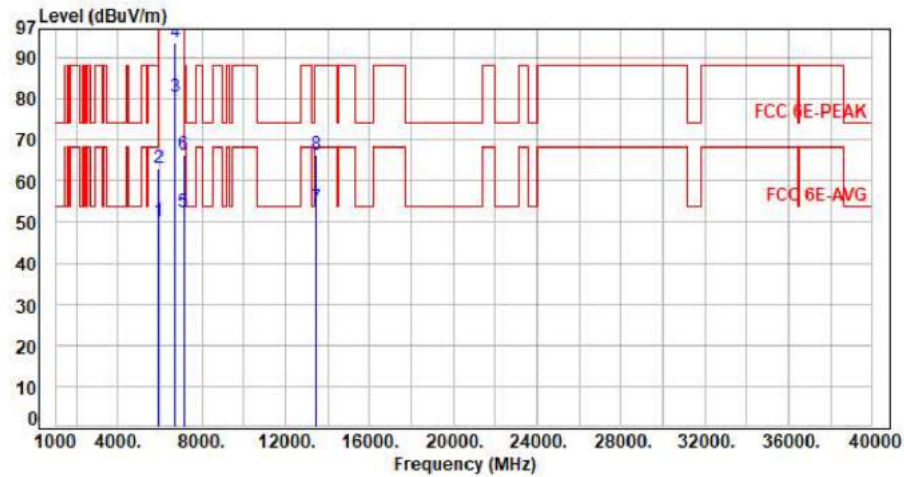

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.37	50.03	68.20	-18.17	Average	270	24	P
2	5925.00	7.66	55.51	63.17	88.20	-25.03	Peak	270	24	P
3	6725.00	9.33	71.26	80.59	200.00	-119.41	Average	270	24	P
4	6725.00	9.33	84.49	93.82	200.00	-106.18	Peak	270	24	P
5	7125.00	10.05	42.50	52.55	68.20	-15.65	Average	270	24	P
6	7125.00	10.05	56.28	66.33	88.20	-21.87	Peak	270	24	P
7	13450.00	21.80	31.85	53.65	68.20	-14.55	Average	100	127	P
8	13450.00	21.80	44.60	66.40	88.20	-21.80	Peak	100	127	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

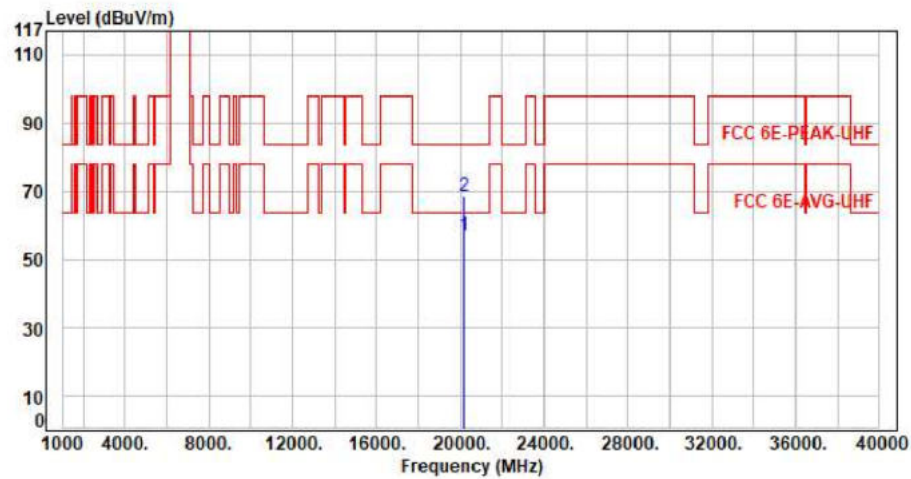

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.43	56.89	63.54	-6.65	Average	150	360	P
2	20175.00	11.46	56.96	68.42	83.54	-15.12	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

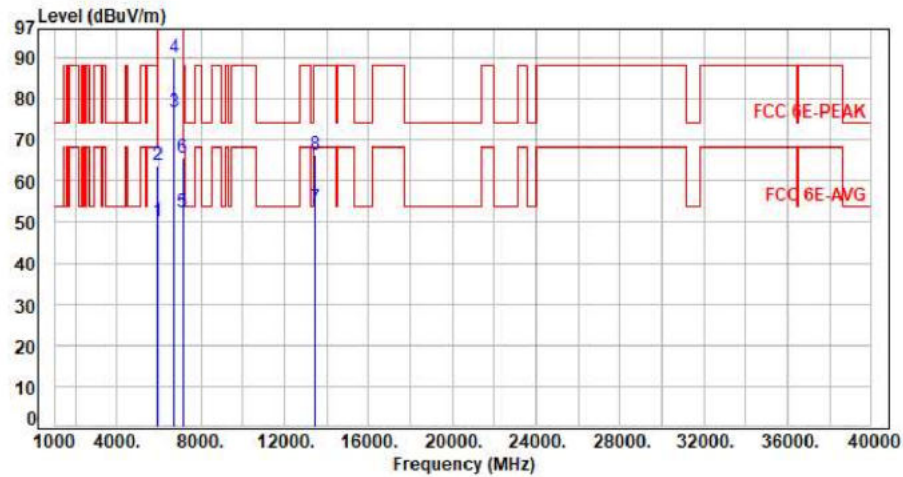


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.46	50.12	68.20	-18.08	Average	391	337	P
2	5925.00	7.66	55.99	63.65	88.20	-24.55	Peak	391	337	P
3	6725.00	9.33	67.50	76.83	200.00	-123.17	Average	391	337	P
4	6725.00	9.33	80.53	89.86	200.00	-110.14	Peak	391	337	P
5	7125.00	10.05	42.41	52.46	68.20	-15.74	Average	391	337	P
6	7125.00	10.05	55.71	65.76	88.20	-22.44	Peak	391	337	P
7	13450.00	21.80	31.59	53.39	68.20	-14.81	Average	100	124	P
8	13450.00	21.80	44.46	66.26	88.20	-21.94	Peak	100	124	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH155 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

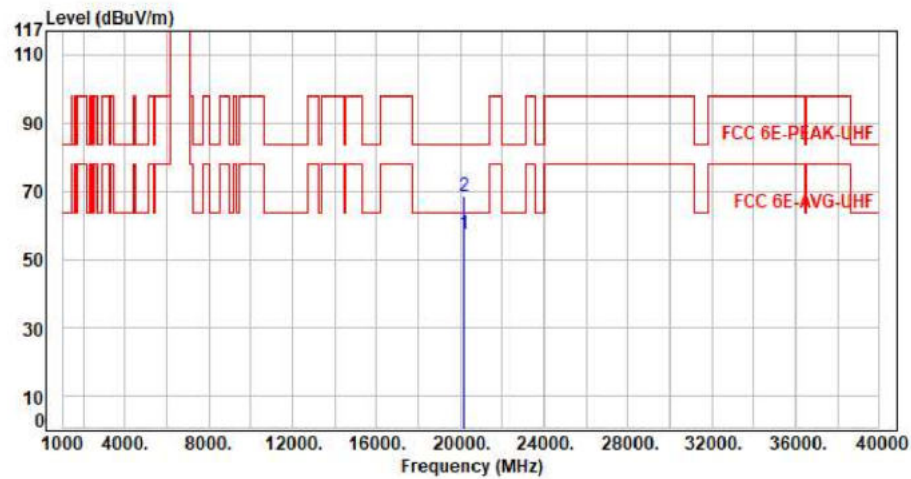


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20175.00	11.46	45.86	57.32	63.54	-6.22	Average	150	360	P
2	20175.00	11.46	56.96	68.42	83.54	-15.12	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

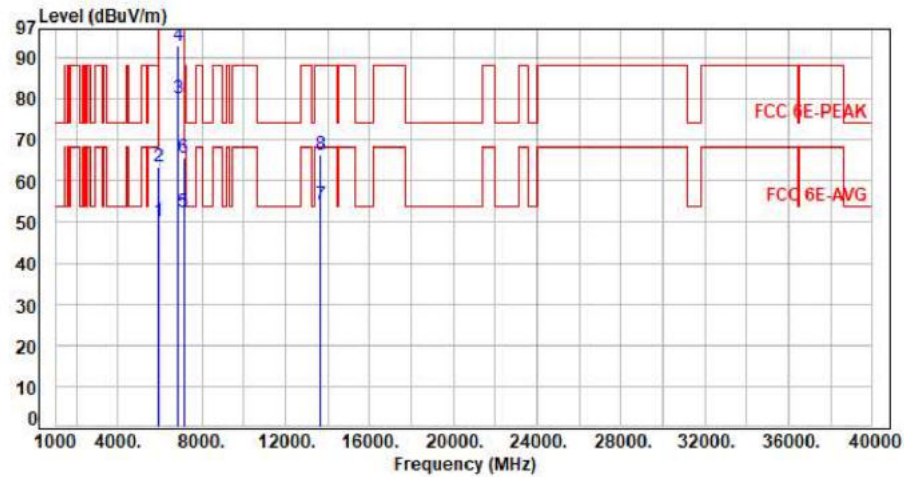

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.35	50.01	68.20	-18.19	Average	272	25	P
2	5925.00	7.66	55.84	63.50	88.20	-24.70	Peak	272	25	P
3	6845.00	9.48	70.59	80.07	200.00	-119.93	Average	272	25	P
4	6845.00	9.48	83.43	92.91	200.00	-107.09	Peak	272	25	P
5	7125.00	10.05	42.40	52.45	68.20	-15.75	Average	272	25	P
6	7125.00	10.05	55.51	65.56	88.20	-22.64	Peak	272	25	P
7	13690.00	22.40	31.68	54.08	68.20	-14.12	Average	100	125	P
8	13690.00	22.40	44.15	66.55	88.20	-21.65	Peak	100	125	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

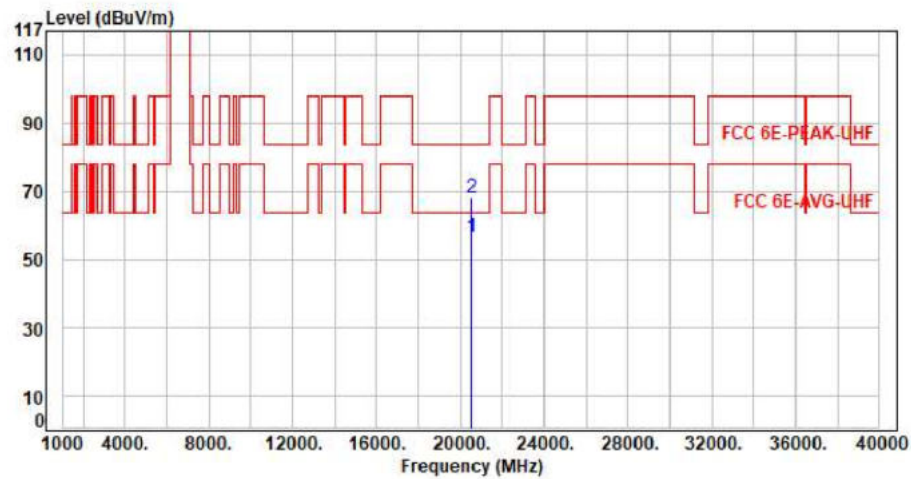

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	45.19	56.63	63.54	-6.91	Average	150	360	P
2	20535.00	11.44	56.79	68.23	83.54	-15.31	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

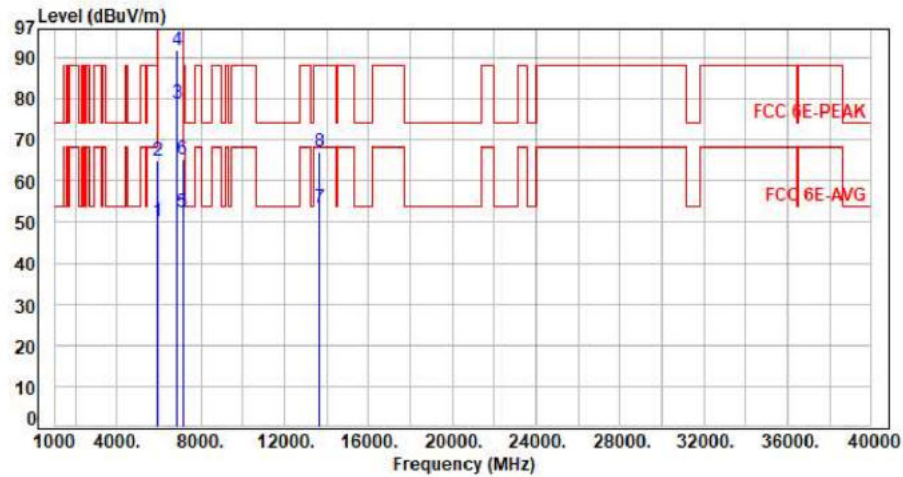


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.47	50.13	68.20	-18.07	Average	400	285	P
2	5925.00	7.66	57.10	64.76	88.20	-23.44	Peak	400	285	P
3	6845.00	9.48	69.61	79.09	200.00	-120.91	Average	400	285	P
4	6845.00	9.48	82.42	91.90	200.00	-108.10	Peak	400	285	P
5	7125.00	10.05	42.33	52.38	68.20	-15.82	Average	400	285	P
6	7125.00	10.05	55.39	65.44	88.20	-22.76	Peak	400	285	P
7	13690.00	22.40	31.22	53.62	68.20	-14.58	Average	100	192	P
8	13690.00	22.40	44.82	67.22	88.20	-20.98	Peak	100	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH179 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

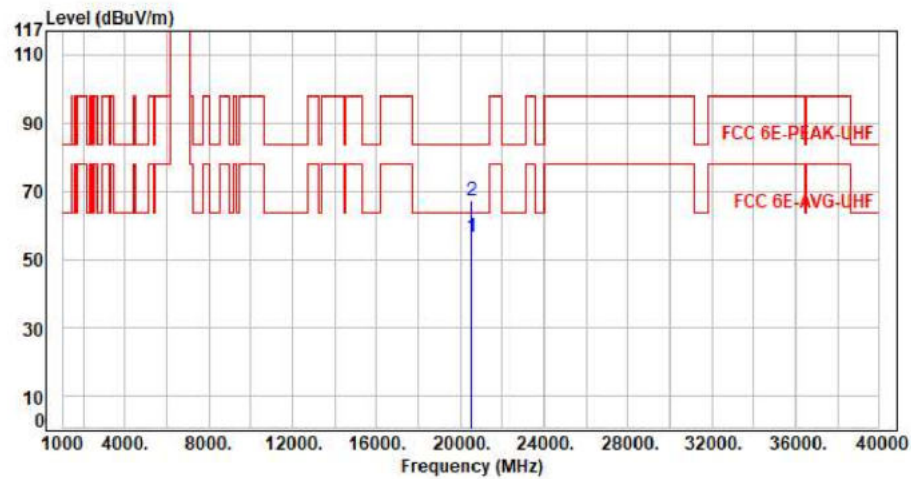

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20535.00	11.44	45.22	56.66	63.54	-6.88	Average	150	360	P
2	20535.00	11.44	55.53	66.97	83.54	-16.57	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

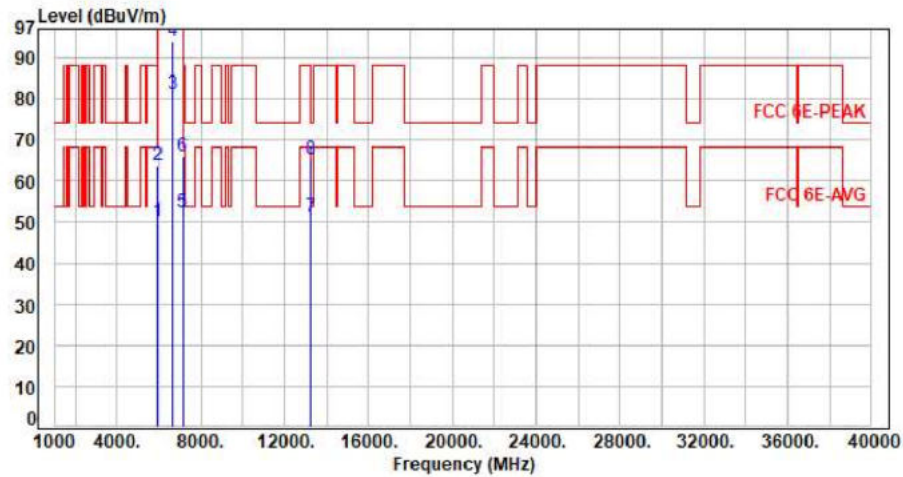

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.35	50.01	68.20	-18.19	Average	296	8	P
2	5925.00	7.66	56.03	63.69	88.20	-24.51	Peak	296	8	P
3	6625.00	8.94	72.09	81.03	200.00	-118.97	Average	296	8	P
4	6625.00	8.94	85.24	94.18	200.00	-105.82	Peak	296	8	P
5	7125.00	10.05	42.40	52.45	68.20	-15.75	Average	296	8	P
6	7125.00	10.05	55.87	65.92	88.20	-22.28	Peak	296	8	P
7	13250.00	21.00	30.25	51.25	54.00	-2.75	Average	100	146	P
8	13250.00	21.00	44.36	65.36	74.00	-8.64	Peak	100	146	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

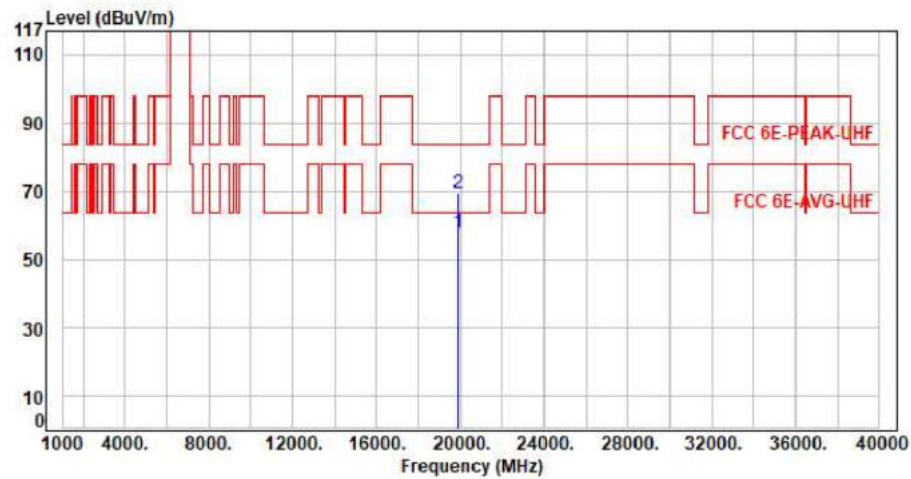


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.92	57.82	63.54	-5.72	Average	150	360	P
2	19875.00	11.90	57.61	69.51	83.54	-14.03	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

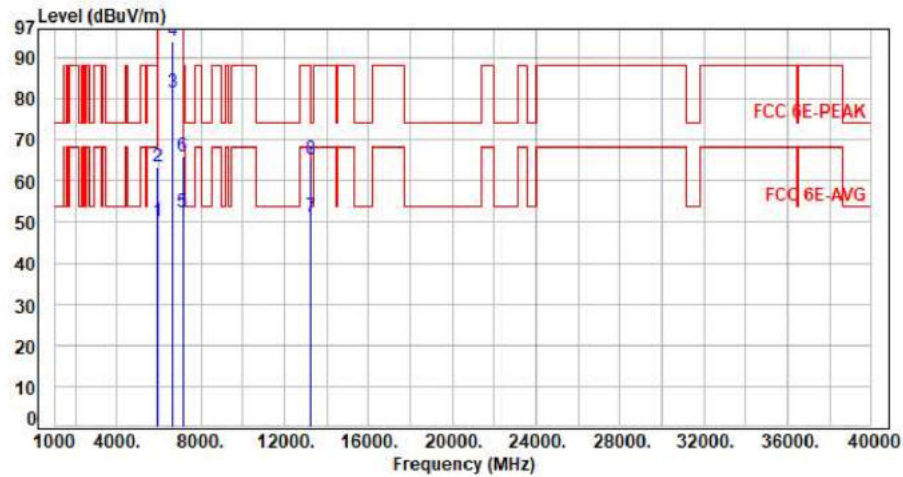


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.43	50.09	68.20	-18.11	Average	392	88	P
2	5925.00	7.66	55.95	63.61	88.20	-24.59	Peak	392	88	P
3	6625.00	8.94	72.55	81.49	200.00	-118.51	Average	392	88	P
4	6625.00	8.94	85.17	94.11	200.00	-105.89	Peak	392	88	P
5	7125.00	10.05	42.40	52.45	68.20	-15.75	Average	392	88	P
6	7125.00	10.05	55.89	65.94	88.20	-22.26	Peak	392	88	P
7	13250.00	21.00	30.16	51.16	54.00	-2.84	Average	100	225	P
8	13250.00	21.00	44.13	65.13	74.00	-8.87	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH135 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

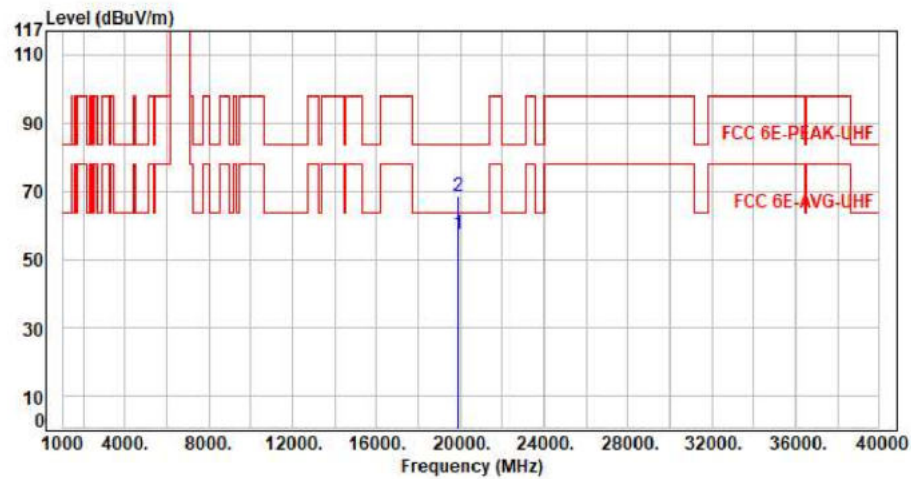


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19875.00	11.90	45.69	57.59	63.54	-5.95	Average	150	360	P
2	19875.00	11.90	56.74	68.64	83.54	-14.90	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

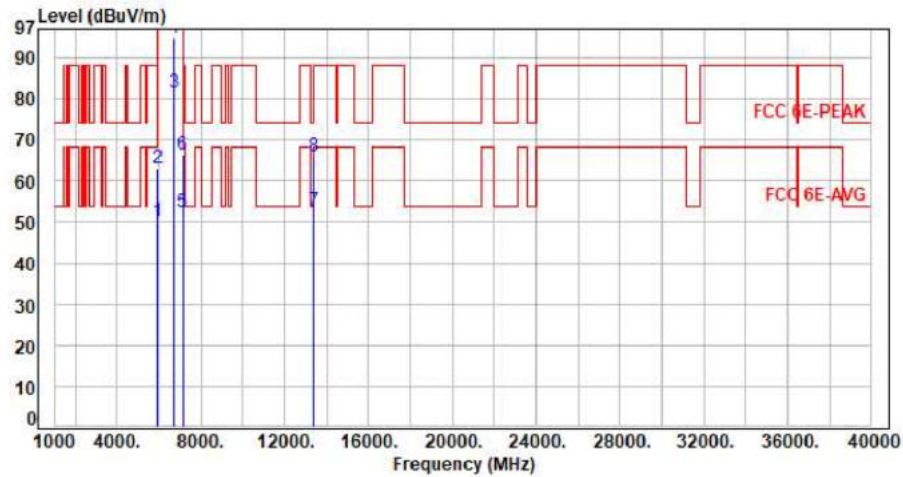

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.45	50.11	68.20	-18.09	Average	266	27	P
2	5925.00	7.66	55.36	63.02	88.20	-25.18	Peak	266	27	P
3	6705.00	9.25	72.31	81.56	200.00	-118.44	Average	266	27	P
4	6705.00	9.25	85.41	94.66	200.00	-105.34	Peak	266	27	P
5	7125.00	10.05	42.42	52.47	68.20	-15.73	Average	266	27	P
6	7125.00	10.05	56.32	66.37	88.20	-21.83	Peak	266	27	P
7	13410.00	21.62	31.24	52.86	68.20	-15.34	Average	100	128	P
8	13410.00	21.62	44.52	66.14	88.20	-22.06	Peak	100	128	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

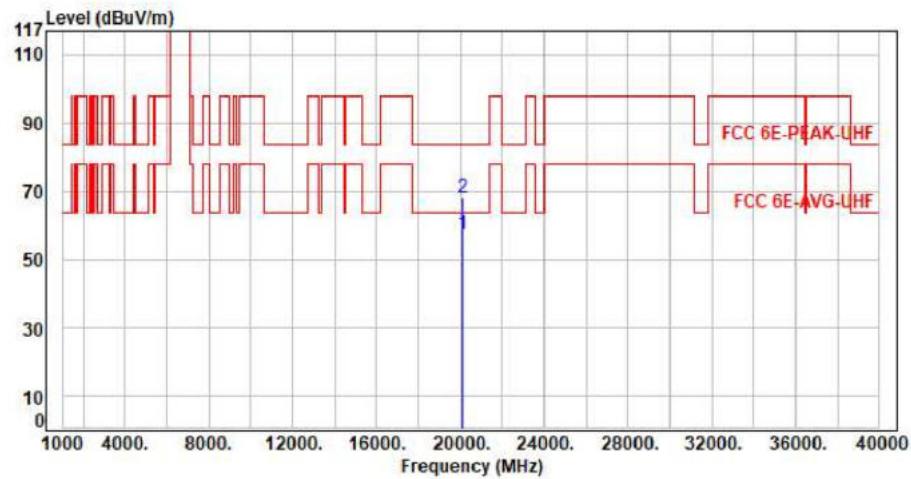


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.86	57.26	63.54	-6.28	Average	150	360	P
2	20115.00	11.40	56.56	67.96	83.54	-15.58	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

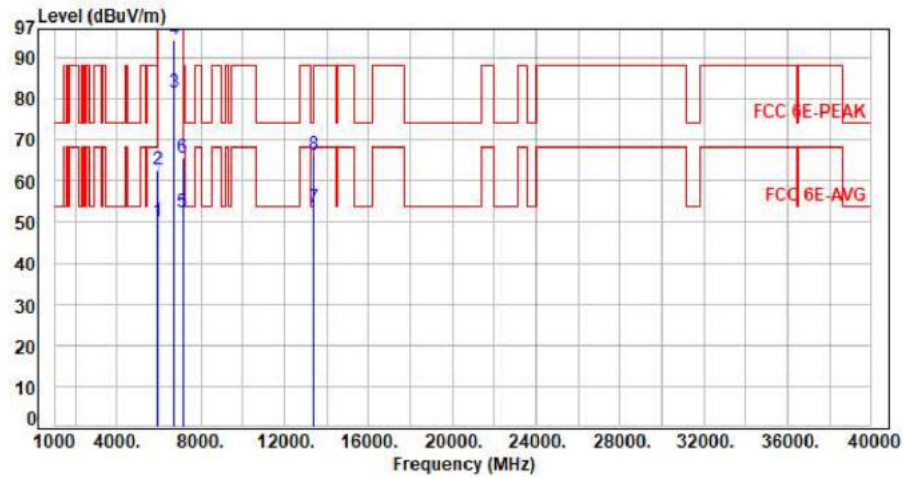

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.67	50.33	68.20	-17.87	Average	391	275	P
2	5925.00	7.66	55.10	62.76	88.20	-25.44	Peak	391	275	P
3	6705.00	9.25	72.37	81.62	200.00	-118.38	Average	391	275	P
4	6705.00	9.25	85.14	94.39	200.00	-105.61	Peak	391	275	P
5	7125.00	10.05	42.38	52.43	68.20	-15.77	Average	391	275	P
6	7125.00	10.05	55.75	65.80	88.20	-22.40	Peak	391	275	P
7	13410.00	21.62	31.69	53.31	68.20	-14.89	Average	100	114	P
8	13410.00	21.62	44.76	66.38	88.20	-21.82	Peak	100	114	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH151 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

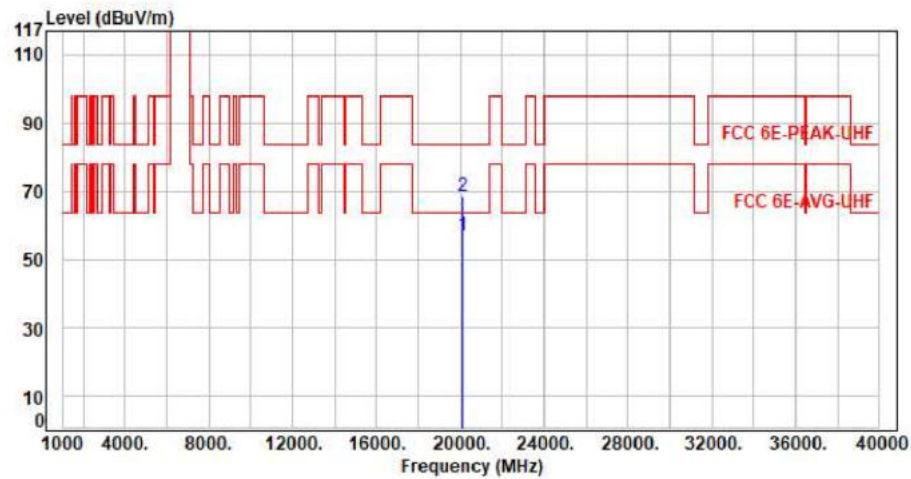


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20115.00	11.40	45.67	57.07	63.54	-6.47	Average	150	360	P
2	20115.00	11.40	56.93	68.33	83.54	-15.21	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

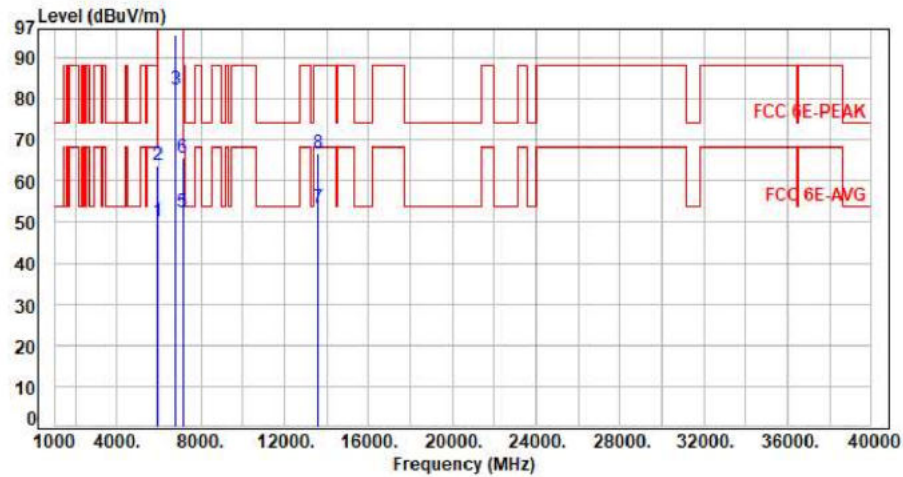


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.38	50.04	68.20	-18.16	Average	265	29	P
2	5925.00	7.66	56.25	63.91	88.20	-24.29	Peak	265	29	P
3	6785.00	9.46	72.96	82.42	200.00	-117.58	Average	265	29	P
4	6785.00	9.46	85.93	95.39	200.00	-104.61	Peak	265	29	P
5	7125.00	10.05	42.35	52.40	68.20	-15.80	Average	265	29	P
6	7125.00	10.05	55.57	65.62	88.20	-22.58	Peak	265	29	P
7	13570.00	22.06	31.59	53.65	68.20	-14.55	Average	100	225	P
8	13570.00	22.06	44.64	66.70	88.20	-21.50	Peak	100	225	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

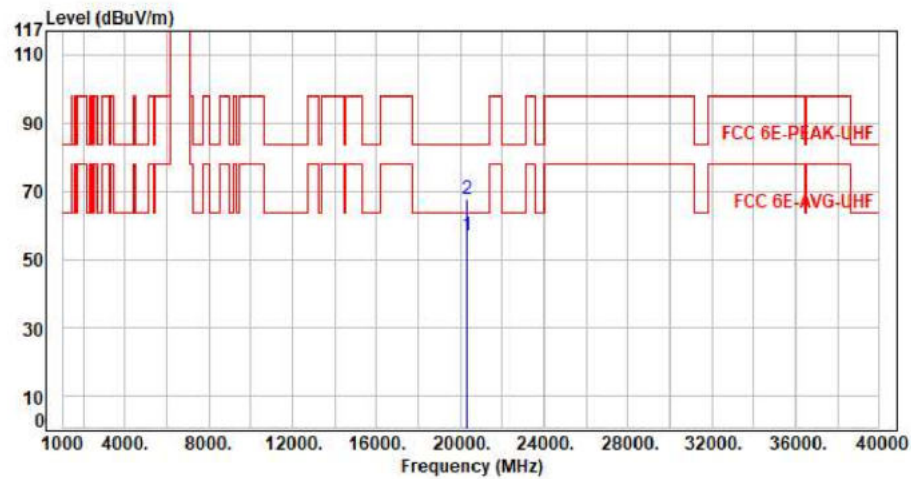

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.75	56.81	63.54	-6.73	Average	150	360	P
2	20355.00	11.06	56.65	67.71	83.54	-15.83	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

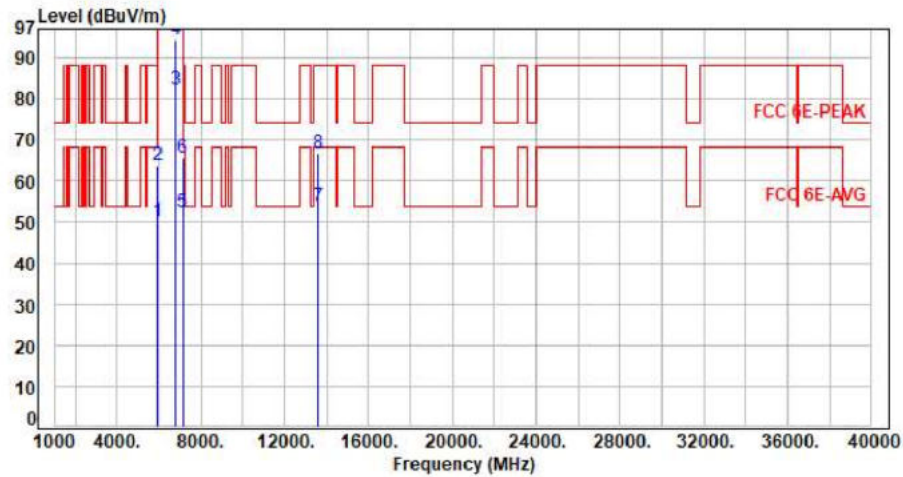

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.46	50.12	68.20	-18.08	Average	400	280	P
2	5925.00	7.66	56.14	63.80	88.20	-24.40	Peak	400	280	P
3	6785.00	9.46	72.84	82.30	200.00	-117.70	Average	400	280	P
4	6785.00	9.46	84.83	94.29	200.00	-105.71	Peak	400	280	P
5	7125.00	10.05	42.33	52.38	68.20	-15.82	Average	400	280	P
6	7125.00	10.05	55.42	65.47	88.20	-22.73	Peak	400	280	P
7	13570.00	22.06	31.66	53.72	68.20	-14.48	Average	100	124	P
8	13570.00	22.06	44.63	66.69	88.20	-21.51	Peak	100	124	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH167 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

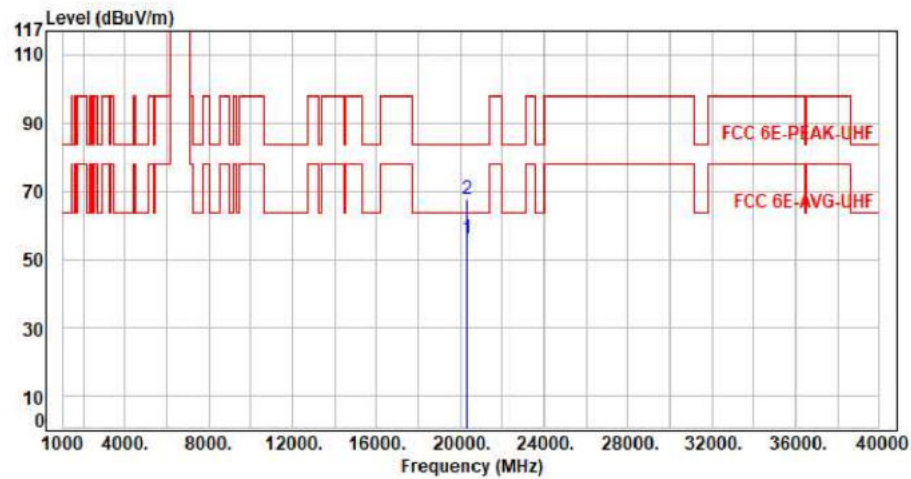


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20355.00	11.06	45.11	56.17	63.54	-7.37	Average	150	360	P
2	20355.00	11.06	56.55	67.61	83.54	-15.93	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

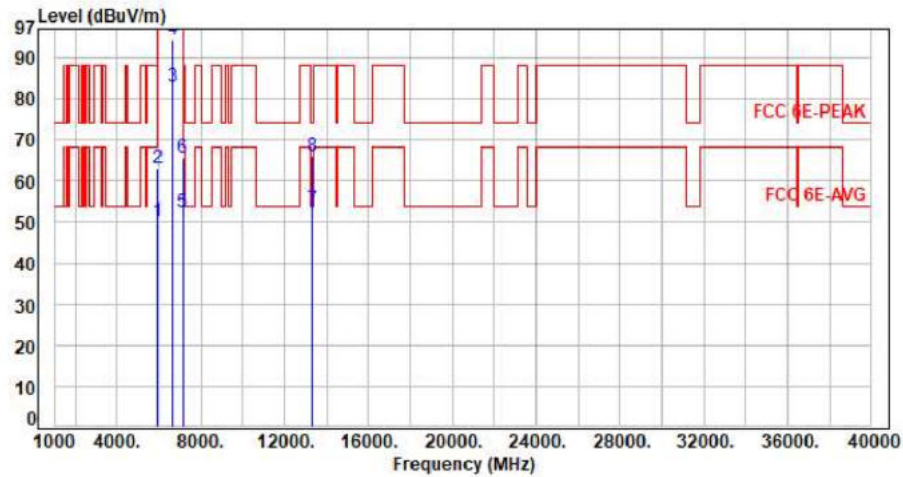

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.62	50.28	68.20	-17.92	Average	296	7	P
2	5925.00	7.66	55.58	63.24	88.20	-24.96	Peak	296	7	P
3	6665.00	9.08	73.96	83.04	200.00	-116.96	Average	296	7	P
4	6665.00	9.08	85.25	94.33	200.00	-105.67	Peak	296	7	P
5	7125.00	10.05	42.50	52.55	68.20	-15.65	Average	296	7	P
6	7125.00	10.05	55.47	65.52	88.20	-22.68	Peak	296	7	P
7	13330.00	21.30	31.67	52.97	54.00	-1.03	Average	100	225	P
8	13330.00	21.30	44.69	65.99	74.00	-8.01	Peak	100	225	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

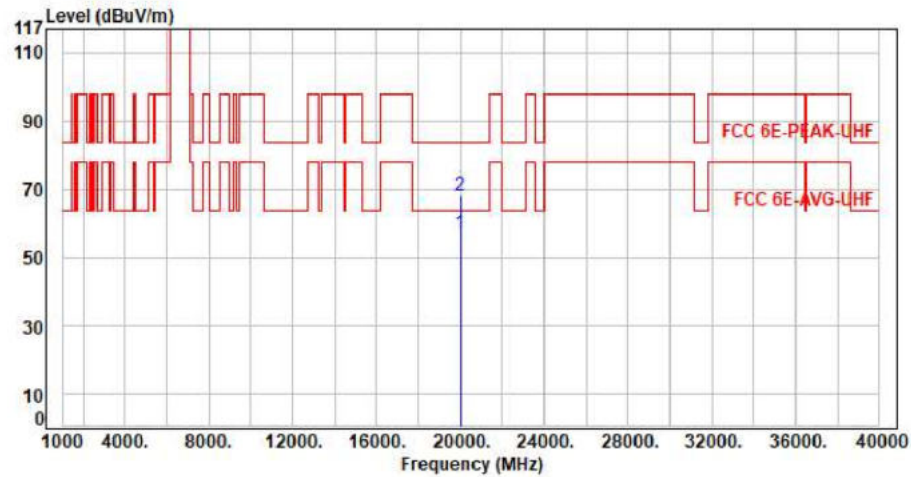


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.42	57.12	63.54	-6.42	Average	150	360	P
2	19995.00	11.70	56.39	68.09	83.54	-15.45	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

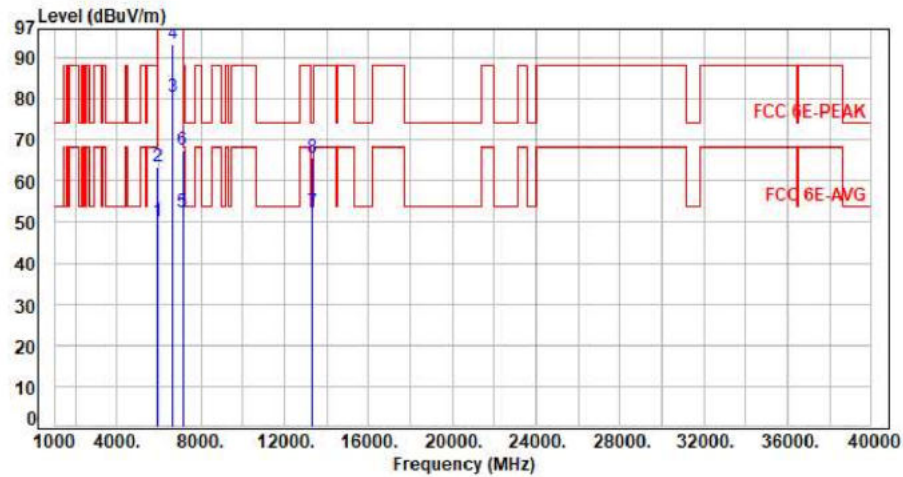


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.53	50.19	68.20	-18.01	Average	389	83	P
2	5925.00	7.66	55.73	63.39	88.20	-24.81	Peak	389	83	P
3	6665.00	9.08	71.27	80.35	200.00	-119.65	Average	389	83	P
4	6665.00	9.08	84.21	93.29	200.00	-106.71	Peak	389	83	P
5	7125.00	10.05	42.42	52.47	68.20	-15.73	Average	389	83	P
6	7125.00	10.05	57.45	67.50	88.20	-20.70	Peak	389	83	P
7	13330.00	21.30	31.22	52.52	54.00	-1.48	Average	100	214	P
8	13330.00	21.30	44.32	65.62	74.00	-8.38	Peak	100	214	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH143 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

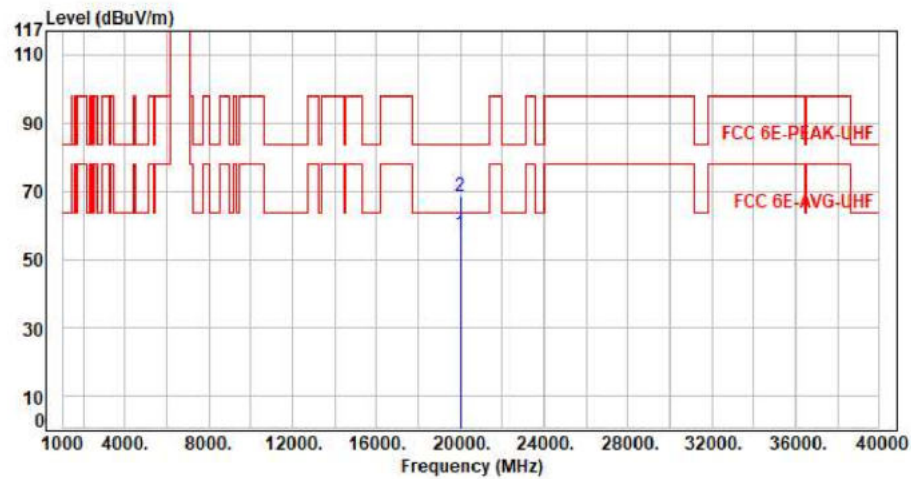


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	19995.00	11.70	45.90	57.60	63.54	-5.94	Average	150	360	P
2	19995.00	11.70	56.71	68.41	83.54	-15.13	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

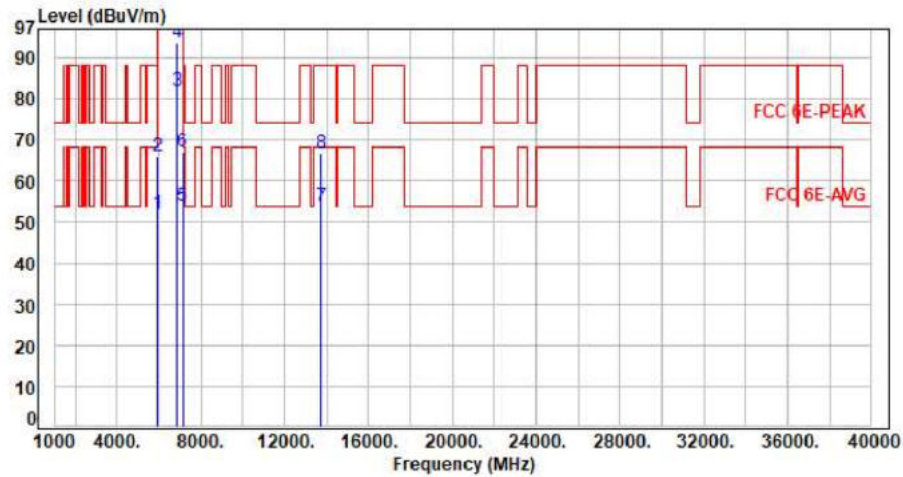


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	44.17	51.83	68.20	-16.37	Average	274	27	P
2	5925.00	7.66	58.20	65.86	88.20	-22.34	Peak	274	27	P
3	6875.00	9.55	72.28	81.83	200.00	-118.17	Average	274	27	P
4	6875.00	9.55	84.25	93.80	200.00	-106.20	Peak	274	27	P
5	7125.00	10.05	43.96	54.01	68.20	-14.19	Average	274	27	P
6	7125.00	10.05	56.94	66.99	88.20	-21.21	Peak	274	27	P
7	13750.00	22.65	31.19	53.84	68.20	-14.36	Average	100	115	P
8	13750.00	22.65	44.22	66.87	88.20	-21.33	Peak	100	115	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

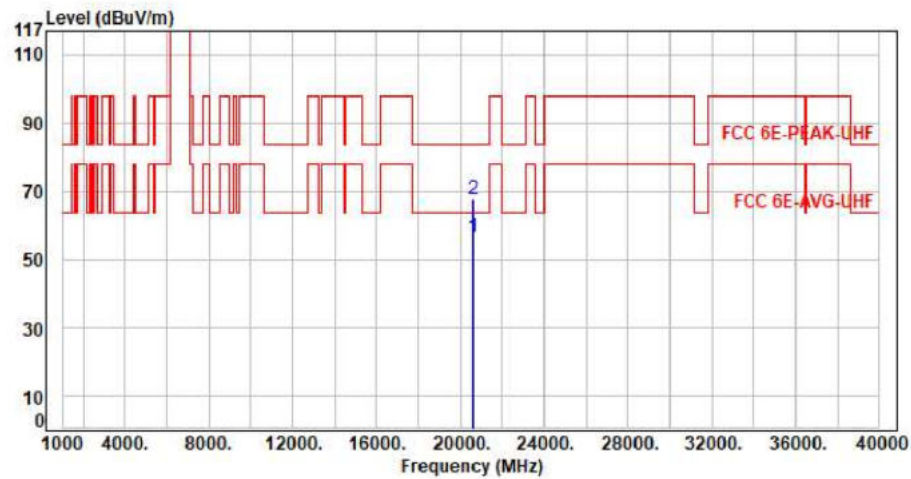


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.23	56.37	63.54	-7.17	Average	150	360	P
2	20625.00	11.14	56.29	67.43	83.54	-16.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

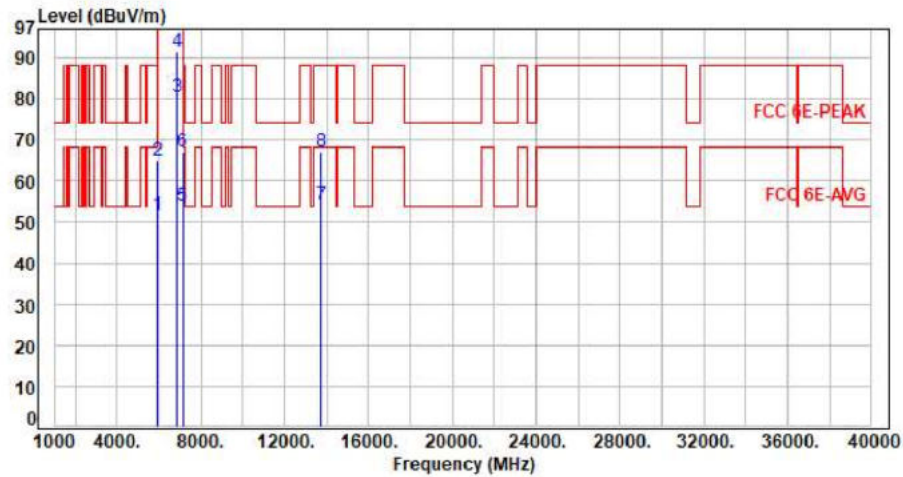


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	44.09	51.75	68.20	-16.45	Average	391	286	P
2	5925.00	7.66	57.29	64.95	88.20	-23.25	Peak	391	286	P
3	6875.00	9.55	70.86	80.41	200.00	-119.59	Average	391	286	P
4	6875.00	9.55	81.88	91.43	200.00	-108.57	Peak	391	286	P
5	7125.00	10.05	43.95	54.00	68.20	-14.20	Average	391	286	P
6	7125.00	10.05	57.15	67.20	88.20	-21.00	Peak	391	286	P
7	13750.00	22.65	31.61	54.26	68.20	-13.94	Average	100	191	P
8	13750.00	22.65	44.63	67.28	88.20	-20.92	Peak	100	191	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax20 CH185 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

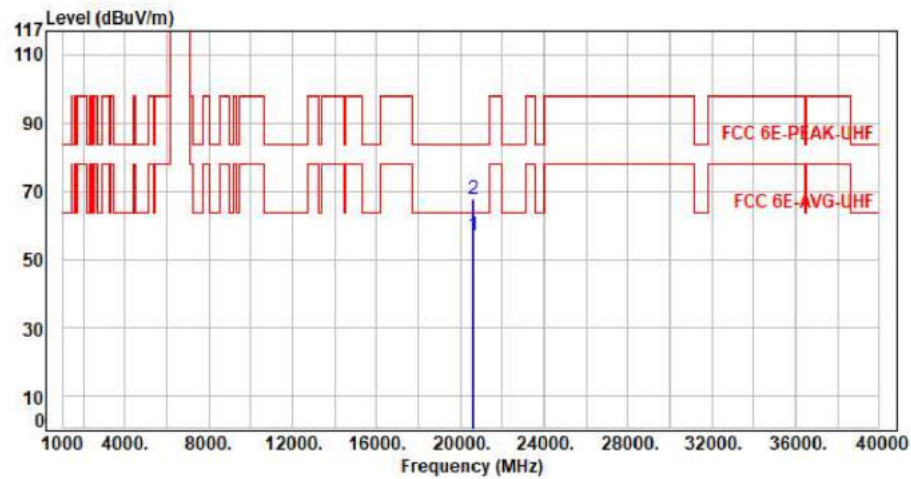


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20625.00	11.14	45.65	56.79	63.54	-6.75	Average	150	360	P
2	20625.00	11.14	56.68	67.82	83.54	-15.72	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH187 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

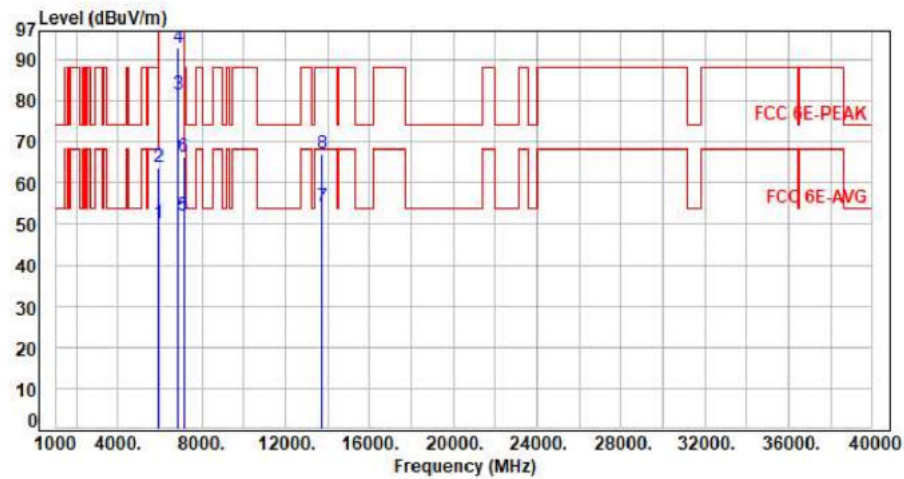

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5925.00	7.66	42.63	50.29	68.20	-17.91	Average	274	24	P
2	5925.00	7.66	56.15	63.81	88.20	-24.39	Peak	274	24	P
3	6885.00	9.56	72.06	81.62	200.00	-118.38	Average	274	24	P
4	6885.00	9.56	83.45	93.01	200.00	-106.99	Peak	274	24	P
5	7125.00	10.05	42.11	52.16	68.20	-16.04	Average	274	24	P
6	7125.00	10.05	56.33	66.38	88.20	-21.82	Peak	274	24	P
7	13770.00	22.69	31.41	54.10	68.20	-14.10	Average	100	123	P
8	13770.00	22.69	44.61	67.30	88.20	-20.90	Peak	100	123	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor