




For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax40 CH227 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

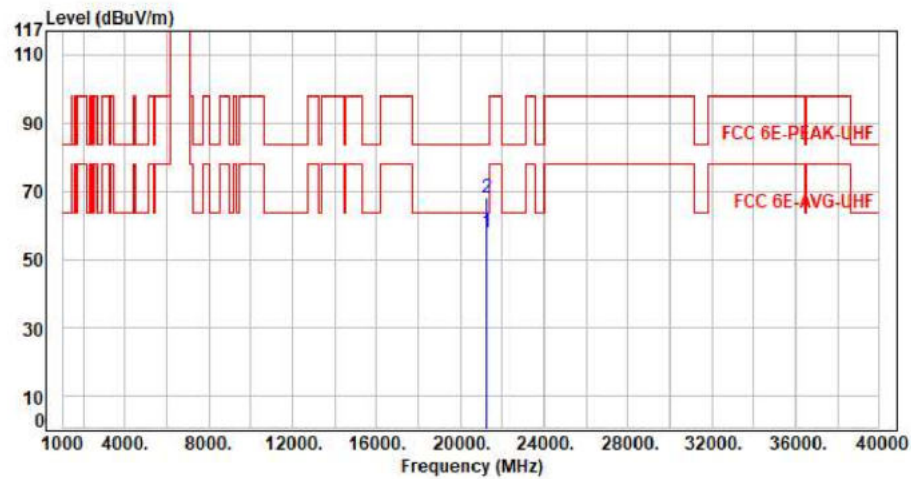


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21255.00	11.84	45.78	57.62	63.54	-5.92	Average	150	360	P
2	21255.00	11.84	56.21	68.05	83.54	-15.49	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

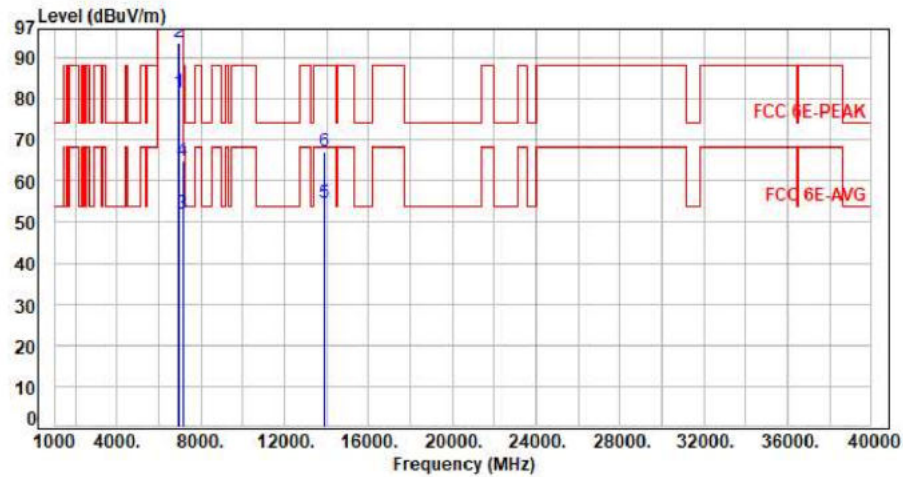


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	71.78	81.40	200.00	-118.60	Average	268	28	P
2	6945.00	9.62	84.04	93.66	200.00	-106.34	Peak	268	28	P
3	7125.00	10.05	42.10	52.15	68.20	-16.05	Average	268	28	P
4	7125.00	10.05	55.00	65.05	88.20	-23.15	Peak	268	28	P
5	13890.00	22.95	31.55	54.50	68.20	-13.70	Average	100	133	P
6	13890.00	22.95	44.21	67.16	88.20	-21.04	Peak	100	133	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

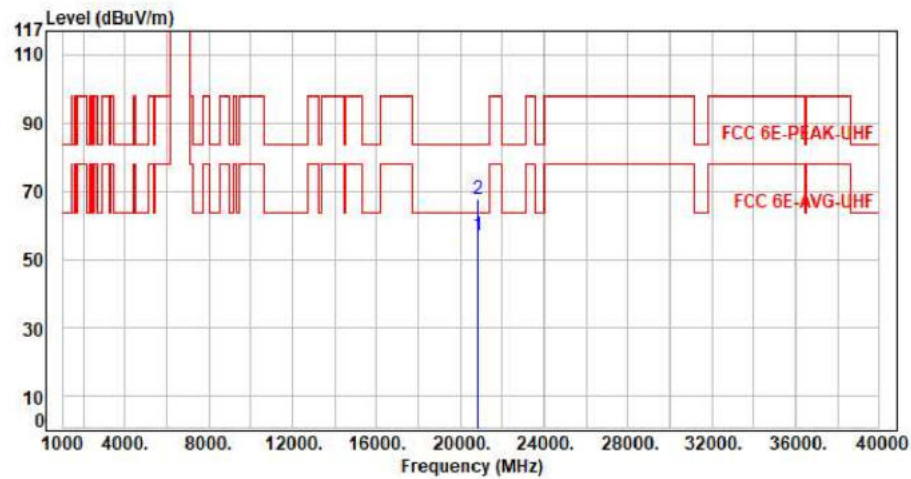

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.51	56.91	63.54	-6.63	Average	150	360	P
2	20835.00	11.40	56.15	67.55	83.54	-15.99	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

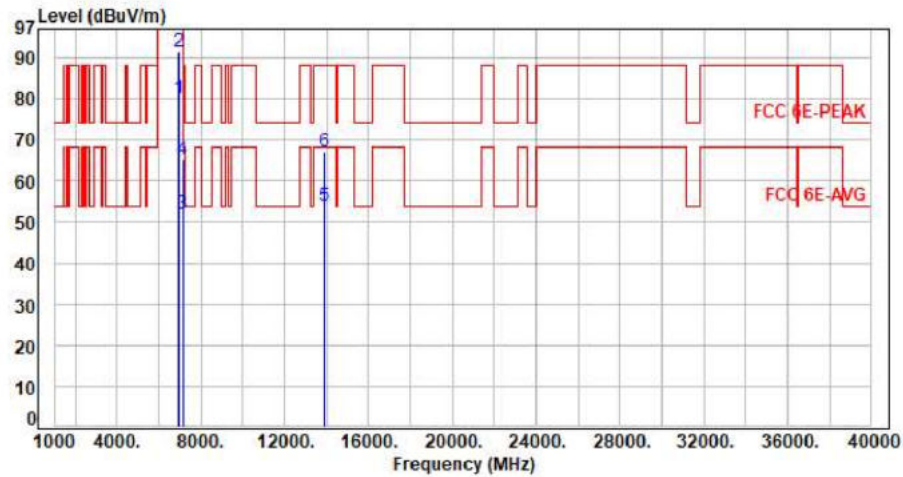


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6945.00	9.62	70.58	80.20	200.00	-119.80	Average	400	287	P
2	6945.00	9.62	81.68	91.30	200.00	-108.70	Peak	400	287	P
3	7125.00	10.05	42.09	52.14	68.20	-16.06	Average	400	287	P
4	7125.00	10.05	55.31	65.36	88.20	-22.84	Peak	400	287	P
5	13890.00	22.95	30.98	53.93	68.20	-14.27	Average	100	172	P
6	13890.00	22.95	44.03	66.98	88.20	-21.22	Peak	100	172	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH199 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

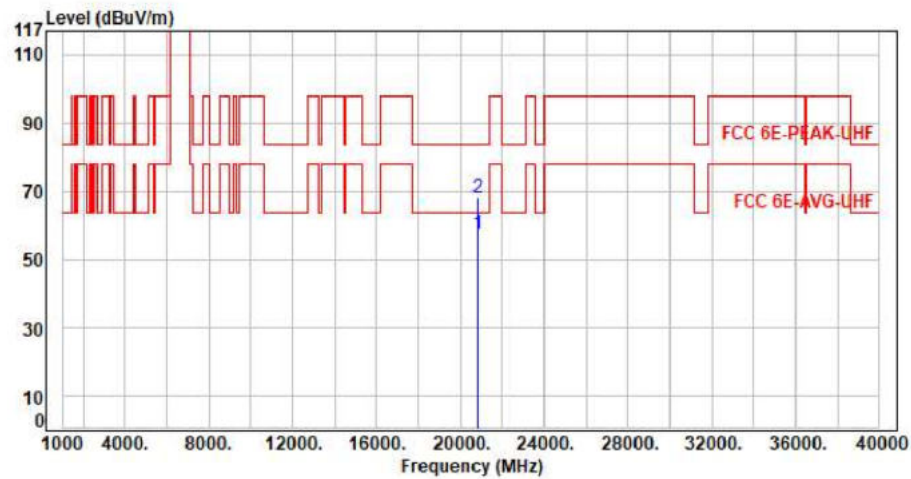

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20835.00	11.40	45.78	57.18	63.54	-6.36	Average	150	360	P
2	20835.00	11.40	56.74	68.14	83.54	-15.40	Peak	150	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

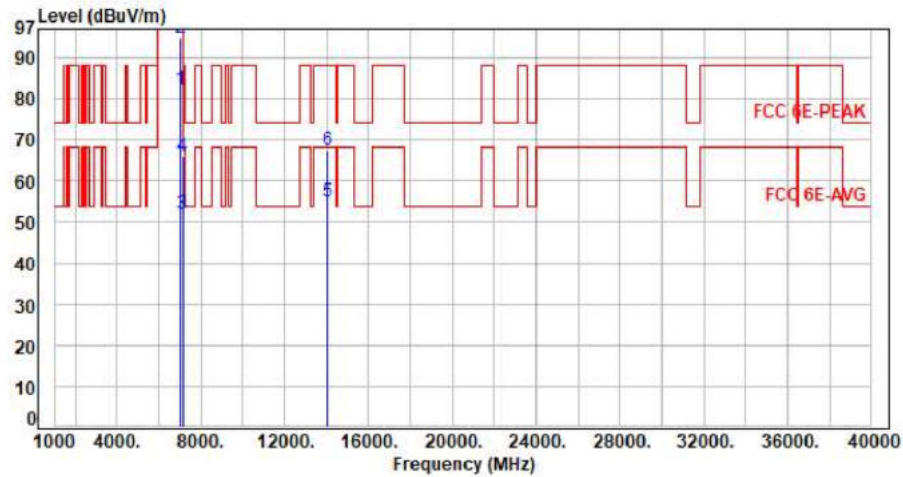


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	72.71	82.42	200.00	-117.58	Average	100	7	P
2	7025.00	9.71	85.04	94.75	200.00	-105.25	Peak	100	7	P
3	7125.00	10.05	42.05	52.10	68.20	-16.10	Average	100	7	P
4	7125.00	10.05	55.87	65.92	88.20	-22.28	Peak	100	7	P
5	14050.00	23.47	31.64	55.11	68.20	-13.09	Average	100	224	P
6	14050.00	23.47	43.85	67.32	88.20	-20.88	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

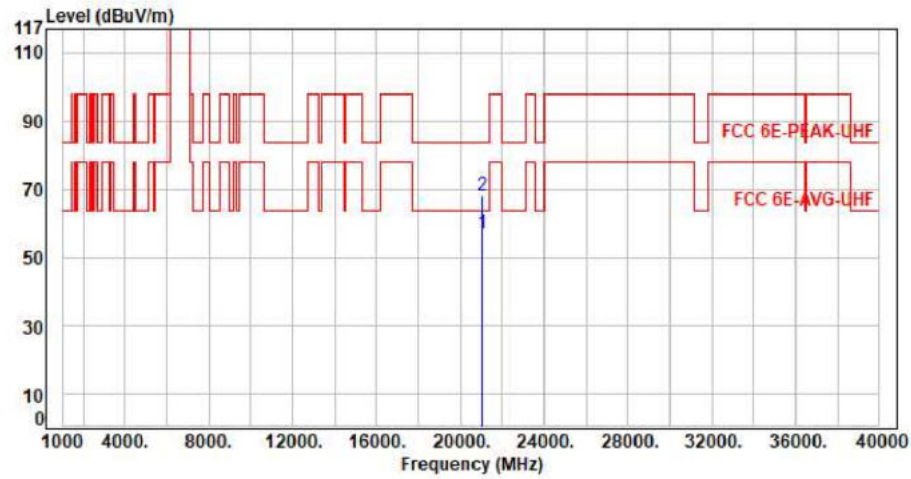


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.46	56.98	63.54	-6.56	Average	150	360	P
2	21075.00	11.52	56.41	67.93	83.54	-15.61	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

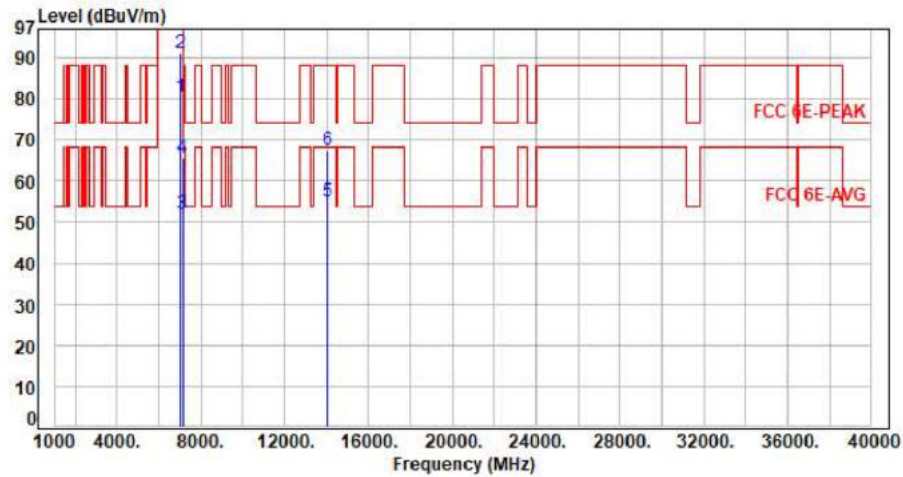


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7025.00	9.71	70.67	80.38	200.00	-119.62	Average	333	276	P
2	7025.00	9.71	81.54	91.25	200.00	-108.75	Peak	333	276	P
3	7125.00	10.05	42.02	52.07	68.20	-16.13	Average	333	276	P
4	7125.00	10.05	55.57	65.62	88.20	-22.58	Peak	333	276	P
5	14050.00	23.47	31.45	54.92	68.20	-13.28	Average	100	138	P
6	14050.00	23.47	44.21	67.68	88.20	-20.52	Peak	100	138	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x80 CH215 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

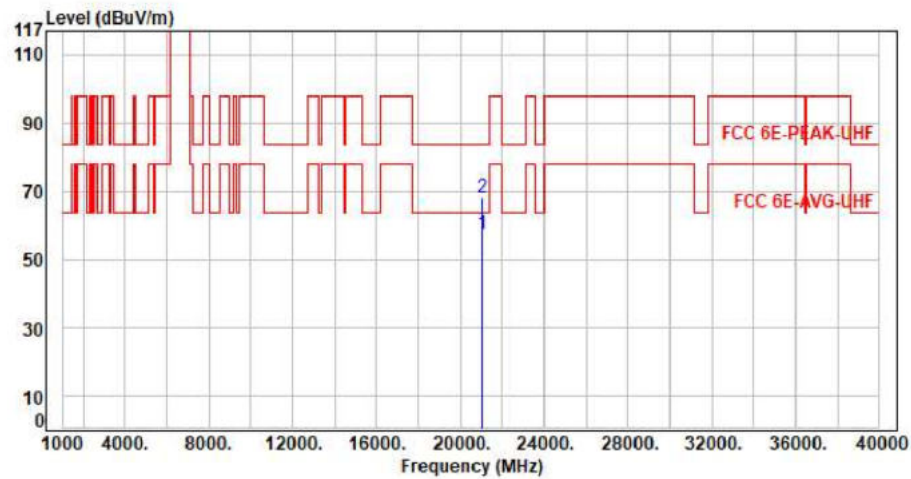


No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	21075.00	11.52	45.99	57.51	63.54	-6.03	Average	150	360	P
2	21075.00	11.52	56.48	68.00	83.54	-15.54	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

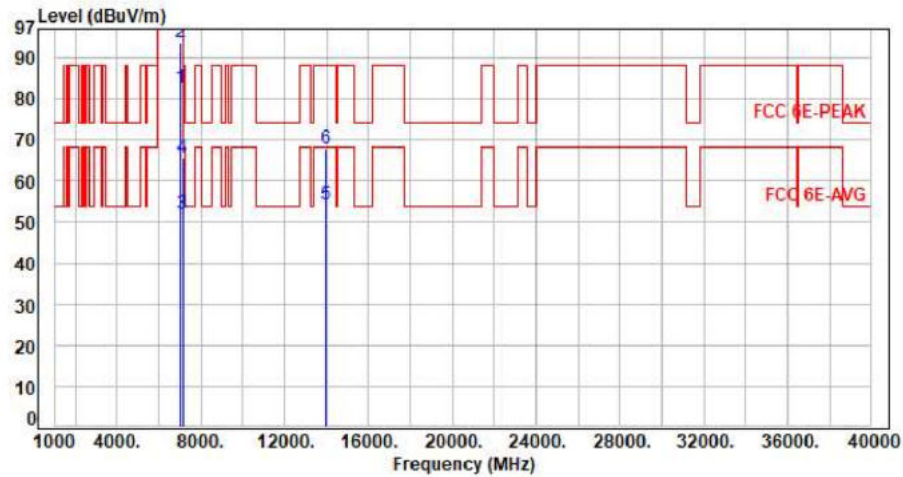


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	72.83	82.46	200.00	-117.54	Average	265	360	P
2	6985.00	9.63	83.87	93.50	200.00	-106.50	Peak	265	360	P
3	7125.00	10.05	42.04	52.09	68.20	-16.11	Average	265	360	P
4	7125.00	10.05	55.52	65.57	88.20	-22.63	Peak	265	360	P
5	13970.00	23.15	31.23	54.38	68.20	-13.82	Average	100	156	P
6	13970.00	23.15	44.63	67.78	88.20	-20.42	Peak	100	156	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Vertical

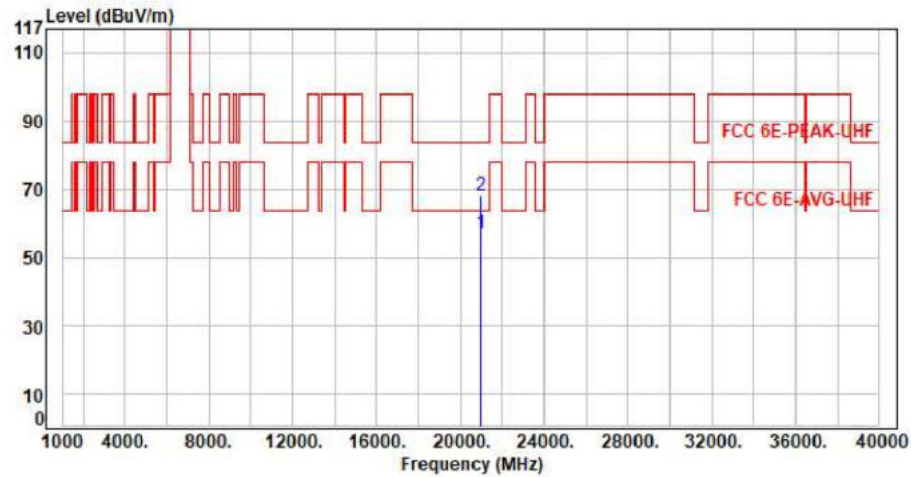


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.41	56.89	63.54	-6.65	Average	150	360	P
2	20955.00	11.48	56.43	67.91	83.54	-15.63	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11ax160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

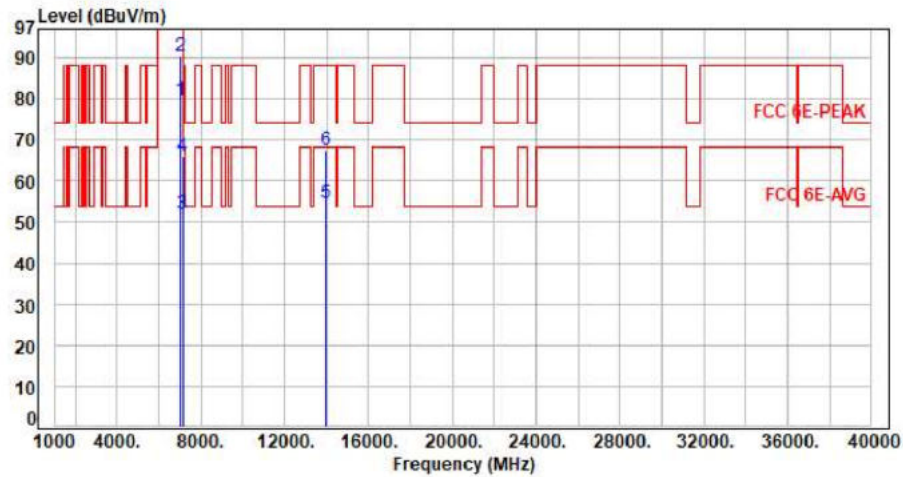


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6985.00	9.63	70.03	79.66	200.00	-120.34	Average	355	280	P
2	6985.00	9.63	80.79	90.42	200.00	-109.58	Peak	355	280	P
3	7125.00	10.05	42.08	52.13	68.20	-16.07	Average	355	280	P
4	7125.00	10.05	56.12	66.17	88.20	-22.03	Peak	355	280	P
5	13970.00	23.15	31.59	54.74	68.20	-13.46	Average	100	224	P
6	13970.00	23.15	44.24	67.39	88.20	-20.81	Peak	100	224	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



For CRIUS N320-G1-Mimo

Test Mode : 2TX 11x160 CH207 NSS1 MCS0
Voltage : From Adapter(AC120V/60Hz)
Pol : Horizontal

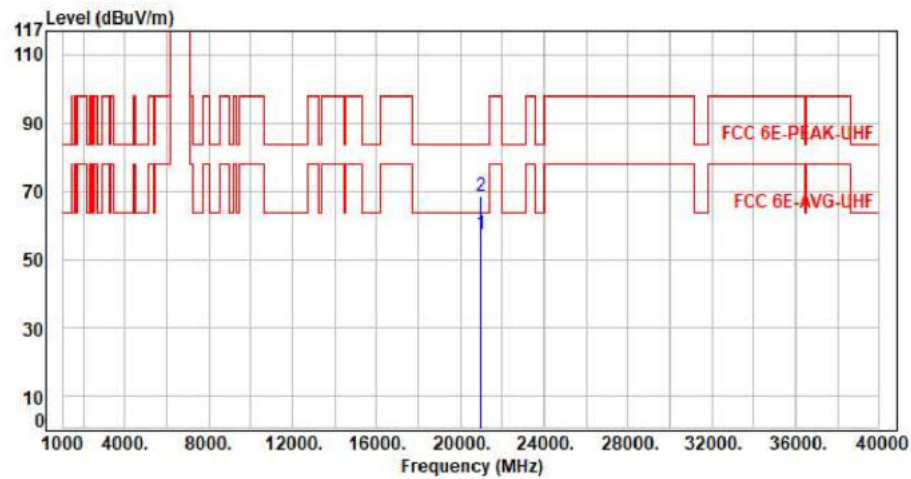

No.	Frequency (MHz)	Factor (dB)	Reading (dBUV)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	20955.00	11.48	45.87	57.35	63.54	-6.19	Average	150	360	P
2	20955.00	11.48	56.95	68.43	83.54	-15.11	Peak	150	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Restricted Bands of Operation**

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.150
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz