

TEST REPORT

Report No.: BCTC2312680214E

Applicant: Hypertechnologie Ciara Inc. Ciara Technologies Inc

Product Name: Notebook PC

Model/Type reference: CRIUS N110-G1, CRIUS N110-G1-BL

Tested Date: 2023-12-20 to 2023-12-22

Issued Date: 2024-03-20

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2BDS2-CRIUS110

Product Name: Notebook PC

Trademark: 

Model/Type Ref.: CRIUS N110-G1, CRIUS N110-G1-BL

Applicant: Hypertechnologie Ciara Inc. Ciara Technologies Inc

Address: 9300 Transcanadienne St-Laurent, Quebec H4S 1K5 Canada

Manufacturer: Hypertechnologie Ciara Inc. Ciara Technologies Inc

Address: 9300 Transcanadienne St-Laurent, Quebec H4S 1K5 Canada

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2023-12-20

Sample tested Date: 2023-12-20 to 2023-12-22

Issue Date: 2024-03-20


SAR Max. Values is : 1.264 W/kg (1g) for Body

Test Standards: IEEE Std C95.1, 2019/ IEEE Std 1528™-2013/FCC Part 2.1093

Test Results: PASS

Remark: This is SAR test report

Tested by:



Min Zhi Cheng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Standards	6
3. Test Summary	7
4. SAR Limits.....	8
5. Measurement Uncertainty	9
6. Product Information and Test Setup	10
6.1 Product Information	10
6.2 Test Setup Configuration	12
6.3 Support Equipment.....	12
6.4 Test Environment	12
7. Test Facility and Test Instrument Used	13
7.1 Test Facility	13
7.2 Test Instrument Used	14
8. Specific Absorption Rate (SAR)	15
8.1 Introduction.....	15
8.2 SAR Definition	15
9. SAR Measurement System	16
9.1 The Measurement System.....	16
9.2 Probe.....	16
9.3 Probe Calibration Process	18
9.4 Phantom	19
9.5 Device Holder	19
10. Tissue Simulating Liquids.....	20
10.1 Composition of Tissue Simulating Liquid	20
10.2 Limit.....	21
10.3 Tissue Calibration Result.....	22
11. System Check	23
11.1 Purpose of System Performance Check.....	23
11.2 System Setup	23
11.3 Validation Results	24
12. EUT Testing Position.....	25
13. SAR Measurement Procedures.....	26
13.1 Measurement Procedures	26
13.2 Spatial Peak SAR Evaluation	26
13.3 Area & Zoom Scan Procedures	27
13.4 Volume Scan Procedures	28
13.5 SAR Averaged Methods	28
13.6 Power Drift Monitoring	28
14. SAR Test Result.....	29
14.1 Conducted RF Output Power.....	29
14.2 Transmit Antennas and SAR Measurement Position.....	40
14.3 Measured and Reported (Scaled) SAR Results	41
14.4 SAR Measurement Variability.....	45


14.5 Simultaneous Transmission Evaluation	46
15. Test Plots	48
15.1 System Performance Check	48
15.2 SAR Test Graph Results	58
16 CALIBRATION CERTIFICATES.....	80
17. EUT Photographs	118
18. Photographs Of The Liquid.....	119
19. EUT Test Setup Photographs.....	120

(Note: N/A Means Not Applicable)

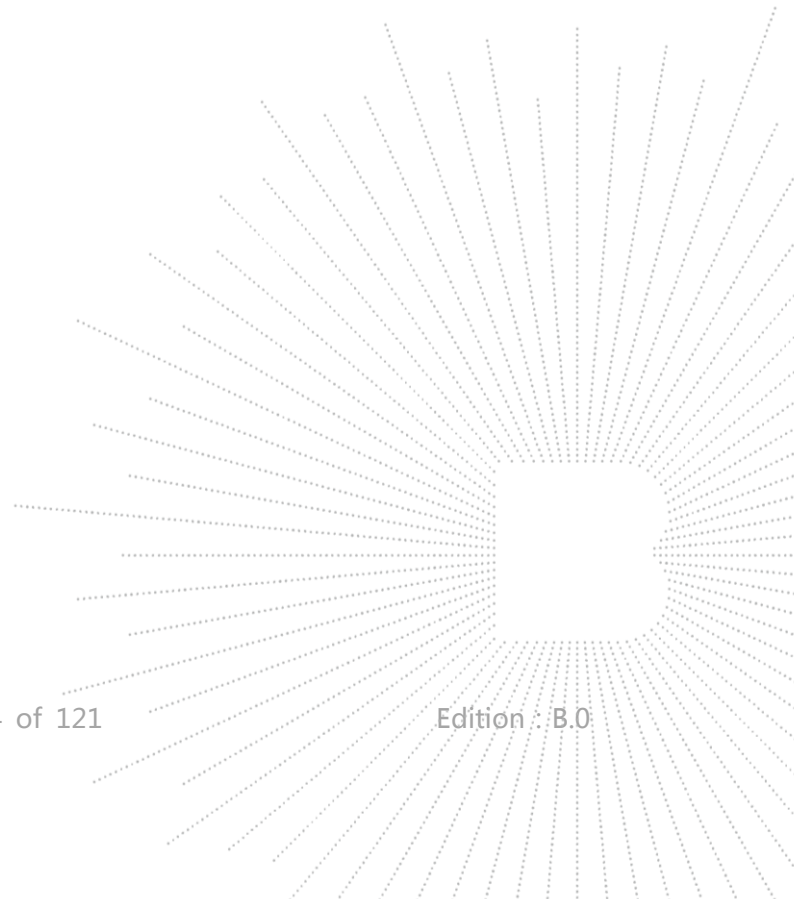

1. Version

Report No.	Issue Date	Description	Approved
BCTC2312680214E	2024-03-20	Original	Valid

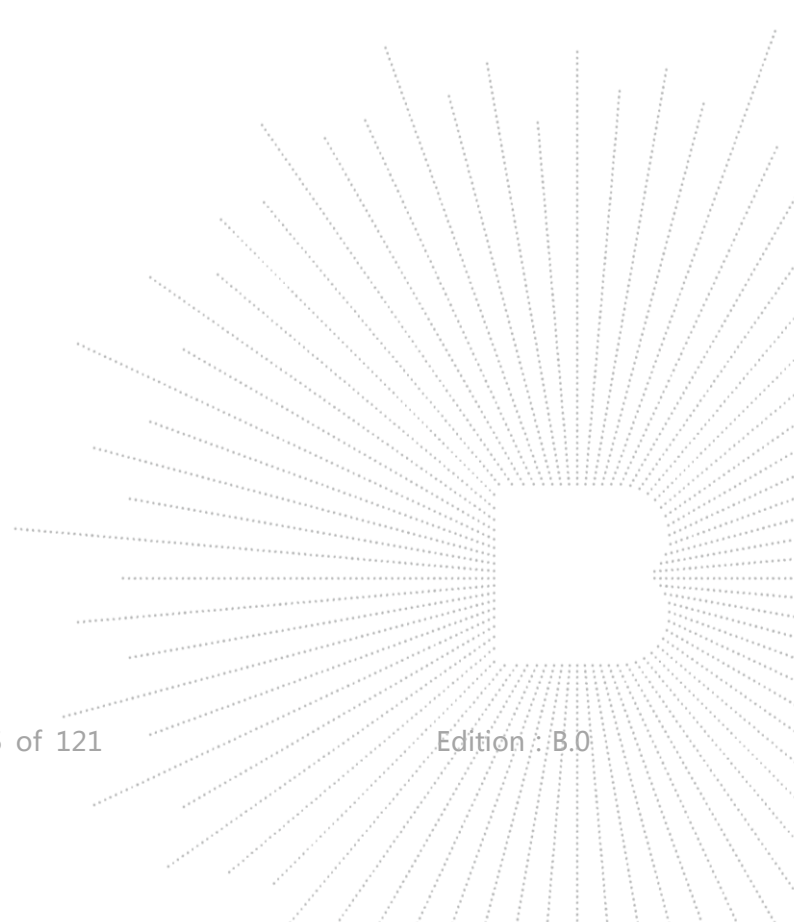

2. Test Standards

IEEE Std C95.1-2019: IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.


IEEE Std 1528™-2013: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB 865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

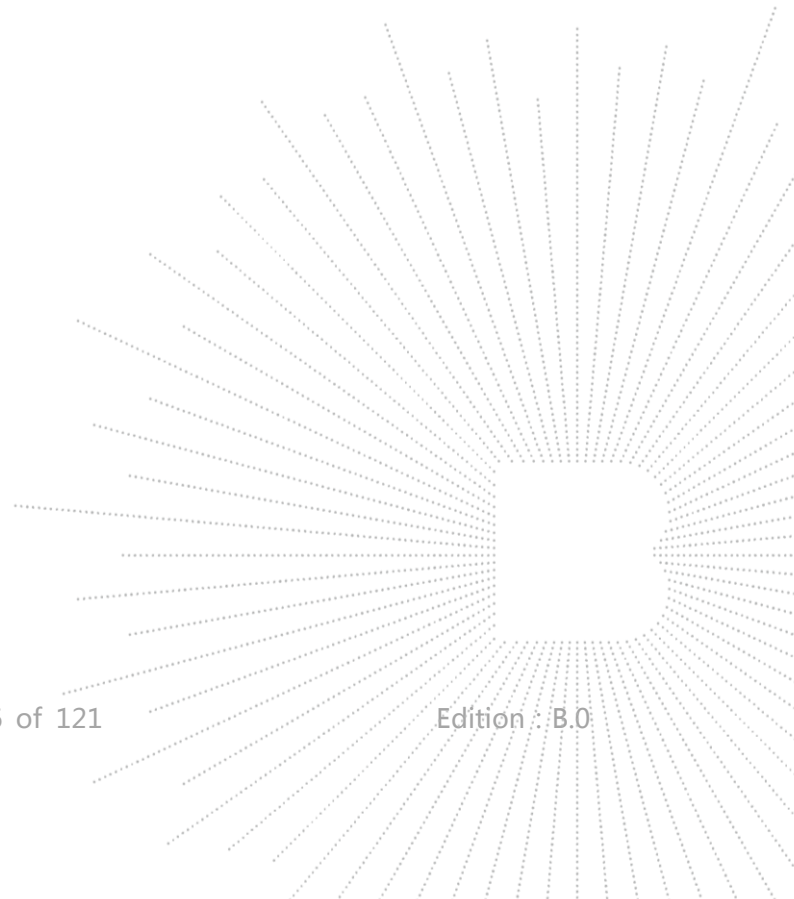


3. Test Summary

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Report SAR _{1g} (W/kg)	SAR _{1g} Limit (W/kg)
	Body (0mm Gap)	
Bluetooth	0.233	1.6
WIFI2.4 G (ANT-A)	1.264	1.6
WIFI2.4 G (ANT-B)	1.115	1.6
WIFI5G (ANT-A)	0.720	1.6
WIFI5G (ANT-B)	0.764	1.6
Simultaneous Transmission	1.266	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013.

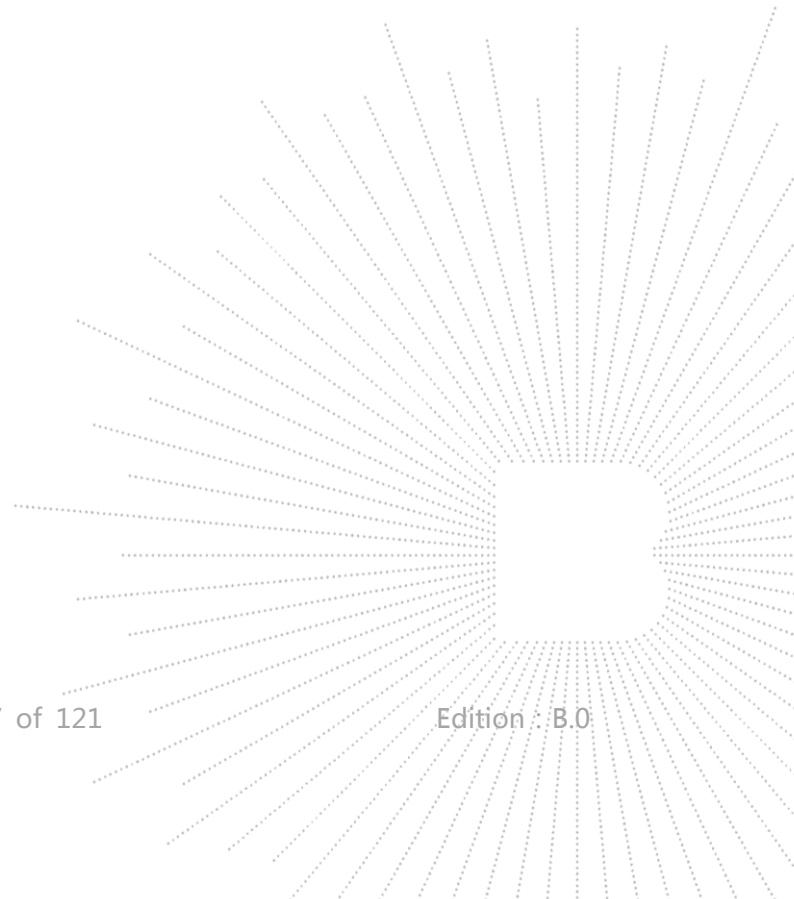


4. SAR Limits

EXPOSURE LIMITS	FCC Limit (1g Tissue)	
	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average(averaged over the whole body)	0.08	0.4
Spatial Peak(averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.


Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

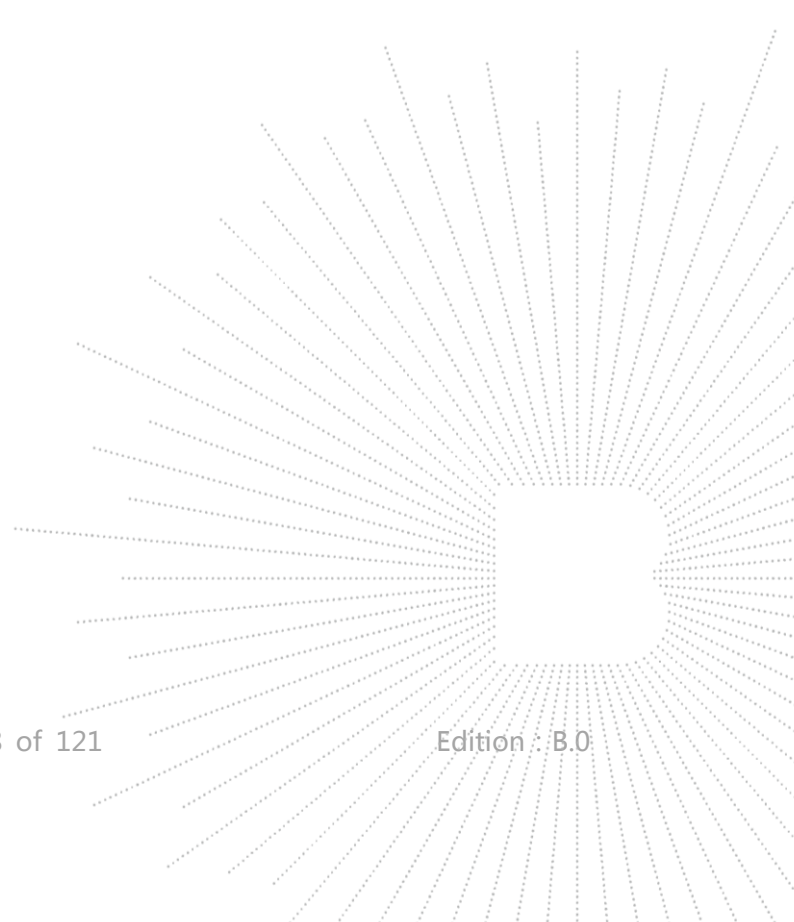

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k=2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

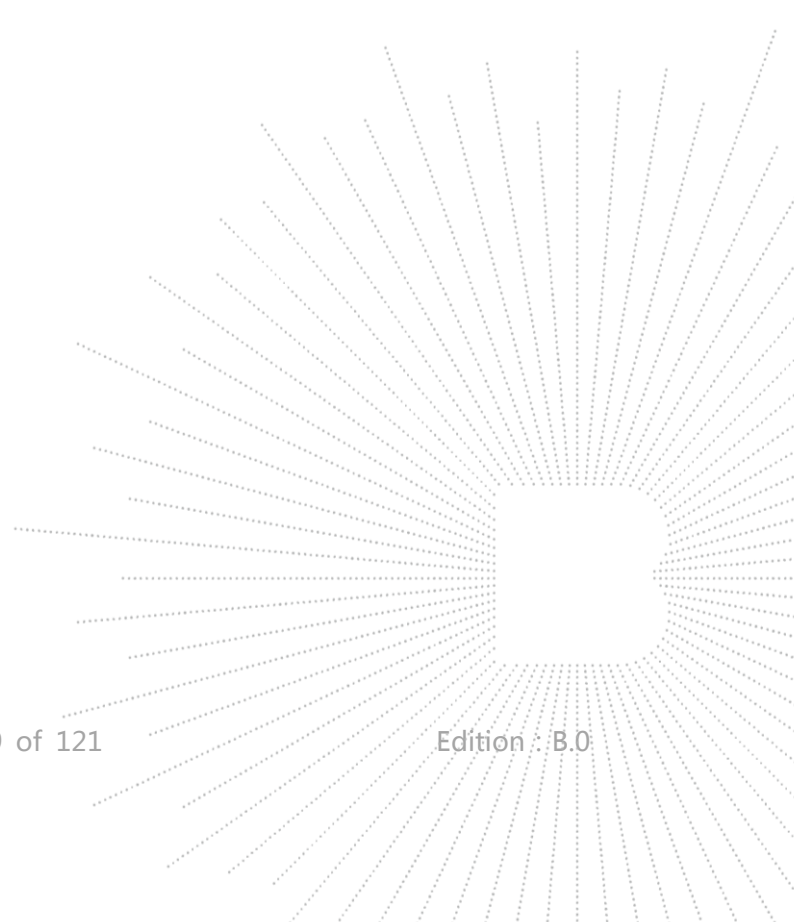

6. Product Information and Test Setup

6.1 Product Information


Model/Type Ref.:	CRIUS N110-G1, CRIUS N110-G1-BL
Model differences:	All the model are the same circuit and RF module,except model names.
Hardware Version:	N/A
Software Version:	N/A
Ratings:	Battery: DC 7.4V 5000mAh 37Wh

Bluetooth

Operation Frequency:	2402-2480MHz
Bluetooth Version:	N/A
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number Of Channel	79CH
Antenna installation:	Internal antenna
Antenna Gain:	4.39 dBi

BLE

Operation Frequency:	2402-2480MHz
Bluetooth Version:	N/A
Type of Modulation:	GFSK,1Mbps
Number Of Channel	40channel
Antenna installation:	Internal antenna
Antenna Gain:	4.39 dBi

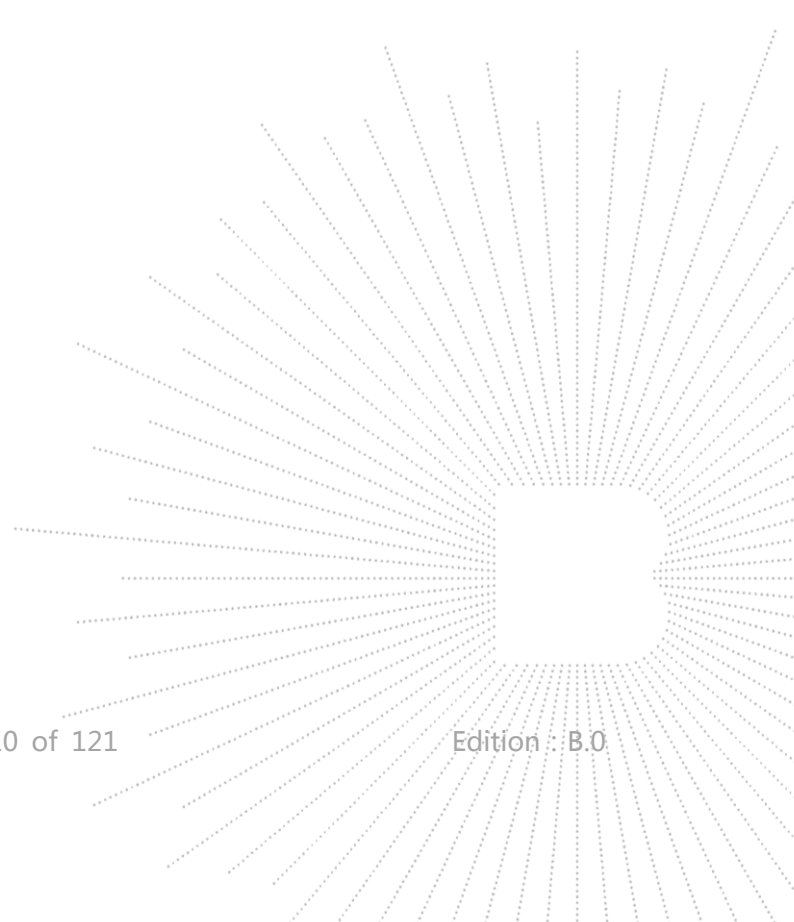

WIFI

WIFI2.4G	
Operation Frequency:	802.11b/g/n20/ax20MHz:2412~2462 MHz 802.11n40/ax40MHz:2422~2452 MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n/ax Up to 150Mbps
Type of Modulation:	OFDM/DSSS
Number Of Channel	802.11b/g/n20/ax20MHz:11 CH 802.11n40/ax40MHz: 7 CH
Antenna Gain:	A: 3.09 dBi B: 4.39 dBi
WIFI5G	
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac/ax(20MHz channel bandwidth) 802.11n/ac/ax(40MHz channel bandwidth) 802.11ac/ax(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n/ac/ax(HT20) 5190-5230MHz for 802.11n/ac/ax(HT40) 5210MHz for 802.11ac/ax(HT80) 5260-5320MHz for 802.11a/n/ac/ax(HT20) 5270-5310MHz for 802.11n/ac/ax(HT40) 5290MHz for 802.11ac/ax(HT80) 5500-5700MHz for 802.11a/n/ac/ax(HT20) 5510-5670MHz for 802.11n/ac/ax(HT40) 5530MHz for 802.11ac/ax(HT80) 5745-5825 MHz for 802.11a/ n/ac/ax(HT20) 5755-5795 MHz for 802.11 n/ac/ax(HT40) 5775MHz for 802.11 ac/ax(HT80)
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac/ax;
Number Of Channel	4 channels for 802.11a/n20/ac20/ax20 in the 5180-5240MHz band 2 channels for 802.11n40/ac40/ax40 in the 5190-5230MHz band 1 channels for 802.11ac80/ax80 in the 5210MHz band 4 channels for 802.11a/n20/ac20/ax20 in the 5260-5320MHz band 2 channels for 802.11n40/ac40/ax40 in the 5270-5310MHz band 1 channels for 802.11ac80/ax80 in the 5290MHz band 4 channels for 802.11a/n20/ac20/ax20 in the 5500-5700MHz band 2 channels for 802.11n40/ac40/ax40 in the 5510-5670MHz band 1 channels for 802.11ac80/ax80 in the 5530MHz band 5 channels for 802.11a/n20/ax20 in the 5745-5825MHz band 2 channels for 802.11n40/ax40 in the 5755-5795MHz band 1 channels for 802.11ac80/ax80 in the 5775MHz band
Antenna installation:	Internal antenna
Antenna Gain:	5.2G: A: 3.64 dBi, B: 4.39 dBi 5.3G: A: 3.89 dBi, B: 4.60 dBi 5.6G: A: 3.99 dBi, B: 6.18 dBi 5.8G: A: 3.41 dBi, B: 5.73 dBi

6.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

6.3 Support Equipment

Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	--
2	--	--	BCTC	--	Yes/No	--

No.	Device Type	Brand	Model	Series No.	Note
1.	---	---	---	---	---
2.	--	--	--	--	--

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6.4 Test Environment

1. Normal Test Conditions:

Humidity(%):	35-75
Atmospheric Pressure(kPa):	95-105
Temperature(°C):	18-25

2. Extreme Test Conditions:


N/A

7. Test Facility and Test Instrument Used

7.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850
A2LA certificate registration number is: CN1212
ISED Registered No.: 23583
ISED CAB identifier: CN0017

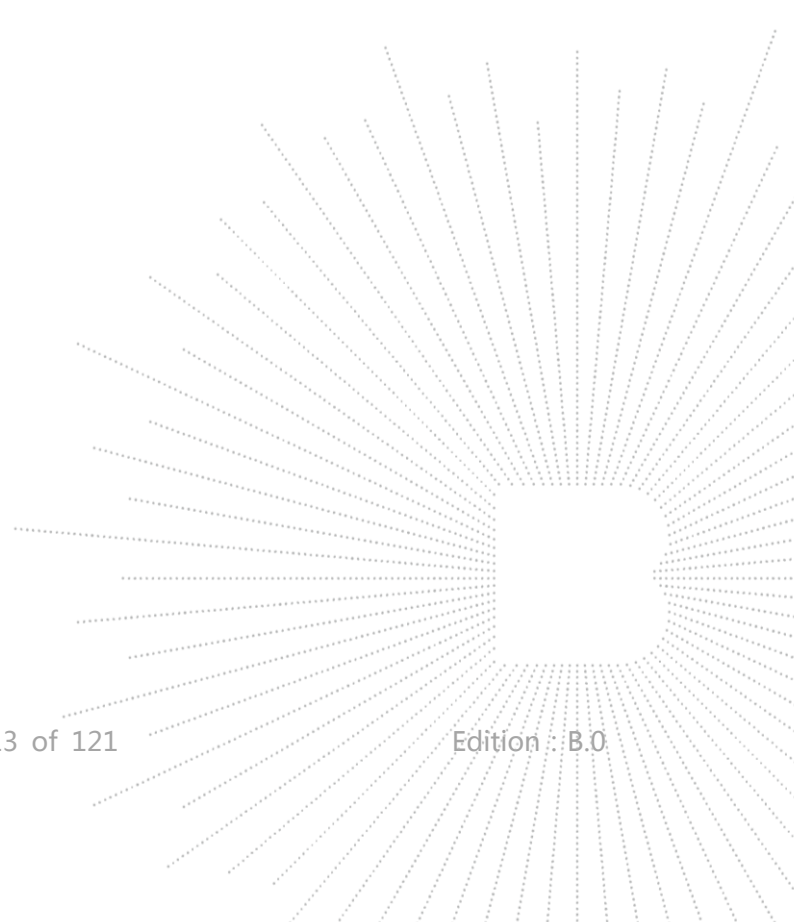

7.2 Test Instrument Used

Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
PC	DELL	\	\	N/A	N/A
SAR Measurement system	SATIMO	\	\	N/A	N/A
Signal Generator	Keysight	83711B	US37100131	Aug. 29, 2023	Aug. 28, 2024
Multimeter	Keithley	1160271	\	Nov. 10, 2023	Nov 09, 2024
S-parameter Network Analyzer	R&S	ZVB 8	101353	Dec. 07, 2023	Dec. 06, 2024
Wideband Radio Communication Tester	R&S	CMW500	\	Nov. 10, 2023	Nov 09, 2024
E SAR PROBE 6GHz	MVG	SSE2	2623-EPGO-420	July 18, 2023	July 17, 2024
DIPOLE 2450	SATIMO	SID 2450	SN 47/21 DIP 2G450-627	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 5000	SATIMO	SID5000	SN 47/21 DIP 2G450-629	Nov. 25, 2021	Nov. 24, 2024
COMOSAR OPENCoaxial Probe	SATIMO	\	\	Nov. 18, 2023	Nov. 17, 2024
SAR Locator	SATIMO	\	\	Nov. 18, 2023	Nov. 17, 2024
Communication Antenna	SATIMO	\	\	Nov. 18, 2023	Nov. 17, 2024
FEATURE PHONEPOSITIONING DEVICE	SATIMO	\	\	N/A	N/A
DUMMY PROBE	SATIMO	\	\	N/A	N/A
SAM Phantom	MVG	\	SN 13/09 SAM68	N/A	N/A
Liquid measurement Kit	HP	85033D	3423A08186	N/A	N/A
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Directional Coupler	Krytar 158020	131467	\	Nov. 10, 2023	Nov 09, 2024
Thermometer	BTE	\	\	Dec. 02, 2023	Dec. 01, 2024
Broad Band Tissue Simulation Liquid	Schmid	\	\	N/A	N/A

Note:

Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three year extended calibration interval. Each measured dipole is expected to evaluate with following criteria at least on annual interval.

1. There is no physical damage on the dipole;
2. System check with specific dipole is within 10% of calibrated values;
3. The most recent return-loss results, measured at least annually, deviates by no more than 20% from the previous measurement;
4. The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the

electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

9. SAR Measurement System

9.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


9.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 46/21 EPGO362 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm
- Distance between probe tip and sensor center: 2.10mm
- Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB
- Calibration range: 835 to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antennassa proprietary calibration system. The calibration is performed with the EN 62209-1 annex technique using reference guide at the five frequencies.

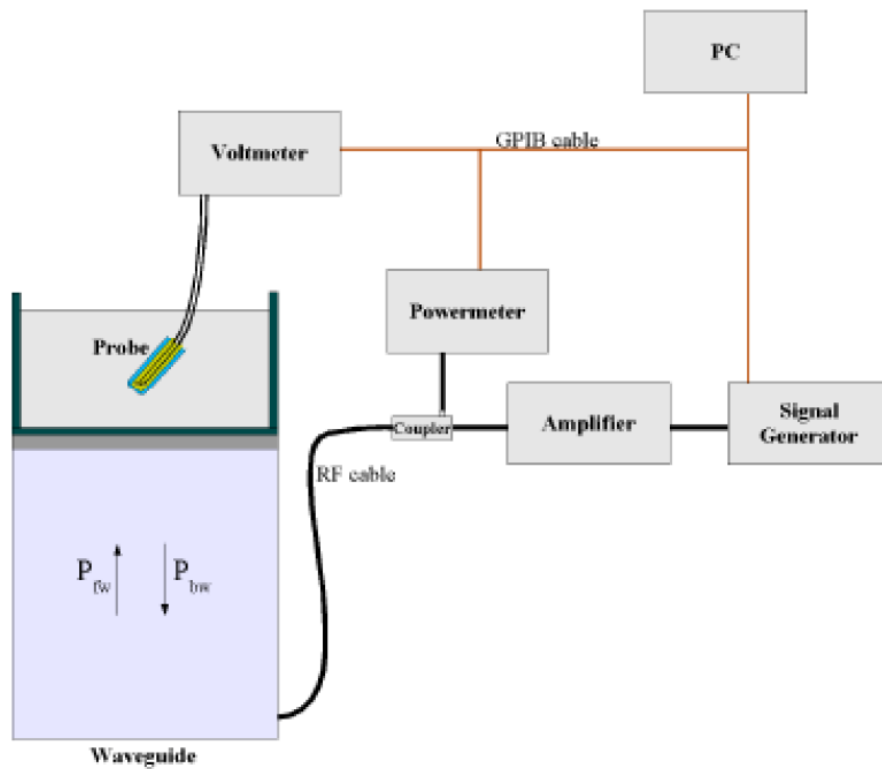

$$SAR = \frac{4(p_{fw} - p_{pbw})}{ab\delta} \cos^2 \left(\pi \frac{y}{a} \right) c^{(2\pi/\delta)}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

9.3 Probe Calibration Process

Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm².

Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.


SAR is proportional to $\Delta T/\Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

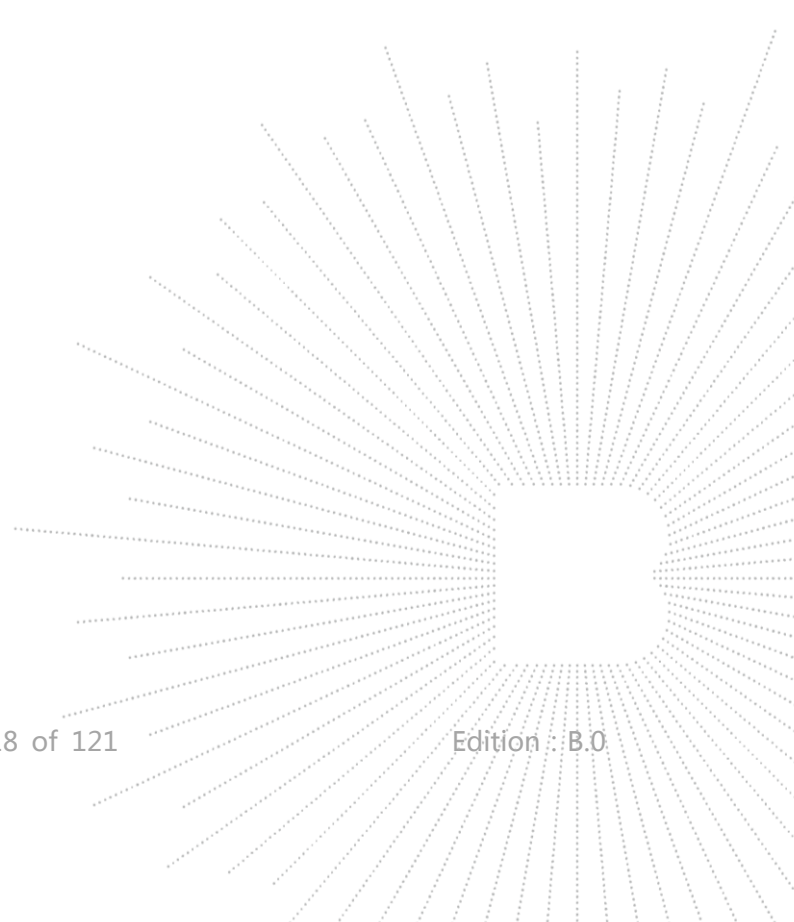


9.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

9.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

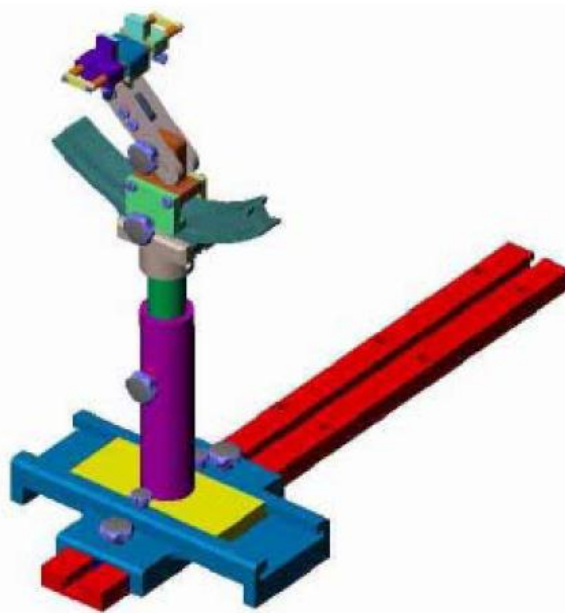

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

10. Tissue Simulating Liquids

10.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	1,2-Propane diol (%)	HEC (%)	Preventol (%)	DGBE (%)
Head/Body						
835	40.3	1.4	57.9	0.2	0.2	0
900	40.3	1.4	57.9	0.2	0.2	0
1800-2000	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
Head/Body			
5000-6000	65.52	17.24	17.24

10.2 Limit

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters

computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head	
	Conductivity (σ)	Permittivity (ϵ_r)
150	0.76	52.3
300	0.87	45.3
450	0.87	43.5
750	0.89	41.9
835	0.90	41.5
900	0.97	41.5
915	0.98	41.5
1450	1.20	40.5
1610	1.29	40.3
1800-2000	1.40	40.0
2450	1.80	39.2
2600	1.96	39.0
3000	2.40	38.5
5200	4.66	36.0
5400	4.86	35.8
5600	5.07	35.5
5800	5.27	35.3

10.3 Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an R&S ZVB 8. Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Frequency(MHz)	Liquid	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Temp. TSL (°C)	Date
2450	Head	1.80	39.20	1.765	39.547	-1.94	0.89	±5	22.8	20/12/2023
5200	Head	4.66	36.00	4.820	34.580	3.43	-3.94	±5	23.0	21/12/2023
5400	Head	4.86	35.80	4.651	36.170	-4.30	1.03	±5	23.0	21/12/2023
5600	Head	5.07	35.50	4.892	36.360	-3.51	2.42	±5	23.0	21/12/2023
5800	Head	5.27	35.30	5.478	36.622	3.95	3.75	±5	23.0	21/12/2023

Remark:

1. The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.
2. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.


11. System Check

11.1 Purpose of System Performance Check

At the device test frequencies. System check verifies the measurement repeatability of a SAR system before compliance testing and is not a validation of all system specifications. The latter is not required for testing a device but is mandatory before the system is deployed. The system check detects possible short-term drift and unacceptable measurement errors or uncertainties in the system.

11.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 600MHz-6000MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The output power on dipole port must be calibrated to 20 dBm (100 mW) before dipole is connected.

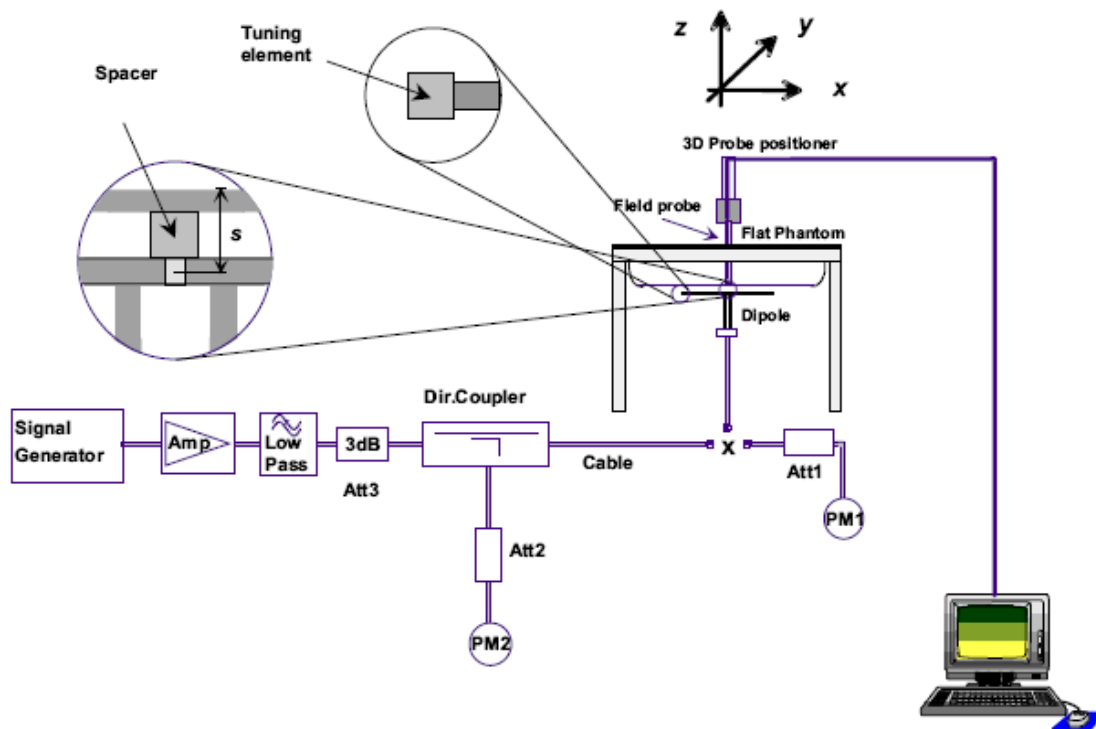

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

11.3 Validation Results


Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. The following table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency (MHz)	Power	Measured SAR _{1g} (W/Kg)	Normalize to 1 Watt	Drift (%)	1W Target	Difference Percentage (%)	Limit (%)	Liquid Temp	Date
					SAR _{1g} (W/Kg)				
2450	250mW	14.154	56.616	-1.634	55.16	2.640	±10	22.8	20/12/2023
5200	250mW	19.736	78.945	3.479	76.41	3.318	±10	23.0	21/12/2023
5400	250mW	20.090	80.359	1.461	80.52	-0.200	±10	23.0	21/12/2023
5600	250mW	19.738	78.950	-0.467	79.08	-0.164	±10	23.0	21/12/2023
5800	250mW	18.538	74.150	3.896	76.49	-3.059	±10	23.0	21/12/2023

12. EUT Testing Position

Body Position

A typical example of a body supported device is a wireless enabled laptop device that among other orientations may be supported on the thighs of a sitting user. To represent this orientation, the device shall be positioned with its base against the flat phantom. Other orientations may be specified by the manufacturer in the user instructions. If the intended use is not specified, the device shall be tested directly against the flat phantom in all usable orientations.

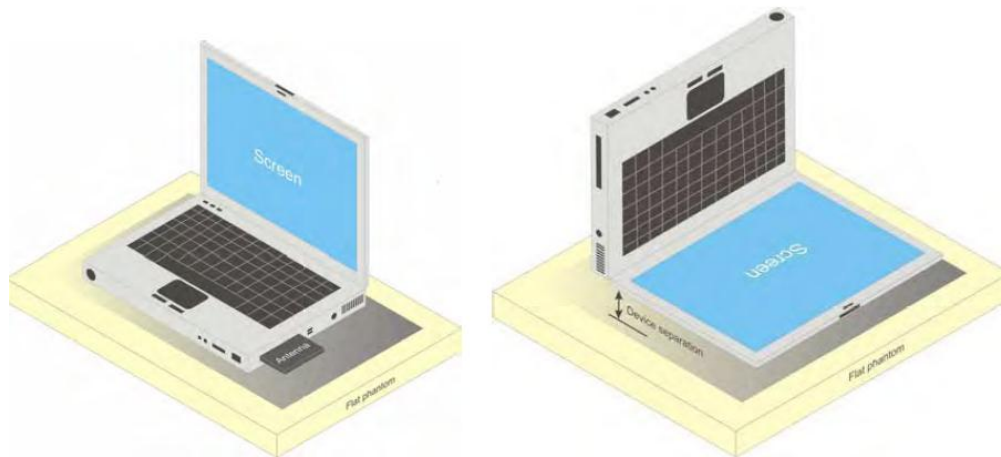

Test positions for Body-supported Device

13. SAR Measurement Procedures

13.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

13.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

13.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

13.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

13.5 SAR Averaged Methods


The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

13.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

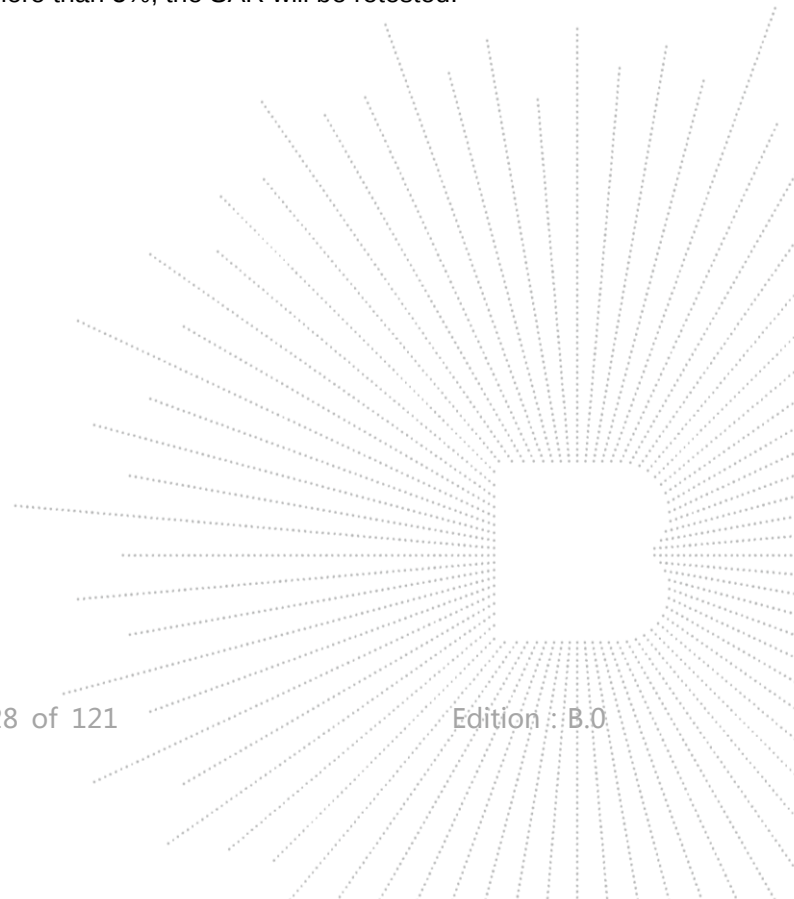


14. SAR Test Result


14.1 Conducted RF Output Power

Bluetooth			
Modulation	Frequency (MHz)	Output Power (dBm)	Tune-up power (dBm)
1-DH5	2402	10.285	11.0
	2441	10.100	
	2480	10.100	
2-DH5	2402	7.385	8.0
	2441	7.556	
	2480	7.726	
3-DH5	2402	7.447	8.0
	2441	7.583	
	2480	7.753	


BLE			
Mode	Frequency (MHz)	Output Power (dBm)	Tune-up power (dBm)
GFSK	2402	7.070	8.0
	2440	7.010	
	2480	7.380	

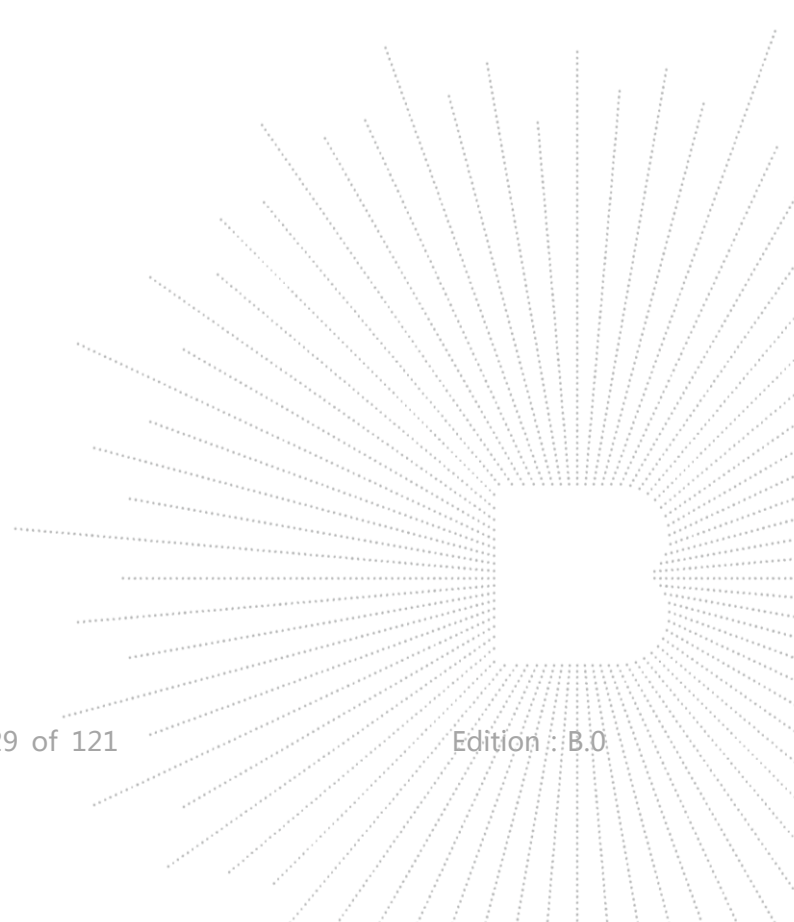

WLAN 2.4G (ANT-A)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
b	2412	21.65	23.0
	2437	22.68	
	2462	22.07	
g	2412	23.72	27.0
	2437	26.78	
	2462	22.73	
n20	2412	23.60	27.0
	2437	26.67	
	2462	22.50	
n40	2422	23.87	24.5
	2437	23.15	
	2452	20.81	
ax20	2412	23.89	27.0
	2437	26.77	
	2462	22.65	
ax40	2422	24.16	24.0
	2437	23.74	
	2452	21.65	

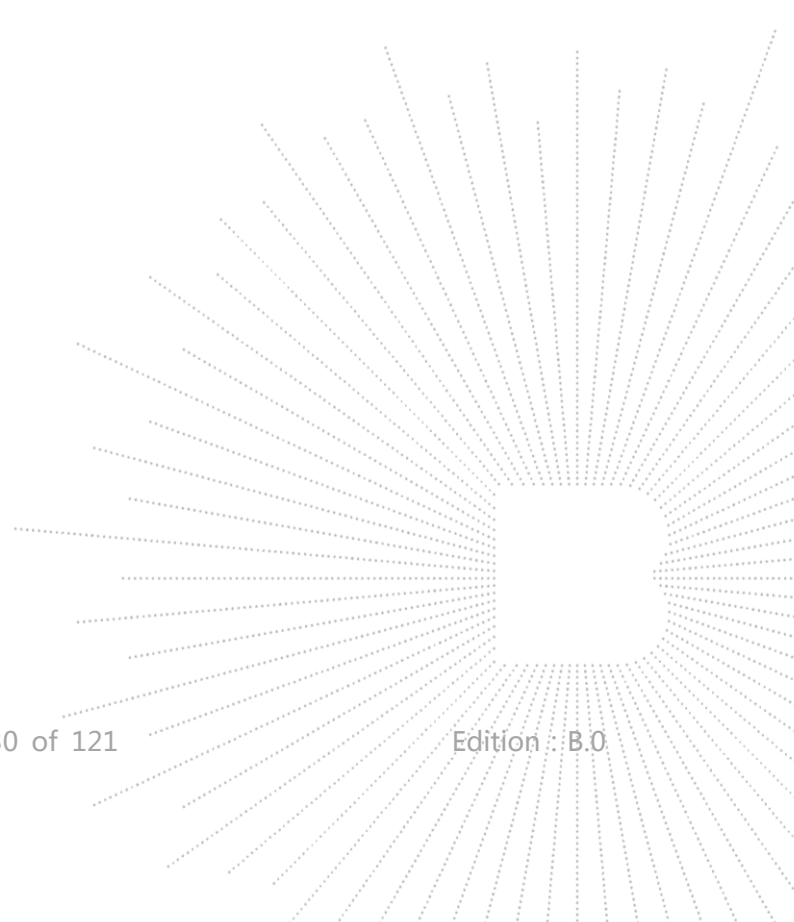

WLAN 2.4G (ANT-B)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
b	2412	21.45	23.0
	2437	22.48	
	2462	22.46	
g	2412	23.54	27.0
	2437	26.37	
	2462	22.15	
n20	2412	23.18	26.5
	2437	25.81	
	2462	21.45	
n40	2422	23.13	23.5
	2437	22.56	
	2452	20.93	
ax20	2412	23.74	27.0
	2437	26.70	
	2462	21.37	
ax40	2422	23.42	24.0
	2437	22.76	
	2452	21.23	

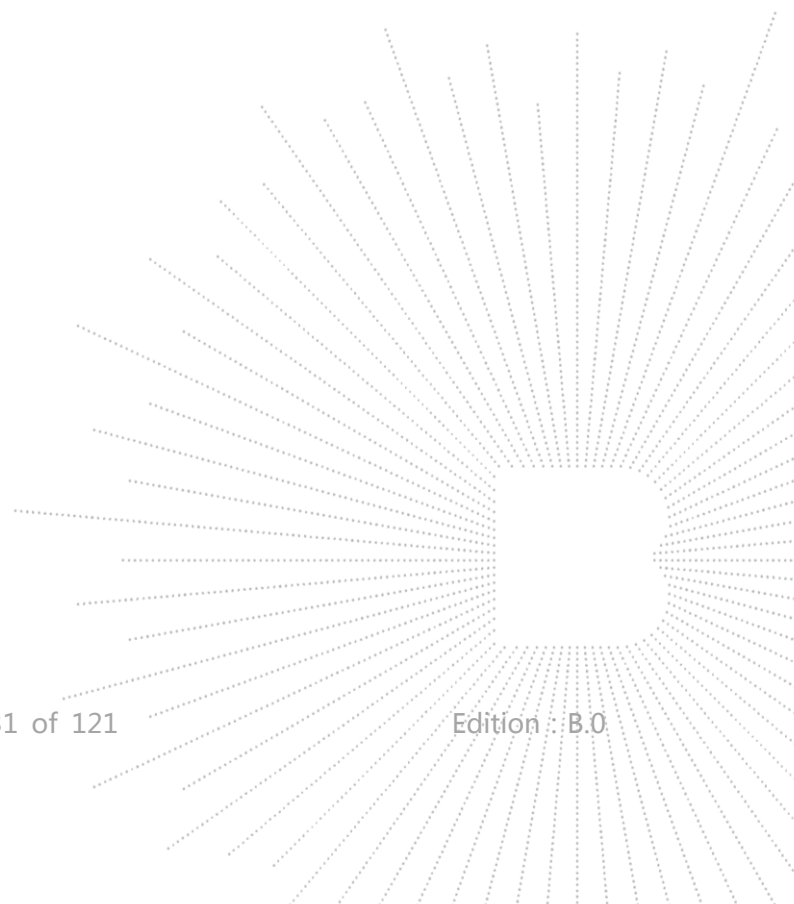

WLAN 5.2G (ANT-A)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5180	15.92	16.5
	5220	16.10	
	5240	16.05	
n20	5180	15.78	16.5
	5220	16.01	
	5240	15.92	
n40	5190	16.02	16.5
	5230	15.97	
ac20	5180	15.94	16.5
	5220	16.12	
	5240	15.98	
ac40	5190	16.08	16.5
	5230	16.02	
ac80	5210	15.75	16.0
ax20	5180	16.05	16.5
	5220	16.21	
	5240	16.19	
ax40	5190	14.89	15.5
	5230	15.02	
ax80	5210	14.81	15.5

WLAN 5.2G (ANT-B)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5180	15.56	16.0
	5220	15.72	
	5240	15.69	
n20	5180	15.33	16.0
	5220	15.56	
	5240	15.53	
n40	5190	14.73	15.5
	5230	15.21	
ac20	5180	15.46	16.0
	5220	15.67	
	5240	15.58	
ac40	5190	14.75	16.0
	5230	15.37	
ac80	5210	14.96	15.5
ax20	5180	15.64	16.0
	5200	15.71	
	5240	15.74	
ax40	5190	15.45	16.0
	5230	15.51	
ax80	5210	15.59	16.0

WLAN 5.4G (ANT-A)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5260	17.92	18.5
	5300	17.04	
	5320	17.06	
n20	5260	18.01	18.5
	5300	16.67	
	5320	16.62	
n40	5270	18.63	19.0
	5310	18.27	
ac20	5260	18.12	18.5
	5300	17.00	
	5320	16.88	
ac40	5270	18.74	19.0
	5310	18.68	
ac80	5290	17.52	18.0
ax20	5260	17.13	17.5
	5300	16.32	
	5320	16.38	
ax40	5270	14.75	15.5
	5310	15.26	
ax80	5290	16.56	17.0

WLAN 5.4G (ANT-B)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5260	17.98	18.5
	5300	17.57	
	5320	17.59	
n20	5260	17.82	18.5
	5300	17.32	
	5320	17.15	
n40	5270	14.53	15.5
	5310	15.05	
ac20	5260	17.92	18.5
	5300	17.43	
	5320	17.62	
ac40	5270	14.61	15.5
	5310	15.13	
ac80	5290	16.21	16.5
ax20	5260	17.68	18.0
	5300	17.18	
	5320	17.02	
ax40	5270	15.40	16.5
	5310	15.82	
ax80	5290	16.92	17.5

WLAN 5.6G (ANT-A)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5500	16.54	18.5
	5580	17.97	
	5700	17.72	
n20	5500	16.20	18.5
	5580	17.92	
	5700	17.79	
n40	5510	17.42	18.0
	5590	16.69	
	5670	17.46	
ac20	5500	16.47	18.5
	5580	18.11	
	5700	17.96	
ac40	5510	17.60	18.0
	5590	16.87	
	5670	17.56	
ac80	5530	15.70	16.0
ac80	5610	17.11	17.5
ax20	5500	15.76	18.0
	5580	17.41	
	5700	16.12	
ax40	5510	16.25	16.5
	5590	15.62	
	5670	16.20	
ax80	5530	14.82	15.5
ax80	5610	16.19	16.5


WLAN 5.6G (ANT-B)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5500	16.41	18.0
	5580	17.65	
	5700	16.31	
n20	5500	16.20	18.0
	5580	17.45	
	5700	16.08	
n40	5510	16.35	17.0
	5590	15.54	
	5670	16.56	
ac20	5500	16.31	18.0
	5580	17.73	
	5700	16.17	
ac40	5510	16.94	17.5
	5550	15.63	
	5670	16.76	
ac80	5530	14.66	15.0
ac80	5610	15.87	16.5
ax20	5500	16.13	18.0
	5580	17.52	
	5700	16.05	
ax40	5510	17.66	18.0
	5550	16.44	
	5670	17.51	
ax80	5530	15.39	16.0
ax80	5610	16.59	17.0

WLAN 5.8G (ANT-A)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5745	17.20	17.5
	5785	17.22	
	5825	17.02	
n20	5745	17.02	18.0
	5785	17.44	
	5825	16.48	
n40	5755	17.72	19.0
	5795	18.35	
ac20	5745	17.17	18.0
	5785	17.50	
	5825	17.01	
ac40	5755	17.80	19.0
	5795	18.52	
ac80	5775	15.38	16.0
ax20	5745	16.35	17.0
	5785	16.52	
	5825	16.11	
ax40	5755	16.38	17.5
	5795	17.07	
ax80	5775	16.03	16.5

WLAN 5.8G (ANT-B)			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5745	16.71	18.0
	5785	17.32	
	5825	17.50	
n20	5745	16.57	18.5
	5785	16.83	
	5825	18.10	
n40	5755	16.09	17.5
	5795	17.11	
ac20	5745	16.67	18.5
	5785	16.91	
	5825	18.12	
ac40	5755	16.22	17.5
	5795	17.16	
ac80	5775	15.06	15.5
ax20	5745	16.40	18.0
	5785	17.08	
	5825	17.60	
ax40	5755	17.04	18.5
	5795	17.96	
ax80	5775	15.79	16.0

14.2 Transmit Antennas and SAR Measurement Position

EUT Antenna Location:

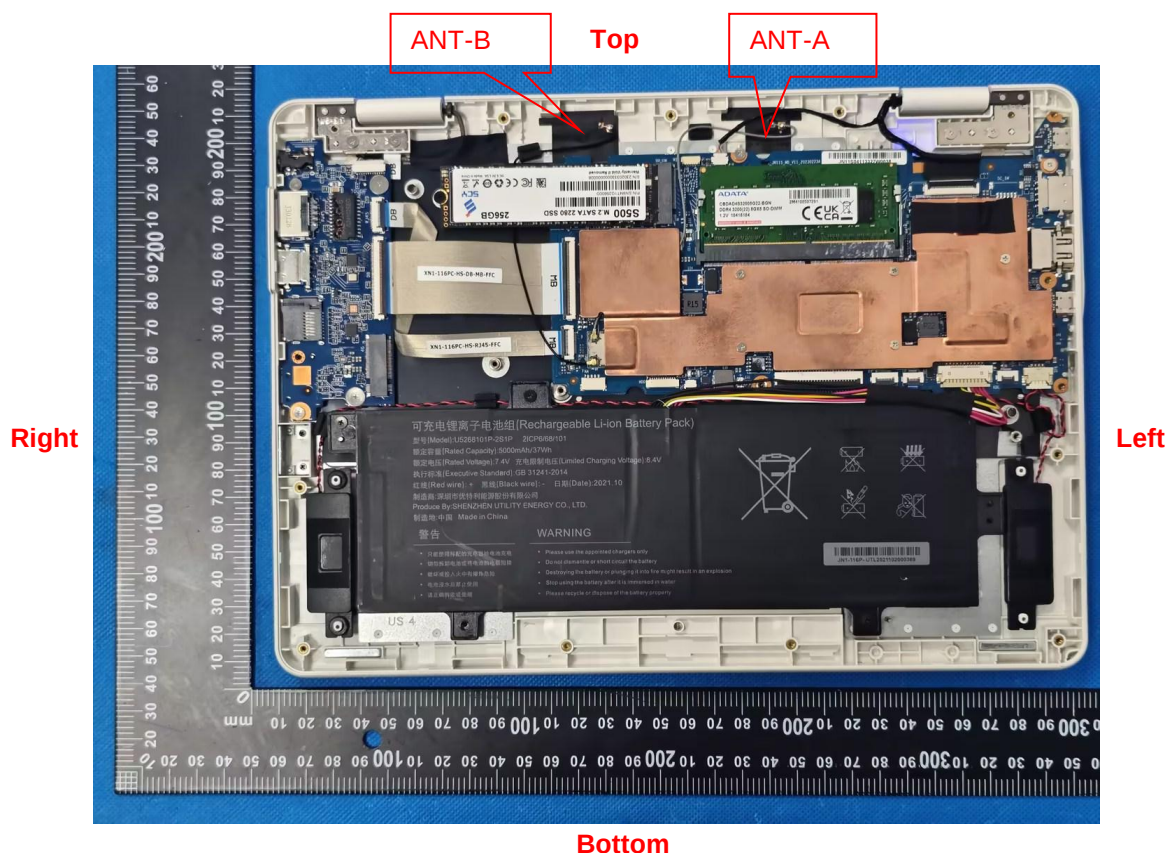

Antenna information	
Antenna	Function
ANT-A	WIFI+ Bluetooth
ANT-B	WIFI

Body mode: Positions for SAR tests; Test distance: 0mm						
Mode	Front	Back	Top Side	Bottom Side	Left Side	Right Side
ANT-A	N/A	Yes	Yes	No	No	No
ANT-B	N/A	Yes	Yes	No	No	No

Note:

- Referring to KDB 616217 D04 v01r02, KDB 248227 D01 v02r02 and KDB 447498 D01 v06, this device is overall diagonal dimension (>20cm) tablet, tested in direct contact (no gap) with flat phantom.
- According to the KDB 616217 D04 SAR for laptop and tablets v01r02, When antennas are incorporated in the keyboard section of a laptop computer, SAR is required for the bottom surface of the keyboard. Provided tablet use conditions are not supported by the laptop computer, SAR tests for bystander exposure from the edges of the keyboard and display screen of laptop computers are generally not required.

14.3 Measured and Reported (Scaled) SAR Results

The calculated SAR is obtained by the following formula:

1. Reported SAR for WWAN=Measured SAR * Tune-up Scaling factor
2. Reported SAR for WLAN and Bluetooth=Measured SAR * Tune-up Scaling factor * Duty Cycle Scaling factor
3. Duty Cycle Scaling factor=1/ Duty Cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 248227 D01 802.11 Wi-Fi SAR

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements.

For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions.

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.16 The initial test position procedure is described in the following:

- a) When the *reported* SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- b) When the *reported* SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the *reported* SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- c) For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.

When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR

Bluetooth												
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	GFSK	Back	0	2402	100	10.285	11.0	1.179	0.198	0.233	1
		GFSK	Top	0	2402	100	10.285	11.0	1.179	0.128	0.151	
		GFSK	Back	19	2440	100	10.100	11.0	1.230	0.181	0.223	
		GFSK	Back	39	2480	100	10.100	11.0	1.230	0.134	0.165	

WIFI 2.4G (ANT-A)												
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	g	Back	6	2437	100	26.78	27.0	1.052	0.273	0.287	
		g	Top	6	2437	100	26.78	27.0	1.052	0.458	0.482	
		g	Top	1	2412	100	23.72	27.0	2.128	0.518	1.102	
		g	Top	12	2462	100	22.73	27.0	2.673	0.473	1.264	2

WIFI 2.4G (ANT-B)												
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ax20	Back	6	2437	100	26.70	27.0	1.072	0.325	0.348	
		ax20	Top	6	2437	100	26.70	27.0	1.072	0.584	0.626	
		ax20	Top	1	2412	100	23.74	27.0	2.118	0.506	1.072	
		ax20	Top	12	2462	100	21.37	27.0	3.656	0.305	1.115	3

WIFI 5.2G (ANT-A)												
RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ax20	Back	44	5220	100	16.21	16.5	1.069	0.355	0.380	
		ax20	Top	44	5220	100	16.21	16.5	1.069	0.597	0.638	
		ax20	Top	36	5180	100	16.05	16.5	1.109	0.636	0.705	4
		ax20	Top	48	5240	100	16.19	16.5	1.074	0.611	0.656	

WIFI 5.2G (ANT-B)

RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ax20	Back	48	5240	100	15.74	16.0	1.062	0.347	0.368	
		ax20	Top	48	5240	100	15.74	16.0	1.062	0.538	0.571	
		ax20	Top	36	5180	100	15.64	16.0	1.086	0.509	0.553	
		ax20	Top	44	5200	100	15.71	16.0	1.069	0.612	0.654	5

WIFI 5.4G (ANT-A)

RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ac40	Back	54	5270	100	18.74	19.0	1.062	0.295	0.313	
		ac40	Top	54	5270	100	18.74	19.0	1.062	0.448	0.476	
		ac40	Top	62	5310	100	18.68	19.0	1.076	0.480	0.517	6

WIFI 5.4G (ANT-B)

RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	a	Back	52	5260	100	17.98	18.5	1.127	0.221	0.249	
		a	Top	52	5260	100	17.98	18.5	1.127	0.597	0.673	
		a	Top	60	5300	100	17.57	18.5	1.239	0.584	0.723	7
		a	Top	64	5320	100	17.59	18.5	1.233	0.464	0.572	

WIFI 5.6G (ANT-A)

RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ac20	Back	116	5580	100	18.11	18.5	1.094	0.383	0.419	
		ac20	Top	116	5580	100	18.11	18.5	1.094	0.658	0.720	8
		ac20	Top	100	5500	100	16.47	18.5	1.596	0.349	0.557	
		ac20	Top	140	5700	100	17.96	18.5	1.132	0.524	0.593	

WIFI 5.6G (ANT-B)

RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ac20	Back	116	5580	100	17.73	18.0	1.064	0.356	0.379	
		ac20	Top	116	5580	100	17.73	18.0	1.064	0.431	0.459	
		ac20	Top	100	5500	100	17.31	18.0	1.172	0.522	0.612	
		ac20	Top	140	5700	100	17.17	18.0	1.211	0.518	0.627	9

WIFI 5.8G (ANT-A)

RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ac40	Back	159	5795	100	18.52	19.0	1.117	0.282	0.315	
		ac40	Top	151	5755	100	18.52	19.0	1.117	0.586	0.654	10
		ac40	Top	151	5755	100	17.80	19.0	1.318	0.423	0.558	

WIFI 5.8G (ANT-B)

RF Exposure Conditions	Dist. (mm)	Mode	Test Position	CH.	Freq. (MHz)	Duty Cycle (%)	Output Power (dBm)	Turn up (dBm)	Turn-up Scaling Factor	SAR1g (W/kg)		Plot No.
										Meas.	Scaled	
Body	0	ac20	Back	165	5825	100	18.12	18.5	1.091	0.245	0.267	
		ac20	Top	165	5825	100	18.12	18.5	1.091	0.511	0.558	
		ac20	Top	149	5745	100	16.67	18.5	1.524	0.358	0.546	
		ac20	Top	157	5785	100	16.91	18.5	1.442	0.530	0.764	11

14.4 SAR Measurement Variability

According to KDB865664, Repeated measurements are required only when the measured SAR is ≥ 0.80 W/kg. If the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. A second repeated measurement is required only if the measured result for the initial repeated measurement is within 10% of the SAR limit and vary by more than 20%, which are often related to device and measurement setup difficulties. The following procedures are applied to determine if repeated measurements are required. The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.¹⁹ The repeated measurement results must be clearly identified in the SAR report. All measured SAR, including the repeated results, must be considered to determine compliance and for reporting according to KDB 690783. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 3) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Test Mode	Frequency Band (MHz)	RF Exposure Configuration	Test Position	Repeated SAR (yes/no)	Highest Measured SAR1-g (W/Kg)	First Repeated	
						Measured SAR1-g (W/Kg)	Largest to Smallest SAR Ratio
/	/	/	/	/	/	/	/

14.5 Simultaneous Transmission Evaluation

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

Application Simultaneous Transmission information:

No.	Configurations	Body SAR
1	WIFI(ANT-A) + WIFI(ANT-B)	No
2	WIFI(ANT-A) + Bluetooth	No
3	WIFI(ANT-B) + Bluetooth	Yes

Remark:

- Wi-Fi 2.4GHz and Wi-Fi 5GHz cannot transmit simultaneously.
- WIFI(ANT-A) and Bluetooth are the same antenna and cannot be sent at the same time.
- According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

Estimated stand alone SAR						
Communication system	Frequency (MHz)	Maximum Power (dBm)	Maximum Power (mW)	Separation Distance (mm)	X	Estimated SAR1-g (W/kg)
/	/	/	/	5	7.5	/
/	/	/	/	10	7.5	/

Note:


- Maximum average power including tune-up tolerance;
- When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

4. Per FCC KD B447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the transmitting antenna in a specific a physical test configuration is ≤1.6 W/Kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{(\text{peak location separation, mm})} < 0.04$$

5. Simultaneous transmission of maximum SAR sum calculation.

RF Exposure Conditions	Test Position	Standalone SAR (W/kg)			Summed SAR W/kg)
		1	2	3	2+3
		WIFI (ANT-A)	WIFI (ANT-B)	Bluetooth	
Body	Front	/	/	/	/
	Back	0.417	0.379	0.233	0.612
	Top	1.264	1.115	0.151	1.266
	Bottom	/	/	/	/
	Left	/	/	/	/
	Right	/	/	/	/

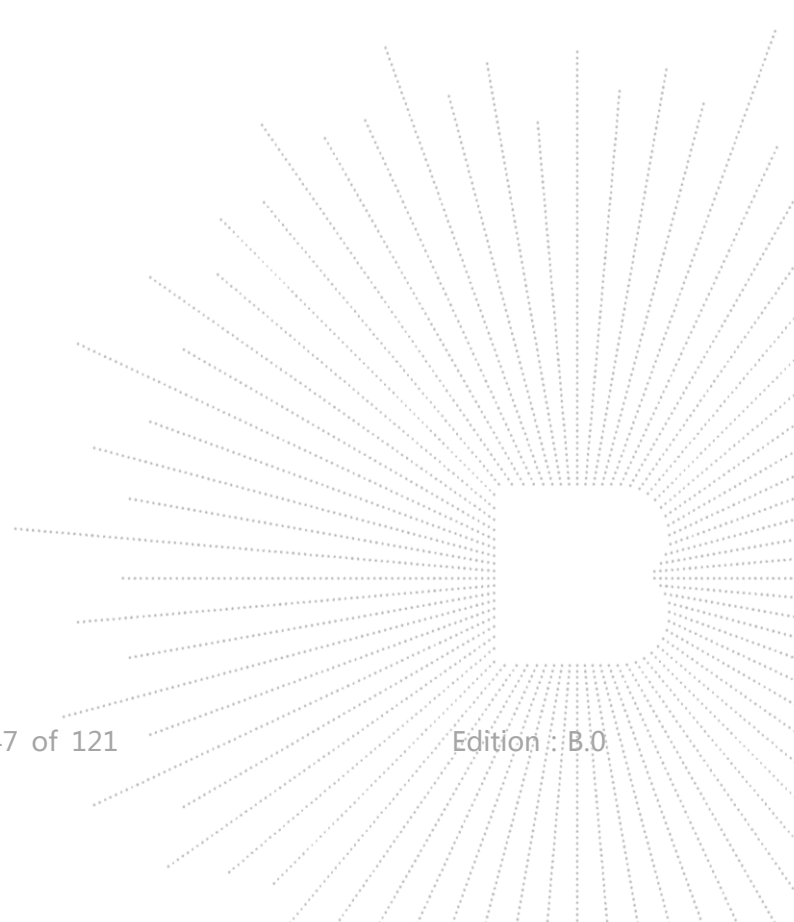

15. Test Plots

15.1 System Performance Check

System check at 2450 MHz	Test date: 20/12/2023
---------------------------------	------------------------------


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.11
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2450.000
Relative permittivity (real part)	39.547
Relative permittivity (imaginary part)	13.984
Conductivity (S/m)	1.765

C. SAR Surface and Volume

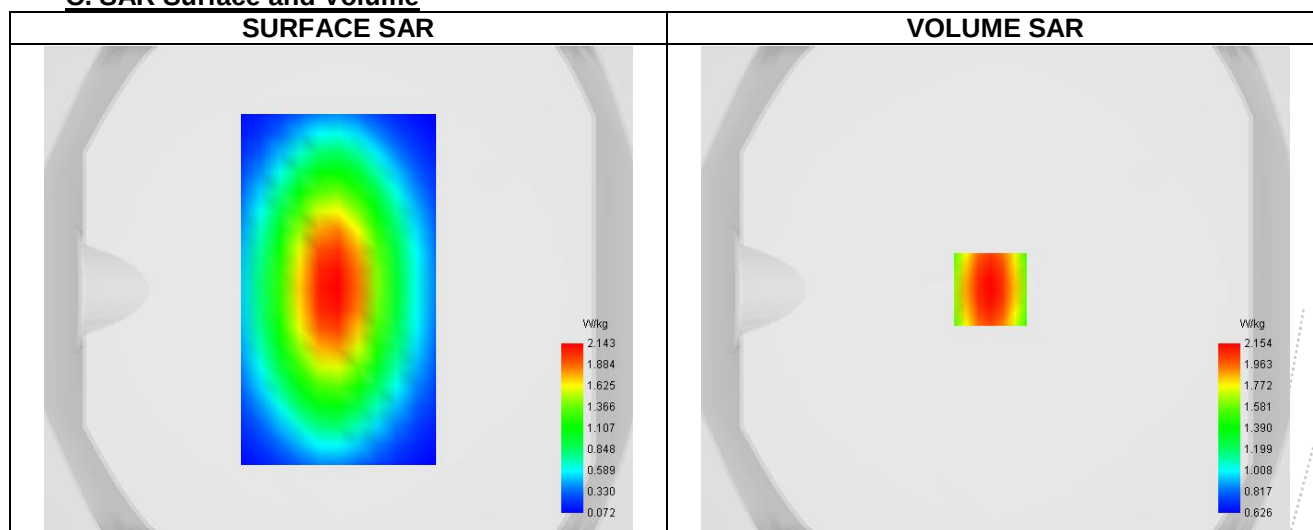


Maximum location: X=-2.00, Y=0.00 ; SAR Peak: 4.96 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	6.084
SAR 1g (W/Kg)	14.154
Variation (%)	-1.634
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	2.832	2.176	1.674	1.285	1.064

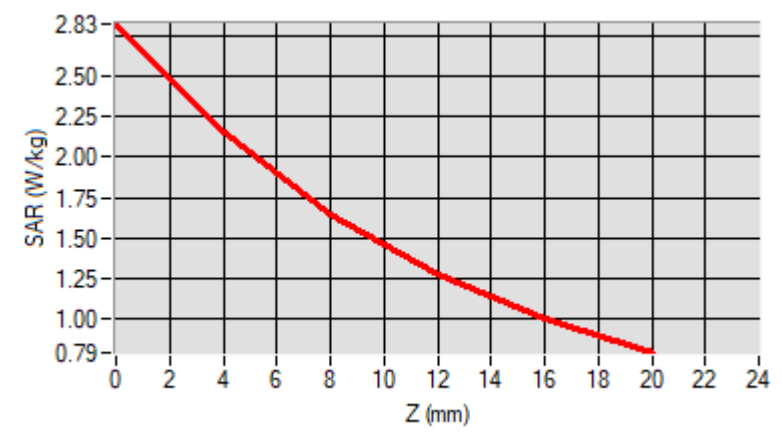

F. 3D Image

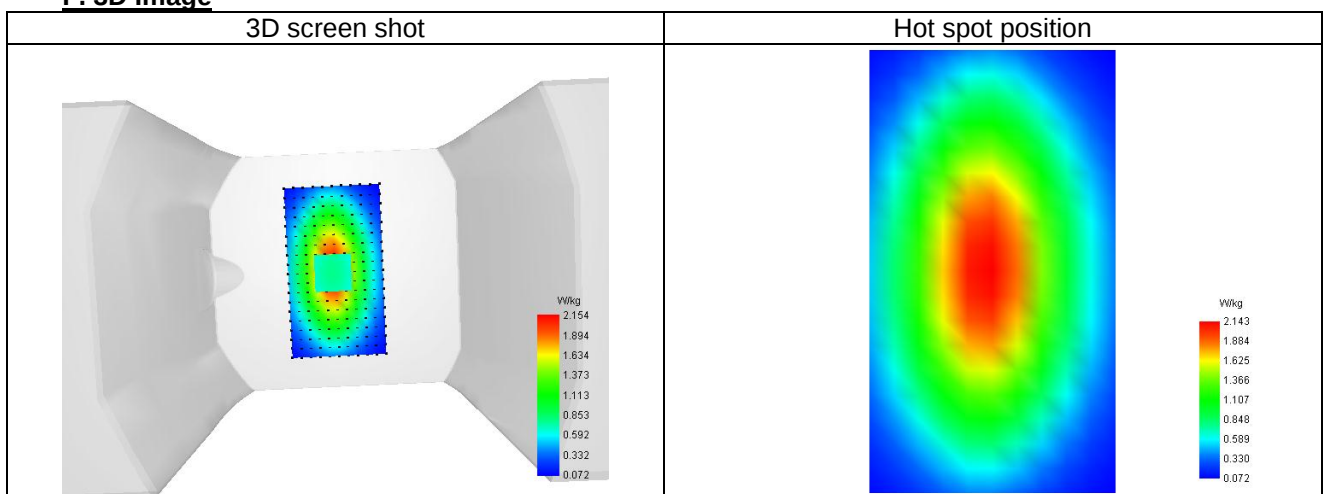


System check at 5200 MHz
Test date: 21/12/2023
A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.18
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	34.580
Relative permittivity (imaginary part)	16.154
Conductivity (S/m)	4.820

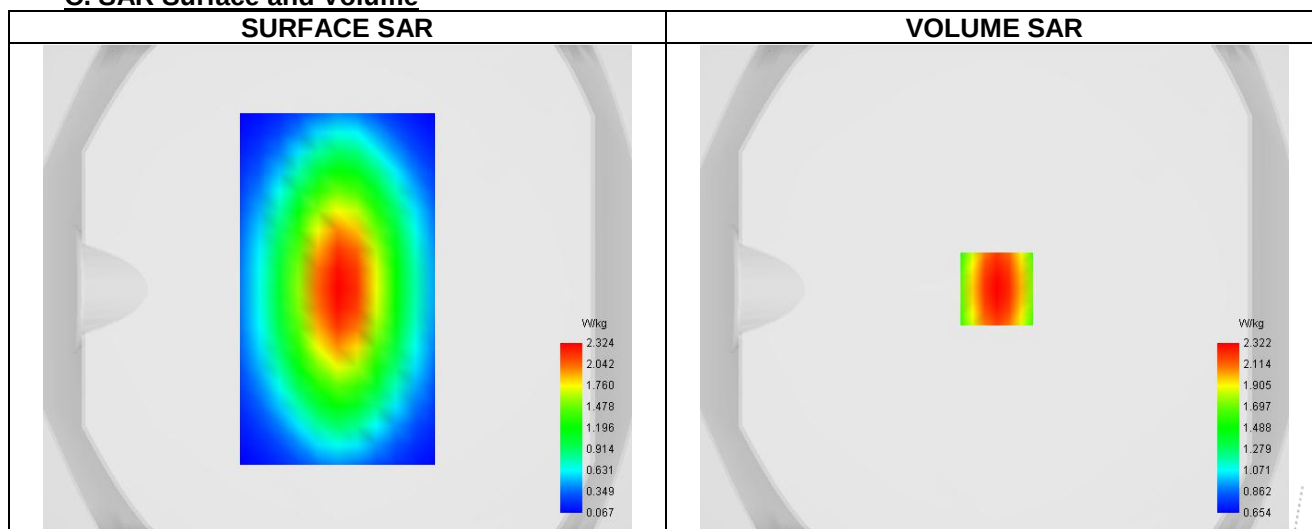C. SAR Surface and Volume


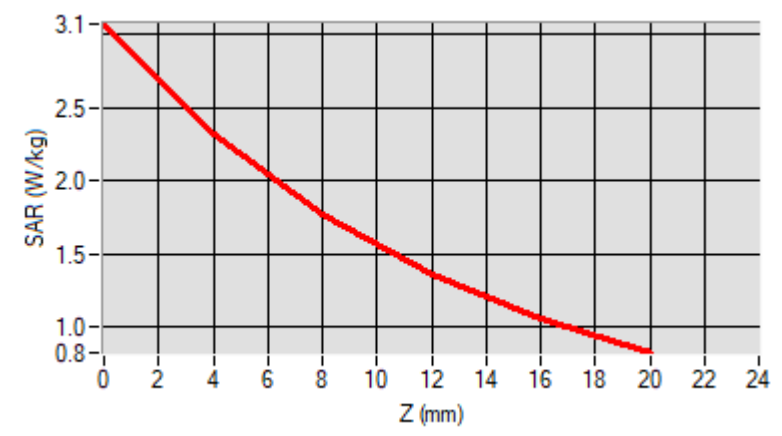
Maximum location: X=1.00, Y=0.00 ; SAR Peak: 5.68 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	8.061
SAR 1g (W/Kg)	19.736
Variation (%)	3.479
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	3.108	2.344	1.786	1.395	1.109



F. 3D Image

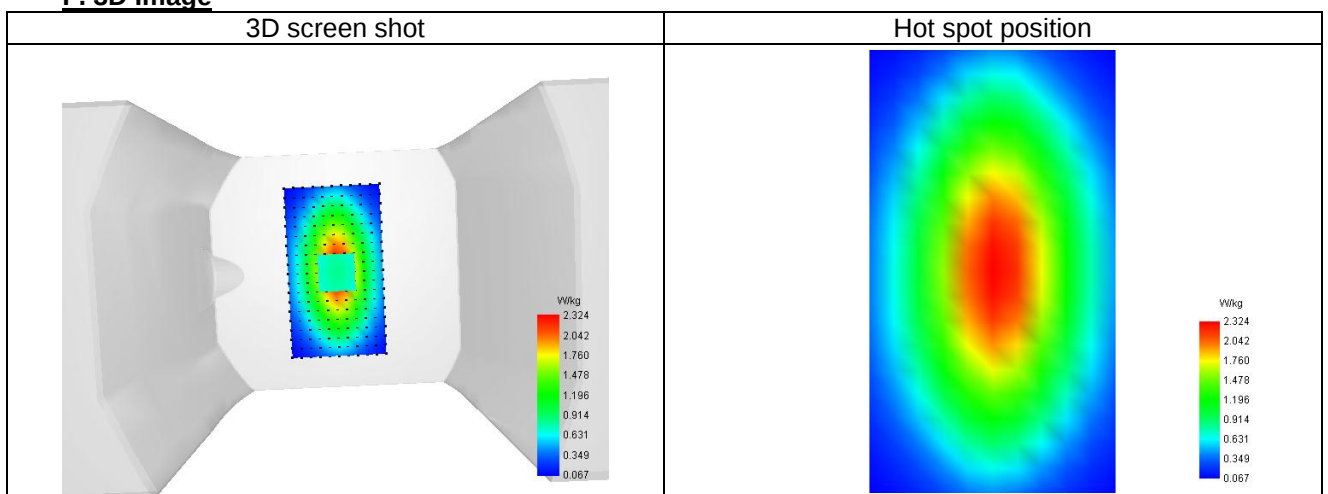


System check at 5400 MHz
Test date: 21/12/2023
A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.18
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5400.000
Relative permittivity (real part)	36.170
Relative permittivity (imaginary part)	17.082
Conductivity (S/m)	4.651

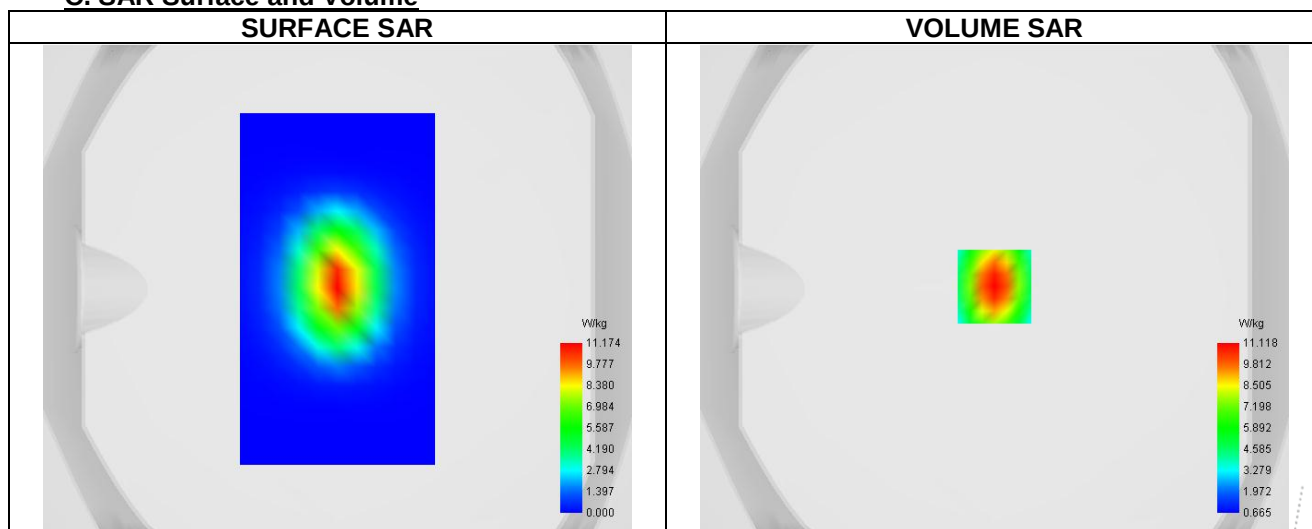C. SAR Surface and Volume


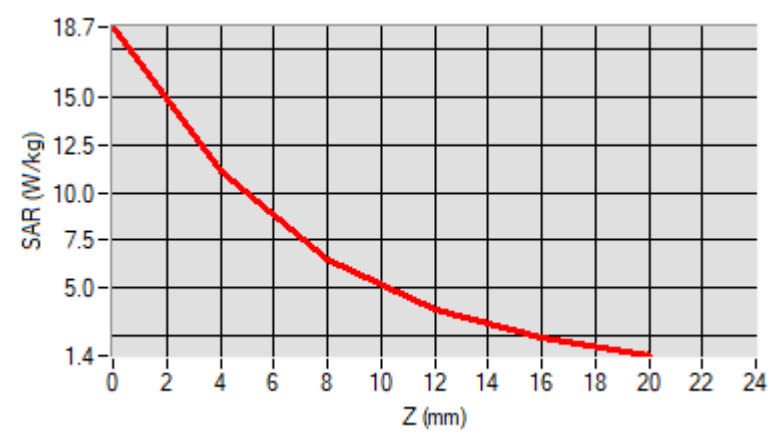
Maximum location: X=0.00, Y=1.00 ; SAR Peak: 22.78 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	8.907
SAR 1g (W/Kg)	20.090
Variation (%)	-0.520
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	18.711	11.234	6.561	3.924	2.453



F. 3D Image

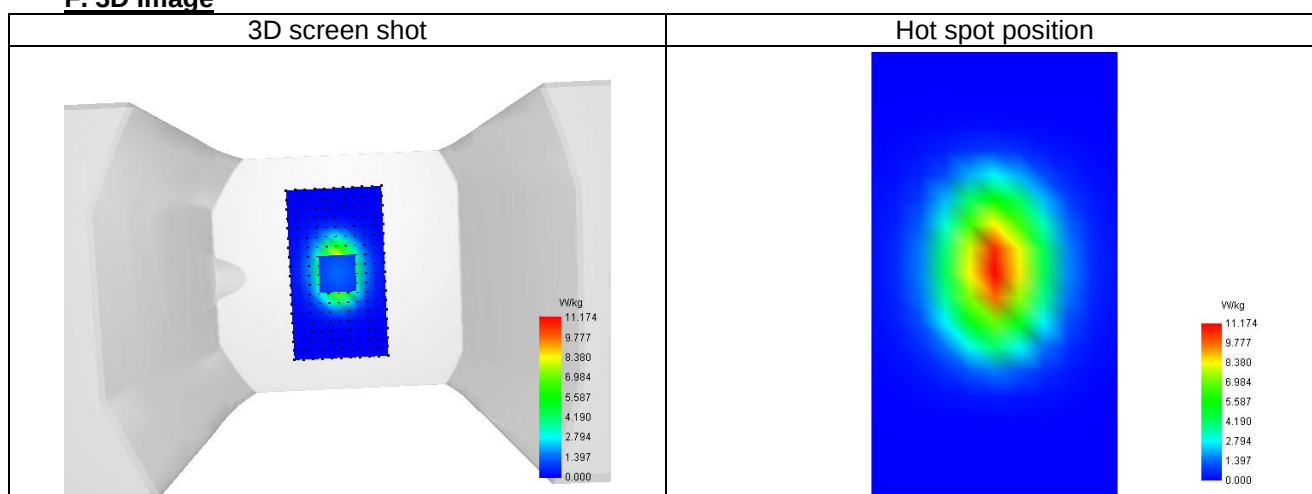


System check at 5600 MHz	Test date: 21/12/2023
---------------------------------	------------------------------

A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.20
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5600.000
Relative permittivity (real part)	36.360
Relative permittivity (imaginary part)	16.911
Conductivity (S/m)	4.892

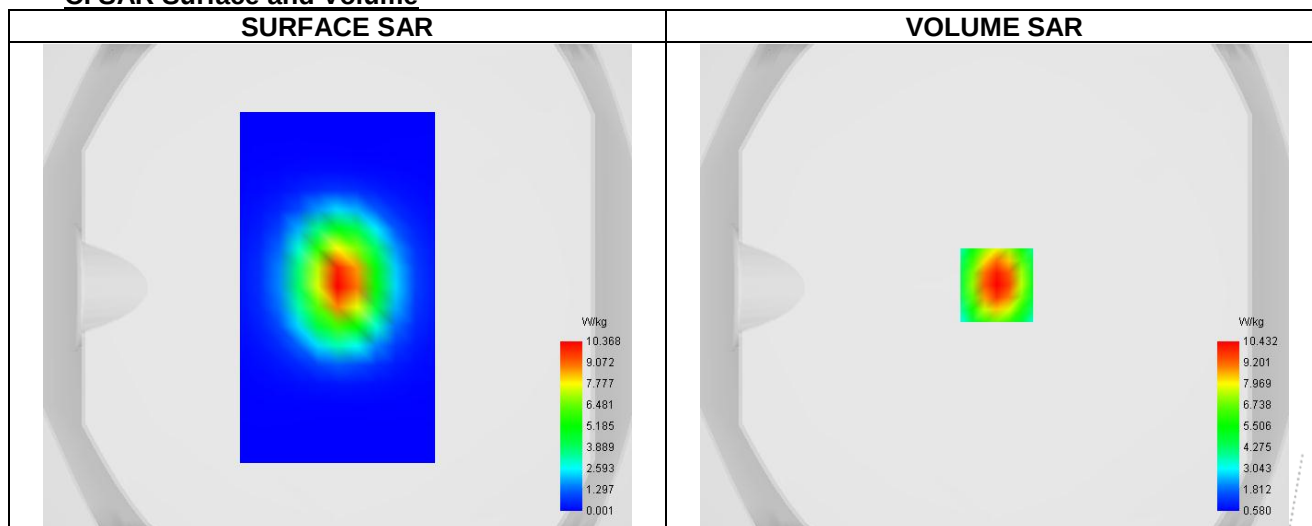C. SAR Surface and Volume


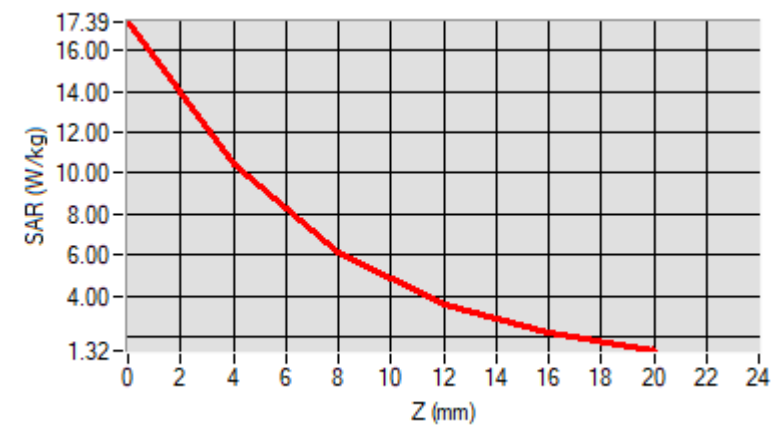
Maximum location: X=1.00, Y=1.00 ; SAR Peak: 22.54 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	8.709
SAR 1g (W/Kg)	19.738
Variation (%)	-0.467
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	17.387	10.484	6.206	3.672	2.184



F. 3D Image

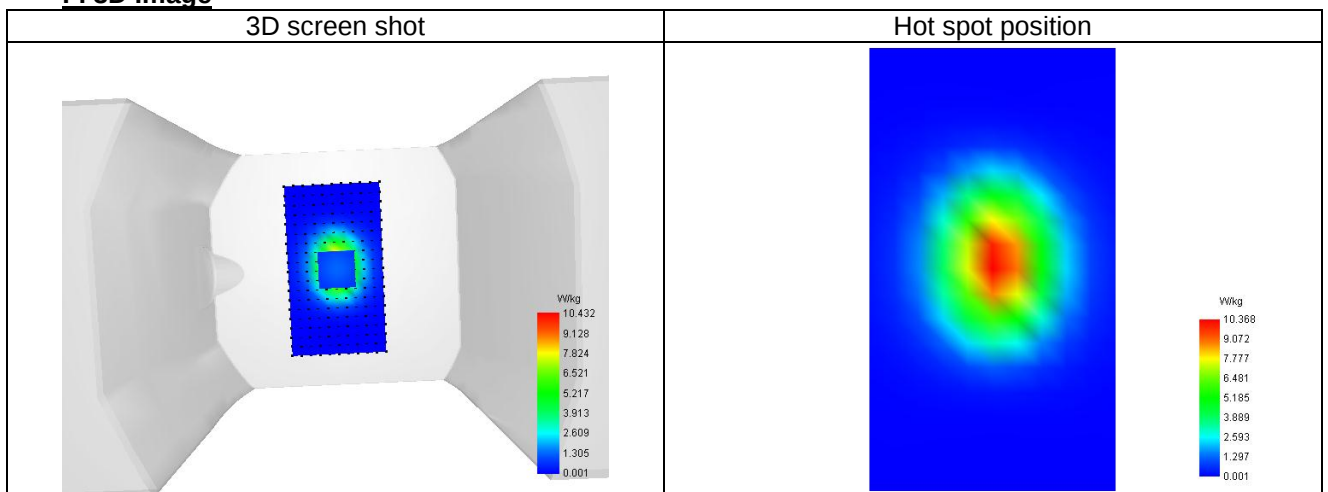


System check at 5800 MHz
Test date: 21/12/2023
A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=2mm
Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity


Frequency (MHz)	5800.000
Relative permittivity (real part)	36.622
Relative permittivity (imaginary part)	15.906
Conductivity (S/m)	5.478

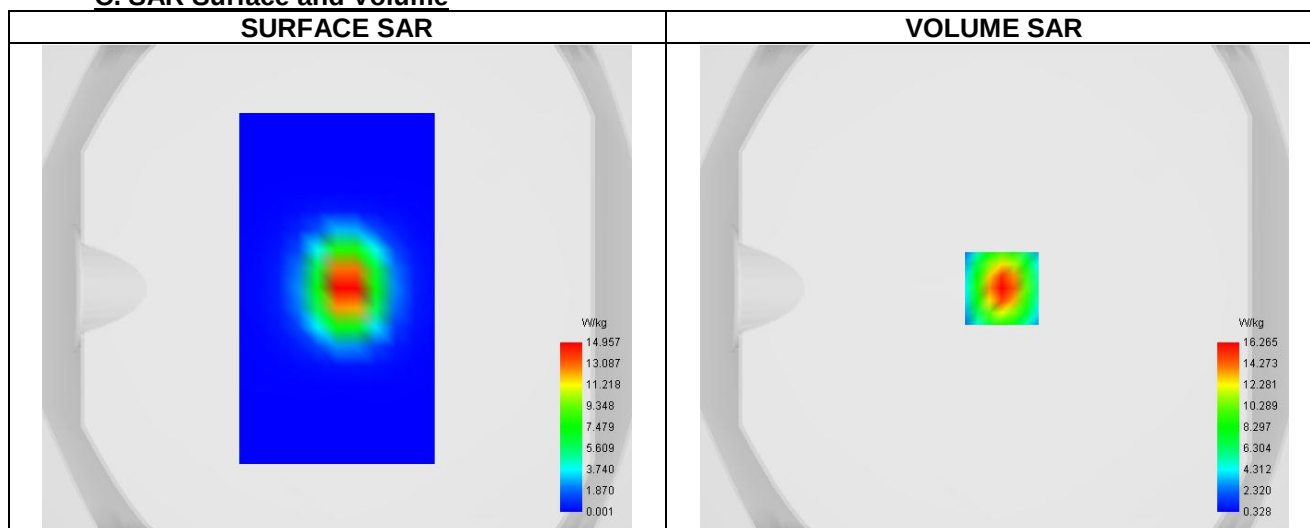C. SAR Surface and Volume

D. SAR 1g & 10g


SAR 10g (W/Kg)	8.564
SAR 1g (W/Kg)	18.538
Variation (%)	3.896
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

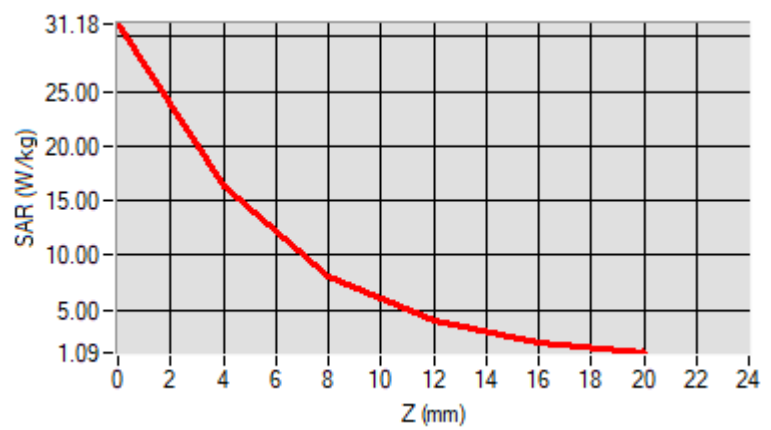Z (mm)	0.00	4.00	8.00	12.00	16.00
SAR (W/Kg)	31.172	16.108	7.982	3.835	1.964



F. 3D Image

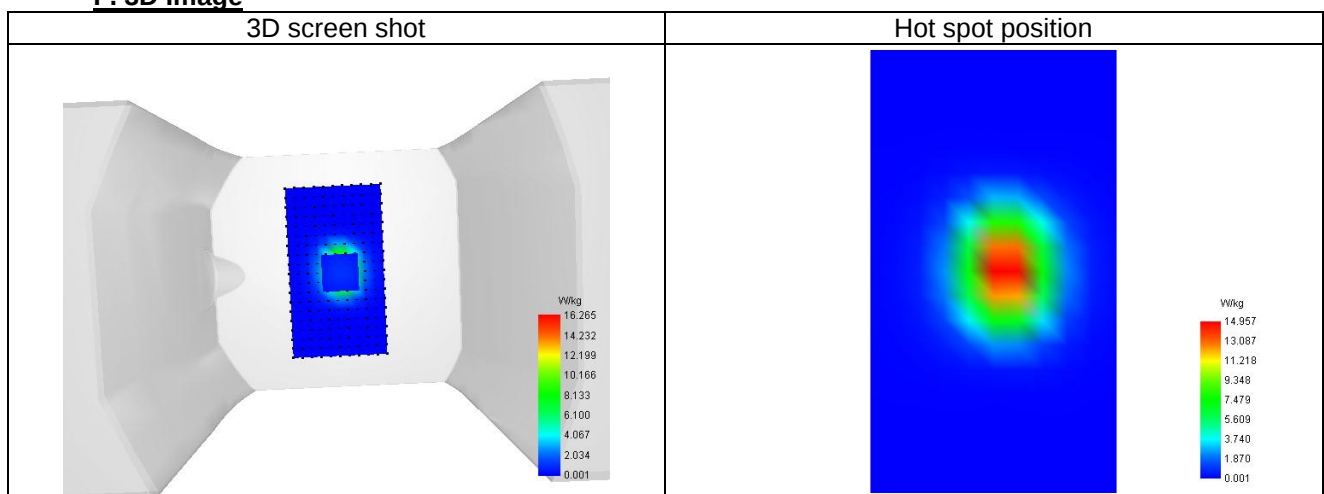

15.2 SAR Test Graph Results


Plot 1	Test date: 20/12/2023
---------------	------------------------------

A. Experimental conditions.

Probe	SN 26/23 EPGO420
ConvF	1.11
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	Bluetooth
Channels	Lower (0)
Signal	Bluetooth (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2402.000
Relative permittivity (real part)	39.715
Relative permittivity (imaginary part)	13.211
Conductivity (S/m)	1.816

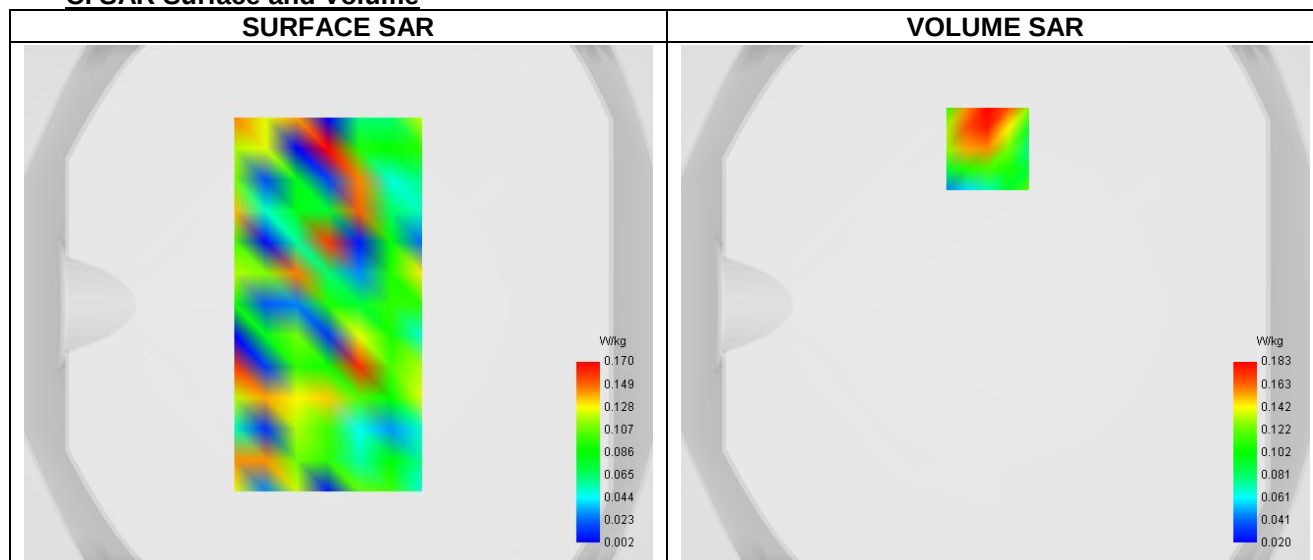C. SAR Surface and Volume


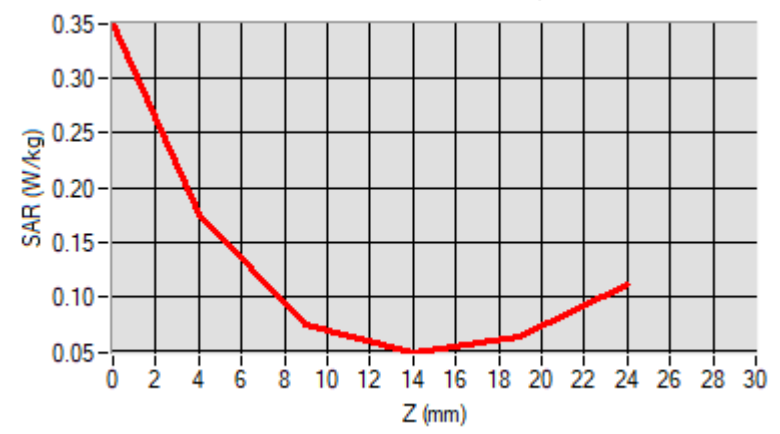
Maximum location: X=-3.00, Y=60.00 ; SAR Peak: 0.48 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.110
SAR 1g (W/Kg)	0.198
Variation (%)	-0.750
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	-0.155	0.183	0.118	0.020	0.083



F. 3D Image

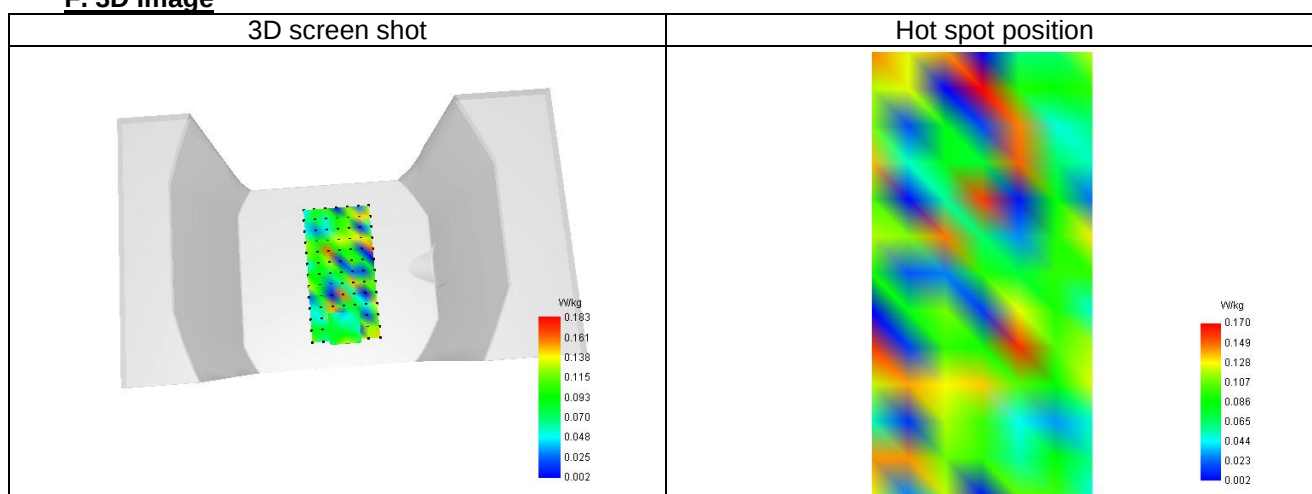


Plot 2	Test date: 20/12/2023
---------------	------------------------------

A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.11
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Higher (11)
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2462.000
Relative permittivity (real part)	39.184
Relative permittivity (imaginary part)	13.248
Conductivity (S/m)	1.812

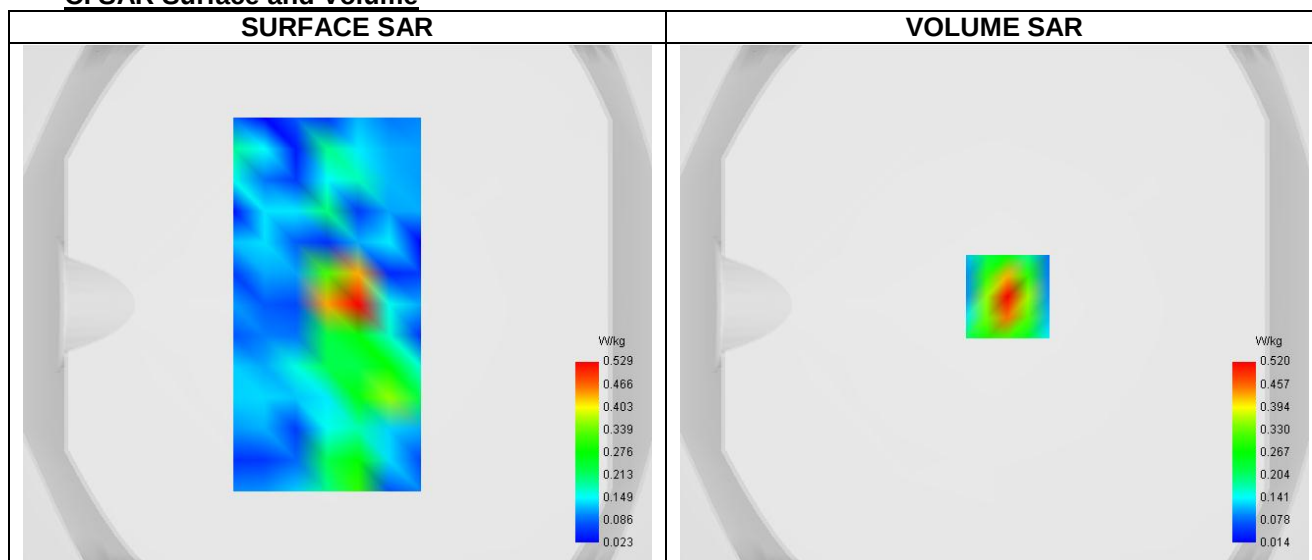C. SAR Surface and Volume


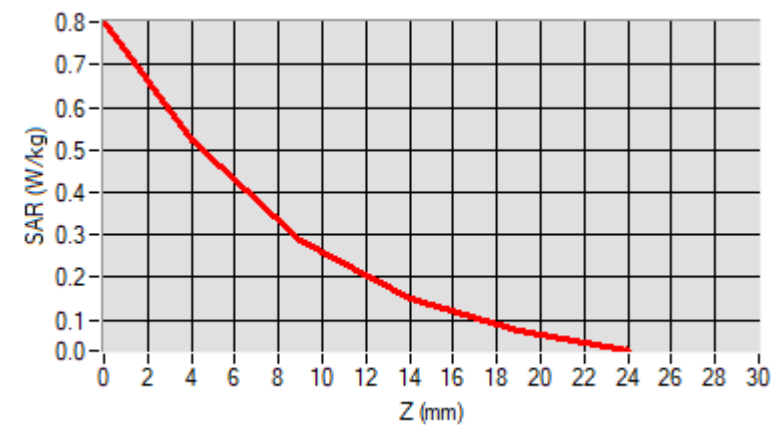
Maximum location: X=5.00, Y=3.00 ; SAR Peak: 0.82 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.239
SAR 1g (W/Kg)	0.473
Variation (%)	-3.860
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.800	0.520	0.289	0.151	0.072



F. 3D Image

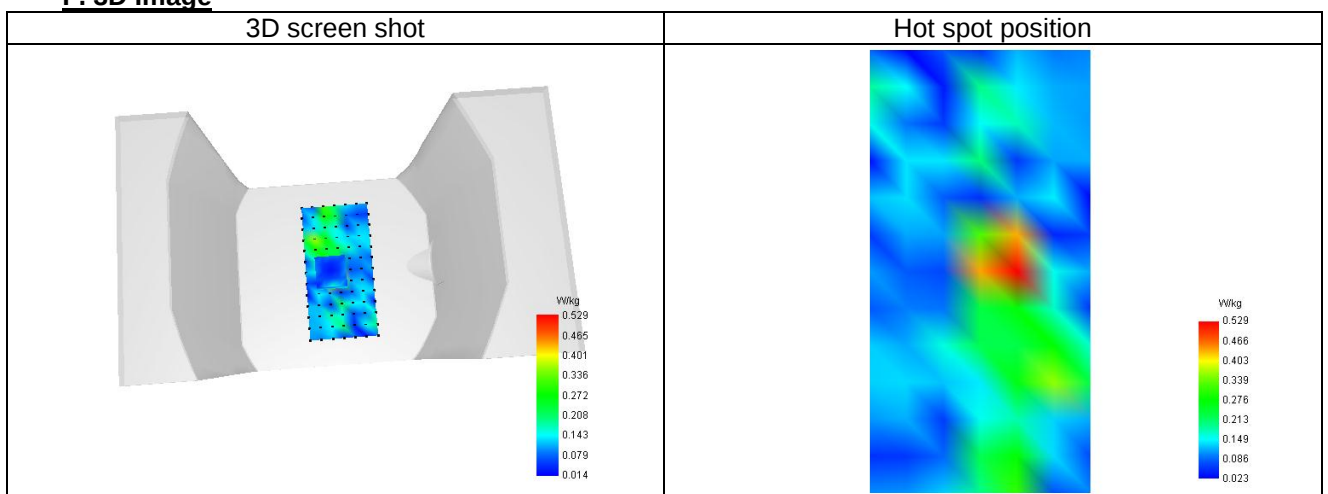


Plot 3	Test date: 20/12/2023
---------------	------------------------------

A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.11
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body
Band	IEEE 802.11b ISM
Channels	Higher (11)
Signal	IEEE802.b (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2462.000
Relative permittivity (real part)	38.643
Relative permittivity (imaginary part)	13.248
Conductivity (S/m)	1.794

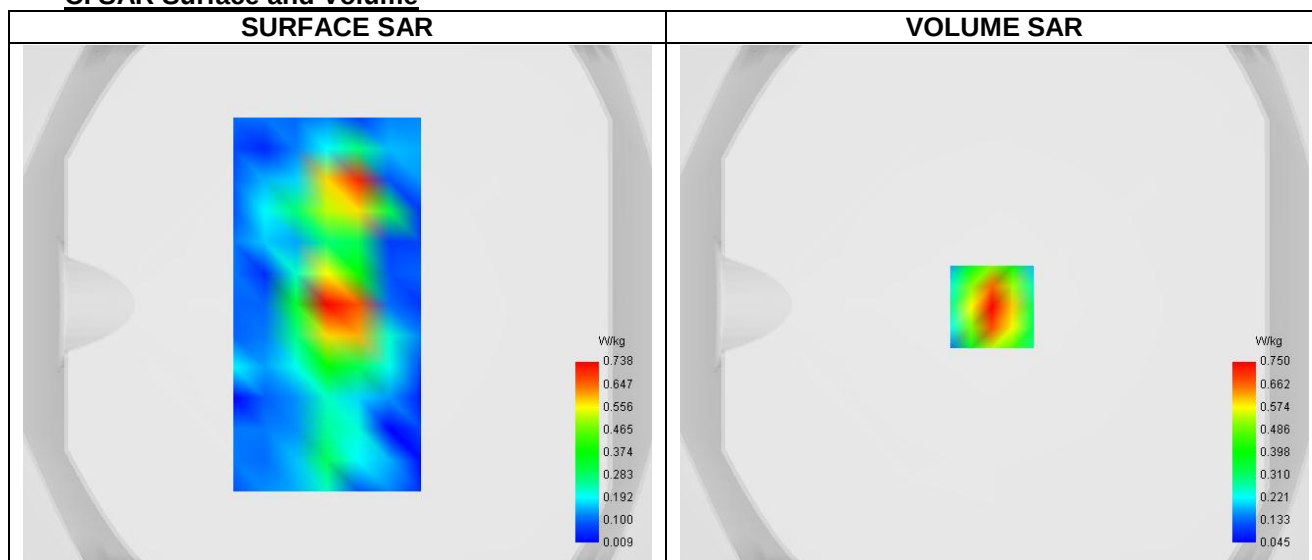C. SAR Surface and Volume


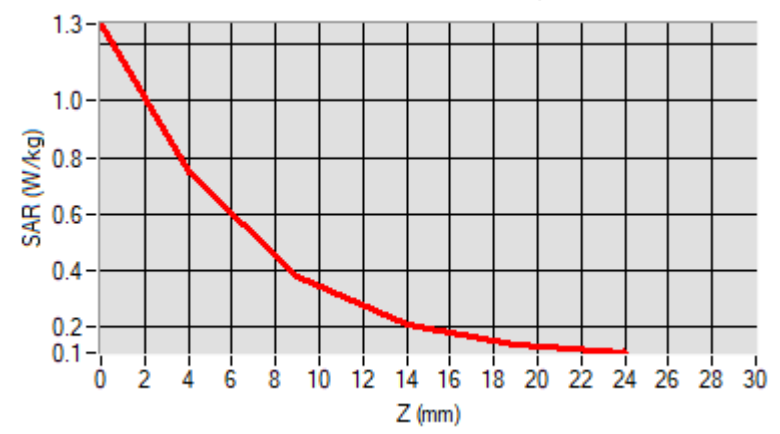
Maximum location: X=-1.00, Y=-1.00 ; SAR Peak: 1.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.305
Variation (%)	0.310
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	1.273	0.750	0.380	0.209	0.141



F. 3D Image

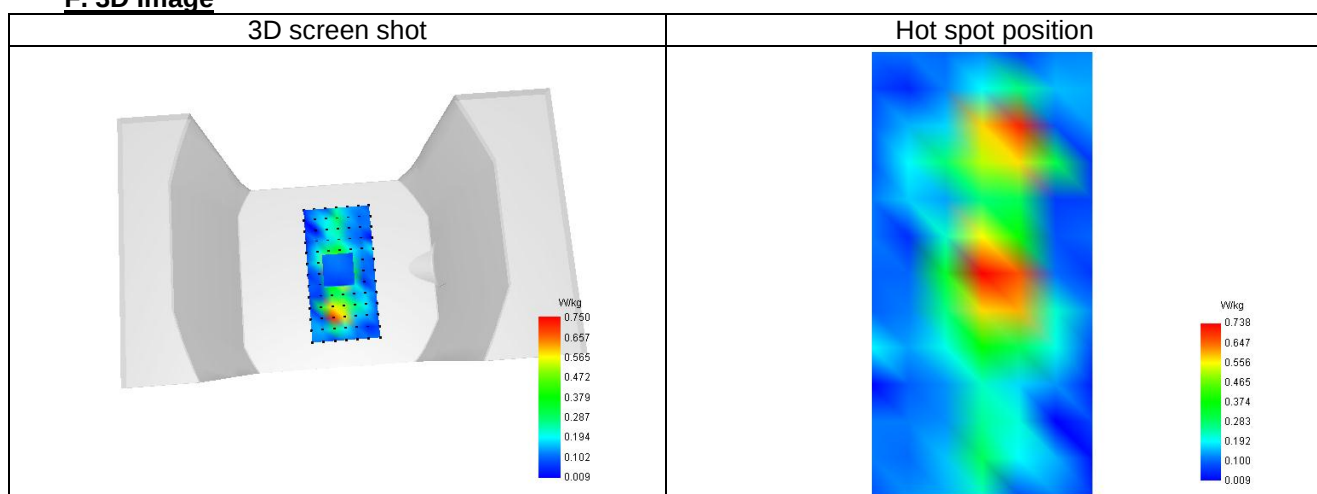

Plot 4

Test date: 21/12/2023


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.18
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5200
Channels	Lower (0)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5180.000
Relative permittivity (real part)	36.941
Relative permittivity (imaginary part)	16.119
Conductivity (S/m)	4.856

C. SAR Surface and Volume

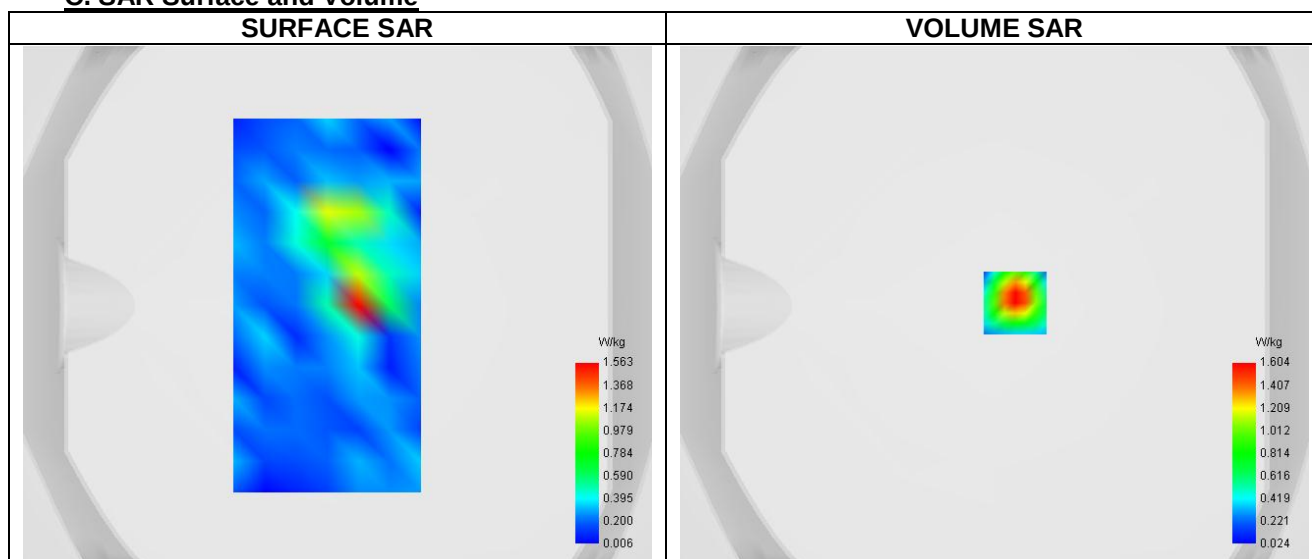


Maximum location: X=8.00, Y=1.00 ; SAR Peak: 2.72 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.337
SAR 1g (W/Kg)	0.636
Variation (%)	3.480
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	4.129	1.604	0.955	0.574	0.376	0.281	0.247	0.250	0.280

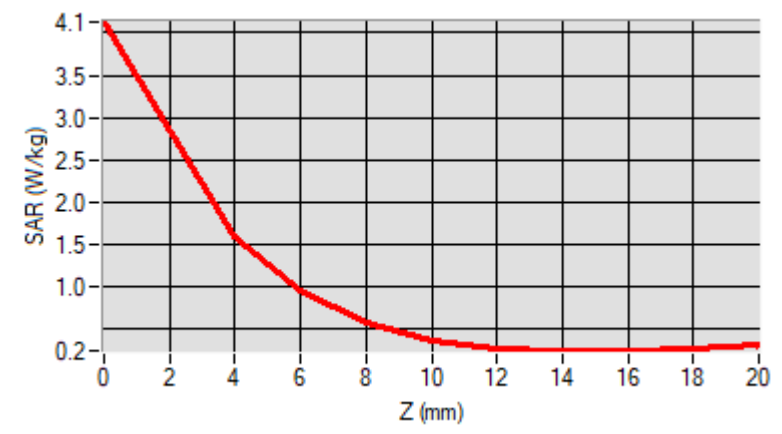

F. 3D Image

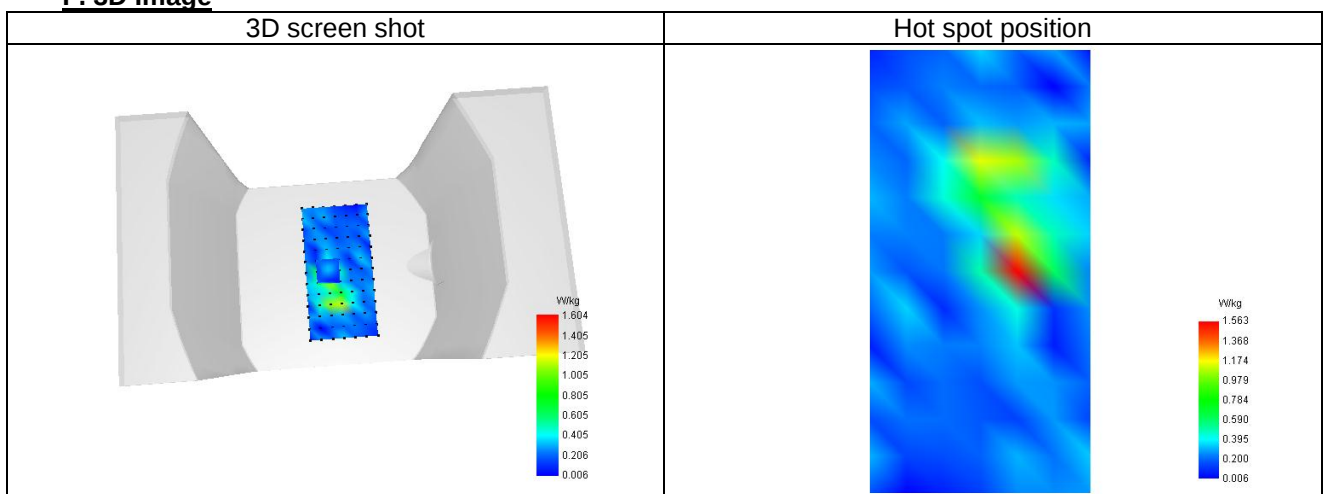


Plot 5	Test date: 21/12/2023
---------------	------------------------------

A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.18
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5200
Channels	Higher (2)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5200.000
Relative permittivity (real part)	34.580
Relative permittivity (imaginary part)	16.119
Conductivity (S/m)	4.820

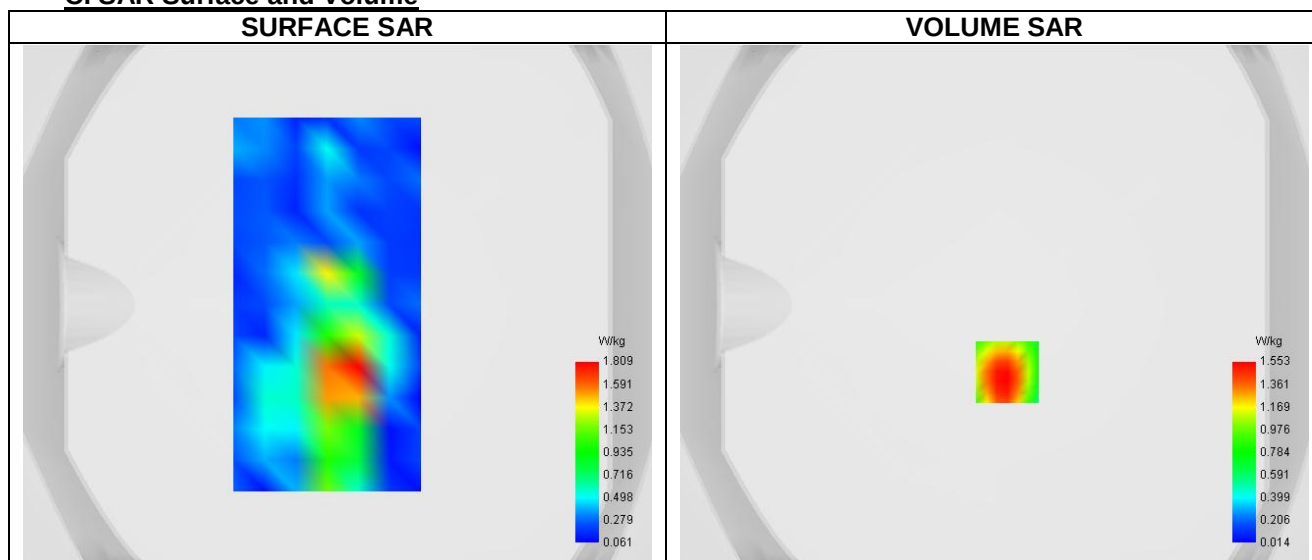C. SAR Surface and Volume


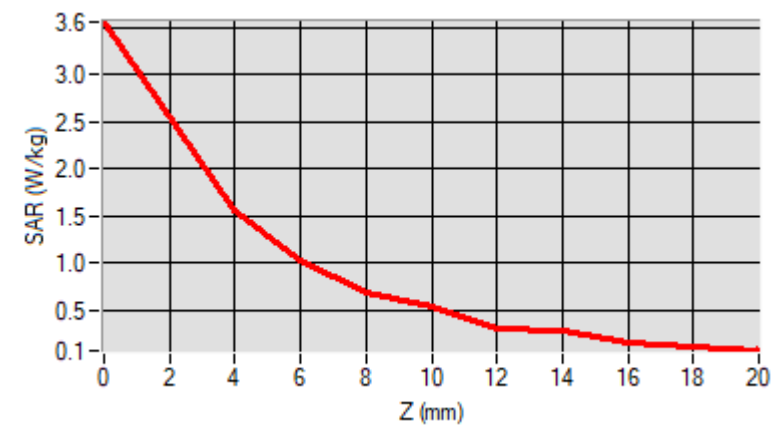
Maximum location: X=5.00, Y=-26.00 ; SAR Peak: 2.58 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.355
SAR 1g (W/Kg)	0.612
Variation (%)	0.710
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	3.555	1.553	1.033	0.685	0.534	0.306	0.284	0.144	0.099



F. 3D Image

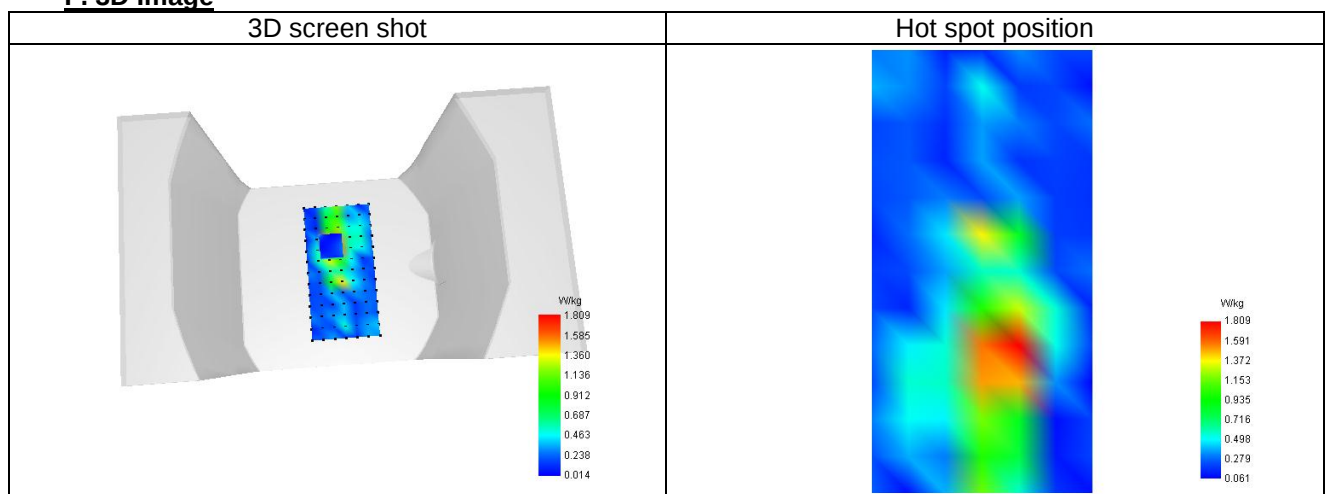


Plot 6	Test date: 21/12/2023
---------------	------------------------------

A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.17
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5400
Channels	Higher (2)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5310.000
Relative permittivity (real part)	37.196
Relative permittivity (imaginary part)	16.169
Conductivity (S/m)	4.549

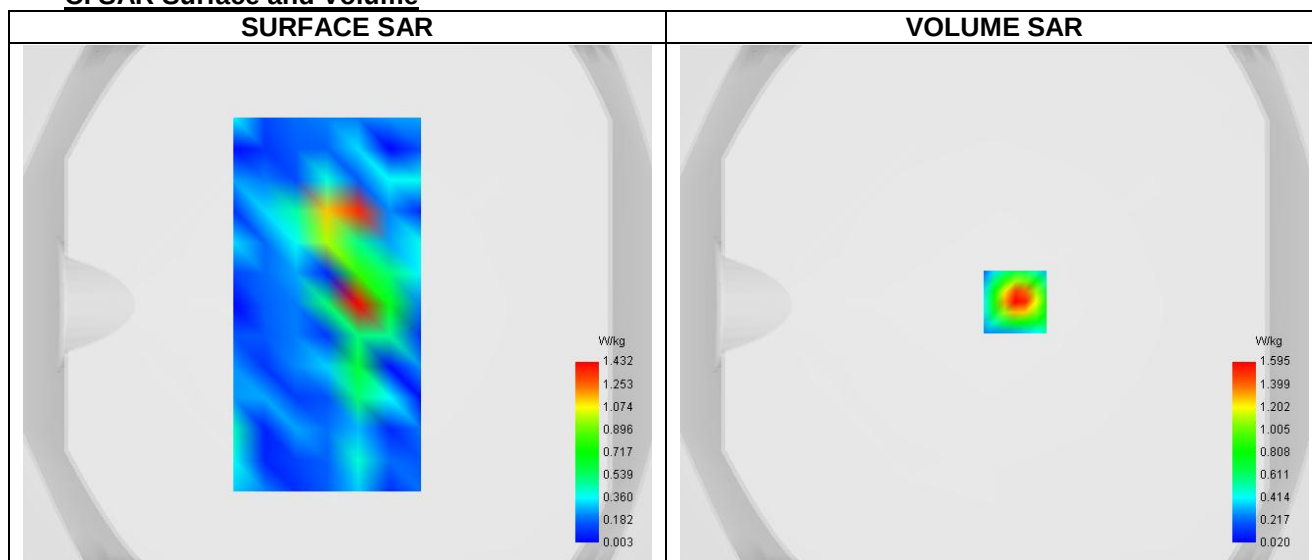C. SAR Surface and Volume


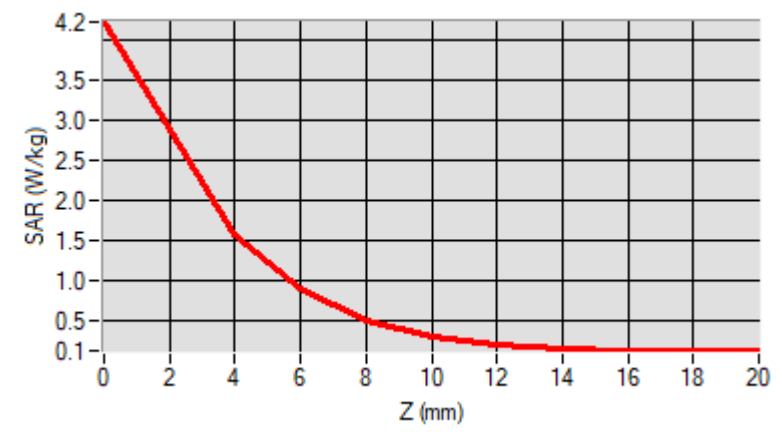
Maximum location: X=8.00, Y=1.00 ; SAR Peak: 2.77 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.294
SAR 1g (W/Kg)	0.480
Variation (%)	-2.970
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	4.235	1.595	0.918	0.520	0.309	0.202	0.154	0.137	0.138



F. 3D Image

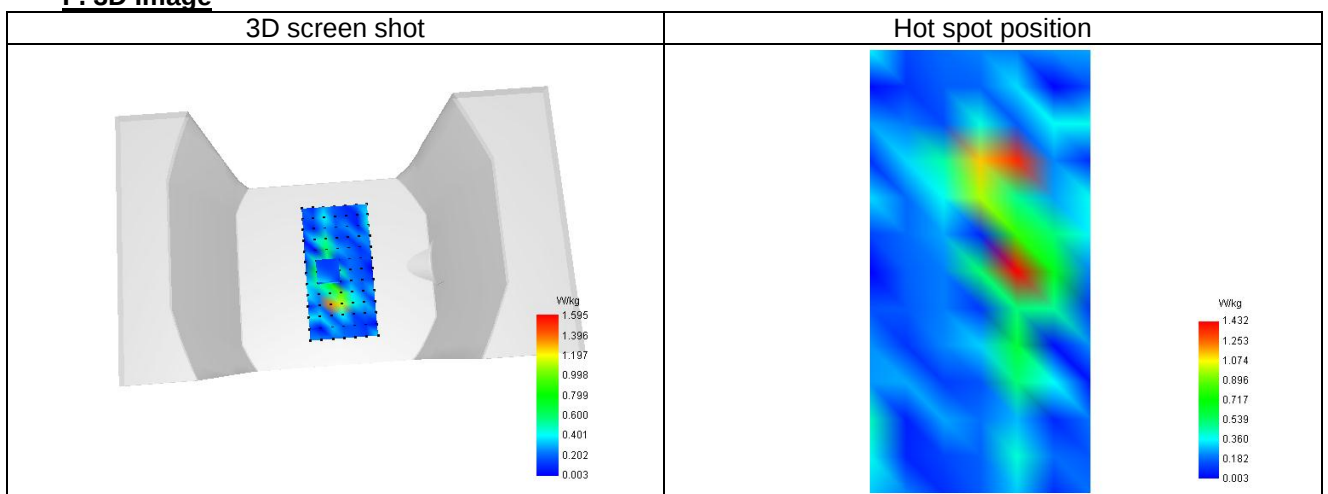

Plot 7

Test date: 21/12/2023


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.18
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5400
Channels	Lower (0)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5300.000
Relative permittivity (real part)	34.881
Relative permittivity (imaginary part)	16.151
Conductivity (S/m)	4.737

C. SAR Surface and Volume

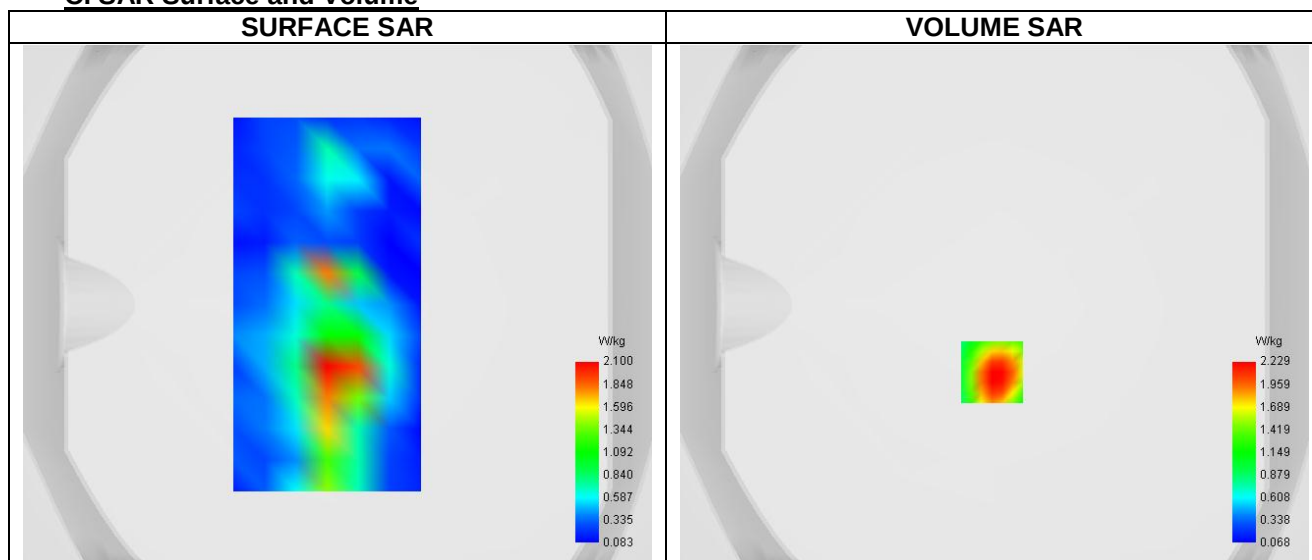


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.275
SAR 1g (W/Kg)	0.584
Variation (%)	-3.290
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	5.481	2.229	1.357	0.816	0.507	0.335	0.243	0.195	0.172

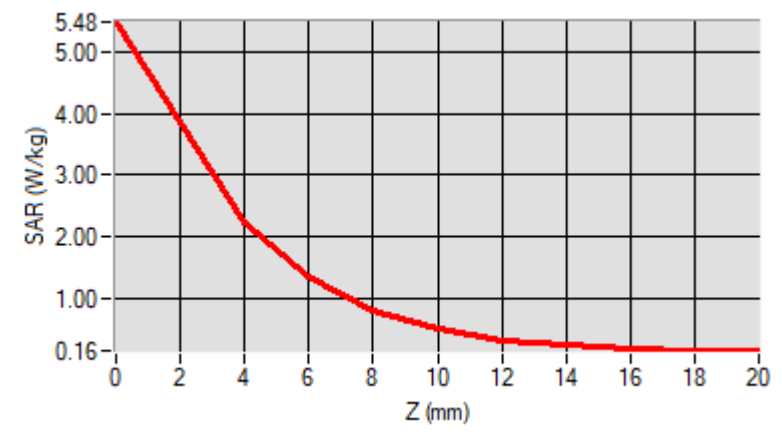

F. 3D Image

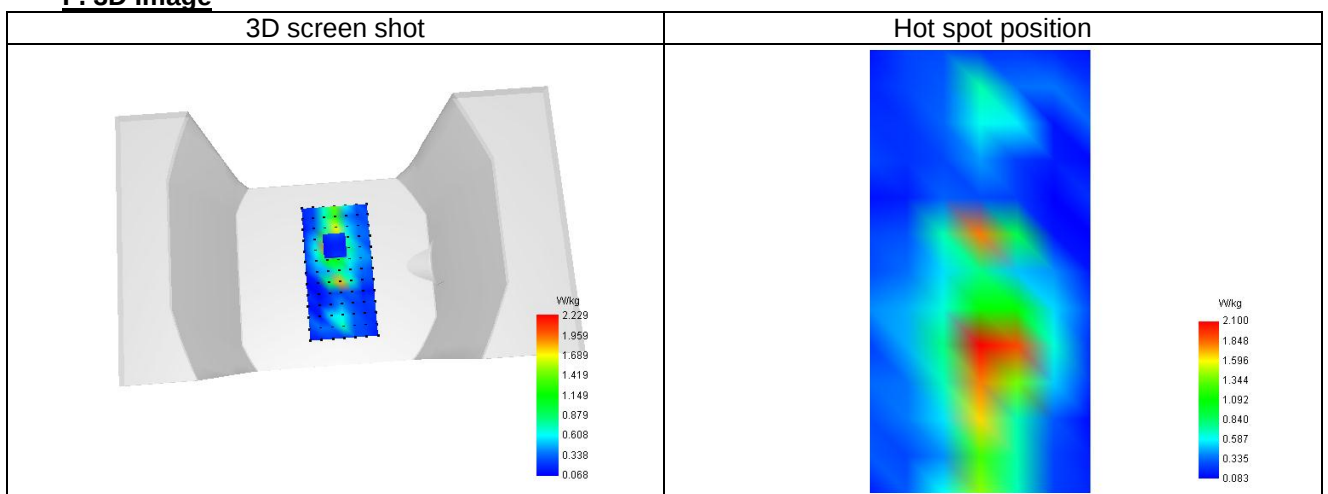


Plot 8	Test date: 21/12/2023
---------------	------------------------------

A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.20
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,
Phantom	Validation plane
Device Position	Body
Band	5600
Channels	Middle (1)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5580.000
Relative permittivity (real part)	37.386
Relative permittivity (imaginary part)	16.295
Conductivity (S/m)	4.699

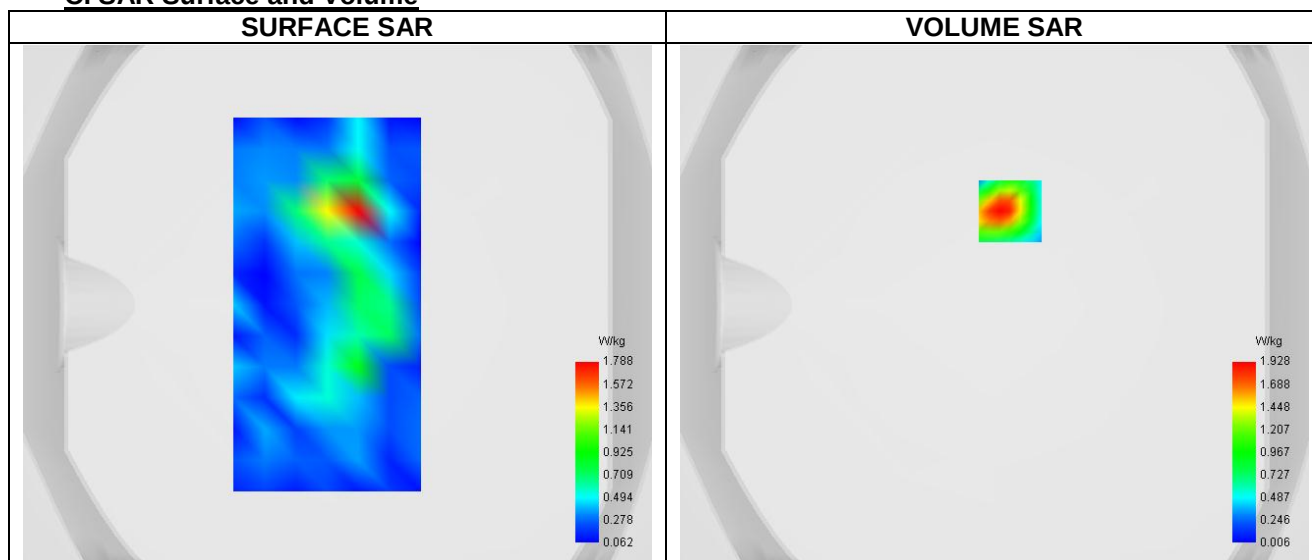C. SAR Surface and Volume


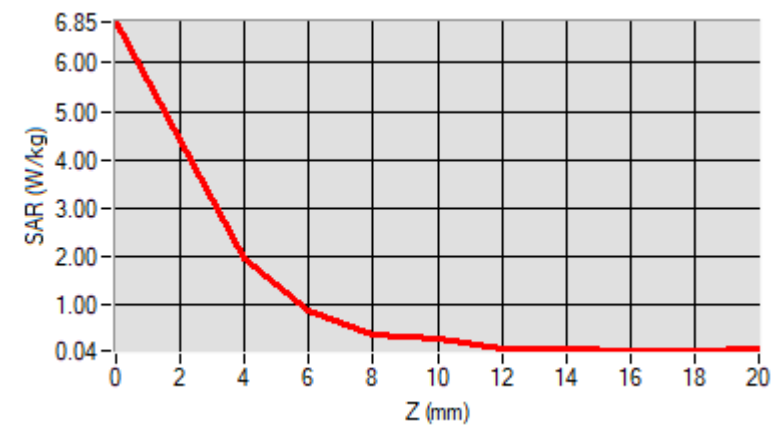
Maximum location: X=6.00, Y=36.00 ; SAR Peak: 3.92 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.309
SAR 1g (W/Kg)	0.658
Variation (%)	0.540
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	6.850	1.928	0.860	0.360	0.267	0.059	0.090	0.037	0.040



F. 3D Image

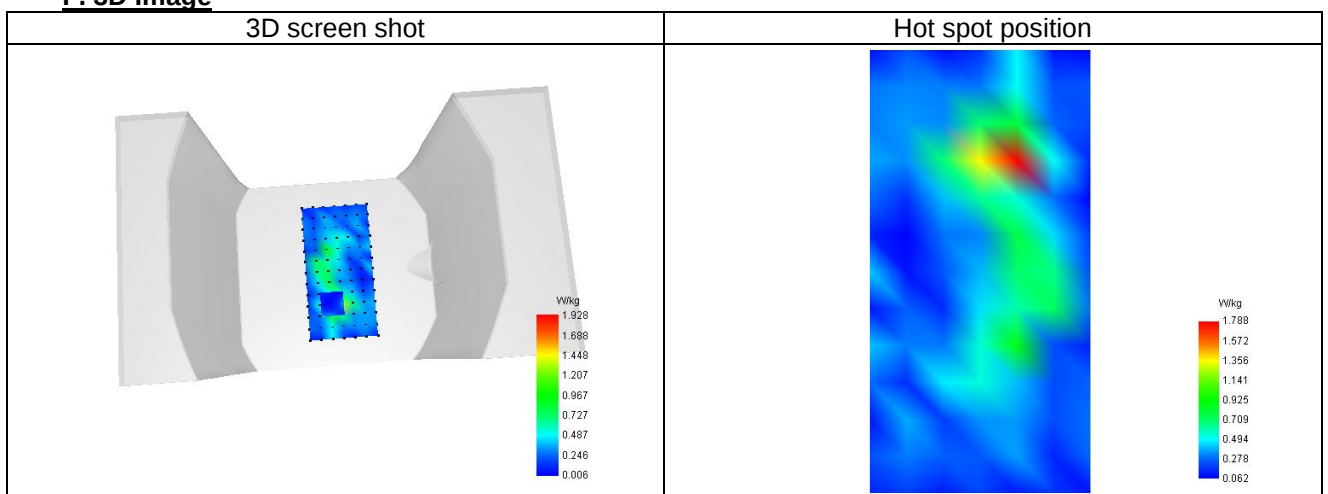

Plot 9

Test date: 21/12/2023


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.20
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5600
Channels	Higher (2)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5700.000
Relative permittivity (real part)	36.839
Relative permittivity (imaginary part)	16.330
Conductivity (S/m)	5.281

C. SAR Surface and Volume

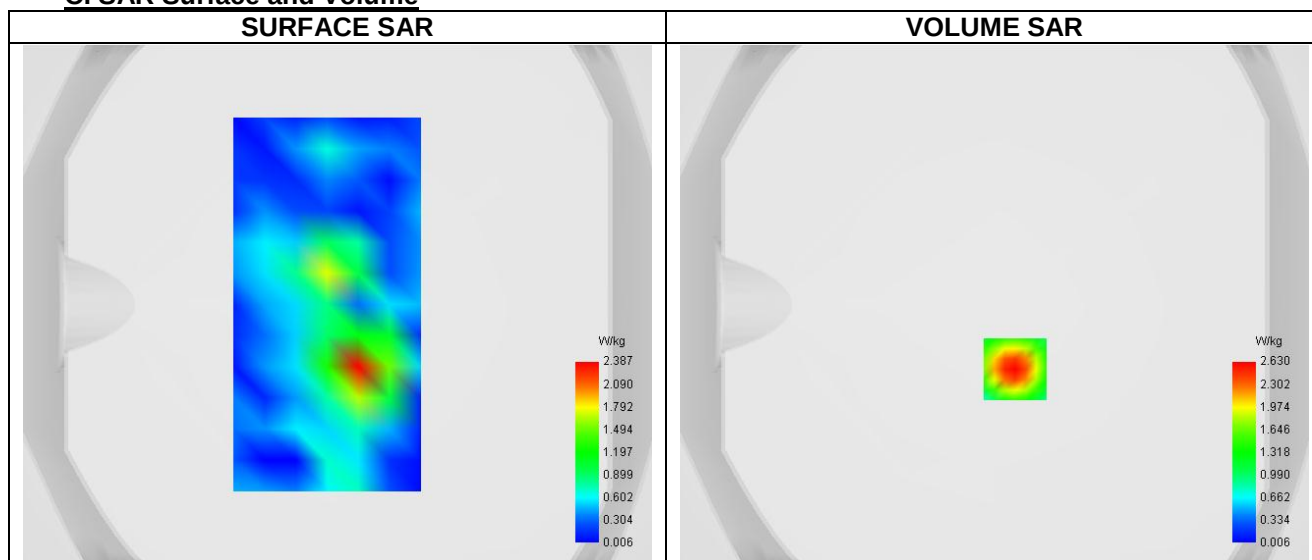


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.231
SAR 1g (W/Kg)	0.518
Variation (%)	1.260
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	9.280	2.630	1.147	0.439	0.164	0.075	0.058	0.081	0.144

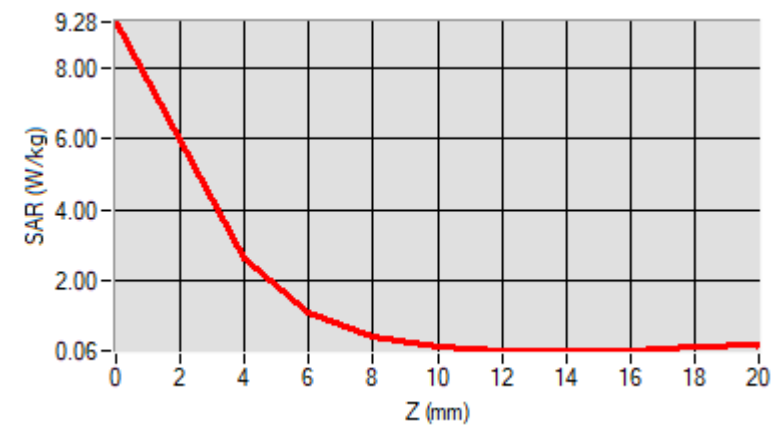

F. 3D Image

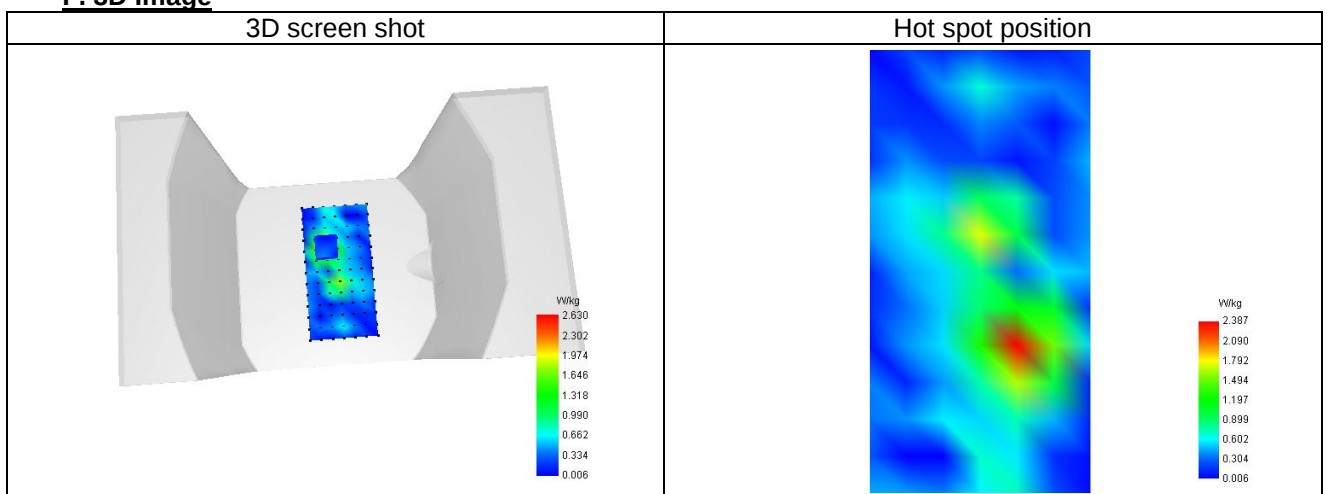

Plot 10

Test date: 21/12/2023


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5800
Channels	Lower (0)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5755.000
Relative permittivity (real part)	35.644
Relative permittivity (imaginary part)	16.347
Conductivity (S/m)	4.853

C. SAR Surface and Volume

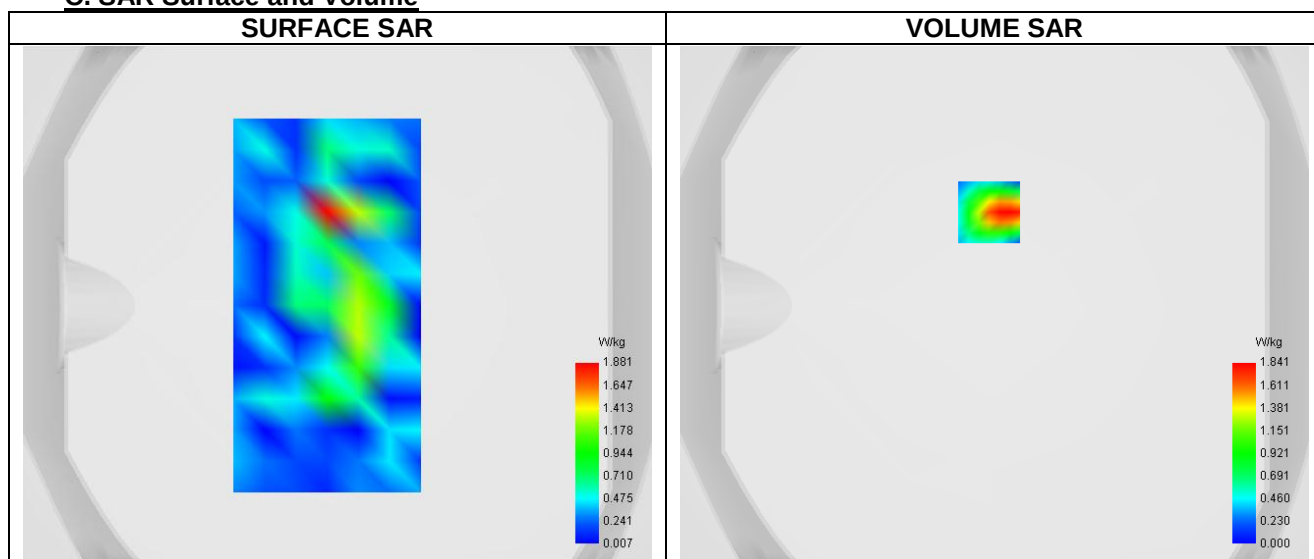


Maximum location: X=-2.00, Y=36.00 ; SAR Peak: 4.55 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.221
SAR 1g (W/Kg)	0.586
Variation (%)	0.530
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	8.309	1.841	0.893	0.385	0.850	0.430	0.770	0.650	0.306

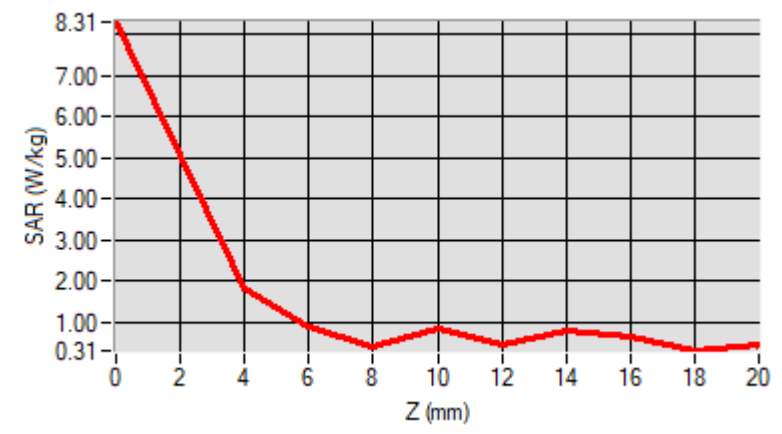

F. 3D Image

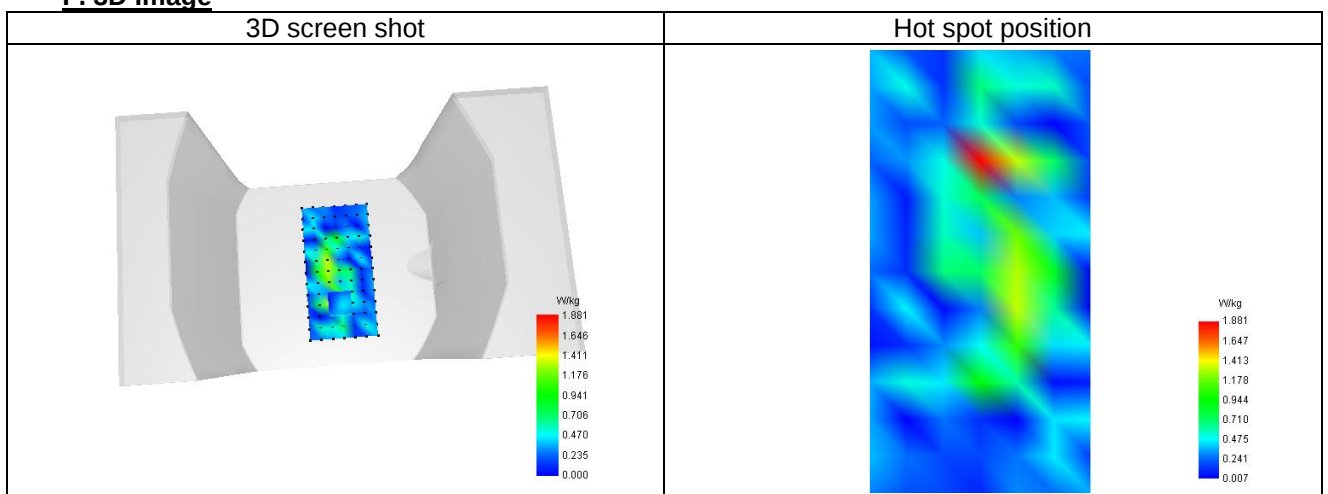

Plot 11

Test date: 21/12/2023


A. Experimental conditions.

Probe	SN 26/23 EPG0420
ConvF	1.15
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Body
Band	5800
Channels	Middle (1)
Signal	Custom (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	5785.000
Relative permittivity (real part)	37.186
Relative permittivity (imaginary part)	16.358
Conductivity (S/m)	5.076

C. SAR Surface and Volume

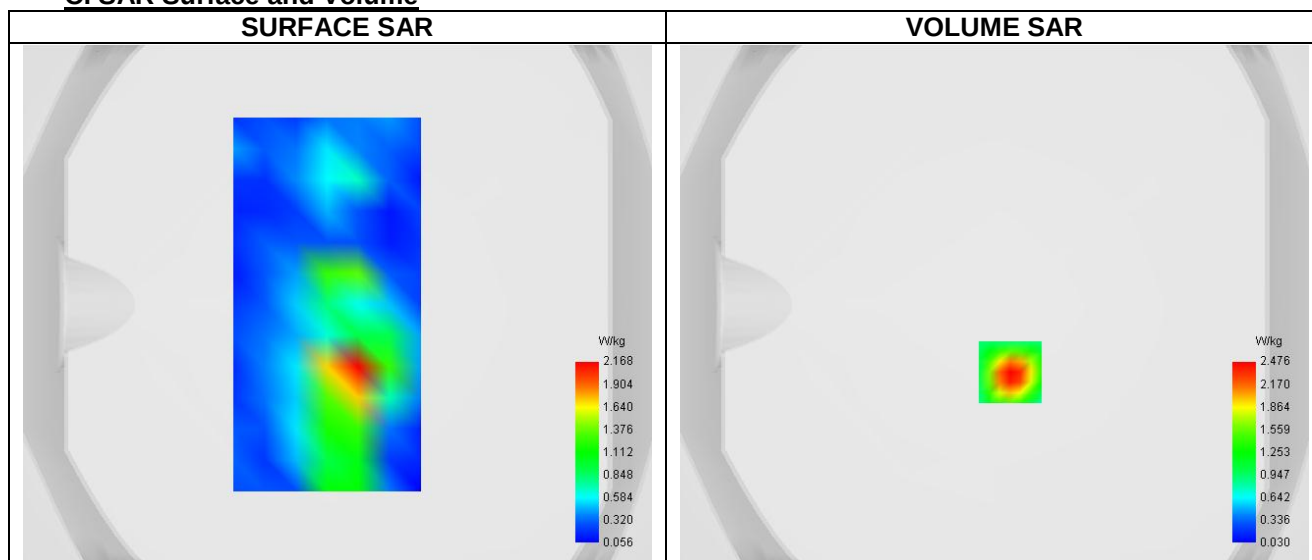


Maximum location: X=6.00, Y=-26.00 ; SAR Peak: 4.16 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.246
SAR 1g (W/Kg)	0.530
Variation (%)	2.980
Horizontal validation criteria: minimum distance (mm)	0.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	0.000000

E. Z Axis Scan

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00
SAR (W/Kg)	6.273	2.476	1.481	0.882	0.554	0.383	0.302	0.272	0.271

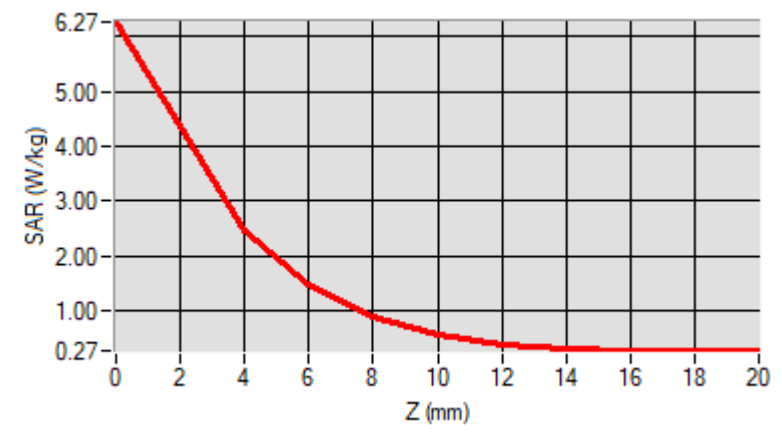


F. 3D Image

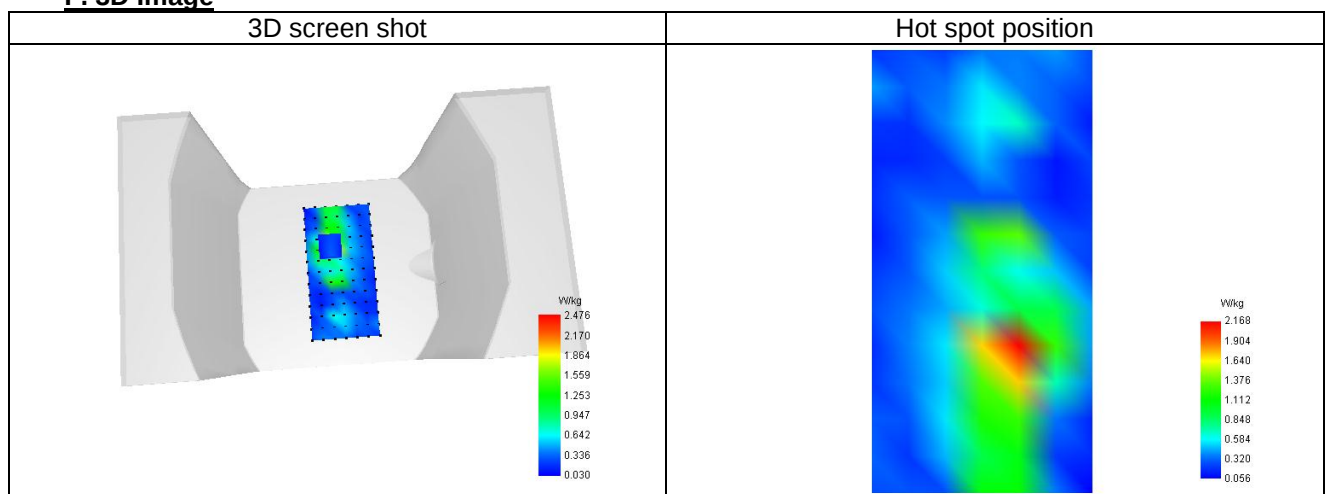

16 CALIBRATION CERTIFICATES

Probe-EPGO420 Calibration Certificate
SID2450Dipole Calibration Ceriticate
SID5000Dipole Calibration Ceriticate

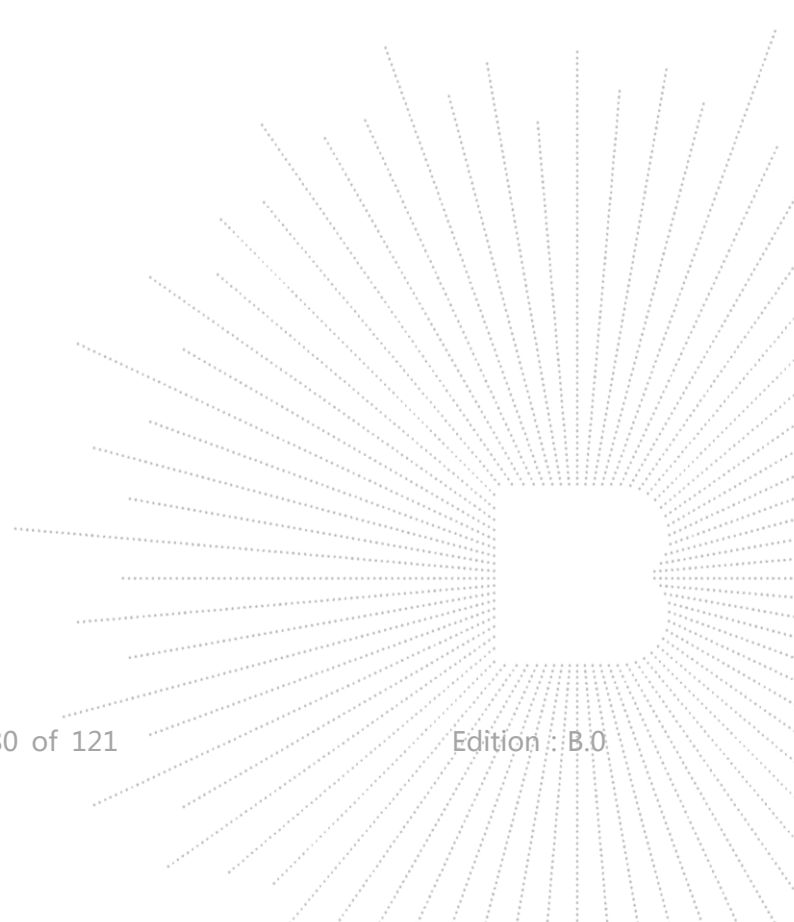

**COMOSAR E-Field Probe Calibration Report**

Ref : ACR.199.1.23.BES.A

SHENZHEN BCTC TECHNOLOGY CO., LTD.
1 ~2/ F, NO. B FACTORY BUILDING, PENGZHOU
INDUSTRIAL PARK, FUYUAN 1ST ROAD,
TANGWEI COMMUNITY, FUHAI STREET, BAO'AN
DISTRICT, SHENZHEN, GUANGDONG, CHINA
MVG COMOSAR DOSIMETRIC E-FIELD PROBE
SERIAL NO.: 2623-EPGO-420



Calibrated at MVG**Z.I. de la pointe du diable****Technopôle Brest Iroise – 295 avenue Alexis de Rochon**
29280 PLOUZANE - FRANCE**Calibration date: 7/18/2023**Accreditations #2-6789
Scope available on www.cofrac.fr**The use of the Cofrac brand and the accreditation references is prohibited from any reproduction.***Summary:*

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed at MVG, using the CALIPROBE test bench, for use with a MVG COMOSAR system only. The test results covered by accreditation are traceable to the International System of Units (SI).

Page: 1/11


COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.199.1.23.BES.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Cyrille ONNEE	Measurement Responsible	7/18/2023	
<i>Checked & approved by:</i>	Jérôme Luc	Technical Manager	7/18/2023	
<i>Authorized by:</i>	Yann Toutain	Laboratory Director	7/18/2023	

Yann
Toutain ID

Signature numérique
de Yann Toutain ID
Date : 2023.07.18
10:38:49 +02'00'

	<i>Customer Name</i>
<i>Distribution :</i>	Shenzhen BCTC Technology Co., Ltd.

<i>Issue</i>	<i>Name</i>	<i>Date</i>	<i>Modifications</i>
A	Cyrille ONNEE	7/18/2023	Initial release

Page: 2/11

Template_ACR.DDD.N.YY.MVGB.ISSUE_COMOSAR_Probe vL

This document shall not be reproduced, except in full or in part, without the written approval of MVG. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.