



## Appendix B

### RF Test Data for BT (BLE) (Conducted Measurement)

Product Name: Ev charger

Trade Mark: CEBEA

Test Model: CEBEA-CDZ-48A-1

#### Environmental Conditions

Temperature:	24.6° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Simba Huang
Supervised by:	Seal Chen



# Contents

	Page
<b>COVER PAGE</b>	
1 Duty Cycle .....	3
1.1 Test Result .....	3
1.2 Test Graphs .....	4
2 Maximum Conducted Output Power .....	7
2.1 Test Result .....	7
2.2 Test Graphs .....	8
3 -6dB Bandwidth .....	11
3.1 Test Result .....	11
3.2 Test Graphs .....	12
4 Maximum Power Spectral Density Level .....	15
4.1 Test Result .....	15
4.2 Test Graphs .....	16
5 Band Edge .....	19
5.1 Test Result .....	19
5.2 Test Graphs .....	20
6 Conducted RF Spurious Emission .....	24
6.1 Test Result .....	24
6.2 Test Graphs .....	25
7 Restrict Band .....	31
7.1 Test Result .....	31
7.2 Test Graphs .....	32






# 1 Duty Cycle



## 1.1 Test Result

Mode	Frequency (MHz)	Duty Cycle (%)	1/T (kHz)	Duty Cycle Factor (dB)
BLE 1M	2402	64.35	2.56	1.91
BLE 1M	2440	64.02	2.56	1.94
BLE 1M	2480	64	2.56	1.94
BLE 2M	2402	34.48	4.76	4.62
BLE 2M	2440	34.77	5	4.59
BLE 2M	2480	34.41	4.76	4.63

## 1.2 Test Graphs

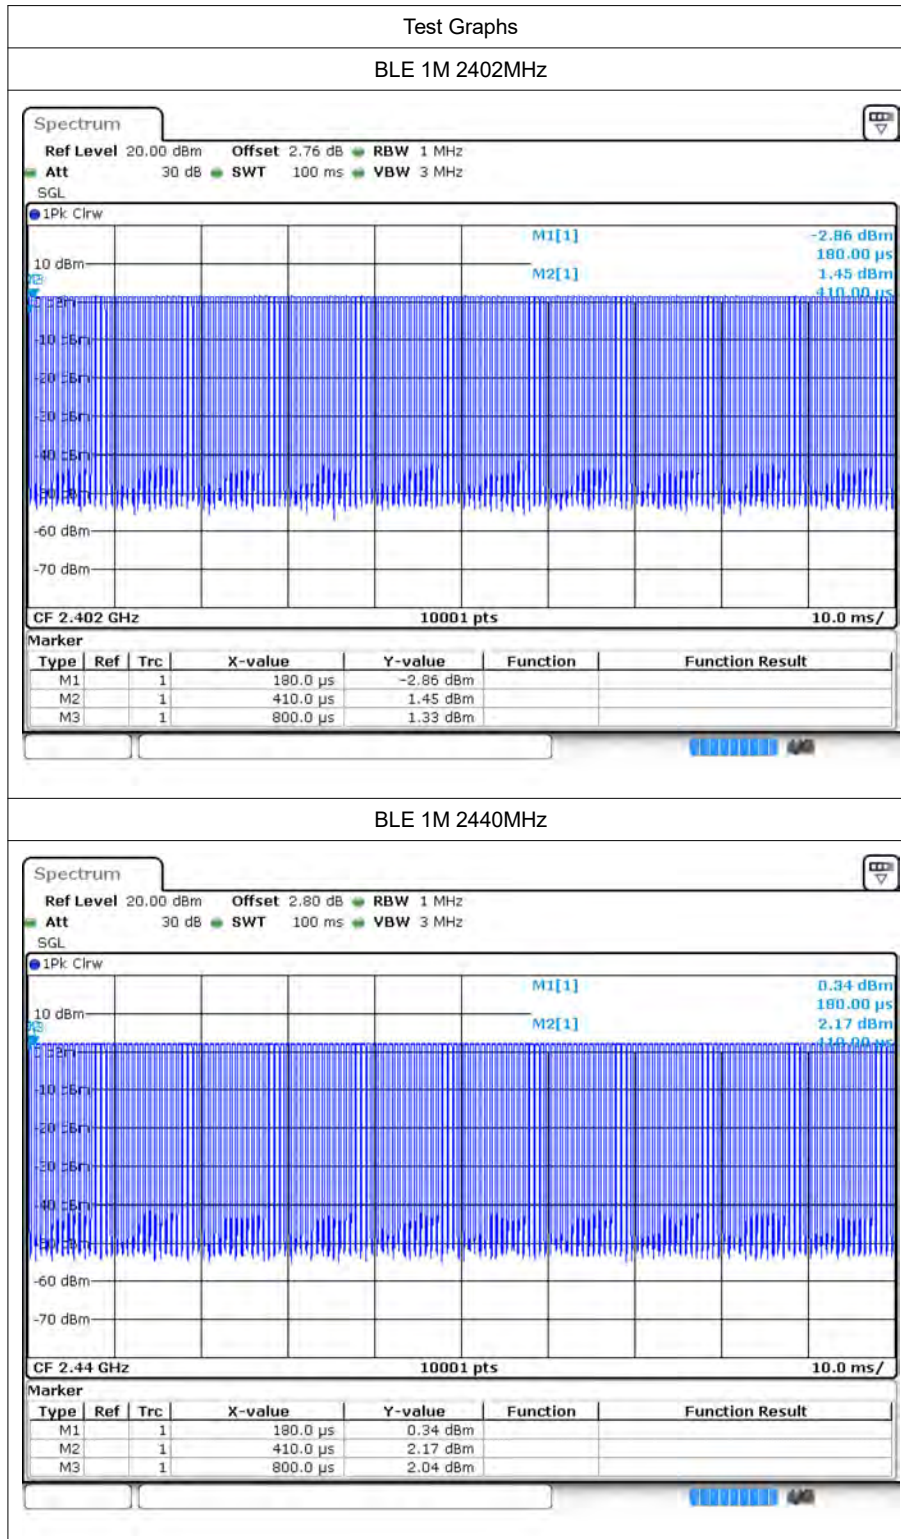

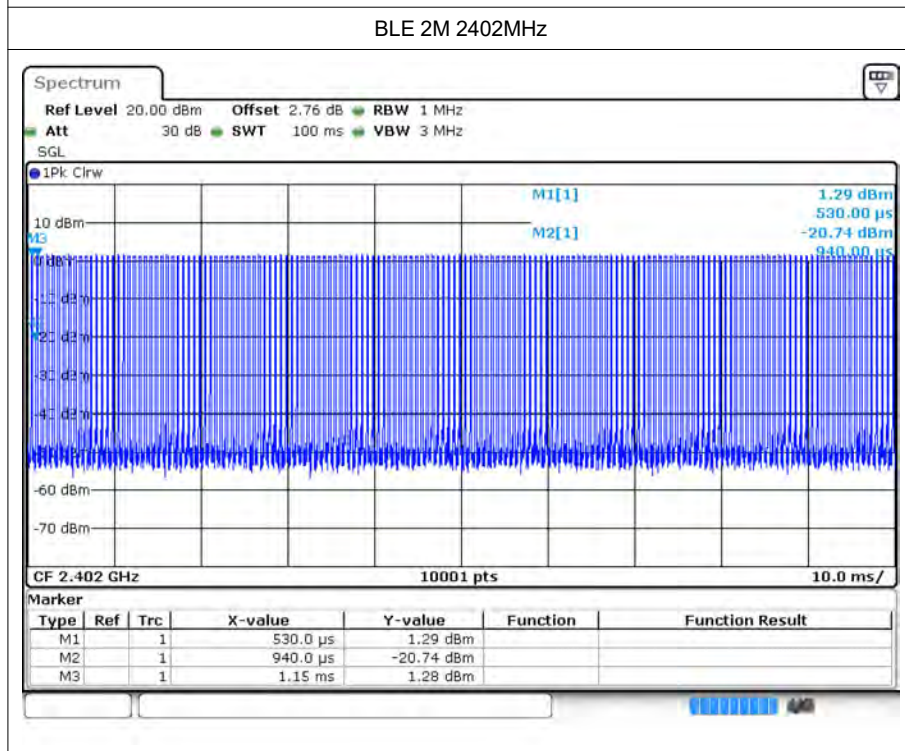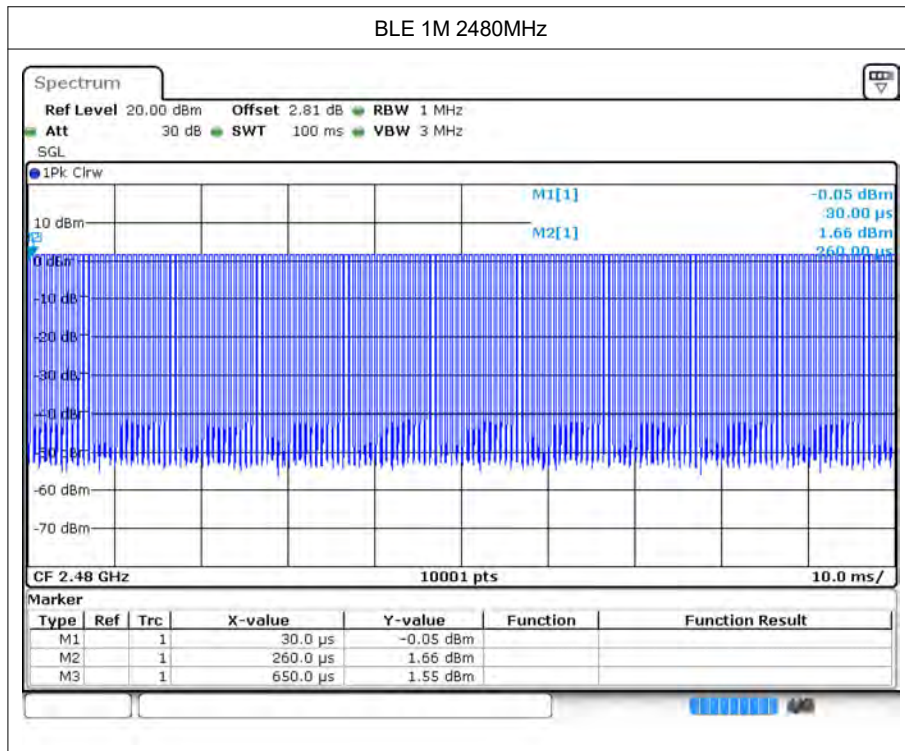

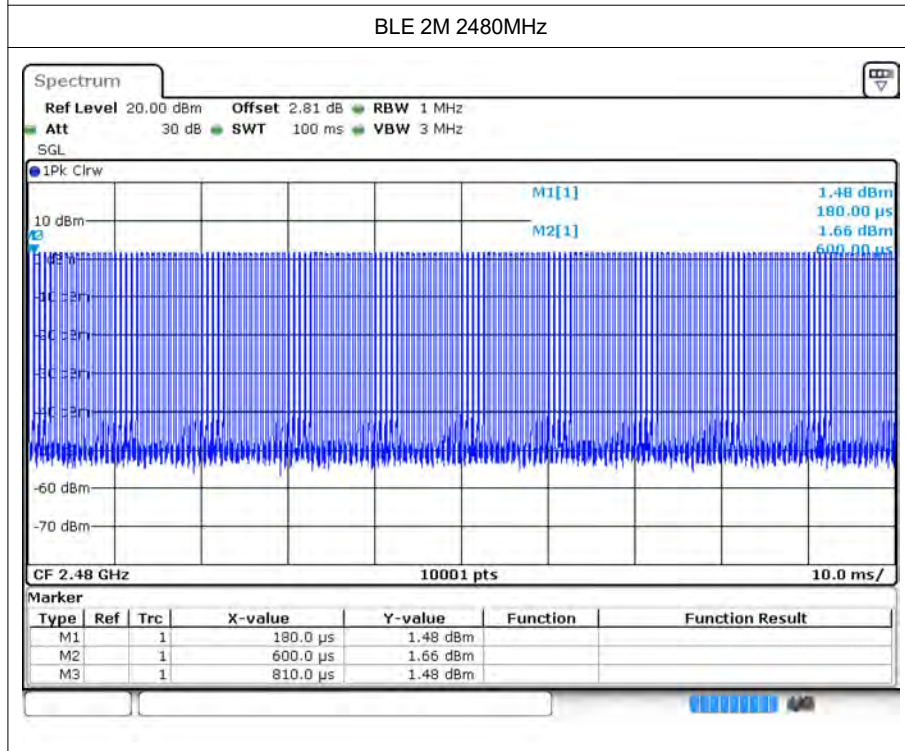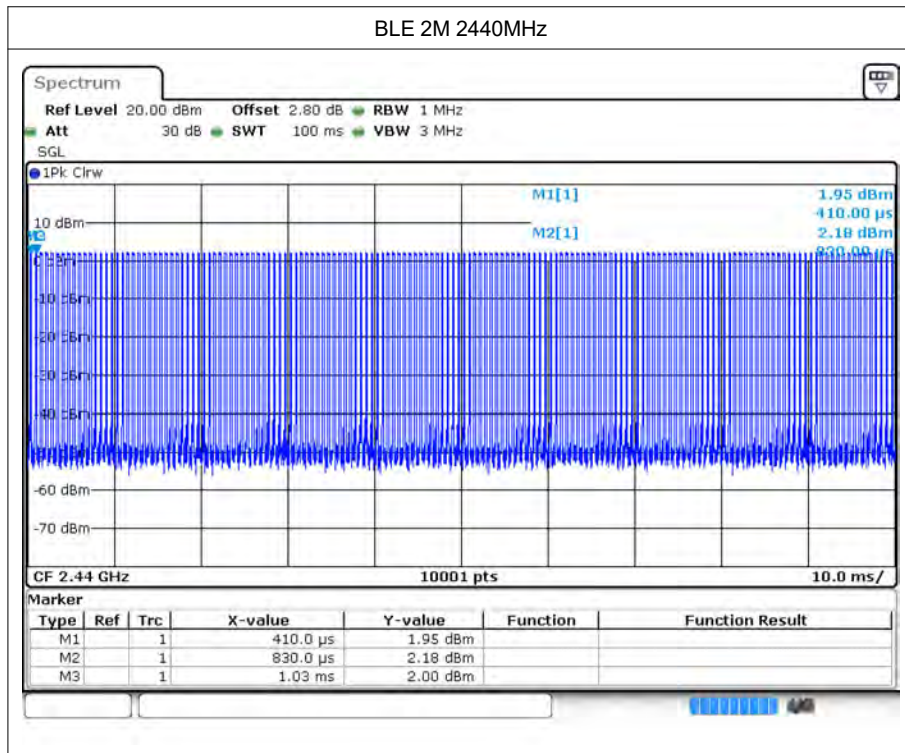




## 2 Maximum Conducted Output Power

### 2.1 Test Result


Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	1.47	30	Pass
BLE 1M	2440	2.2	30	Pass
BLE 1M	2480	1.64	30	Pass
BLE 2M	2402	1.49	30	Pass
BLE 2M	2440	2.2	30	Pass
BLE 2M	2480	1.66	30	Pass





## 2.2 Test Graphs

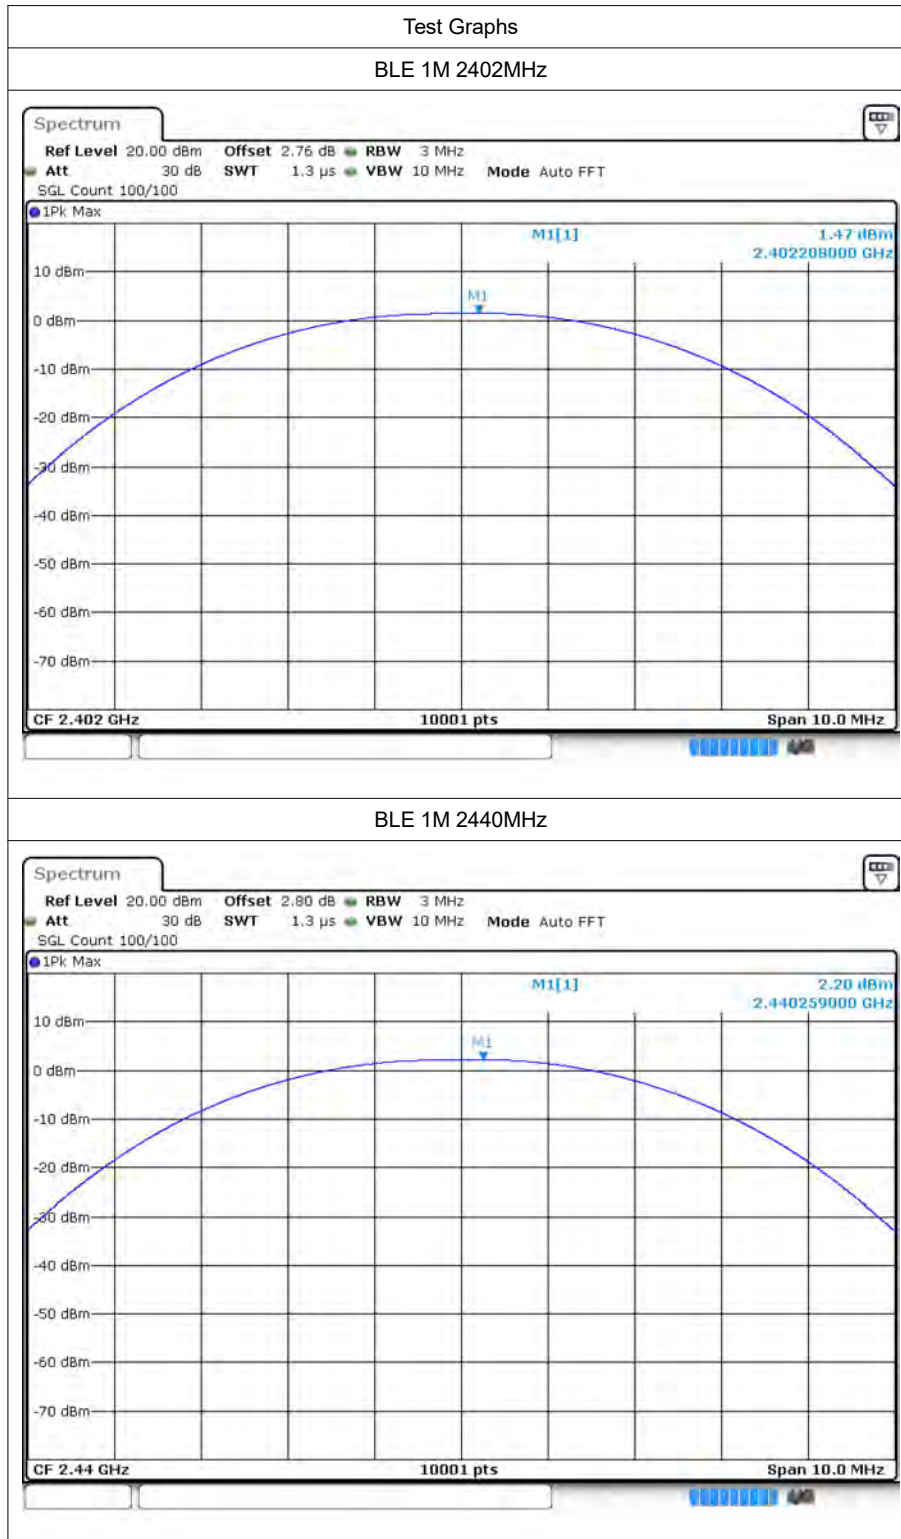



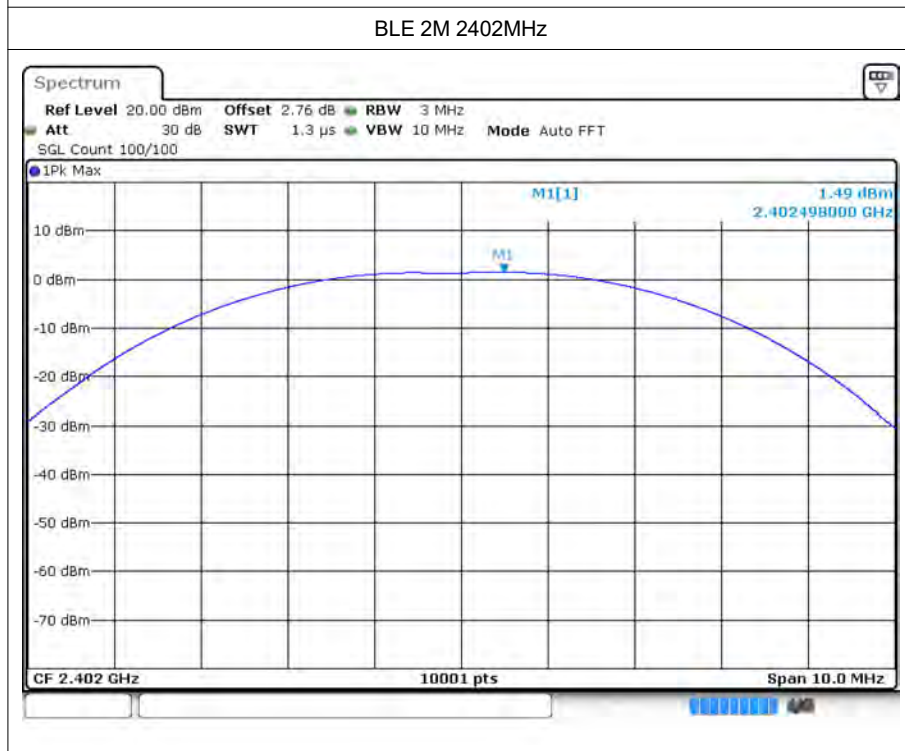

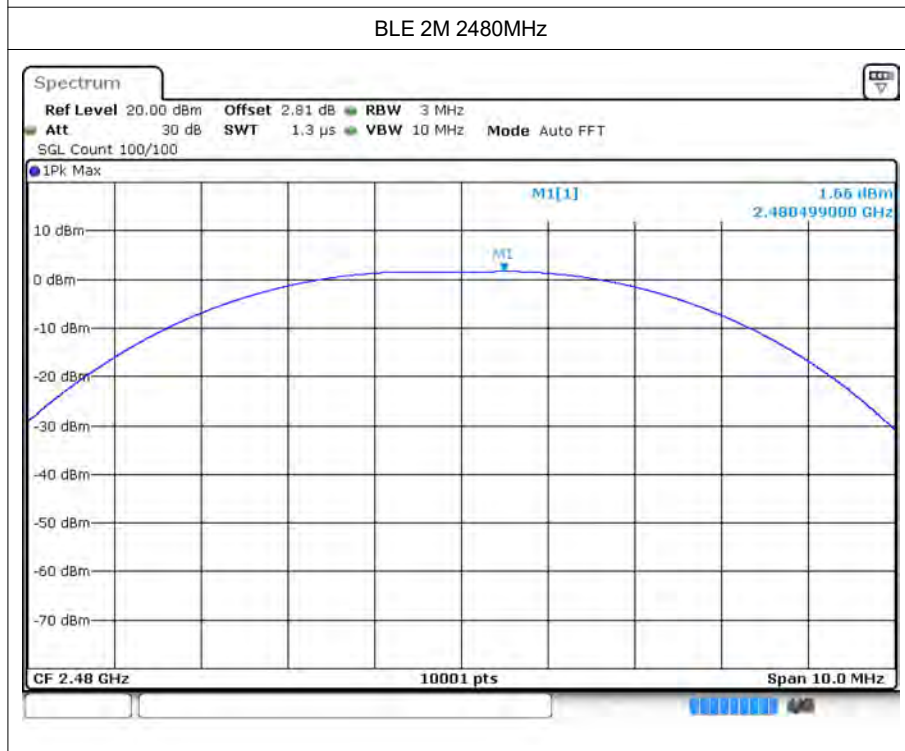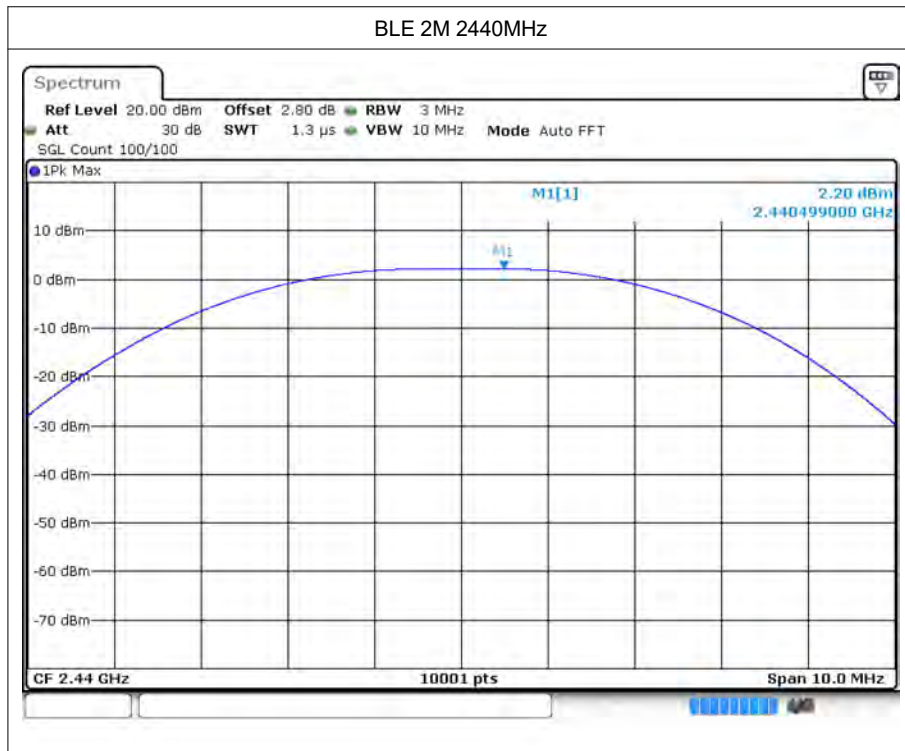






### 3 -6dB Bandwidth


#### 3.1 Test Result

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.665	0.5	Pass
BLE 1M	2440	0.662	0.5	Pass
BLE 1M	2480	0.673	0.5	Pass
BLE 2M	2402	1.281	0.5	Pass
BLE 2M	2440	1.329	0.5	Pass
BLE 2M	2480	1.039	0.5	Pass

### 3.2 Test Graphs

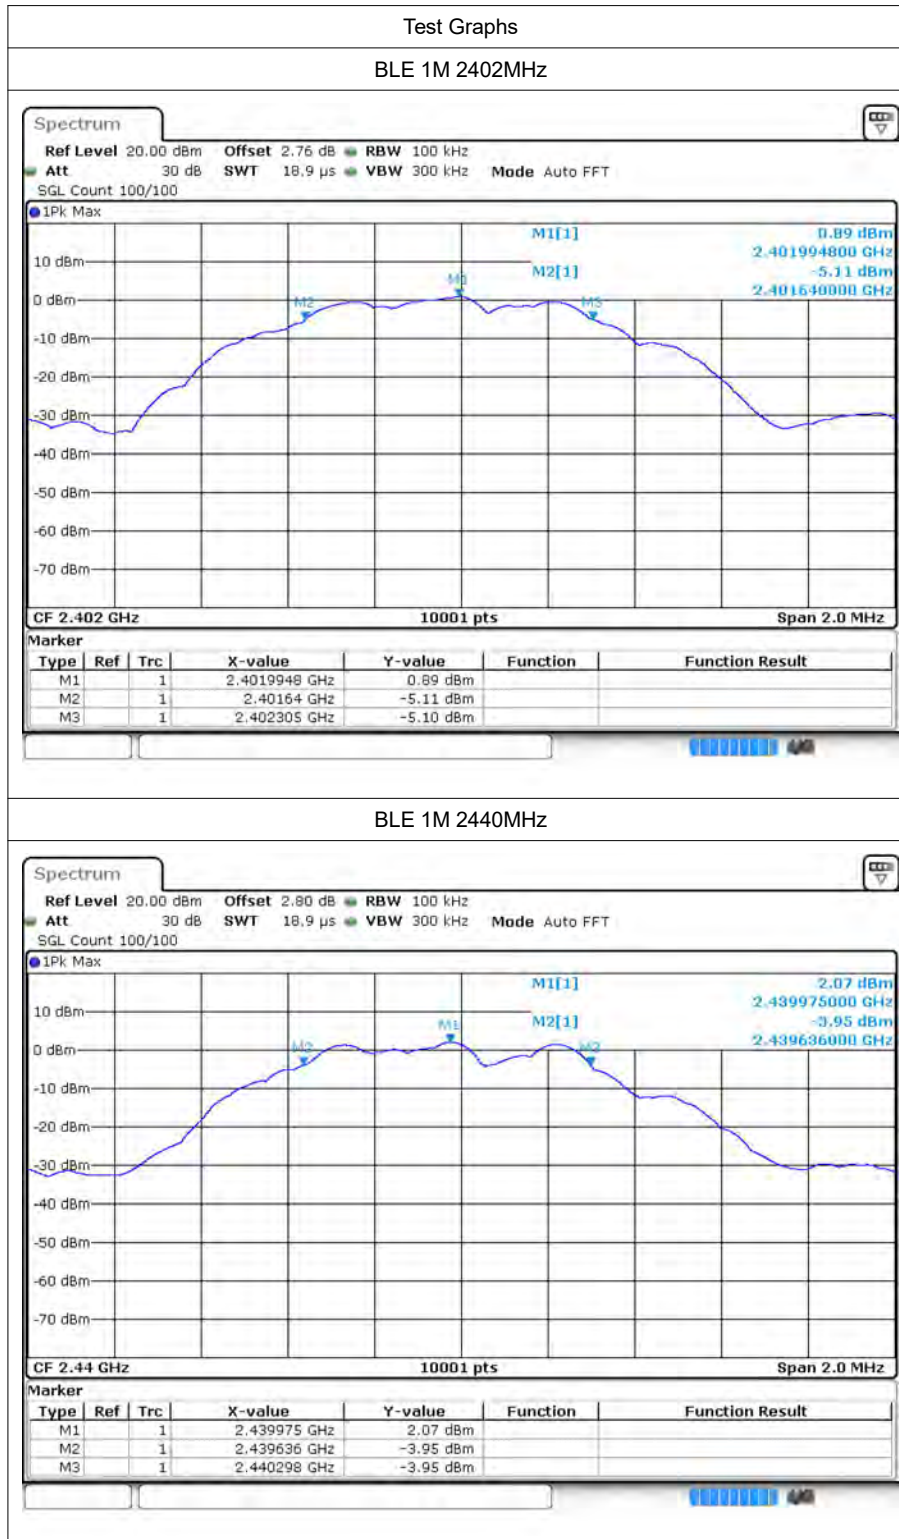

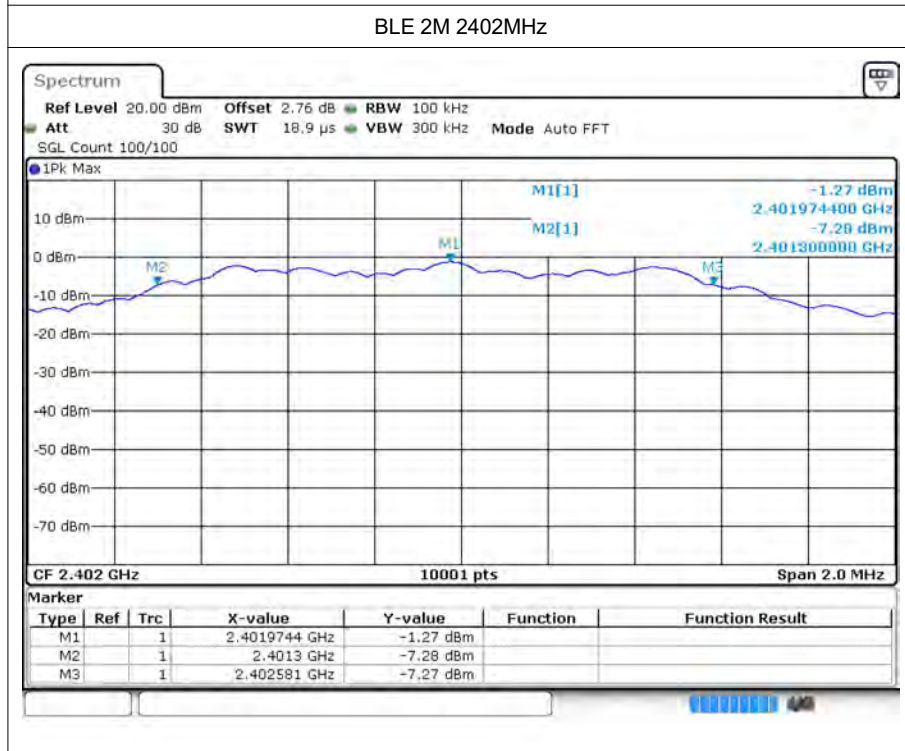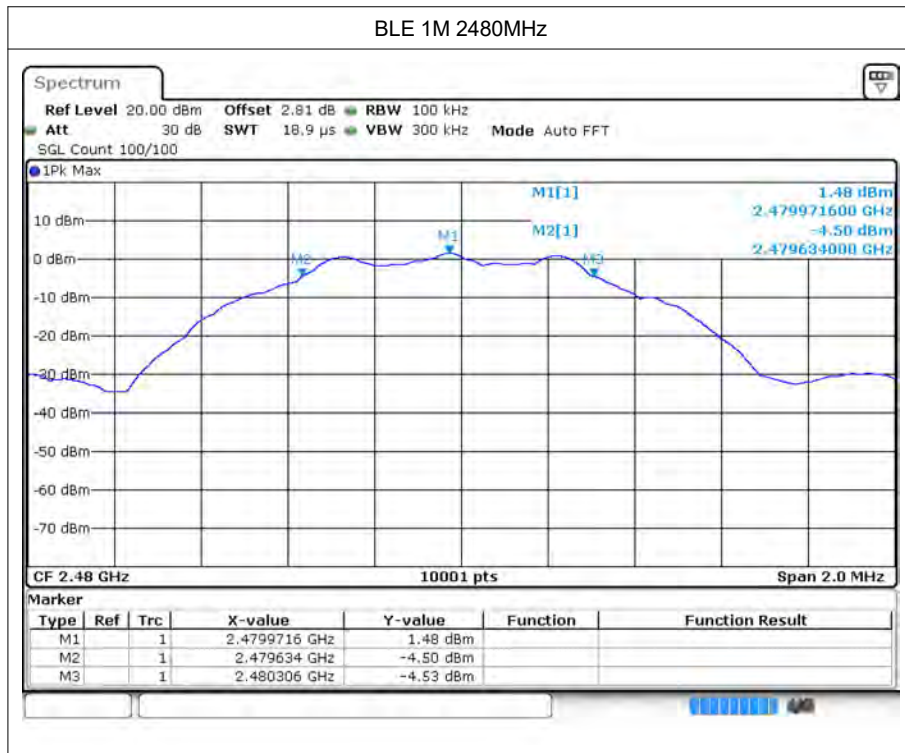

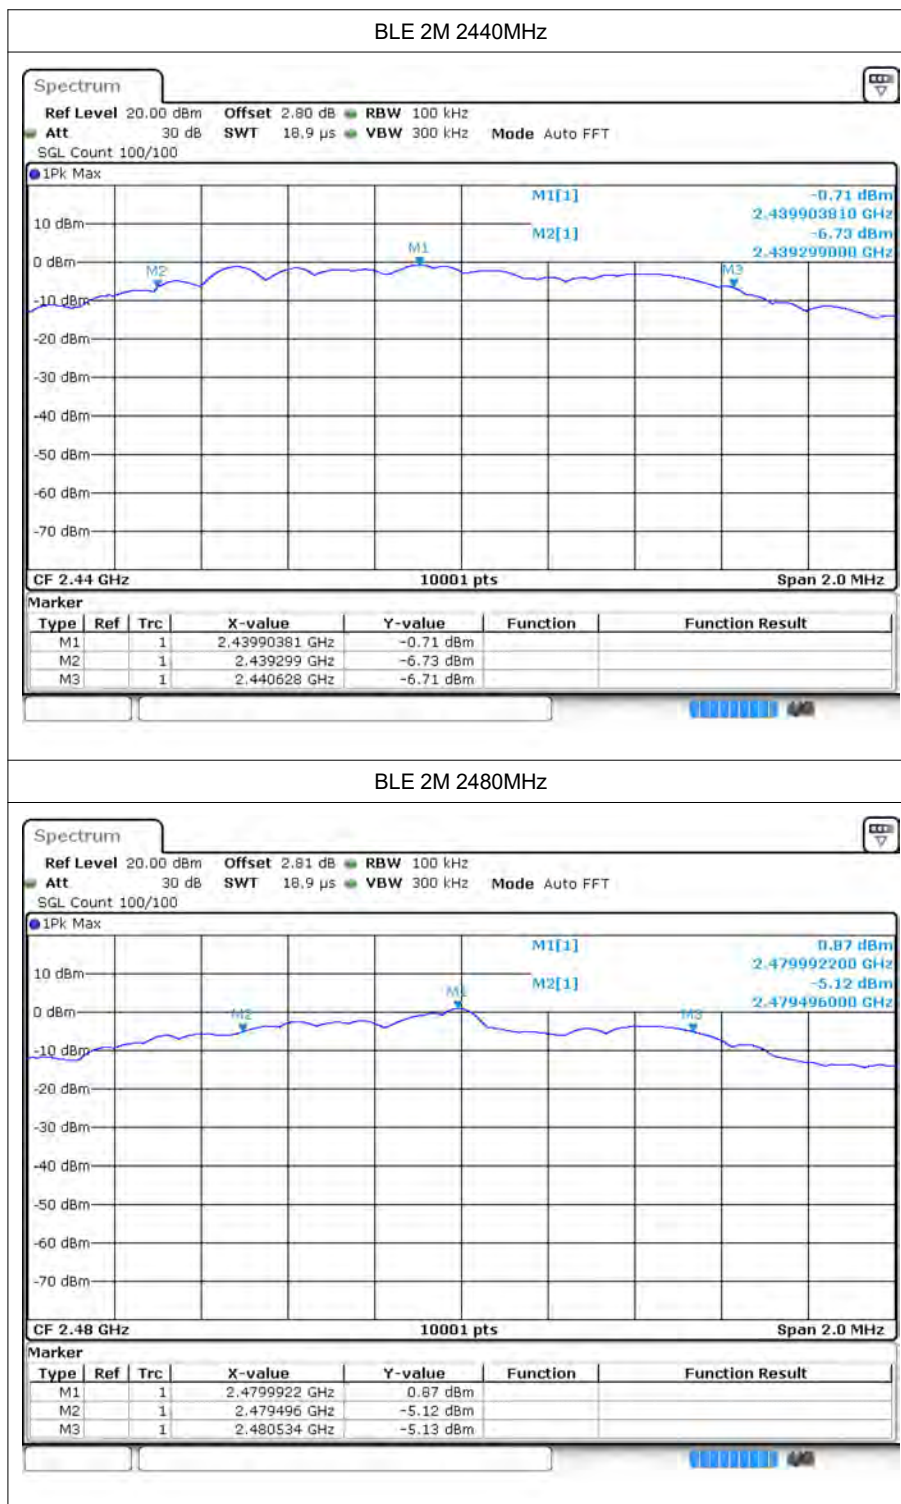




## 4 Maximum Power Spectral Density Level


### 4.1 Test Result


Mode	Frequency (MHz)	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-13.93	$\leq 8$	Pass
BLE 1M	2440	-13	$\leq 8$	Pass
BLE 1M	2480	-14.05	$\leq 8$	Pass
BLE 2M	2402	-16.55	$\leq 8$	Pass
BLE 2M	2440	-15.65	$\leq 8$	Pass
BLE 2M	2480	-16.36	$\leq 8$	Pass



## 4.2 Test Graphs

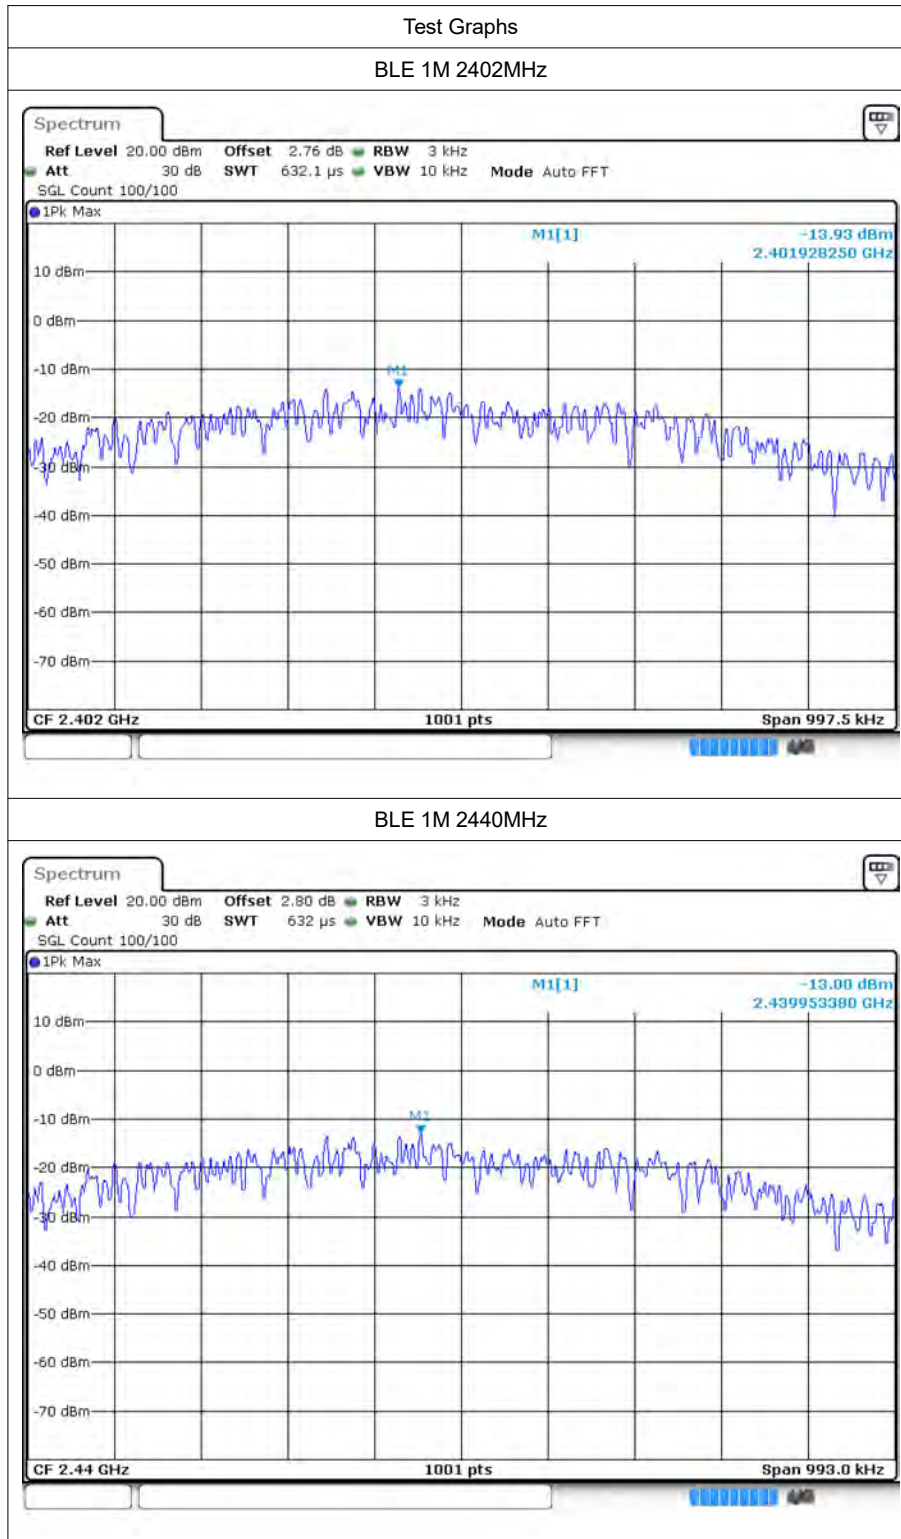

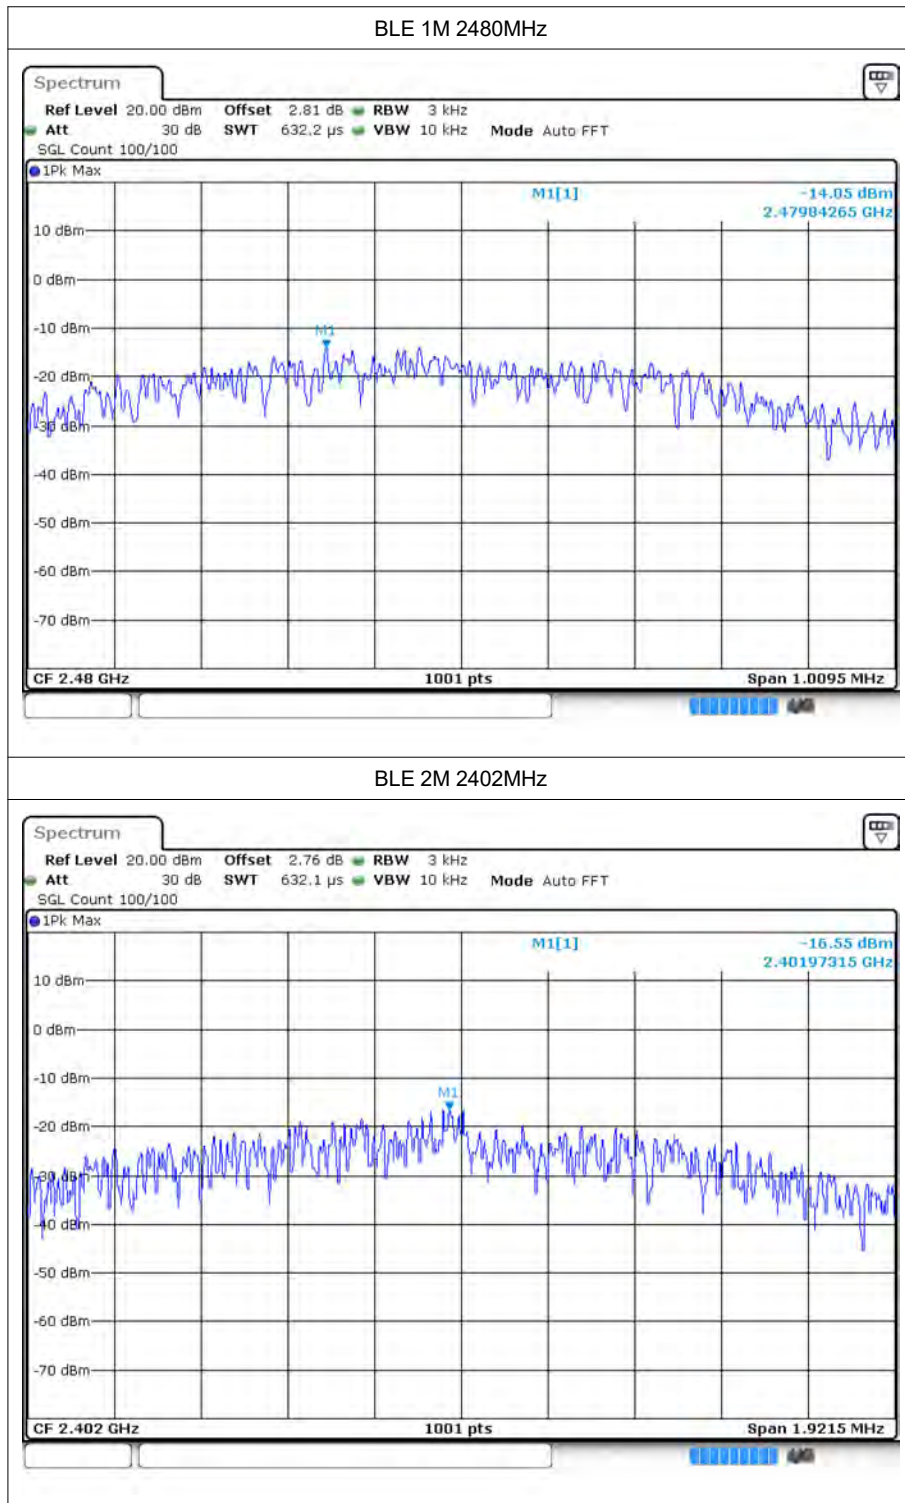

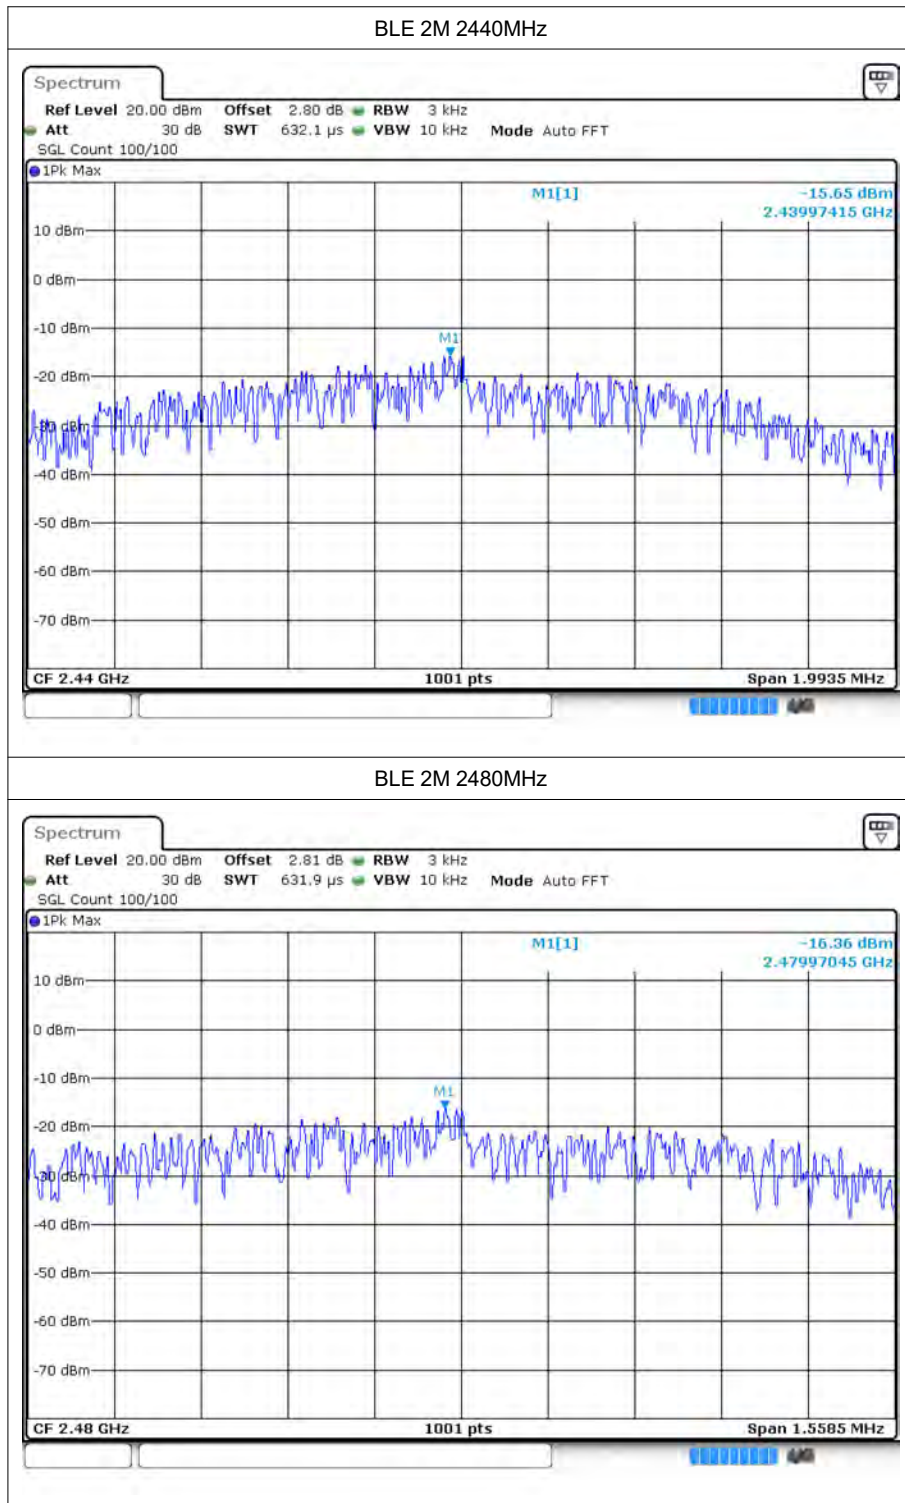




## 5 Band Edge


### 5.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-57.11	-20	Pass
BLE 1M	2480	-46.25	-20	Pass
BLE 2M	2402	-56.39	-20	Pass
BLE 2M	2480	-47.65	-20	Pass

## 5.2 Test Graphs

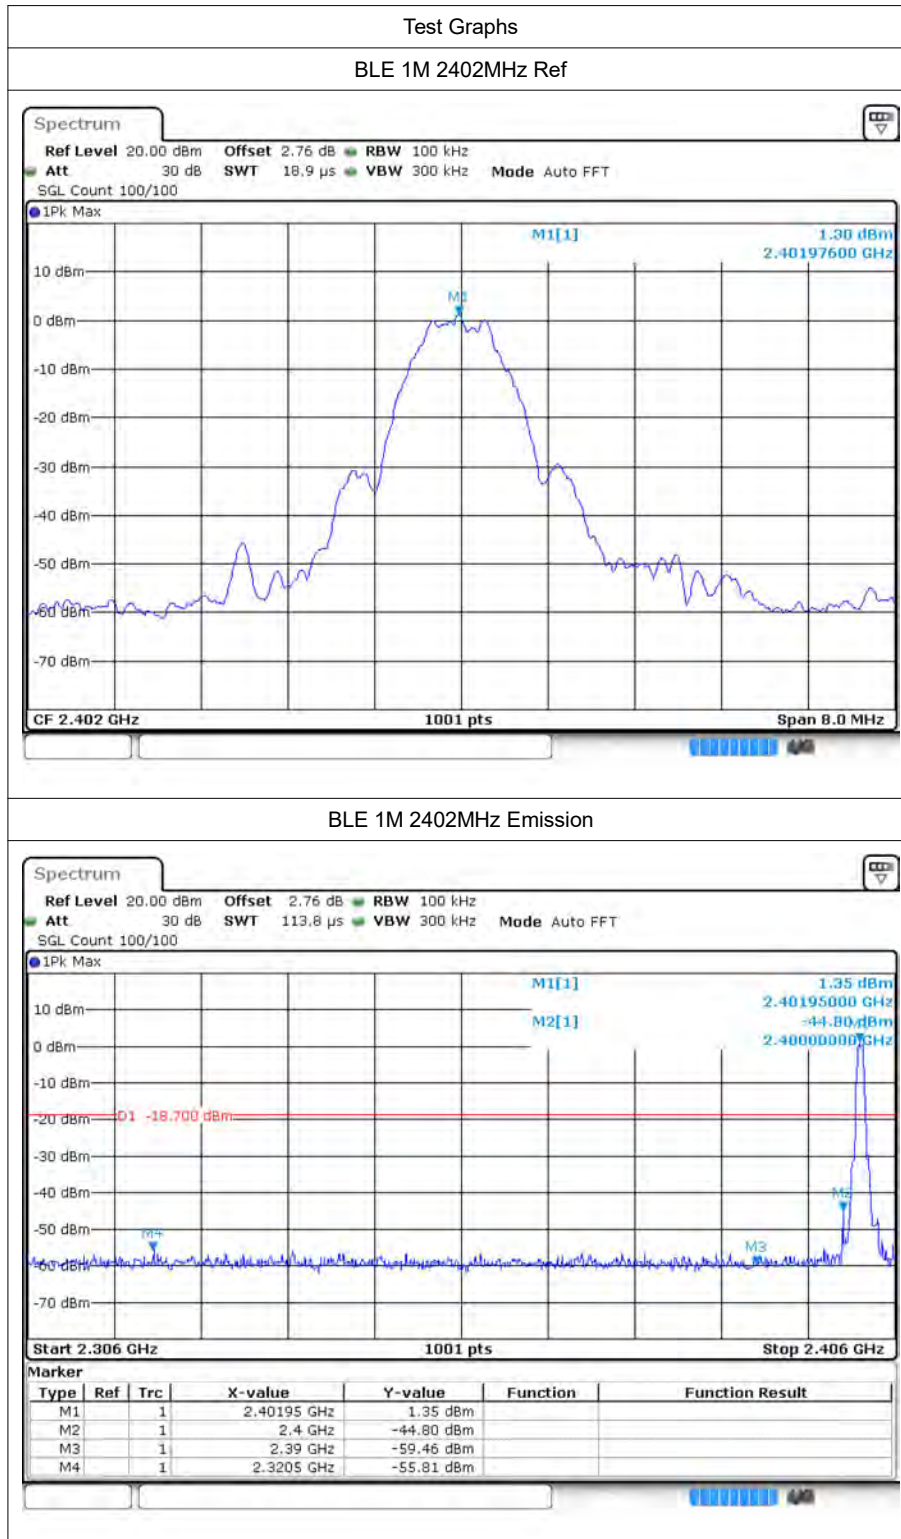




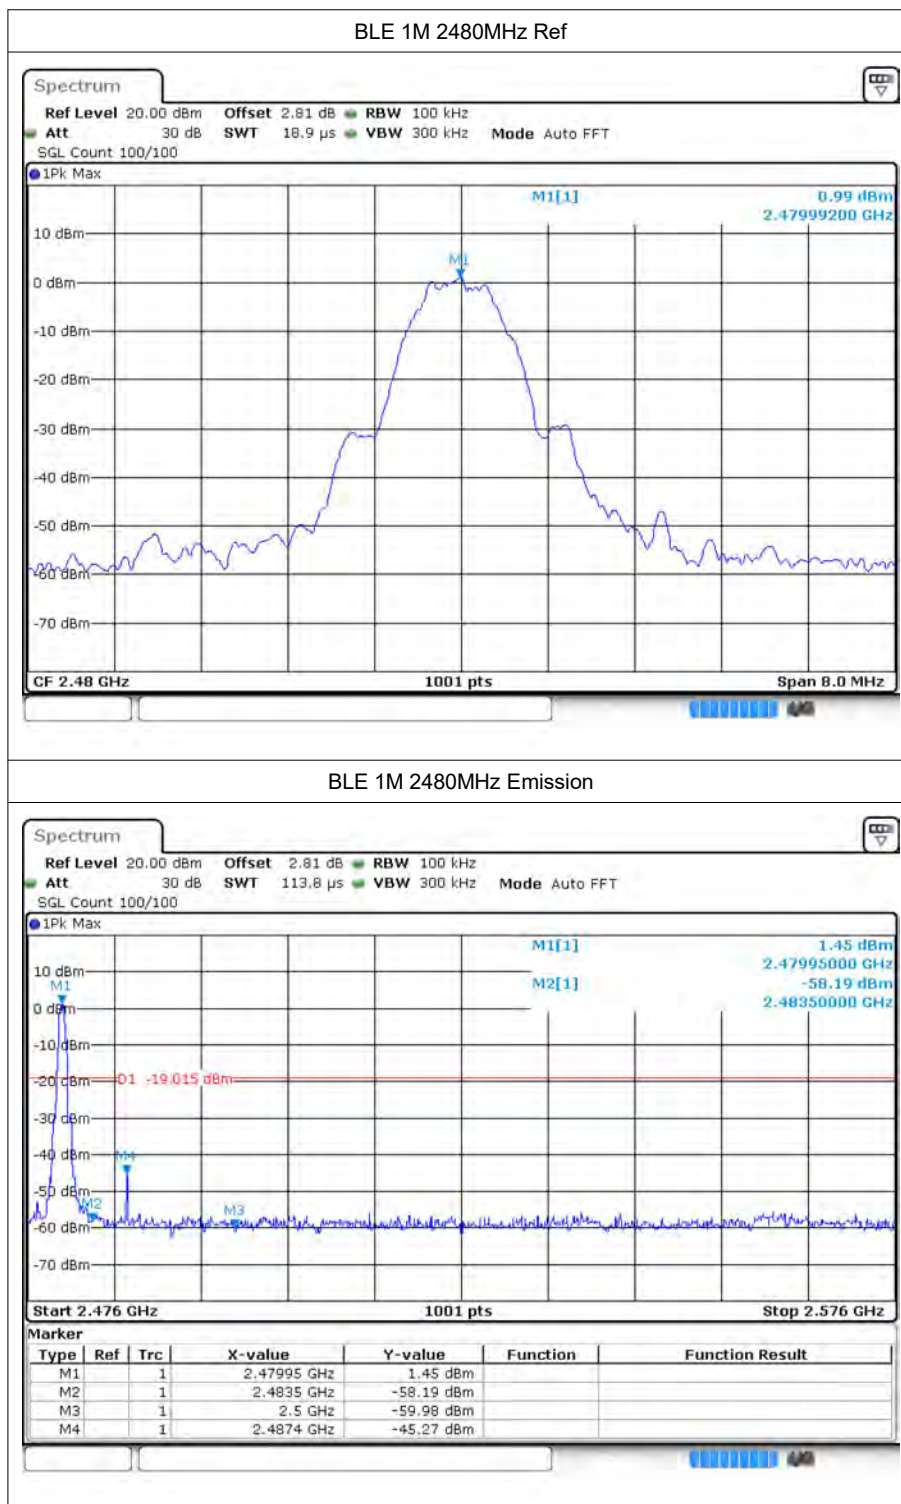

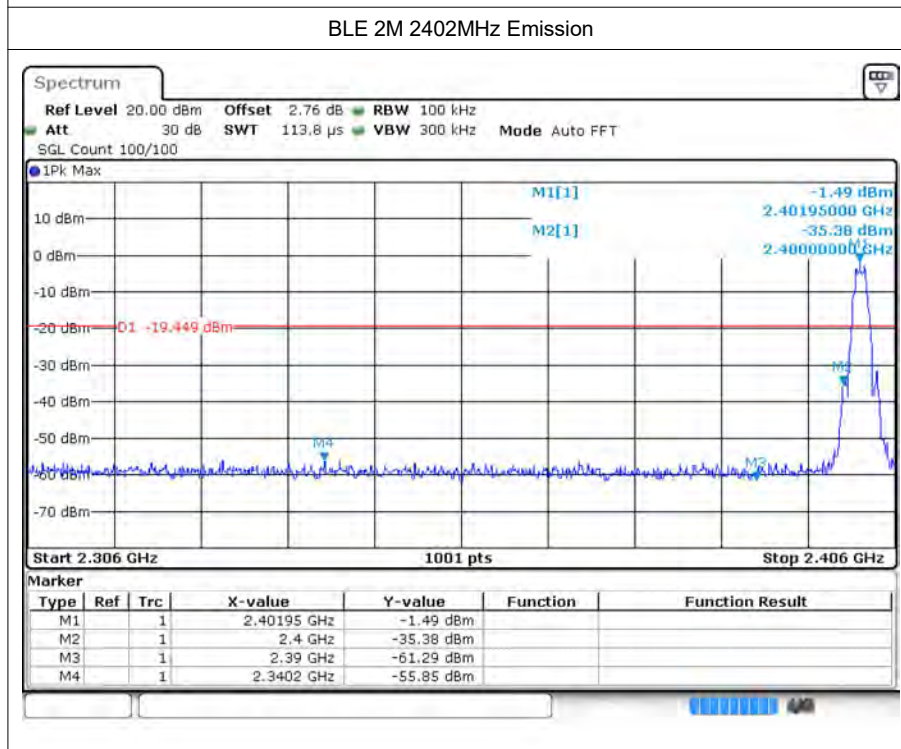



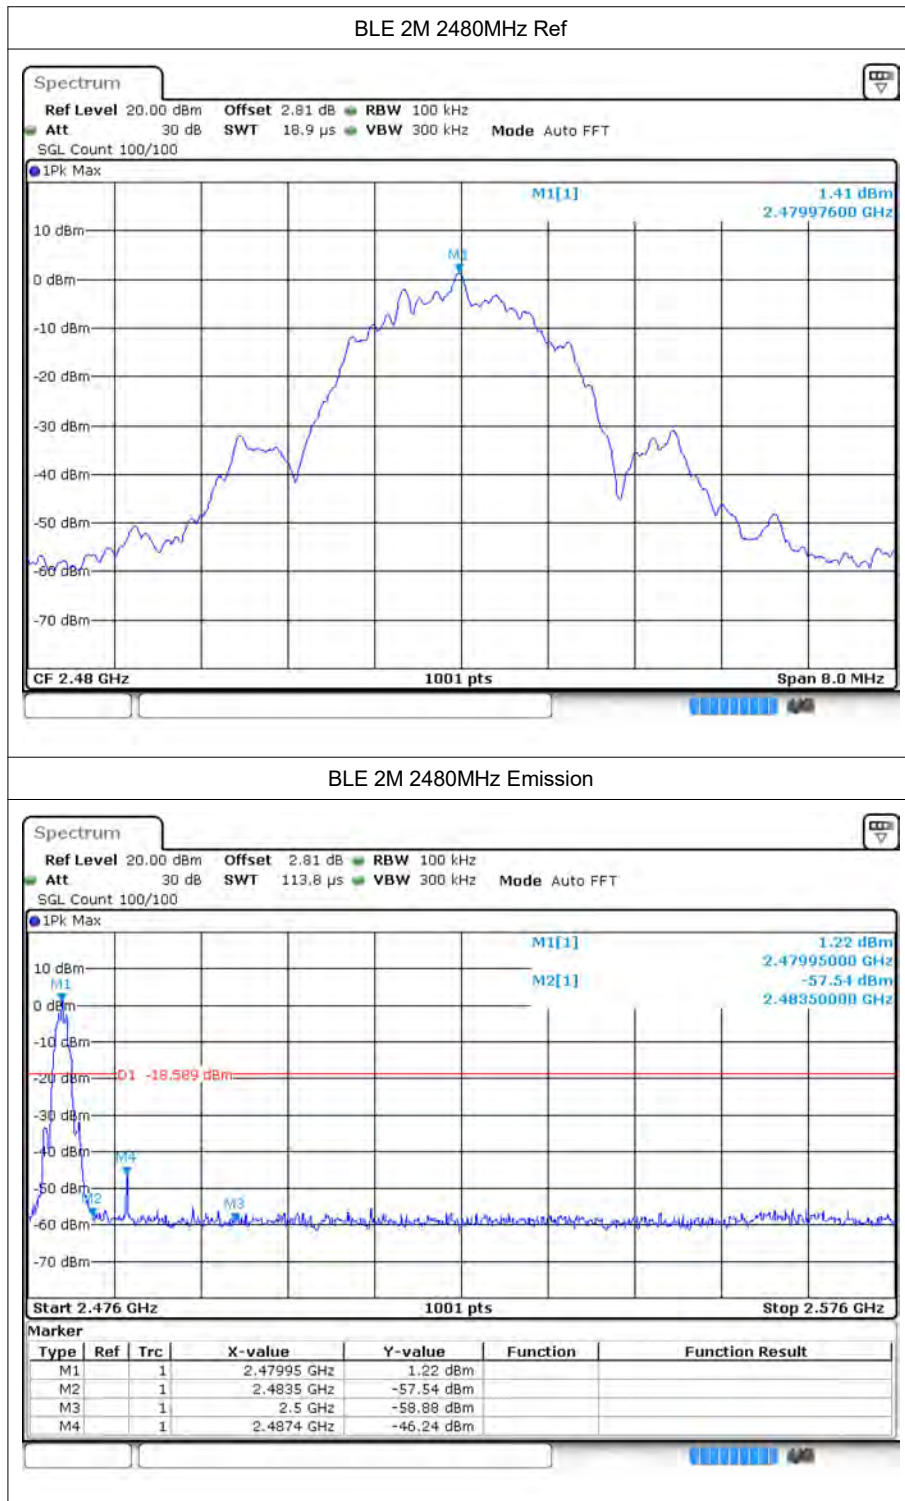






## 6 Conducted RF Spurious Emission



### 6.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-44.32	-20	Pass
BLE 1M	2440	-44.62	-20	Pass
BLE 1M	2480	-44.4	-20	Pass
BLE 2M	2402	-43.68	-20	Pass
BLE 2M	2440	-45.31	-20	Pass
BLE 2M	2480	-43.28	-20	Pass



## 6.2 Test Graphs


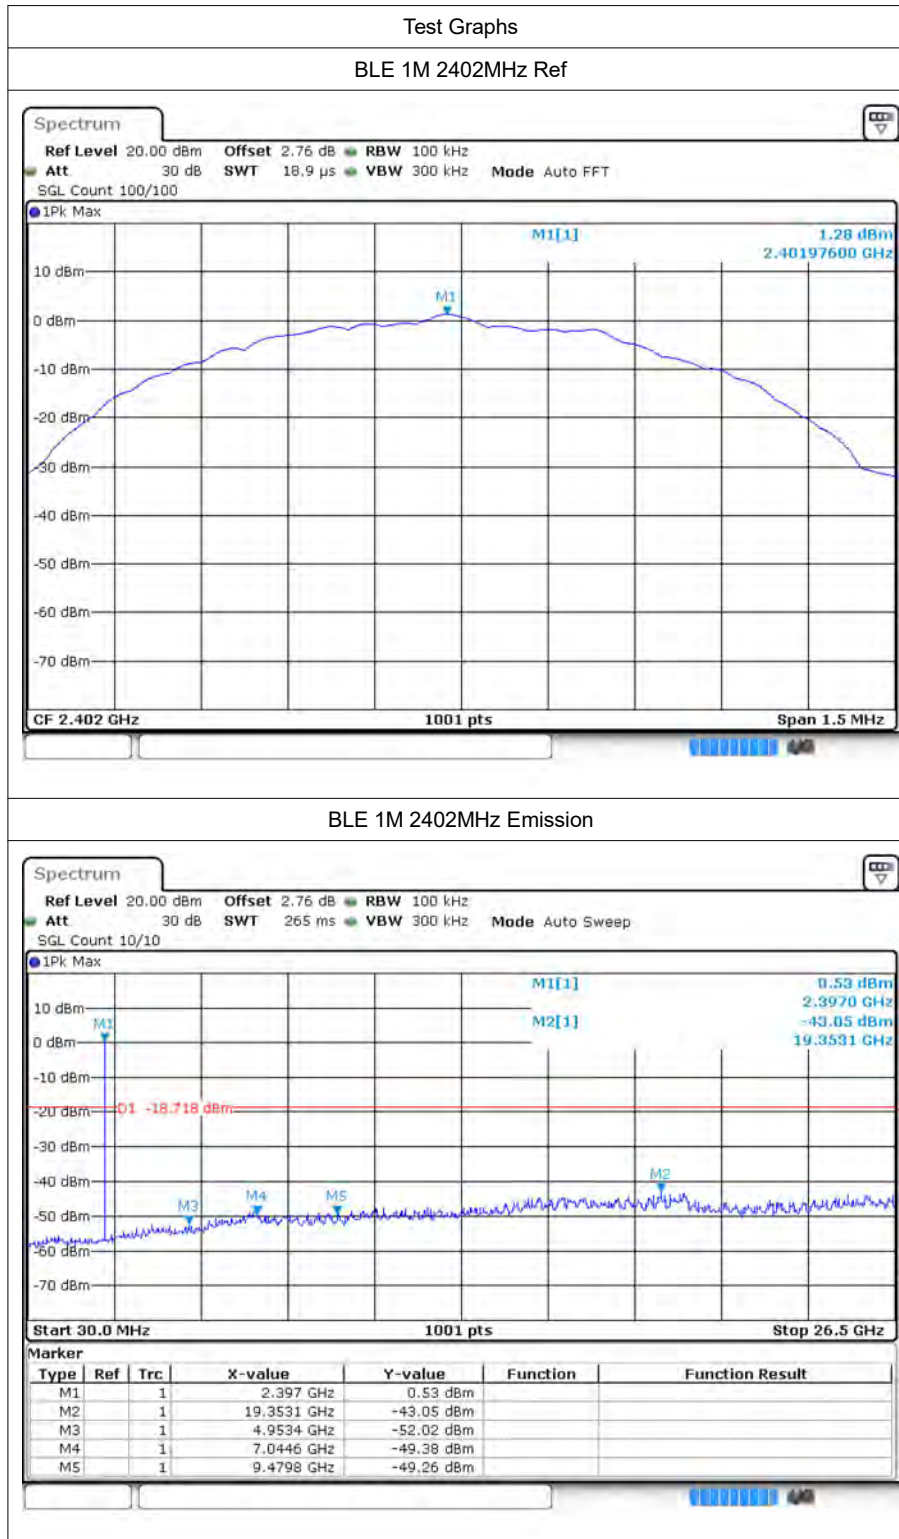


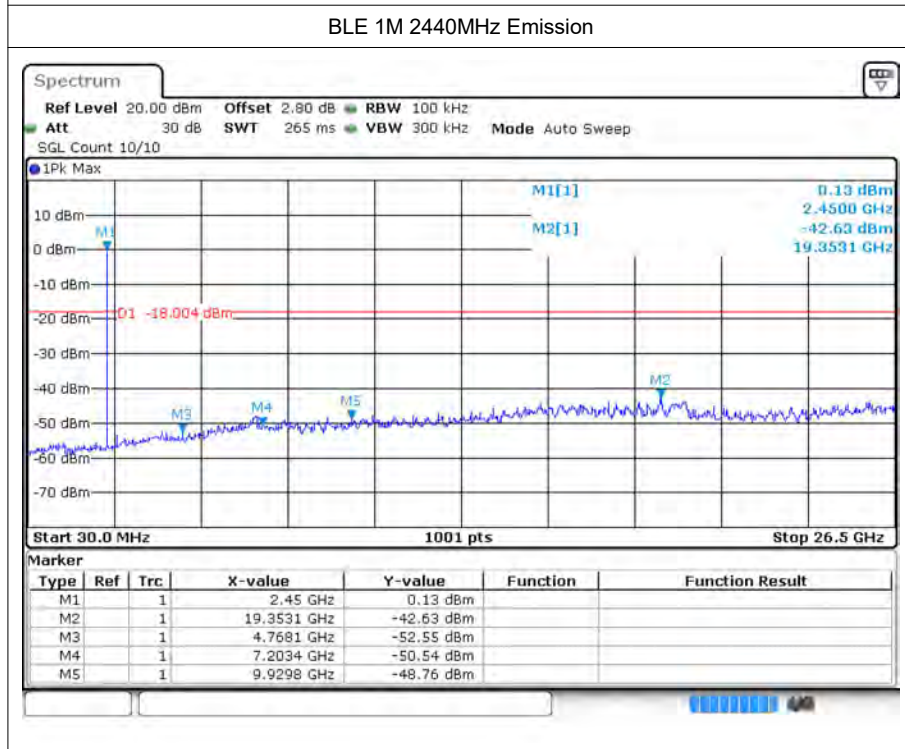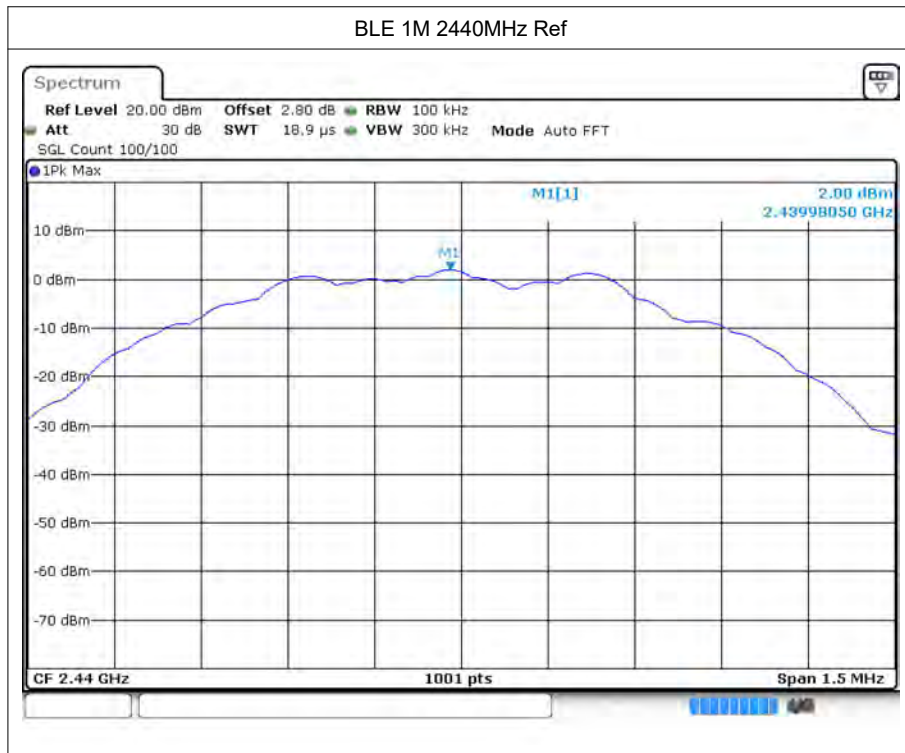

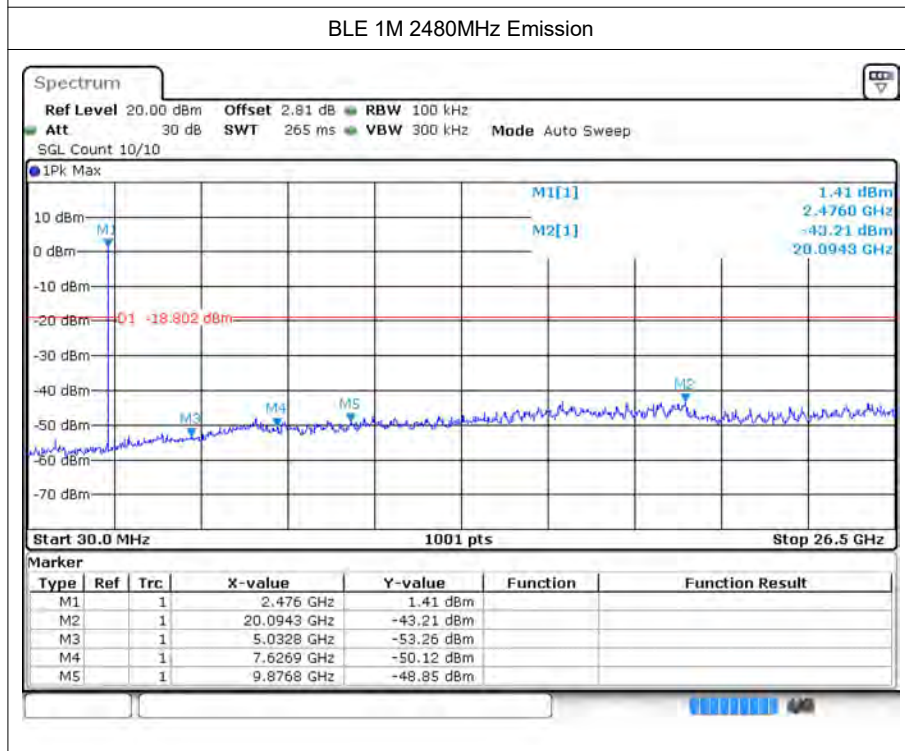
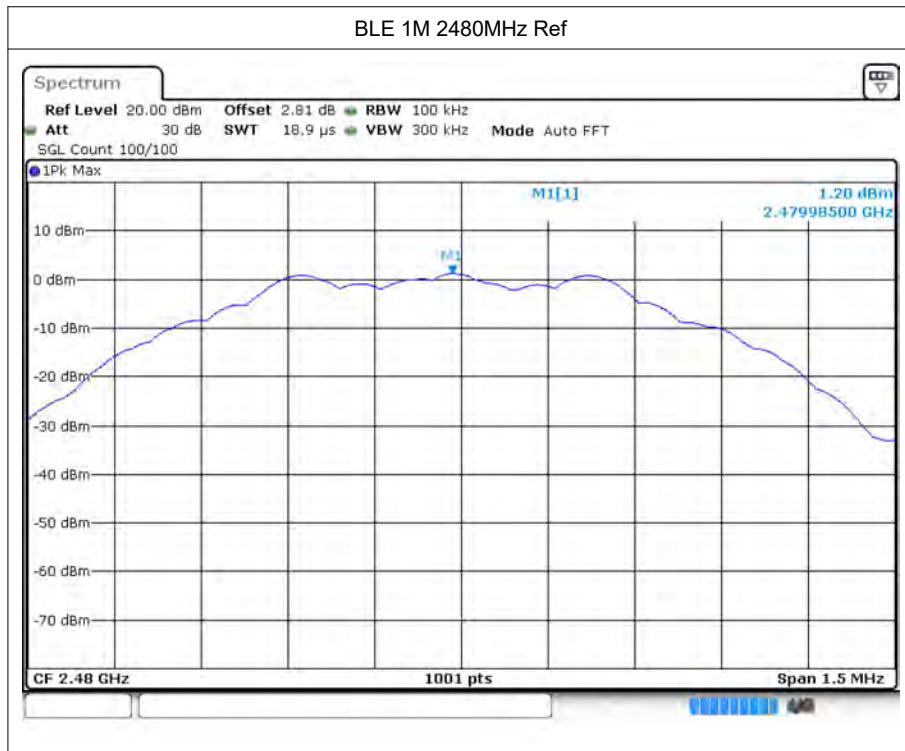




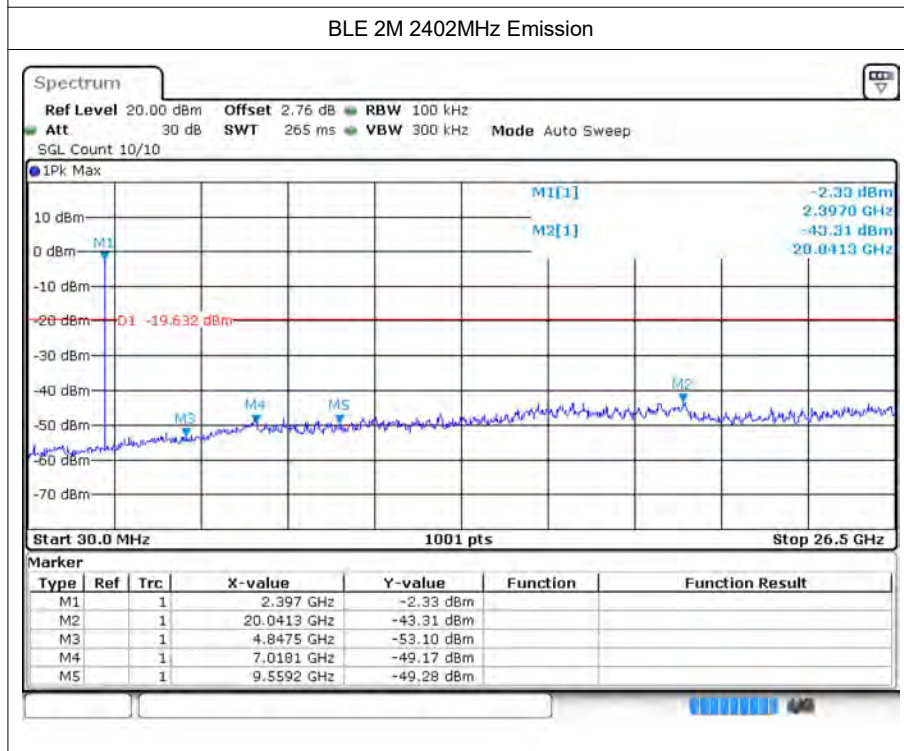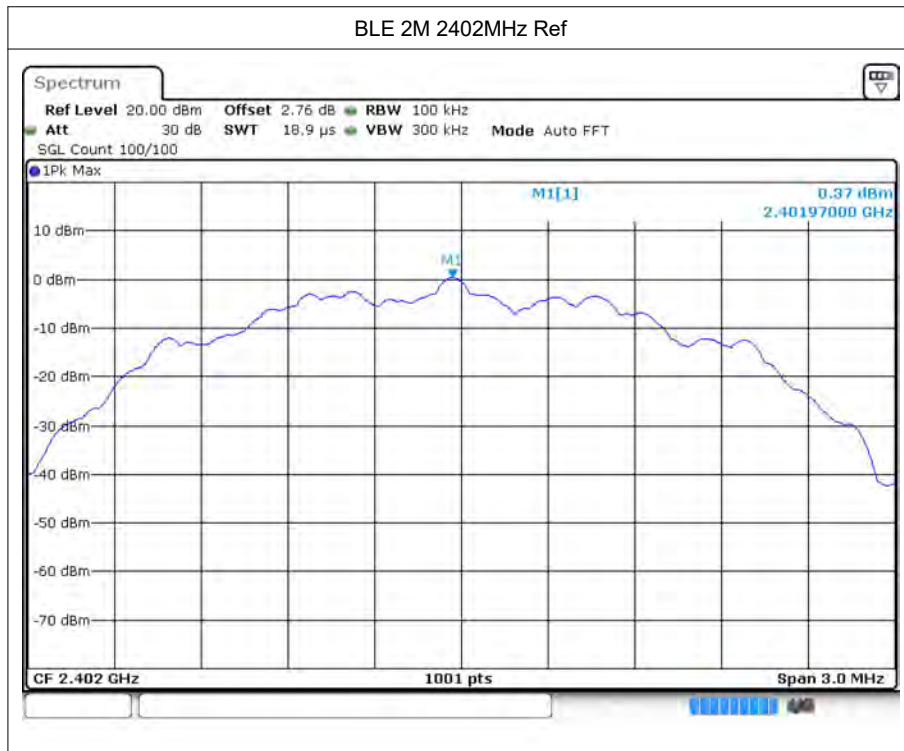

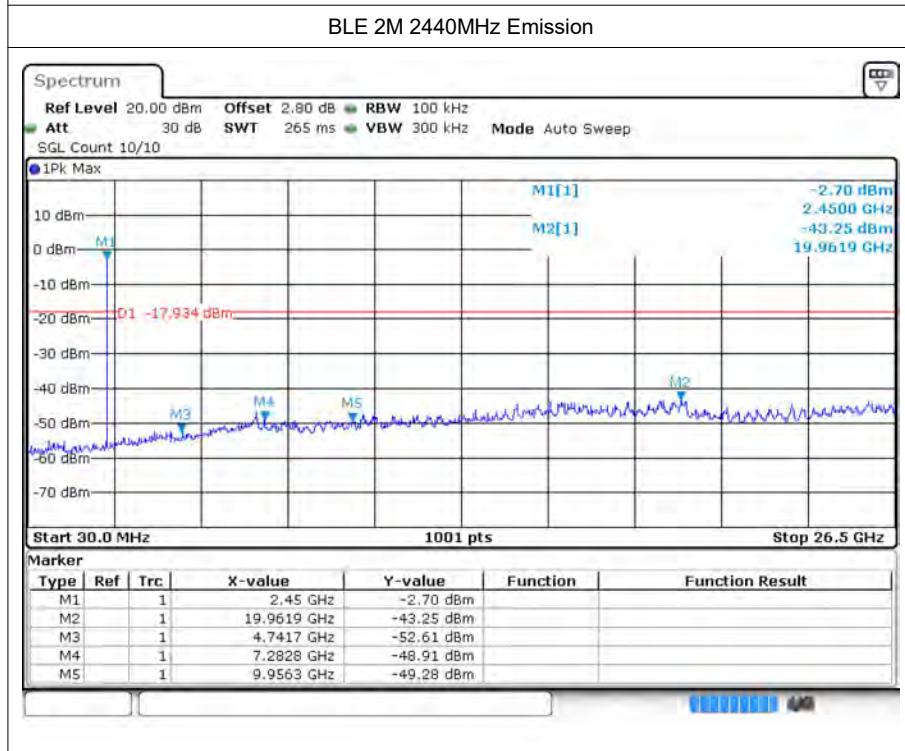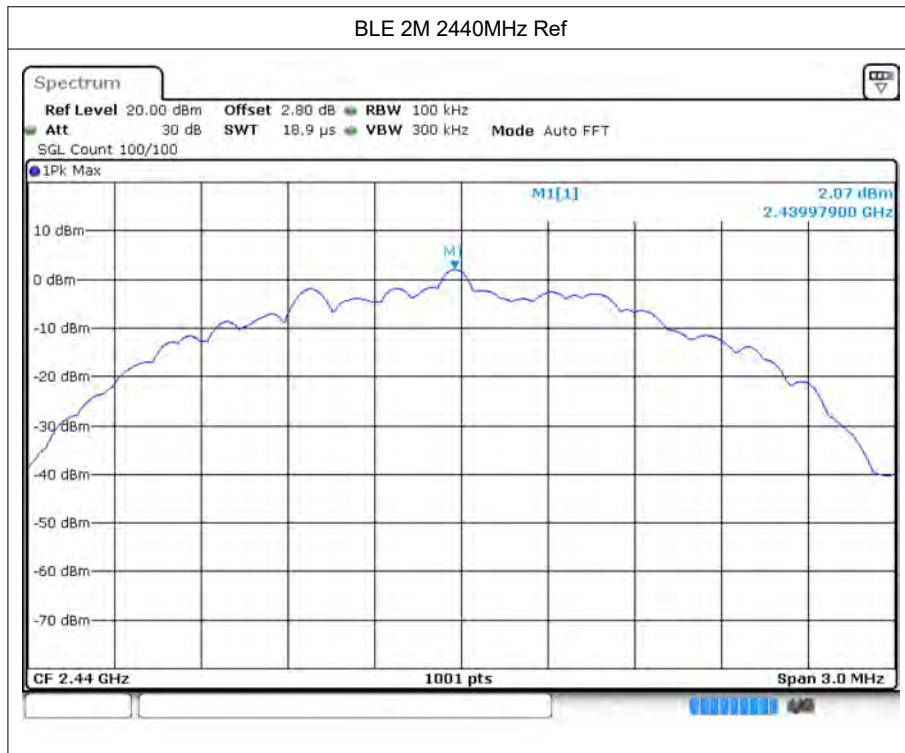



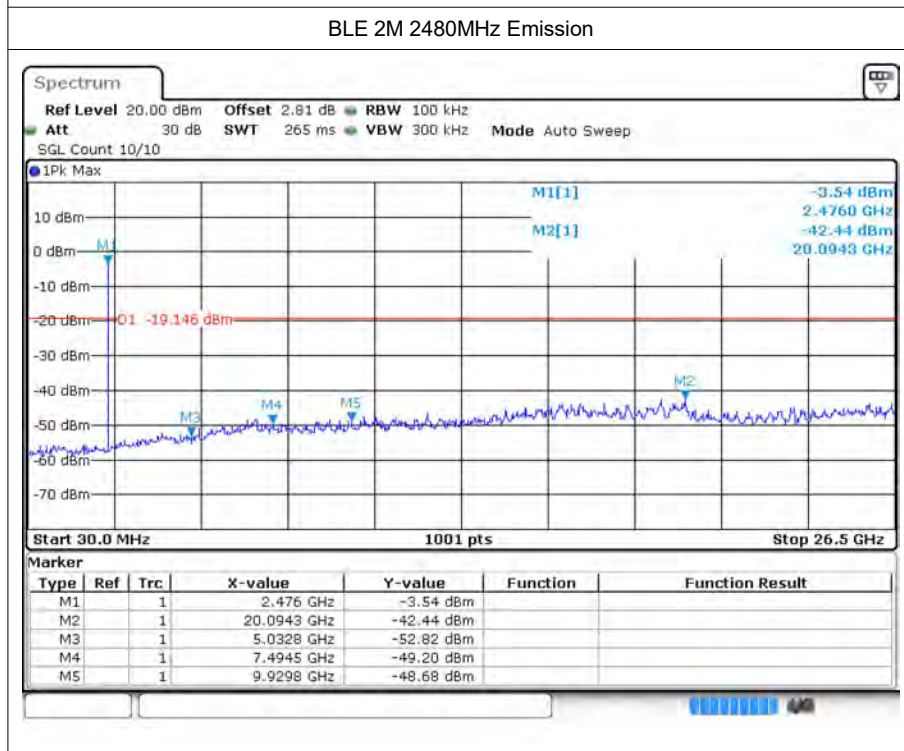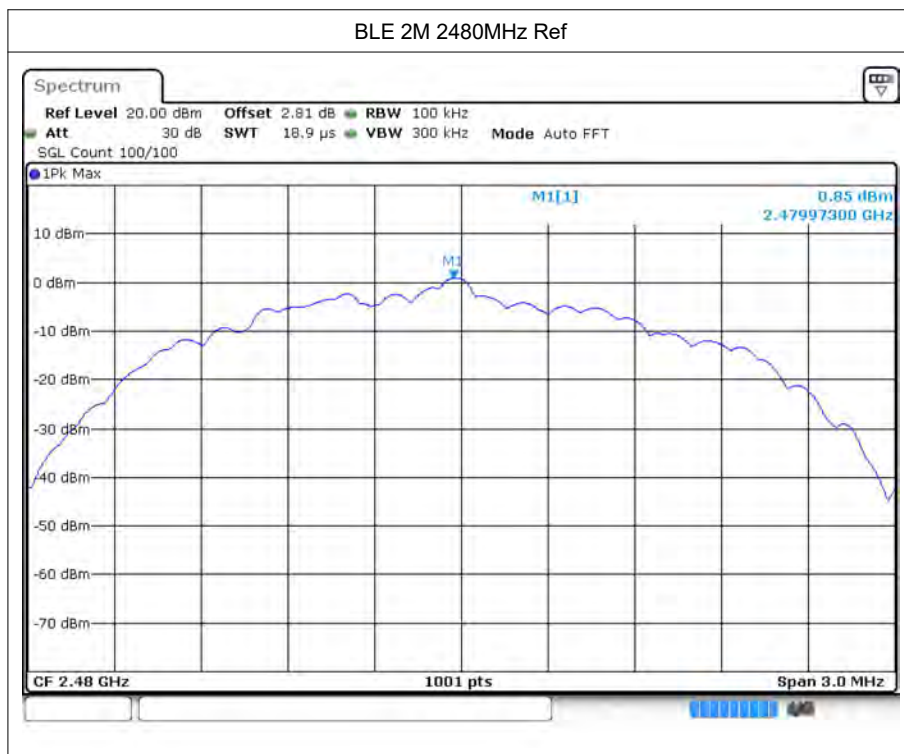






## 7 Restrict Band



### 7.1 Test Result

Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Cycle Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.76	2	--	47.50	Peak	74	Pass
BLE 1M	2402	2310	-57.72	2	1.91	41.45	Average	54	Pass
BLE 1M	2402	2338.128	-46.76	2	--	50.50	Peak	74	Pass
BLE 1M	2402	2342.064	-55.64	2	1.91	43.53	Average	54	Pass
BLE 1M	2402	2390	-51.02	2	--	46.24	Peak	74	Pass
BLE 1M	2402	2390	-58.03	2	1.91	41.14	Average	54	Pass
BLE 1M	2480	2483.5	-45.49	2	--	51.77	Peak	74	Pass
BLE 1M	2480	2483.5	-56.41	2	1.94	42.79	Average	54	Pass
BLE 1M	2480	2487.424	-44.03	2	--	53.23	Peak	74	Pass
BLE 1M	2480	2487.496	-56.05	2	1.94	43.15	Average	54	Pass
BLE 1M	2480	2500	-51.33	2	--	45.93	Peak	74	Pass
BLE 1M	2480	2500	-57.64	2	1.94	41.56	Average	54	Pass
BLE 2M	2402	2310	-49.67	2	--	47.59	Peak	74	Pass
BLE 2M	2402	2310	-57.44	2	4.62	44.44	Average	54	Pass
BLE 2M	2402	2314.224	-46.6	2	--	50.66	Peak	74	Pass
BLE 2M	2402	2341.872	-55.3	2	4.62	46.58	Average	54	Pass
BLE 2M	2402	2390	-51.89	2	--	45.37	Peak	74	Pass
BLE 2M	2402	2390	-57.87	2	4.62	44.01	Average	54	Pass
BLE 2M	2480	2483.5	-47.76	2	--	49.50	Peak	74	Pass
BLE 2M	2480	2483.5	-53.42	2	4.63	48.47	Average	54	Pass
BLE 2M	2480	2487.4	-43.2	2	--	54.06	Peak	74	Pass
BLE 2M	2480	2483.512	-53.42	2	4.63	48.47	Average	54	Pass
BLE 2M	2480	2500	-49.65	2	--	47.61	Peak	74	Pass
BLE 2M	2480	2500	-57.7	2	4.63	44.19	Average	54	Pass



## 7.2 Test Graphs

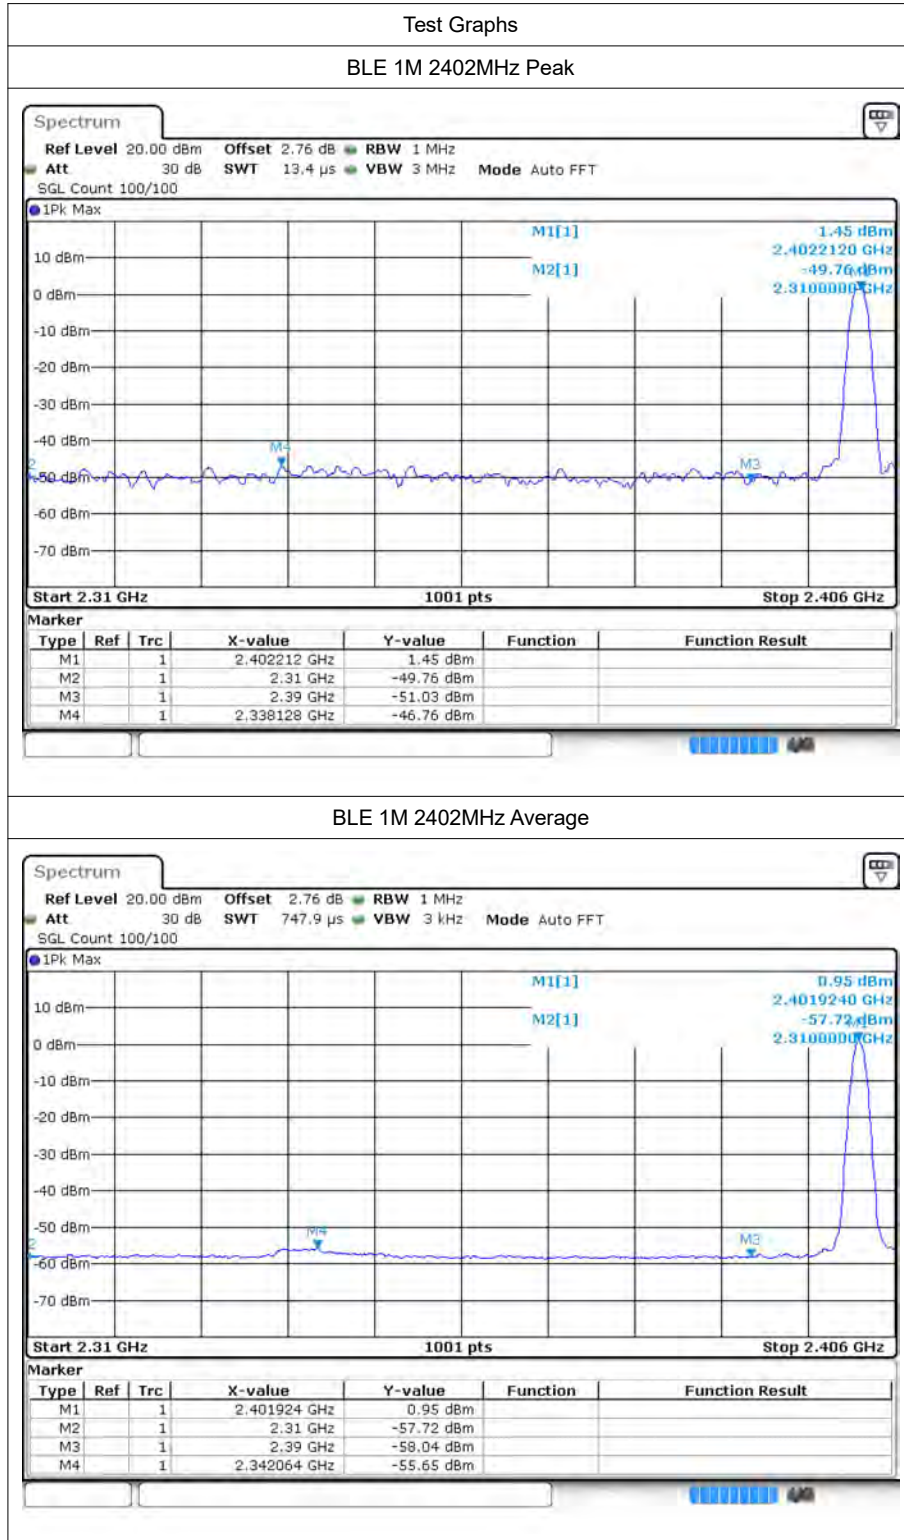

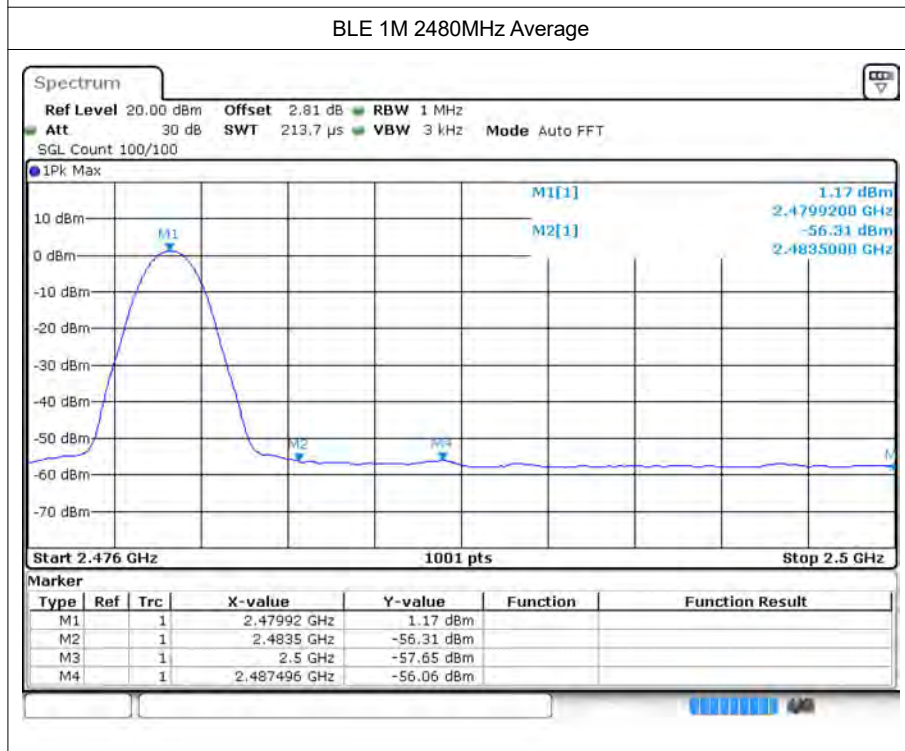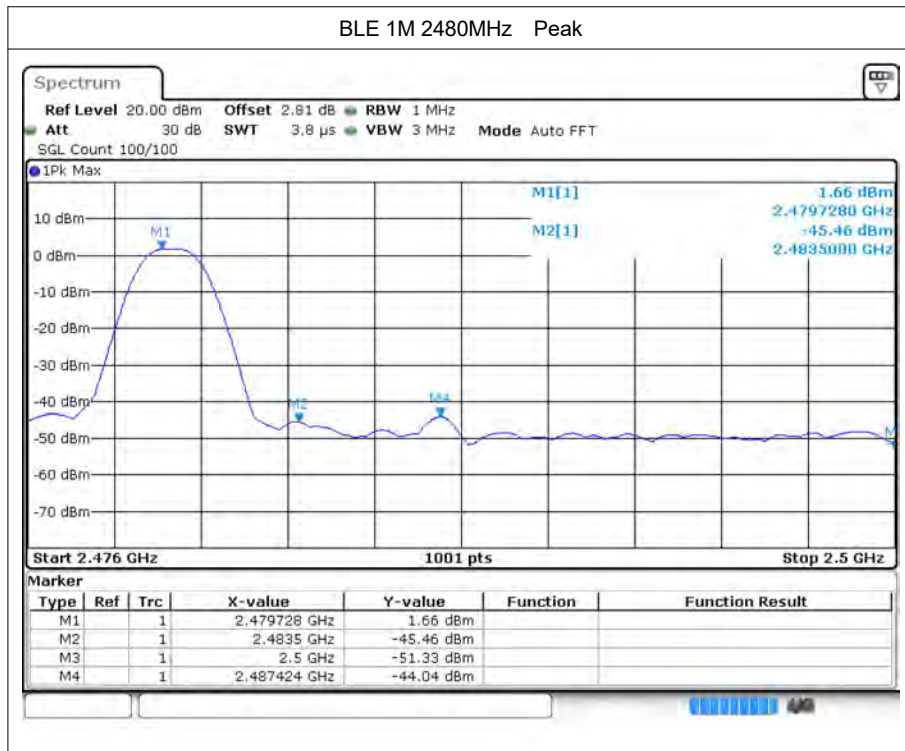

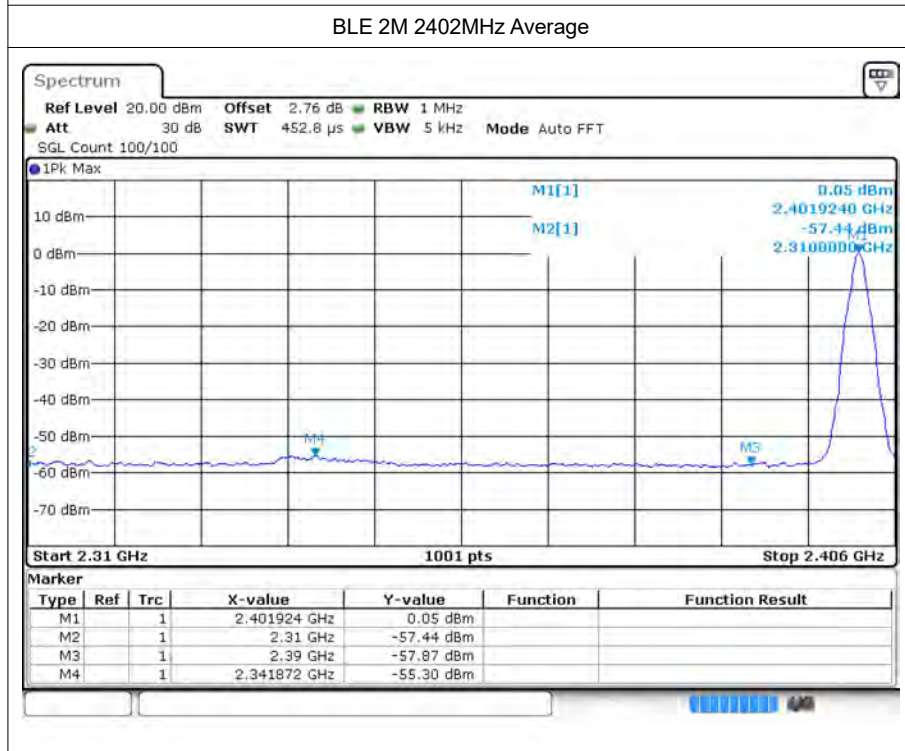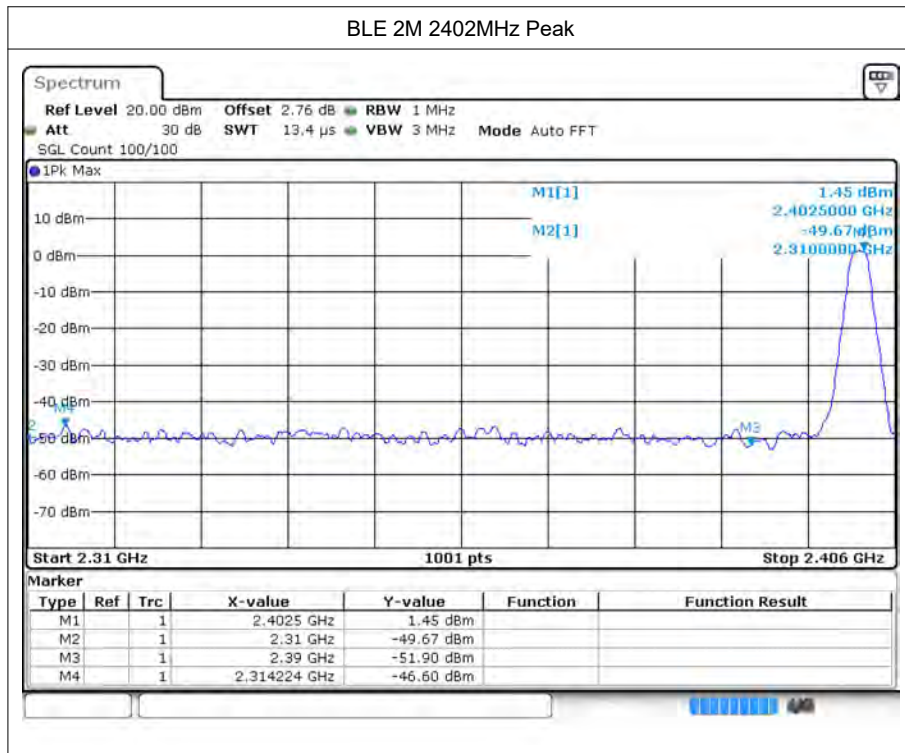



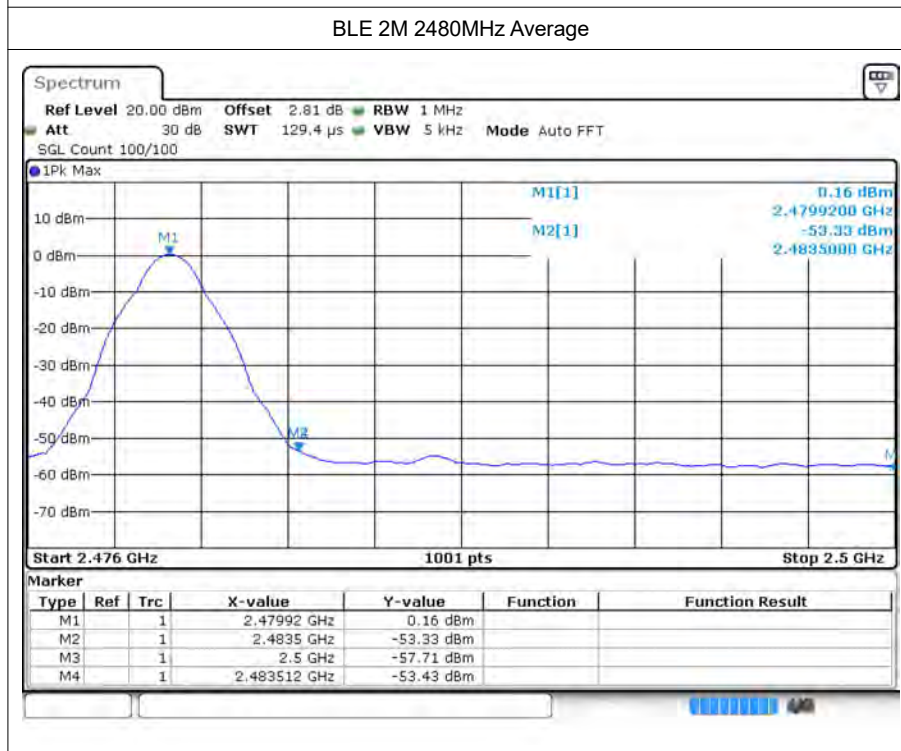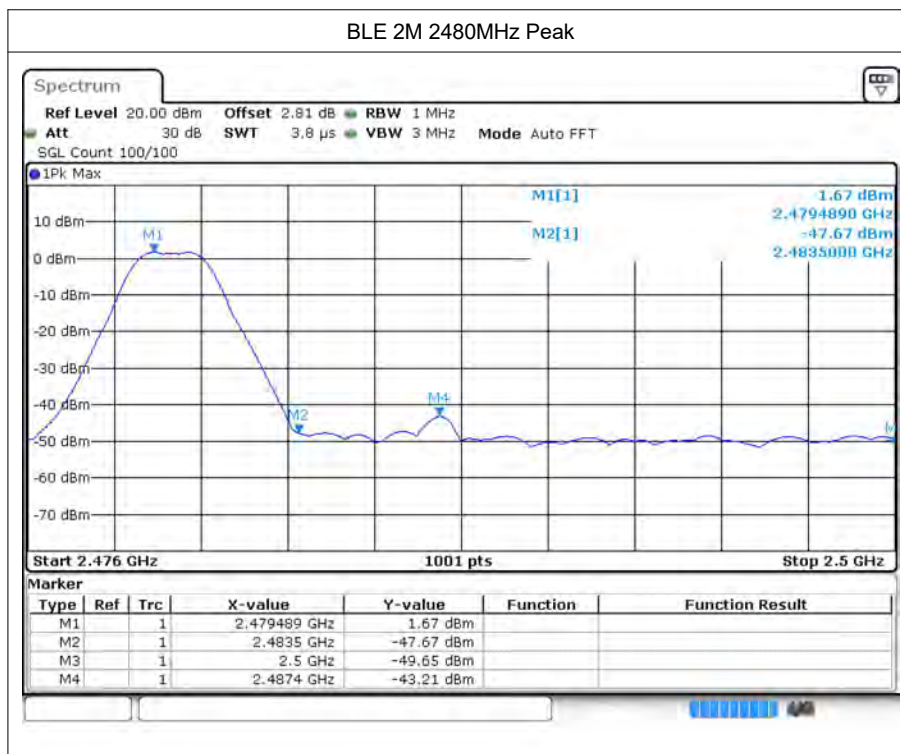

---The End---