


Label and location



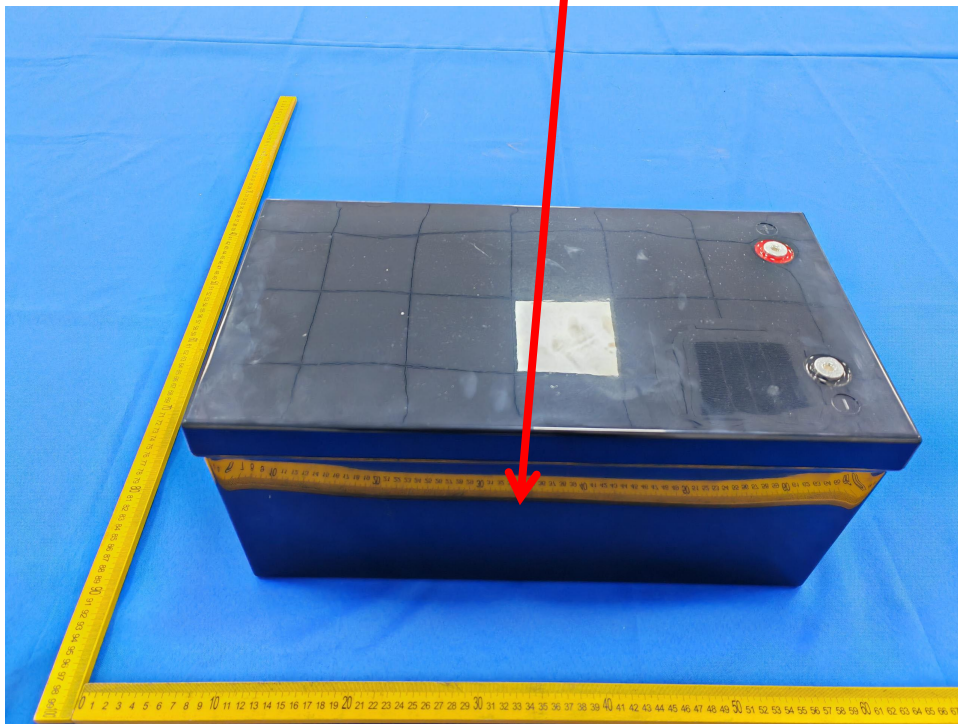

51.2V 100Ah | 5120Wh | LTCP Low Temperature Charging Protection

Li Time

DO NOT

- Open, disassemble, or modify the battery.
- Puncture, drop, crush, burn, penetrate, shake, or strike the battery.
- Heat the battery above 158°F / 70°C.
- Expose metal terminals or connectors.
- Touch the exposed electrolyte or powder if the battery casing is damaged.

CAUTION

Risk of fire and burns. Improper use of the battery can lead to battery failure or other potential damage.


www.litime.com

service@litime.com



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.

Made in China

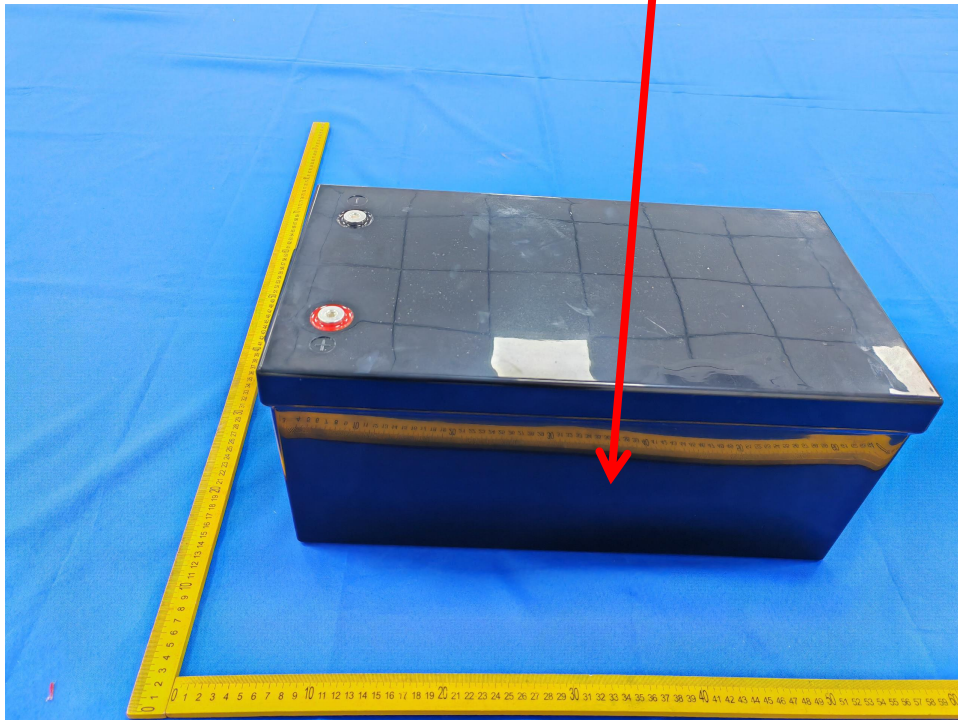

Li Time **51.2V 100Ah**
GC Smart Edition

Nominal Voltage	51.2V
Rated Capacity	100Ah
Rated Energy	5120Wh
Charging Voltage	57.6V±0.8V
Max Continuous Charge/Discharge Current	100A
Max. Continuous Output Power	5120W

FCC ID: 2BDSV-512V100

CE FC

Download LiTime APP

Li Time

Download on the App Store

GET IT ON Google Play



BLUETOOTH 5.0

www.litime.com

service@litime.com

