

FCC Radio Test Report

FCC ID: 2BDWL2417250

Report No. : BTL-FCCP-1-2407E004
Equipment : TELUS Outdoor Camera
Model Name : OCF
Brand Name : TELUS
Applicant : TELUS Communications Inc.
Address : 7th Floor,510 West Georgia Street,Vancouver, BC,V6B0M3 Canada

Radio Function : Bluetooth Low Energy (5.0)


FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2024/8/12
Date of Test : 2024/8/13 ~ 2024/9/4
Issued Date : 2024/9/6

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by :

Poken Huang, Engineer

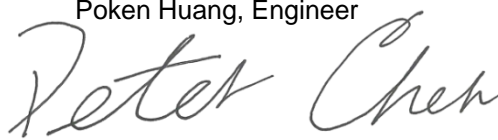Approved by :

Peter Chen, Manager

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

| | |
|--|----|
| REVISION HISTORY | 5 |
| 1 SUMMARY OF TEST RESULTS | 6 |
| 1.1 TEST FACILITY | 7 |
| 1.2 MEASUREMENT UNCERTAINTY | 7 |
| 1.3 TEST ENVIRONMENT CONDITIONS | 7 |
| 1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING | 8 |
| 2 GENERAL INFORMATION | 9 |
| 2.1 DESCRIPTION OF EUT | 9 |
| 2.2 TEST MODES | 11 |
| 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 12 |
| 2.4 SUPPORT UNITS | 13 |
| 3 AC POWER LINE CONDUCTED EMISSIONS TEST | 14 |
| 3.1 LIMIT | 14 |
| 3.2 TEST PROCEDURE | 14 |
| 3.3 DEVIATION FROM TEST STANDARD | 14 |
| 3.4 TEST SETUP | 15 |
| 3.5 TEST RESULT | 15 |
| 4 RADIATED EMISSIONS TEST | 16 |
| 4.1 LIMIT | 16 |
| 4.2 TEST PROCEDURE | 17 |
| 4.3 DEVIATION FROM TEST STANDARD | 17 |
| 4.4 TEST SETUP | 18 |
| 4.5 EUT OPERATING CONDITIONS | 19 |
| 4.6 TEST RESULT – BELOW 30 MHZ | 19 |
| 4.7 TEST RESULT – 30 MHZ TO 1 GHZ | 19 |
| 4.8 TEST RESULT – ABOVE 1 GHZ | 19 |
| 5 BANDWIDTH TEST | 20 |
| 5.1 APPLIED PROCEDURES / LIMIT | 20 |
| 5.2 TEST PROCEDURE | 20 |
| 5.3 DEVIATION FROM STANDARD | 20 |
| 5.4 TEST SETUP | 20 |
| 5.5 EUT OPERATION CONDITIONS | 20 |
| 5.6 TEST RESULTS | 20 |
| 6 MAXIMUM OUTPUT POWER TEST | 21 |
| 6.1 APPLIED PROCEDURES / LIMIT | 21 |
| 6.2 TEST PROCEDURE | 21 |
| 6.3 DEVIATION FROM STANDARD | 21 |
| 6.4 TEST SETUP | 21 |
| 6.5 EUT OPERATION CONDITIONS | 21 |
| 6.6 TEST RESULTS | 21 |
| 7 POWER SPECTRAL DENSITY TEST | 22 |
| 7.1 APPLIED PROCEDURES / LIMIT | 22 |
| 7.2 TEST PROCEDURE | 22 |
| 7.3 DEVIATION FROM STANDARD | 22 |
| 7.4 TEST SETUP | 22 |
| 7.5 EUT OPERATION CONDITIONS | 22 |
| 7.6 TEST RESULTS | 22 |

| | | |
|------------|--------------------------------------|----|
| 8 | ANTENNA CONDUCTED SPURIOUS EMISSION | 23 |
| 8.1 | APPLIED PROCEDURES / LIMIT | 23 |
| 8.2 | TEST PROCEDURE | 23 |
| 8.3 | DEVIATION FROM STANDARD | 23 |
| 8.4 | TEST SETUP | 23 |
| 8.5 | EUT OPERATION CONDITIONS | 23 |
| 8.6 | TEST RESULTS | 23 |
| 9 | LIST OF MEASURING EQUIPMENTS | 24 |
| 10 | EUT TEST PHOTO | 26 |
| 11 | EUT PHOTOS | 26 |
| APPENDIX A | AC POWER LINE CONDUCTED EMISSIONS | 27 |
| APPENDIX B | RADIATED EMISSIONS - 30 MHZ TO 1 GHZ | 30 |
| APPENDIX C | RADIATED EMISSIONS - ABOVE 1 GHZ | 33 |
| APPENDIX D | BANDWIDTH | 52 |
| APPENDIX E | MAXIMUM OUTPUT POWER | 55 |
| APPENDIX F | POWER SPECTRAL DENSITY TEST | 57 |
| APPENDIX G | ANTENNA CONDUCTED SPURIOUS EMISSION | 59 |

REVISION HISTORY

| Report No. | Version | Description | Issued Date | Note |
|---------------------|---------|------------------|-------------|-------|
| BTL-FCCP-1-2407E004 | R00 | Original Report. | 2024/9/6 | Valid |

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

| Standard(s) Section | Description | Test Result | Judgement | Remark |
|-------------------------------|-------------------------------------|--------------------------|-----------|-----------------|
| 15.207 | AC Power Line Conducted Emissions | APPENDIX A | Pass | ----- |
| 15.205 15.209 15.247(d) | Radiated Emissions | APPENDIX B APPENDIX C | Pass | ----- |
| 15.247(a)(2) | Bandwidth | APPENDIX D | Pass | ----- |
| 15.247(b)(3) | Maximum Output Power | APPENDIX E | Pass | ----- |
| 15.247(e) | Power Spectral Density | APPENDIX F | Pass | ----- |
| 15.247(d) | Antenna conducted Spurious Emission | APPENDIX G | Pass | ----- |
| 15.203 | Antenna Requirement | ----- | Pass | NOTE (3) |

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) The device what use replaceable antennas with non-standard interfaces are considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

(FCC DN: TW0659)

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

CB21 C06

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | U (dB) |
|-----------|--------|-----------------------------|--------|
| C06 | CISPR | 150 kHz ~ 30MHz | 2.4498 |

B. Radiated emissions test:

| Test Site | Measurement Frequency Range | U, (dB) |
|-----------|-----------------------------|---------|
| CB21 | 0.03 GHz ~ 0.2 GHz | 4.17 |
| | 0.2 GHz ~ 1 GHz | 4.72 |
| | 1 GHz ~ 6 GHz | 5.20 |
| | 6 GHz ~ 18 GHz | 5.50 |
| | 18 GHz ~ 26 GHz | 3.69 |
| | 26 GHz ~ 40 GHz | 4.23 |

C. Conducted test:

| Test Item | U, (dB) |
|------------------------------|---------|
| Occupied Bandwidth | 0.53 |
| Maximum Output Power | 0.37 |
| Power Spectral Density | 0.66 |
| Conducted Spurious emissions | 0.53 |
| Conducted Band edges | 0.53 |

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS




| Test Item | Environment Condition | Test Voltage | Tested by |
|-------------------------------------|-----------------------|--------------|-----------|
| AC Power Line Conducted Emissions | 25°C, 45% | AC 120V | Ken Lu |
| Radiated emissions below 1 GHz | 26°C, 59% | AC 120V | Ken Lu |
| Radiated emissions above 1 GHz | 26°C, 61% | AC 120V | Ken Lu |
| Bandwidth | 25°C, 69% | AC 120V | Cai Hu |
| Maximum Output Power | 25°C, 69% | AC 120V | Cai Hu |
| Power Spectral Density | 25°C, 69% | AC 120V | Cai Hu |
| Antenna conducted Spurious Emission | 25°C, 69% | AC 120V | Cai Hu |

1.4 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

| Test Software | IPOP_V4.0 | | | |
|-----------------|-----------|----------|----------|-----------|
| Modulation Mode | 2402 MHz | 2440 MHz | 2480 MHz | Data Rate |
| 1 Mbps | DEF | DEF | DEF | 1 Mbps |
| 2 Mbps | DEF | DEF | DEF | 2 Mbps |

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

| | |
|-----------------------|--|
| Equipment | TELUS Outdoor Camera |
| Brand Name | TELUS |
| Model Name | OCF |
| Model Difference(s) | N/A |
| Hardware Version | DVT |
| Software Version | v0.03.511 |
| Power Source | DC voltage supplied from AC adapter. Model: DSA-20PDB FUS |
| Power Rating | I/P: 100-240V 50/60Hz 0.6A O/P: +5.0V  3.0A, +9.0V  2.22A, +12.0V  1.66A |
| Operation Band | 2400 MHz ~ 2483.5 MHz |
| Operation Frequency | 2402 MHz ~ 2480 MHz |
| Modulation Technology | GFSK |
| Transfer Rate | 1Mbps, 2Mbps |
| Output Power Max. | 2Mbps: 5.68 dBm (0.0037 W) |

NOTE:

- (1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 00 | 2402 | 20 | 2442 |
| 01 | 2404 | 21 | 2444 |
| 02 | 2406 | 22 | 2446 |
| 03 | 2408 | 23 | 2448 |
| 04 | 2410 | 24 | 2450 |
| 05 | 2412 | 25 | 2452 |
| 06 | 2414 | 26 | 2454 |
| 07 | 2416 | 27 | 2456 |
| 08 | 2418 | 28 | 2458 |
| 09 | 2420 | 29 | 2460 |
| 10 | 2422 | 30 | 2462 |
| 11 | 2424 | 31 | 2464 |
| 12 | 2426 | 32 | 2466 |
| 13 | 2428 | 33 | 2468 |
| 14 | 2430 | 34 | 2470 |
| 15 | 2432 | 35 | 2472 |
| 16 | 2434 | 36 | 2474 |
| 17 | 2436 | 37 | 2476 |
| 18 | 2438 | 38 | 2478 |
| 19 | 2440 | 39 | 2480 |

(3) Table for Filed Antenna:

| Ant. | Manufacturer | P/N | Type | Connector | Gain (dBi) |
|------|----------------------|------------------|------|-----------|------------|
| Main | FIT Hon Teng Limited | ANTP2M1-CZZ27-EH | PIFA | N/A | 3.35 |

(4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 TEST MODES

| Test Items | Test mode | Channel | Note |
|--|-----------|----------|----------|
| AC power line conducted emissions | Normal | - | - |
| Transmitter Radiated Emissions (below 1GHz) | 2 Mbps | 39 | - |
| Transmitter Radiated Emissions (above 1GHz) | 1/2 Mbps | 00/39 | Bandedge |
| | 1/2 Mbps | 00/19/39 | Harmonic |
| Bandwidth | 1/2 Mbps | 00/19/39 | - |
| Maximum Output Power | 1/2 Mbps | 00/19/39 | - |
| Power Spectral Density | 1/2 Mbps | 00/19/39 | - |
| Antenna conducted Spurious Emission | 1/2 Mbps | 00/19/39 | - |


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emissions below 1 GHz test, the 2 Mbps channel 39 is found to be the worst case and recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

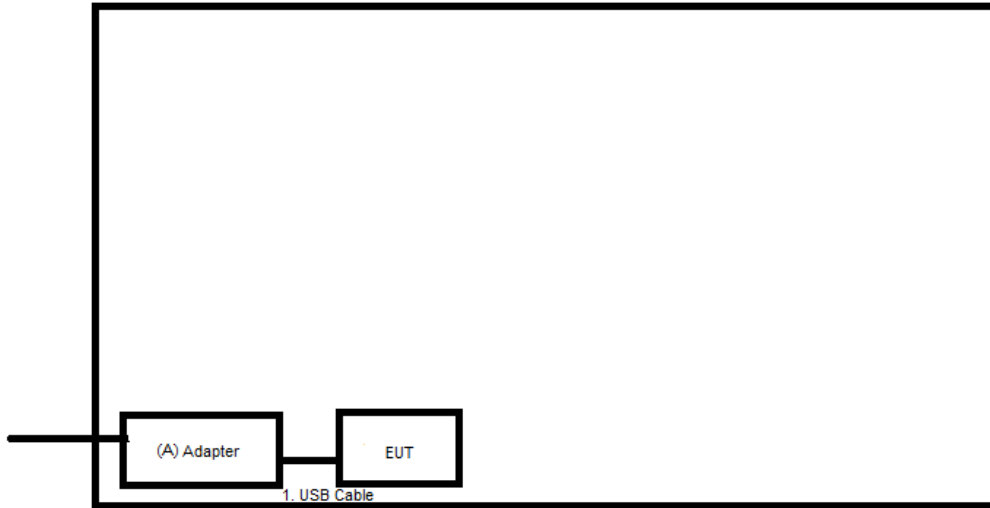

Radiated Emissions

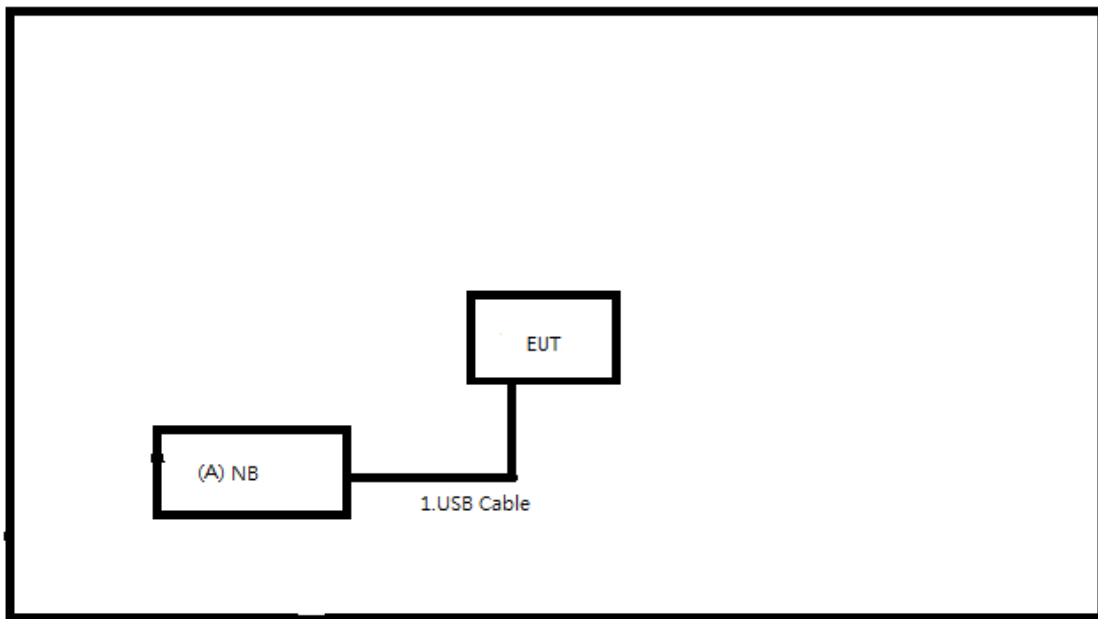

2.4 SUPPORT UNITS**AC power line conducted emissions**

| Item | Equipment | Brand | Model No. | Series No. | Remarks |
|------|-----------|-------|---------------|------------|-----------------------------|
| A | Adapter | N/A | DSA-20PDB-FUS | N/A | Supplied by test requester. |

| Item | Shielded | Ferrite Core | Length | Cable Type | Remarks |
|------|-----------|--------------|--------|------------|-----------------------------|
| 1 | USB Cable | N | N | 3m | Supplied by test requester. |

Radiated Emissions

| Item | Equipment | Brand | Model No. | Series No. | Remarks |
|------|-----------|--------|---------------------|------------|------------------------|
| A | Notebook | Lenovo | ThinkBook 14 G4 IAP | MP28KHAH | Furnished by test lab. |

| Item | Shielded | Ferrite Core | Length | Cable Type | Remarks |
|------|-----------|--------------|--------|------------|-----------------------------|
| 1 | USB Cable | N | N | 3m | Supplied by test requester. |

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

| Frequency (MHz) | Limit (dB μ V) | |
|-----------------|--------------------|-----------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 * | 56 - 46 * |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

| | | | | |
|---------------|---|----------------|---|-------------------|
| Reading Level | | Correct Factor | | Measurement Value |
| 38.22 | + | 3.45 | = | 41.67 |

| | | | | |
|-------------------|---|-------------|---|--------------|
| Measurement Value | | Limit Value | | Margin Level |
| 41.67 | - | 60 | = | -18.33 |

The following table is the setting of the receiver.

| Receiver Parameter | Setting |
|--------------------|----------|
| Attenuation | 10 dB |
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 KHz |

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

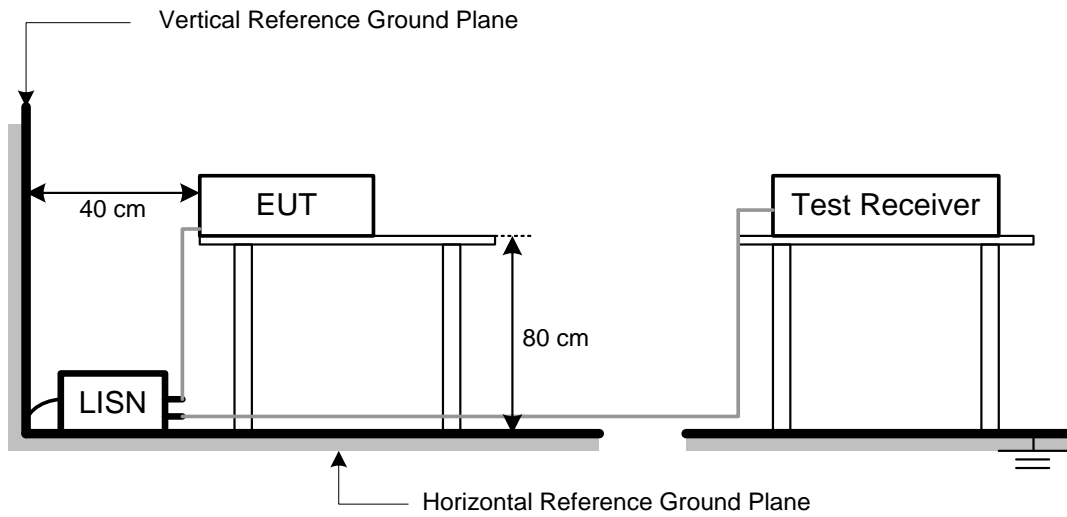

3.5 TEST RESULT

Please refer to the **APPENDIX A**.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |

LIMITS OF RADIATED EMISSIONS MEASUREMENT (Above 1000 MHz)

| Frequency (MHz) | Radiated Emissions (dBuV/m) | | Measurement Distance (meters) |
|-----------------|-----------------------------|---------|-------------------------------|
| | Peak | Average | |
| Above 1000 | 74 | 54 | 3 |

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value
 Calculation example:

| | | | | |
|---------------|---|----------------|---|-------------------|
| Reading Level | | Correct Factor | | Measurement Value |
| 41.91 | + | -8.36 | = | 33.55 |

| | | | | |
|-------------------|---|-------------|---|--------------|
| Measurement Value | | Limit Value | | Margin Level |
| 33.55 | - | 43.50 | = | -9.95 |

| Spectrum Parameter | Setting |
|--|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RBW / VBW (Emission in restricted band) | 1MHz / 3MHz for Peak, 1MHz / 1/T for Average |

| Spectrum Parameter | Setting |
|------------------------|-----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9KHz~90KHz for PK/AVG detector |
| Start ~ Stop Frequency | 90KHz~110KHz for QP detector |
| Start ~ Stop Frequency | 110KHz~490KHz for PK/AVG detector |
| Start ~ Stop Frequency | 490KHz~30MHz for QP detector |
| Start ~ Stop Frequency | 30MHz~1000MHz for QP detector |

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

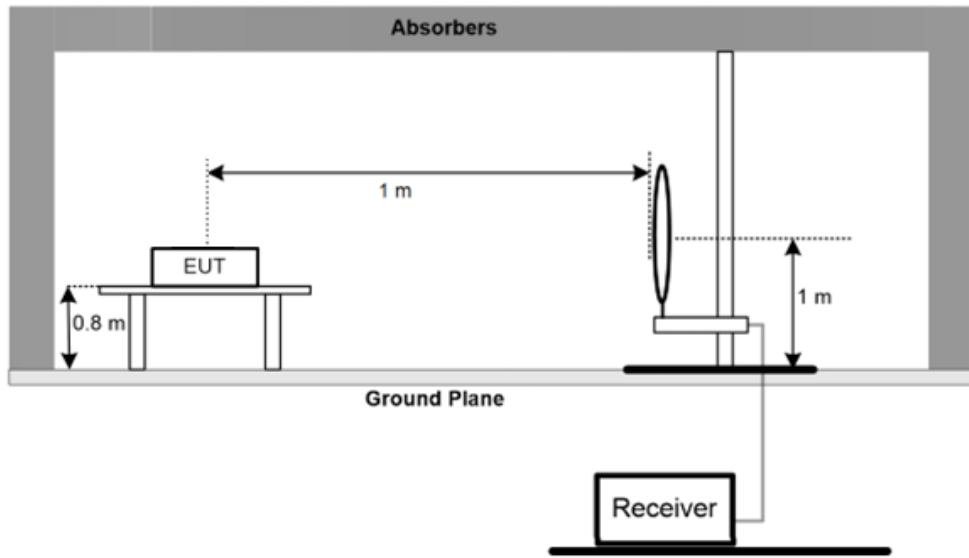

30 MHz to 1 GHz

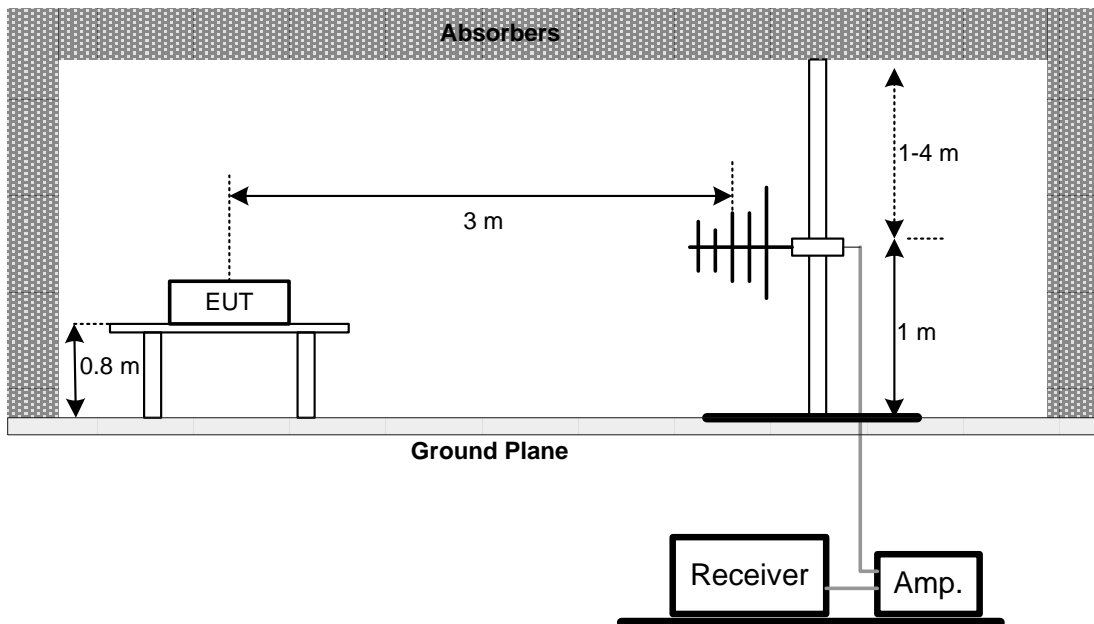

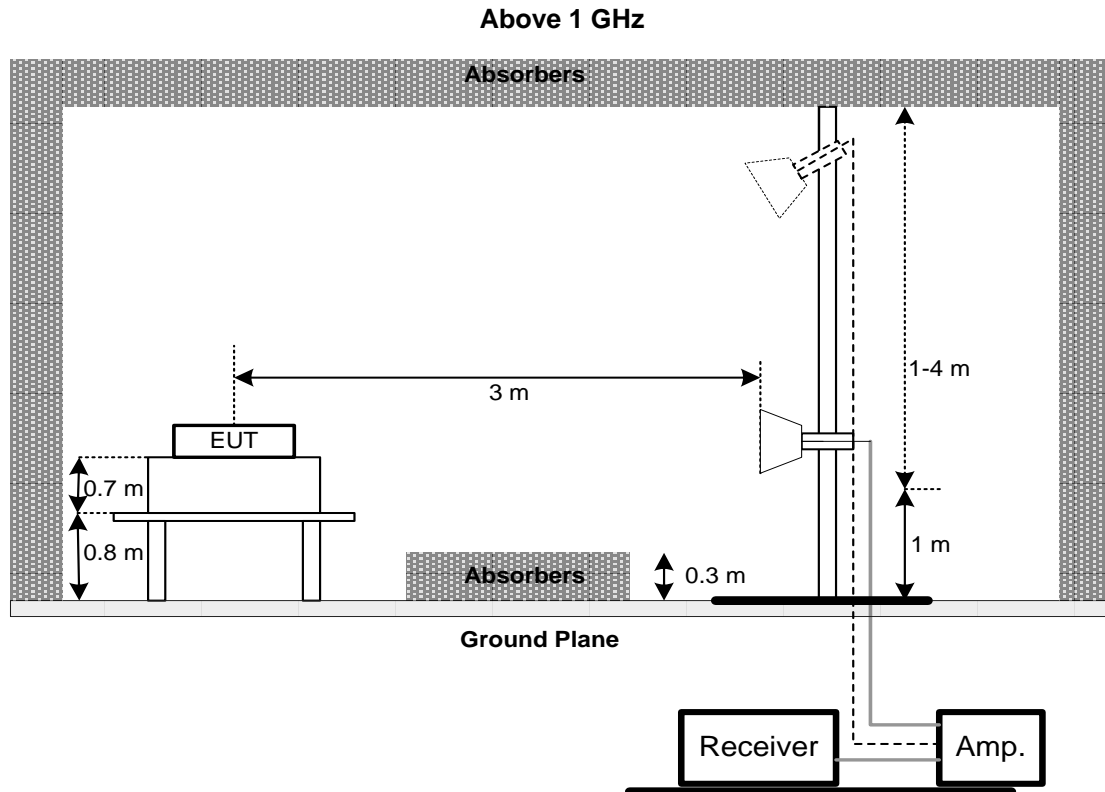

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – BELOW 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable. For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

| Section | Test Item | Limit |
|--------------|----------------|---------|
| 15.247(a)(2) | 6 dB Bandwidth | 500 kHz |


5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

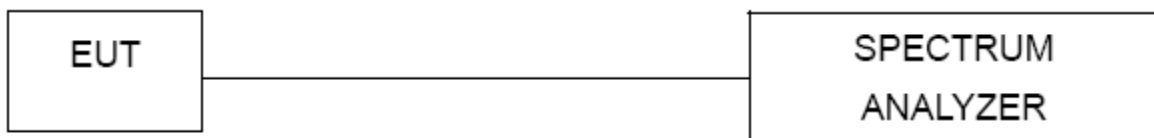

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6 MAXIMUM OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

| Section | Test Item | Limit |
|--------------|----------------------|-----------------|
| 15.247(b)(3) | Maximum Output Power | 1 Watt or 30dBm |


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. The maximum peak conducted output power was performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY TEST

7.1 APPLIED PROCEDURES / LIMIT

| Section | Test Item | Limit |
|-----------|------------------------|-------------------------|
| 15.247(e) | Power Spectral Density | 8 dBm (in any 3 kHz) |


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

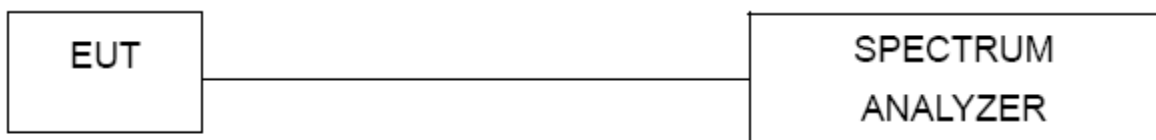

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8 ANTENNA CONDUCTED SPURIOUS EMISSION

8.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9 LIST OF MEASURING EQUIPMENTS

| AC Power Line Conducted Emissions | | | | | | |
|-----------------------------------|----------------------|--------------|--------------------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Two-Line V-Network | R&S | ENV216 | 101051 | 2024/6/26 | 2025/6/25 |
| 2 | Test Cable | EMCI | EMCRG58-BM-BM-9000 | 210501 | 2023/12/11 | 2024/12/10 |
| 3 | EMC Receiver | Keysight | N9038A | MY54130009 | 2024/6/27 | 2025/6/26 |
| 4 | Measurement Software | Farad | EZ EMC (Ver. NB-03A1-01) | N/A | N/A | N/A |

| Radiated Emissions Below 1GHz | | | | | | |
|-------------------------------|-----------------------|--------------|--------------------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Log-bicon Antenna | Schwarzbeck | VULB9168 | 1369 | 2024/6/14 | 2025/6/13 |
| 2 | EXA Spectrum Analyzer | keysight | N9020B | MY57120120 | 2024/2/23 | 2025/2/22 |
| 3 | Pre-Amplifier | EMCI | EMC330N | 980850 | 2023/9/6 | 2024/9/5 |
| 4 | Test Cable | EMCI | EMC104-SM-1000 | 180809 | 2024/3/8 | 2025/3/8 |
| 5 | Test Cable | EMCI | EMC104-SM-SM-3000 | 220322 | 2024/3/8 | 2025/3/8 |
| 6 | Test Cable | EMCI | EMC104-SM-SM-7000 | 220324 | 2024/3/8 | 2025/3/8 |
| 7 | Measurement Software | Farad | EZ EMC (Ver. NB-03A1-01) | N/A | N/A | N/A |

| Radiated Emissions Above 1 GHz | | | | | | |
|--------------------------------|-----------------------|--------------|--------------------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Pre-Amplifier | EMCI | EMC118A45SE | 980819 | 2024/3/6 | 2025/3/5 |
| 2 | Test Cable | EMCI | EMC104-SM-1000 | 180809 | 2024/3/8 | 2025/3/8 |
| 3 | Test Cable | EMCI | EMC104-SM-SM-3000 | 220322 | 2024/3/8 | 2025/3/8 |
| 4 | Test Cable | EMCI | EMC104-SM-SM-7000 | 220324 | 2024/3/8 | 2025/3/8 |
| 5 | Horn Ant | Schwarzbeck | BBHA 9170D | 1136 | 2024/5/17 | 2025/5/17 |
| 6 | Pre-Amplifier | EMCI | EMC184045SE | 980907 | 2023/9/21 | 2024/9/20 |
| 7 | Test Cable | EMCI | EMC101G-KM-KM-3000 | 220329 | 2024/3/13 | 2025/3/13 |
| 8 | Test Cable | EMCI | EMC102-KM-KM-1000 | 220327 | 2024/3/13 | 2025/3/13 |
| 9 | EXA Spectrum Analyzer | keysight | N9020B | MY57120120 | 2024/2/23 | 2025/2/22 |
| 10 | Measurement Software | Farad | EZ EMC (Ver. NB-03A1-01) | N/A | N/A | N/A |

| Bandwidth | | | | | | |
|-----------|--------------------|--------------|------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Spectrum Analyzer | R&S | FSP 30 | 100854 | 2024/6/27 | 2025/6/26 |
| 2 | 10dbAttenuator | INMET | AHC-10dB | 1 | N/A | N/A |
| 3 | BTL-Conducred Test | N/A | 1247788684 | N/A | N/A | N/A |

| Maximum Output Power | | | | | | |
|----------------------|--------------------|--------------|------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Spectrum Analyzer | R&S | FSP 30 | 100854 | 2024/6/27 | 2025/6/26 |
| 2 | 10dbAttenuator | INMET | AHC-10dB | 1 | N/A | N/A |
| 3 | BTL-Conducred Test | N/A | 1247788684 | N/A | N/A | N/A |

| Power Spectral Density | | | | | | |
|------------------------|--------------------|--------------|------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Spectrum Analyzer | R&S | FSP 30 | 100854 | 2024/6/27 | 2025/6/26 |
| 2 | 10dbAttenuator | INMET | AHC-10dB | 1 | N/A | N/A |
| 3 | BTL-Conducred Test | N/A | 1247788684 | N/A | N/A | N/A |

| Antenna conducted Spurious Emission | | | | | | |
|-------------------------------------|--------------------|--------------|------------|------------|-----------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated Date | Calibrated Until |
| 1 | Spectrum Analyzer | R&S | FSP 30 | 100854 | 2024/6/27 | 2025/6/26 |
| 2 | 10dbAttenuator | INMET | AHC-10dB | 1 | N/A | N/A |
| 3 | BTL-Conducred Test | N/A | 1247788684 | N/A | N/A | N/A |

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

10 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2407E004-FCCP-1 (APPENDIX-TEST PHOTOS).

11 EUT PHOTOS

Please refer to document Appendix No.: EP-2407E004-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

| | | | |
|----------------|--------|-------------|-----------|
| Test Mode | Normal | Tested Date | 2024/8/14 |
| Test Frequency | - | Phase | Line |

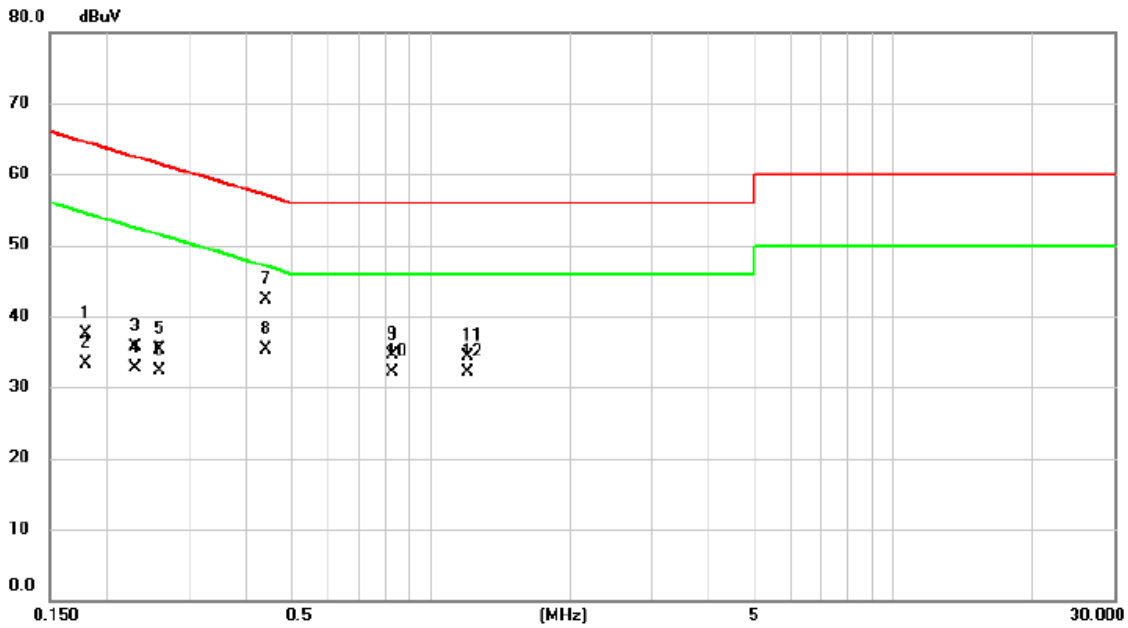


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | | |
| 1 | | 0.1790 | 27.85 | 9.64 | 37.49 | 64.53 | -27.04 | QP | |
| 2 | | 0.1790 | 23.67 | 9.64 | 33.31 | 54.53 | -21.22 | AVG | |
| 3 | | 0.2298 | 26.12 | 9.64 | 35.76 | 62.46 | -26.70 | QP | |
| 4 | | 0.2298 | 23.04 | 9.64 | 32.68 | 52.46 | -19.78 | AVG | |
| 5 | | 0.2602 | 25.62 | 9.64 | 35.26 | 61.43 | -26.17 | QP | |
| 6 | | 0.2602 | 22.76 | 9.64 | 32.40 | 51.43 | -19.03 | AVG | |
| 7 | | 0.4398 | 32.73 | 9.66 | 42.39 | 57.07 | -14.68 | QP | |
| 8 | * | 0.4398 | 25.71 | 9.66 | 35.37 | 47.07 | -11.70 | AVG | |
| 9 | | 0.8285 | 24.85 | 9.69 | 34.54 | 56.00 | -21.46 | QP | |
| 10 | | 0.8285 | 22.33 | 9.69 | 32.02 | 46.00 | -13.98 | AVG | |
| 11 | | 1.1975 | 24.55 | 9.72 | 34.27 | 56.00 | -21.73 | QP | |
| 12 | | 1.1975 | 22.30 | 9.72 | 32.02 | 46.00 | -13.98 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|--------|-------------|-----------|
| Test Mode | Normal | Tested Date | 2024/8/14 |
| Test Frequency | - | Phase | Neutral |

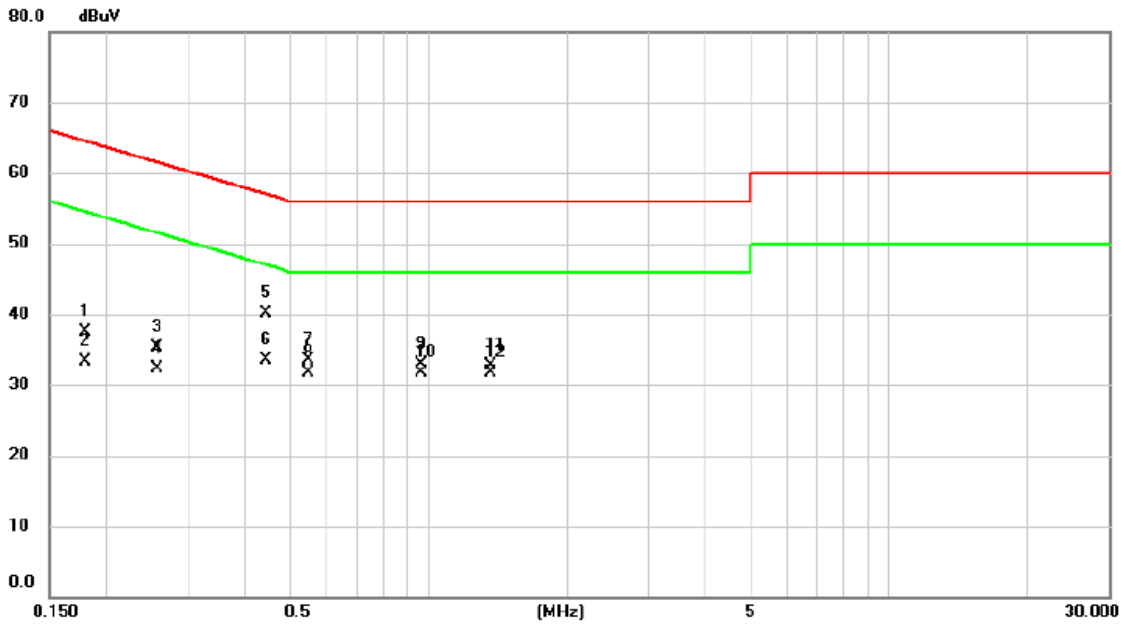


| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measurement dBuV | Limit dBuV | Margin dB | Detector | Comment |
|---------|-----------|--------------------|-------------------|------------------|------------|-----------|----------|---------|
| 1 | 0.1801 | 27.82 | 9.63 | 37.45 | 64.48 | -27.03 | QP | |
| 2 | 0.1801 | 23.67 | 9.63 | 33.30 | 54.48 | -21.18 | AVG | |
| 3 | 0.2574 | 25.60 | 9.63 | 35.23 | 61.51 | -26.28 | QP | |
| 4 | 0.2574 | 22.77 | 9.63 | 32.40 | 51.51 | -19.11 | AVG | |
| 5 | 0.4430 | 30.55 | 9.64 | 40.19 | 57.01 | -16.82 | QP | |
| 6 * | 0.4430 | 23.96 | 9.64 | 33.60 | 47.01 | -13.41 | AVG | |
| 7 | 0.5495 | 23.77 | 9.64 | 33.41 | 56.00 | -22.59 | QP | |
| 8 | 0.5495 | 22.09 | 9.64 | 31.73 | 46.00 | -14.27 | AVG | |
| 9 | 0.9635 | 23.30 | 9.69 | 32.99 | 56.00 | -23.01 | QP | |
| 10 | 0.9635 | 22.11 | 9.69 | 31.80 | 46.00 | -14.20 | AVG | |
| 11 | 1.3640 | 22.94 | 9.72 | 32.66 | 56.00 | -23.34 | QP | |
| 12 | 1.3640 | 21.90 | 9.72 | 31.62 | 46.00 | -14.38 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

| | | | |
|----------------|-----------------|--------------|-----------|
| Test Mode | BLE 5.0 (2Mbps) | Test Date | 2024/8/27 |
| Test Frequency | CH39: 2480 MHz | Polarization | Vertical |

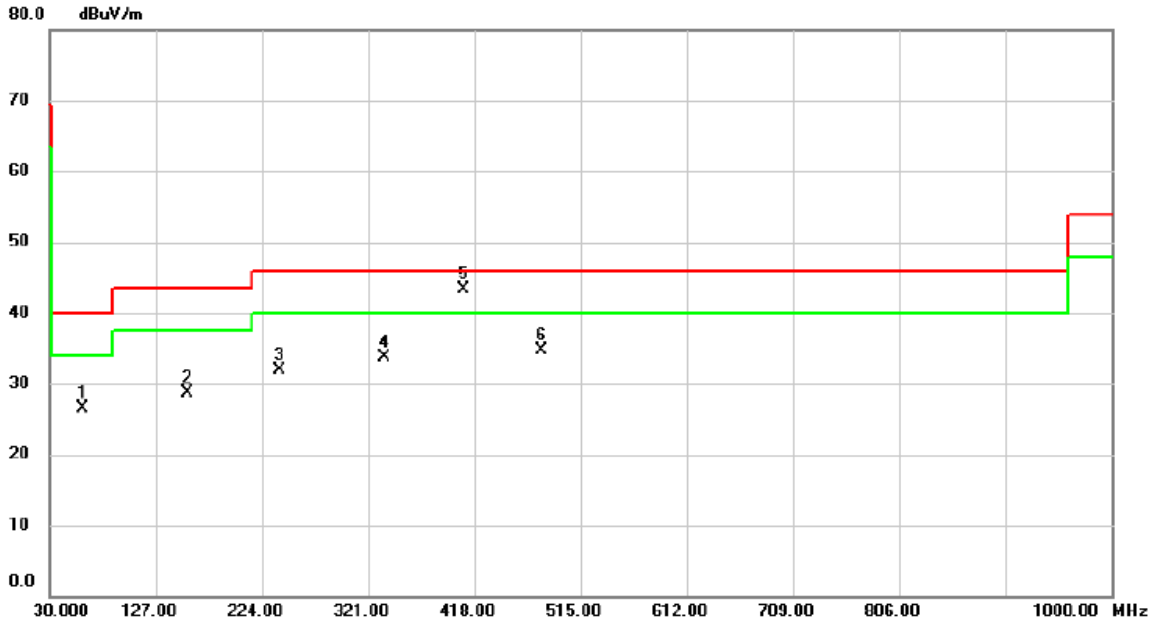


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 60.3286 | 38.78 | -12.35 | 26.43 | 40.00 | -13.57 | peak | |
| 2 | | 156.6496 | 40.54 | -11.91 | 28.63 | 43.50 | -14.87 | peak | |
| 3 | | 240.0373 | 45.52 | -13.60 | 31.92 | 46.00 | -14.08 | peak | |
| 4 | | 335.9703 | 44.47 | -10.71 | 33.76 | 46.00 | -12.24 | peak | |
| 5 | * | 408.3645 | 52.07 | -8.72 | 43.35 | 46.00 | -2.65 | peak | |
| 6 | | 480.0153 | 41.75 | -6.96 | 34.79 | 46.00 | -11.21 | peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|-----------------|--------------|------------|
| Test Mode | BLE 5.0 (2Mbps) | Test Date | 2024/8/27 |
| Test Frequency | CH39: 2480 MHz | Polarization | Horizontal |

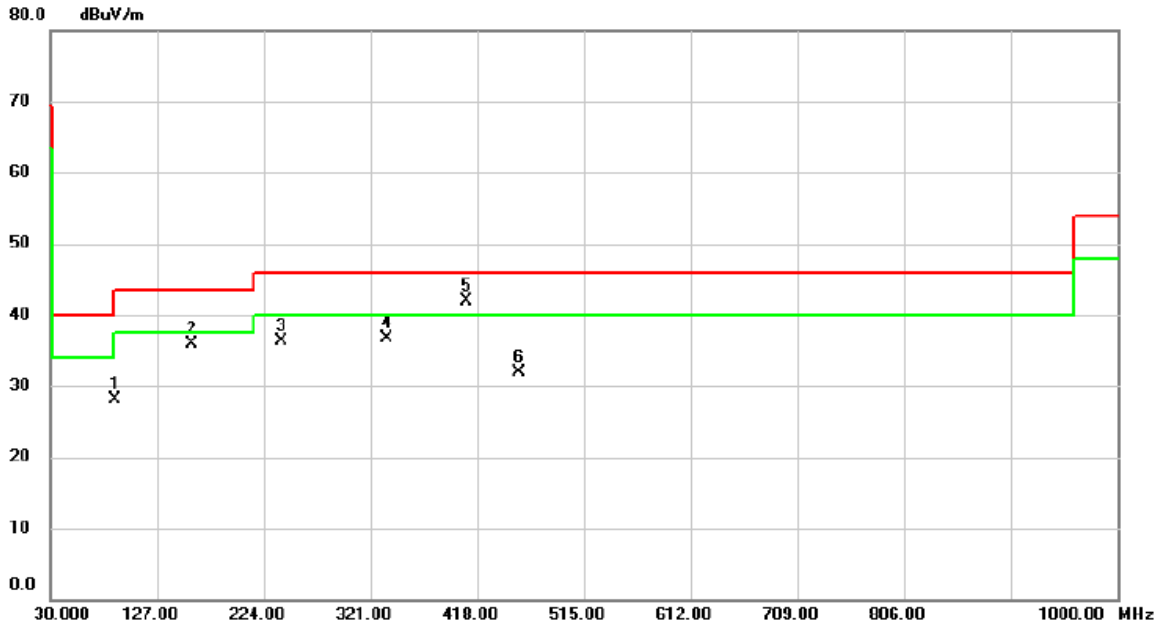


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 88.5233 | 45.96 | -17.94 | 28.02 | 43.50 | -15.48 | peak | |
| 2 | | 158.1046 | 47.90 | -11.91 | 35.99 | 43.50 | -7.51 | peak | |
| 3 | | 240.0050 | 49.98 | -13.60 | 36.38 | 46.00 | -9.62 | peak | |
| 4 | | 336.0026 | 47.38 | -10.71 | 36.67 | 46.00 | -9.33 | peak | |
| 5 | * | 408.3970 | 50.62 | -8.71 | 41.91 | 46.00 | -4.09 | peak | |
| 6 | | 455.9916 | 39.18 | -7.31 | 31.87 | 46.00 | -14.13 | peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2402MHz | Polarization | Horizontal |

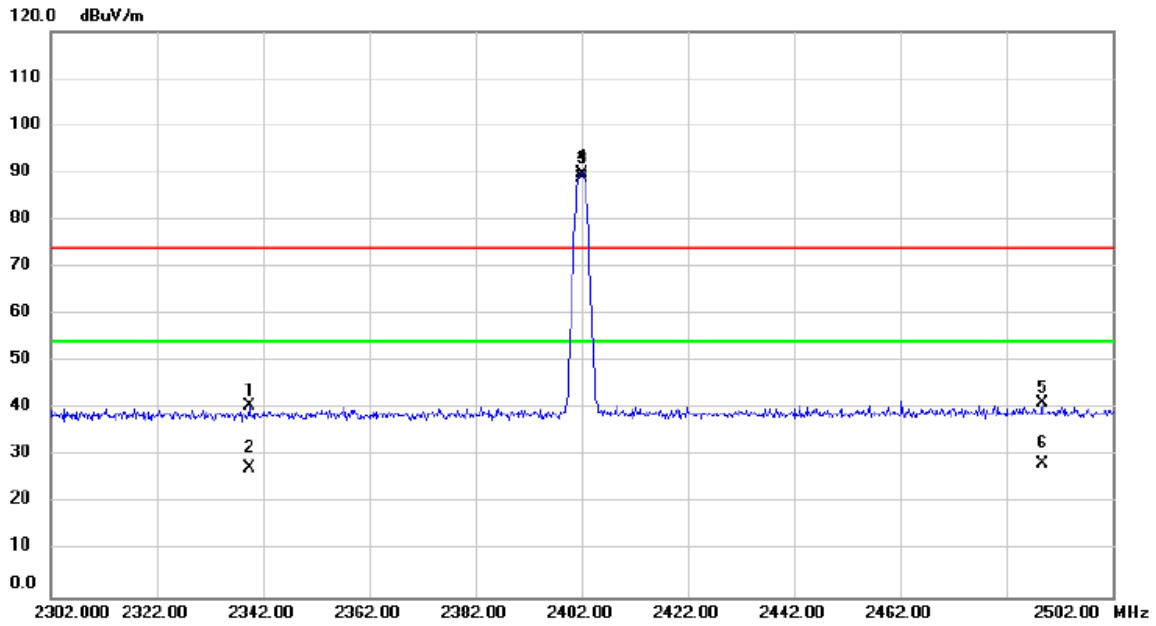


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|----------|
| 1 | | 2339.400 | 46.24 | -5.63 | 40.61 | 74.00 | -33.39 | peak | |
| 2 | | 2339.400 | 33.21 | -5.63 | 27.58 | 54.00 | -26.42 | AVG | |
| 3 | X | 2402.000 | 95.42 | -5.51 | 89.91 | 74.00 | 15.91 | peak | No Limit |
| 4 | * | 2402.000 | 94.38 | -5.51 | 88.87 | 54.00 | 34.87 | AVG | No Limit |
| 5 | | 2488.800 | 46.45 | -5.33 | 41.12 | 74.00 | -32.88 | peak | |
| 6 | | 2488.800 | 33.72 | -5.33 | 28.39 | 54.00 | -25.61 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Horizontal |

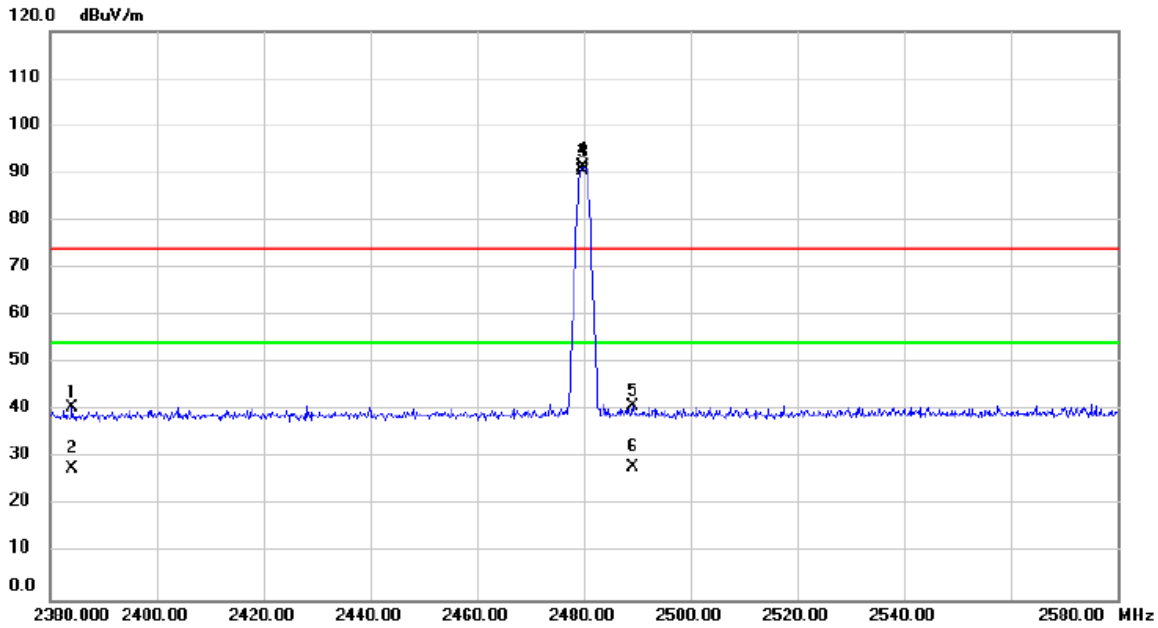


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|----------|
| 1 | | 2384.200 | 46.09 | -5.54 | 40.55 | 74.00 | -33.45 | peak | |
| 2 | | 2384.200 | 33.27 | -5.54 | 27.73 | 54.00 | -26.27 | AVG | |
| 3 | X | 2479.800 | 96.78 | -5.34 | 91.44 | 74.00 | 17.44 | peak | No Limit |
| 4 | * | 2479.800 | 95.73 | -5.34 | 90.39 | 54.00 | 36.39 | AVG | No Limit |
| 5 | | 2489.200 | 46.42 | -5.33 | 41.09 | 74.00 | -32.91 | peak | |
| 6 | | 2489.200 | 33.51 | -5.33 | 28.18 | 54.00 | -25.82 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2402MHz | Polarization | Horizontal |

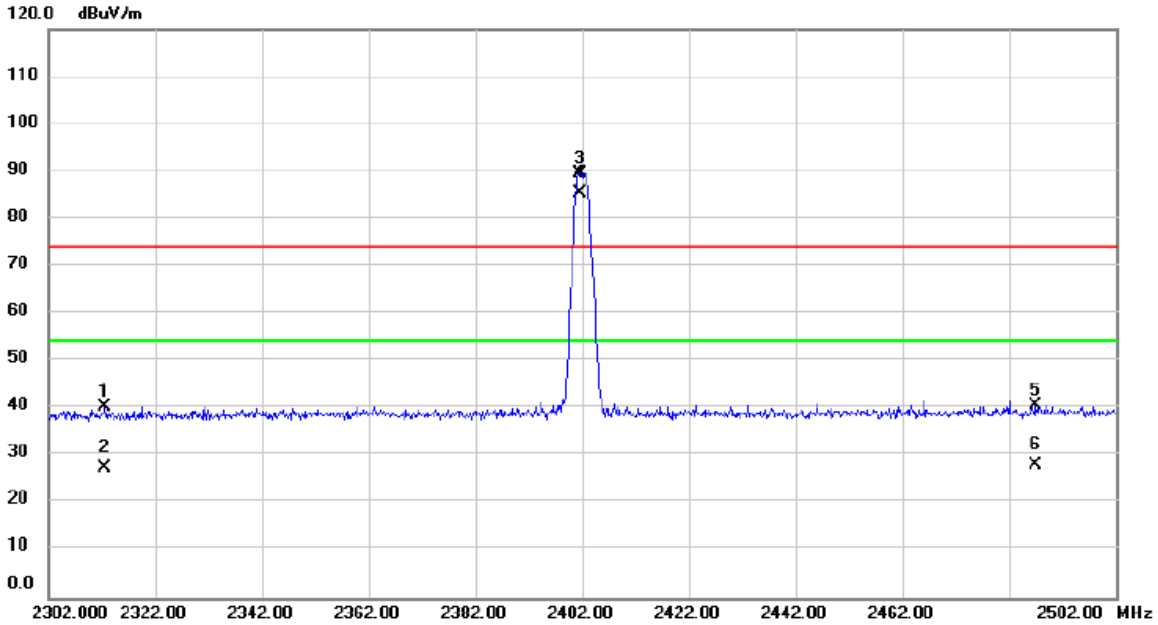


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|----------|
| 1 | | 2312.600 | 46.17 | -5.69 | 40.48 | 74.00 | -33.52 | peak | |
| 2 | | 2312.600 | 33.26 | -5.69 | 27.57 | 54.00 | -26.43 | AVG | |
| 3 | X | 2401.600 | 95.19 | -5.51 | 89.68 | 74.00 | 15.68 | peak | No Limit |
| 4 | * | 2401.600 | 90.99 | -5.51 | 85.48 | 54.00 | 31.48 | AVG | No Limit |
| 5 | | 2487.000 | 45.90 | -5.33 | 40.57 | 74.00 | -33.43 | peak | |
| 6 | | 2487.000 | 33.52 | -5.33 | 28.19 | 54.00 | -25.81 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Horizontal |

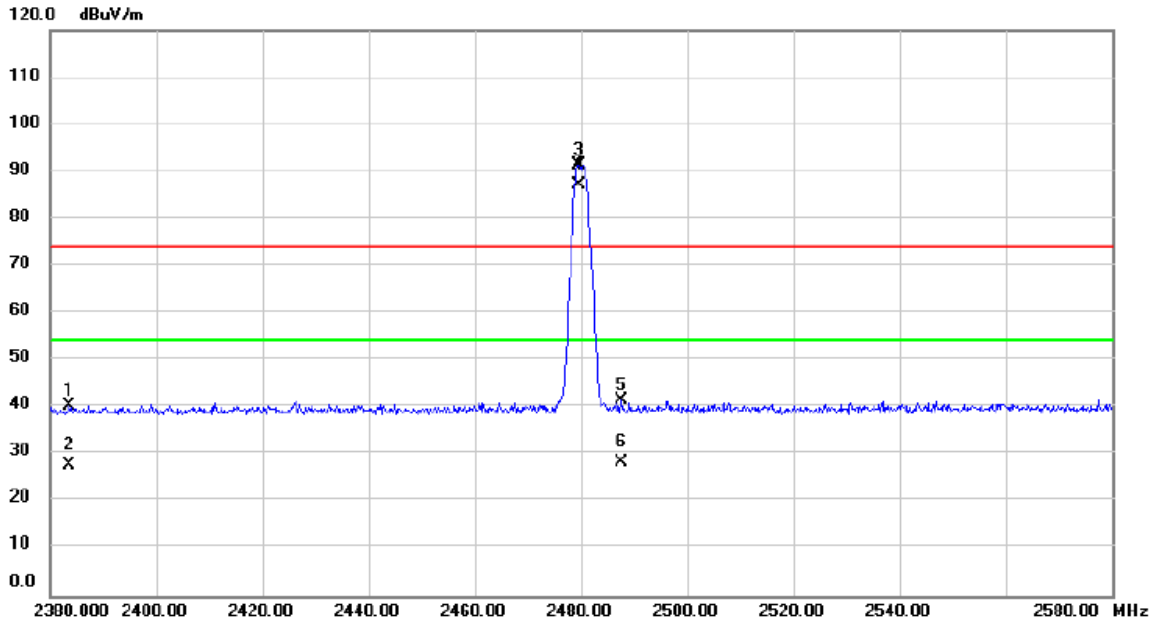


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|----------|
| 1 | | 2383.600 | 46.00 | -5.53 | 40.47 | 74.00 | -33.53 | peak | |
| 2 | | 2383.600 | 33.29 | -5.53 | 27.76 | 54.00 | -26.24 | AVG | |
| 3 | X | 2479.600 | 96.67 | -5.34 | 91.33 | 74.00 | 17.33 | peak | No Limit |
| 4 | * | 2479.600 | 92.41 | -5.34 | 87.07 | 54.00 | 33.07 | AVG | No Limit |
| 5 | | 2487.600 | 46.79 | -5.33 | 41.46 | 74.00 | -32.54 | peak | |
| 6 | | 2487.600 | 33.58 | -5.33 | 28.25 | 54.00 | -25.75 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|-----------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2402MHz | Polarization | Vertical |

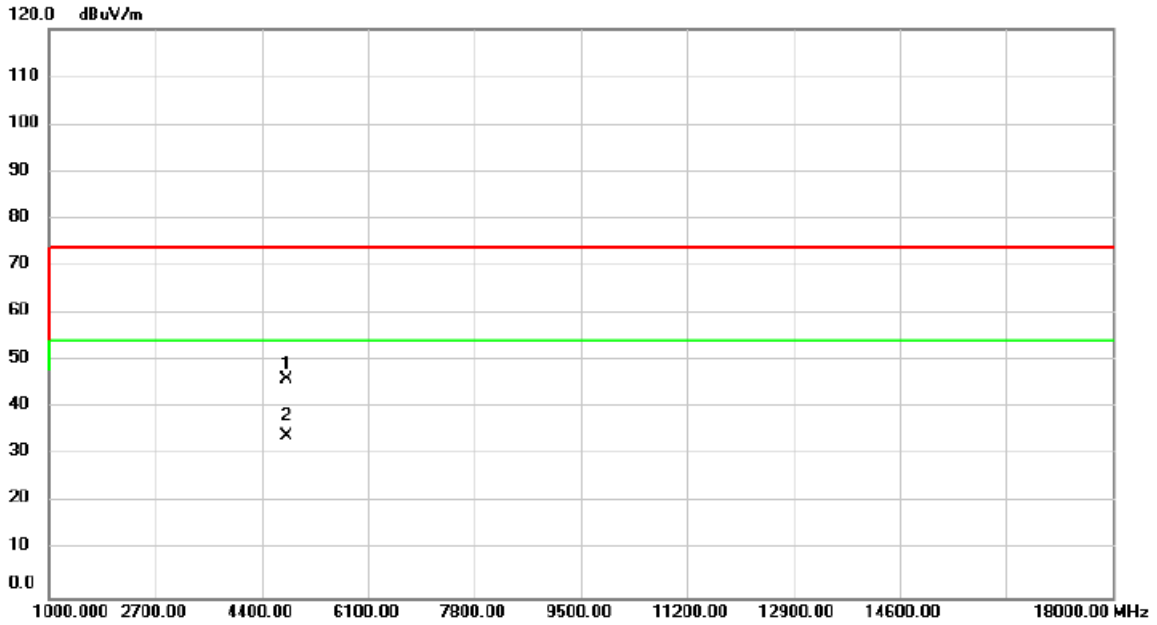


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4804.000 | 45.21 | 0.88 | 46.09 | 74.00 | -27.91 | peak | |
| 2 | * | 4804.000 | 33.09 | 0.88 | 33.97 | 54.00 | -20.03 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2402MHz | Polarization | Horizontal |

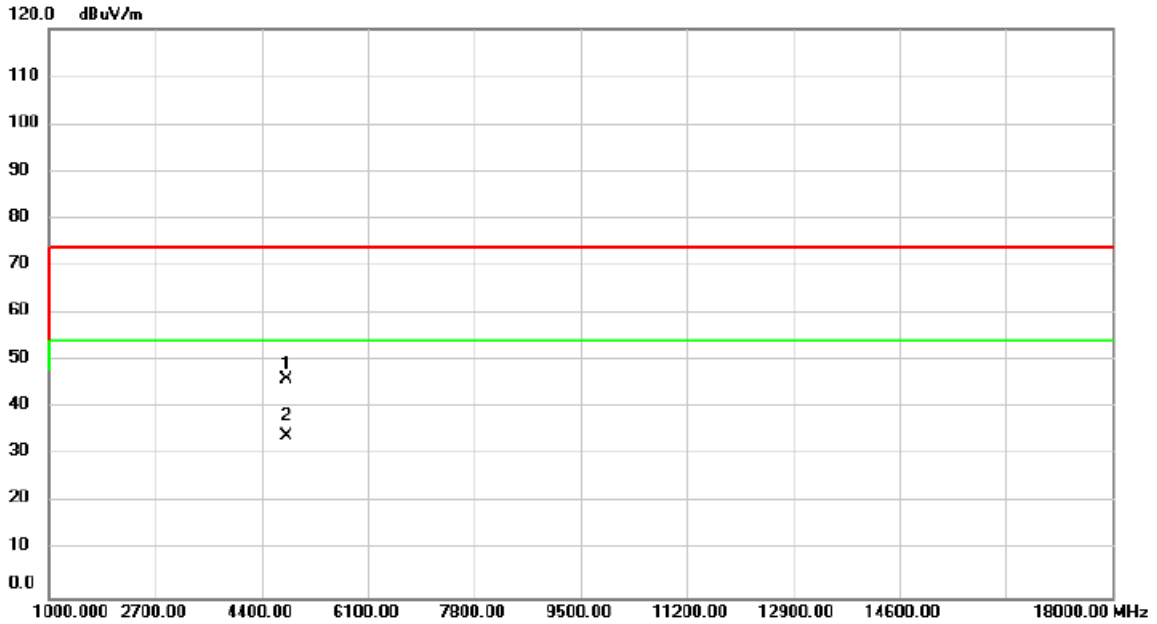


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4804.000 | 45.11 | 0.88 | 45.99 | 74.00 | -28.01 | peak | |
| 2 | * | 4804.000 | 33.16 | 0.88 | 34.04 | 54.00 | -19.96 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|-----------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2440MHz | Polarization | Vertical |

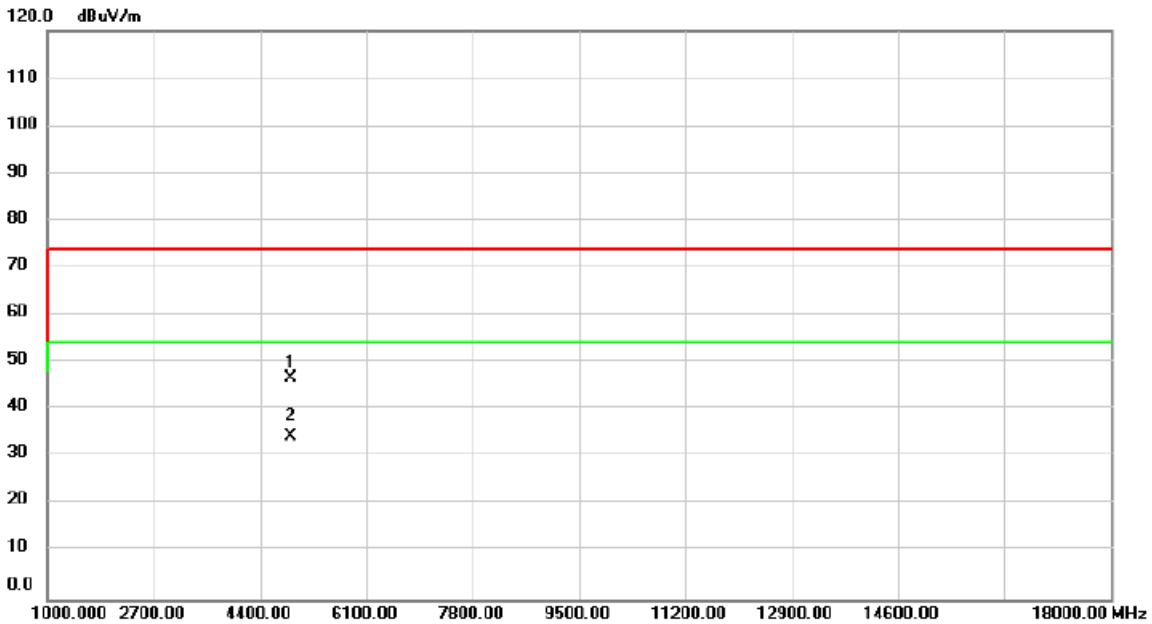


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4880.000 | 45.63 | 1.03 | 46.66 | 74.00 | -27.34 | peak | |
| 2 | * | 4880.000 | 33.31 | 1.03 | 34.34 | 54.00 | -19.66 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2440MHz | Polarization | Horizontal |

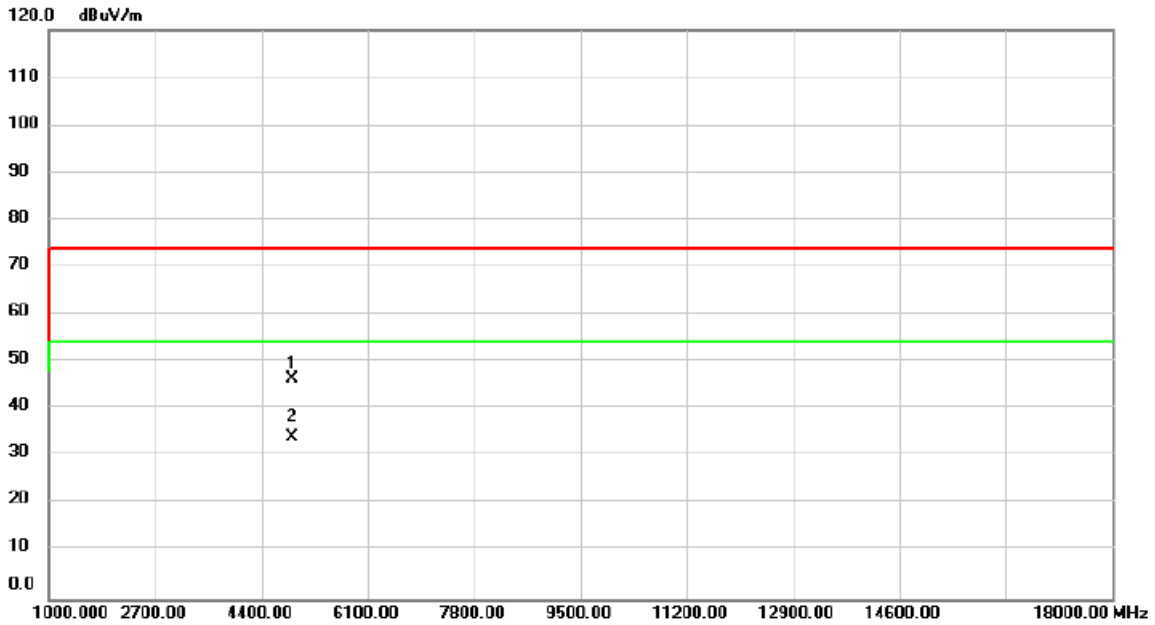


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4880.000 | 45.34 | 1.03 | 46.37 | 74.00 | -27.63 | peak | |
| 2 | * | 4880.000 | 33.15 | 1.03 | 34.18 | 54.00 | -19.82 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|-----------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Vertical |

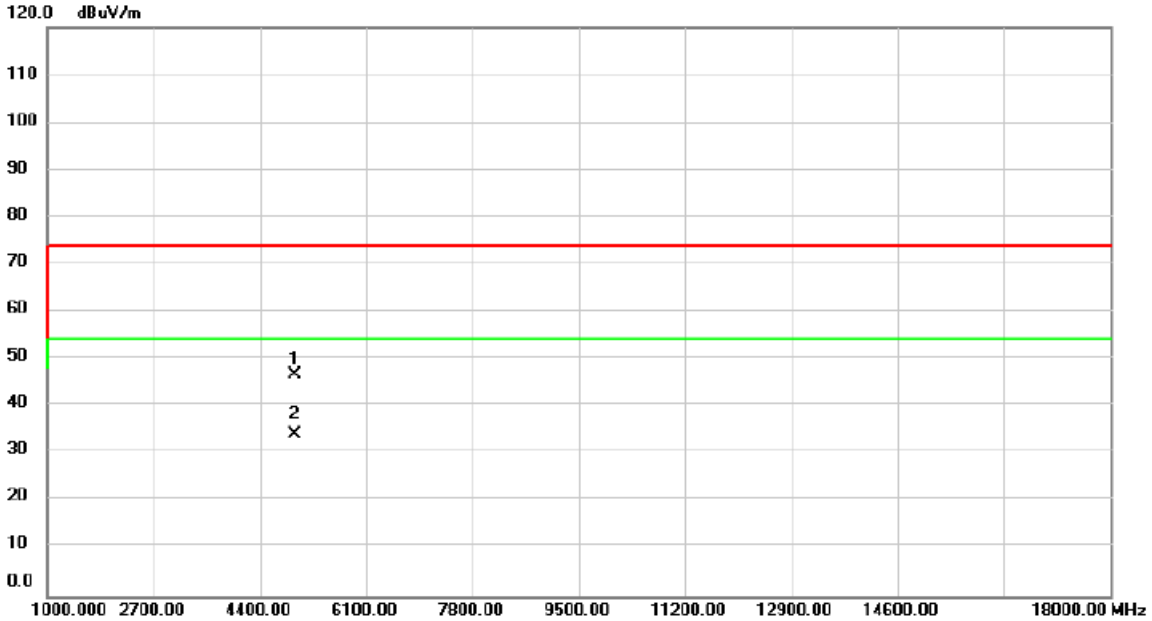


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4960.000 | 45.43 | 1.21 | 46.64 | 74.00 | -27.36 | peak | |
| 2 | * | 4960.000 | 32.80 | 1.21 | 34.01 | 54.00 | -19.99 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (1 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Horizontal |

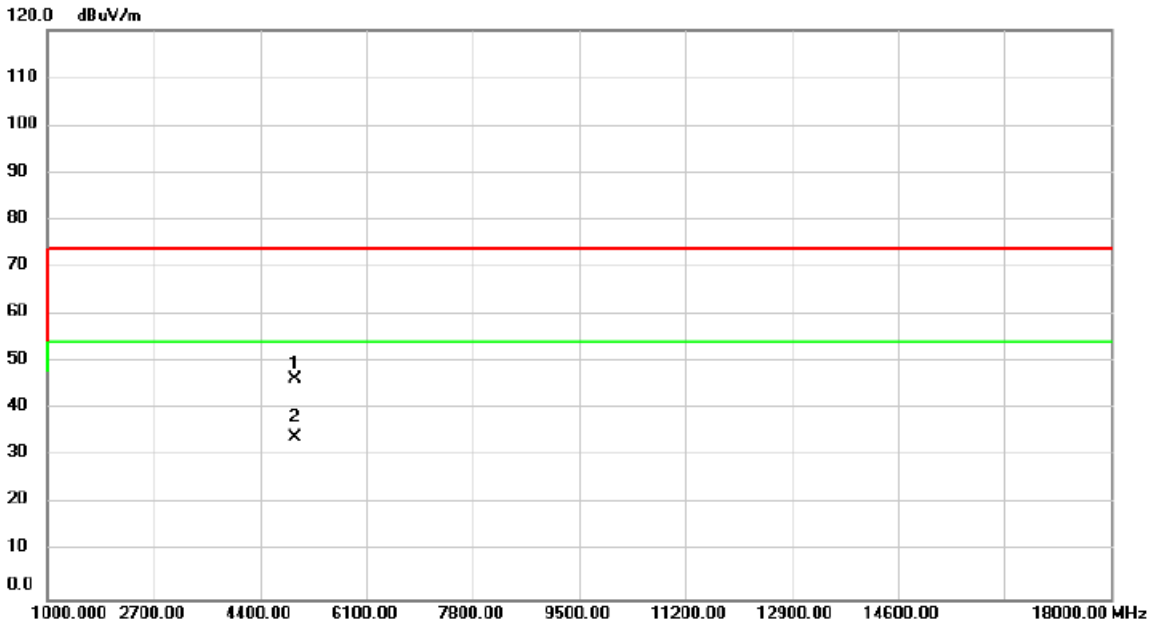


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4960.000 | 45.02 | 1.21 | 46.23 | 74.00 | -27.77 | peak | |
| 2 | * | 4960.000 | 32.92 | 1.21 | 34.13 | 54.00 | -19.87 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|-----------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2402MHz | Polarization | Vertical |

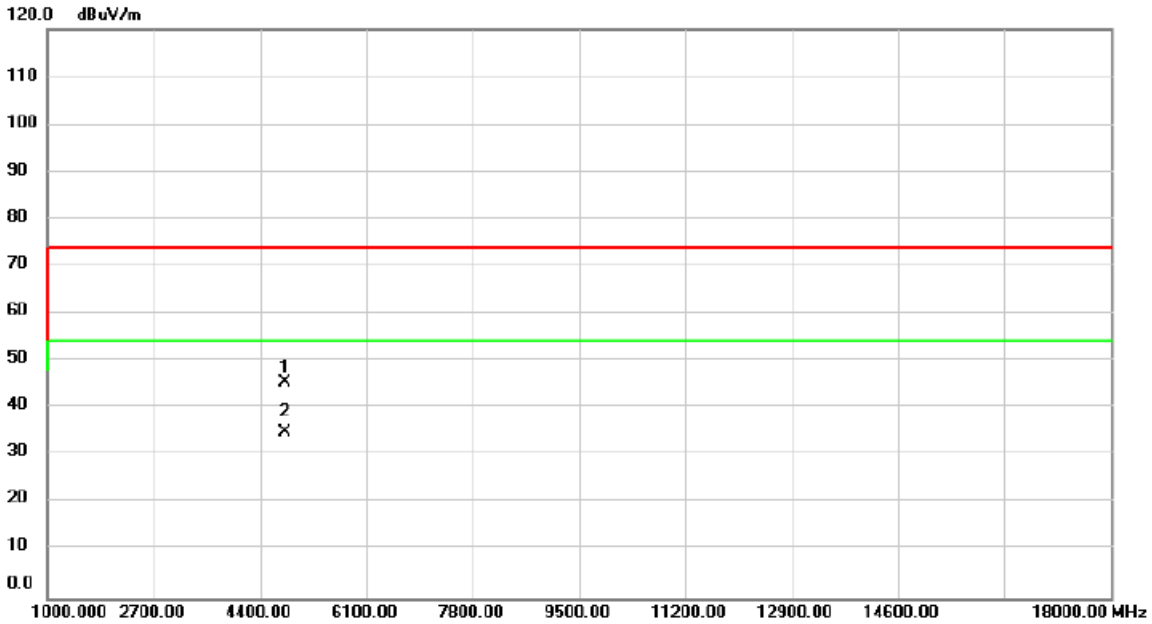


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4804.000 | 44.67 | 0.88 | 45.55 | 74.00 | -28.45 | peak | |
| 2 | * | 4804.000 | 33.94 | 0.88 | 34.82 | 54.00 | -19.18 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2402MHz | Polarization | Horizontal |

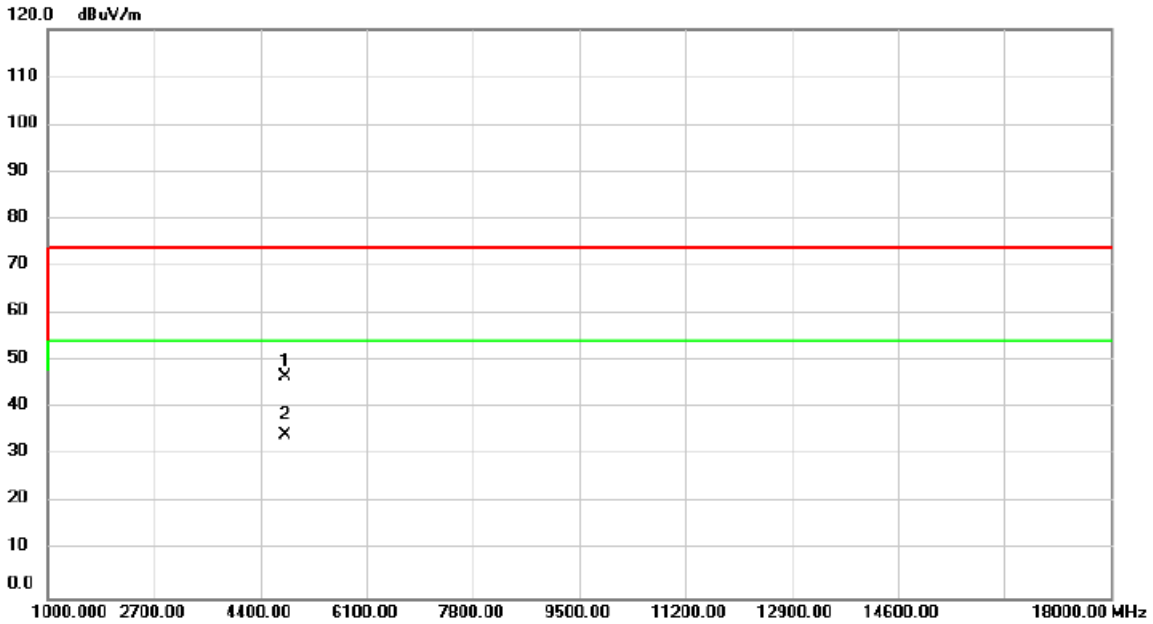


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4804.000 | 45.92 | 0.88 | 46.80 | 74.00 | -27.20 | peak | |
| 2 | * | 4804.000 | 33.61 | 0.88 | 34.49 | 54.00 | -19.51 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|-----------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2440MHz | Polarization | Vertical |

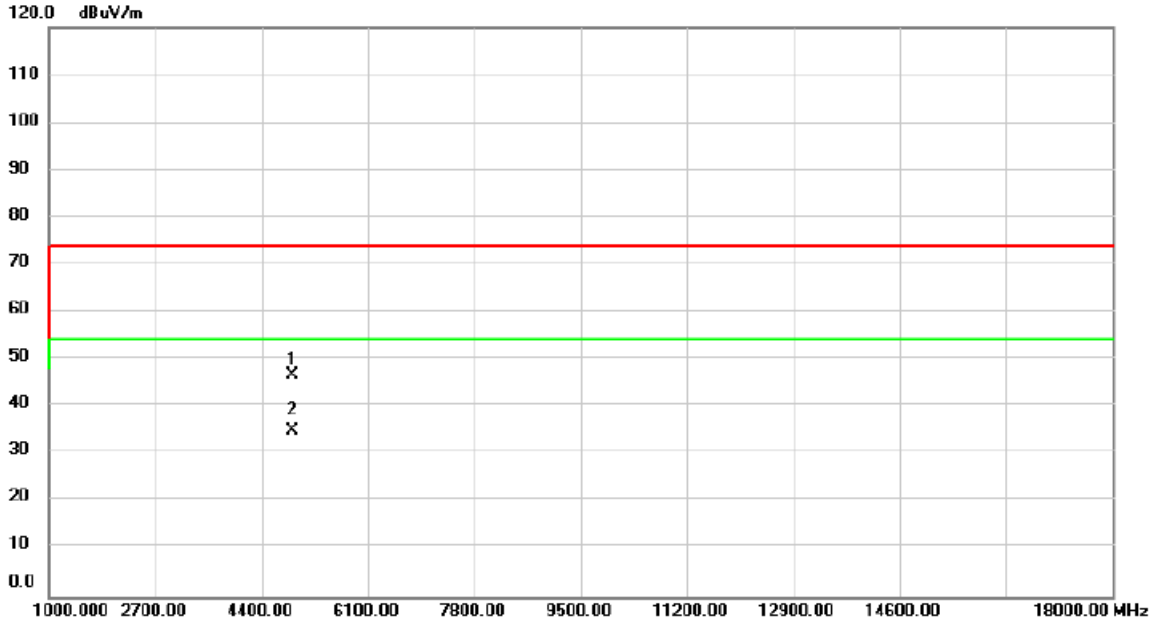


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | | |
| 1 | | 4880.000 | 45.64 | 1.03 | 46.67 | 74.00 | -27.33 | peak | |
| 2 | * | 4880.000 | 33.89 | 1.03 | 34.92 | 54.00 | -19.08 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2440MHz | Polarization | Horizontal |

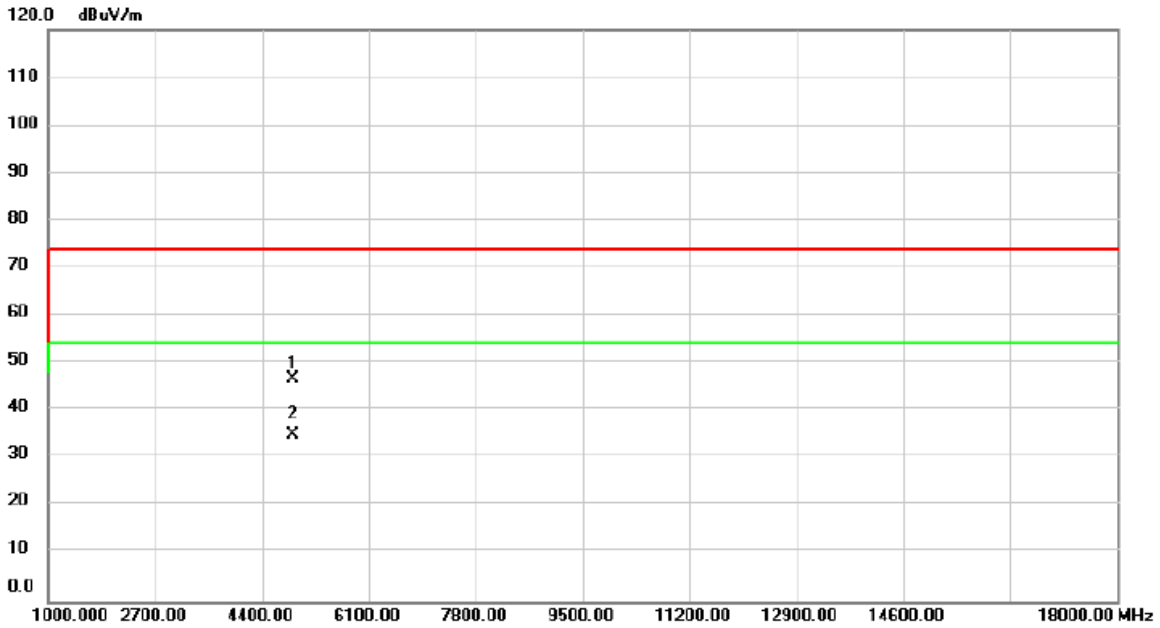


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | | |
| 1 | | 4880.000 | 45.69 | 1.03 | 46.72 | 74.00 | -27.28 | peak | |
| 2 | * | 4880.000 | 33.91 | 1.03 | 34.94 | 54.00 | -19.06 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|-----------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Vertical |

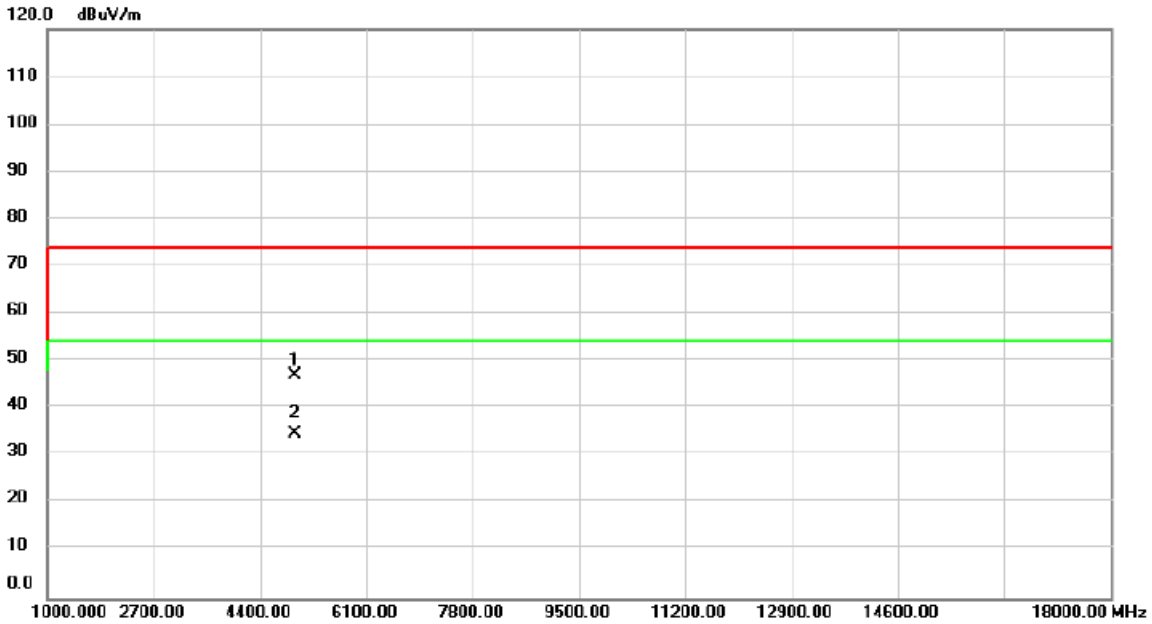


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | | |
| 1 | | 4960.000 | 45.63 | 1.21 | 46.84 | 74.00 | -27.16 | peak | |
| 2 | * | 4960.000 | 33.55 | 1.21 | 34.76 | 54.00 | -19.24 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Horizontal |

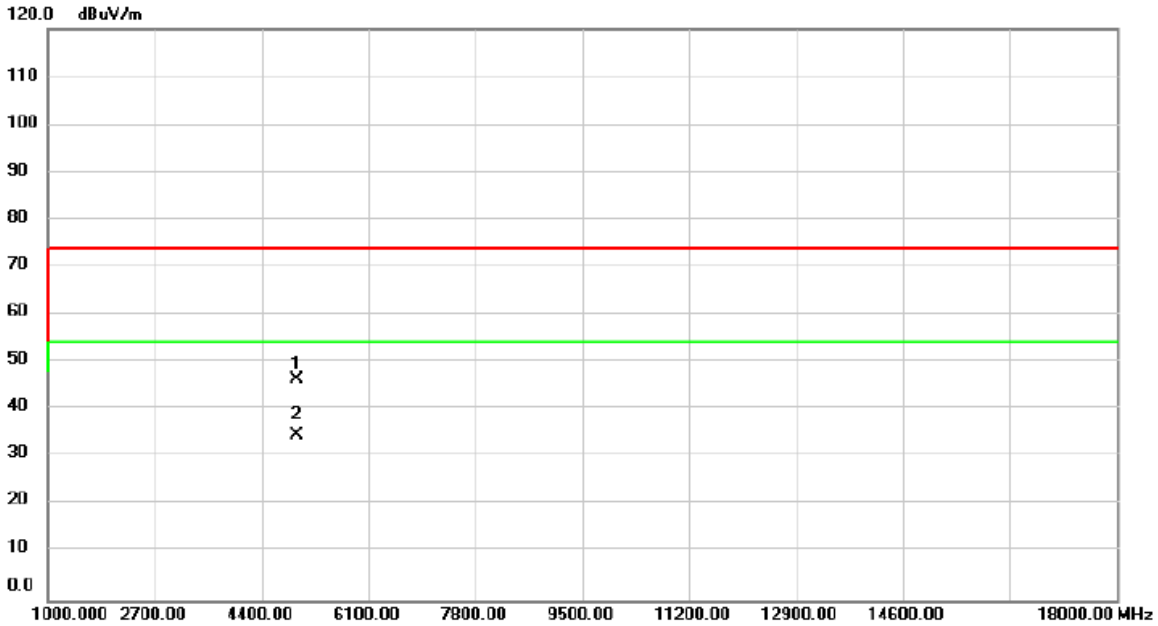


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 4960.000 | 45.14 | 1.21 | 46.35 | 74.00 | -27.65 | peak | |
| 2 | * | 4960.000 | 33.56 | 1.21 | 34.77 | 54.00 | -19.23 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|-----------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Vertical |

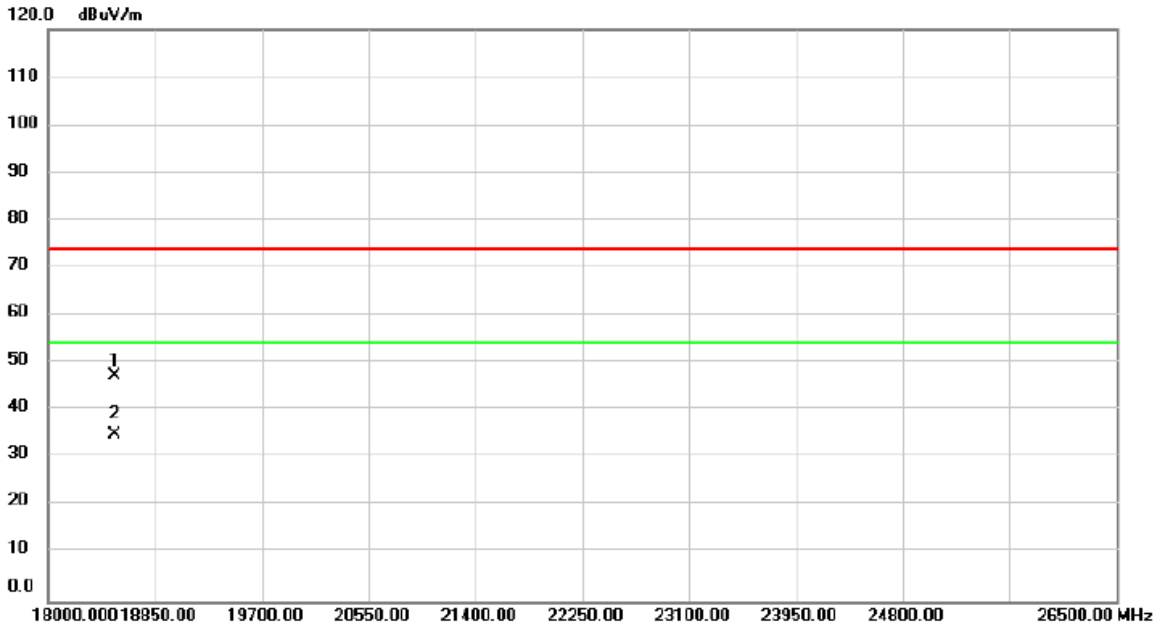


| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 18527.00 | 53.66 | -6.35 | 47.31 | 74.00 | -26.69 | peak | |
| 2 | * | 18527.00 | 41.38 | -6.35 | 35.03 | 54.00 | -18.97 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|----------------|------------------|--------------|------------|
| Test Mode | BLE 5.0 (2 Mbps) | Test Date | 2024/8/24 |
| Test Frequency | 2480MHz | Polarization | Horizontal |

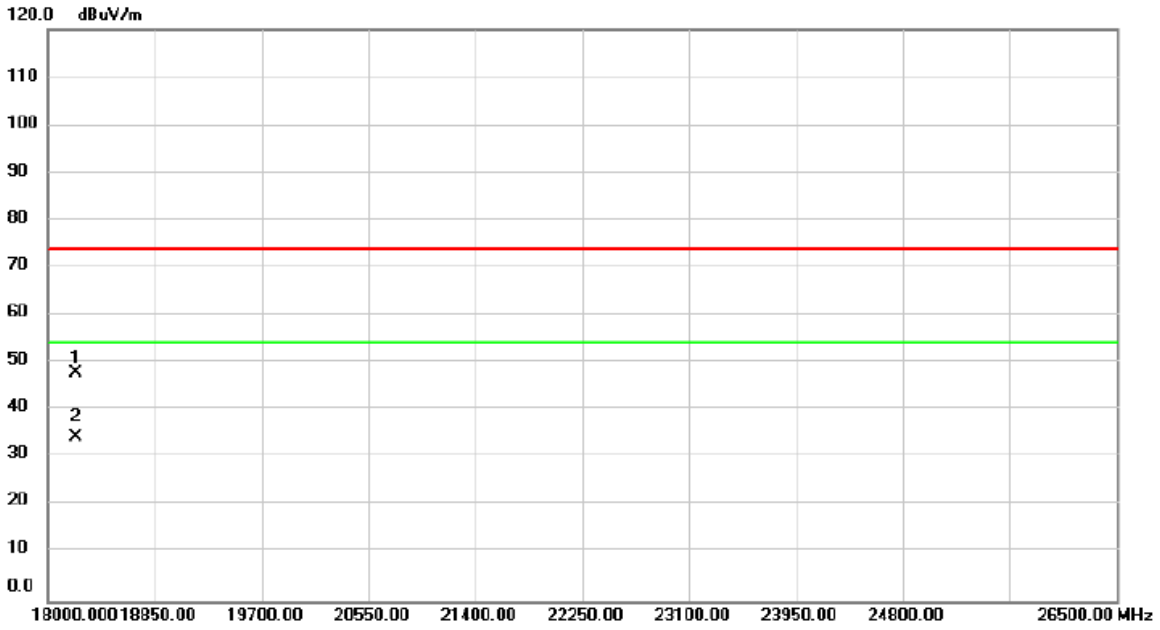

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|---------|
| 1 | | 18221.00 | 54.53 | -6.80 | 47.73 | 74.00 | -26.27 | peak | |
| 2 | * | 18221.00 | 41.18 | -6.80 | 34.38 | 54.00 | -19.62 | AVG | |


REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH

Test Mode: 1Mbps


| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Min. Limit (kHz) | Test Result |
|-----------------|---------------------|-----------------------|------------------|-------------|
| 2402 | 0.686 | 1.056 | 500 | Pass |
| 2440 | 0.660 | 1.052 | 500 | Pass |
| 2480 | 0.668 | 1.052 | 500 | Pass |

CH00

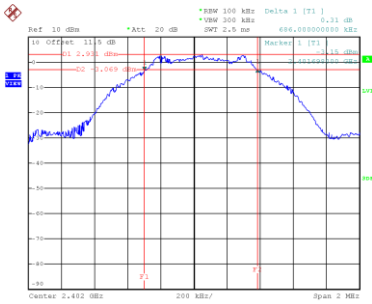


Date: 16.AUG.2024 10:55:137

CH19
6 dB Bandwidth

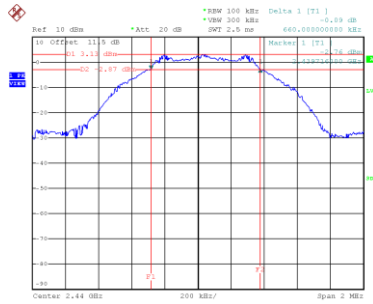


Date: 16.AUG.2024 10:57:137

CH39

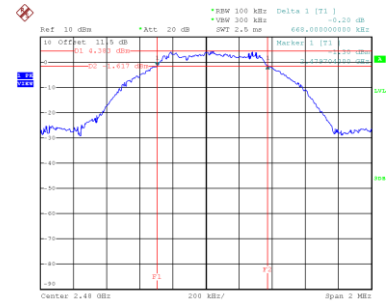


Date: 16.AUG.2024 10:59:145


99 % Occupied Bandwidth

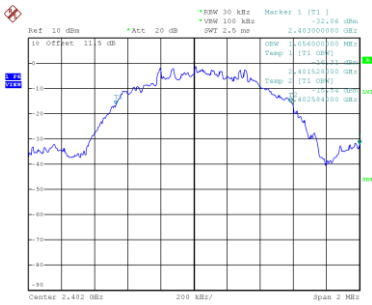

Date: 16.AUG.2024 10:55:107

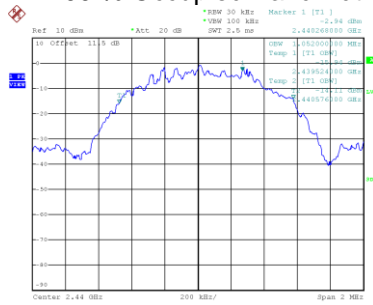

Date: 16.AUG.2024 10:57:145

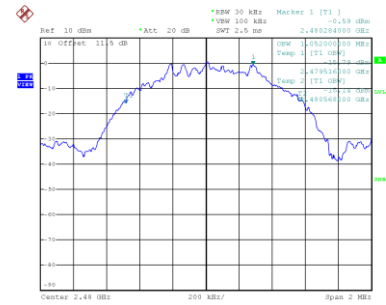


Date: 16.AUG.2024 10:59:153

Test Mode: 2Mbps

| Frequency (MHz) | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Min. Limit (kHz) | Test Result |
|-----------------|---------------------|-----------------------|------------------|-------------|
| 2402 | 1.332 | 2.112 | 500 | Pass |
| 2440 | 1.352 | 2.104 | 500 | Pass |
| 2480 | 1.366 | 2.112 | 500 | Pass |


CH00

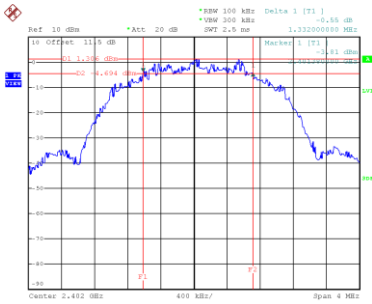

Date: 16.AUG.2024 11:01:47


CH19

6 dB Bandwidth

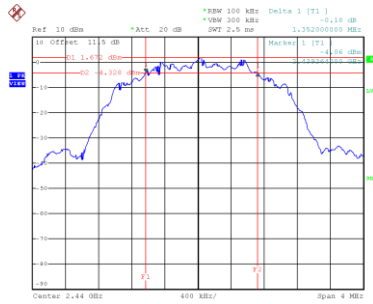


Date: 16.AUG.2024 11:04:11

CH39

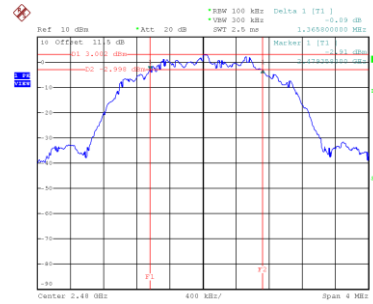


Date: 16.AUG.2024 11:07:01


99 % Occupied Bandwidth

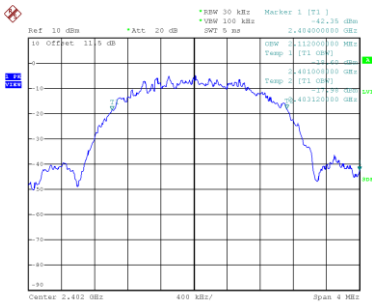

Date: 16.AUG.2024 11:01:16

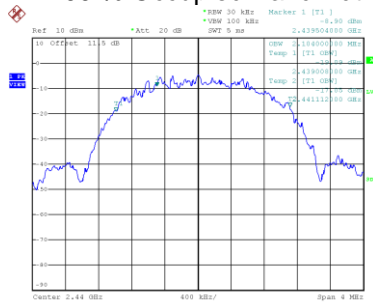

Date: 16.AUG.2024 11:04:19

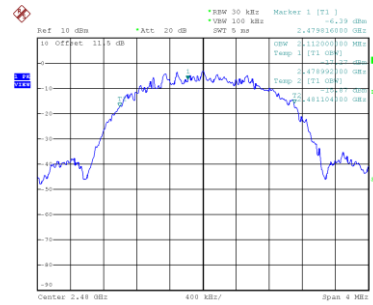

Date: 16.AUG.2024 11:07:09

APPENDIX E MAXIMUM OUTPUT POWER

| | | | |
|-------------|-------|-------------|-----------|
| Test Mode : | 1Mbps | Tested Date | 2024/8/16 |
|-------------|-------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|-----------------|-----------------------|---------------------|------------------|----------------|-------------|
| 2402 | 4.14 | 0.0026 | 30.00 | 1.0000 | Pass |
| 2440 | 4.25 | 0.0027 | 30.00 | 1.0000 | Pass |
| 2480 | 5.55 | 0.0036 | 30.00 | 1.0000 | Pass |




| | | | |
|-------------|-------|-------------|-----------|
| Test Mode : | 2Mbps | Tested Date | 2024/8/16 |
|-------------|-------|-------------|-----------|

| Frequency (MHz) | Conducted Power (dBm) | Conducted Power (W) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|-----------------|-----------------------|---------------------|------------------|----------------|-------------|
| 2402 | 4.15 | 0.0026 | 30.00 | 1.0000 | Pass |
| 2440 | 4.35 | 0.0027 | 30.00 | 1.0000 | Pass |
| 2480 | 5.68 | 0.0037 | 30.00 | 1.0000 | Pass |

APPENDIX F POWER SPECTRAL DENSITY TEST

Test Mode : 1Mbps

| Frequency (MHz) | Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Test Result |
|-----------------|--------------------------|-----------------------|-------------|
| 2402 | -13.72 | 8.00 | Pass |
| 2440 | -13.59 | 8.00 | Pass |
| 2480 | -11.50 | 8.00 | Pass |

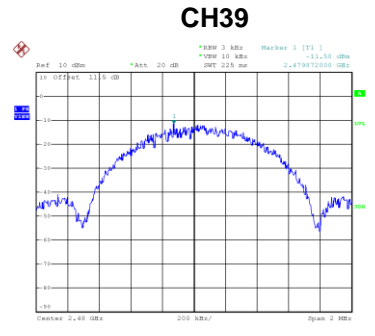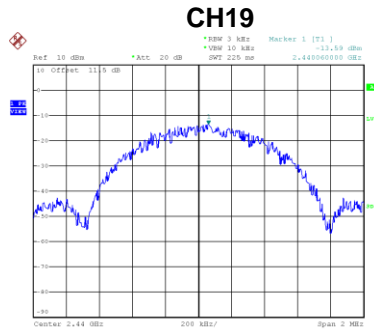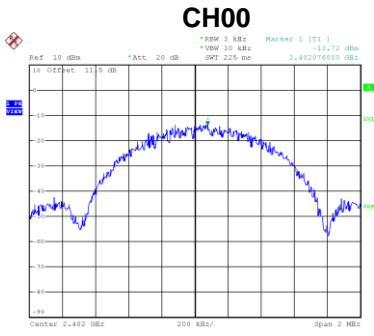




Date: 16.AUG.2024 10:56:27

Date: 16.AUG.2024 10:58:35

Date: 16.AUG.2024 11:00:43

Test Mode : 2Mbps

| Frequency (MHz) | Power Density (dBm/3kHz) | Max. Limit (dBm/3kHz) | Test Result |
|-----------------|--------------------------|-----------------------|-------------|
| 2402 | -17.31 | 8.00 | Pass |
| 2440 | -16.43 | 8.00 | Pass |
| 2480 | -14.96 | 8.00 | Pass |

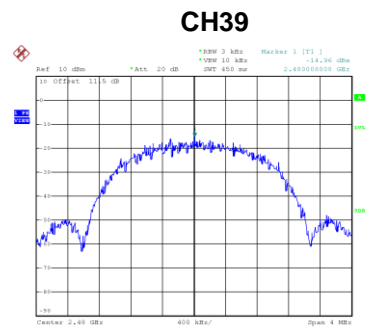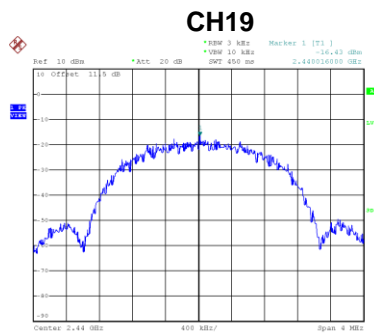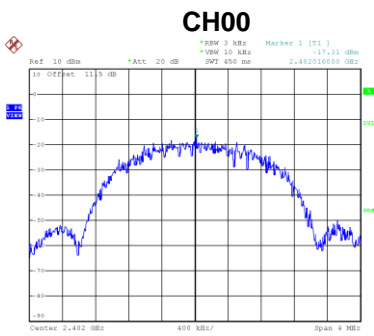

Date: 16.AUG.2024 11:02:37


Date: 16.AUG.2024 11:05:10

Date: 16.AUG.2024 11:07:59


APPENDIX G ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode : 1Mbps

Bandedge CH00 (Lower)

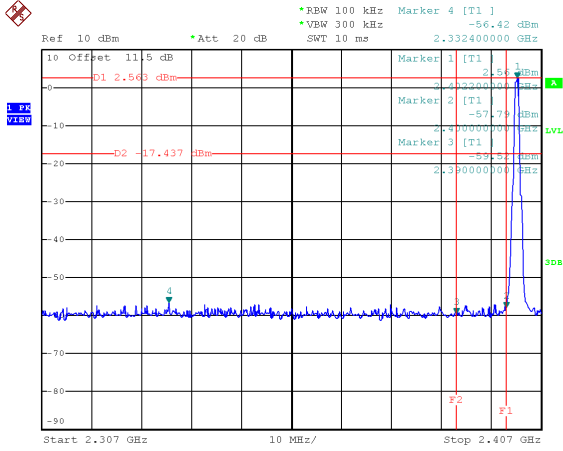




Bandedge CH39 (Upper)

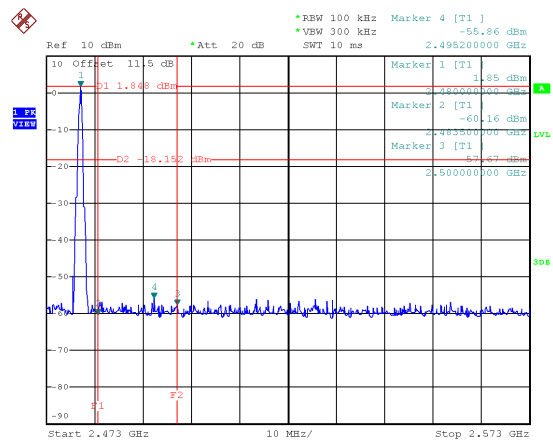

Date: 16.AUG.2024 10:55:46

Date: 16.AUG.2024 11:00:02

CH00 – 10th Harmonic of the fundamental frequency

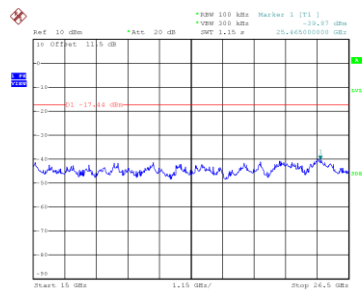
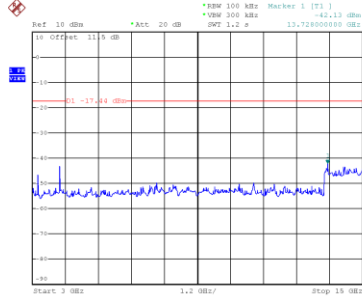
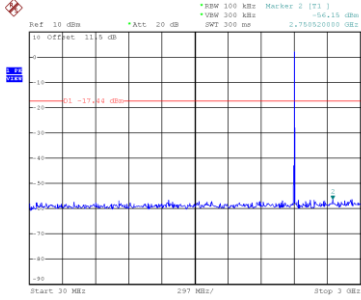


Date: 16.AUG.2024 10:56:01

Date: 16.AUG.2024 10:56:11

Date: 16.AUG.2024 10:56:20

CH19 – 10th Harmonic of the fundamental frequency

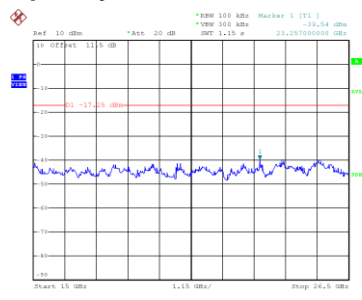
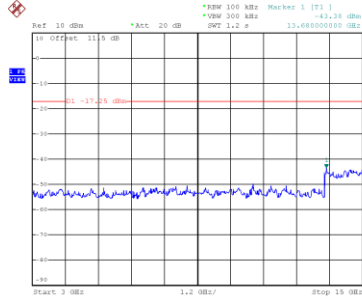
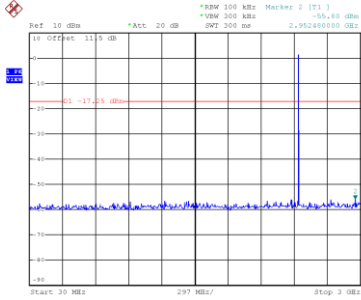


Date: 16.AUG.2024 10:58:09

Date: 16.AUG.2024 10:58:18

Date: 16.AUG.2024 10:58:27

CH39 – 10th Harmonic of the fundamental frequency

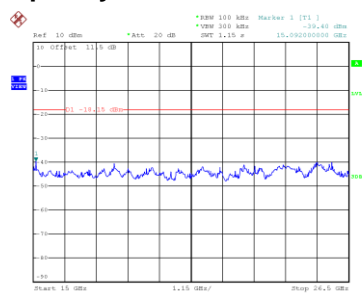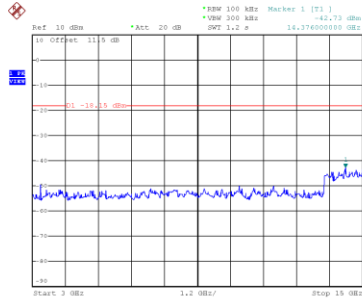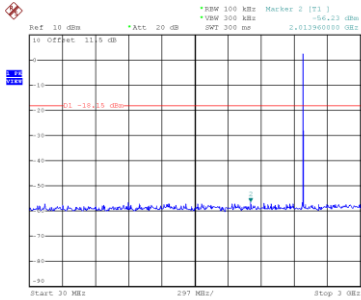


Date: 16.AUG.2024 11:00:17

Date: 16.AUG.2024 11:00:26


Date: 16.AUG.2024 11:00:35

Test Mode : 2Mbps

Bandedge CH00 (Lower)

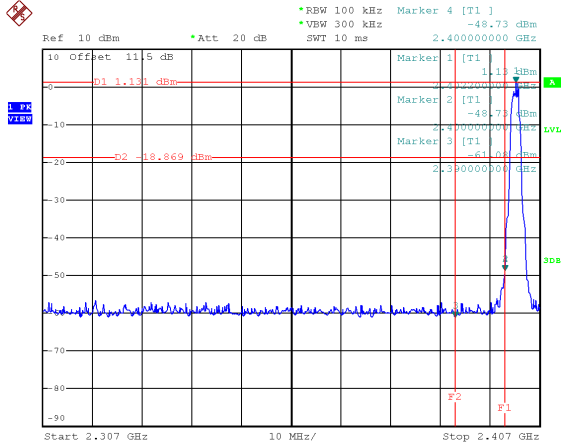




Bandedge CH39 (Upper)

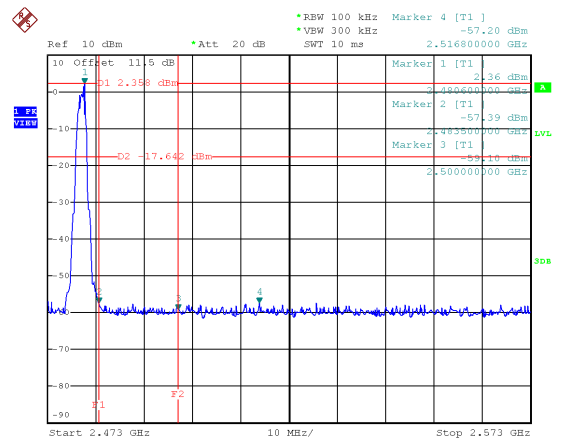

Date: 16.AUG.2024 11:01:56

Date: 16.AUG.2024 11:07:18

CH00 – 10th Harmonic of the fundamental frequency

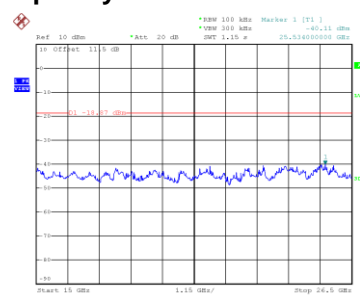
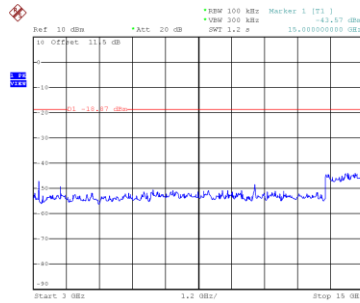
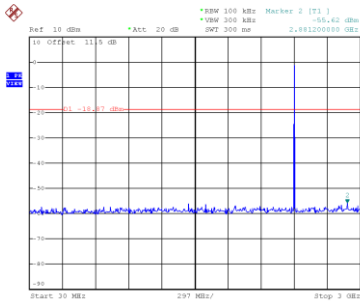


Date: 16.AUG.2024 11:02:11

Date: 16.AUG.2024 11:02:20

Date: 16.AUG.2024 11:02:29

CH19 – 10th Harmonic of the fundamental frequency

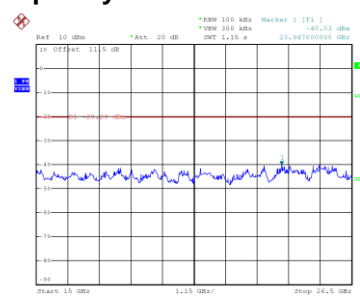
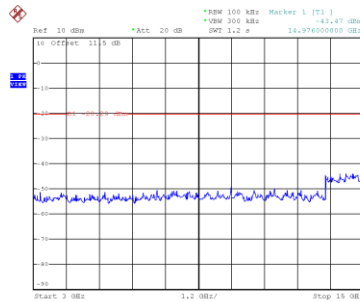
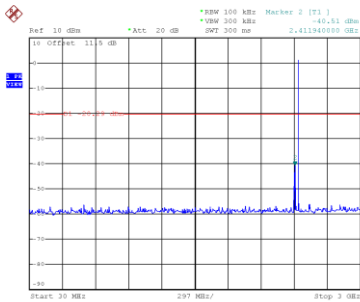


Date: 16.AUG.2024 11:04:43

Date: 16.AUG.2024 11:04:52

Date: 16.AUG.2024 11:05:02

CH39 – 10th Harmonic of the fundamental frequency

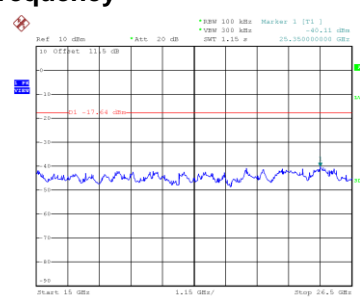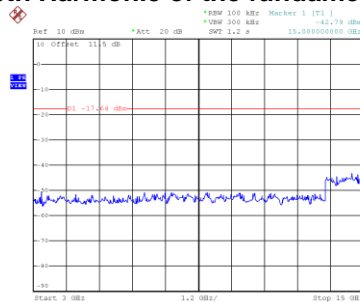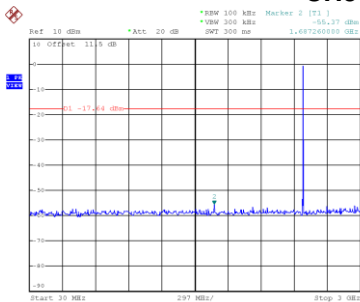

Date: 16.AUG.2024 11:07:33

Date: 16.AUG.2024 11:07:42

Date: 16.AUG.2024 11:07:51

End of Test Report