

GSM850_GPRS12_Rear Face_10MM_128

DUT: EUT

Communication System: UID 0, GPRS 850-4solt; Frequency: 824.2 MHz;Duty Cycle: 1:2

Medium: H835 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19) @ 824.2 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.479 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.74 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.546 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.331 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.5%

Maximum value of SAR (measured) = 0.477 W/kg

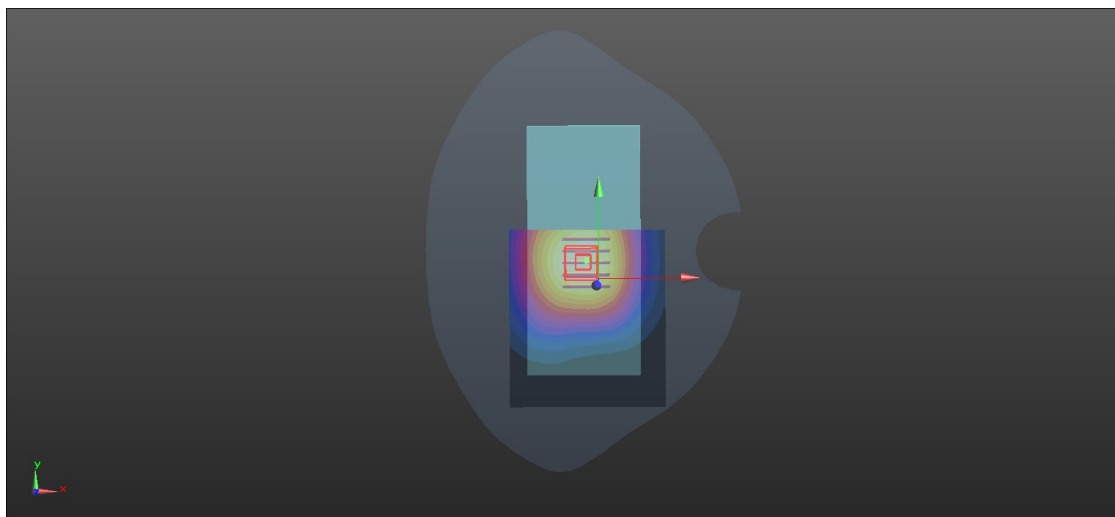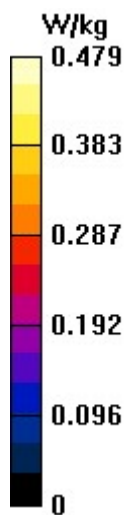

GSM1900_GPRS12_Rear Face_10MM_661

DUT: EUT


Communication System: UID 0, GPRS1900-4slots; Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35) @ 1880 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.782 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.17 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.347 W/kg
Smallest distance from peaks to all points 3 dB below = 14.8 mm
Ratio of SAR at M2 to SAR at M1 = 56.4%
Maximum value of SAR (measured) = 0.776 W/kg

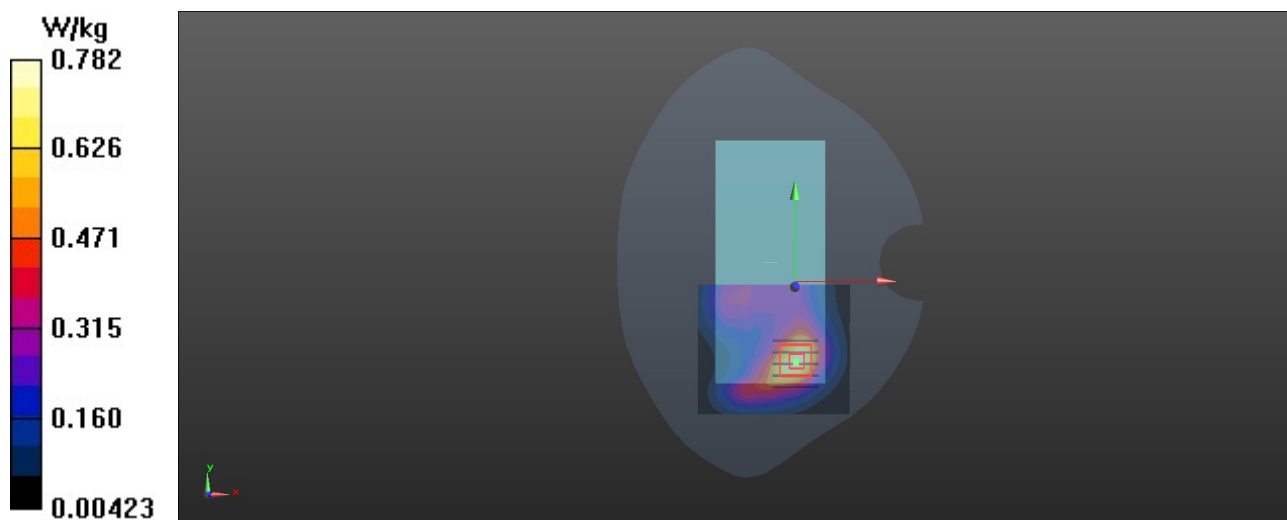

WCDMA II_RMV12.2K_Rear Face_10MM_9262

DUT: EUT


Communication System: UID 0, WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.342$ S/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35) @ 1852.4 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.423 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.429 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.592 W/kg
SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.186 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 57.5%
Maximum value of SAR (measured) = 0.415 W/kg

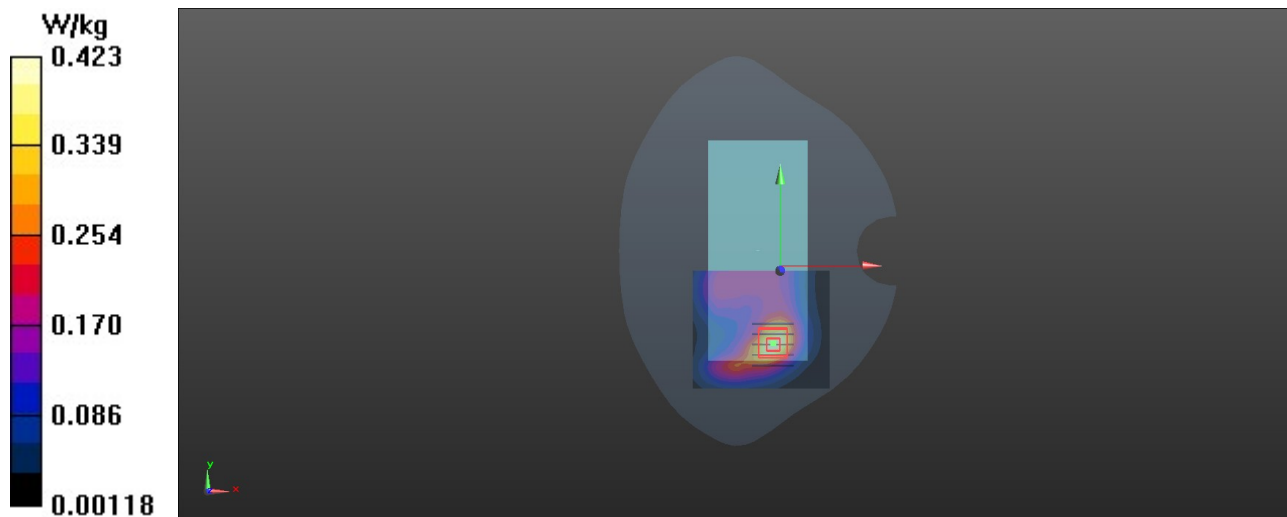

WCDMA IV_RMV12.2K_Rear Face_10MM_1513

DUT: EUT

Communication System: UID 0, WCDMA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.332 \text{ S/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37) @ 1752.6 MHz; Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.665 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.45 V/m; Power Drift = -0.04 dB



Peak SAR (extrapolated) = 0.904 W/kg

SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 56.7%

Maximum value of SAR (measured) = 0.624 W/kg

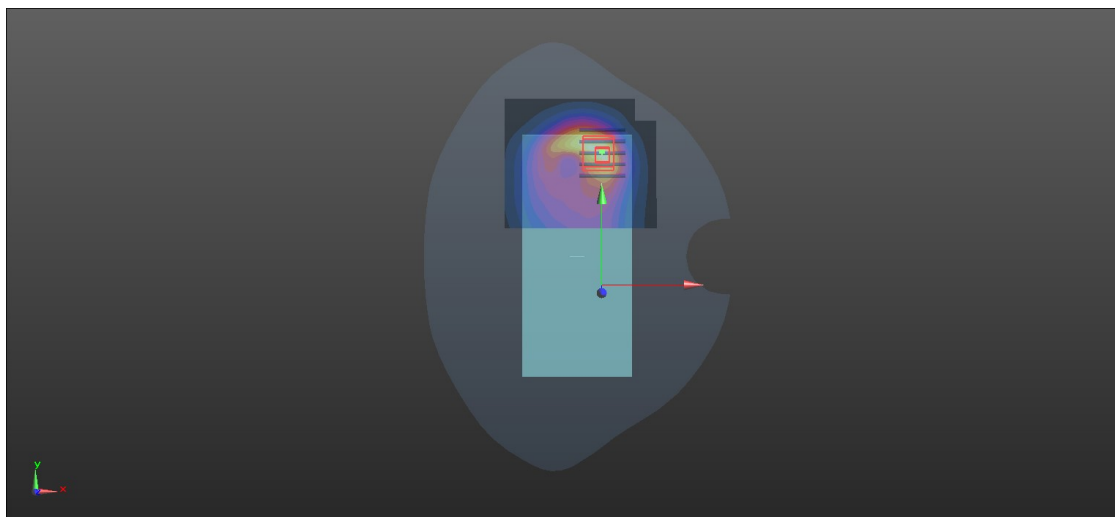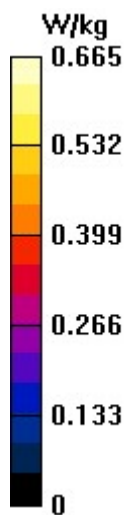

WCDMA V_RMC12.2K_Rear Face_10MM_4132**DUT: EUT**

Communication System: UID 0, WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19) @ 826.4 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.195 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.19 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.136 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 78.5%

Maximum value of SAR (measured) = 0.194 W/kg

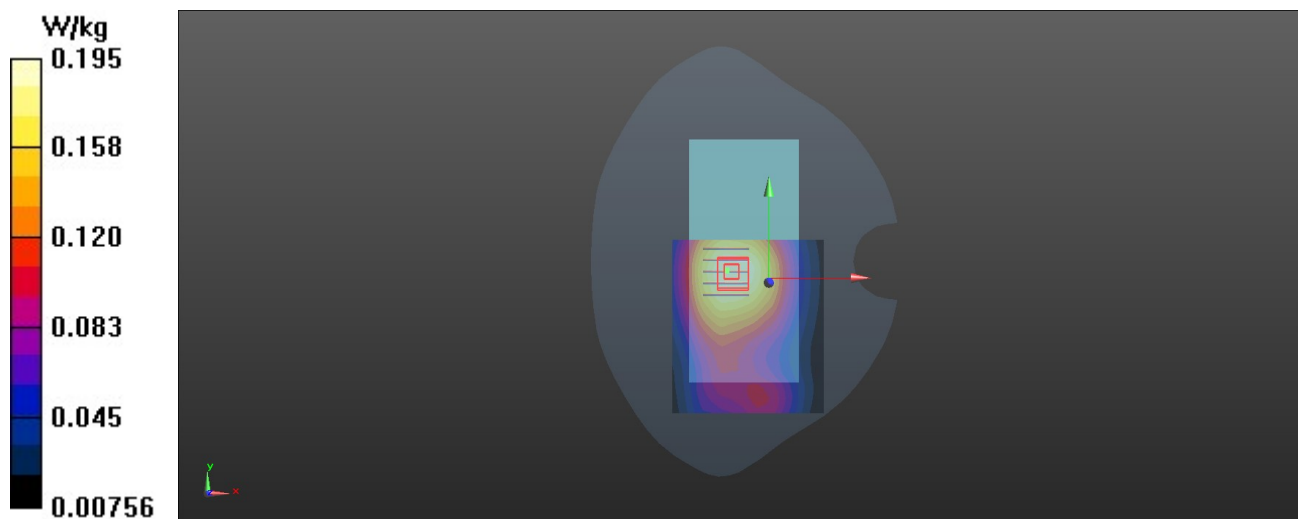

LTE 7_QPSK20M_1_50_Rear Face_10MM_21100

DUT: EUT


Communication System: UID 0, LTE Band 7&20M; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium: H2600 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.898 \text{ S/m}$; $\epsilon_r = 40.1$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85) @ 2535 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.526 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.180 V/m ; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.901 W/kg
SAR(1 g) = 0.402 W/kg ; SAR(10 g) = 0.185 W/kg
 Smallest distance from peaks to all points 3 dB below = 10 mm
 Ratio of SAR at M2 to SAR at M1 = 45.5%
 Maximum value of SAR (measured) = 0.530 W/kg

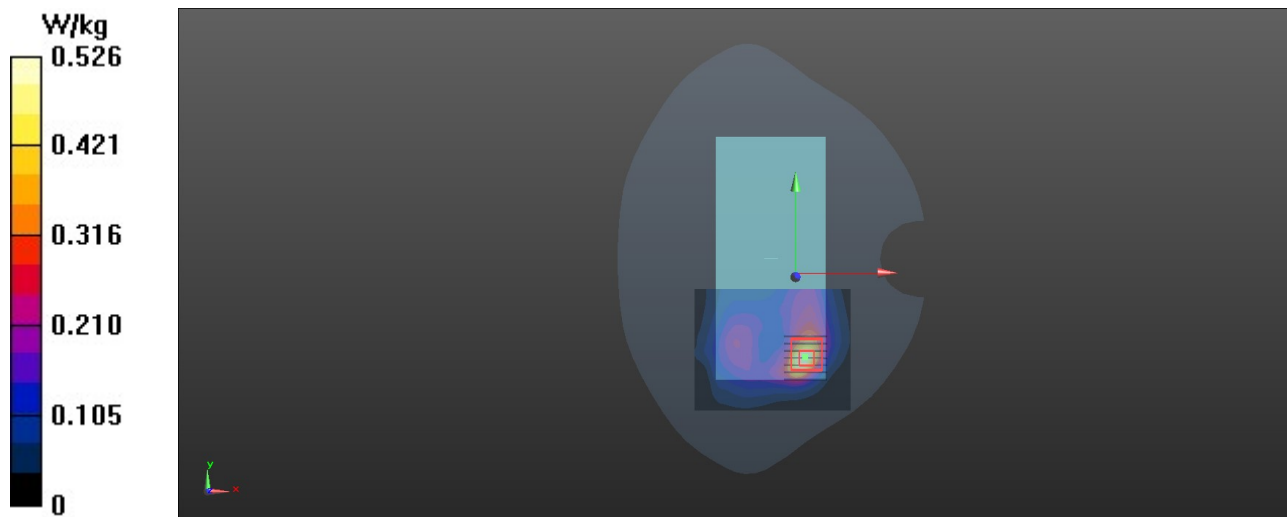

LTE 12_QPSK10M_1_49_Rear Face_10MM_23060

DUT: EUT

Communication System: UID 0, LTE Band 12; Frequency: 704 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.871 \text{ S/m}$; $\epsilon_r = 43.4$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.58, 10.58, 10.58) @ 704 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.217 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.90 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.7%

Maximum value of SAR (measured) = 0.217 W/kg

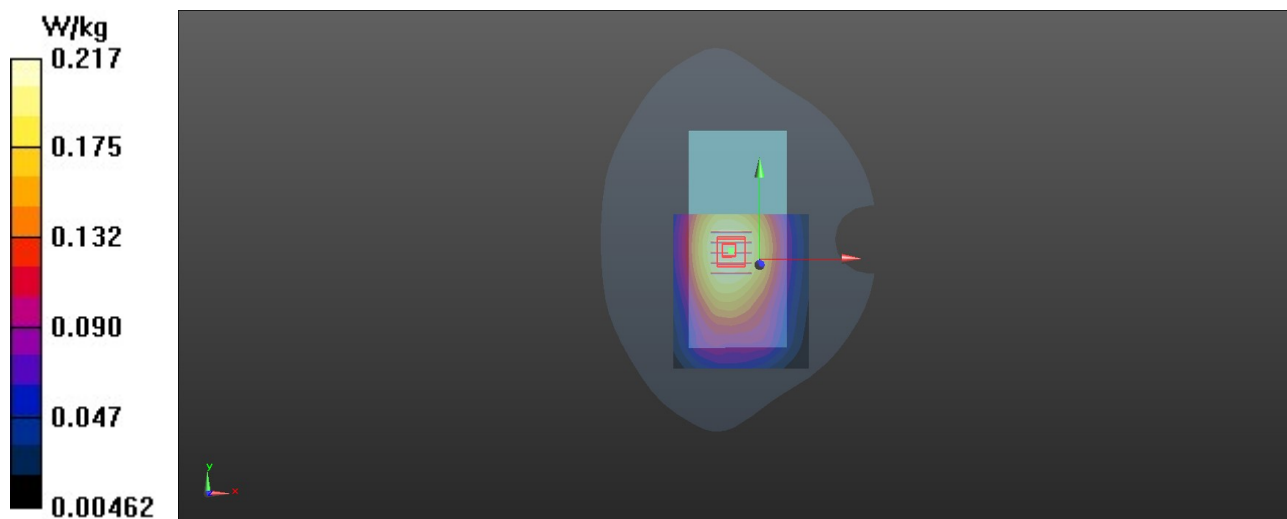

LTE 13_QPSK10M_1_25_Rear Face_10MM_23230

DUT: EUT

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 42.6$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.58, 10.58, 10.58) @ 782 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.393 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.92 V/m ; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.363 W/kg ; SAR(10 g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.8%

Maximum value of SAR (measured) = 0.397 W/kg

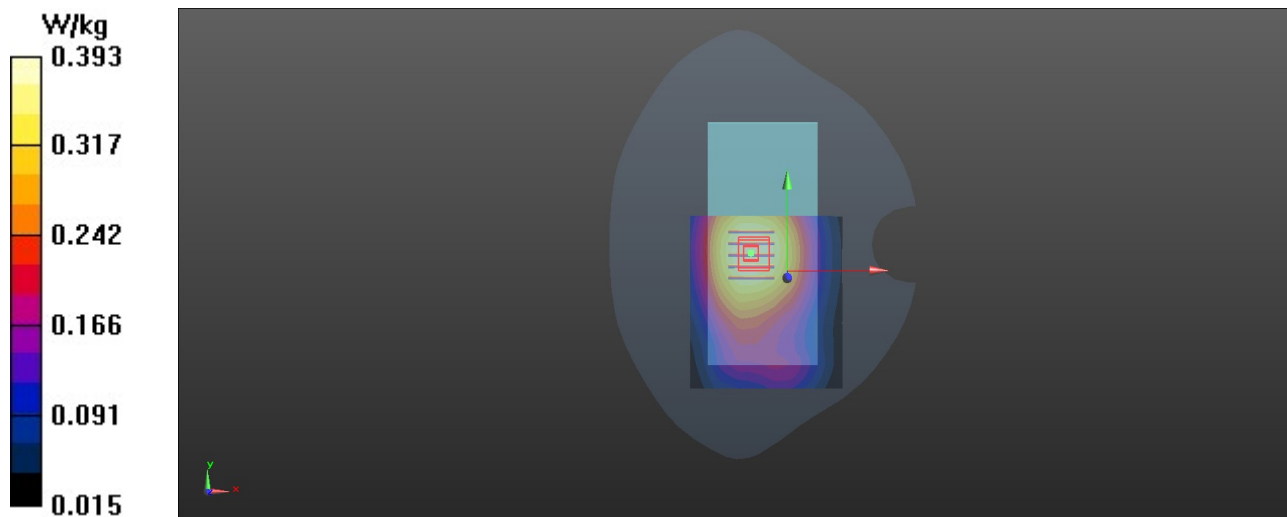

LTE 25_QPSK20M_1_50_Rear Face_10MM_26140

DUT: EUT

Communication System: UID 0, LTE Band 25; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1860$ MHz; $\sigma = 1.344$ S/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.35, 8.35, 8.35) @ 1860 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.537 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.28 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.428 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 0.527 W/kg

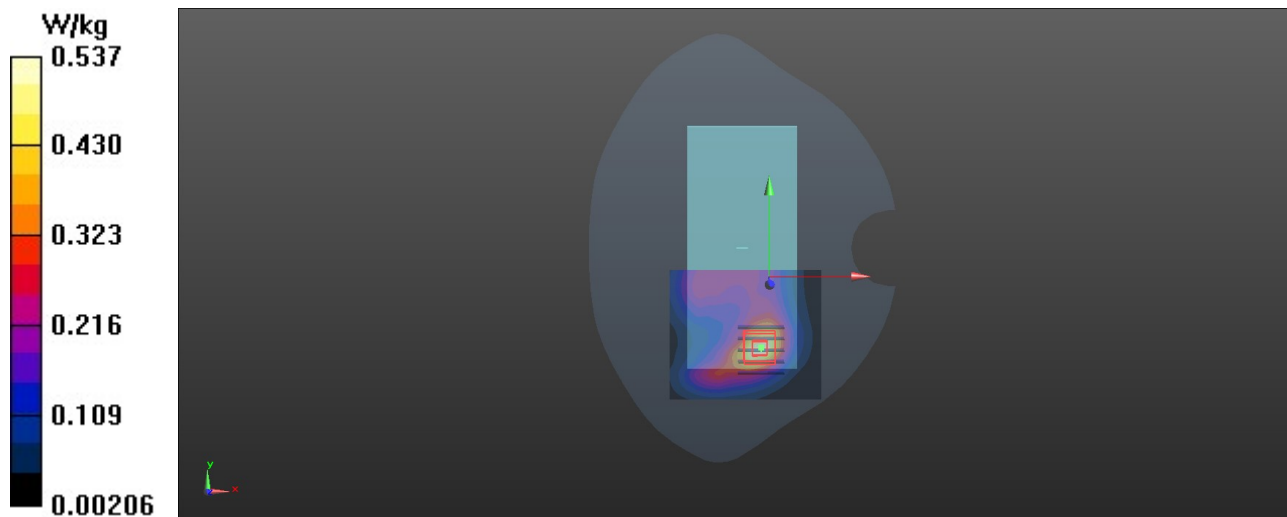

LTE 26_QPSK15M_1_38_Rear Face_10MM_26765

DUT: EUT

Communication System: UID 0, LTE 26; Frequency: 821.5 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used : $f = 821.5$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.19, 10.19, 10.19) @ 821.5 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.261 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.77 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.7%

Maximum value of SAR (measured) = 0.262 W/kg

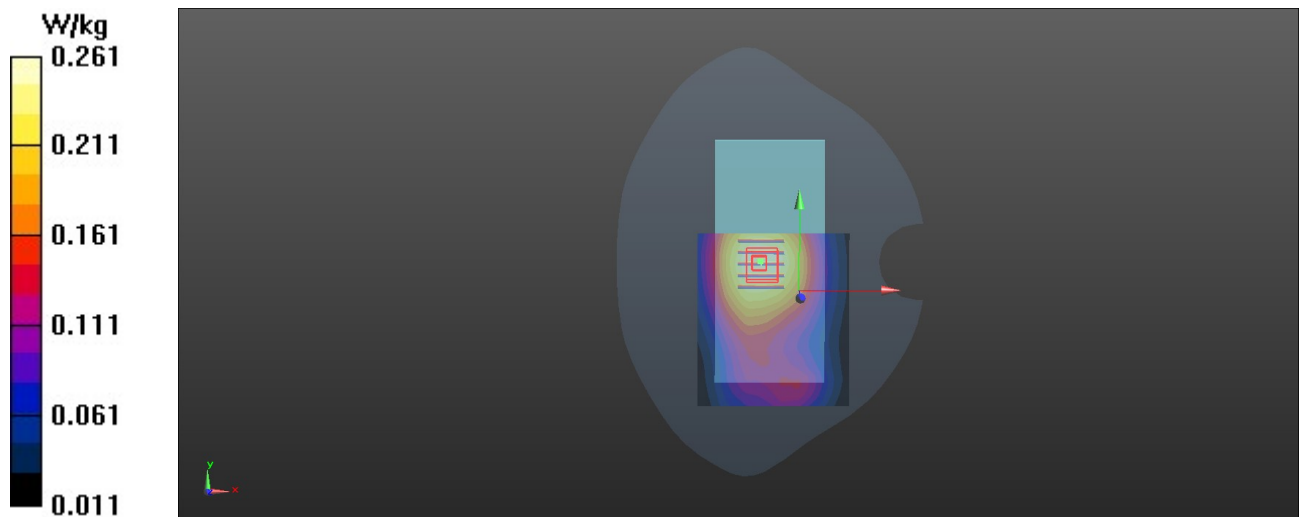

LTE 30_QPSK10M_1_49_Front Face_10MM_27710

DUT: EUT

Communication System: UID 0, LTE 30; Frequency: 2310 MHz; Duty Cycle: 1:1


Medium: H2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.13, 8.13, 8.13) @ 2310 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.370 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.880 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.524 W/kg
SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.165 W/kg
Smallest distance from peaks to all points 3 dB below = 12.5 mm
Ratio of SAR at M2 to SAR at M1 = 57%
Maximum value of SAR (measured) = 0.357 W/kg

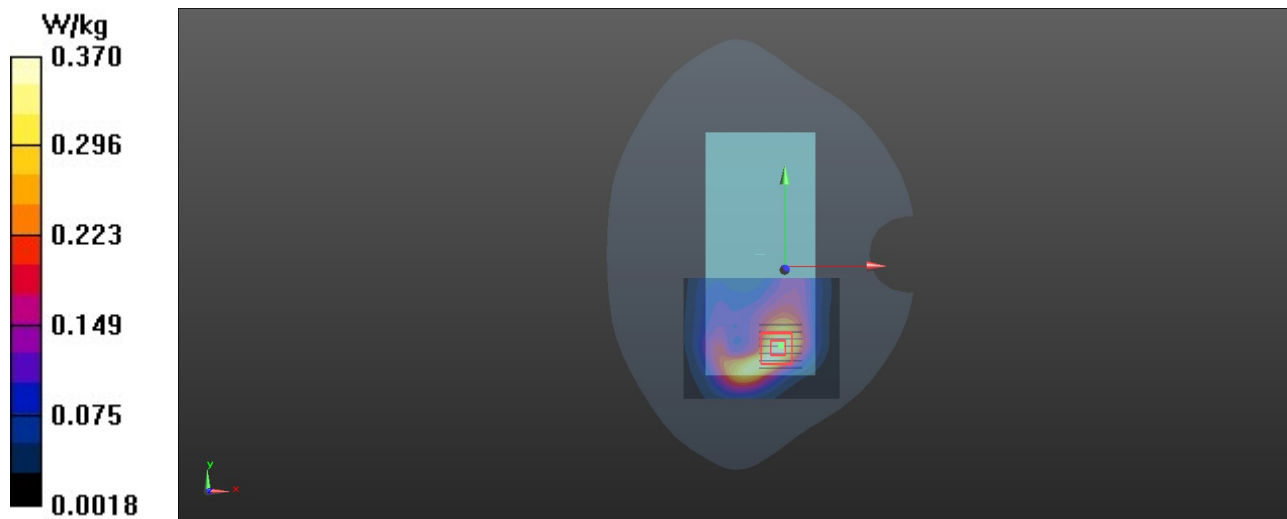

LTE 40_QPSK10M_1_25_Front Face_10MM_38750

DUT: EUT

Communication System: UID 0, TDD-LTE Band40&10M; Frequency: 2310 MHz;Duty Cycle: 1:1.58

Medium: H2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.664$ S/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.13, 8.13, 8.13) @ 2310 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.339 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.124 V/m; Power Drift = 0.14 dB



Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.9%

Maximum value of SAR (measured) = 0.332 W/kg

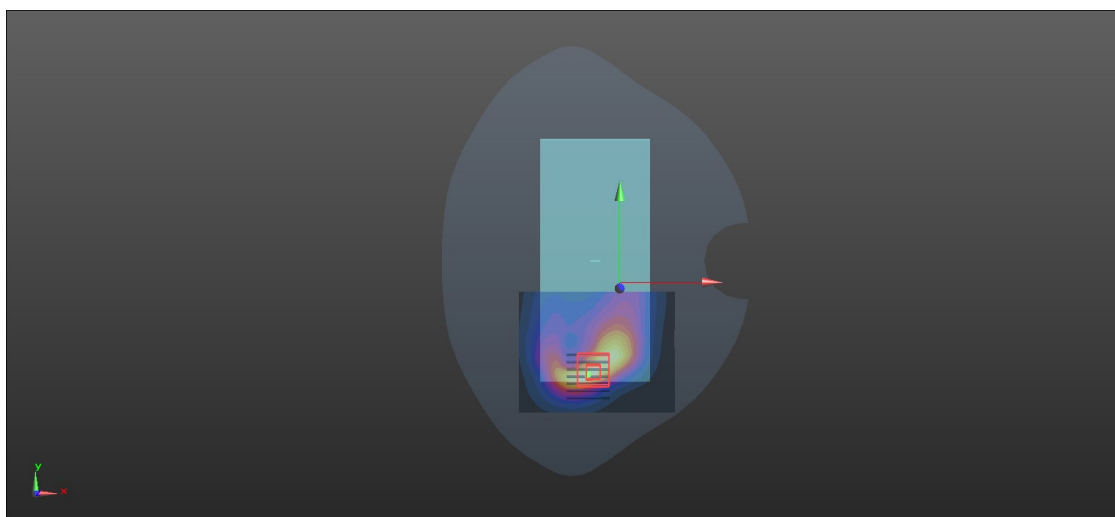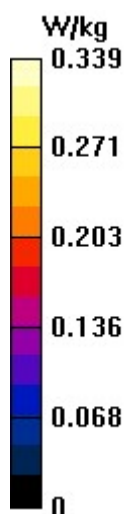

LTE 41_QPSK20M_1_50_Rear Face_10MM_39750

DUT: EUT

Communication System: UID 0, TDD-LTE Band41; Frequency: 2506 MHz; Duty Cycle: 1:1.58

Medium: H2600 Medium parameters used: $f = 2506$ MHz; $\sigma = 1.864$ S/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.85, 7.85, 7.85) @ 2506 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.544 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.730 V/m; Power Drift = -0.00 dB


Peak SAR (extrapolated) = 0.938 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.189 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.550 W/kg

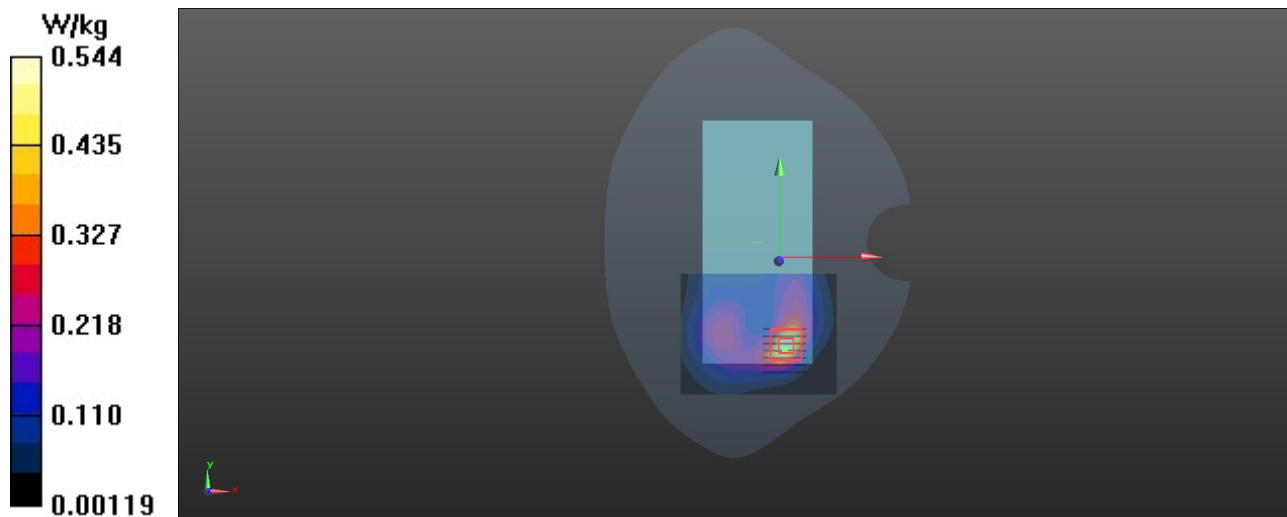

LTE 66_QPSK20M_1_50_Rear Face_10MM_132572

DUT: EUT


Communication System: UID 0, LTE Band 66&QPSK20M; Frequency: 1770 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.379$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.37, 5.37, 5.37) @ 1770 MHz; Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.702 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.03 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.973 W/kg
SAR(1 g) = 0.550 W/kg; SAR(10 g) = 0.313 W/kg
Smallest distance from peaks to all points 3 dB below = 15.1 mm
Ratio of SAR at M2 to SAR at M1 = 56.3%
Maximum value of SAR (measured) = 0.676 W/kg

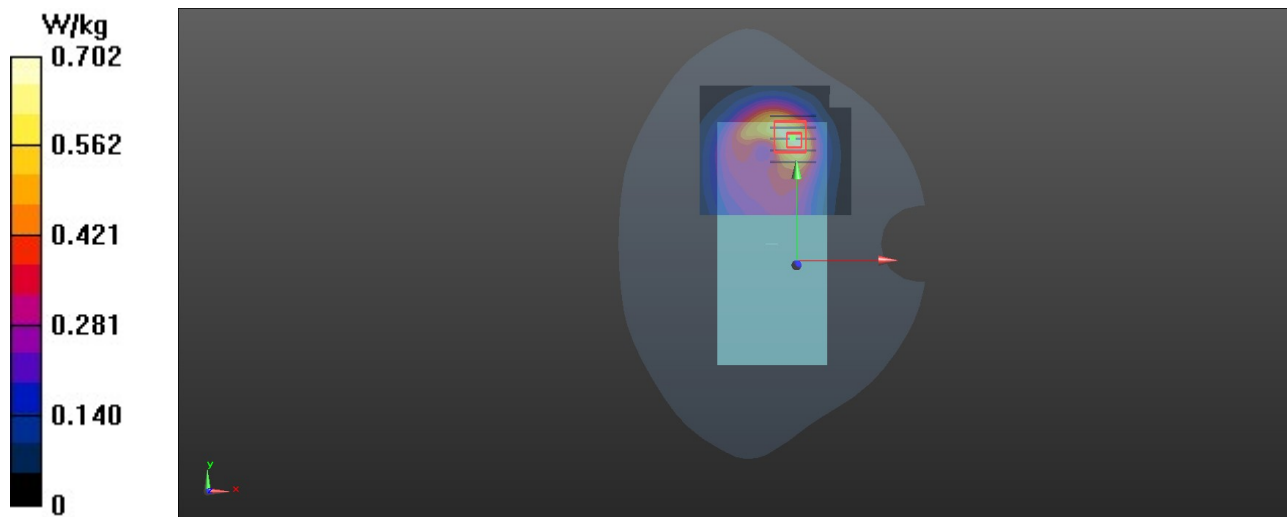

LTE 71_QPSK20M_1_50_Rear Face_10MM_133222

DUT: EUT


Communication System: UID 0, LTE Band 71&QPSK20M; Frequency: 673 MHz;Duty Cycle: 1:1
Medium: H750 Medium parameters used : $f = 673 \text{ MHz}$; $\sigma = 0.859 \text{ S/m}$; $\epsilon_r = 43.5$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.58, 10.58, 10.58) @ 673 MHz; Calibrated: 2023/9/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn549; Calibrated: 2024/1/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.212 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 15.70 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.239 W/kg
SAR(1 g) = 0.196 W/kg ; SAR(10 g) = 0.156 W/kg
Smallest distance from peaks to all points 3 dB below: Larger than measurement grid
Ratio of SAR at M2 to SAR at M1 = 81.8%
Maximum value of SAR (measured) = 0.212 W/kg

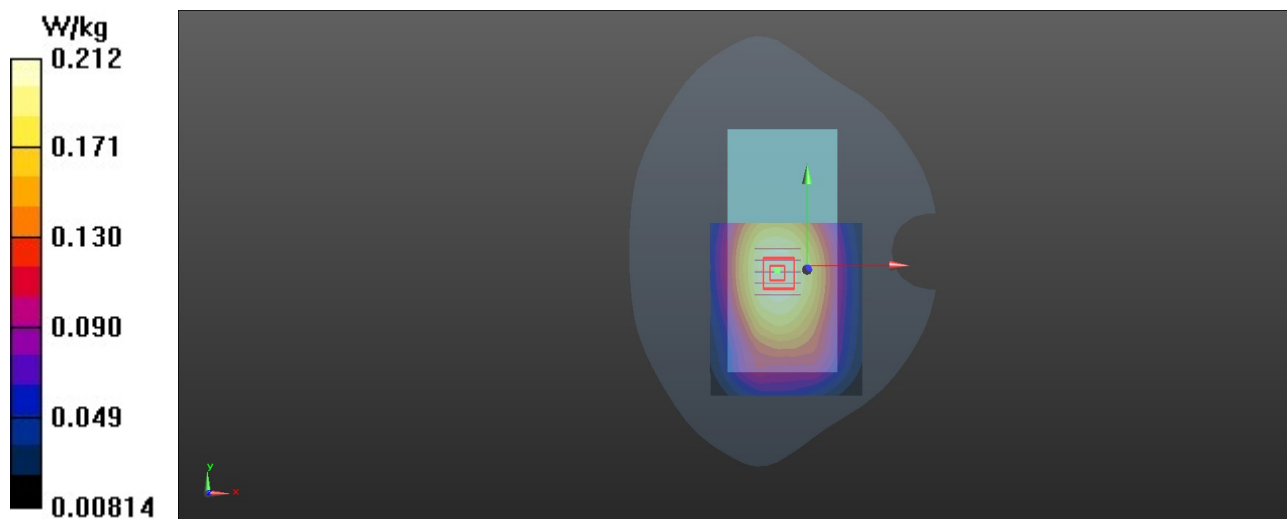

WIFI 2.4G_802.11b_Front Face_10mm_11

DUT: EUT

Communication System: UID 0, Wlan 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.817 \text{ S/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68) @ 2462 MHz; Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0834 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.718 V/m ; Power Drift = -0.08 dB



Peak SAR (extrapolated) = 0.162 W/kg

SAR(1 g) = 0.070 W/kg ; SAR(10 g) = 0.034 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 0.0926 W/kg

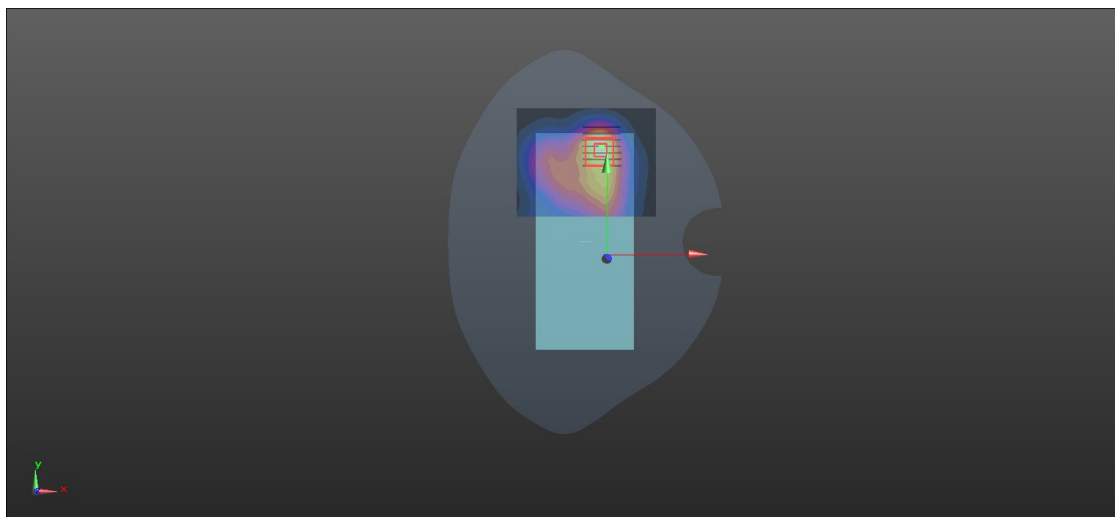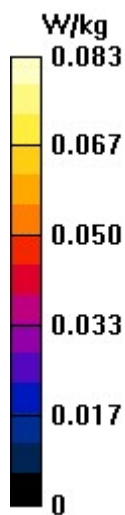

EDR_DH5_Rear Face_10mm_78

DUT: EUT

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.837$ S/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.68, 4.68, 4.68) @ 2480 MHz; Calibrated: 2023/3/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2023/3/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0237 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.393 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.0440 W/kg

SAR(1 g) = 0.0185 W/kg; SAR(10 g) = 0.00851 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 43.4%

Maximum value of SAR (measured) = 0.0243 W/kg

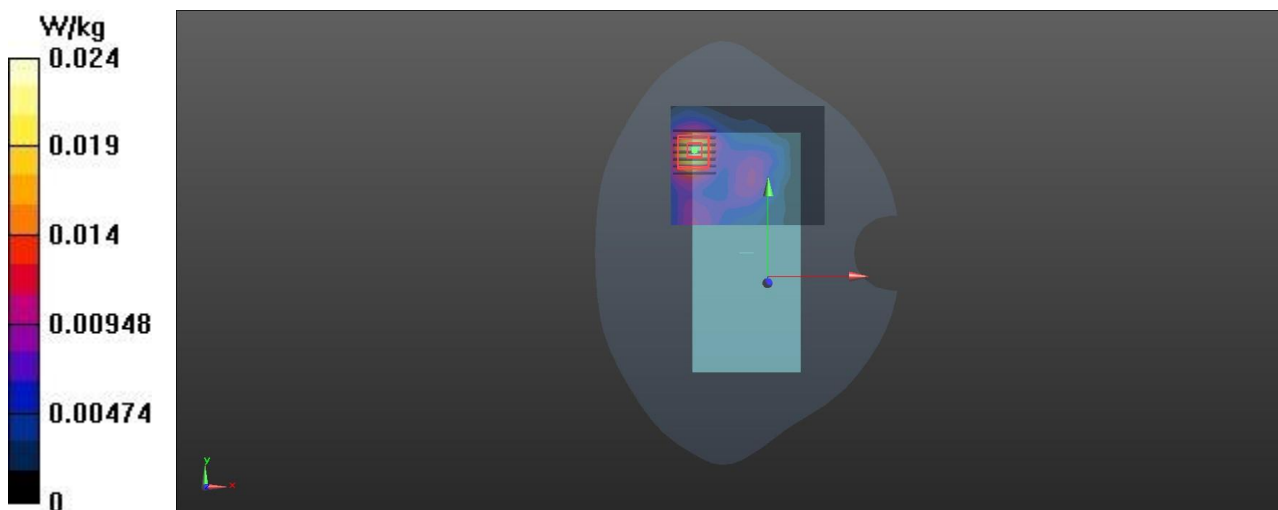

P39 802.11a_Front Face_1cm_Ch44

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5220 MHz;Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5220$ MHz; $\sigma = 4.7$ S/m; $\epsilon_r = 36.347$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.39, 5.39, 5.39) @ 5220 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.361 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.199 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.555 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 0.348 W/kg

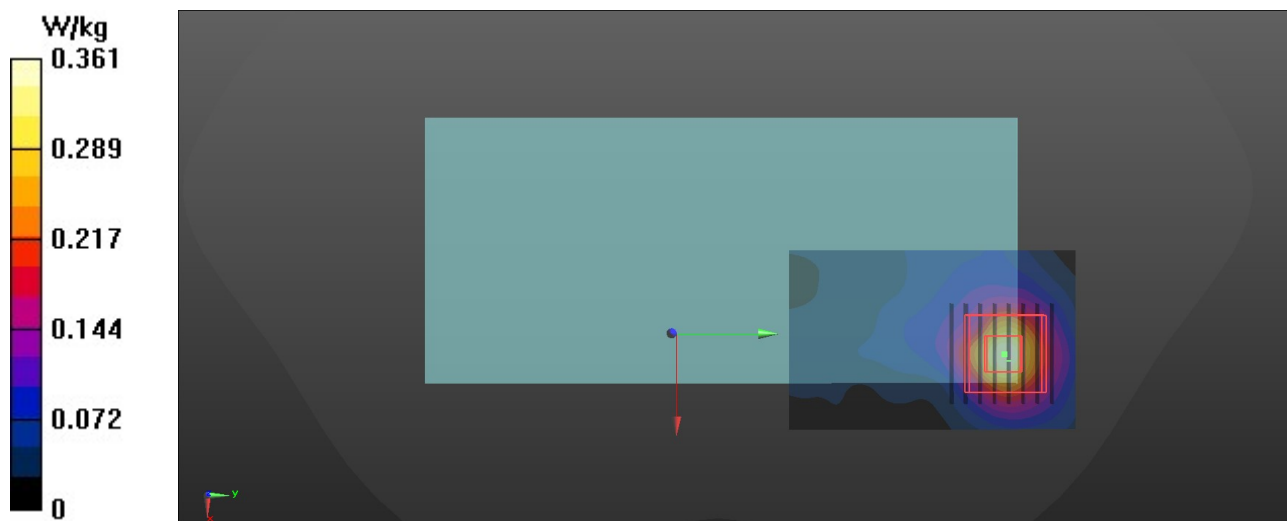

P40 802.11a_Front Face_1cm_Ch64

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5320$ MHz; $\sigma = 4.804$ S/m; $\epsilon_r = 36.207$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(5.39, 5.39, 5.39) @ 5320 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.387 W/kg


Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 1.936 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below = 10.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.363 W/kg

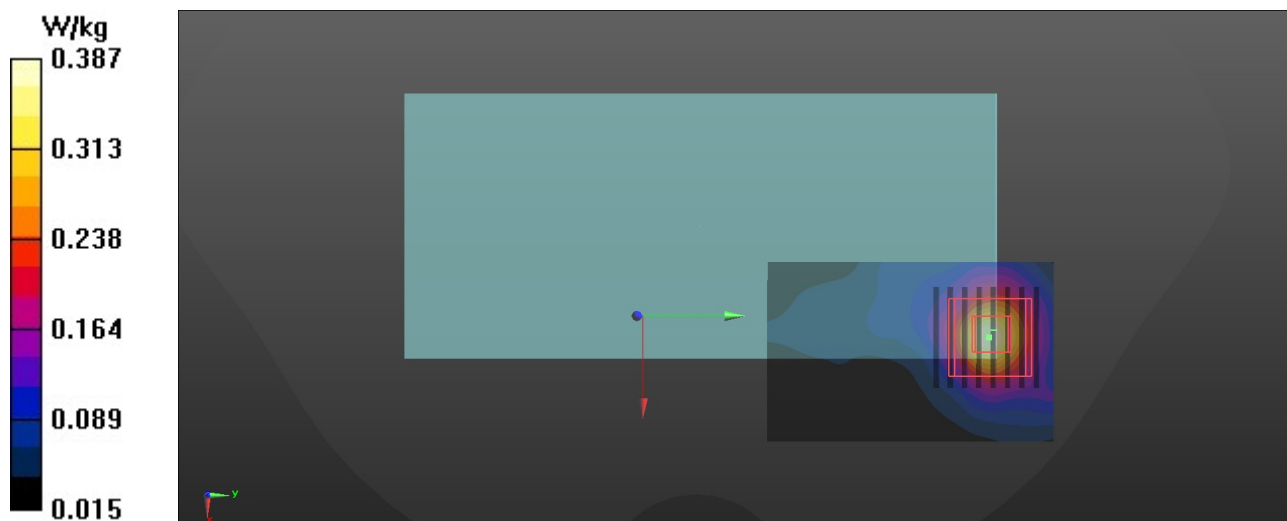

P41 802.11a_Rear Face_1cm_Ch144

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5720 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5720$ MHz; $\sigma = 5.219$ S/m; $\epsilon_r = 35.612$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.98, 4.98, 4.98) @ 5720 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.372 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.852 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.9%

Maximum value of SAR (measured) = 0.345 W/kg

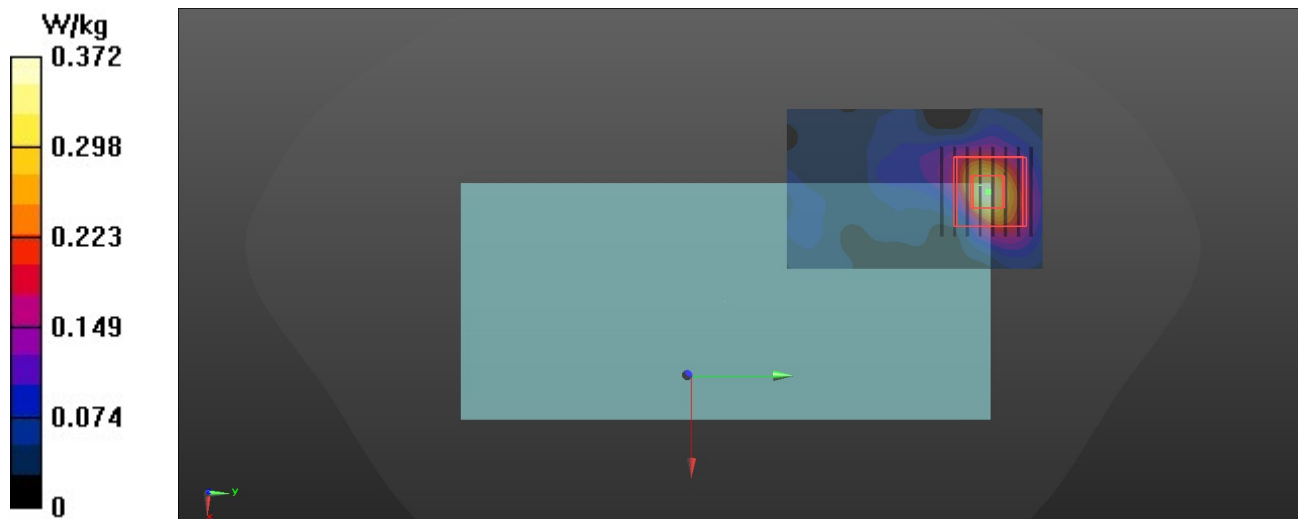

P42 802.11a_Front Face_1cm_Ch165

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5825$ MHz; $\sigma = 5.329$ S/m; $\epsilon_r = 35.468$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(4.98, 4.98, 4.98) @ 5825 MHz; Calibrated: 2023/6/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2023/6/26
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.359 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.833 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.588 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.347 W/kg

