



FCC Test Report

**Test Report
On Behalf of
Shenzhen Huanyang Technology Co., Ltd
For
3 IN 1 WIRELESS CHARGER
Model No.: A100
FCC ID: 2BDY3-A100**

Prepared For : Shenzhen Huanyang Technology Co., Ltd
Room 413, Building 2, Huike Industrial Park, No. 1 Industrial Road, Shilong
Community, Shiyan Street, Bao 'an District, Shenzhen, China

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Nov. 30, 2023 ~ Dec. 07, 2023

Date of Report: Dec. 07, 2023

Report Number: HK2311305782-1E



Test Result Certification

Applicant's Name : Shenzhen Huanyang Technology Co., Ltd
 Address..... : Room 413, Building 2, Huike Industrial Park, No. 1 Industrial Road, Shilong Community, Shiyan Street, Bao 'an District, Shenzhen, China

Manufacturer's Name : Shenzhen Huanyang Technology Co., Ltd
 Address..... : Room 413, Building 2, Huike Industrial Park, No. 1 Industrial Road, Shilong Community, Shiyan Street, Bao 'an District, Shenzhen, China

Product Description

Trade Mark : MANKIW
 Product Name : 3 IN 1 WIRELESS CHARGER
 Model and/or Type Reference: A100

Standards : FCC CFR 47 PART 18

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test :
 Date (s) of performance of tests : **Nov. 30, 2023 ~ Dec. 07, 2023**
 Date of Issue : **Dec. 07, 2023**
 Test Result..... : **Pass**

Testing Engineer : Gary Qian
 (Gary Qian)

Technical Manager : Eden Hu
 (Eden Hu)

Authorized Signatory : Jason Zhou
 (Jason Zhou)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

**Table of Contents****Page**

1 . Test Summary	5
1.1 . Test Procedures and Results	5
1.2 . Information of the Test Laboratory	5
1.3 . Measurement Uncertainty	5
2. General Information	6
2.1. General Description of EUT	6
2.2. Carrier Frequency of Channels	7
2.3. Test Mode	8
2.4. Description of Test Setup	9
2.5. Description of Support Units	10
2.6. Measurement Instruments List	11
3. Conducted Emission Test	12
3.1. Block Diagram of Test Setup	12
3.2. Conducted Power Line Emission Limit	12
3.3. Test Procedure	12
4. Radiated Emissions	15
4.1. Block Diagram of Test Setup	15
4.2. Rules and Specifications	16
4.3. Test Procedure	16
4.4. Test Result	16
5. Antenna Requirement	22
6. Photographs of Test	23
7. Photos of the EUT	25



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Dec. 07, 2023	Jason Zhou



1. Test Summary

1.1. Test Procedures and Results

Description of Test	Section Number	Result
Conducted Emissions Test	18.307	COMPLIANT
Radiated Emission Test	18.305	COMPLIANT

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. Information of the Test Laboratory

Shenzhen HUAK Testing Technology Co., Ltd.
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
 Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:
 A2LA Accreditation Code is 4781.01.
 FCC Designation Number is CA100229.
 Canada IC CAB identifier is CN0045.
 CNAS Registration Number is L9589.

1.3. Measurement Uncertainty

Measurement Uncertainty	
Conducted Emission Expanded Uncertainty	= 2.71dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	= 3.90dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	= 4.28dB, k=2



2. General Information

2.1. General Description of EUT

Equipment:	3 IN 1 WIRELESS CHARGER
Model Name:	A100
Series Models:	N/A
Model Difference:	N/A
Trade Mark:	MANKIW
FCC ID:	2BDY3-A100
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Operation Frequency:	112KHz~205KHz
Test Frequency:	Mobile Phone: 130KHz Earphone: 128KHz Watch: 128KHz
Modulation Type:	ASK
Power Source:	Input: 9V/2A, 12V/1.5A Phone Output : 5W/7.5W/10W/15W Earphone Output : 3W(Max) iWatch Output: 3W(Max)
Power Rating:	Input: 9V/2A, 12V/1.5A Phone Output : 5W/7.5W/10W/15W Earphone Output : 3W(Max) iWatch Output: 3W(Max)
Note: The transfer system includes three coils, 3 coils can work individually or can work at the same time. All the situation has been tested, only the worst situation was recorded in the report.	



2.2. Carrier Frequency of Channels

Operation Frequency each of channel	
Channel	Frequency
01	130KHz
02	128KHz
03	128KHz



2.3. Test Mode


Test Item	Test Mode	Description
Radiated & Conducted Test Cases	Mode 1	AC/DC Adapter + EUT + Earphones (Battery Status: <1%) + Wireless load 1 (Full load) + Wireless load 2 (Full load)
	Mode 2	AC/DC Adapter + EUT + Earphones (Battery Status: <50%) + Wireless load 1 (Half load) + Wireless load 2 (Full load)
	Mode 3	AC/DC Adapter + EUT + Earphones (Battery Status: >95%) + Wireless load 1 (Null load) + Wireless load 2 (Full load)
	Mode 4	AC/DC Adapter + EUT + Earphones (Battery Status: <1%) + Wireless load 1 (Full load) + Wireless load 2 (Half load)
	Mode 5	AC/DC Adapter + EUT + Earphones (Battery Status: <50%) + Wireless load 1 (Half load) + Wireless load 2 (Half load)
	Mode 6	AC/DC Adapter + EUT + Earphones (Battery Status: >95%) + Wireless load 1 (Null load) + Wireless load 2 (Half load)
	Mode 7	AC/DC Adapter + EUT + Earphones (Battery Status: <1%) + Wireless load 1 (Full load) + Wireless load 2 (Null load)
	Mode 8	AC/DC Adapter + EUT + Earphones (Battery Status: <50%) + Wireless load 1 (Half load) + Wireless load 2 (Null load)
	Mode 9	AC/DC Adapter + EUT + Earphones (Battery Status: >95%) + Wireless load 1 (Null load) + Wireless load 2 (Null load)
	Mode 10	AC/DC Adapter+ EUT + Earphones (Battery Status: <1%)
	Mode 11	AC/DC Adapter+ EUT + Earphones (Battery Status: <50%)
	Mode 12	AC/DC Adapter+ EUT + Earphones (Battery Status: >95%)
	Mode 13	AC/DC Adapter + EUT + Wireless load 1 (Full load)
	Mode 14	AC/DC Adapter + EUT + Wireless load 1 (Half load)
	Mode 15	AC/DC Adapter + EUT + Wireless load 1 (Null load)
	Mode 16	AC/DC Adapter + EUT + Wireless load 2 (Full load)
	Mode 17	AC/DC Adapter + EUT + Wireless load 2 (Half load)
	Mode 18	AC/DC Adapter + EUT + Wireless load 2 (Null load)
	Mode 19	AC/DC Adapter + EUT (Null Load)

- Note: 1. All modes and configurations above have been tested, the worst-case configuration is Mode 1.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode, including the mobile phone in vertical and horizontal positions.
3. The Mobile Phone provided by Lab.
4. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.



2.4. Description of Test Setup

Operation of EUT during Testing:

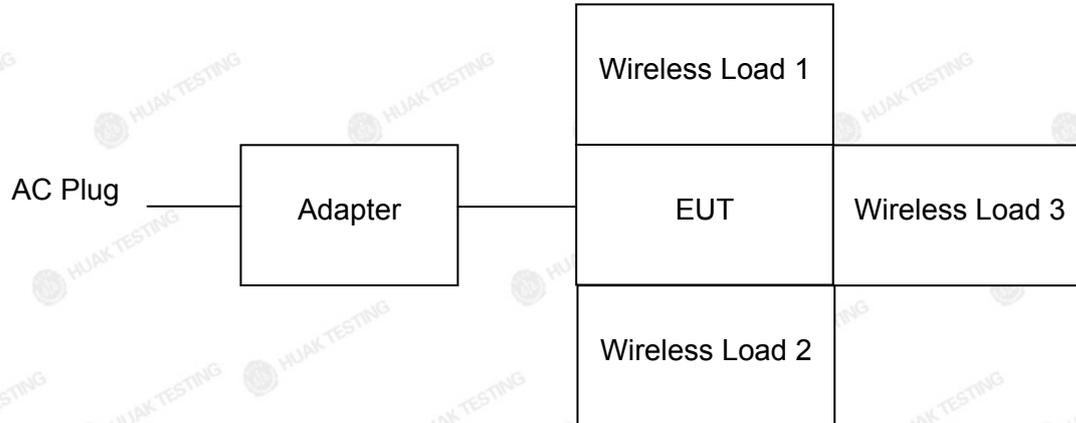

The sample was placed (0.8m (30MHz~1GHz), 0.8m (9KHz~30MHz)) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



2.5. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Specification	Remark
1	3 IN 1 WIRELESS CHARGER	MANKIW	A100	N/A	EUT
2	USB Cable	N/A	N/A	1.0m	Accessory
3	Adapter	N/A	Q5004	Input: AC100-240V, 50/60Hz, 0.6A (Max) Output: DC5.0V/3.0A or 9.0V/2.22A or 12.0/1.67A, Total Output: 20W (Max)	Accessory
5	Wireless Load 1	YBZ	N/A	Wireless input 15W	Peripheral
6	Wireless Load 2	YBZ	N/A	Wireless input 3W	Peripheral
7	Wireless Load 3	YBZ	N/A	Wireless input 3W	Peripheral

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



2.6. Measurement Instruments List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Feb. 17, 2023	1 Year
2.	Receiver	R&S	ESR-7	HKE-005	Feb. 17, 2023	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 17, 2023	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 17, 2023	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Feb. 17, 2023	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 17, 2023	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Feb. 17, 2023	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 17, 2023	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 17, 2023	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Feb. 17, 2023	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Feb. 17, 2023	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	N/A	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Feb. 17, 2023	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Feb. 17, 2023	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Feb. 17, 2023	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 09, 2021	3 Year
19.	10dB Attenuator	Schwarzbeck	VTSD9561F	HKE-153	Feb. 17, 2023	1 Year


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3. Conducted Emission Test

3.1. Block Diagram of Test Setup

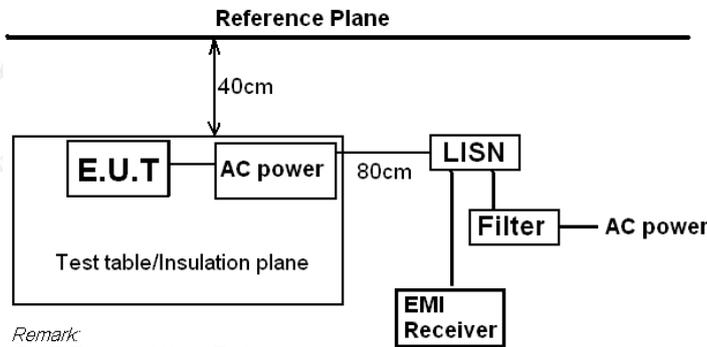

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

3.2. Conducted Power Line Emission Limit

According to FCC Part 18.307(b)

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §18.307 Line Conducted Emission Limit is same as above table.

3.3. Test Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.




3.4. Test Result

PASS

All the test modes completed for test. Only the worst result was reported as below:

Test Specification: Line

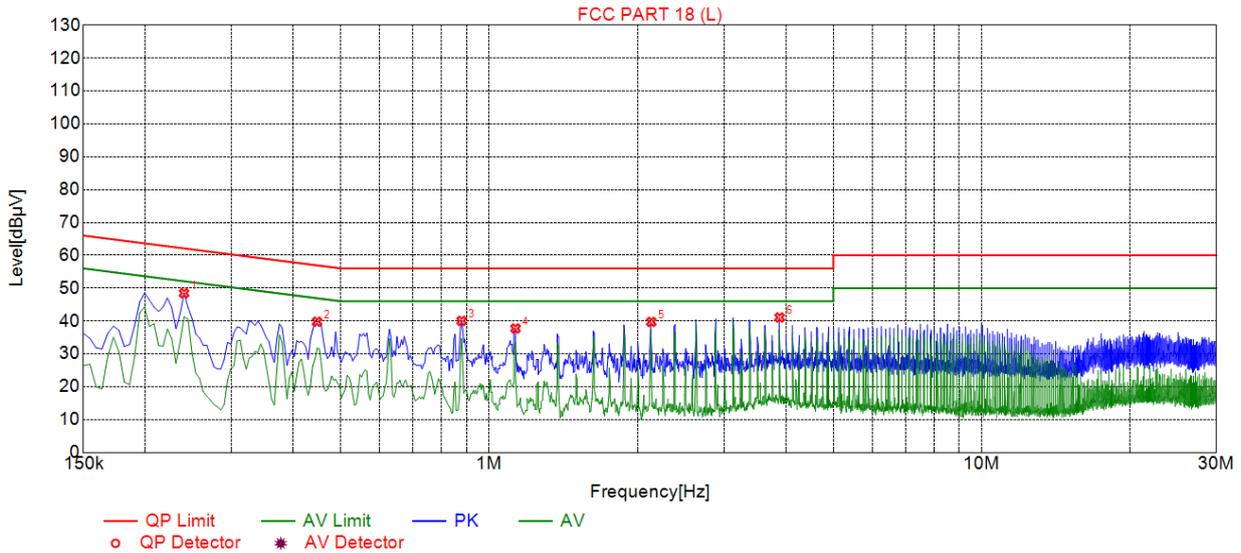

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.2400	48.48	20.03	62.10	13.62	28.45	PK	L
2	0.4470	39.79	20.04	56.93	17.14	19.75	PK	L
3	0.8790	40.05	20.06	56.00	15.95	19.99	PK	L
4	1.1310	37.74	20.08	56.00	18.26	17.66	PK	L
5	2.1345	39.73	20.16	56.00	16.27	19.57	PK	L
6	3.8895	41.08	20.25	56.00	14.92	20.83	PK	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

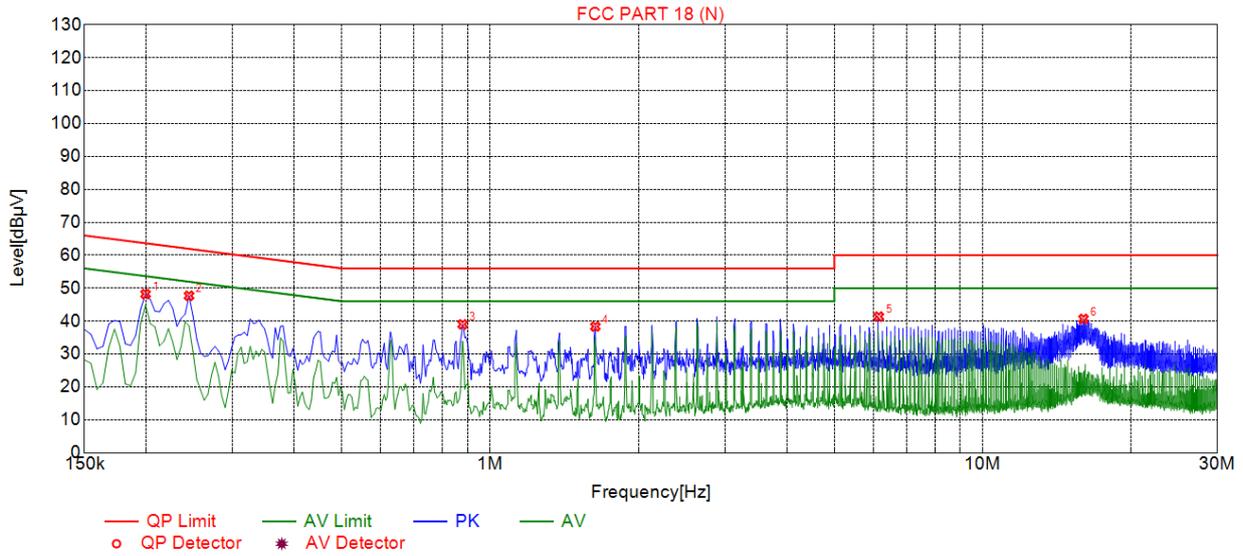

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.1995	48.20	20.03	63.63	15.43	28.17	PK	N
2	0.2445	47.69	20.03	61.94	14.25	27.66	PK	N
3	0.8790	39.01	20.06	56.00	16.99	18.95	PK	N
4	1.6350	38.34	20.12	56.00	17.66	18.22	PK	N
5	6.1575	41.35	20.23	60.00	18.65	21.12	PK	N
6	16.0350	40.66	19.98	60.00	19.34	20.68	PK	N



Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

4. Radiated Emissions

4.1. Block Diagram of Test Setup

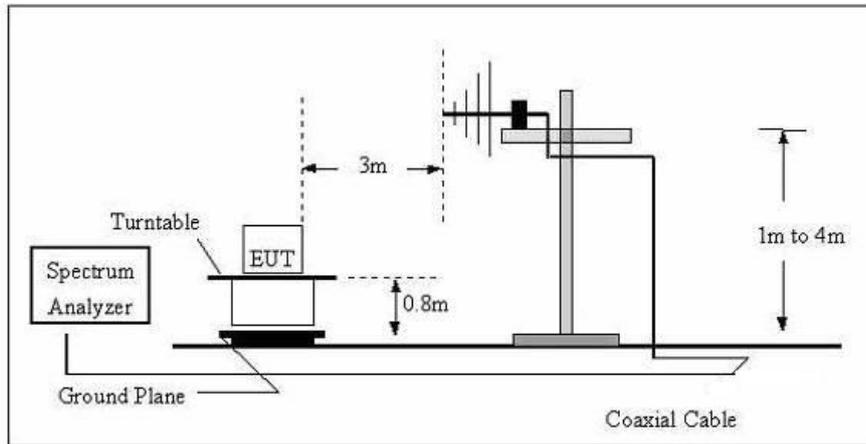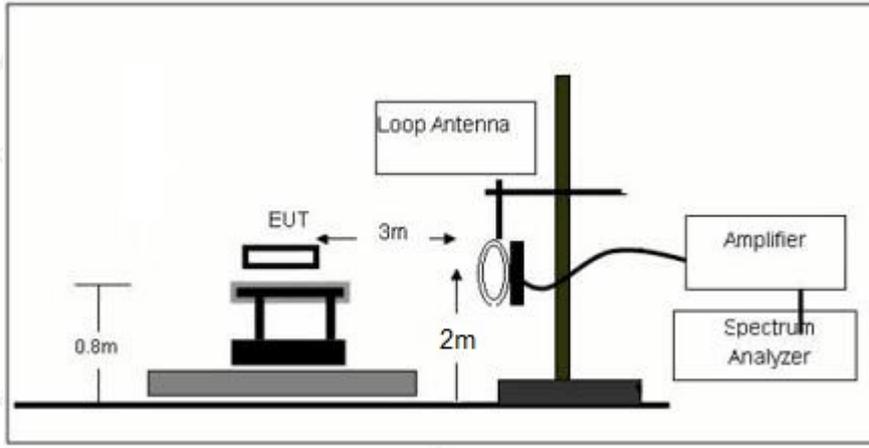



4.2. Rules and Specifications

Except as provided elsewhere in this Subpart 18.305 (b), the field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following table:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
(miscellaneous)				
	Any non-ISM frequency	Below 500 500 or more	15 15 × SQRT(power/500)	300 1300

Remark:

- (1) Emission level dBuV/m for 0.009~30MHz = 20log (15) + 40log (300/3) dBuV/m;
- (2) Calculated according FCC 18.305.
- (3) The smaller limit shall apply at the cross point between two frequency bands.
- (4) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.3. Test Procedure

Measurement distance 3m

For the measurement range up to 30MHz in the following plots the field strength result from 3m Distance measurements are extrapolated to 300m and 30m distance respectively, by 40dB/decade, Per antenna factor scaling.

Measurements below 1000MHz are performed with a peak detector and compared to average limits, Measurements with an average detector are not required.

Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.


4.4. Test Result

PASS



Mobile phone:

For 9KHz - 30MHz

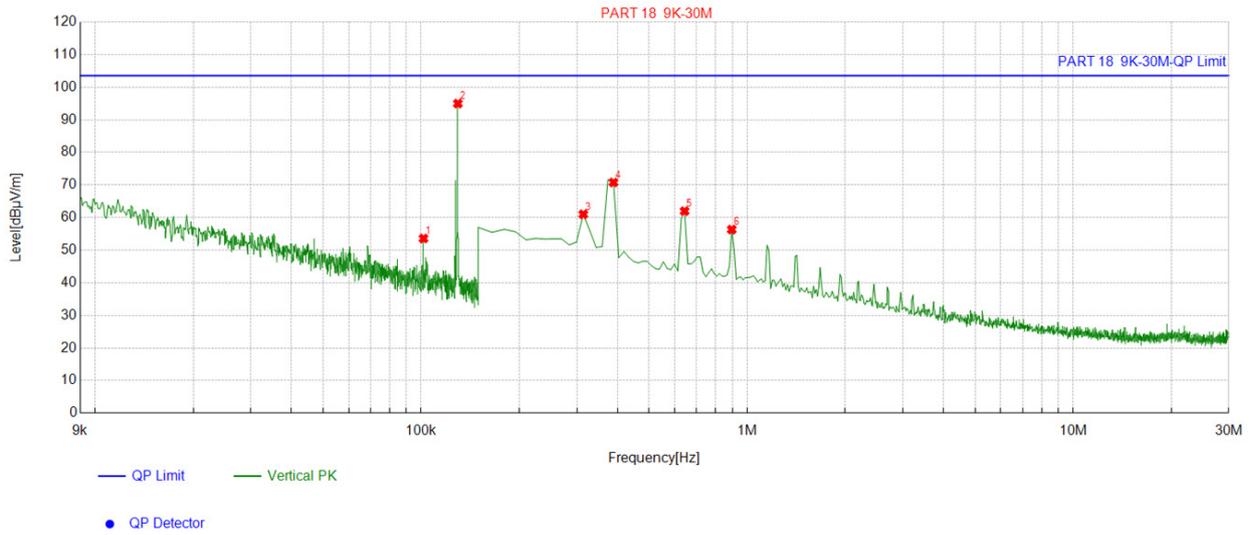


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.101613	13.82	39.77	53.59	103.50	49.91
2	0.129545	13.78	81.20	94.98	103.50	8.52
3	0.314257	13.70	47.31	61.01	103.50	42.49
4	0.388919	13.77	57.01	70.78	103.50	32.72
5	0.642771	13.75	48.23	61.98	103.50	41.52
6	0.896623	14.12	42.21	56.33	103.50	47.17

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



Earphone:

For 9KHz - 30MHz

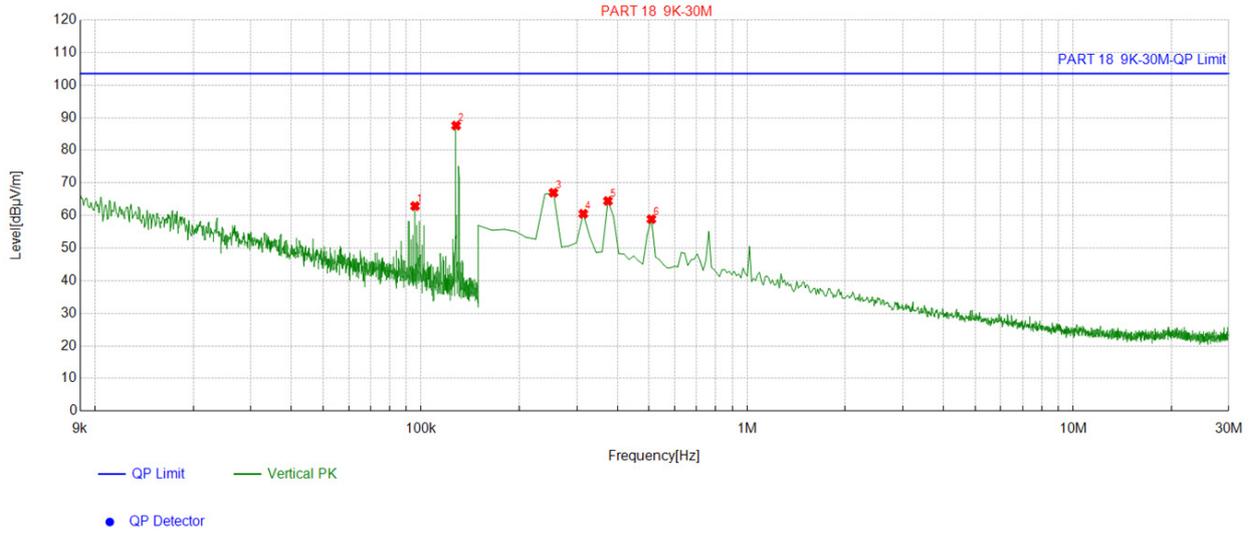


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.095758	13.97	48.92	62.89	103.50	40.61
2	0.127993	13.78	73.81	87.59	103.50	15.91
3	0.254527	13.68	53.31	66.99	103.50	36.51
4	0.314257	13.70	46.83	60.53	103.50	42.97
5	0.373987	13.76	50.70	64.46	103.50	39.04
6	0.508379	13.73	45.16	58.89	103.50	44.61

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Watch:

For 9KHz - 30MHz

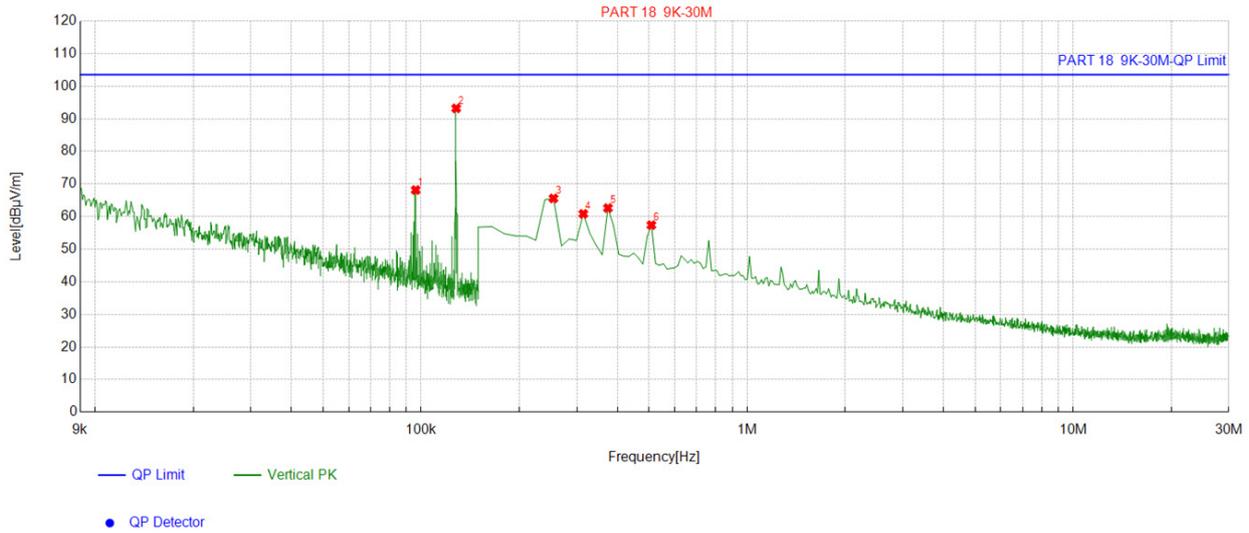


Suspected List						
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]
1	0.096182	13.97	54.19	68.16	103.50	35.34
2	0.128064	13.78	79.43	93.21	103.50	10.29
3	0.254527	13.68	51.90	65.58	103.50	37.92
4	0.314257	13.70	47.14	60.84	103.50	42.66
5	0.373987	13.76	48.87	62.63	103.50	40.87
6	0.508379	13.73	43.66	57.39	103.50	46.11

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



For 30MHz-1GHz

Antenna polarity: H

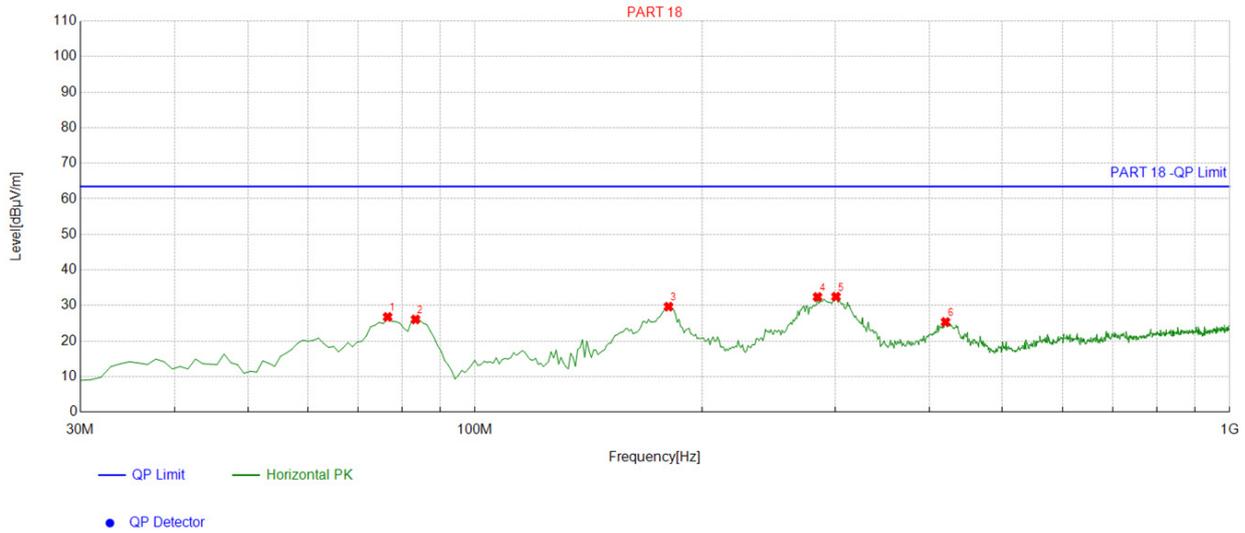


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	76.606607	-17.08	43.86	26.78	63.50	36.72	100	175	Horizontal
2	83.403403	-17.71	43.78	26.07	63.50	37.43	100	162	Horizontal
3	180.50050	-17.08	46.75	29.67	63.50	33.83	100	113	Horizontal
4	284.39439	-12.59	45.00	32.41	63.50	31.09	100	150	Horizontal
5	300.90090	-11.91	44.38	32.47	63.50	31.03	100	108	Horizontal
6	420.33033	-8.75	34.11	25.36	63.50	38.14	100	301	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



Antenna polarity: V

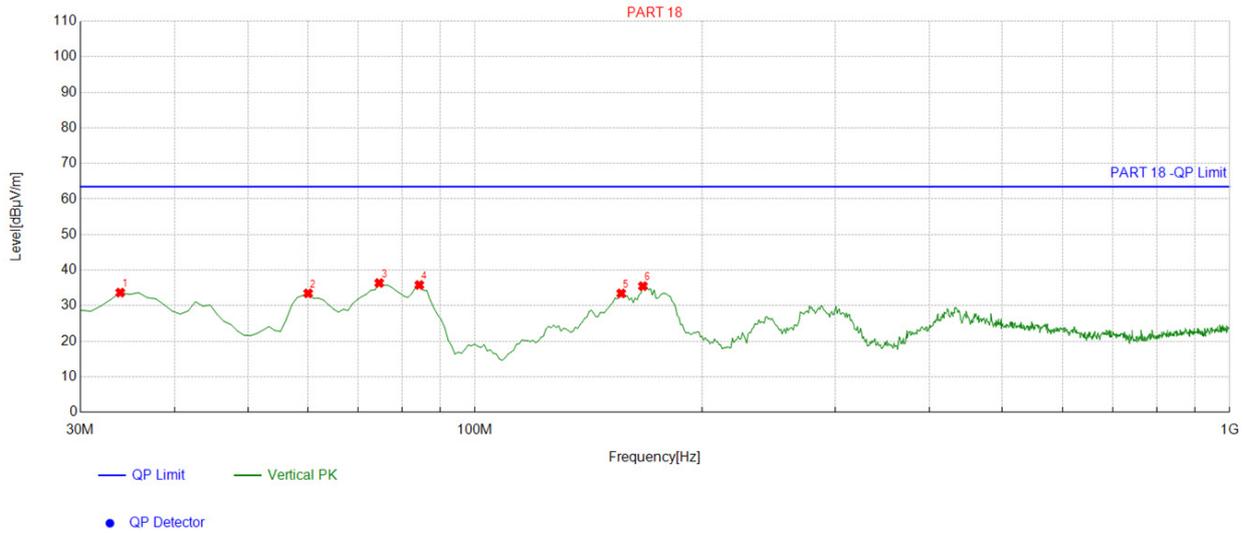

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.883884	-16.38	50.06	33.68	63.50	29.82	100	209	Vertical
2	60.1001	-14.37	47.84	33.47	63.50	30.03	100	311	Vertical
3	74.664665	-16.60	52.98	36.38	63.50	27.12	100	282	Vertical
4	84.374374	-17.86	53.68	35.82	63.50	27.68	100	204	Vertical
5	156.22622	-18.26	51.72	33.46	63.50	30.04	100	145	Vertical
6	166.90690	-16.93	52.42	35.49	63.50	28.01	100	91	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;

5. Antenna Requirement


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is Coil Antenna, which permanently attached. It conforms to the standard requirements. The directional gains of antenna used for transmitting is 0dBi.



Antenna

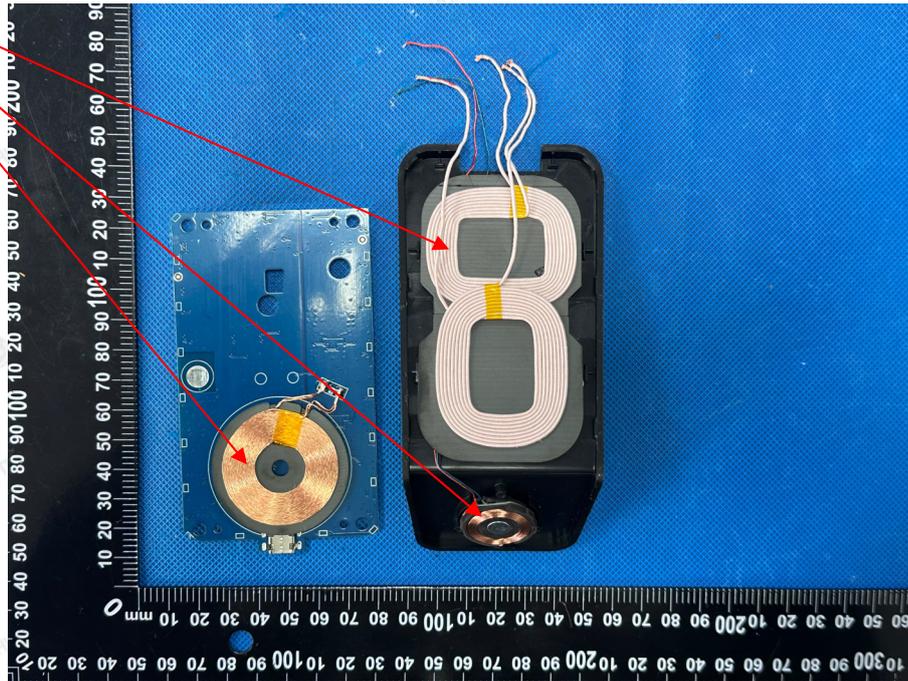



6. Photographs of Test

Radiated Emission

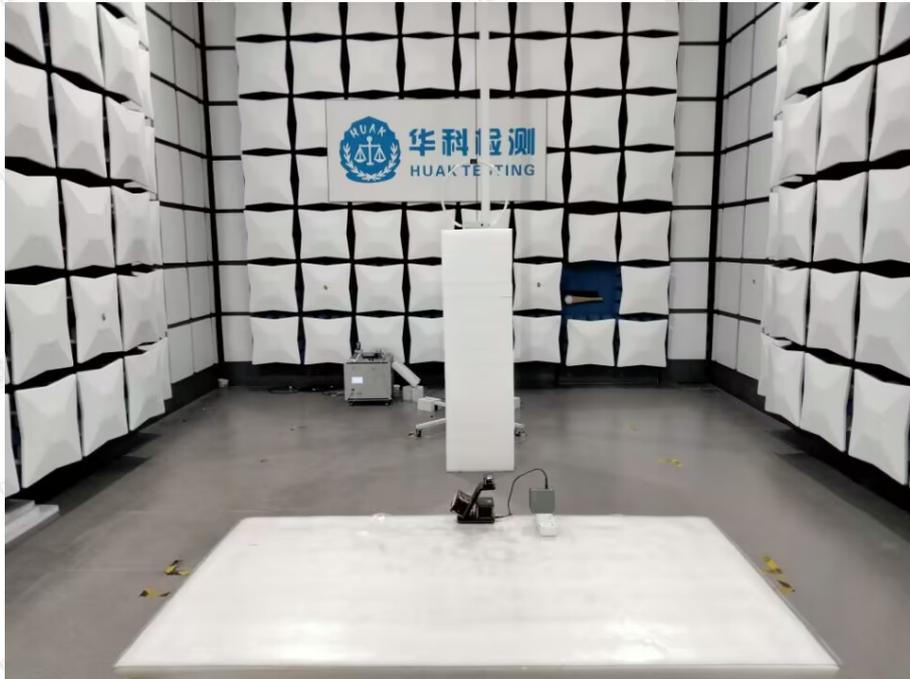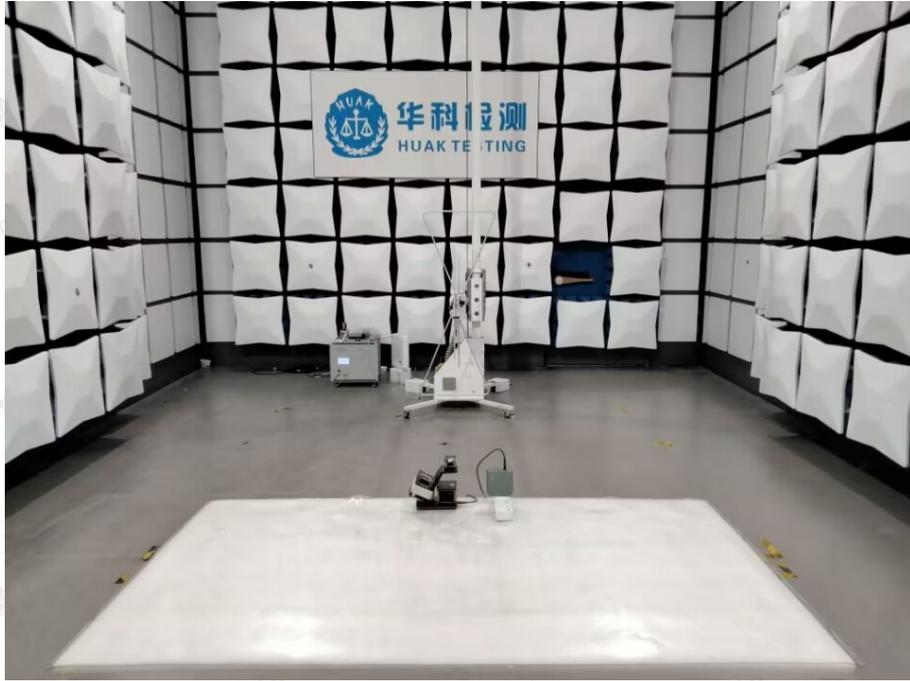

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



Conducted Emission



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Addr: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



7. Photos of the EUT

Reference to the report: ANNEX A of external photos and ANNEX B of internal photos.

-----End of test report-----