

RF Antenna

Performance Parameter

Testing Report

Index


- 1. Testing Item & Equipments**
- 2. Antenna Structure**
- 3. Gain Test**
- 4. Test Results**

Date: 2023-09-22

Tester: M A R K



1. Testing Item & Equipments

.Chamber Size: 8 x4 x4 m³
 .Freq. Range: 0.7 ~ 6.0 GHz .Double Ridge
 Horn Antenna x 2
 .VNA: Agilent 5071B
 .GSM Tester: R&S CMU200 / Agilent 8960 .3D
 Turning Table and Positioner
 .ADT Solution 3D Testing Software .CTIA 3D
 EIRP 13D TRP / 3D TIS Testing

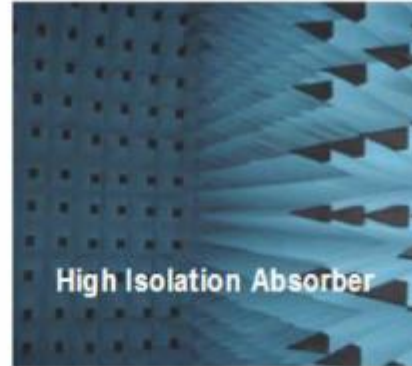


High Isolation Absorber

Angular Positioner Composition

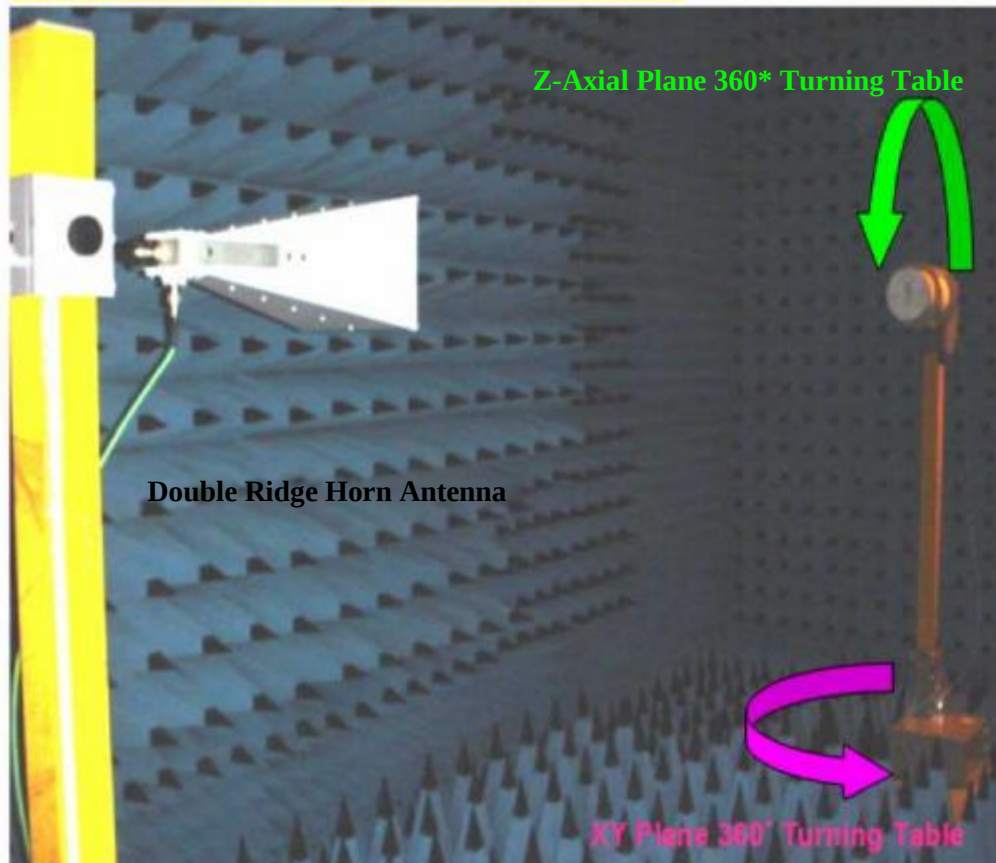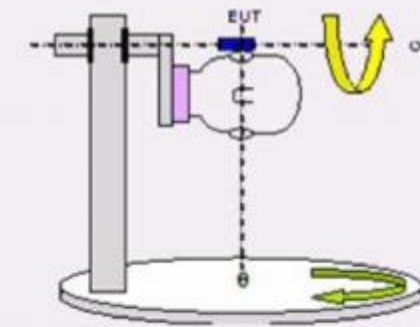

Double Ridge Horn Antenna

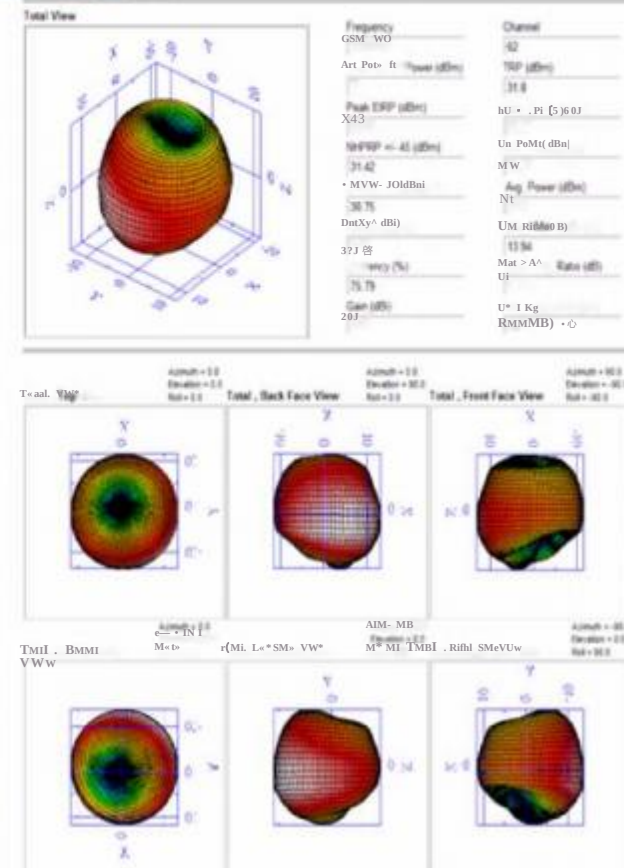

2. Antenna Structure



3. Gain Test

Location: Chamber


Date: 2023/09/22

Time:下午 4:37:18


Temperatuer (七) : 25.00

Humidity (%): 65.00


Approved by:

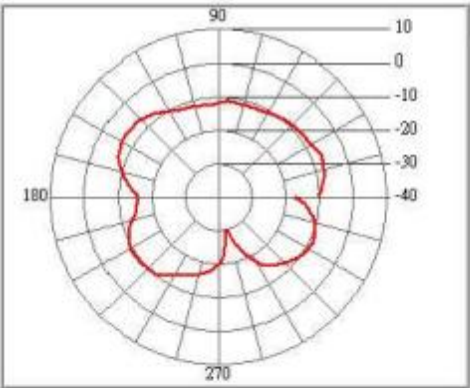


2390

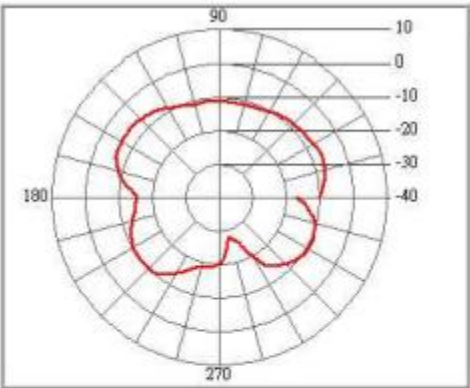


2400

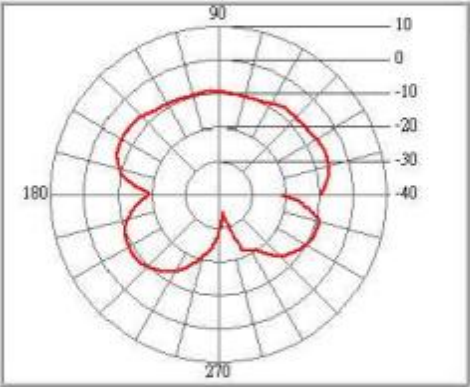


2410

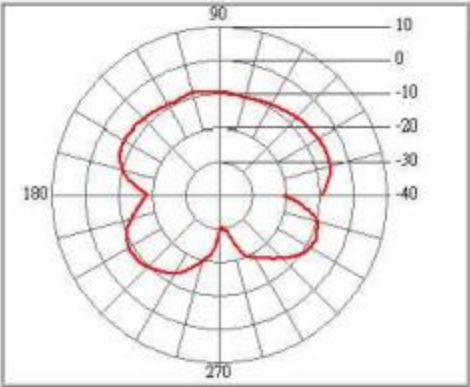

2420

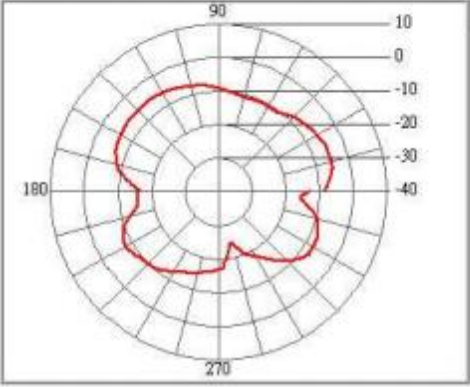


2430

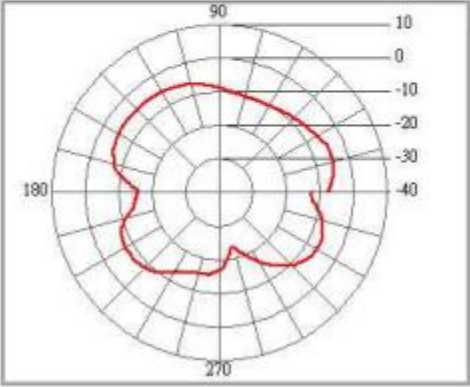


2440


Freq. (MHz)	2390	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	-5.47	-6.21	-6.36	-6.58	-5.69	-5.41	-4.71	-4.6	-5.22	-4.74	-4.9	-4.69
Peak Degree	147	147	147	158	22	22	22	22	13	22	147	137
AV Gain (dBi)	-10.64	-10.4	-10.61	-10.67	-9.95	-9.86	-9.36	-9.05	-9.06	-8.42	-8.81	-8.65

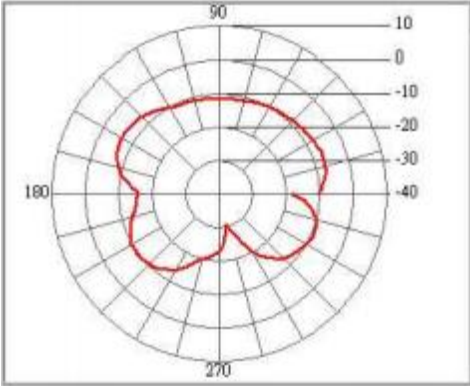


2450

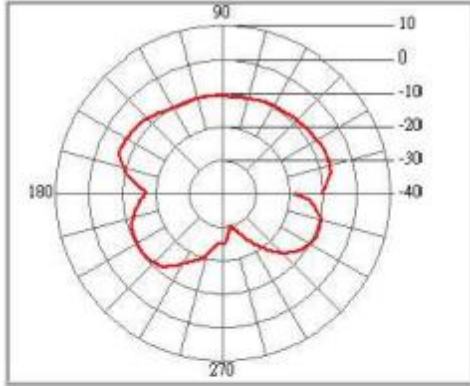


2460

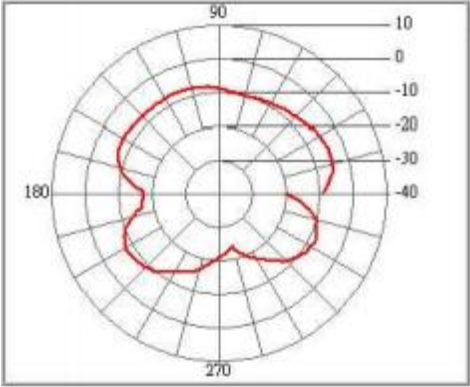


2470

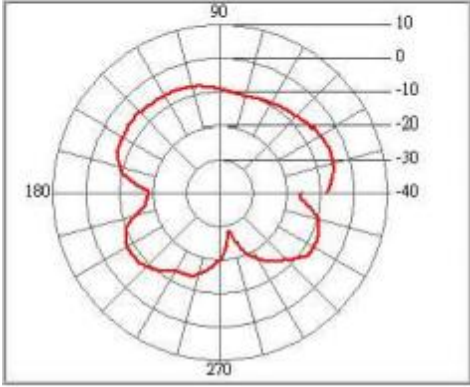

2480

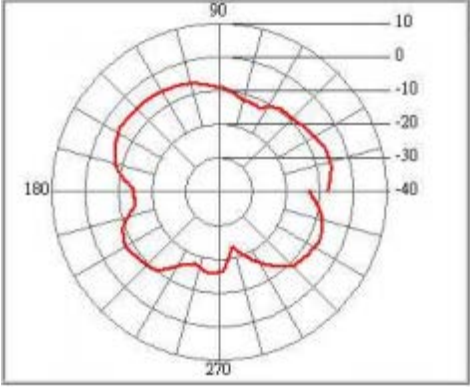


2490

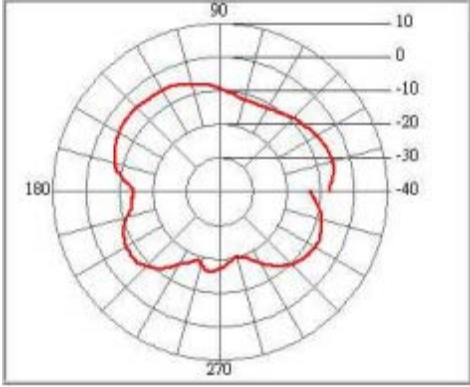


2500

Antenna : 2400MHz Antenna//XZ Remark :
H-Plane//H-Pol rested by : Antenna 3D Lab

Location: Chamber Date: 2023/09/22 Time:下午
Temperatuer (七): 25.00 Humidity (%): 65.00 02:34:46

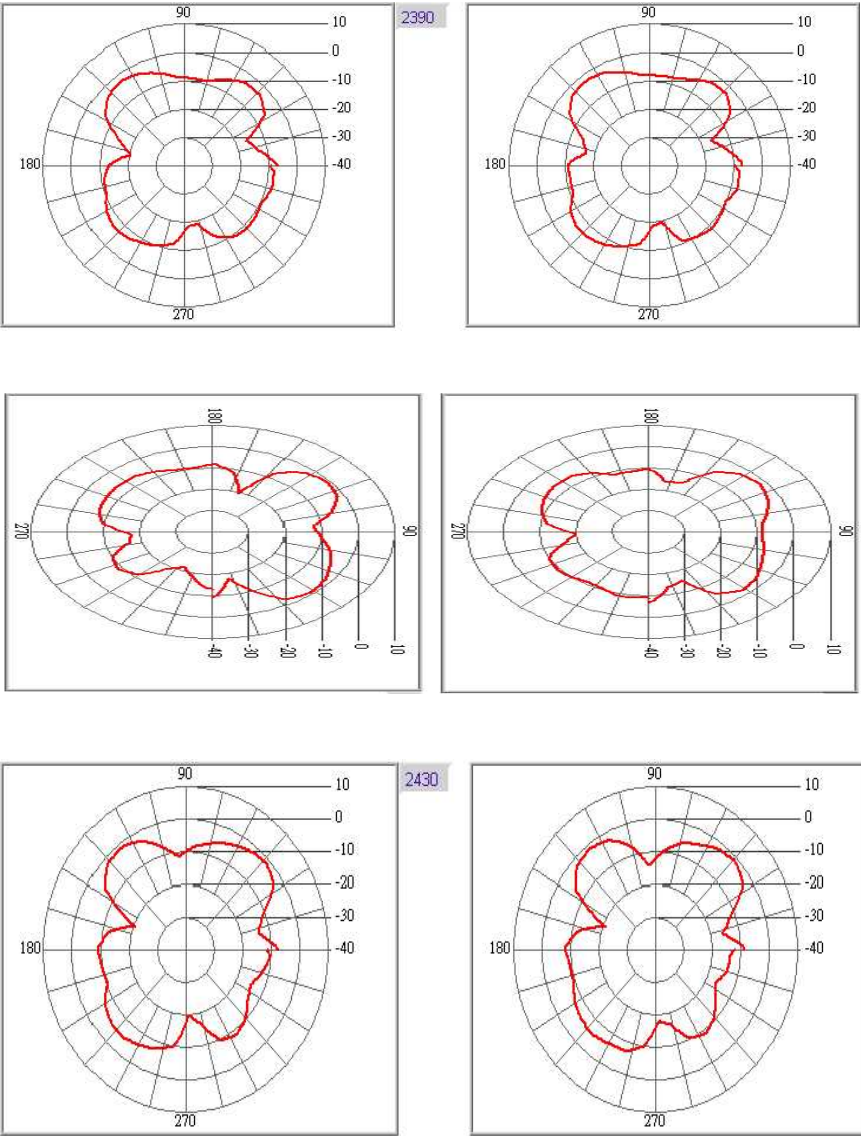

Freq. (MHz)	2390	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	-5.47	-6.21	-6.36	-6.58	-5.69	-5.41	-4.71	-4.6	-5.22	-4.74	-4.9	-4.69
Peak Degree	147	147	147	158	22	22	22	22	13	22	147	137
AV Gain (dBi)	-10.64	-10.4	-10.61	-10.67	-9.95	-9.66	-9.36	-9.05	-9.06	-8.42	-8.81	-8.65

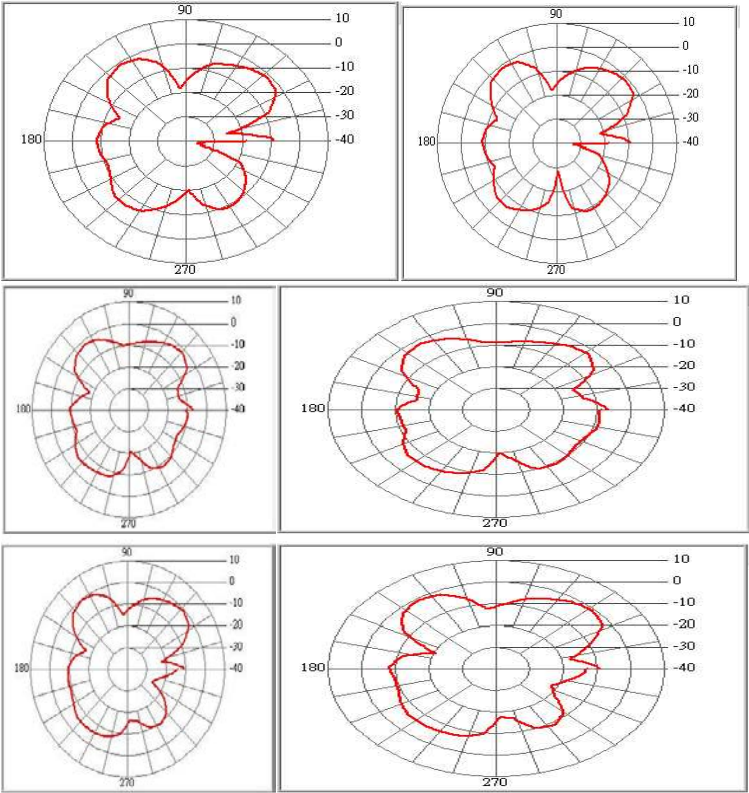


Antenna : 2400MHz Antenna//XZ
Remark : H-Plane//V-Pol
Tested by : Antenna 3D Lab

深圳市双云合科技有限公司


Location: Chamber
Temperatuer (七) : 25.00

Date: 2023/09/22
Humidity (%): 65.00


Time:下午 04:37:18
Approved by:

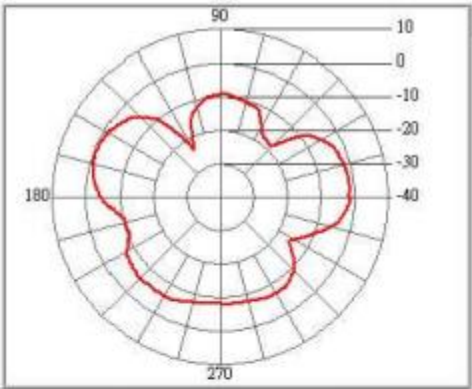


2390

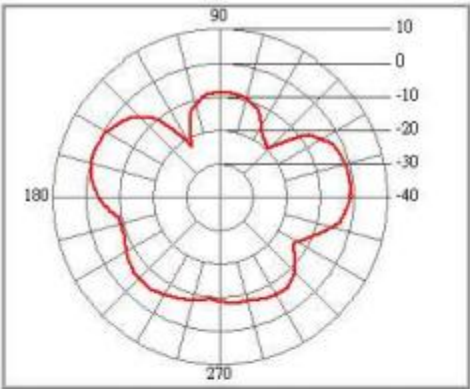


2400

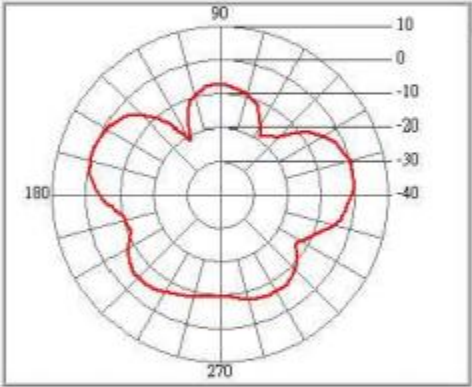


2410

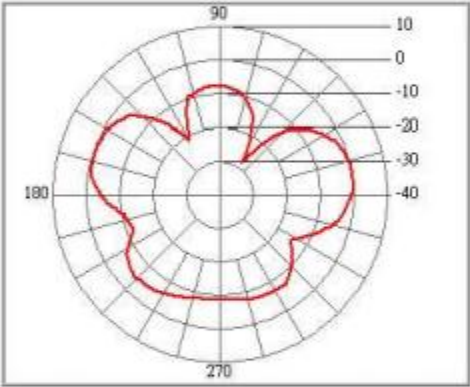

2420

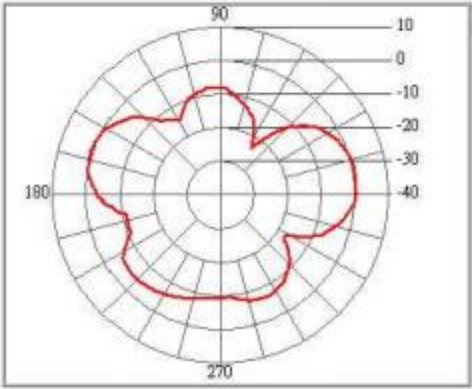


2430

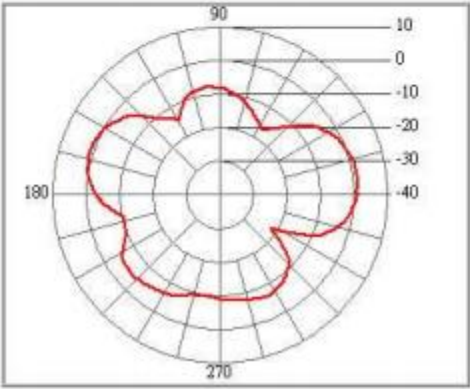


2440


Freq. (MHz)	2390	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	-0.7	0.09	-0.09	-0.15	0.09	0.14	0.61	0.88	0.72	1.4	1.04	1.01
Peak Degree	160	161	160	161	14	4	4	14	14	4	14	4
AV Gain (dBi)	-6.05	-5.6	-5.75	-5.89	-5.43	-5.54	-5.07	-4.86	-5.01	-4.6	-5.04	-5.31

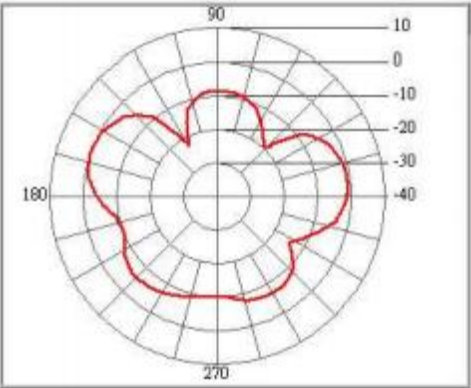


2450

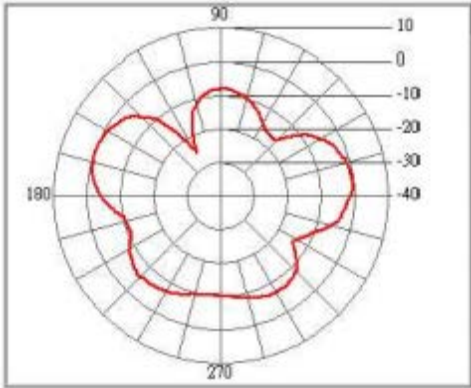


2460

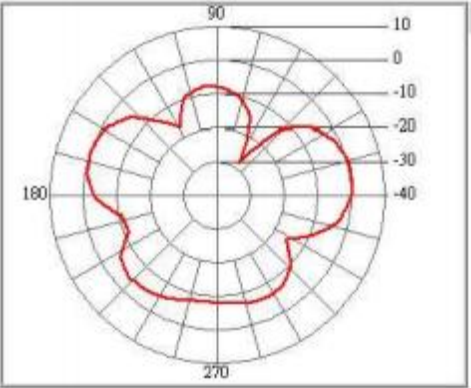


2470

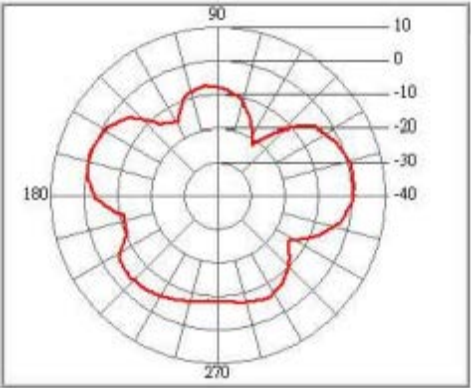

2480

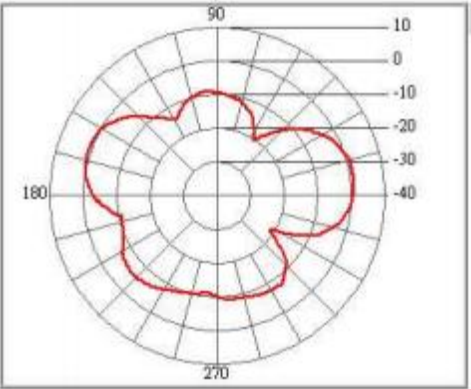

2490

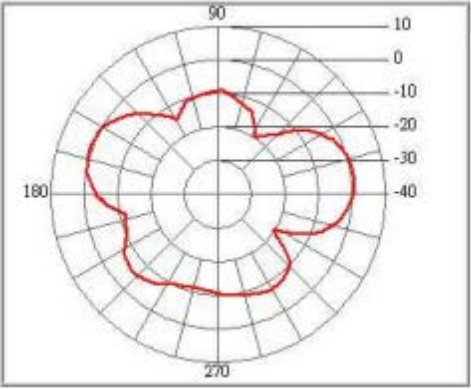

2500


Antenna : 2400MHz Antenna//XY
Remark : H-Plane//H-Pol Tested
by : Antenna 3D Lab

深圳市双云合科技有限公司


Location: Chamber
Temperatuer (七) : 25.00

Date: 2023/09/22
Humidity (%): 65.00


Time:下午 04:37:18
Approved by:

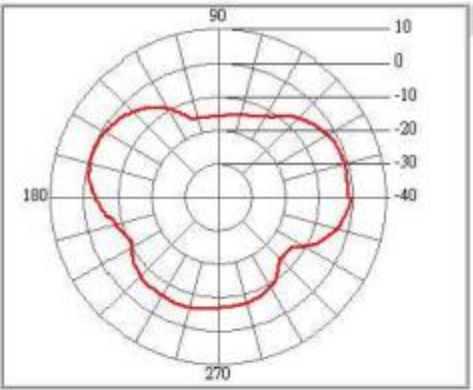


2390

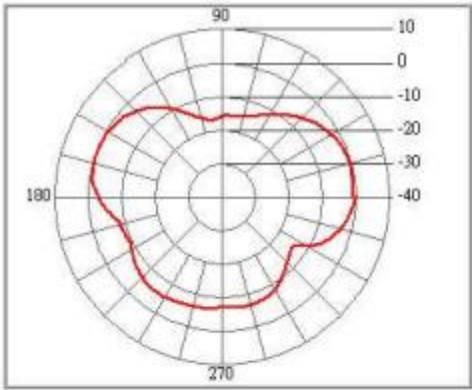


2400

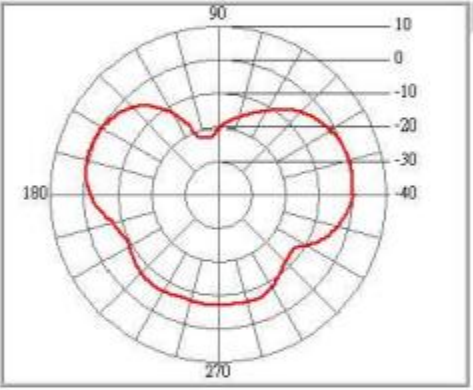


2410

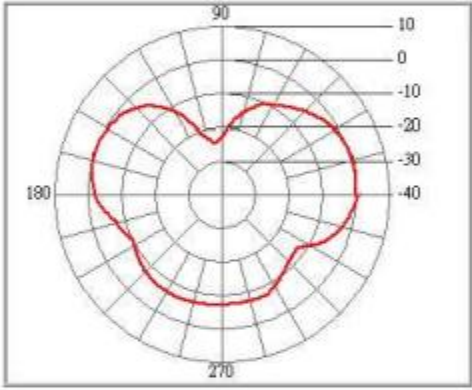

2420

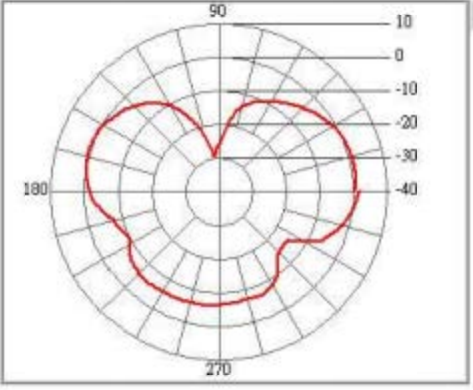


2430

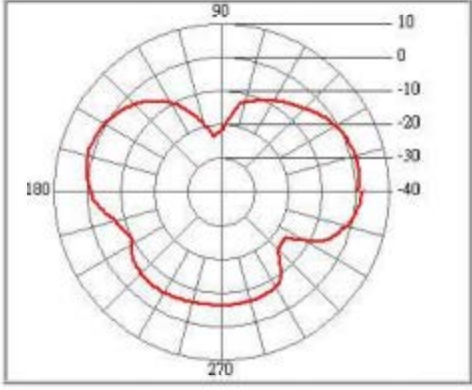


2440


Freq. (MHz)	2390	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	-0.28	-0.07	-0.1	0.11	0.59	0.65	1.06	1.81	1.81	2.16	1.81	1.58
Peak Degree	360	360	162	162	14	15	14	360	360	360	360	360
AV Gain (dBi)	-5.21	-4.91	-4.98	-5	-4.53	-4.53	-4.17	-3.94	-4.07	-3.57	-4.01	-4.17

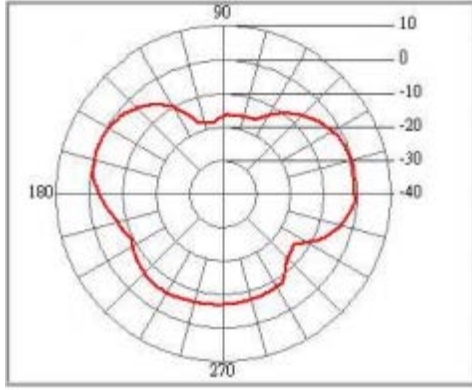


2450

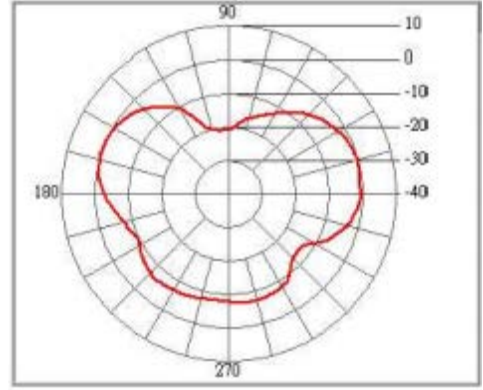


2460

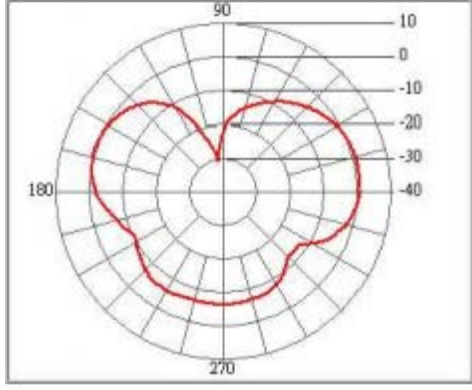


2470

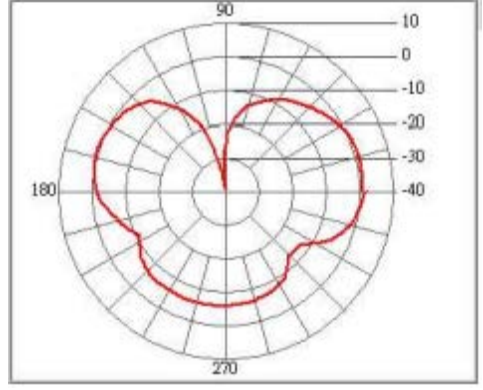

2480

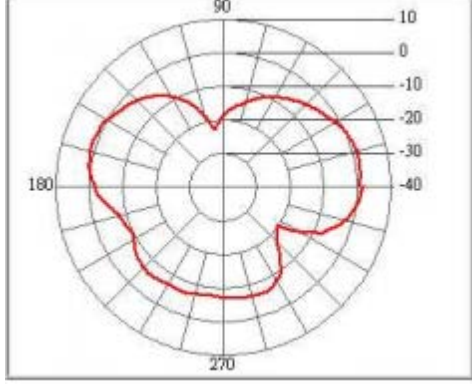

2490

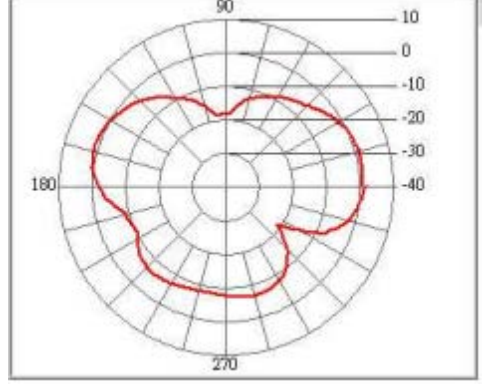

2500


Antenna : 2400MHz Antenna//XY
Remark : H-Plane//V-Pol
Tested by : Antenna 3D Lab

深圳市双云合科技有限公司


Location: Chamber
Temperatuer (七) : 25.00

Date: 2023/09/22
Humidity (%): 65.00


Time:下午 04:37:12
Approved by:

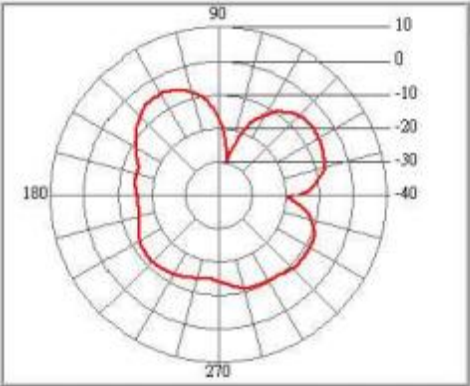


2390

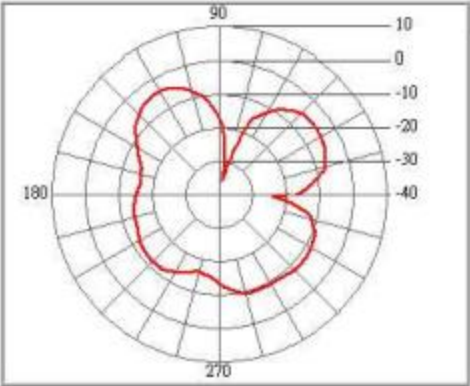


2400

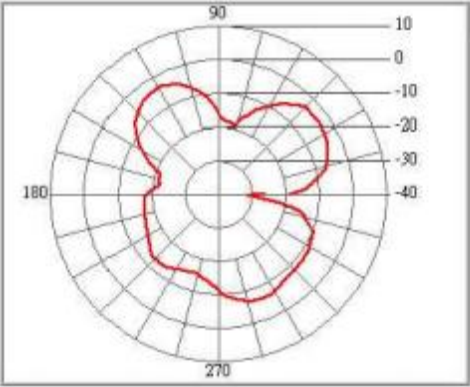


2410

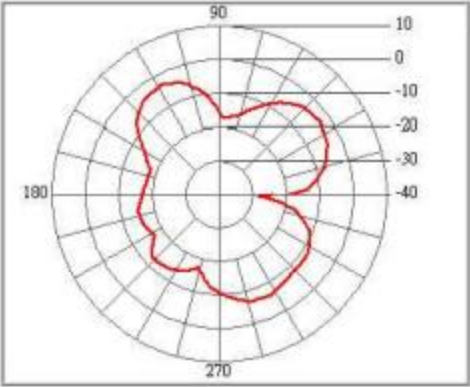

2440

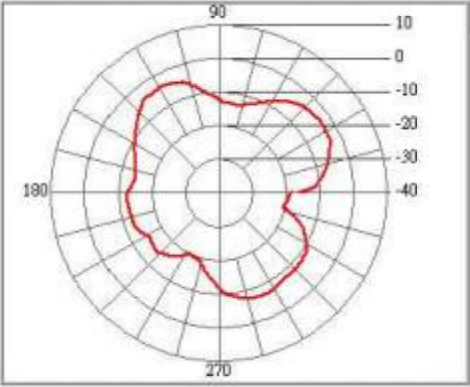


2470

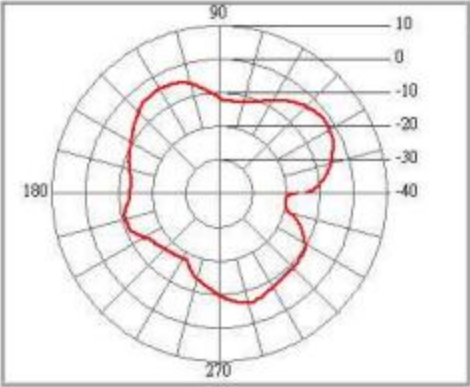

2480

Freq. (MHz)	2390	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	-4.96	-4.27	-4.23	-4.27	-3.26	-3.09	-2.64	-2.57	-3.06	-1.66	-1.87	-1.59
Peak Degree	119	119	119	35	35	35	35	35	35	35	35	35
AV Gain (dBi)	-10.05	-9.64	-9.75	-9.65	-8.89	-8.83	-8.52	-8.37	-8.7	-8.12	-8.38	-8.24

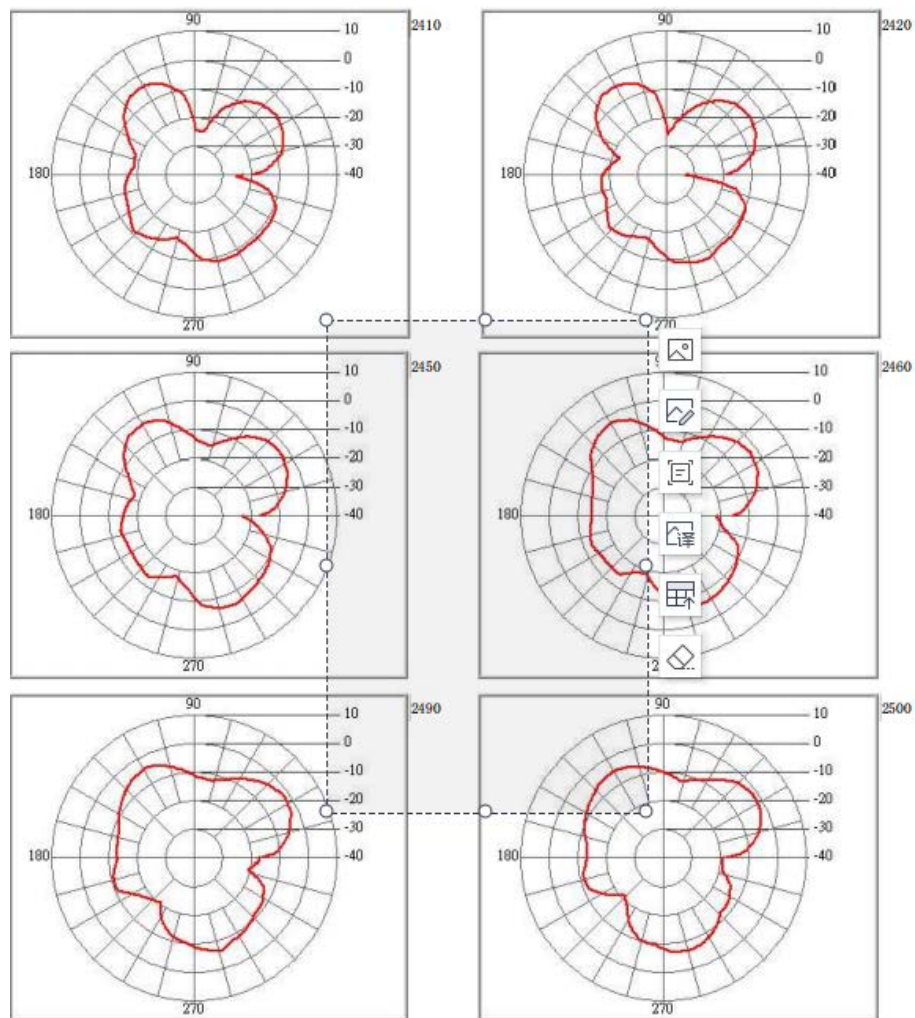

深圳市双云合科技有限公司

Antenna :2400MHz Antenna//YZ
 Remark : H-Plane//H-Pol Tested
 by : Antenna 3D Lab

Location:Chamber

Temperatuer (t): 25.00


Date: 202211/10

Humidity (%): 65.00

Time:下午 04:37

Approved by:

Freq. (MHz)	2390	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Peak Gain (dBi)	-1.51	-1.27	-1.16	-0.94	-0.57	-0.57	-0.45	-0.3	-0.41	0.06	-0.31	-0.45
Peak Degree	0	139	129	129	130	129	129	129	129	129	129	129
AV Gain (dBi)	-5.35	-5.08	-5.12	-4.93	-4.64	-4.87	-4.77	-4.73	-4.96	-4.6	-5.03	-5.19

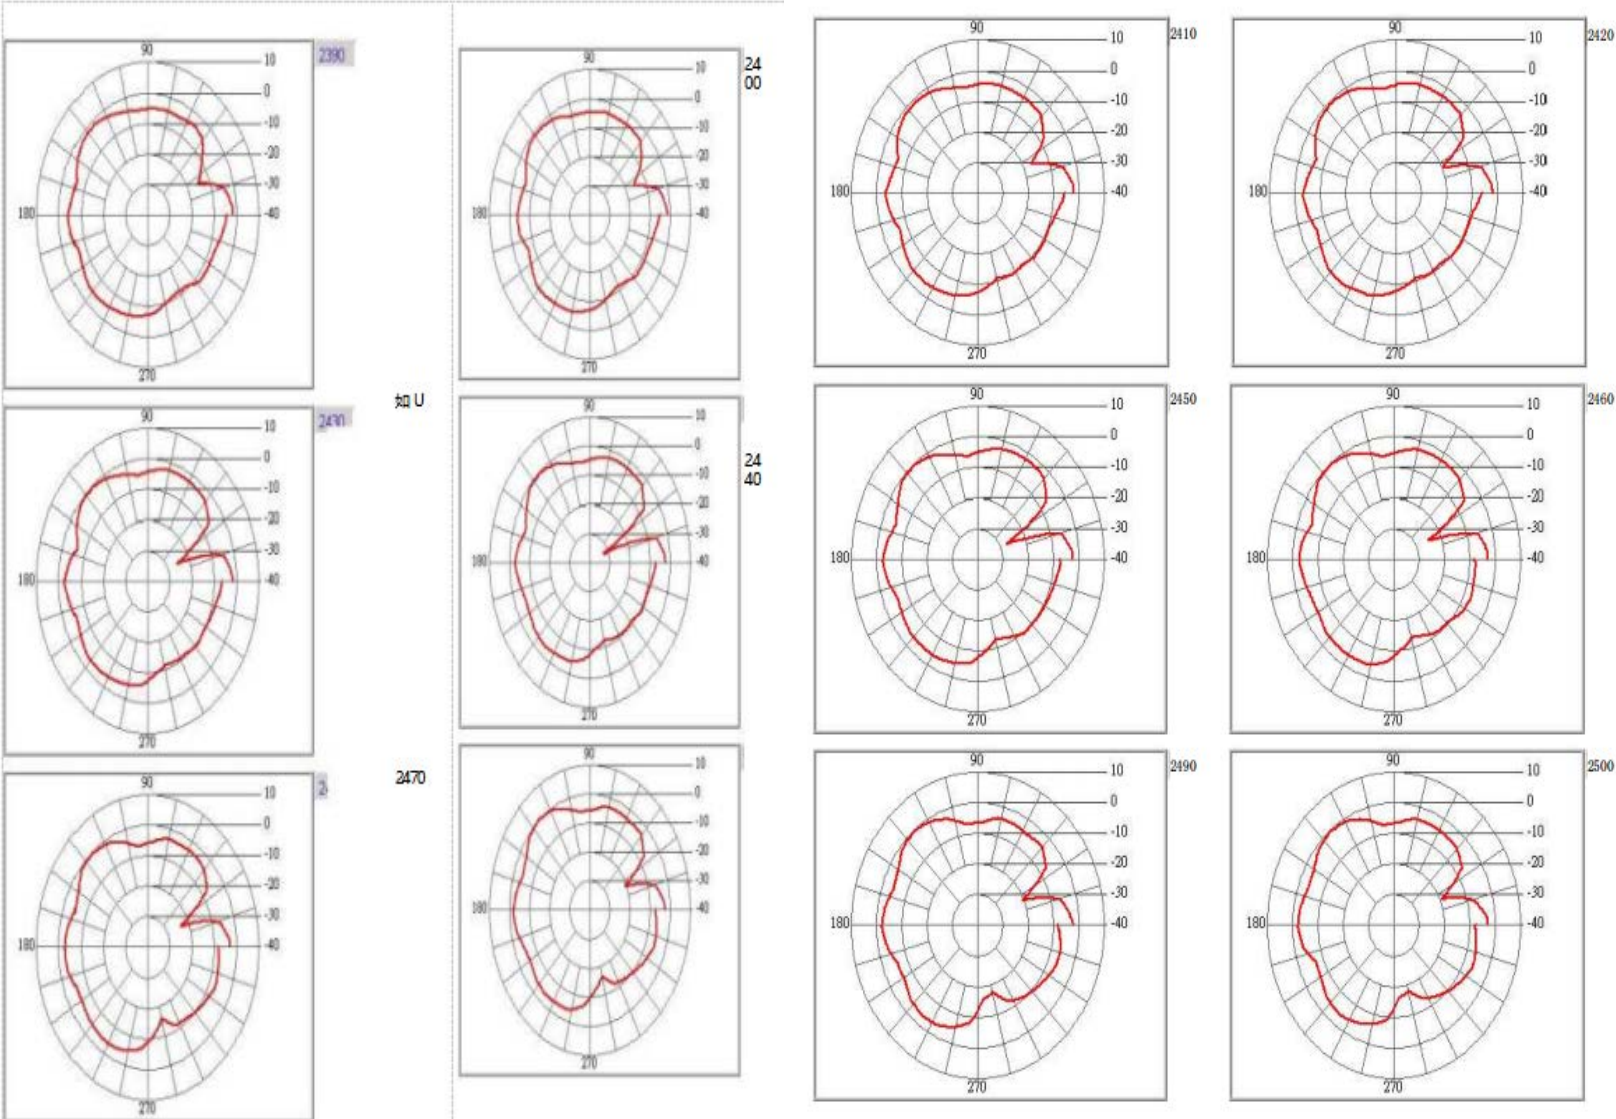

4. Test Results

Bluetooth	Frequency 2400~2500 MHz			
SWR	< 2.0			
2D Test Gain (dBi)	XY	Vertical	Peak Gain	-1 —4
			Av Gain	-8 — 10
		Horizontal	Peak Gain	0 ~ 2
			Av Gain	-3 ~ - 5
	XZ	Vertical	Peak Gain	0 ~ 1
			Av Gain	-4 ~ - 6
		Horizontal	Peak Gain	-1 ~ 2
			Av Gain	-6 —7
	YZ	Vertical	Peak Gain	-4 ~6
			Av Gain	-8 — 10
		Horizontal	Peak Gain	0 ~ -1
			Av Gain	-4 — 5
3D Test	Efficiency (%)		45 %	
	Peak Gain (dBi)		2.16 dBi	