

802.11n-HT20 mode, Power spectral density-5825MHz

Report No.: RKSA240228002-00C

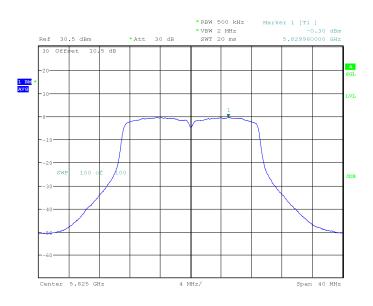

ProjectNo.:RKSA240228002 Tester:Jay Liu Date: 24.APR.2024 18:37:17

802.11ac40 mode, Power spectral density-5755MHz

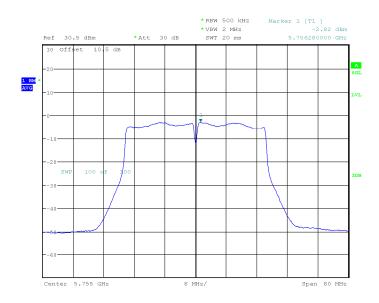


ProjectNo.:RKSA240228002 Tester:Jay Liu Date: 24.APR.2024 19:32:48

FCC Part 15.407 Page 183 of 186


802.11 ac40 mode, Power spectral density-5795MHz

Report No.: RKSA240228002-00C

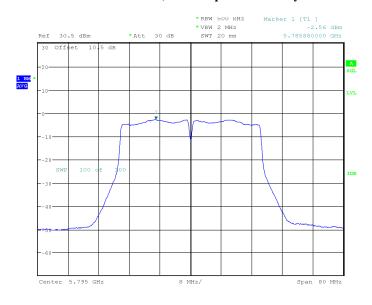

ProjectNo.:RKSA240228002 Tester:Jay Liu Date: 24.APR.2024 19:38:23

802.11n-HT40 mode, Power spectral density-5755MHz

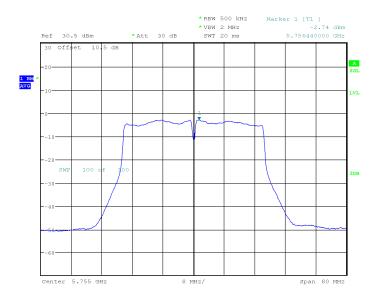


ProjectNo.:RKSA240228002 Tester:Jay Liu Date: 24.APR.2024 18:42:57

FCC Part 15.407 Page 184 of 186


802.11n-HT40 mode, Power spectral density-5795MHz

Report No.: RKSA240228002-00C

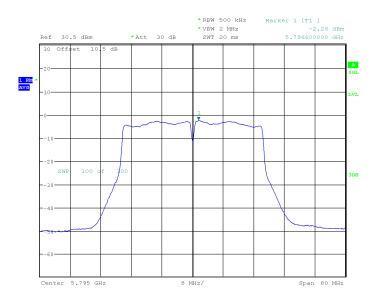

ProjectNo.:RKSA240228002 Tester:Jay Liu Date: 24.APR.2024 19:11:01

802.11 ac80 mode, Power spectral density-5775MHz

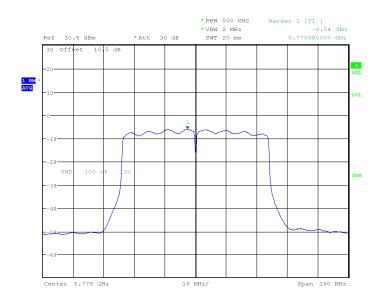

ProjectNo.:RKSA240228002 Tester:Jay Liu Date: 24.APR.2024 19:45:12

FCC Part 15.407 Page 185 of 186

Declarations

Report No.: RKSA240228002-00C

- 1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with " \star ".
- 2. The test data was only valid for the test sample(s).
- 3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
- 4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor k=2 with the 95.45% confidence interval.

***** END OF REPORT *****

FCC Part 15.407 Page 186 of 186