

Plot 1#: 2.4G WIFI Low_ Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 b (0); Frequency: 2412 MHz; Duty Cycle: 1:1.012

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.753 \text{ S/m}$; $\epsilon_r = 39.608$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2412 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 2.08 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.776 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.511 W/kg

Maximum value of SAR (measured) = 2.24 W/kg

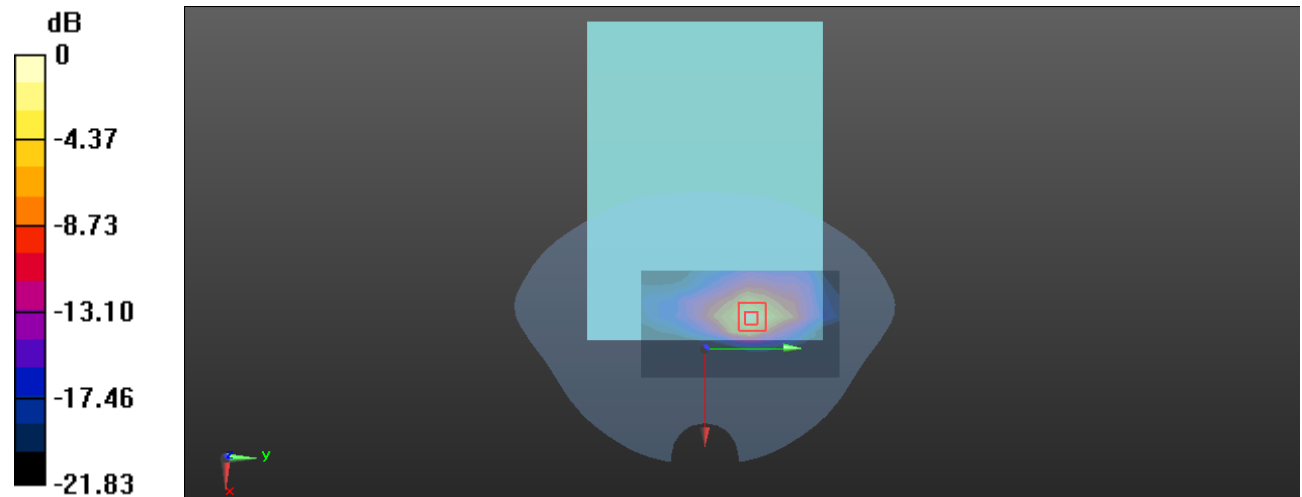

0 dB = 2.24 W/kg = 3.50 dBW/kg

Plot 2#: 2.4G WIFI Mid_Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.012

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.773 \text{ S/m}$; $\epsilon_r = 39.303$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 2.12 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.111 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.01 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.540 W/kg

Maximum value of SAR (measured) = 2.27 W/kg

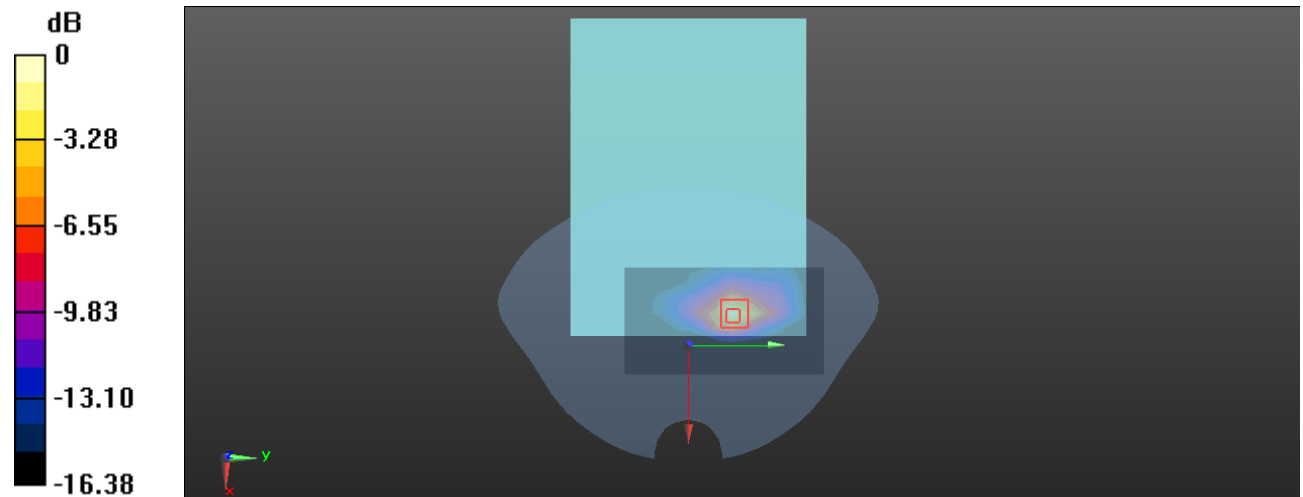

0 dB = 2.27 W/kg = 3.56 dBW/kg

Plot 3#: 2.4G WIFI High_ Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.012

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.837 \text{ S/m}$; $\epsilon_r = 38.247$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2462 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.98 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.077 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.72 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.506 W/kg

Maximum value of SAR (measured) = 2.07 W/kg

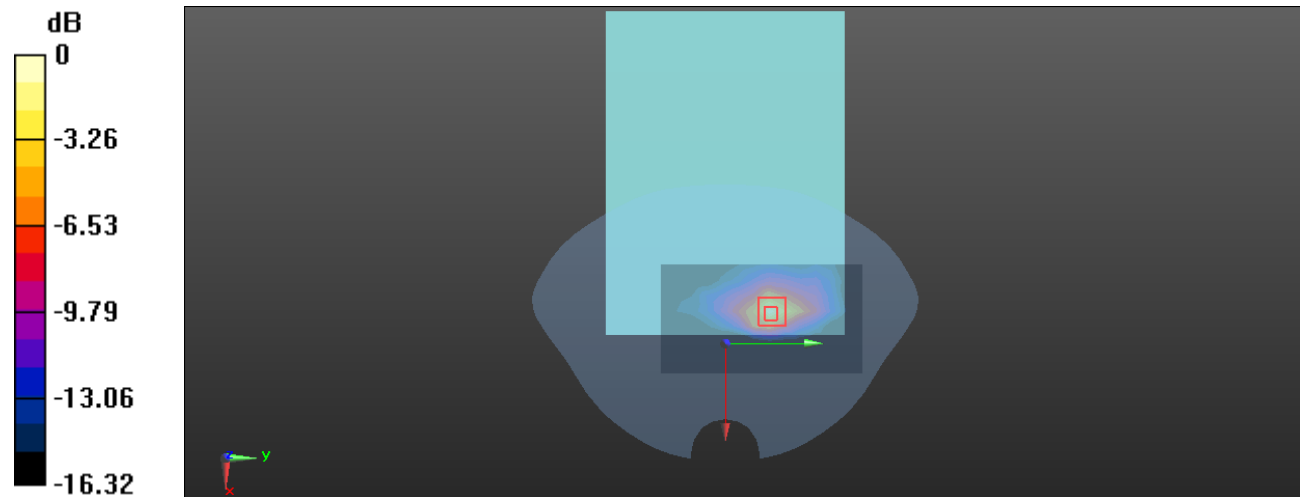

0 dB = 2.07 W/kg = 3.16 dBW/kg

Plot 4#: 2.4G WIFI Mid_Body Top

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.012

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.773 \text{ S/m}$; $\epsilon_r = 39.303$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2437 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x14x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.652 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.38 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.445 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.722 W/kg

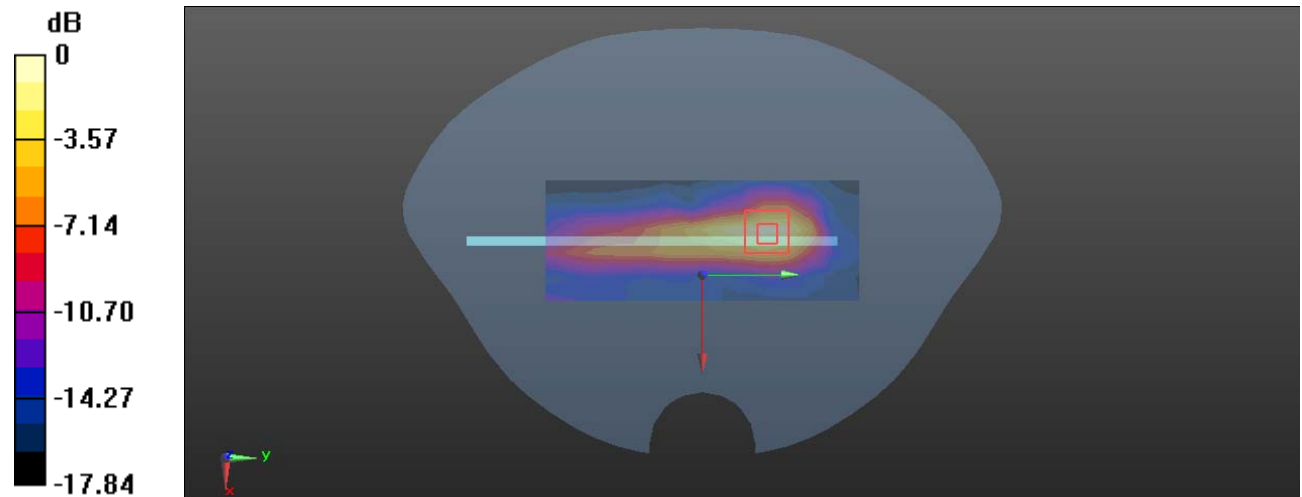

0 dB = 0.722 W/kg = -1.41 dBW/kg

Plot 5#: 5.2G WIFI Low_ Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 n20 (0); Frequency: 5180 MHz; Duty Cycle: 1:1.033

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.701 \text{ S/m}$; $\epsilon_r = 37.185$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5180 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.27 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.707 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.25 W/kg

SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.440 W/kg

Maximum value of SAR (measured) = 2.86 W/kg

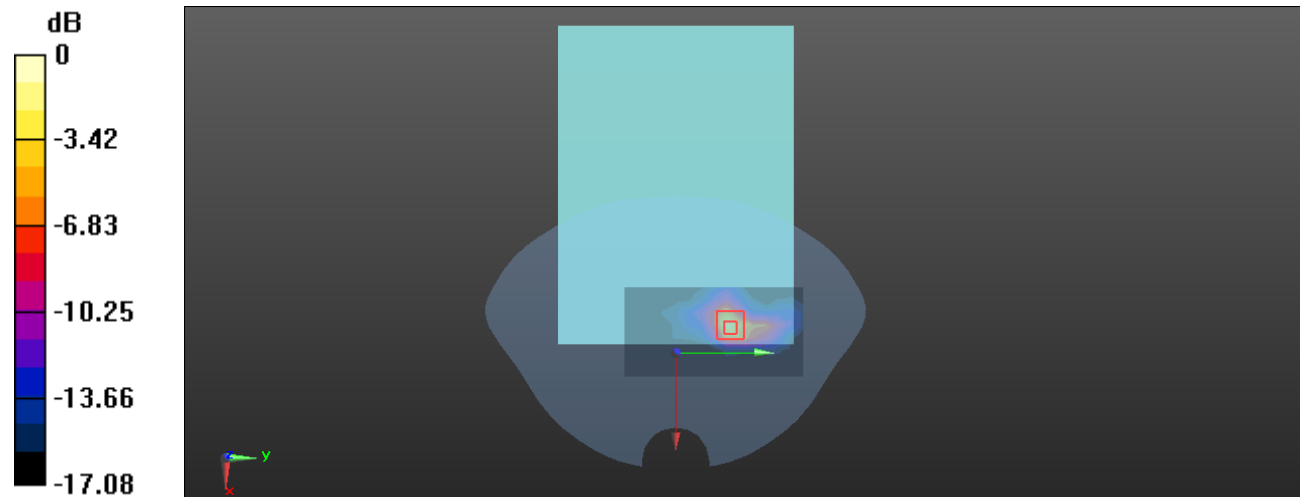

0 dB = 2.86 W/kg = 4.56 dBW/kg

Plot 6#: 5.2G WIFI Mid_Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 n20 (0); Frequency: 5200 MHz; Duty Cycle: 1:1.033

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.741 \text{ S/m}$; $\epsilon_r = 36.894$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.07 W/kg


Zoom Scan (9x9x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.323 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 6.13 W/kg

SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.435 W/kg

Maximum value of SAR (measured) = 2.78 W/kg

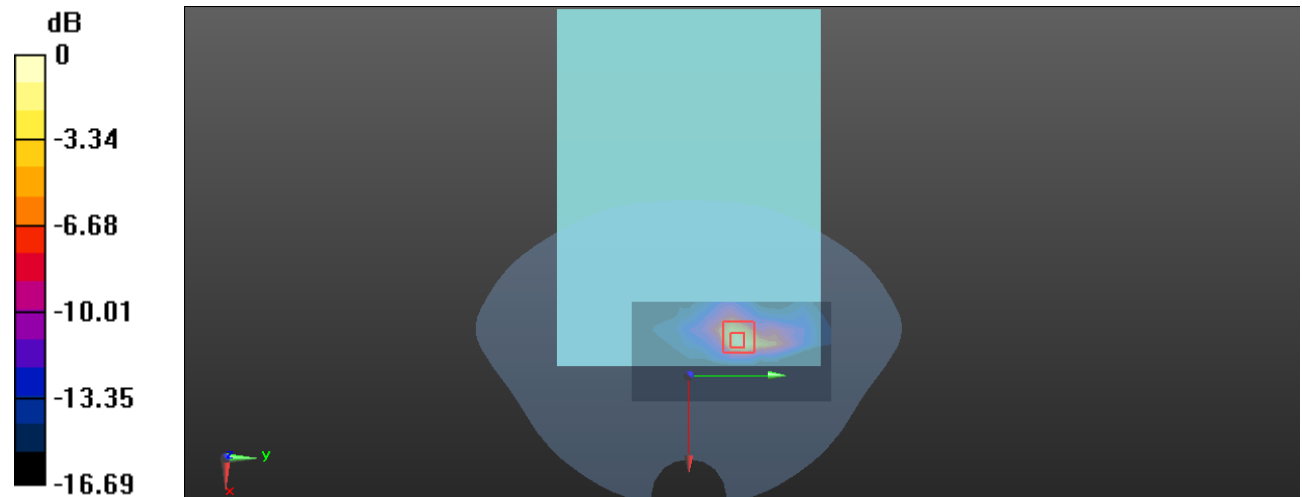

0 dB = 2.78 W/kg = 4.44 dBW/kg

Plot 7#: 5.2G WIFI High_ Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 n20 (0); Frequency: 5240 MHz; Duty Cycle: 1:1.033

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.783 \text{ S/m}$; $\epsilon_r = 36.511$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5240 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.05 W/kg


Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.765 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 4.06 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.418 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

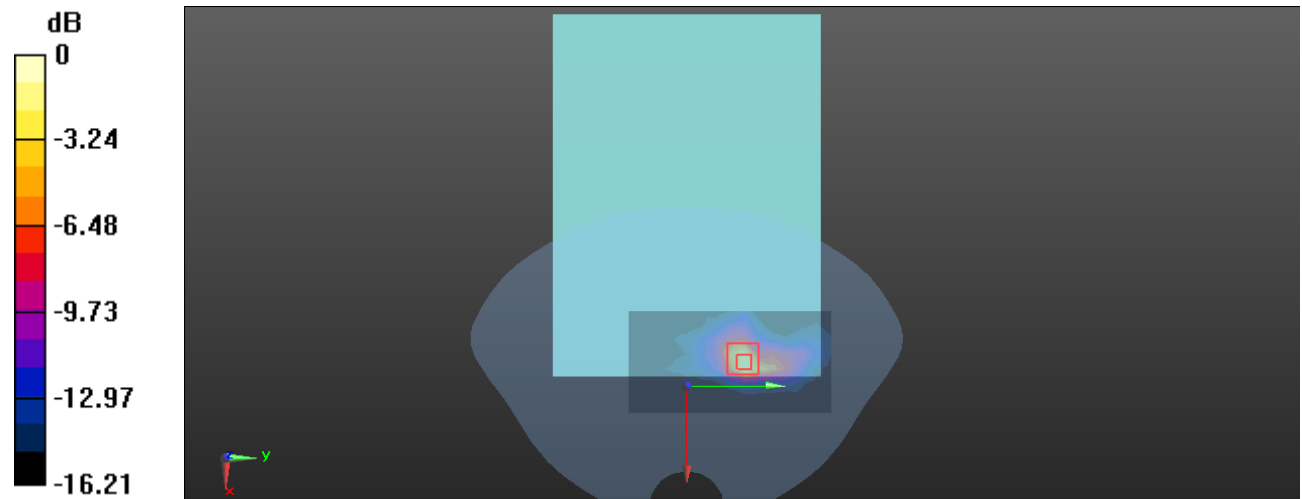

0 dB = 2.56 W/kg = 4.08 dBW/kg

Plot 8#: 5.2G WIFI Low_ Body Top

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 n20 (0); Frequency: 5180 MHz;Duty Cycle: 1:1.033

Medium parameters used: $f = 5180 \text{ MHz}$; $\sigma = 4.701 \text{ S/m}$; $\epsilon_r = 37.185$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5180 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.38 W/kg


Zoom Scan (9x9x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 18.63 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.77 W/kg

SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

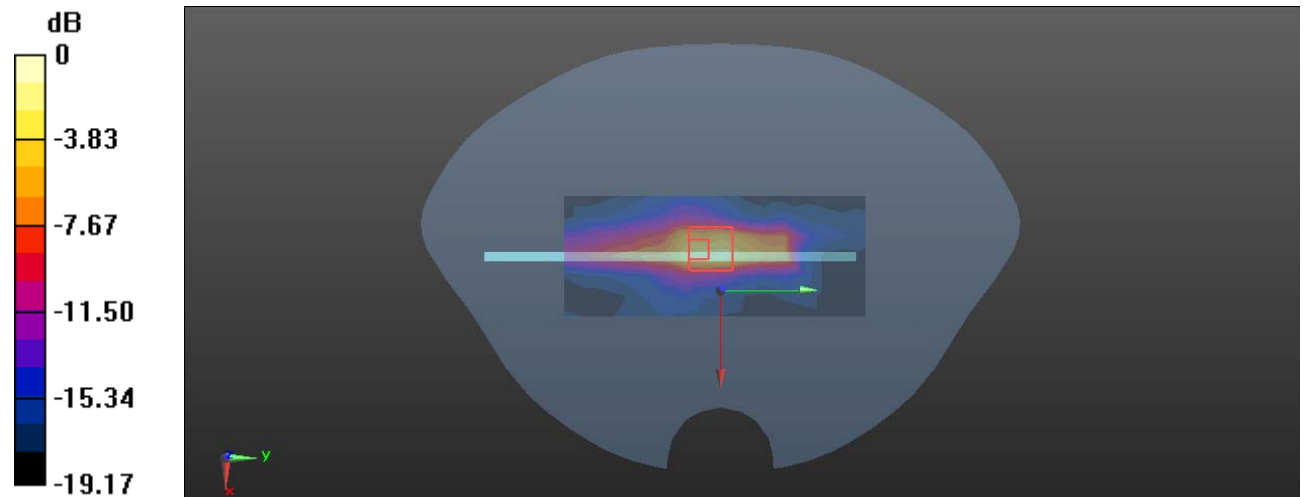

0 dB = 1.81 W/kg = 2.58 dBW/kg

Plot 9#: 5.2G WIFI Mid_Body Top

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 n20 (0); Frequency: 5200 MHz;Duty Cycle: 1:1.033

Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.741 \text{ S/m}$; $\epsilon_r = 36.894$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5200 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.01 W/kg


Zoom Scan (9x9x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 19.97 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.95 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

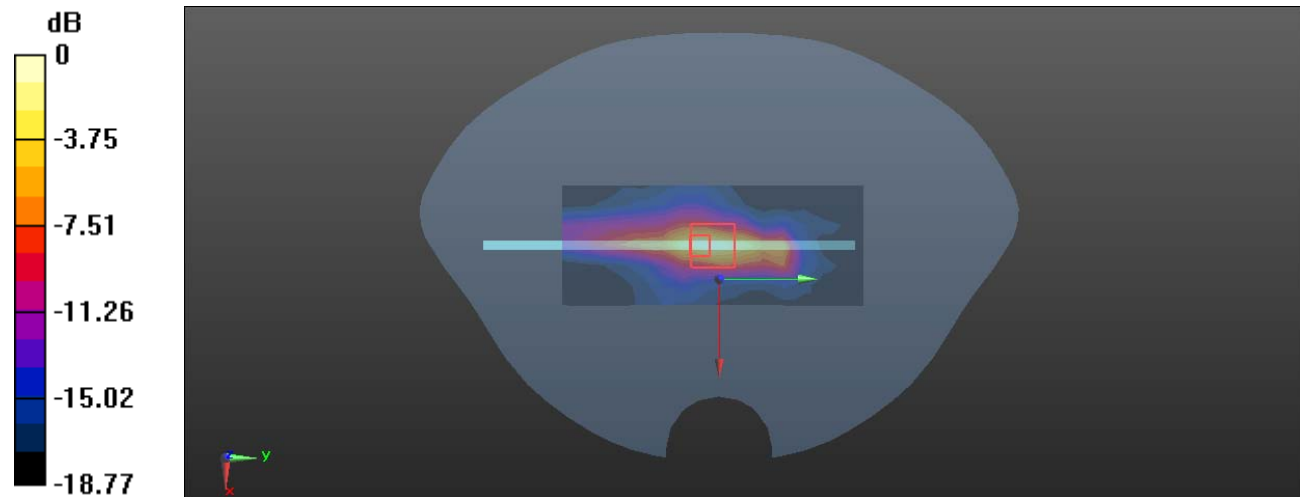

0 dB = 1.87 W/kg = 2.72 dBW/kg

Plot 10#: 5.2G WIFI High_ Body Top

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 n20 (0); Frequency: 5240 MHz;Duty Cycle: 1:1.033

Medium parameters used: $f = 5240 \text{ MHz}$; $\sigma = 4.783 \text{ S/m}$; $\epsilon_r = 36.511$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5240 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.54 W/kg


Zoom Scan (10x10x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 18.01 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.84 W/kg

SAR(1 g) = 0.842 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 1.94 W/kg

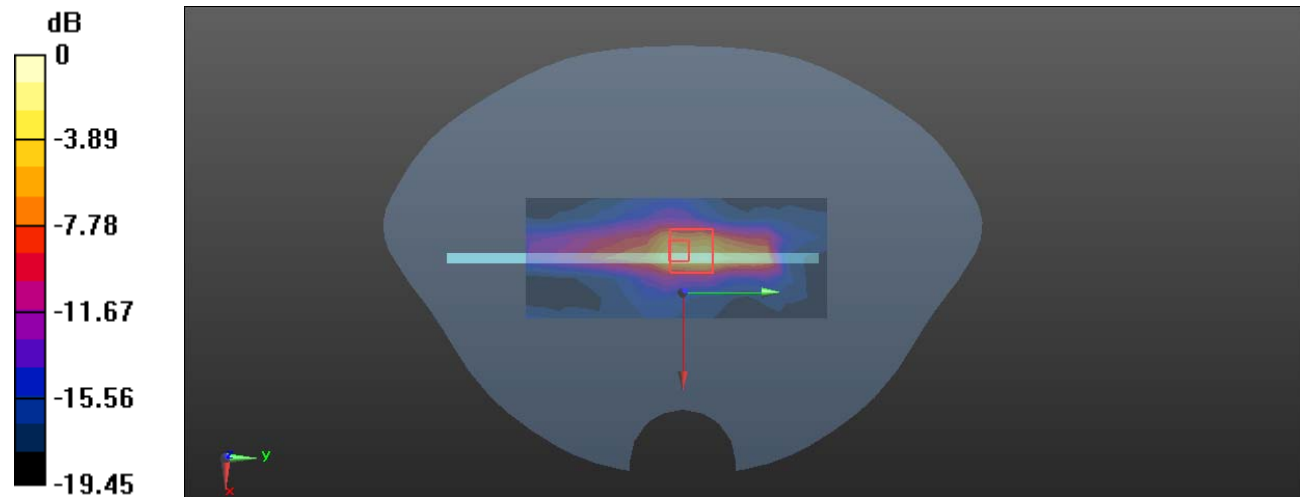

0 dB = 1.94 W/kg = 2.88 dBW/kg

Plot 11#: 5.8G WIFI Low_ Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 a (0); Frequency: 5745 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.214 \text{ S/m}$; $\epsilon_r = 36.312$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 3.03 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.420 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 5.15 W/kg

SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.406 W/kg

Maximum value of SAR (measured) = 3.14 W/kg

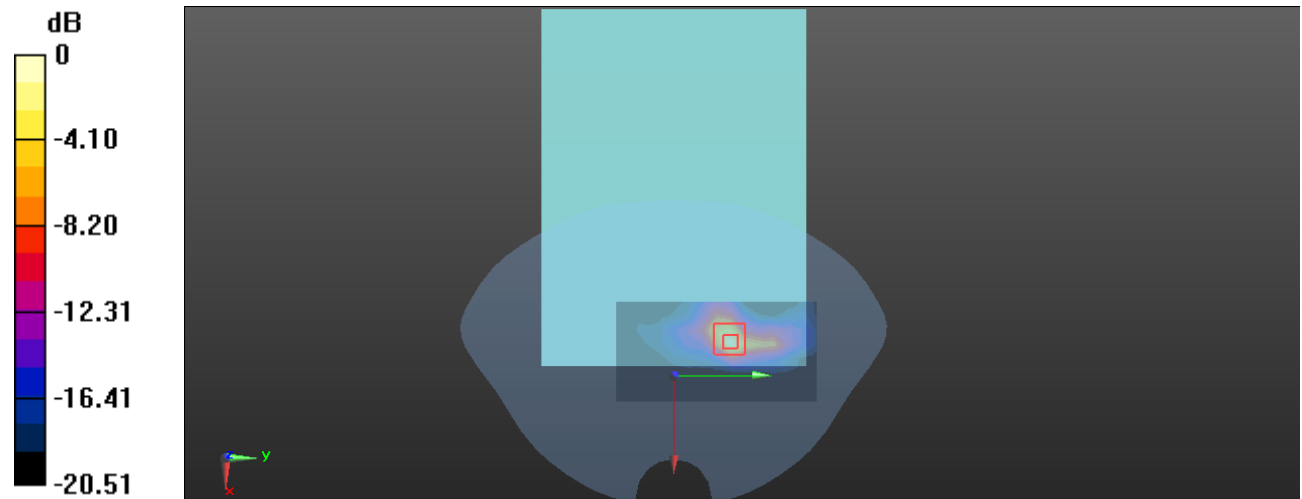

0 dB = 3.14 W/kg = 4.97 dBW/kg

Plot 12#: 5.8G WIFI Mid_ Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.467 \text{ S/m}$; $\epsilon_r = 35.076$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5785 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x15x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 2.98 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.330 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 5.06 W/kg

SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.398 W/kg

Maximum value of SAR (measured) = 3.07 W/kg

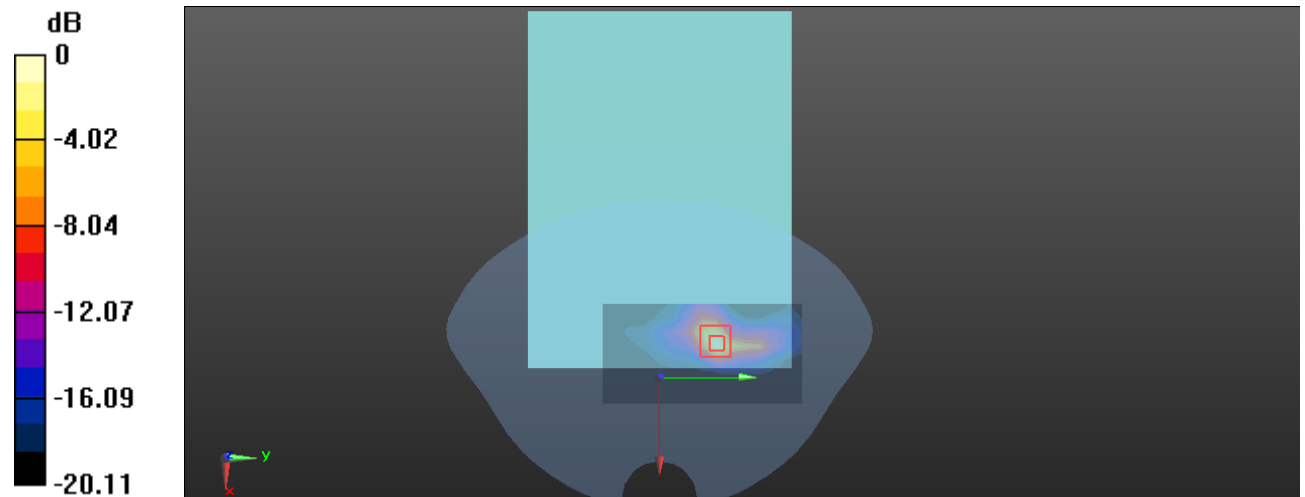

0 dB = 3.07 W/kg = 4.87 dBW/kg

Plot 13#: 5.8G WIFI High_ Body Back

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.508 \text{ S/m}$; $\epsilon_r = 34.333$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5825 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x15x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.98 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.032 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 4.97 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.383 W/kg

Maximum value of SAR (measured) = 3.03 W/kg

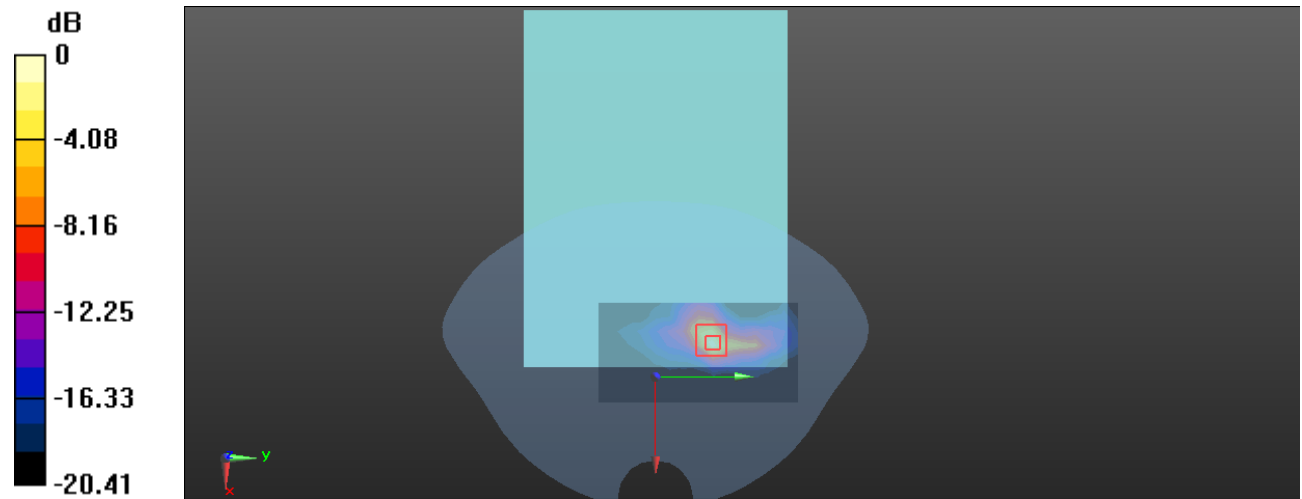

0 dB = 3.03 W/kg = 4.81 dBW/kg

Plot 14#: 5.8G WIFI Low_ Body Top

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 a (0); Frequency: 5745 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.214 \text{ S/m}$; $\epsilon_r = 36.312$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5745 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x14x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.50 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 13.90 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.61 W/kg

SAR(1 g) = 0.943 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 2.21 W/kg

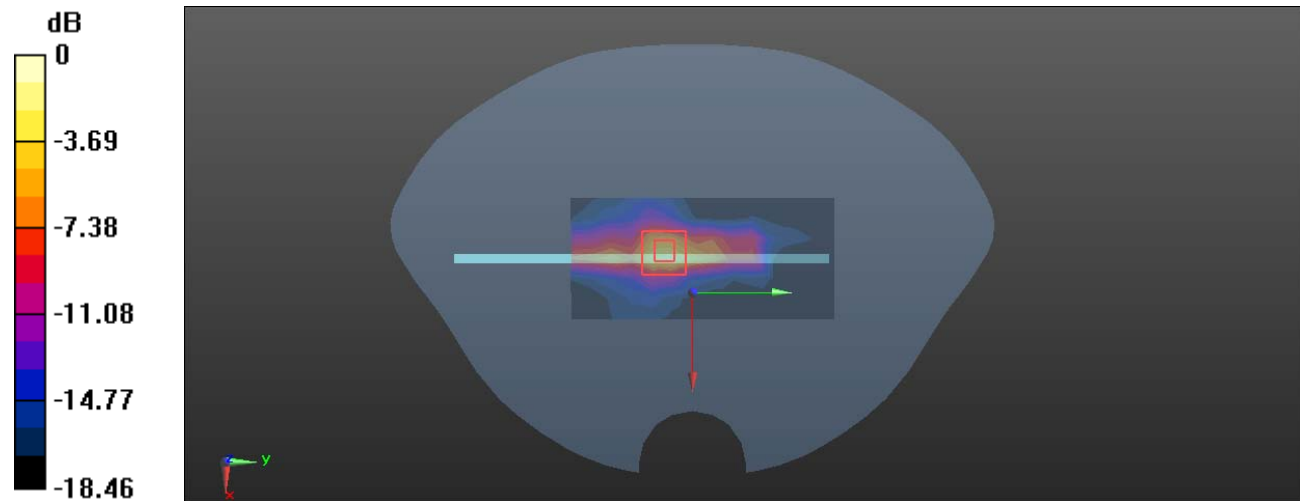

0 dB = 2.21 W/kg = 3.44 dBW/kg

Plot 15#: 5.8G WIFI Mid_ Body Top

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 a (0); Frequency: 5785 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.467 \text{ S/m}$; $\epsilon_r = 35.076$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5785 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x14x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.75 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 14.96 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 2.35 W/kg

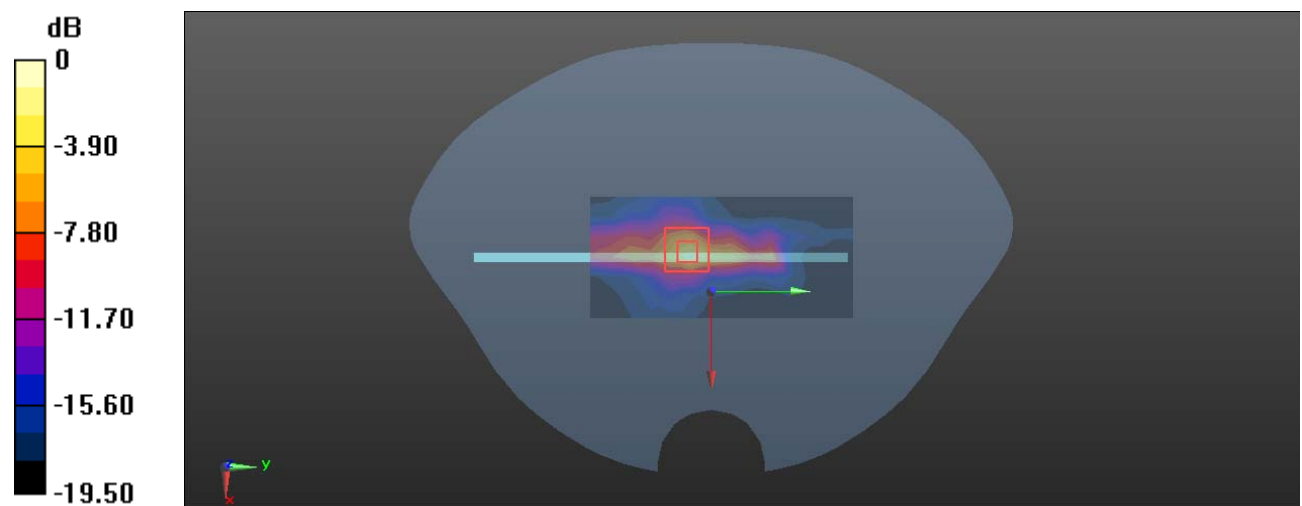

0 dB = 2.35 W/kg = 3.71 dBW/kg

Plot 16#: 5.8G WIFI High_ Body Top

DUT: SUPERNOTE; Type: A5 X2; Serial: 2P78-1

Communication System: UID 0, 802.11 a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.031

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.508 \text{ S/m}$; $\epsilon_r = 34.333$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5825 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.03 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 11.55 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 2.17 W/kg

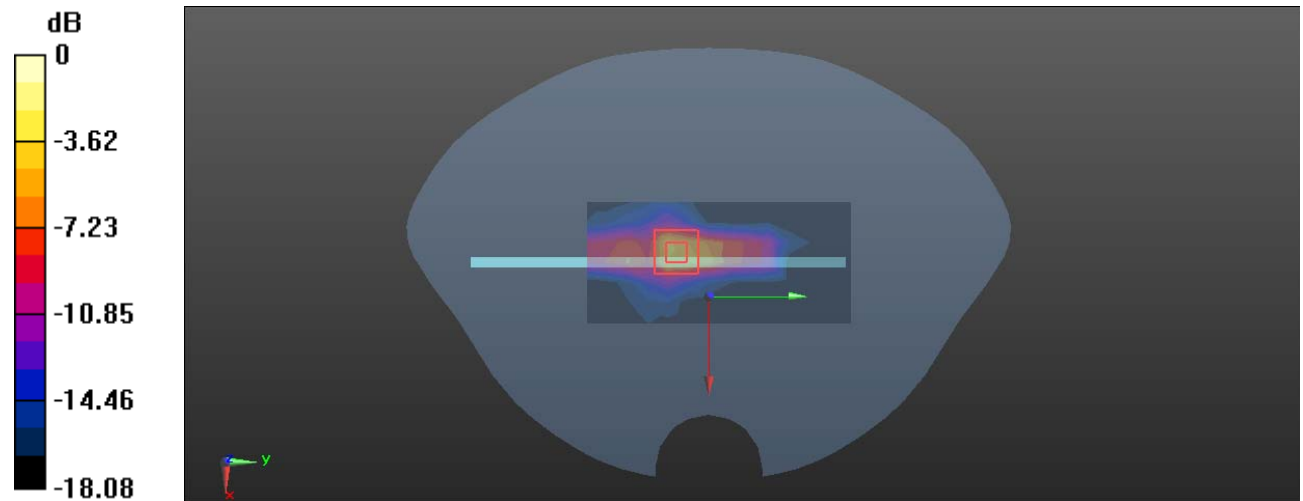

0 dB = 2.17 W/kg = 3.36 dBW/kg