

承認書

SPECIFICATION FOR APPROVAL

客戶: CUSTOMER:	伟高域 Vigo domain
客戶料號: CUST P/N:	
音澤料號: FINE P/N:	G40*0.8-17-0.08*48P-11T-6.8UH-W38-L55MM
產品型號: DESC:	Φ 40MMX0.8MM
日期: DATE:	2024/02/24
版本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成 He Licheng	马莉 Mali	但可清 Dankeqing	

东莞市音泽电子科技有限公司

Dongguan Yinze electronic technology Co., LTD

工廠地址: 东莞市茶山镇兴韩路(创富中心城)2栋901号

Factory address: No. 901, Building 2, Xinghan Road, Chashan Town, Dongguan City

但可清 Dankeqing TEL: 18617251159


版本變更履歷

Version change history

SPECIFICATION

產品型號: DESC	G40*0.8-17-0.08*48P-11T-6.8UH-W38-L55MM	版本 Rev: A.0	客戶 CUST: 客戶料号 CUST P/N:	伟高域 Vigo domain
---------------	--	-------------------	--------------------------------	----------------------------

一、尺寸 DIMENSION:(mm)

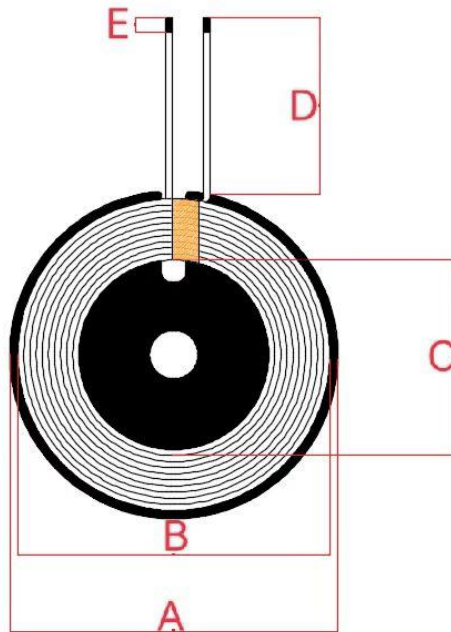

A	40 ± 0.5
B	38 ± 0.5
C	17 ± 0.5
D	55 ± 2
E	3 ± 2
F	
G	
H	
I	
K	

注:

- 1.交叉出线;
- 2.线圈贴 40 单槽磁片，磁片尺寸 40 ± 0.5mm,，厚度为 0.8 ± 0.05mm.
- 3.磁片背面不贴背胶

Note:

1. Cross out wire;
2. The coil is attached to 40 single-slot magnetic disc, the magnetic disc size is 40 ± 0.5mm, and the thickness is 0.8 ± 0.05mm.
3. There is no adhesive on the back of the magnetic disc

二、原理图 SCHEMATIC DIAGRAM:

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风线 0.08*48P	11Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100mΩ		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
何立成 2024.02.24	