

Letter of acceptance

Customer name: Shenzhen Jiayu Chuang technology

Customer part number: 25.25095-1

Our model: RC-G25-3.8UH-3000GS-30MM

Sample delivery date: June 8, 2023

supplier: Dongguan Jireisi technology Co., LTD

Draw	Check	Approval
Wang Lizhi	Deng Xianggui	Lu Ru eng

Customer recognition:

Appositional	Incongruent case	Acknowledge
Reserve injection		

Dongguan Jierith Technology Co., LTD



Tel: _____

Fax: 86+13632701380

Address: No. 152, Guan Chang Road, Taigongling Village, Dalingshan Town, Dongguan City

Customer name	Customer part number	Our model	Edition	Day period
Jiayuchuang	25.25095-1	RC-G25-3.8UH-3000GS-30MM	A0	2023.6.8

一、Plane structure diagram: unit:MM

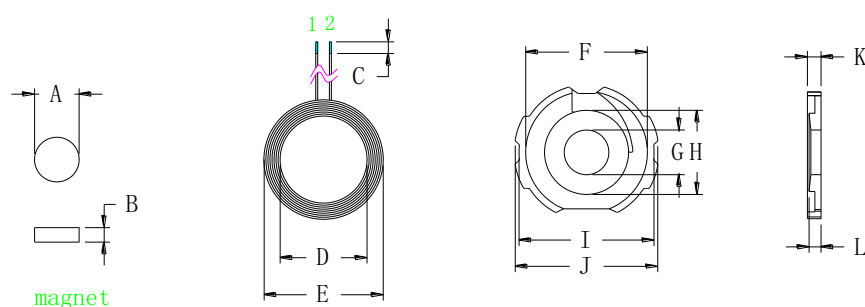

A	7.65 ± 0.05
B	2.0 ± 0.05
C	2 ± 1
D	14 ± 0.2
E	20.7 ± 0.3
F	21 ± 0.2
G	7.7 ± 0.05
H	13.5 ± 0.2
I	23.5 ± 0.3
J	25 ± 0.2
K	2.5 ± 0.1
L	2.25 ± 0.1
M	30 ± 1

二、Product parameter:

Foot position	Wire diameter	Number of turns	remark
1 - 2	0.08*24P	10	Hot air stranding wire

三、Technical requirement:

1. Fix the end of the wire to prevent loose and broken wires
2. According to customer requirements, the long thread is cut, plated with tin, and the tin plating depth is unified 2 ± 1 MM
3. Point the appropriate white glue on the soft magnetic sheet, paste the coil, and ensure that the product surface is clean and tidy in the process
4. The soft magnetic sheet used is with round holes, without damage
5. Additional process (according to customer requirements) : Install 7.65x2.0mm magnet in the middle of the finished product round hole and in the finished product

Back with 613-14mm double-sided tape, after packaging

四、Electrical parameter:

1. Inductance value, Q value:

$$\text{PIN } 1 - 2 = 3.8\mu\text{H} \pm 0.2\mu\text{H}$$

$$\text{Q value} \geq 25$$

The above inductance values are based on Quanhua 1062A instrument,
10KHZ/0.3Vrms as standard or equivalent instrument.

Q value is based on Quanhua 1062A instrument, 100KHZ/0.3Vrms as standard or equivalent instrument

五、Bill of materials:

Serial number	name	material	supplier	remark
1	Hot air stranding wire	0.08X24P	Weihaan or equivalent	
2	Magnetic sheet	G25 Soft base material	Tiantong or equivalent	
3	tin	High temperature environmental protection	Thousand Islands or equivalent	
4	White glue	BY882	Moon or equivalent	
5	Strong magnetic	7.65*2(The strength is greater than 3000GS)	United win or equivalent	Additional processes, according to customer requirements
6	Double-sided adhesive	613-14mm	Honghui or d	