

Test Report

Report No.: MTi240103011-01E2

Date of issue: 2024-03-19

Applicant: Dongguan Lingdu Electronic Technology Co.,Ltd

Product: Dash Cam

Model(s): LD02-3CH, LD02-1CH, LD02-2CH, LD02 Lite, LD02, D22, D24, D25

FCC ID: 2BEAP-LD02-3CH

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

The test report is only used for customer scientific research, teaching, internal quality control and other purposes, and is for internal reference only.



Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Table of contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	6
1.3	Environmental Conditions	9
1.4	Description of support units	9
1.5	Measurement uncertainty	9
2	Summary of Test Result	10
3	Test Facilities and accreditations	11
3.1	Test laboratory	11
4	List of test equipment.....	12
5	Evaluation Results (Evaluation).....	13
5.1	Antenna requirement	13
6	Radio Spectrum Matter Test Results (RF)	13
6.1	Duty Cycle.....	13
6.2	Maximum conducted output power.....	14
6.3	Power spectral density.....	15
6.4	Emission bandwidth and occupied bandwidth.....	17
6.5	Band edge emissions (Radiated)	19
6.6	Undesirable emission limits (below 1GHz)	26
6.7	Undesirable emission limits (above 1GHz).....	33
	Photographs of the test setup	42
	Photographs of the EUT.....	43
6.8	Appendix A1: Emission Bandwidth	44
6.9	Appendix A2: Occupied channel bandwidth	55
6.10	Appendix A3: Min emission bandwidth	66
6.11	Appendix B: Duty Cycle	72
6.12	Appendix C: Maximum conducted output power	83
6.13	Appendix D: Maximum power spectral density.....	84
6.14	Appendix E: Band edge measurements	95
6.15	Appendix F: Conducted Spurious Emission	103
6.16	Appendix G: Frequency Stability	122

Test Result Certification	
Applicant:	Dongguan Lingdu Electronic Technology Co.,Ltd
Address:	No.1, Longcheng Street, Qingxi Town, Dongguan City, Guangdong Province, China
Manufacturer:	Dongguan Lingdu Electronic Technology Co.,Ltd
Address:	No.1, Longcheng Street, Qingxi Town, Dongguan City, Guangdong Province, China
Product description	
Product name:	Dash Cam
Trade mark:	N/A
Model name:	LD02-3CH
Series Model(s):	LD02-1CH, LD02-2CH, LD02 Lite, LD02, D22, D24, D25
Standards:	47 CFR Part 15E
Test Method:	ANSI C63.10-2013 KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Date of Test	
Date of test:	2024-02-22 to 2024-03-05
Test result:	Pass

Test Engineer	:	
		(Maleah Deng)
Reviewed By	:	
		(Leon Chen)
Approved By	:	
		(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	Dash Cam
Model name:	LD02-3CH
Series Model(s):	LD02-1CH, LD02-2CH, LD02 Lite, LD02, D22, D24, D25
Model difference:	All the models are the same circuit and module, except the model name.
Electrical rating:	Input: DC 12V/24V Output: DC 5V 2.5A
Accessories:	Cable: Cable1: Type-C USB Power cable 3m Cable2: Type-C to 2.5mm cable 108cm Cable3: Reversing camera 3.5mm to 4P cable 5.9m Car charger *1 Rear-view camera*1 Support*1
Hardware version:	V1.0
Software version:	V1.0
Test sample(s) number:	MTi240103011-01S1001
RF specification	
Operating frequency range:	802.11a/n(HT20)/ac(HT20): U-NII 1: 5180MHz to 5240MHz; U-NII 3: 5745MHz to 5825MHz; 802.11n(HT40)/ac(HT40): U-NII 1: 5190MHz to 5230MHz; U-NII 3: 5755MHz to 5795MHz; 802.11ac(HT80): U-NII 1: 5210MHz; U-NII 3: 5775MHz
Date Rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40): MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40): NSS1, MCS0-MCS9 802.11ac(VHT80) :NSS1,MCS0-MCS9
Modulation type:	802.11a: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM);
Antenna(s) type:	FPC Antenna
Antenna(s) gain:	U-NII 1:5.54dBi, U-NII 3: 6.03dBi

1.2 Description of test modes

No.	Emission test modes
Mode1	802.11a
Mode2	802.11n(HT 20)
Mode3	802.11n(HT 40)
Mode4	802.11ac(VHT 20)
Mode5	802.11ac(VHT 40)
Mode6	802.11ac(VHT 80)

1.2.1 Operation channel list

U-NII 1

Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230	/	/
44	5220	/	/	/	/
48	5240	/	/	/	/

U-NII 3

Bandwidth:	20MHz	Bandwidth:	40MHz	Bandwidth:	80MHz
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795	/	/
157	5785	/	/	/	/
161	5805	/	/	/	/
165	5825	/	/	/	/

Test Channel List
U-NII 1:

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	5180	5200	5240
40	5190	/	5230
80	5210	/	/

U-NII 3:

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
20	5745	5785	5825
40	5755	/	5795
80	5775	/	/

Note: The test software provided by manufacturer is used to control EUT for working in engineering mode, that enables selectable channel, and capable of continuous transmitting mode.

Test Software:

For power setting, refer to below table.

Test Software:	COM2-PuTTY
----------------	------------

For U-NII-1 band:			
802.11a		802.11n20	
Channel	Power setting	Channel	Power setting
36	40	36	38
40	35	40	38
48	38	48	38
802.11n40		802.11ac20	
Channel	Power setting	Channel	Power setting
38	38	36	38
46	38	40	38
--	--	48	38
802.11ac40		802.11ac80	
38	38	42	38
46	38	--	-
--	--	--	--

For U-NII-3 band:			
802.11a		802.11n20	
Channel	Power setting	Channel	Power setting
149	40	149	45
157	43	157	45
165	43	165	45
802.11n40		802.11ac20	
Channel	Power setting	Channel	Power setting
151	45	149	45
159	45	157	45
--	--	165	40
802.11ac40		802.11ac80	
151	43	155	43
159	43	--	--
--	--	--	--

```

COM2 - PuTTY
rtwpriv_arm wlan0 mp_bandwidth 40M=1,shortGI=0
rtwpriv_arm wlan0 mp_ant tx a
rtwpriv_arm wlan0 mp_rate 160
rtwpriv_arm wlan0 mp_txpower patha=43,pathb=46
rtwpriv_arm wlan0 mp_ctx background,pkt wlan0 mp_ctx:Stop continuous Tx
/ # rtwpriv_arm wlan0 mp_start
wlan0 mp_start:mp_start ok

/ # rtwpriv_arm wlan0 mp_channel 151
wlan0 mp_channel:Change channel 165 to channel 151
/ # rtwpriv_arm wlan0 mp_bandwidth 40M=1,shortGI=0
wlan0 mp_bandwidth:Change BW 0 to BW 1

/ # rtwpriv_arm wlan0 mp_ant tx a
wlan0 mp_ant_tx:switch Tx antenna to a
/ # rtwpriv_arm wlan0 mp_rate 160
wlan0 mp_rate:Set data rate to 160 index 44
/ # rtwpriv_arm wlan0 mp_txpower patha=43,pathb=46
wlan0 mp_txpower:Set power level path_A:43 path_B:46 path_C:0 path_D:0
/ # rtwpriv_arm wlan0 mp_ctx background,pkt
wlan0 mp_ctx:
Start continuous DA=ffffffff len=1500 count=0

/ #
  
```


1.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15°C ~ 35°C
Humidity:	20% RH ~ 75% RH
Atmospheric pressure:	98 kPa ~ 101 kPa

ENV	Temperature (°C)	Voltage (V)
LTLV	-20	4.5
NTNV	25	5
HTHV	65	5.5

1.4 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Accumulator	6-QW-45(370)-L	/	Camel Group Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

1.5 Measurement uncertainty

Measurement	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	±3.1dB
Time	±1 %
RF output power, conducted	±1 dB
Power Spectral Density, conducted	±1 dB
Occupied channel bandwidth	±3 %
Radiated spurious emissions (above 1GHz)	±5.3dB
Radiated spurious emissions (9kHz~30MHz)	±4.3dB
Radiated spurious emissions (30MHz~1GHz)	±4.7dB
Temperature	±1 °C
Humidity	± 5 %

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2 Summary of Test Result

No.	Item	Standard	Requirement	Result
1	Antenna requirement	47 CFR Part 15E	Part 15.203	Pass
2	Conducted Emission at AC power line	47 CFR Part 15E	47 CFR Part 15.207(a)	N/A
3	Duty Cycle	47 CFR Part 15E		Pass
4	Maximum conducted output power	47 CFR Part 15E	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(3)(i)	Pass
5	Power spectral density	47 CFR Part 15E	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(3)(i)	Pass
6	Emission bandwidth and occupied bandwidth	47 CFR Part 15E	U-NII 1: No limits, only for report use. 47 CFR Part 15.407(e)	Pass
7	Band edge emissions (Radiated)	47 CFR Part 15E	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass
8	Undesirable emission limits (below 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(9)	Pass
9	Undesirable emission limits (above 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass

Note:

The device is a DC power supply and does not apply to conducted emissions.

3 Test Facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No.7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573
IC Registration No.:	21760
CABID:	CN0093

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
Conducted Emission at AC power line						
1	EMI Test Receiver	Rohde&schwarz	ESCI3	101368	2023-04-26	2024-04-25
2	Artificial mains network	Schwarzbeck	NSLK 8127	183	2023-05-05	2024-05-04
3	Artificial Mains Network	Rohde & Schwarz	ESH2-Z5	100263	2023-06-03	2024-06-02
Duty Cycle Maximum conducted output power Power spectral density Emission bandwidth and occupied bandwidth						
1	Wideband Radio Communication Tester	Rohde&schwarz	CMW500	149155	2023-04-26	2024-04-25
2	ESG Series Analog Ssignal Generator	Agilent	E4421B	GB40051240	2023-04-25	2024-04-24
3	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
4	Synthesized Sweeper	Agilent	83752A	3610A01957	2023-04-25	2024-04-24
5	MXA Signal Analyzer	Agilent	N9020A	MY50143483	2023-04-26	2024-04-25
6	RF Control Unit	Tonscend	JS0806-1	19D8060152	2023-04-26	2024-04-25
7	Band Reject Filter Group	Tonscend	JS0806-F	19D8060160	2023-05-05	2024-05-04
8	ESG Vector Signal Generator	Agilent	N5182A	MY50143762	2023-04-25	2024-04-24
9	DC Power Supply	Agilent	E3632A	MY40027695	2023-05-05	2024-05-04
Band edge emissions (Radiated) Undesirable emission limits (above 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	Double Ridged Broadband Horn Antenna	schwarabeck	BBHA 9120 D	2278	2023-06-17	2025-06-16
3	Amplifier	Agilent	8449B	3008A01120	2023-06-26	2024-06-25
4	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03
5	MXA signal analyzer	Agilent	N9020A	MY54440859	2023-06-01	2024-05-31
6	Horn antenna	Schwarzbeck	BBHA 9170	00987	2023-06-17	2025-06-16
7	Pre-amplifier	Space-Dtronics	EWLAN1840 G	210405001	2023-05-04	2024-05-03
8	PXA Signal Analyzer	Agilent	N9030A	MY51350296	2023-04-25	2024-04-24
Undesirable emission limits (below 1GHz)						
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2023-04-26	2024-04-25
2	TRILOG Broadband Antenna	schwarabeck	VULB 9163	9163-1338	2023-06-11	2025-06-10
3	Active Loop Antenna	Schwarzbeck	FMZB 1519 B	00066	2023-06-11	2025-06-10
4	Amplifier	Hewlett-Packard	8447F	3113A06184	2023-04-25	2024-04-24
5	Multi-device Controller	TuoPu	TPMDC	/	2023-05-04	2024-05-03

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Description of the antenna of EUT	The antenna of the EUT is permanently attached. There are no provisions for connection to an external antenna.
Conclusion:	The EUT complies with the requirement of § 15.203.

6 Radio Spectrum Matter Test Results (RF)


6.1 Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Limit:	No limits, only for report use.
Test Method:	ANSI C63.10-2013 section 12.2 (b)
Procedure:	i) Set the center frequency of the instrument to the center frequency of the transmission. ii) Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. iii) Set VBW $\geq$ RBW. iv) Set detector = peak. v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.

6.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	56 %	Atmospheric Pressure:	99 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				

6.1.2 Test Setup Diagram:

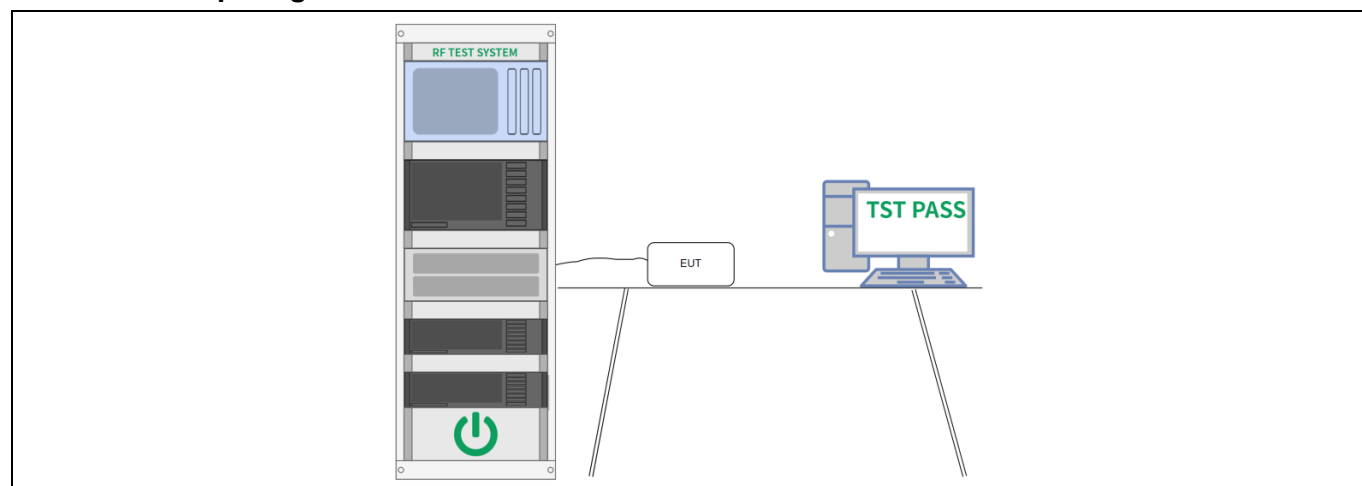

6.1.3 Test Data:

Please Refer to Appendix for Details.


6.2 Maximum conducted output power

Test Requirement:	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(3)(i)
Test Limit:	For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Test Method:	ANSI C63.10-2013, section 12.3
Procedure:	ANSI C63.10-2013, section 12.3.3

6.2.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	56 %	Atmospheric Pressure:	99 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				

6.2.2 Test Setup Diagram:

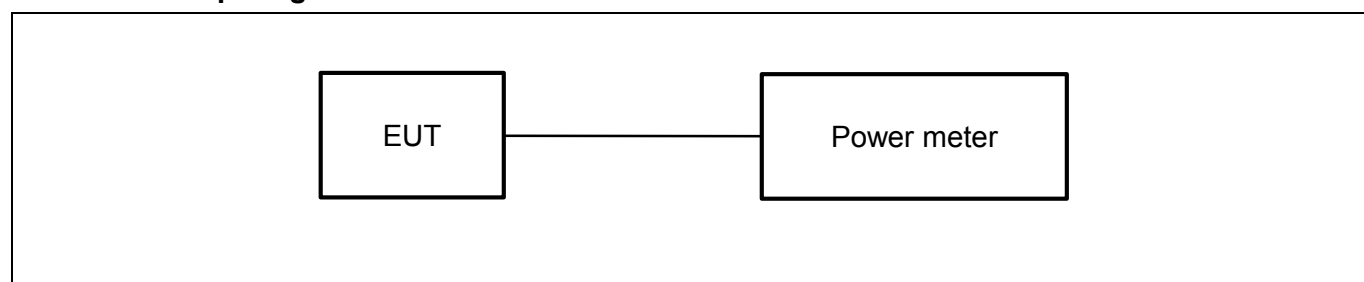

6.2.3 Test Data:

Please Refer to Appendix for Details.

6.3 Power spectral density


Test Requirement:	47 CFR Part 15.407(a)(1)(iv) 47 CFR Part 15.407(a)(3)(i)
Test Limit:	For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Test Method:	ANSI C63.10-2013, section 12.5
Procedure:	a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.) b) Use the peak search function on the instrument to find the peak of the spectrum. c) Make the following adjustments to the peak value of the spectrum, if applicable: 1) If method SA-2 or SA-2A was used, then add $[10 \log (1 / D)]$, where D is the duty cycle, to the peak of the spectrum. 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. d) The result is the PPSD. e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities. This requirement also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e.,

	1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply: 1) Set RBW $\geq 1 / T$, where T is defined in 12.2 a). 2) Set VBW $\geq [3 \times \text{RBW}]$. 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.
--	---

6.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	56 %	Atmospheric Pressure:	99 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				

6.3.2 Test Setup Diagram:

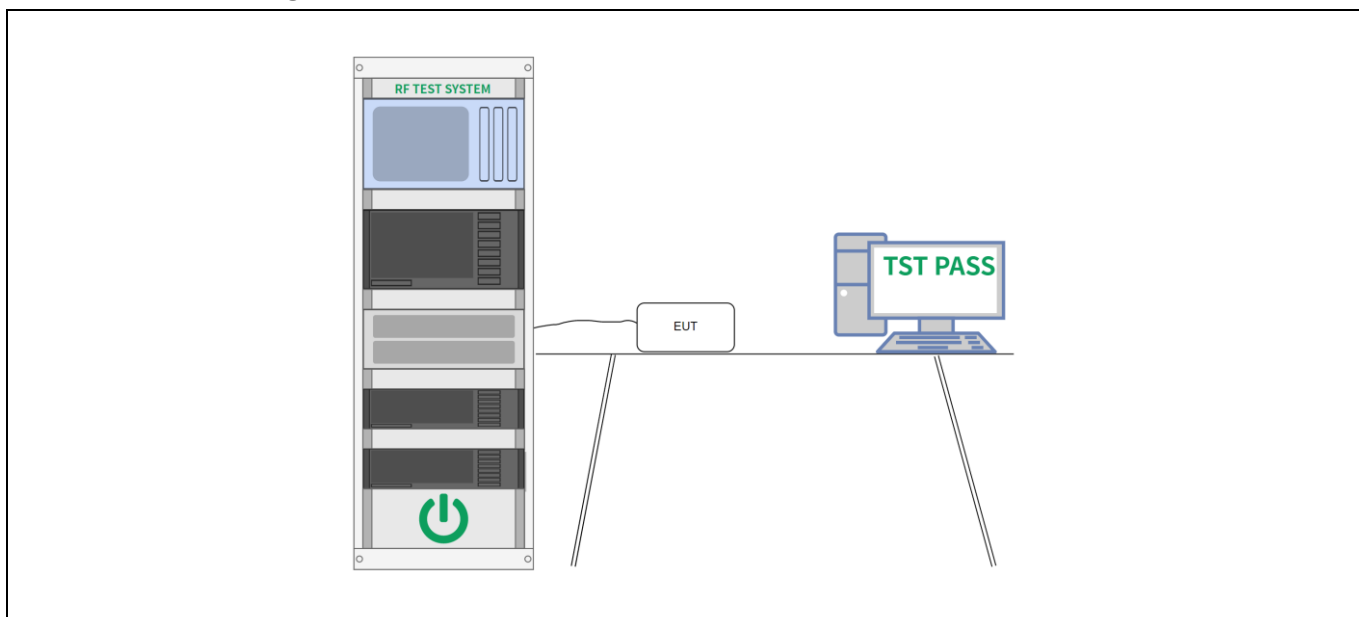

6.3.3 Test Data:

Please Refer to Appendix for Details.

6.4 Emission bandwidth and occupied bandwidth


Test Requirement:	U-NII 1: No limits, only for report use. U-NII 3: 47 CFR Part 15.407(e)
Test Limit:	U-NII 1: No limits, only for report use. U-NII 3: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 6.9 & 12.4 KDB 789033 D02, Clause C.2
Procedure:	Emission bandwidth: - Set RBW = approximately 1% of the emission bandwidth. - Set the VBW > RBW. - Detector = peak. - Trace mode = max hold. - Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. Occupied bandwidth: - The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. - The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. - Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2. - Step a) through step c) might require iteration to adjust within the specified range. - Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. - Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. - If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the

	total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies. h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s). 6 dB emission bandwidth: a) Set RBW = 100 kHz. b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW. c) Detector = Peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
--	---

6.4.1 E.U.T. Operation:

Operating Environment:					
Temperature:	25 °C	Humidity:	56 %	Atmospheric Pressure:	99 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				

6.4.2 Test Setup Diagram:

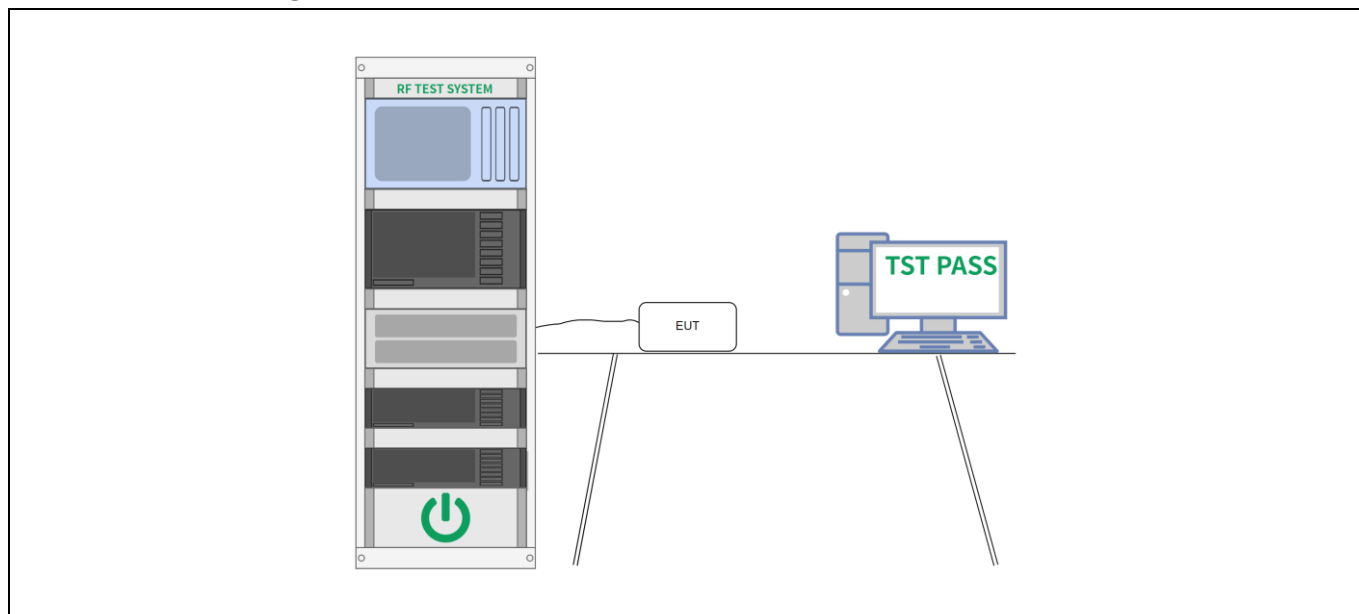

6.4.3 Test Data:

Please Refer to Appendix for Details.

6.5 Band edge emissions (Radiated)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)																																																																										
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. <table border="1"> <thead> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> </thead> <tbody> <tr> <td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr> <td>¹0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr> <td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr> <td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr> <td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr> <td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr> <td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr> <td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr> <td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr> <td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr> <td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr> <td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr> <td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr> <td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr> <td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr> <td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>(²)</td></tr> <tr> <td>13.36-13.41</td><td></td><td></td><td></td></tr> </tbody> </table> ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ²Above 38.6 The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:			MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4	6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	(²)	13.36-13.41			
MHz	MHz	MHz	GHz																																																																								
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																								
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																								
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																								
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																								
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																								
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5																																																																								
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																								
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4																																																																								
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																								
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																								
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4																																																																								
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																								
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																								
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																								
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																								
12.57675-12.57725	322-335.4	3600-4400	(²)																																																																								
13.36-13.41																																																																											


	<table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength																								

	limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
--	---

6.5.1 E.U.T. Operation:

Operating Environment:					
Temperature:	30.4 °C	Humidity:	49.9 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.5.2 Test Setup Diagram:

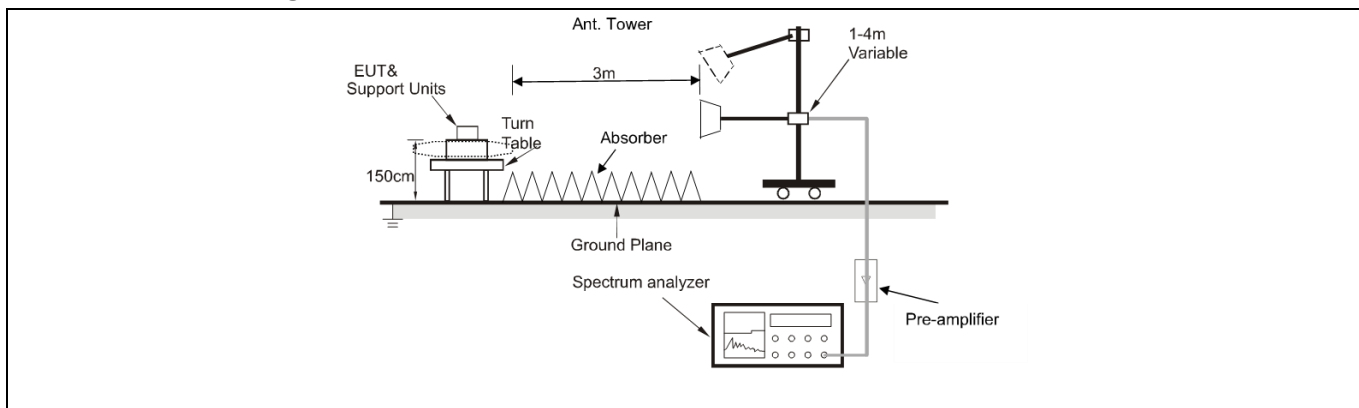

Note: The antenna gain and cable loss is compensated in the test plot.

6.5.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 5150-5250 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4500.000	51.15	-8.46	42.69	74.00	-31.31	peak
2		4500.000	40.76	-8.46	32.30	54.00	-21.70	AVG
3		5150.000	52.27	-5.61	46.66	74.00	-27.34	peak
4	*	5150.000	42.74	-5.61	37.13	54.00	-16.87	AVG

Mode1 / Polarization: Vertical / Band: 5150-5250 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		4500.000	50.90	-8.46	42.44	74.00	-31.56	peak
2		4500.000	41.17	-8.46	32.71	54.00	-21.29	AVG
3		5150.000	51.28	-5.61	45.67	74.00	-28.33	peak
4	*	5150.000	41.05	-5.61	35.44	54.00	-18.56	AVG

Mode1 / Polarization: Horizontal / Band: 5150-5250 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		5350.000	50.42	-5.17	45.25	74.00	-28.75	peak
2	*	5350.000	40.86	-5.17	35.69	54.00	-18.31	AVG
3		5460.000	49.67	-5.16	44.51	74.00	-29.49	peak
4		5460.000	40.37	-5.16	35.21	54.00	-18.79	AVG

Mode1 / Polarization: Vertical / Band: 5150-5250 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		5350.000	49.14	-5.17	43.97	74.00	-30.03	peak
2		5350.000	39.81	-5.17	34.64	54.00	-19.36	AVG
3		5460.000	49.93	-5.16	44.77	74.00	-29.23	peak
4	*	5460.000	40.37	-5.16	35.21	54.00	-18.79	AVG

Mode1 / Polarization: Horizontal / Band: 5725-5850 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5650.000	50.23	-4.01	46.22	68.20	-21.98	peak
2		5700.000	49.81	-4.07	45.74	105.20	-59.46	peak
3		5720.000	51.56	-4.23	47.33	110.80	-63.47	peak
4		5725.000	57.15	-4.27	52.88	122.20	-69.32	peak

Mode1 / Polarization: Vertical / Band: 5725-5850 MHz / BW: 20 / CH: L

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	5650.000	51.31	-4.01	47.30	68.20	-20.90	peak
2		5700.000	50.74	-4.07	46.67	105.20	-58.53	peak
3		5720.000	50.57	-4.23	46.34	110.80	-64.46	peak
4		5725.000	50.98	-4.27	46.71	122.20	-75.49	peak

Mode1 / Polarization: Horizontal / Band: 5725-5850 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		5850.000	50.87	-4.31	46.56	122.20	-75.64	peak
2		5855.000	50.55	-4.23	46.32	110.80	-64.48	peak
3		5875.000	49.99	-3.93	46.06	105.20	-59.14	peak
4	*	5920.000	50.46	-3.59	46.87	71.90	-25.03	peak

Mode1 / Polarization: Vertical / Band: 5725-5850 MHz / BW: 20 / CH: H

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		5850.000	50.54	-4.31	46.23	122.20	-75.97	peak
2		5855.000	49.62	-4.23	45.39	110.80	-65.41	peak
3		5875.000	50.58	-3.93	46.65	105.20	-58.55	peak
4	*	5920.000	49.07	-3.59	45.48	71.90	-26.42	peak

6.6 Undesirable emission limits (below 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(9)																								
Test Limit:	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.5																								
Procedure:	Below 1GHz: a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.																								


	Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
--	---

6.6.1 E.U.T. Operation:

Operating Environment:


Temperature:	30.4 °C	Humidity:	49.9 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				
Note: The amplitude of spurious emissions which are attenuated more than 20 dB below the limits are not reported. There were no emissions found below 30MHz within 20dB of the limit.					

6.6.2 Test Setup Diagram:

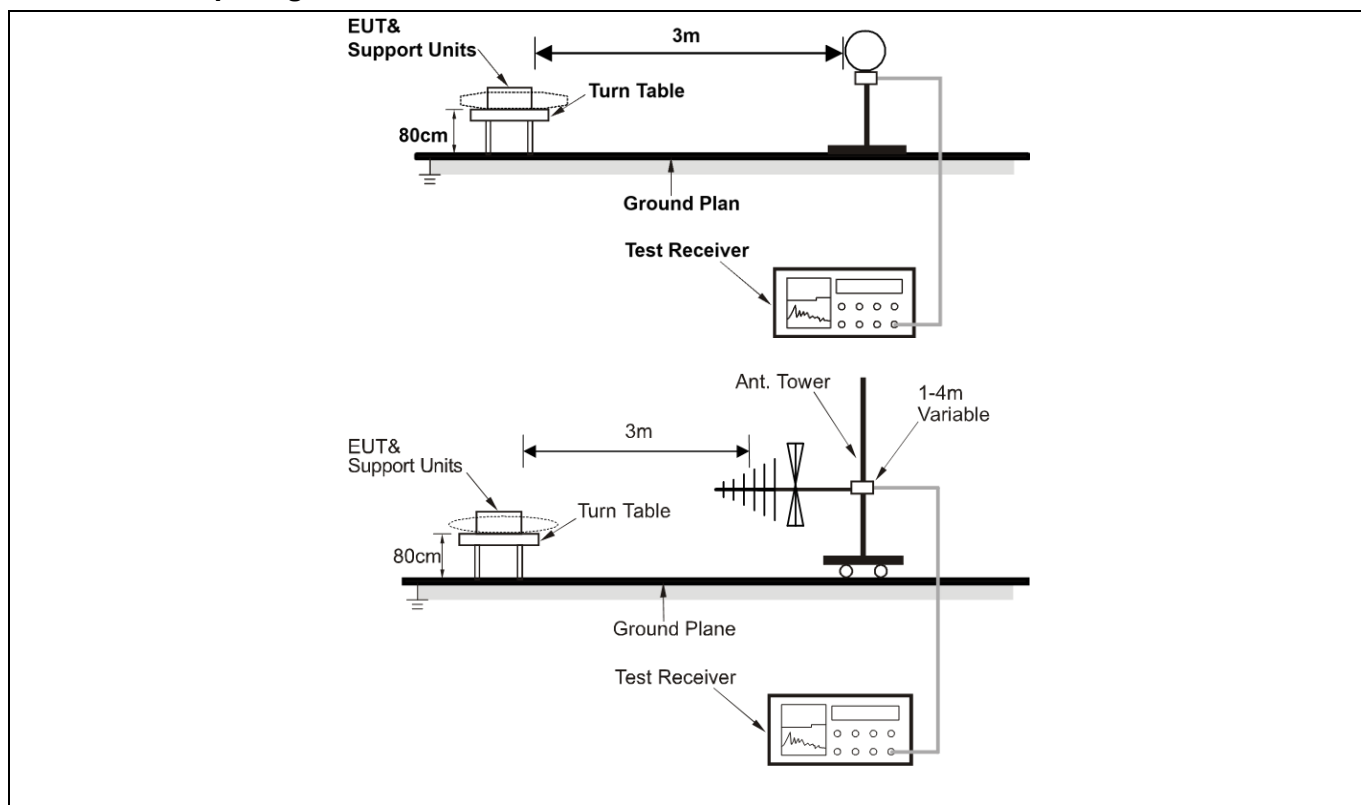


6.6.3 Test Data:

Mode1 / Polarization: Horizontal / Band: 5150-5250 MHz / BW: 20 / CH: H

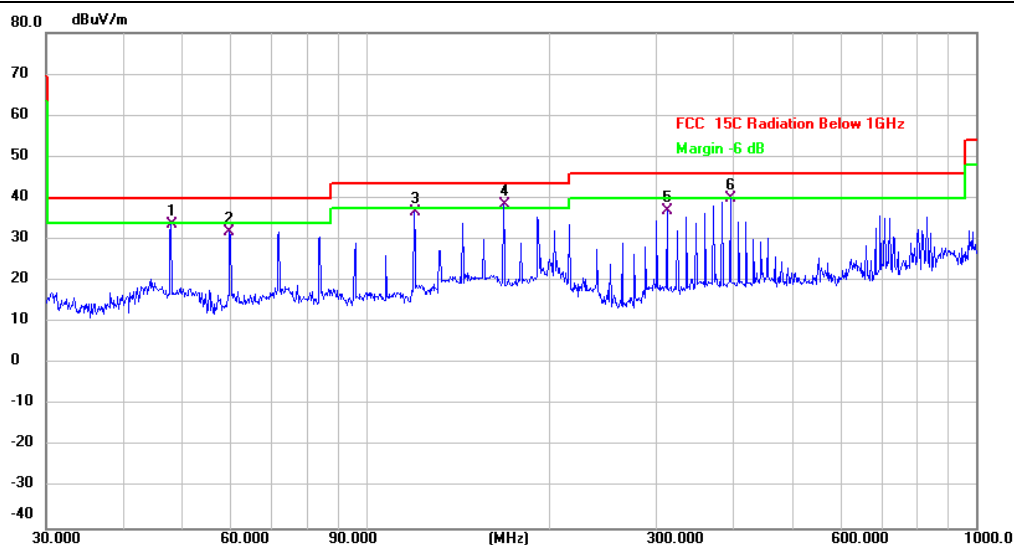


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		47.9940	41.23	-7.51	33.72	40.00	-6.28	QP	
2		59.8588	41.51	-9.79	31.72	40.00	-8.28	QP	
3		119.8556	45.89	-9.22	36.67	43.50	-6.83	QP	
4	*	167.8243	49.38	-11.01	38.37	43.50	-5.13	QP	
5		312.1794	43.11	-6.09	37.02	46.00	-8.98	QP	
6		396.2415	44.87	-4.97	39.90	46.00	-6.10	QP	

Mode1 / Polarization: Vertical / Band: 5150-5250 MHz / BW: 20 / CH: H

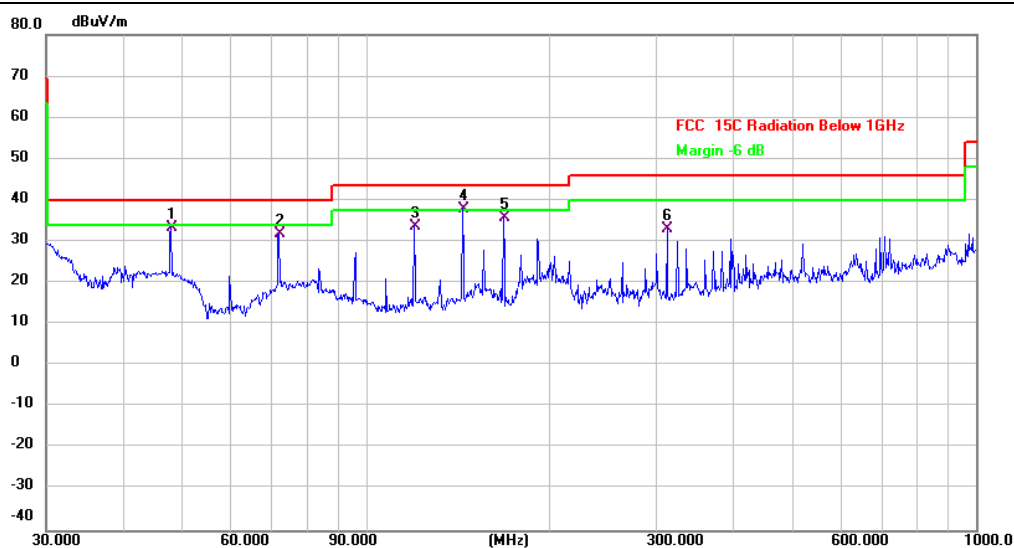


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		47.9940	40.88	-7.51	33.37	40.00	-6.63	QP	
2		72.0843	43.13	-11.27	31.86	40.00	-8.14	QP	
3		119.8556	43.00	-9.22	33.78	43.50	-9.72	QP	
4	*	143.8295	48.31	-10.56	37.75	43.50	-5.75	QP	
5		167.8243	46.64	-11.01	35.63	43.50	-7.87	QP	
6		312.1794	39.24	-6.09	33.15	46.00	-12.85	QP	

Mode1 / Polarization: Horizontal / Band: 5725-5850 MHz / BW: 20 / CH: H

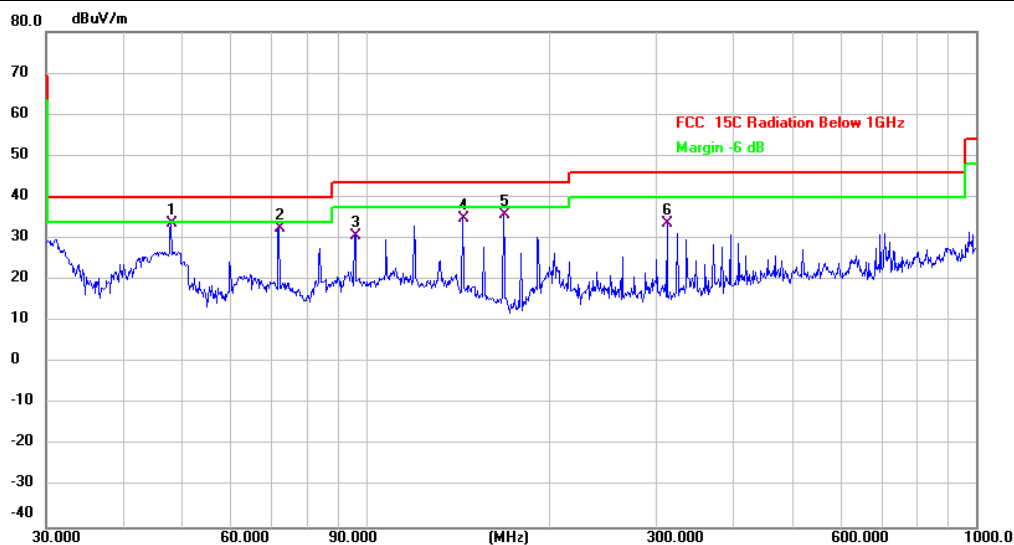

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	47.9940	41.17	-7.51	33.66	40.00	-6.34	QP	
2		72.0843	43.69	-11.27	32.42	40.00	-7.58	QP	
3		96.0986	41.29	-10.55	30.74	43.50	-12.76	QP	
4		143.8295	45.28	-10.56	34.72	43.50	-8.78	QP	
5		167.8243	46.79	-11.01	35.78	43.50	-7.72	QP	
6		312.1794	39.79	-6.09	33.70	46.00	-12.30	QP	

Mode1 / Polarization: Vertical / Band: 5725-5850 MHz / BW: 20 / CH: H

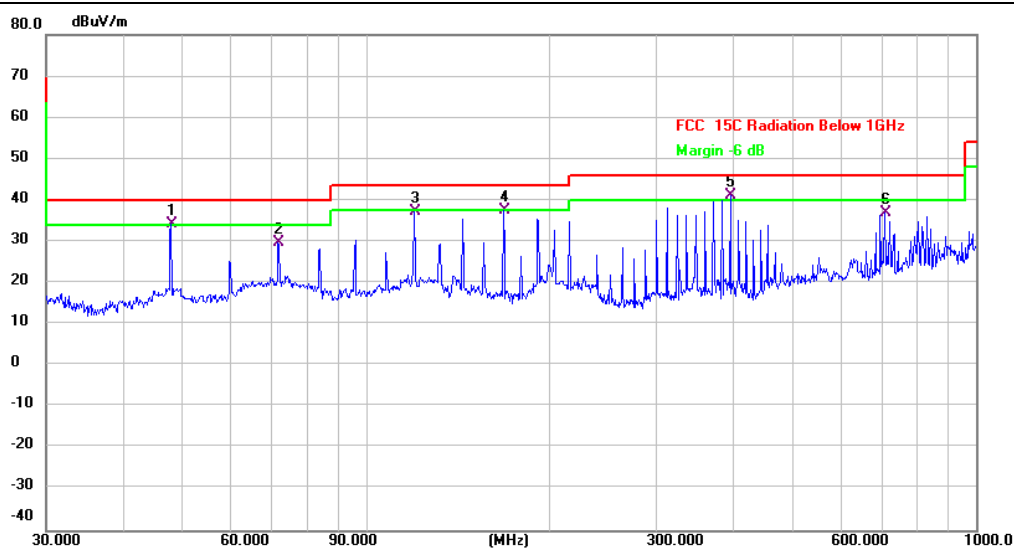

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	!	47.9940	41.86	-7.51	34.35	40.00	-5.65	QP	
2		71.8320	40.93	-11.26	29.67	40.00	-10.33	QP	
3		119.8556	46.61	-9.22	37.39	43.50	-6.11	QP	
4		167.8243	48.50	-11.01	37.49	43.50	-6.01	QP	
5	*	396.2415	46.25	-4.97	41.28	46.00	-4.72	QP	
6		709.1823	36.55	0.32	36.87	46.00	-9.13	QP	

6.7 Undesirable emission limits (above 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(1) 47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)																																																																										
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. <table border="1"> <thead> <tr> <th>MHz</th><th>MHz</th><th>MHz</th><th>GHz</th></tr> </thead> <tbody> <tr> <td>0.090-0.110</td><td>16.42-16.423</td><td>399.9-410</td><td>4.5-5.15</td></tr> <tr> <td>¹0.495-0.505</td><td>16.69475-16.69525</td><td>608-614</td><td>5.35-5.46</td></tr> <tr> <td>2.1735-2.1905</td><td>16.80425-16.80475</td><td>960-1240</td><td>7.25-7.75</td></tr> <tr> <td>4.125-4.128</td><td>25.5-25.67</td><td>1300-1427</td><td>8.025-8.5</td></tr> <tr> <td>4.17725-4.17775</td><td>37.5-38.25</td><td>1435-1626.5</td><td>9.0-9.2</td></tr> <tr> <td>4.20725-4.20775</td><td>73-74.6</td><td>1645.5-1646.5</td><td>9.3-9.5</td></tr> <tr> <td>6.215-6.218</td><td>74.8-75.2</td><td>1660-1710</td><td>10.6-12.7</td></tr> <tr> <td>6.26775-6.26825</td><td>108-121.94</td><td>1718.8-1722.2</td><td>13.25-13.4</td></tr> <tr> <td>6.31175-6.31225</td><td>123-138</td><td>2200-2300</td><td>14.47-14.5</td></tr> <tr> <td>8.291-8.294</td><td>149.9-150.05</td><td>2310-2390</td><td>15.35-16.2</td></tr> <tr> <td>8.362-8.366</td><td>156.52475-156.52525</td><td>2483.5-2500</td><td>17.7-21.4</td></tr> <tr> <td>8.37625-8.38675</td><td>156.7-156.9</td><td>2690-2900</td><td>22.01-23.12</td></tr> <tr> <td>8.41425-8.41475</td><td>162.0125-167.17</td><td>3260-3267</td><td>23.6-24.0</td></tr> <tr> <td>12.29-12.293</td><td>167.72-173.2</td><td>3332-3339</td><td>31.2-31.8</td></tr> <tr> <td>12.51975-12.52025</td><td>240-285</td><td>3345.8-3358</td><td>36.43-36.5</td></tr> <tr> <td>12.57675-12.57725</td><td>322-335.4</td><td>3600-4400</td><td>(²)</td></tr> <tr> <td>13.36-13.41</td><td></td><td></td><td></td></tr> </tbody> </table> ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ²Above 38.6 The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:			MHz	MHz	MHz	GHz	0.090-0.110	16.42-16.423	399.9-410	4.5-5.15	¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46	2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75	4.125-4.128	25.5-25.67	1300-1427	8.025-8.5	4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2	4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5	6.215-6.218	74.8-75.2	1660-1710	10.6-12.7	6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4	6.31175-6.31225	123-138	2200-2300	14.47-14.5	8.291-8.294	149.9-150.05	2310-2390	15.35-16.2	8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4	8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12	8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0	12.29-12.293	167.72-173.2	3332-3339	31.2-31.8	12.51975-12.52025	240-285	3345.8-3358	36.43-36.5	12.57675-12.57725	322-335.4	3600-4400	(²)	13.36-13.41			
MHz	MHz	MHz	GHz																																																																								
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15																																																																								
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46																																																																								
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75																																																																								
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5																																																																								
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2																																																																								
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5																																																																								
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7																																																																								
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4																																																																								
6.31175-6.31225	123-138	2200-2300	14.47-14.5																																																																								
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2																																																																								
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4																																																																								
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12																																																																								
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0																																																																								
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8																																																																								
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5																																																																								
12.57675-12.57725	322-335.4	3600-4400	(²)																																																																								
13.36-13.41																																																																											

	<table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100 **</td><td>3</td></tr><tr><td>88-216</td><td>150 **</td><td>3</td></tr><tr><td>216-960</td><td>200 **</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table> ** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100 **	3	88-216	150 **	3	216-960	200 **	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009-0.490	2400/F(kHz)	300																							
0.490-1.705	24000/F(kHz)	30																							
1.705-30.0	30	30																							
30-88	100 **	3																							
88-216	150 **	3																							
216-960	200 **	3																							
Above 960	500	3																							
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.6, 12.7.7																								
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength																								

	limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. 5. Note: The antenna gain and cable loss is compensated in the test plot.
--	--

6.7.1 E.U.T. Operation:

Operating Environment:					
Temperature:	30.4 °C	Humidity:	49.9 %	Atmospheric Pressure:	101 kPa
Pre test mode:	Mode1, Mode2, Mode3, Mode4, Mode5, Mode6				
Final test mode:	All of the listed pre-test mode were tested, only the data of the worst mode (Mode1) is recorded in the report				

6.7.2 Test Data:

Mode1 / Polarization: Horizontal / Band: 5150-5250 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10360.000	47.92	4.04	51.96	68.20	-16.24	peak
2	10360.000	37.19	4.04	41.23	54.00	-12.77	AVG
3	15540.000	6.52	47.56	54.08	68.20	-14.12	peak
4 *	15540.000	-2.80	47.56	44.76	54.00	-9.24	AVG

Mode1 / Polarization: Vertical / Band: 5150-5250 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10360.000	48.08	4.04	52.12	68.20	-16.08	peak
2	10360.000	38.32	4.04	42.36	54.00	-11.64	AVG
3	15540.000	6.57	47.56	54.13	68.20	-14.07	peak
4 *	15540.000	-3.35	47.56	44.21	54.00	-9.79	AVG

Mode1 / Polarization: Horizontal / Band: 5150-5250 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10400.000	48.07	3.79	51.86	68.20	-16.34	peak
2	10400.000	37.84	3.79	41.63	54.00	-12.37	AVG
3	15600.000	7.10	46.92	54.02	68.20	-14.18	peak
4 *	15600.000	-2.56	46.92	44.36	54.00	-9.64	AVG

Mode1 / Polarization: Vertical / Band: 5150-5250 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10400.000	47.97	3.79	51.76	68.20	-16.44	peak
2	10400.000	37.84	3.79	41.63	54.00	-12.37	AVG
3	15600.000	6.31	46.92	53.23	68.20	-14.97	peak
4 *	15600.000	-3.71	46.92	43.21	54.00	-10.79	AVG

Mode1 / Polarization: Horizontal / Band: 5150-5250 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10480.000	48.49	4.06	52.55	68.20	-15.65	peak
2	10480.000	38.29	4.06	42.35	54.00	-11.65	AVG
3	15720.000	7.78	46.86	54.64	68.20	-13.56	peak
4 *	15720.000	-2.59	46.86	44.27	54.00	-9.73	AVG

Mode1 / Polarization: Vertical / Band: 5150-5250 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10480.000	47.92	4.06	51.98	68.20	-16.22	peak
2	10480.000	37.56	4.06	41.62	54.00	-12.38	AVG
3	15720.000	7.52	46.86	54.38	68.20	-13.82	peak
4 *	15720.000	-2.51	46.86	44.35	54.00	-9.65	AVG

Mode1 / Polarization: Horizontal / Band: 5725-5850 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11490.000	7.25	48.62	55.87	68.20	-12.33	peak
2 *	11490.000	-3.30	48.62	45.32	54.00	-8.68	AVG
3	17235.000	6.82	48.39	55.21	68.20	-12.99	peak
4	17235.000	-3.22	48.39	45.17	54.00	-8.83	AVG

Mode1 / Polarization: Vertical / Band: 5725-5850 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11490.000	6.34	48.62	54.96	68.20	-13.24	peak
2	11490.000	-4.26	48.62	44.36	54.00	-9.64	AVG
3	17235.000	7.31	48.39	55.70	68.20	-12.50	peak
4 *	17235.000	-2.52	48.39	45.87	54.00	-8.13	AVG

Mode1 / Polarization: Horizontal / Band: 5725-5850 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11570.000	6.31	48.33	54.64	68.20	-13.56	peak
2	11570.000	-4.05	48.33	44.28	54.00	-9.72	AVG
3	17355.000	8.10	48.58	56.68	68.20	-11.52	peak
4 *	17355.000	-2.10	48.58	46.48	54.00	-7.52	AVG

Mode1 / Polarization: Vertical / Band: 5725-5850 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11570.000	6.51	48.33	54.84	68.20	-13.36	peak
2	11570.000	-4.02	48.33	44.31	54.00	-9.69	AVG
3	17355.000	7.09	48.58	55.67	68.20	-12.53	peak
4 *	17355.000	-2.96	48.58	45.62	54.00	-8.38	AVG

Mode1 / Polarization: Horizontal / Band: 5725-5850 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.000	6.66	47.96	54.62	68.20	-13.58	peak
2	11650.000	-3.60	47.96	44.36	54.00	-9.64	AVG
3	17475.000	7.64	48.95	56.59	68.20	-11.61	peak
4 *	17475.000	-2.38	48.95	46.57	54.00	-7.43	AVG

Mode1 / Polarization: Vertical / Band: 5725-5850 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.000	6.09	47.96	54.05	68.20	-14.15	peak
2	11650.000	-3.84	47.96	44.12	54.00	-9.88	AVG
3	17475.000	7.75	48.95	56.70	68.20	-11.50	peak
4 *	17475.000	-2.63	48.95	46.32	54.00	-7.68	AVG

Photographs of the test setup

Refer to Appendix - Test Setup Photos

Photographs of the EUT

Refer to Appendix - EUT Photos


Appendix


6.8 Appendix A1: Emission Bandwidth

6.8.1 Test Result


TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5180	20.200	5169.960	5190.160
		5200	20.000	5190.080	5210.080
		5240	20.080	5230.160	5250.240
		5745	20.440	5734.880	5755.320
		5785	20.440	5774.720	5795.160
		5825	20.240	5814.920	5835.160
11N20SISO	Ant1	5180	21.280	5169.400	5190.680
		5200	20.600	5189.800	5210.400
		5240	20.760	5229.640	5250.400
		5745	20.640	5734.760	5755.400
		5785	20.680	5774.760	5795.440
11N40SISO	Ant1	5180	20.240	5814.800	5835.040
		5190	40.640	5169.680	5210.320
		5230	41.200	5209.200	5250.400
		5755	41.040	5734.520	5775.560
		5795	41.040	5774.600	5815.640
11AC20SISO	Ant1	5180	20.800	5169.520	5190.320
		5200	20.880	5189.480	5210.360
		5240	20.800	5229.640	5250.440
		5745	20.960	5734.520	5755.480
		5785	20.840	5774.520	5795.360
11AC40SISO	Ant1	5180	20.720	5814.600	5835.320
		5190	40.400	5169.840	5210.240
		5230	41.200	5209.120	5250.320
		5755	41.040	5734.600	5775.640
		5795	41.600	5774.600	5816.200
11AC80SISO	Ant1	5210	80.640	5170.000	5250.640
		5775	80.960	5734.680	5815.640

6.8.2 Test Graphs

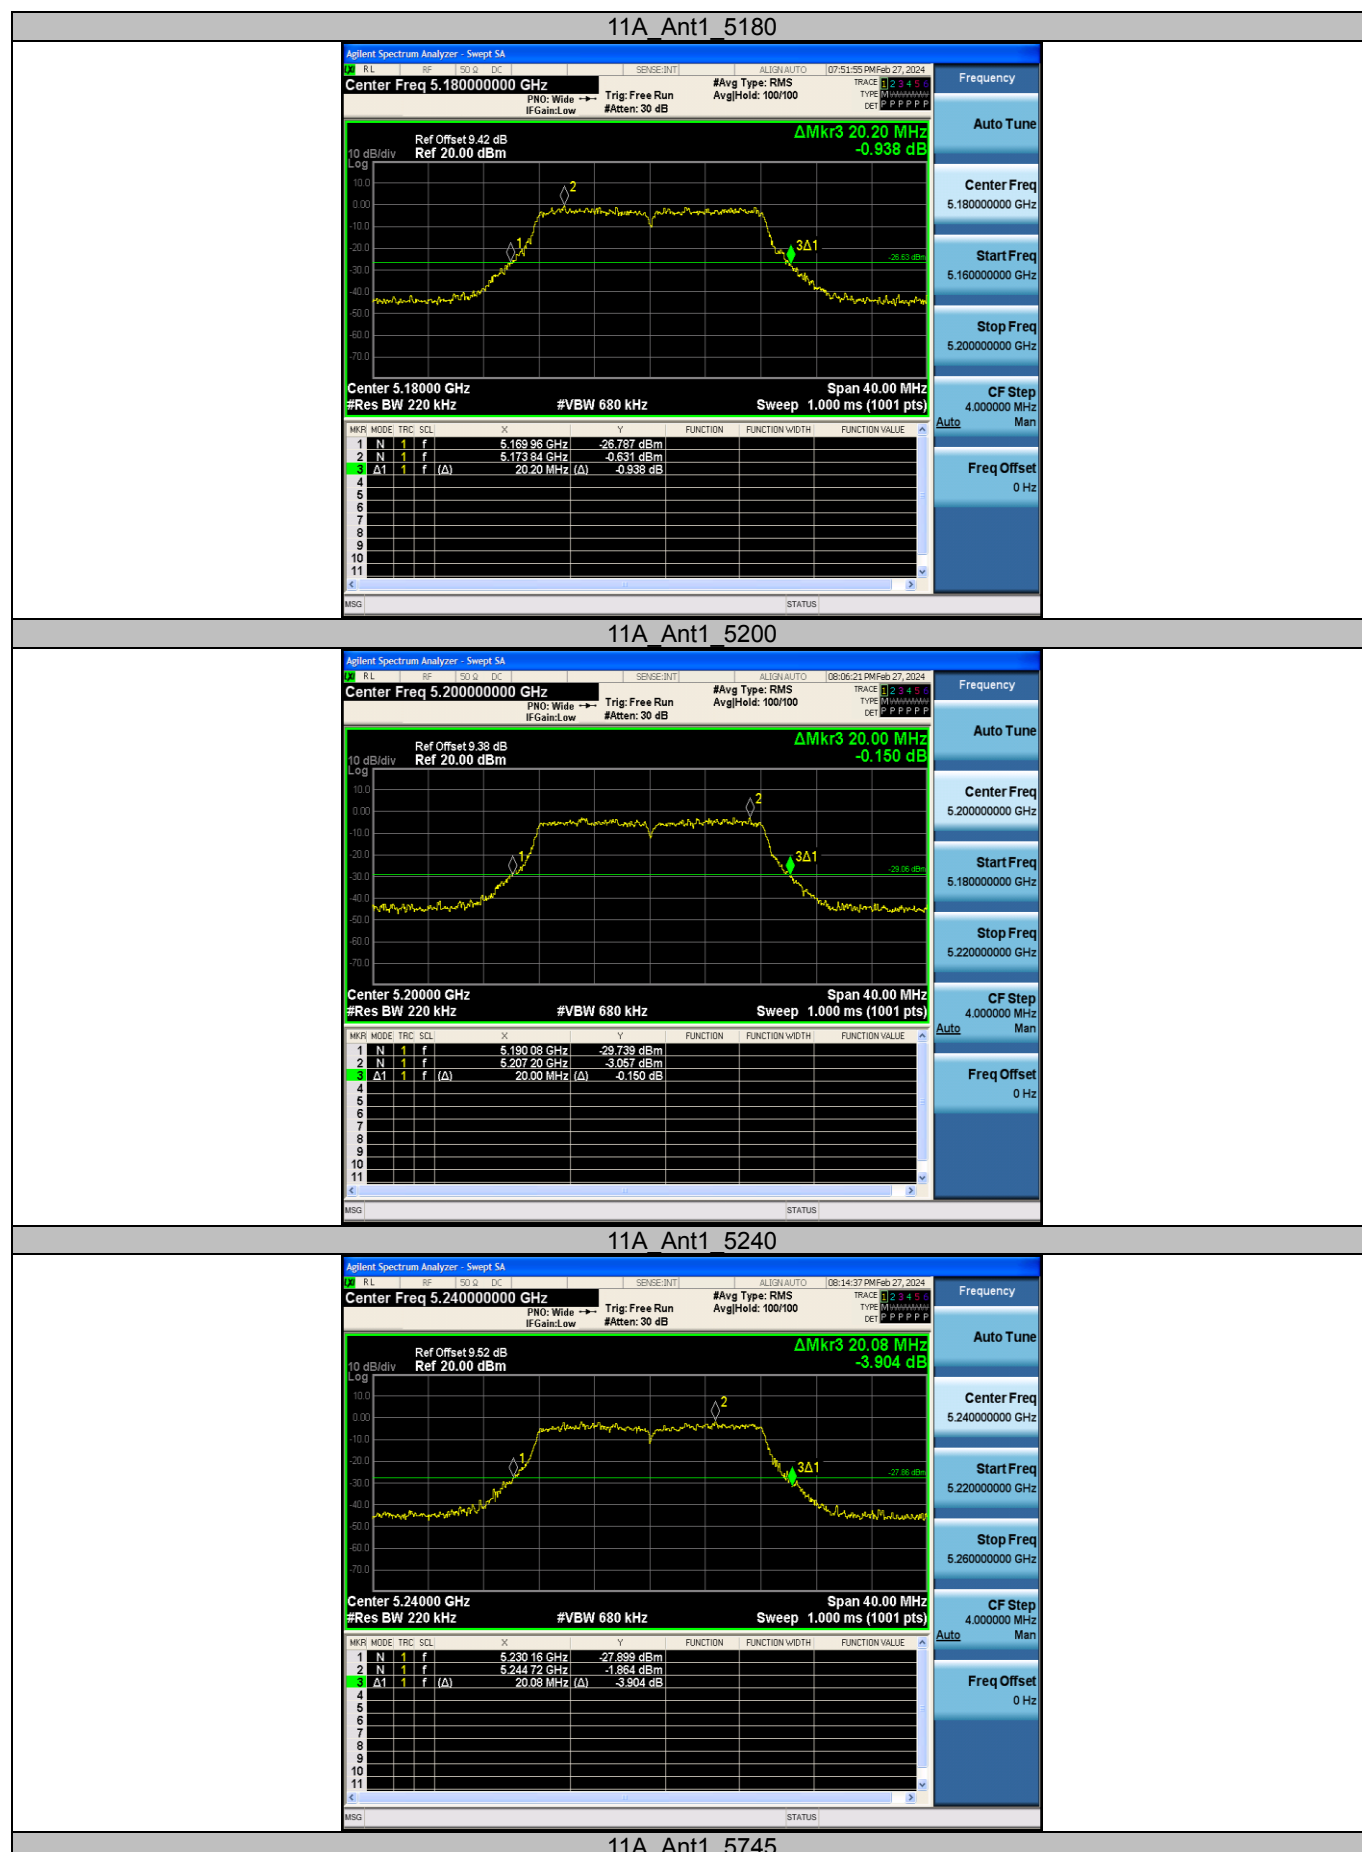

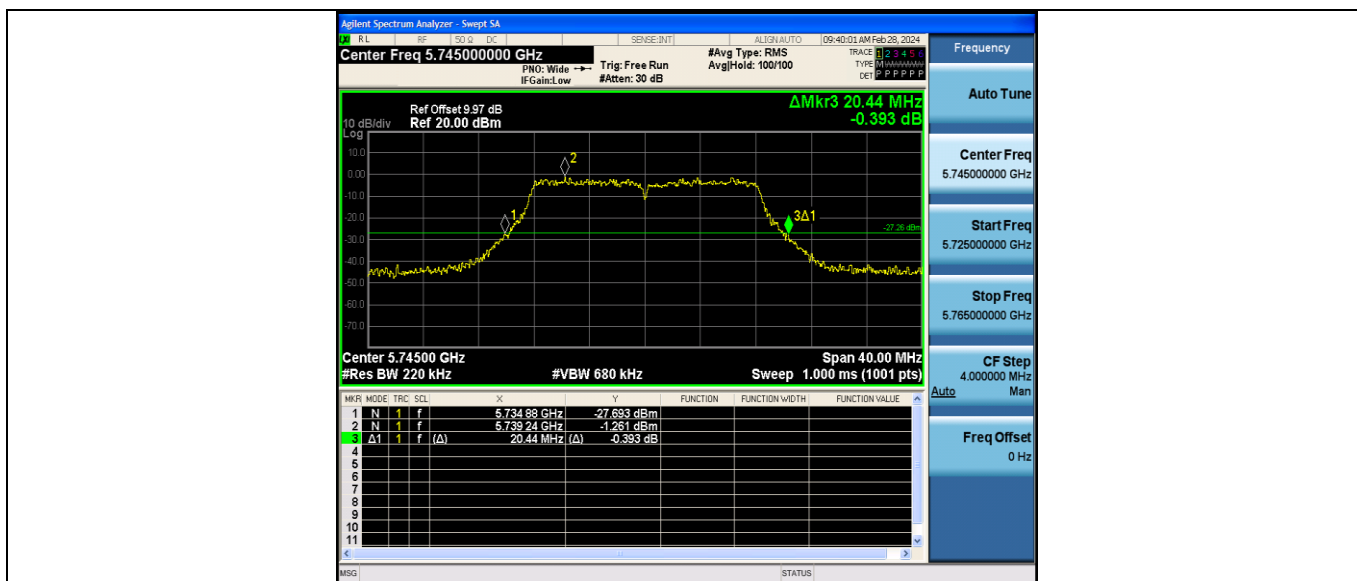


11A_Ant1_5785

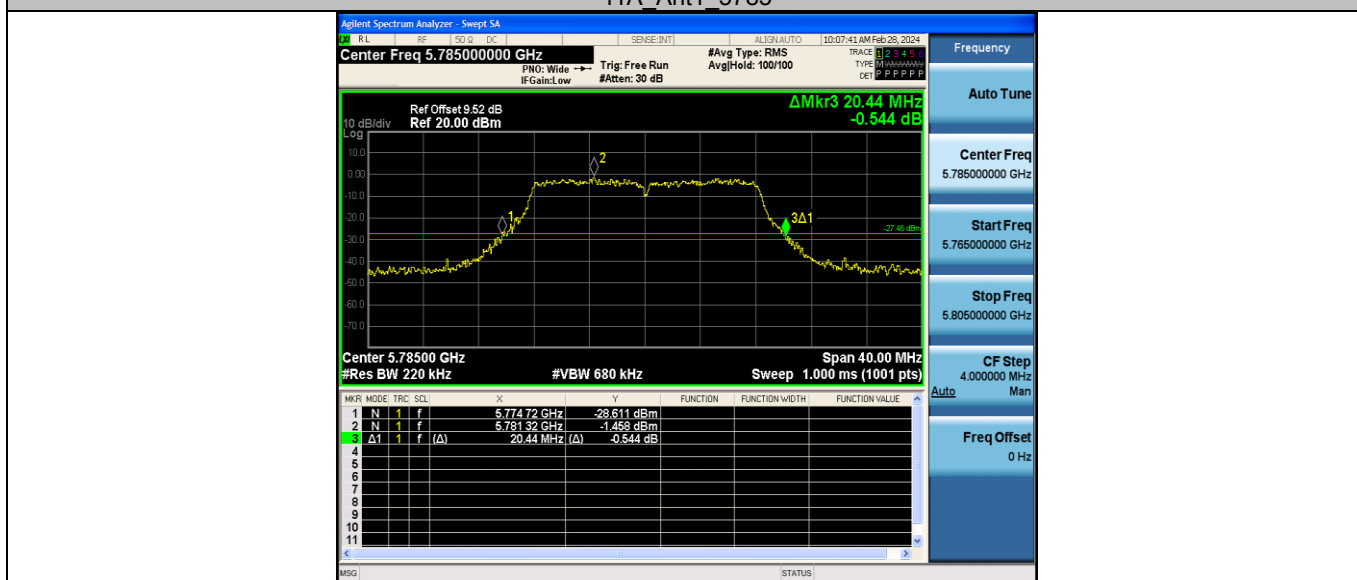



11A_Ant1_5825




11N20SISO_Ant1_5180

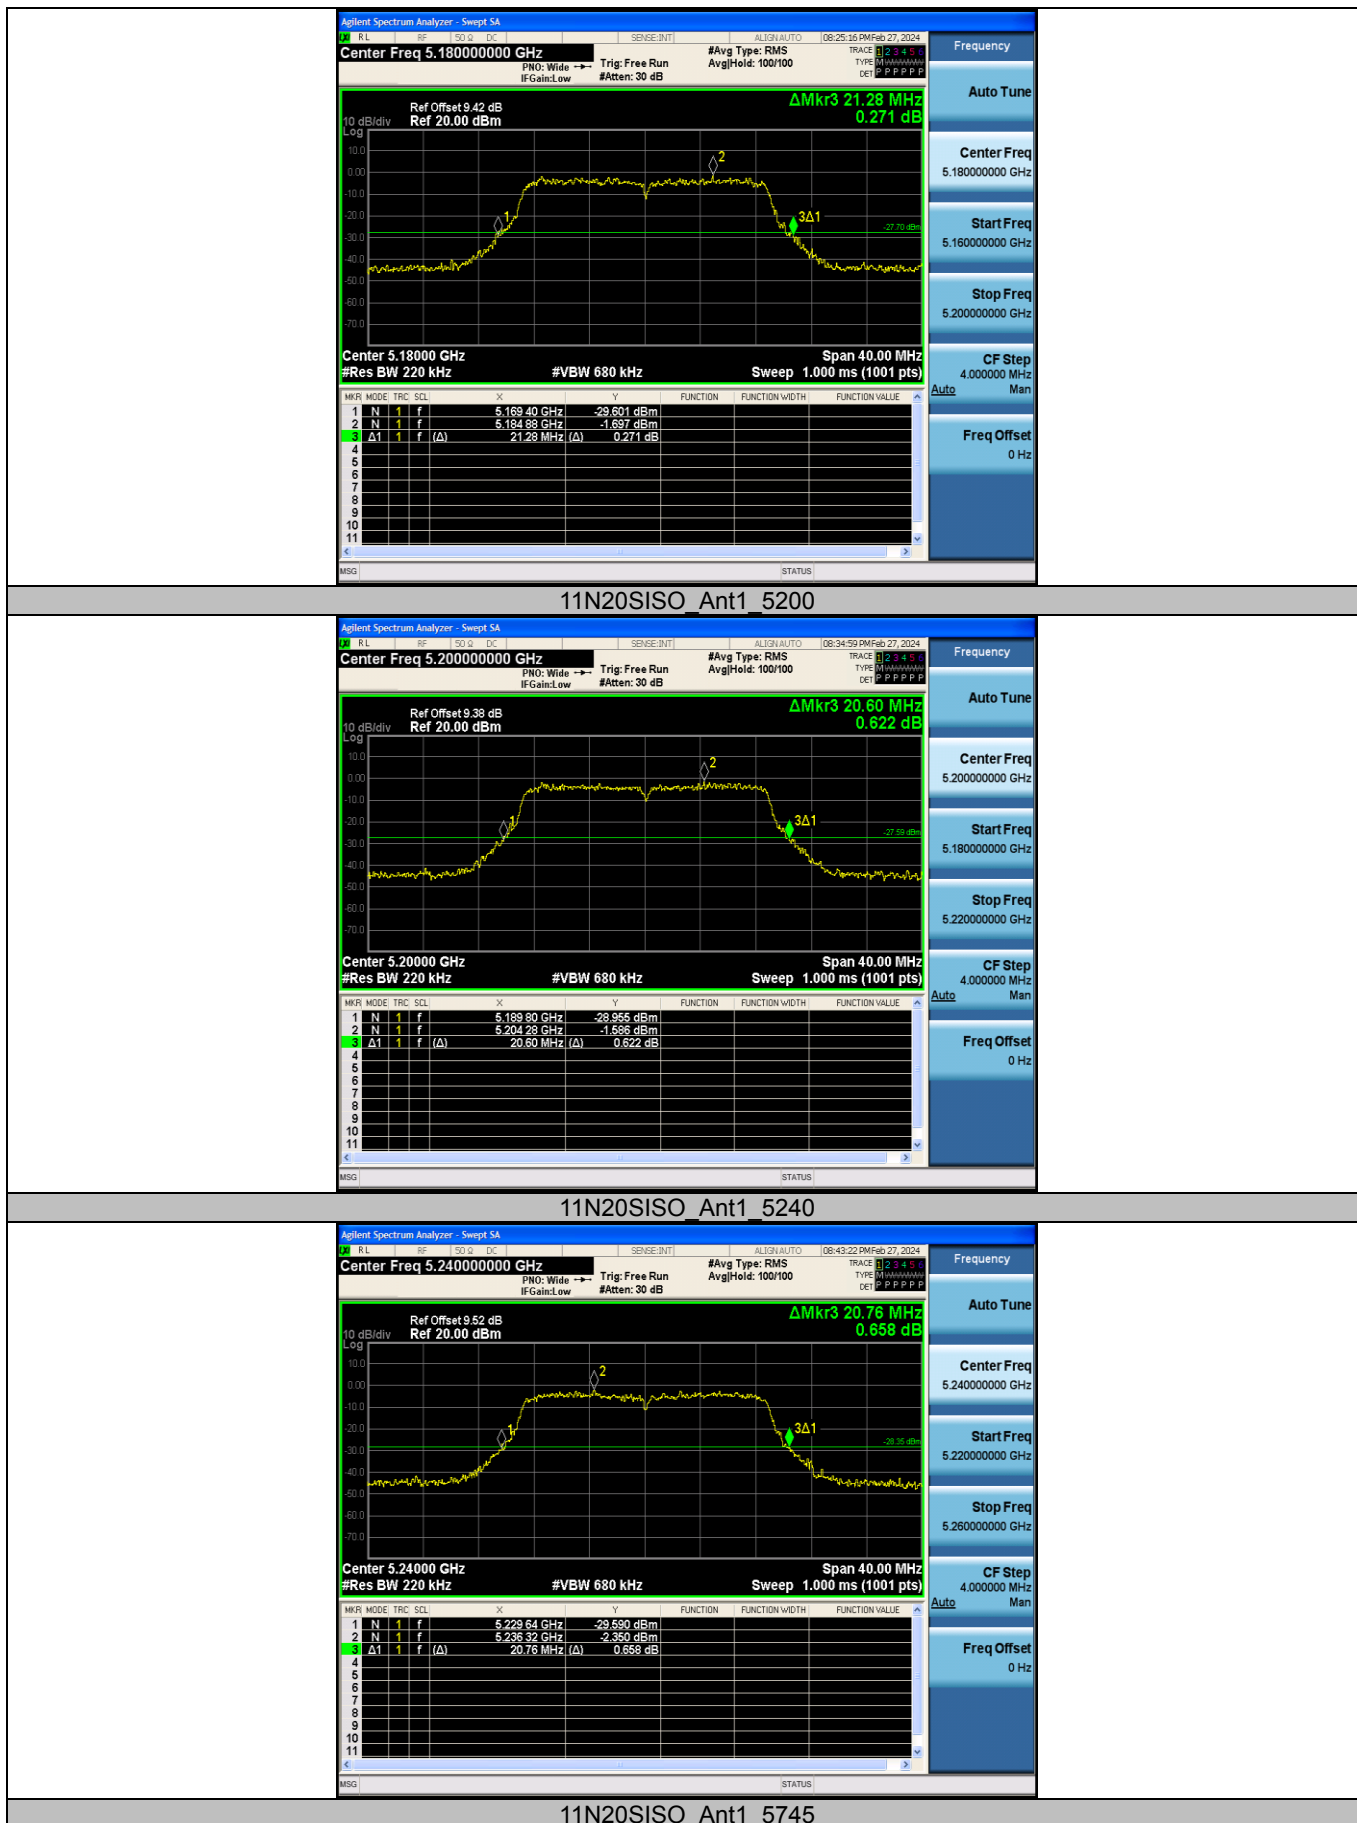


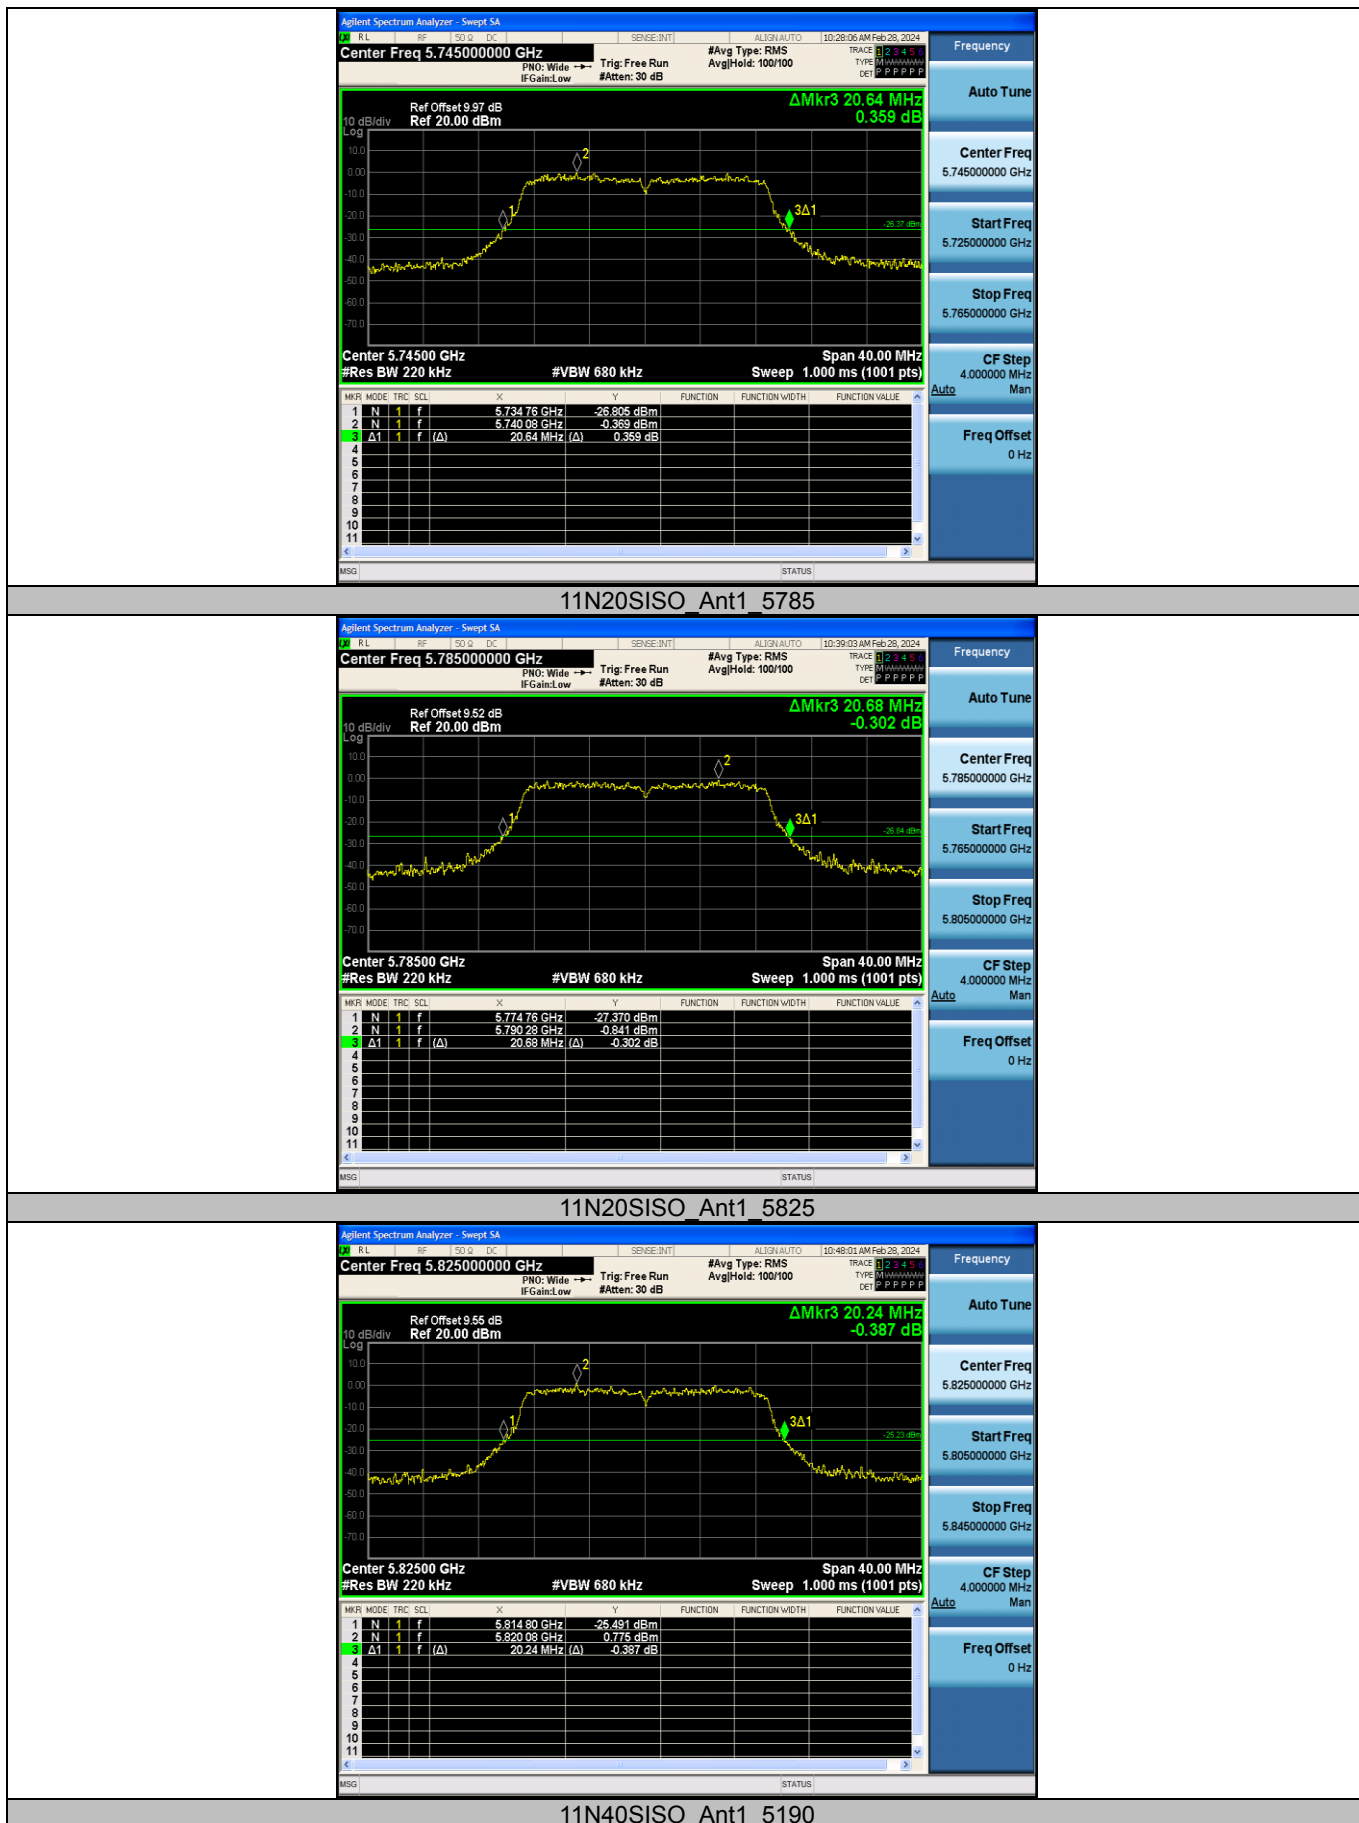

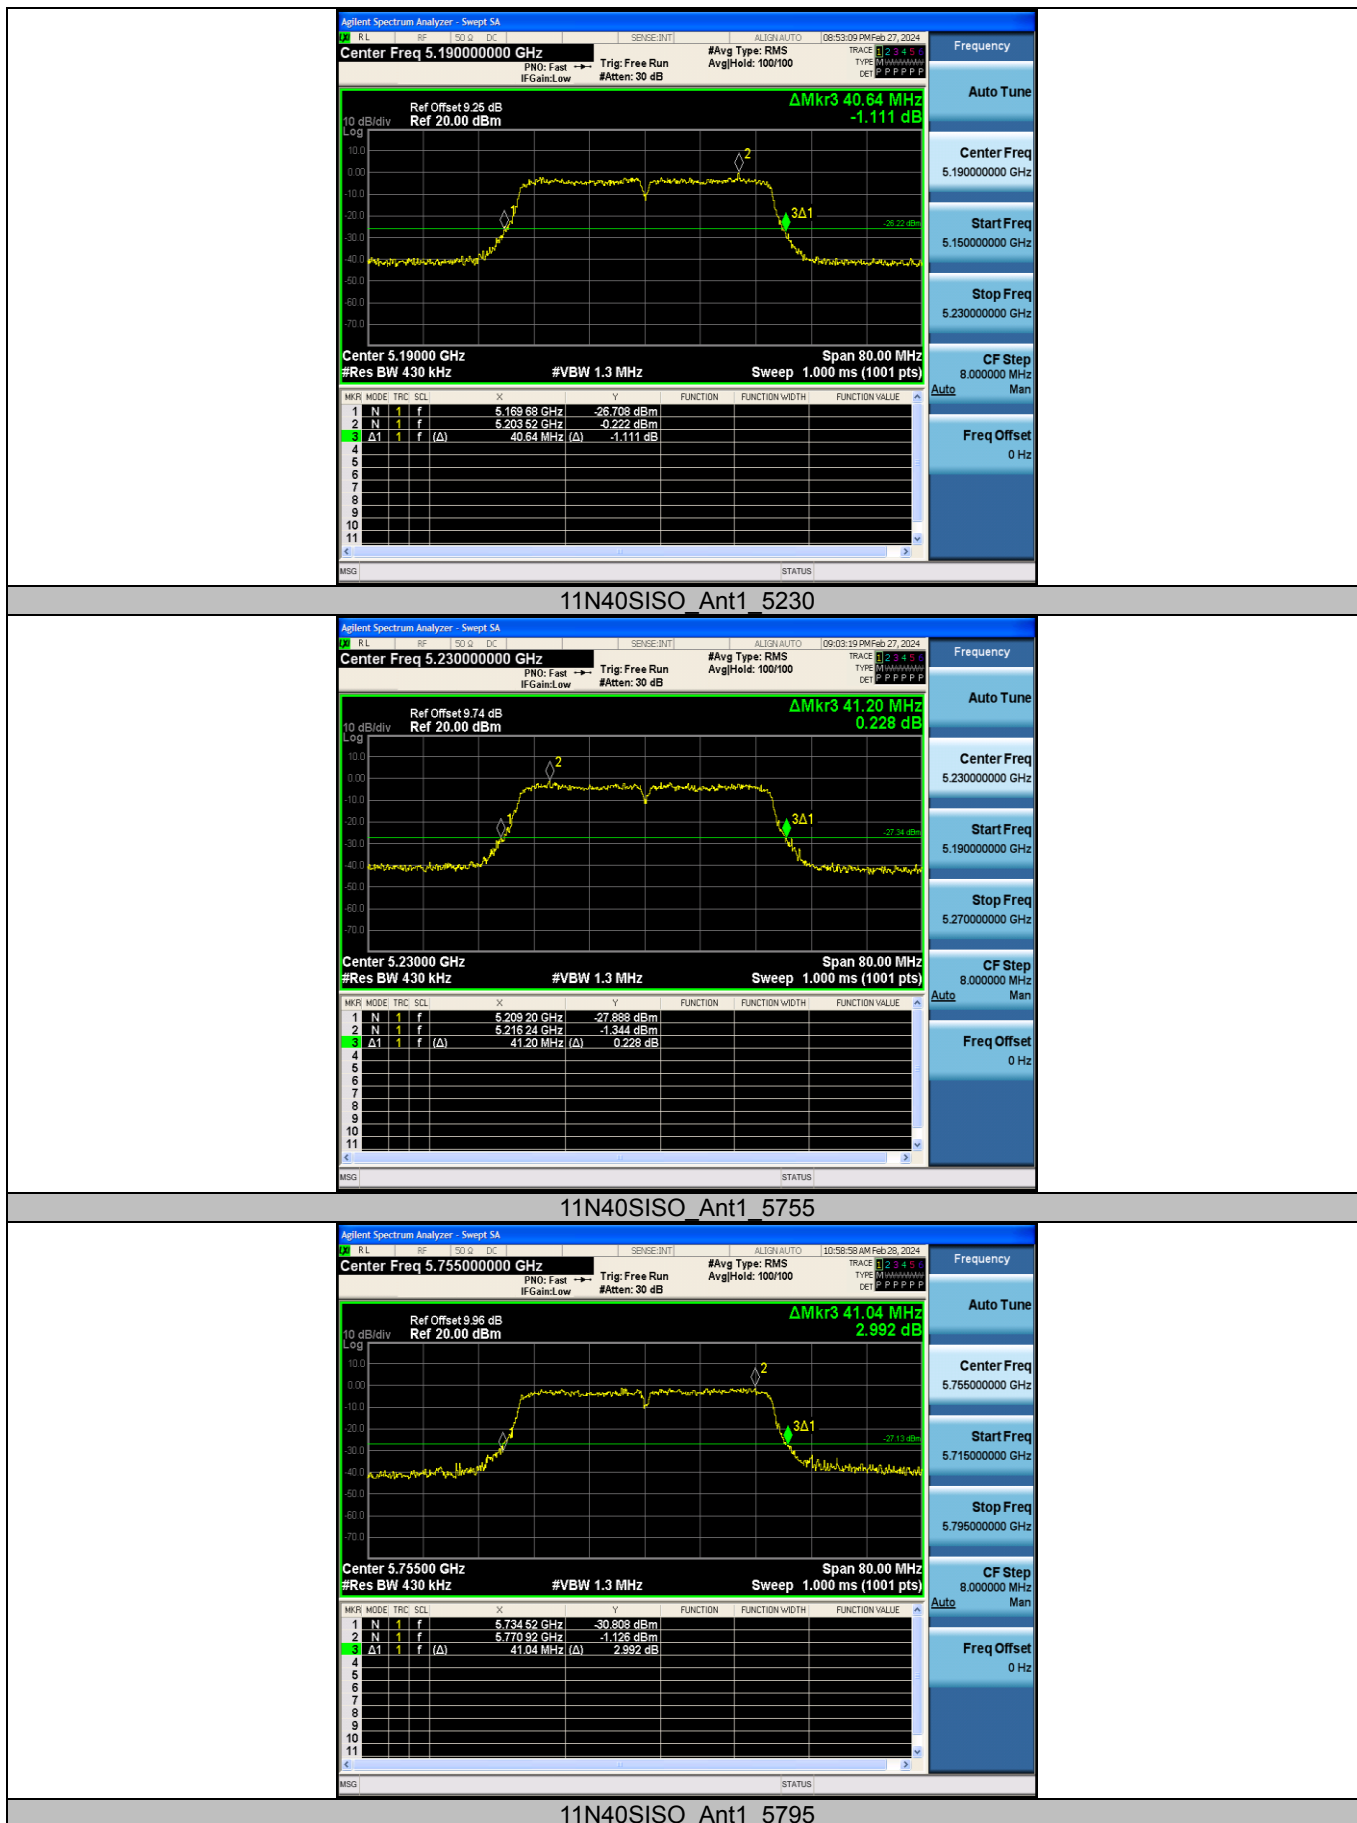


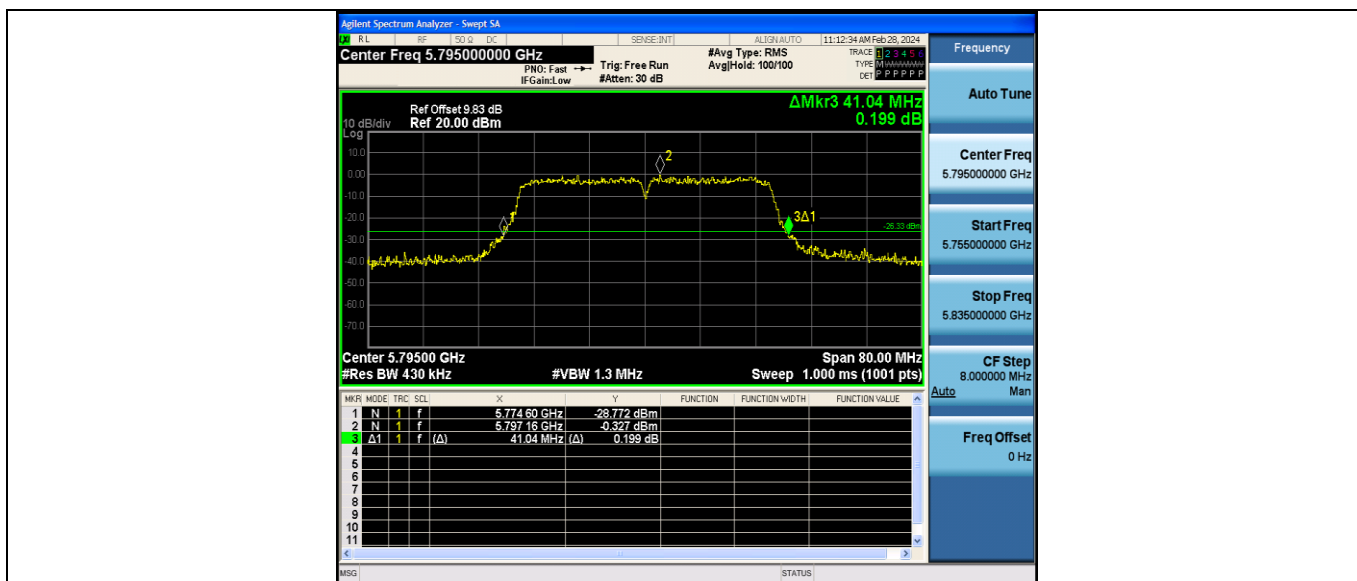

11AC20SISO_Ant1_5180

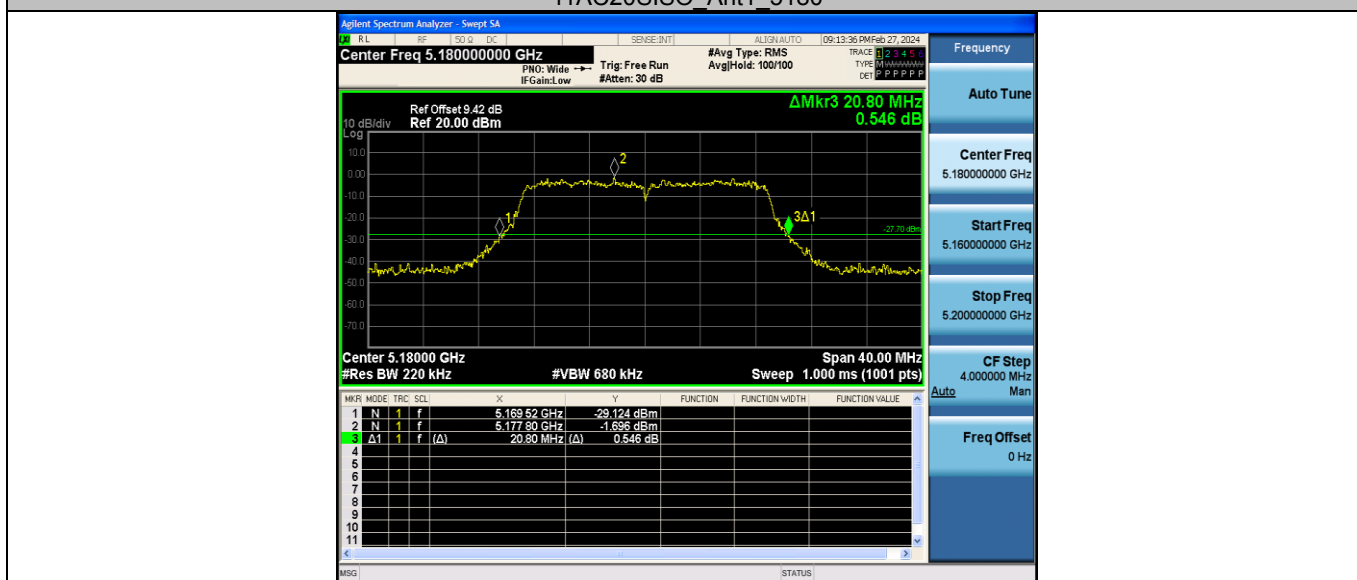

11AC20SISO_Ant1_5200

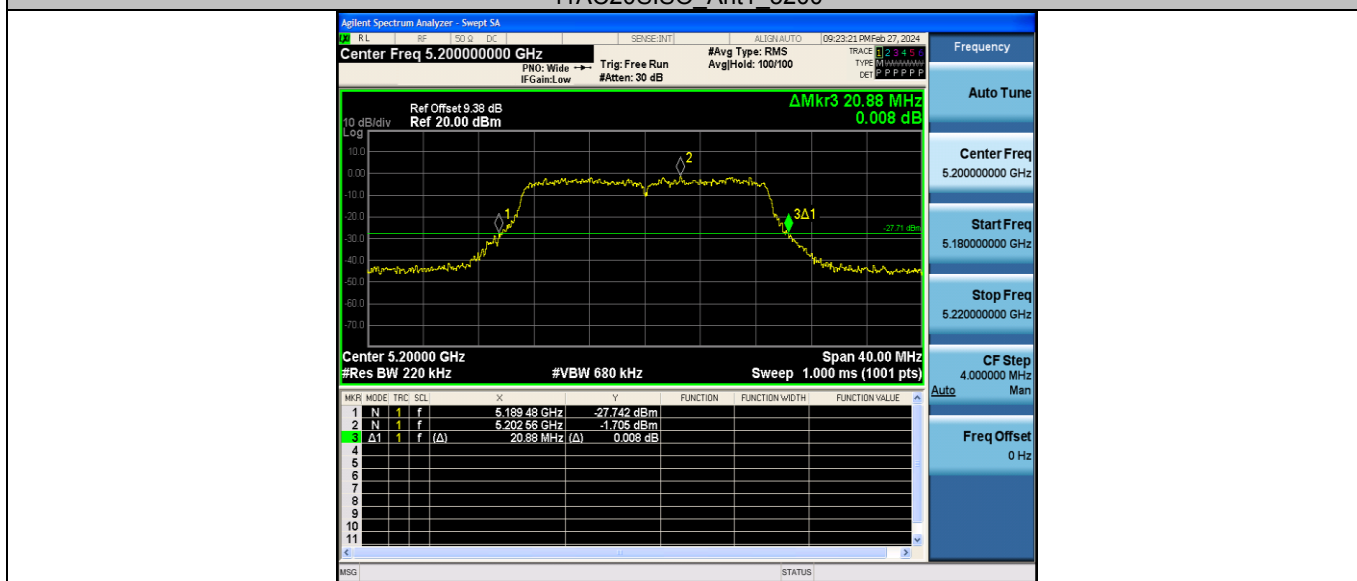

11AC20SISO_Ant1_5240




11AC20SISO_Ant1_5745



11AC20SISO_Ant1_5785




11AC20SISO_Ant1_5825

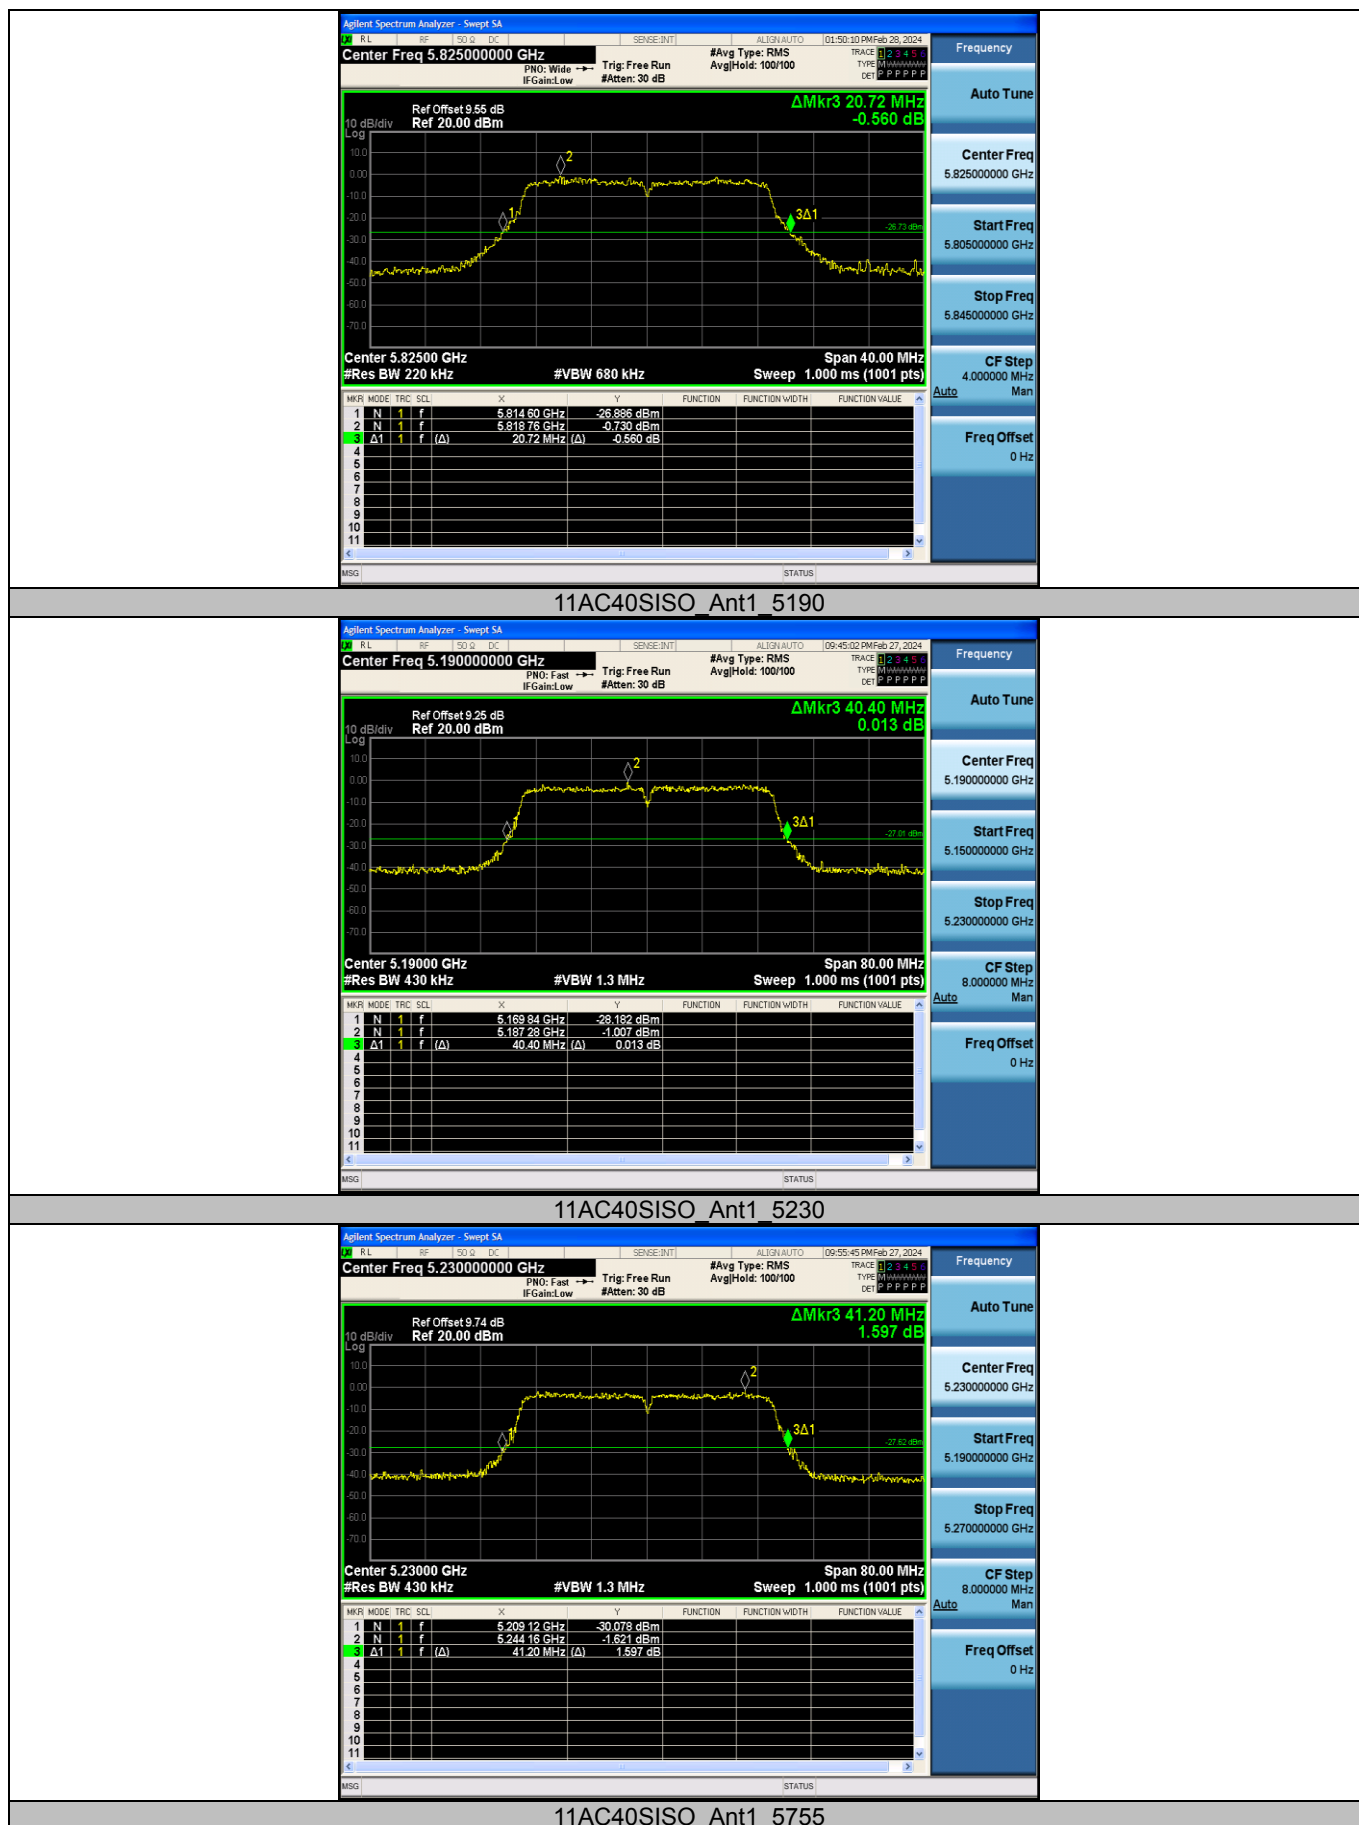





11AC40SISO_Ant1_5795

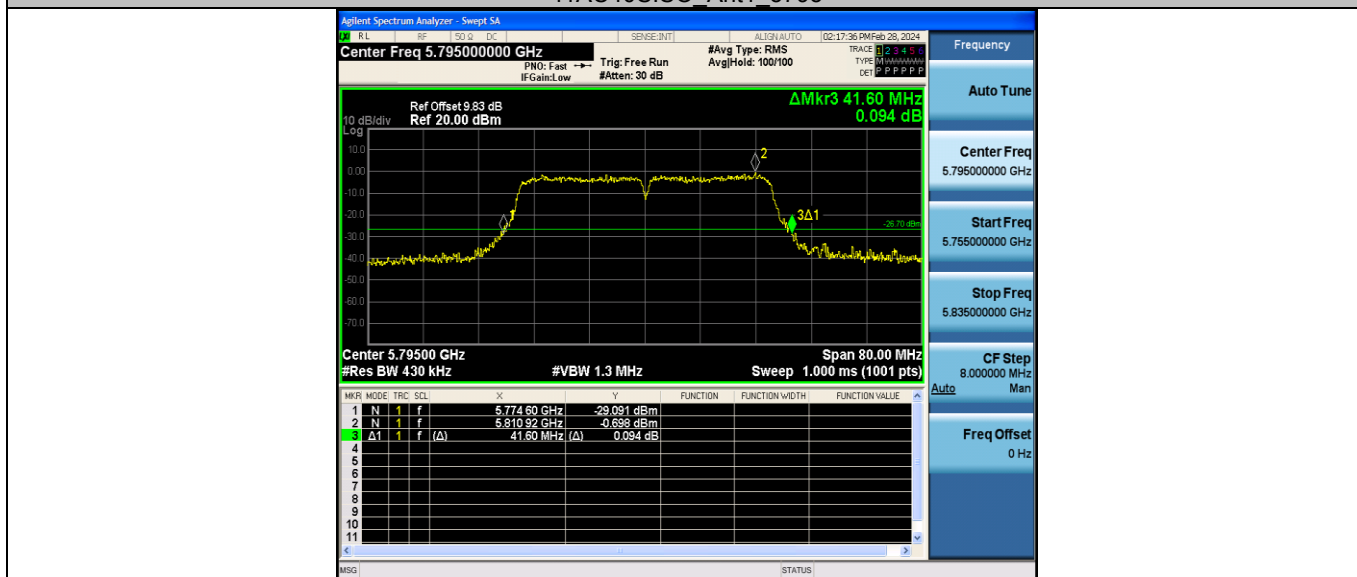

11AC80SISO_Ant1_5210

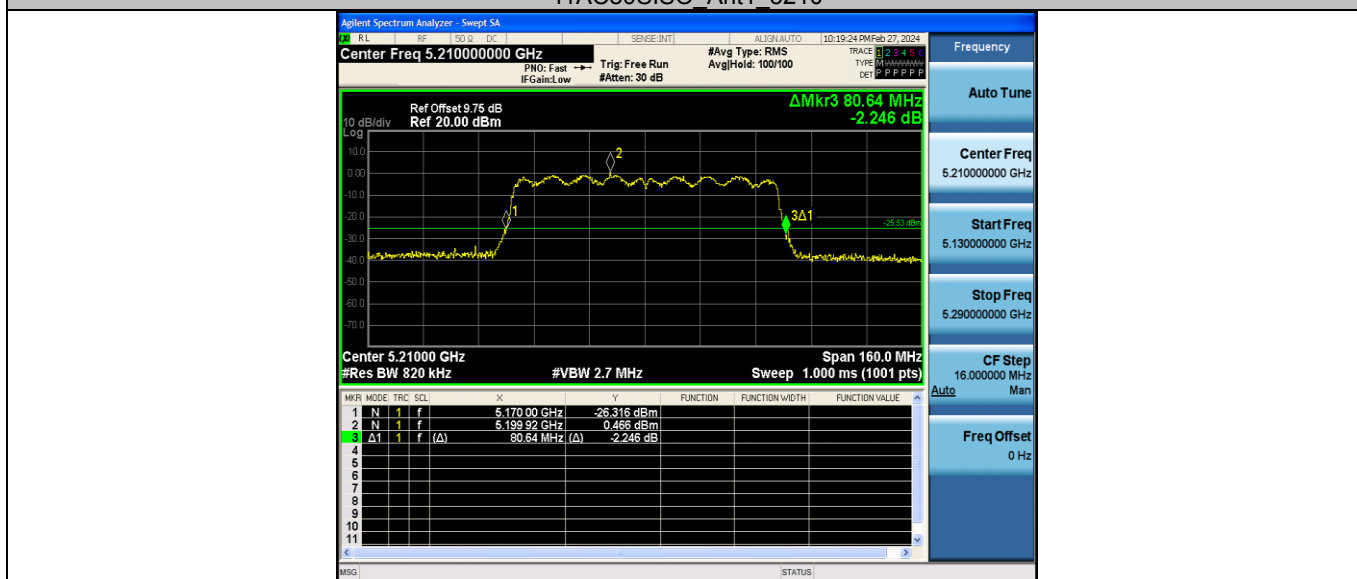

11AC80SISO_Ant1_5775

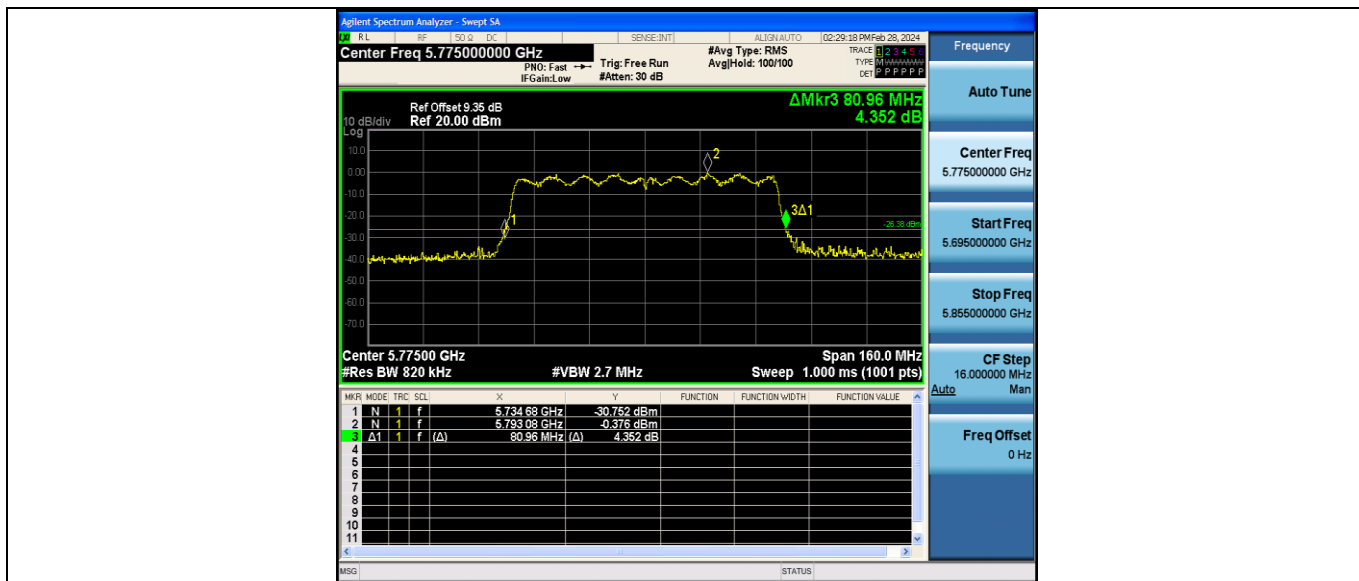

6.9 Appendix A2: Occupied channel bandwidth

6.9.1 Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5180	17.042	5171.5236	5188.5656
		5200	16.903	5191.6082	5208.5112
		5240	16.974	5231.5530	5248.5270
		5745	17.001	5736.5563	5753.5573
		5785	16.983	5776.5475	5793.5305
		5825	16.996	5816.5737	5833.5697
11N20SISO	Ant1	5180	17.995	5171.0904	5189.0854
		5200	17.928	5191.1004	5209.0284
		5240	17.932	5231.0926	5249.0246
		5745	17.918	5736.0977	5754.0157
		5785	17.948	5776.1029	5794.0509
		5825	17.862	5816.1158	5833.9778
11N40SISO	Ant1	5190	36.293	5171.9758	5208.2688
		5230	36.405	5211.9034	5248.3084
		5755	36.425	5736.9578	5773.3828
		5795	36.403	5776.9543	5813.3573
11AC20SISO	Ant1	5180	17.943	5171.0771	5189.0201
		5200	17.903	5191.0804	5208.9834
		5240	17.856	5231.1654	5249.0214
		5745	17.938	5736.0965	5754.0345
		5785	17.995	5776.0061	5794.0011
		5825	17.966	5816.0347	5834.0007
11AC40SISO	Ant1	5190	36.270	5172.0281	5208.2981
		5230	36.584	5211.7475	5248.3315
		5755	36.475	5736.9090	5773.3840
		5795	36.467	5776.8942	5813.3612
11AC80SISO	Ant1	5210	75.034	5172.6915	5247.7255
		5775	75.637	5737.4222	5813.0592

6.9.2 Test Graphs



