

# TEST REPORT

**Reference No.**..... : WTX23X12290902W001  
**FCC ID**..... : 2BEB5-Q9  
**Applicant**..... : Guangzhou Yiming Electronic Technology Co., LTD  
**Address**..... : 302, Building 2, Meidong Industrial Park, Tieshanhe Road,  
Sandong Avenue, Huadu District, Guangzhou, China  
**Product Name**..... : Projector  
**Test Model**..... : Q9  
**Standards**..... : FCC Part 15.247  
**Date of Receipt sample**..... : December 27, 2023  
**Date of Test**..... : December 27, 2023 to January 1, 2024  
**Date of Issue**..... : January 1, 2024  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tested by:



---

Tom Wang/ Project Engineer

Approved & Authorized By:



---

Silin Chen / Manager

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION ..... 4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) ..... 4  
1.2 TEST STANDARDS ..... 5  
1.3 TEST METHODOLOGY ..... 5  
1.4 TEST FACILITY ..... 5  
1.5 EUT SETUP AND TEST MODE ..... 6  
1.6 MEASUREMENT UNCERTAINTY ..... 7  
1.7 TEST EQUIPMENT LIST AND DETAILS ..... 8

**2. SUMMARY OF TEST RESULTS ..... 10**

**3. ANTENNA REQUIREMENT ..... 11**  
3.1 STANDARD APPLICABLE ..... 11  
3.2 EVALUATION INFORMATION ..... 11

**4. POWER SPECTRAL DENSITY ..... 12**  
4.1 STANDARD APPLICABLE ..... 12  
4.2 TEST SETUP BLOCK DIAGRAM ..... 12  
4.3 TEST PROCEDURE ..... 12  
4.4 SUMMARY OF TEST RESULTS/PLOTS ..... 12

**5. DTS BANDWIDTH ..... 13**  
5.1 STANDARD APPLICABLE ..... 13  
5.2 TEST SETUP BLOCK DIAGRAM ..... 13  
5.3 TEST PROCEDURE ..... 13  
5.4 SUMMARY OF TEST RESULTS/PLOTS ..... 13

**6. RF OUTPUT POWER ..... 14**  
6.1 STANDARD APPLICABLE ..... 14  
6.2 TEST SETUP BLOCK DIAGRAM ..... 14  
6.3 TEST PROCEDURE ..... 14  
6.4 SUMMARY OF TEST RESULTS/PLOTS ..... 14

**7. FIELD STRENGTH OF SPURIOUS EMISSIONS ..... 15**  
7.1 STANDARD APPLICABLE ..... 15  
7.2 TEST PROCEDURE ..... 15  
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION ..... 17  
7.4 SUMMARY OF TEST RESULTS/PLOTS ..... 17

**8. OUT OF BAND EMISSIONS ..... 21**  
8.1 STANDARD APPLICABLE ..... 21  
8.2 TEST PROCEDURE ..... 21  
8.3 SUMMARY OF TEST RESULTS/PLOTS ..... 22

**9. CONDUCTED EMISSIONS ..... 26**  
9.1 TEST PROCEDURE ..... 26  
9.2 BASIC TEST SETUP BLOCK DIAGRAM ..... 26  
9.3 TEST RECEIVER SETUP ..... 26  
9.4 SUMMARY OF TEST RESULTS/PLOTS ..... 26

**APPENDIX SUMMARY ..... 29**

**APPENDIX A ..... 30**

**APPENDIX B ..... 35**

**APPENDIX C ..... 40**

**APPENDIX D ..... 41**

**APPENDIX E ..... 53**

**APPENDIX PHOTOGRAPHS ..... 57**

**Report version**

Version No.	Date of issue	Description
Rev.00	January 1, 2024	Original
/	/	/

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Guangzhou Yiming Electronic Technology Co., LTD  
 Address of applicant: 302, Building 2, Meidong Industrial Park, Tieshanhe Road, Sandong Avenue, Huadu District, Guangzhou, China

Manufacturer: Guangzhou Yiming Electronic Technology Co., LTD  
 Address of manufacturer: 302, Building 2, Meidong Industrial Park, Tieshanhe Road, Sandong Avenue, Huadu District, Guangzhou, China

General Description of EUT	
Product Name:	Projector
Trade Name:	/
Model No.:	Q9
Adding Model(s):	Q3, Q7, Q8, Q10, M1 pro, M2 pro, M3 pro, M4 pro, M5 pro, M6 pro, M7 pro, M8 pro, M9 pro, V1 pro, V2 pro, V3 pro, V4 pro, V5 pro, V6 pro, V7 pro, V8 pro, V9 pro, A1, A2, A3, A4, A5, A6, A7, A8, A9, ZX1, ZX6, ZX7, ZX8, ZX9, Z9, Z10, i5, i6, i7, i8, i9, F1, F2, F3, F6, F8, F9, X1-PRO, X1-MAX, X6, X6-PRO, X6-MAX, X8, X8-PRO, X8-MAX, X9, X9-PRO, X9-MAX, X10, X10-PRO, X10-MAX, S6, S7, S8, S9, S10, Q6 Pro, A8X, A8X Pro
Rated Voltage:	AC 120V/60Hz
Power Adapter Model:	/
Serial number:	S-01
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	16.15dBm (Conducted)
Type of Modulation:	DBPSK, BPSK, DQPSK, QPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	2.32dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **Address of the test laboratory**

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### **FCC – Registration No.: 125990**

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

Test software(Fix the Tx frequency)	Power level(Testing)
Name	level
Putty	Index

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

**1.6 Measurement Uncertainty**

<b>Measurement uncertainty</b>		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-03-27	2024-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-03-27	2024-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2023-03-27	2024-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2023-03-27	2024-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2023-03-27	2024-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2023-03-27	2024-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2023-03-27	2024-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2023-03-27	2024-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2023-03-27	2024-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-03-27	2024-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2023-04-12	2024-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2023-04-12	2024-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2023-03-19	2025-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-19	2025-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2023-03-19	2025-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2023-03-27	2024-03-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2023-03-27	2024-03-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2023-03-27	2024-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2023-03-27	2024-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2023-03-19	2025-03-18
SEMT-1096	Power Sensor	Agilent	U2021XA	MY54250019	2023-03-27	2024-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has an integral antenna, fulfill the requirement of this section.


## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram

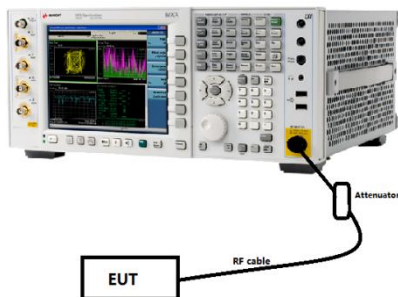

### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ .
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

### 5.2 Test Setup Block Diagram

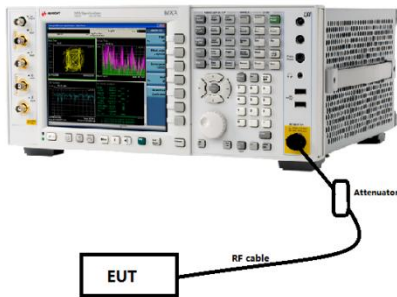

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

Please refer to Appendix B


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

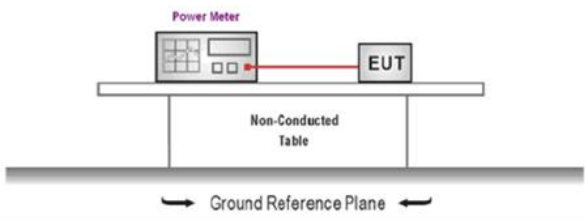

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) The maximum peak conducted output power may be measured using a broadband peak RF power meter.
- b) The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
- c) Record the measurement data.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

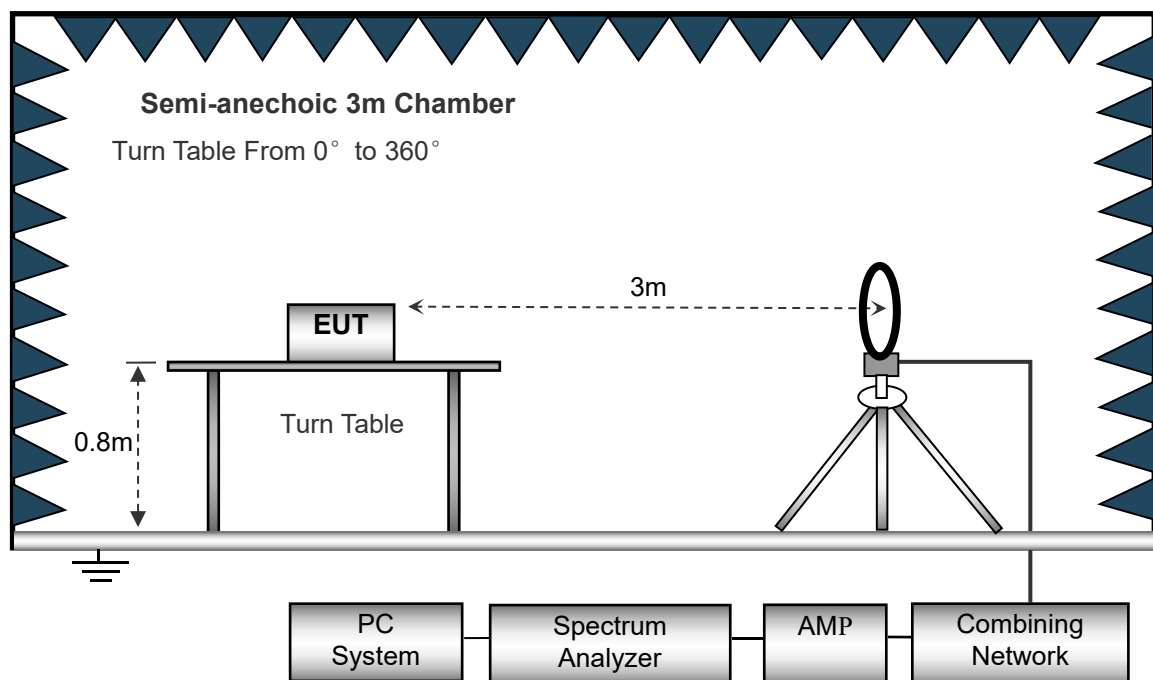

The test setup for emission measurement from 30MHz to 1GHz.

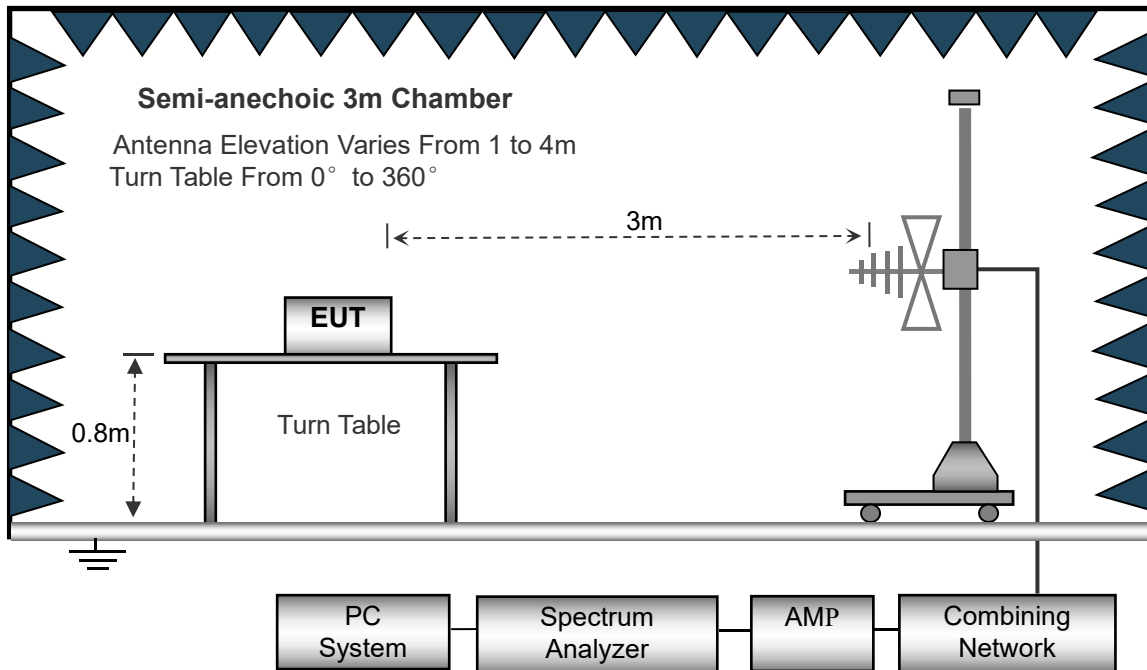

The test setup for emission measurement above 1GHz.

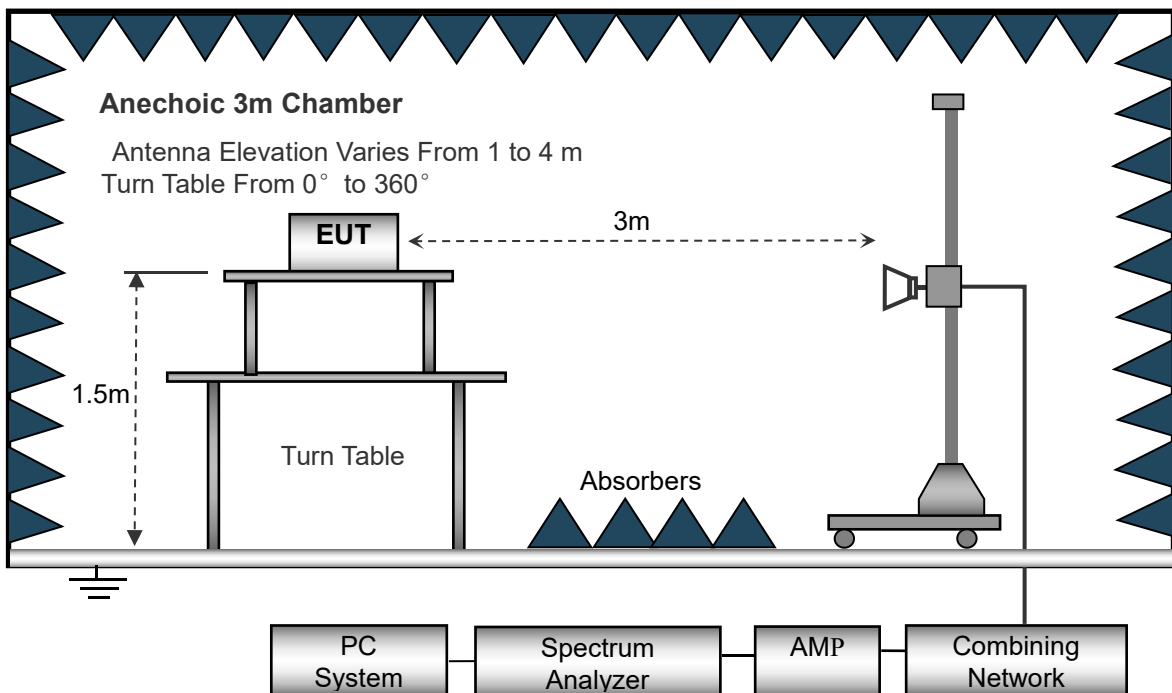



Reference No.: WTX23X12290902W001

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Result} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Result} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b\_low channel 11Mbps) is recorded in this report.*


➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal

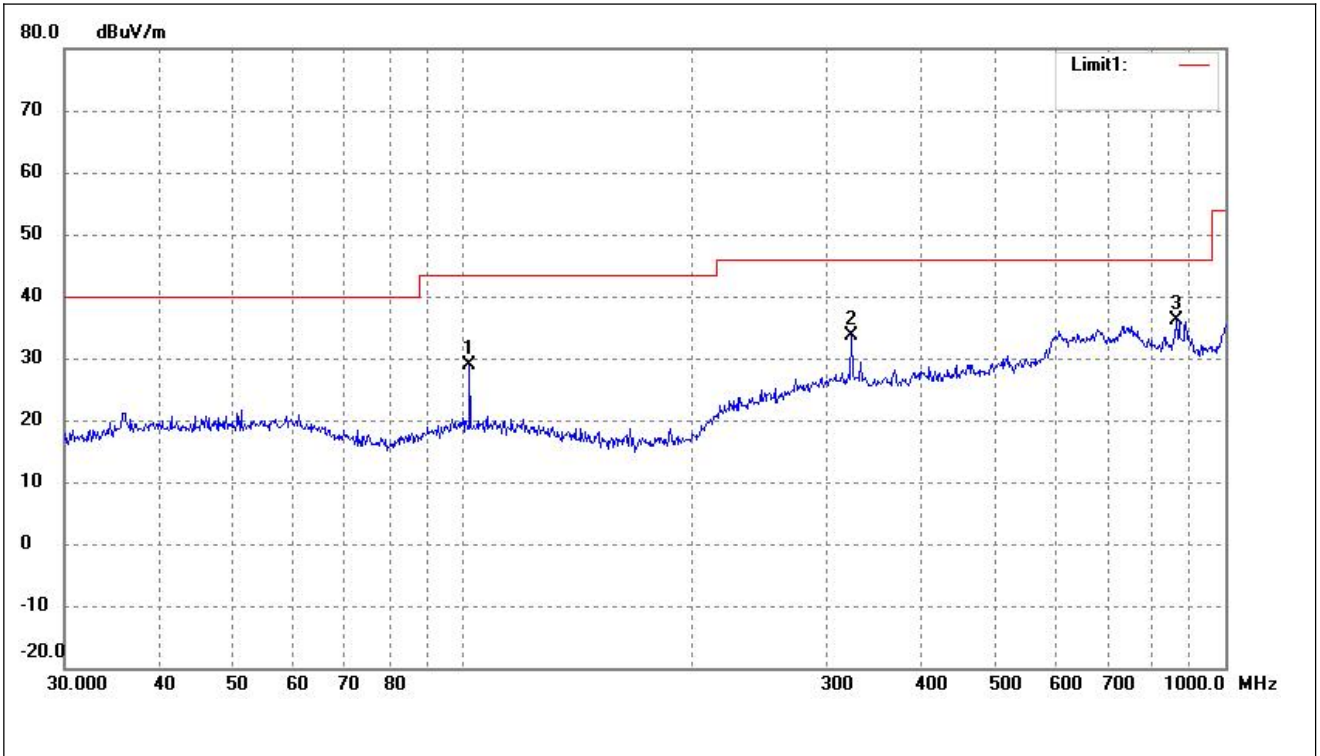

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	102.0014	23.77	5.11	28.88	43.50	-14.62	-	-	peak
2	323.3204	21.32	12.19	33.51	46.00	-12.49	-	-	peak
3	863.0562	18.82	17.38	36.20	46.00	-9.80	-	-	peak

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical

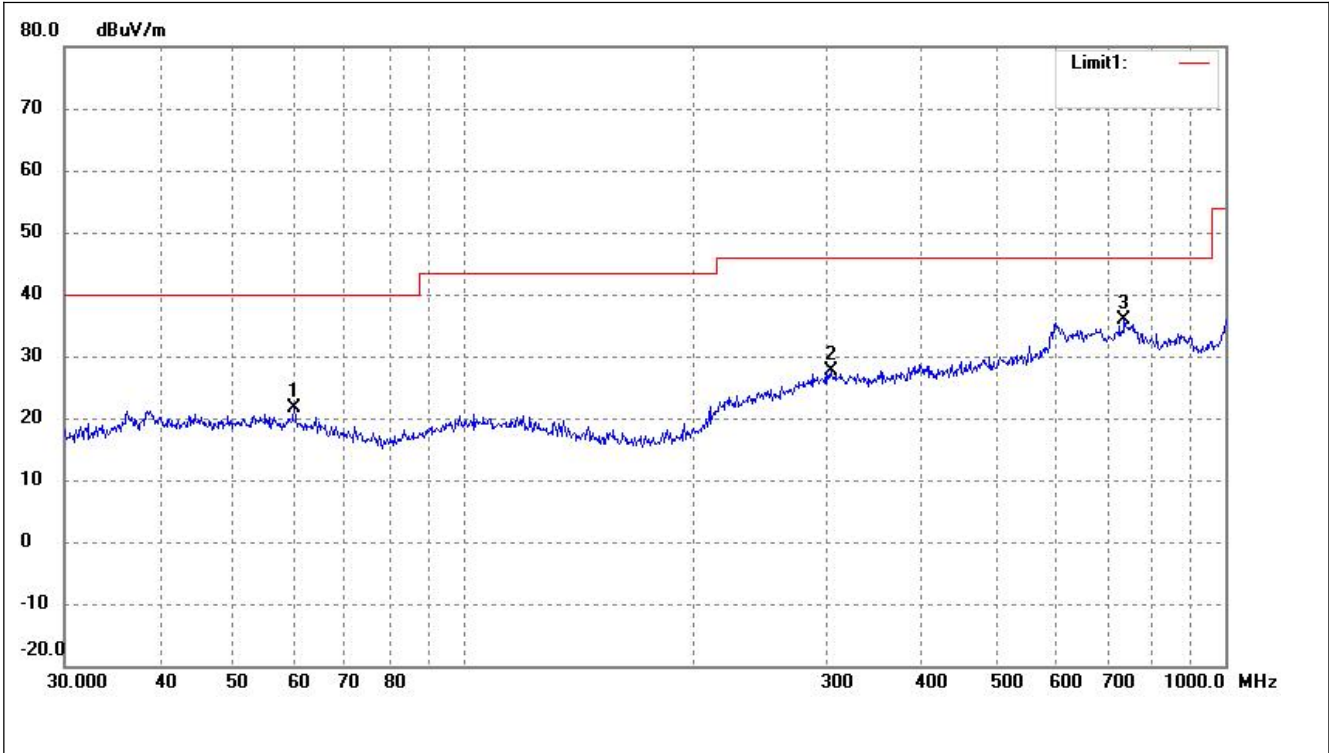

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	60.0691	16.32	5.36	21.68	40.00	-18.32	-	-	peak
2	303.5437	15.45	12.19	27.64	46.00	-18.36	-	-	peak
3	737.0714	16.47	19.37	35.84	46.00	-10.16	-	-	peak

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b\_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	53.9	-3.87	50.03	74	-23.97	H	PK
4824.000	38.65	-3.87	34.78	54	-19.22	H	AV
7236.000	46.11	1.14	47.25	74	-26.75	H	PK
7236.000	34.79	1.19	35.98	54	-18.02	H	AV
4824.000	57.12	-3.86	53.26	74	-20.74	V	PK
4824.000	40.31	-3.86	36.45	54	-17.55	V	AV
7236.000	48.92	1.1	50.02	74	-23.98	V	PK
7236.000	37.25	1.1	38.35	54	-15.65	V	AV
Middle Channel-2437MHz							
4874.000	54.55	-3.74	50.81	74	-23.19	H	PK
4874.000	39.8	-3.74	36.06	54	-17.94	H	AV
7311.000	47.58	1.47	49.05	74	-24.95	H	PK
7311.000	32.91	1.47	34.38	54	-19.62	H	AV
4874.000	53.78	-3.74	50.04	74	-23.96	V	PK
4874.000	40.7	-3.74	36.96	54	-17.04	V	AV
7311.000	47.79	1.47	49.26	74	-24.74	V	PK
7311.000	33.89	1.47	35.36	54	-18.64	V	AV
High Channel-2462MHz							
4924.000	55.63	-3.59	52.04	74	-21.96	H	PK
4924.000	41.57	-3.59	37.98	54	-16.02	H	AV
7386.000	46.19	1.79	47.98	74	-26.02	H	PK
7386.000	34.64	1.79	36.43	54	-17.57	H	AV
4924.000	54.75	-3.59	51.16	74	-22.84	V	PK
4924.000	41.85	-3.59	38.26	54	-15.74	V	AV
7386.000	47.8	1.79	49.59	74	-24.41	V	PK
7386.000	34.99	1.79	36.78	54	-17.22	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

**8.3 Summary of Test Results/Plots**

*Note: All test modes (different data rate and different modulation) are performed, but only the worst case(802.11g\_54Mbps Vertical) is recorded in this report.*


➤ Radiated test

802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

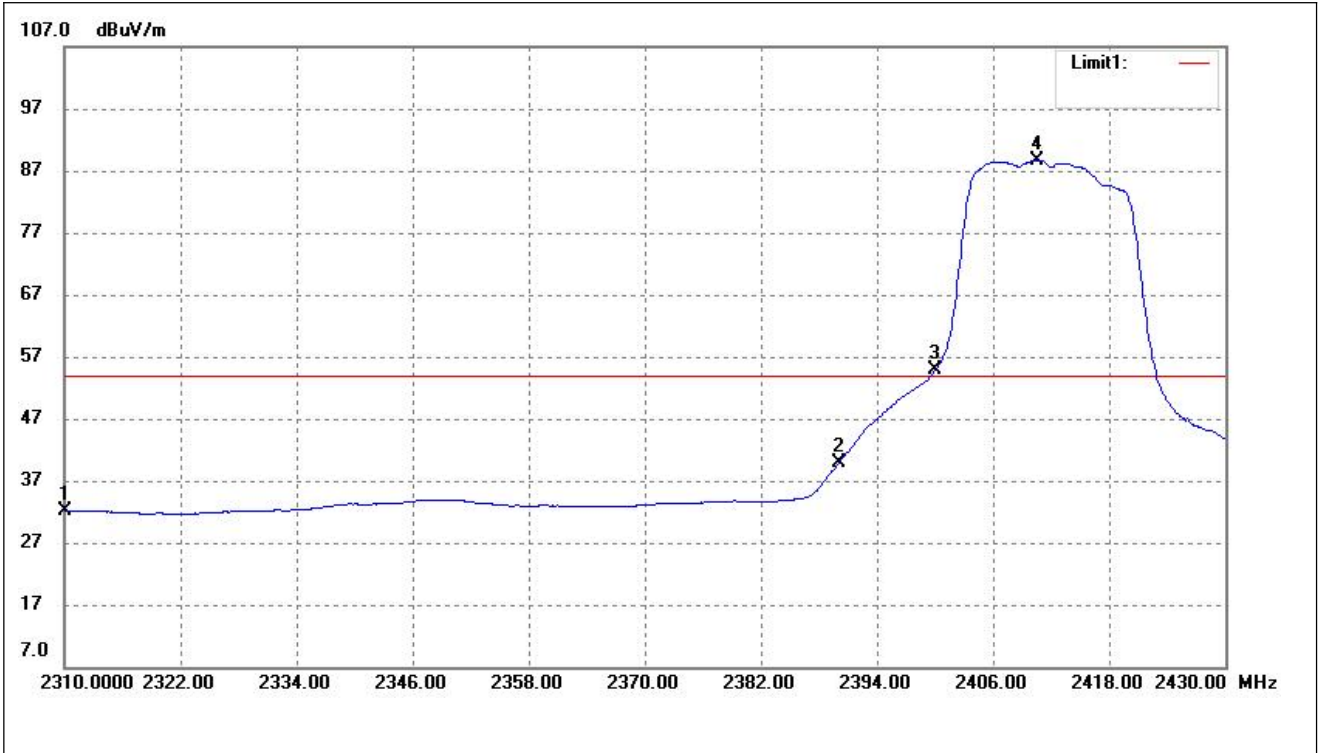

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.79	-3.69	32.10	54.00	-21.90	Average Detector
	2310.000	47.17	-3.69	43.48	74.00	-30.52	Peak Detector
2	2390.000	43.37	-3.49	39.88	54.00	-14.12	Average Detector
	2390.000	62.75	-3.49	59.26	74.00	-14.74	Peak Detector
3	2400.000	58.29	-3.46	54.83	/		Average Detector
4	2410.560	92.04	-3.43	88.61			Average Detector

802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

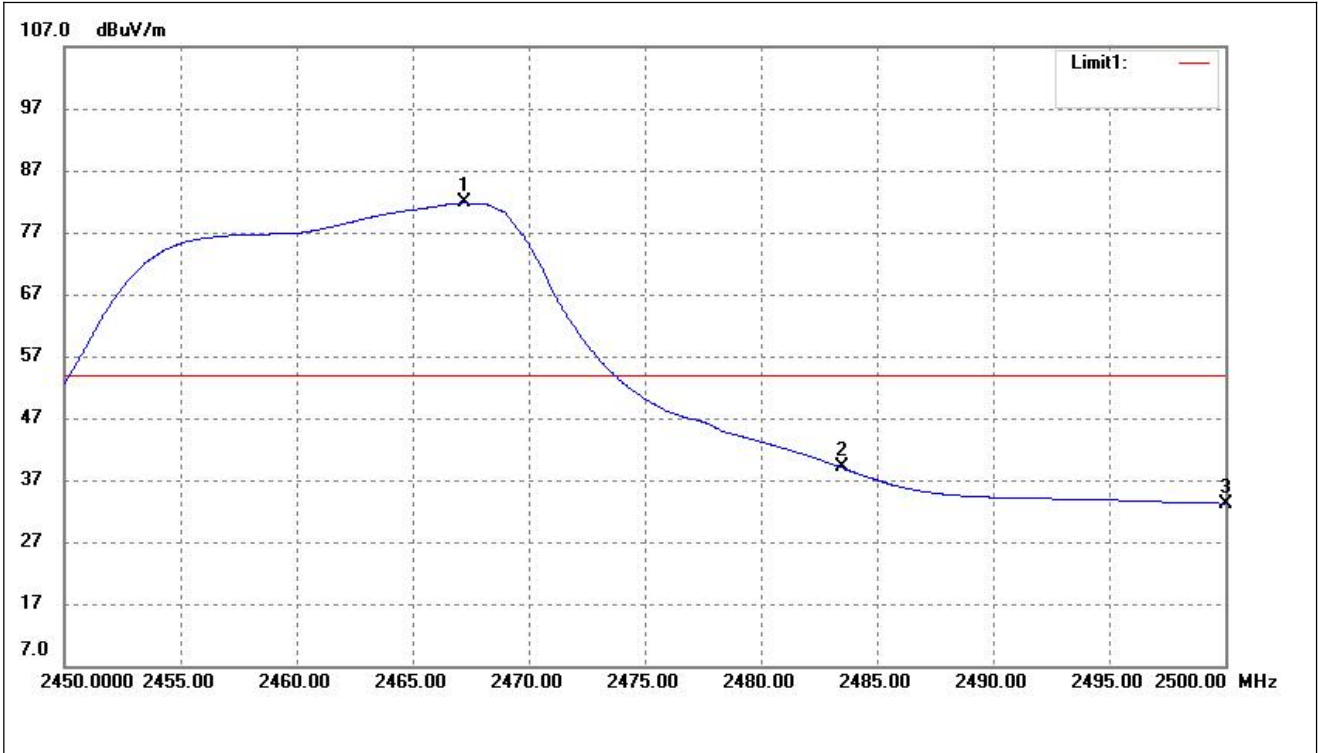

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	2467.250	85.08	-3.28	81.80	/	/	Average Detector
	2469.100	97.30	-3.28	94.02	/	/	Peak Detector
1	2483.500	36.43	-3.20	39.03	54.00	-14.97	Average Detector
	2483.500	49.68	-3.20	53.65	74.00	-20.35	Peak Detector
3	2500.000	36.43	-3.20	33.23	54.00	-20.77	Average Detector
	2500.000	49.68	-3.20	46.48	74.00	-27.52	Peak Detector



Reference No.: WTX23X12290902W001

➤ Conducted test

**Please refer to Appendix D and E**

## 9. Conducted Emissions

---


### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

### 9.2 Basic Test Setup Block Diagram

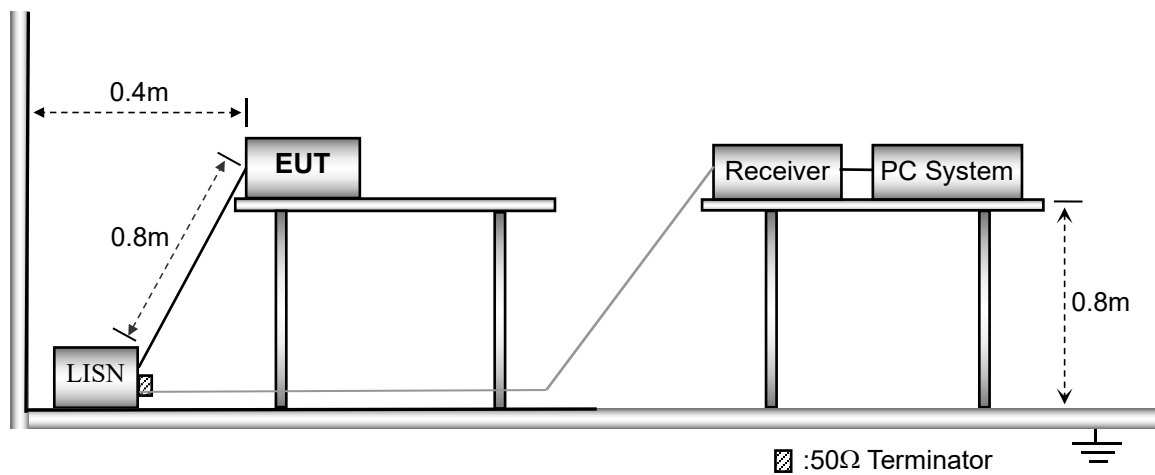

### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal

### 9.4 Summary of Test Results/Plots


Remark:

Result = Indicated Reading + Correct

Correct=Cable lose + Pulse Limiter Factor + Artificial Mains Factor


Margin=Result- Limit

Test Mode	Communication	Polarity:	Line
-----------	---------------	-----------	------

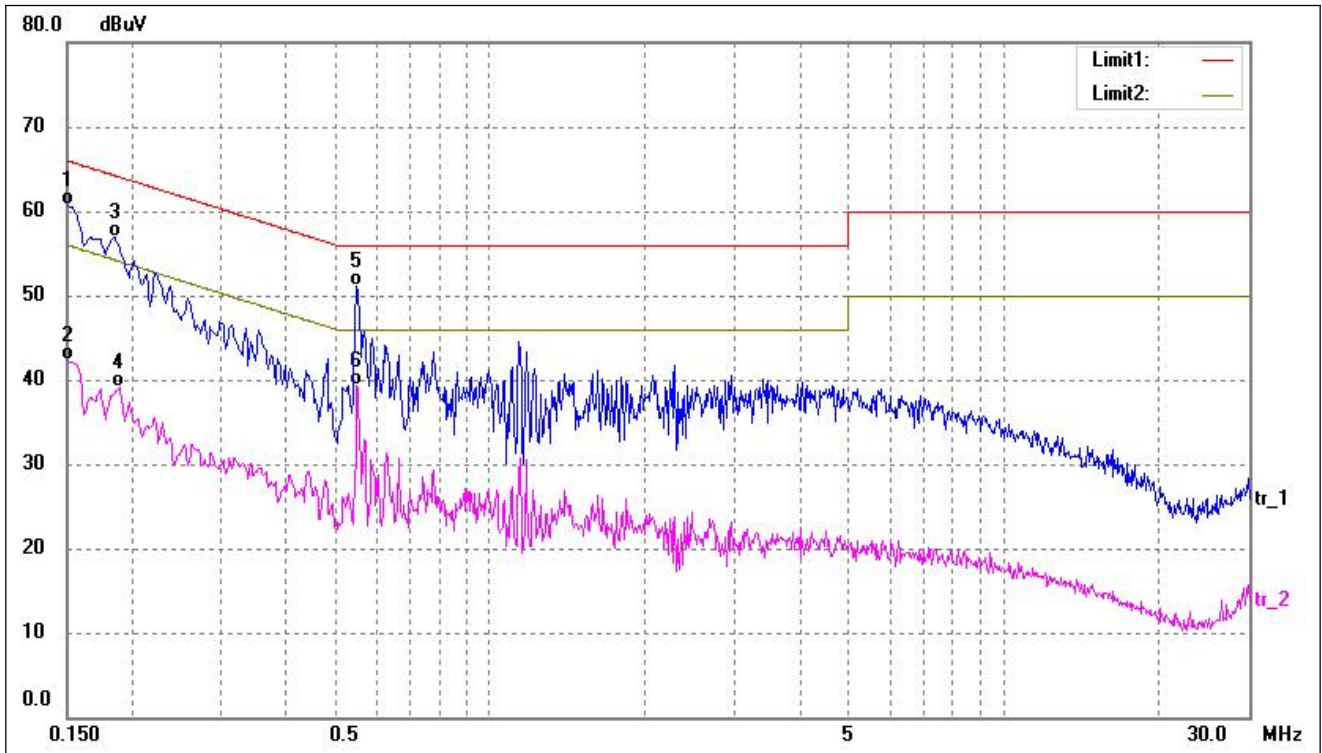

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	50.83	9.85	60.68	66.00	-5.32	QP
2	0.1500	32.40	9.85	42.25	56.00	-13.75	AVG
3	0.1860	47.15	9.81	56.96	64.21	-7.25	QP
4	0.1900	29.32	9.81	39.13	54.04	-14.91	AVG
5*	0.5500	41.23	9.80	51.03	56.00	-4.97	QP
6	0.5500	29.41	9.80	39.21	46.00	-6.79	AVG

Test Mode	Communication	Polarity:	Neutral
-----------	---------------	-----------	---------

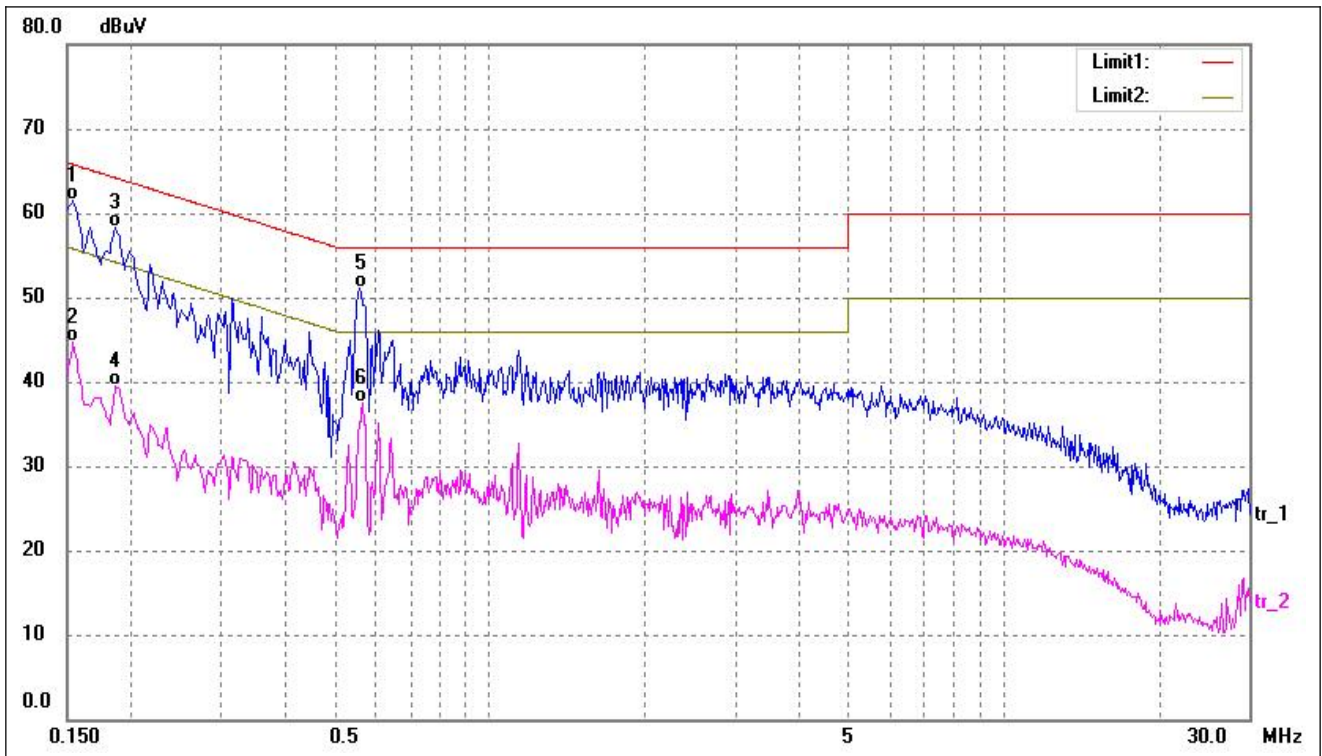

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	51.59	9.85	61.44	65.78	-4.34	QP
2	0.1540	34.85	9.85	44.70	55.78	-11.08	AVG
3	0.1860	48.54	9.81	58.35	64.21	-5.86	QP
4	0.1860	29.75	9.81	39.56	54.21	-14.65	AVG
5	0.5580	41.21	9.80	51.01	56.00	-4.99	QP
6	0.5660	27.75	9.79	37.54	46.00	-8.46	AVG

## APPENDIX SUMMARY

---



Project No.	WTX23X12290902W001	Test Engineer	Tom Wang
Start date	2023/12/27	Finish date	2023/01/01
Temperature	24.1°C	Humidity	52%
RF specifications	WIFI-2.4G		




APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant
E	Conducted Spurious Emissions	Compliant

**APPENDIX A**




Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	-17.73	8
	2437	-19.37	8
	2462	-19.42	8
802.11g_54Mbps	2412	-22.79	8
	2437	-22.84	8
	2462	-23.50	8
802.11n-HT20_MCS7	2412	-23.57	8
	2437	-23.57	8
	2462	-23.35	8
802.11n-HT40_MCS7	2422	-27.40	8
	2437	-27.36	8
	2452	-27.62	8




Please refer to the following test plots:
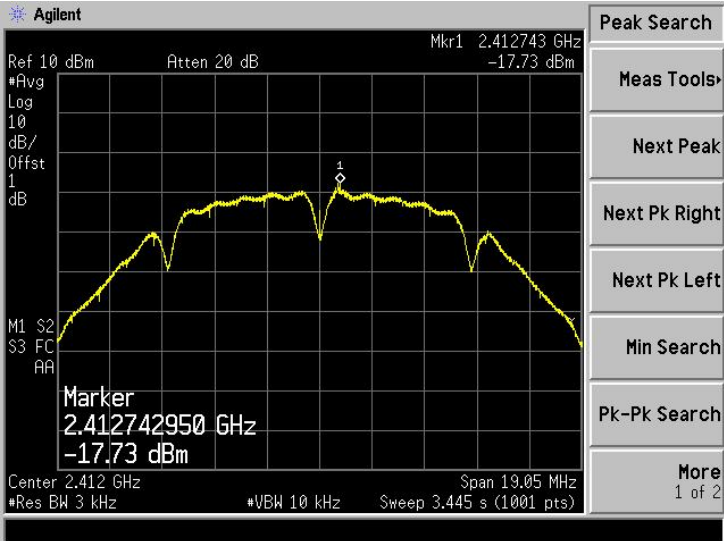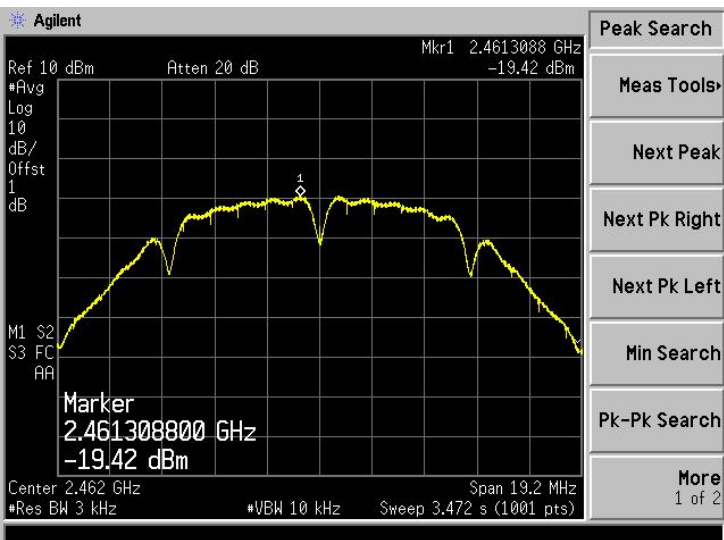
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
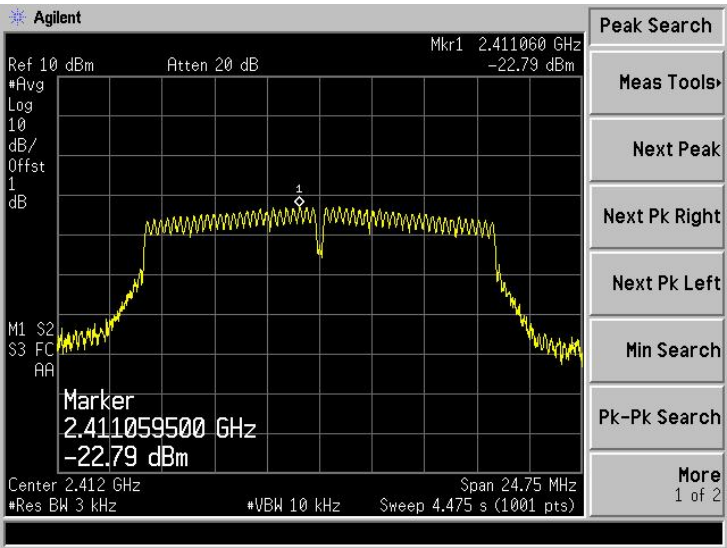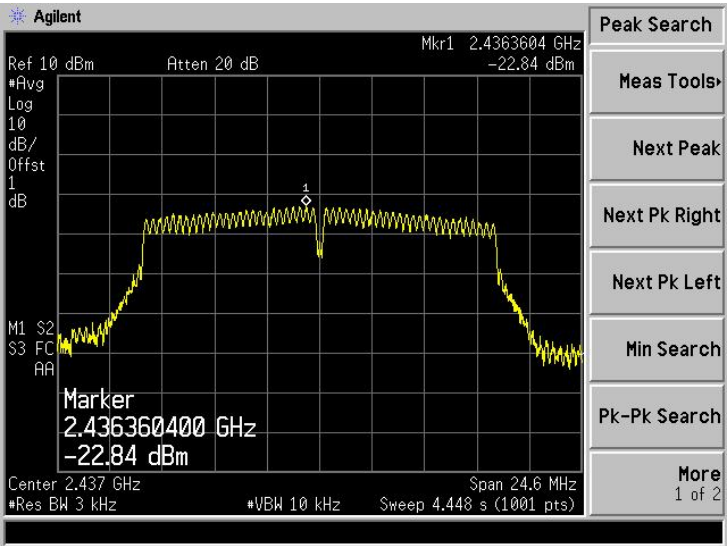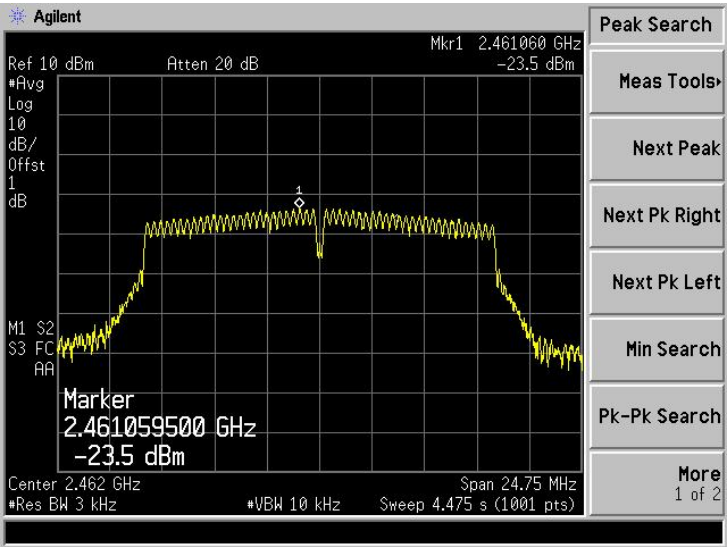
<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	

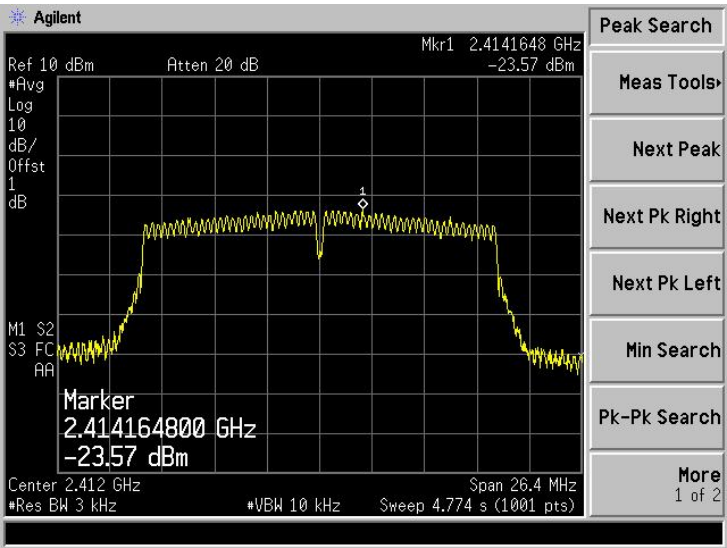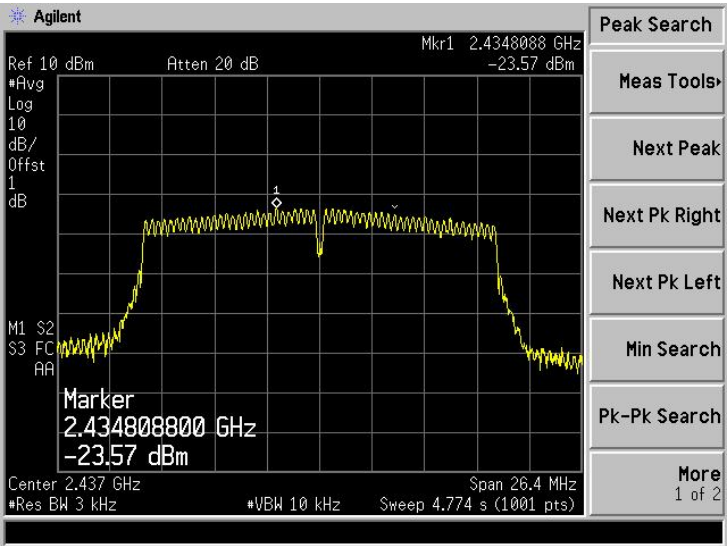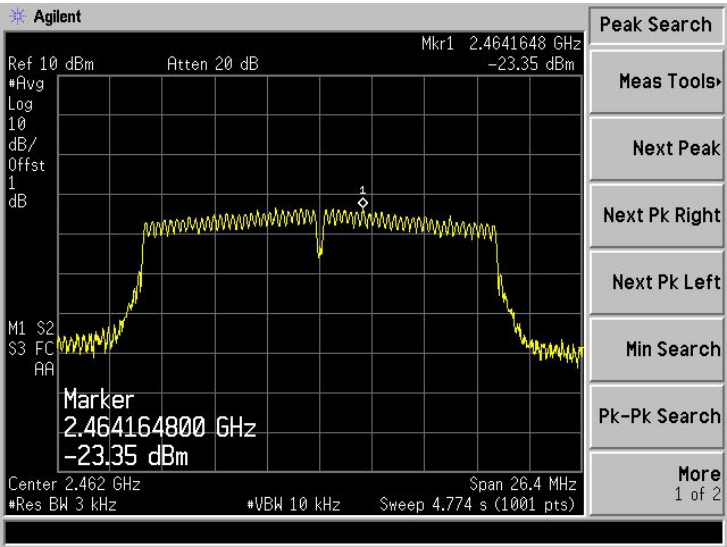


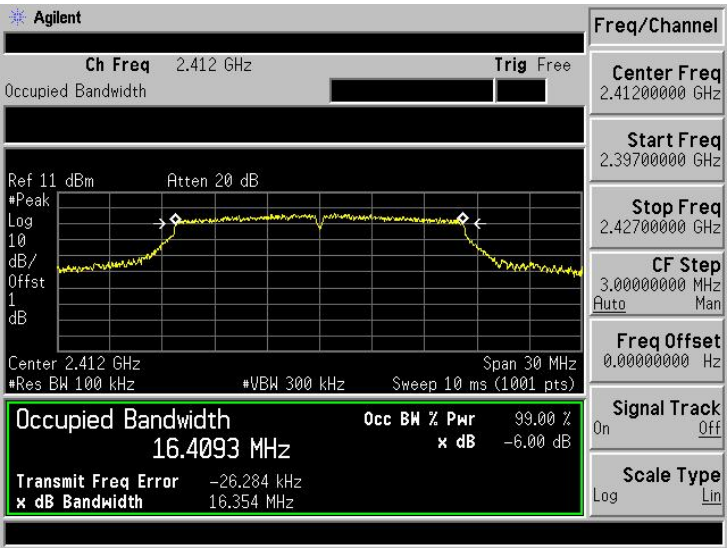
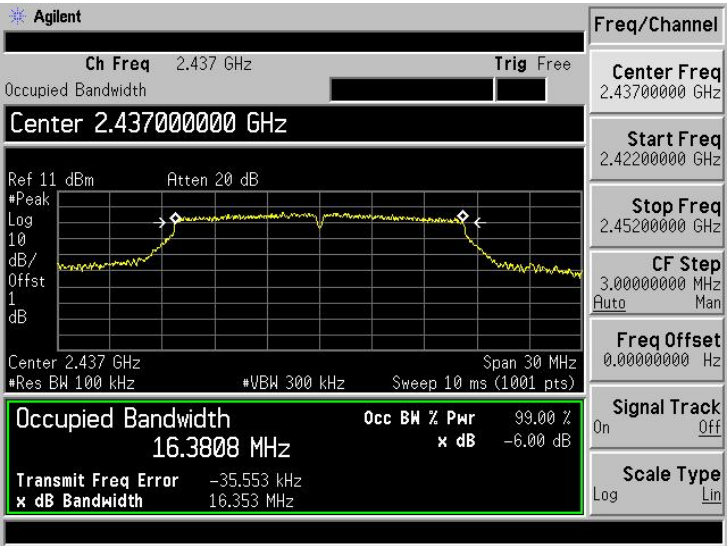
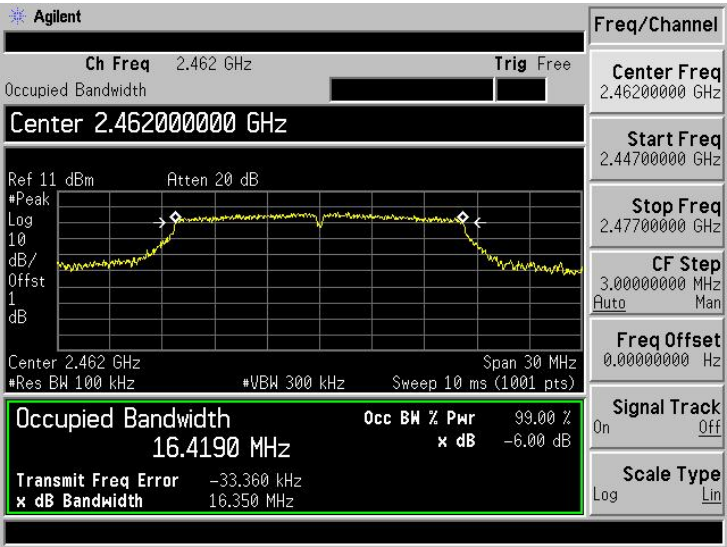
<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	
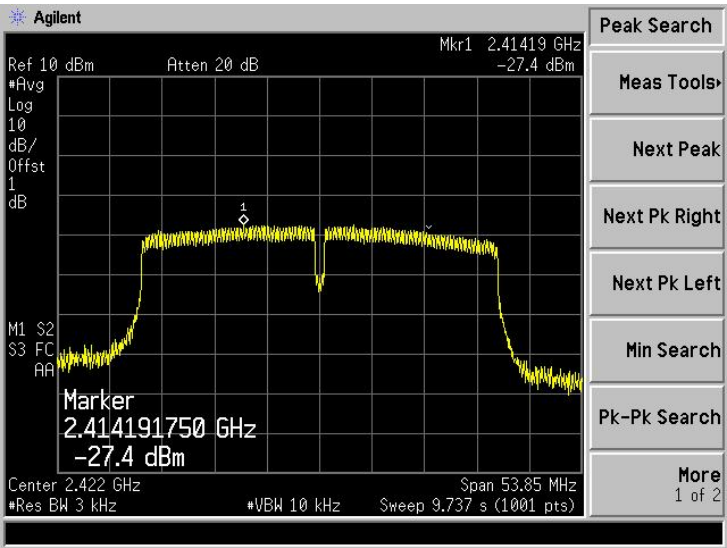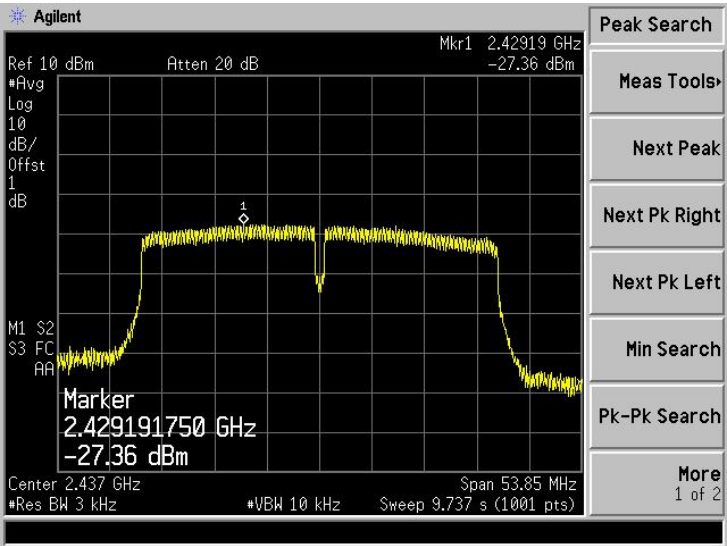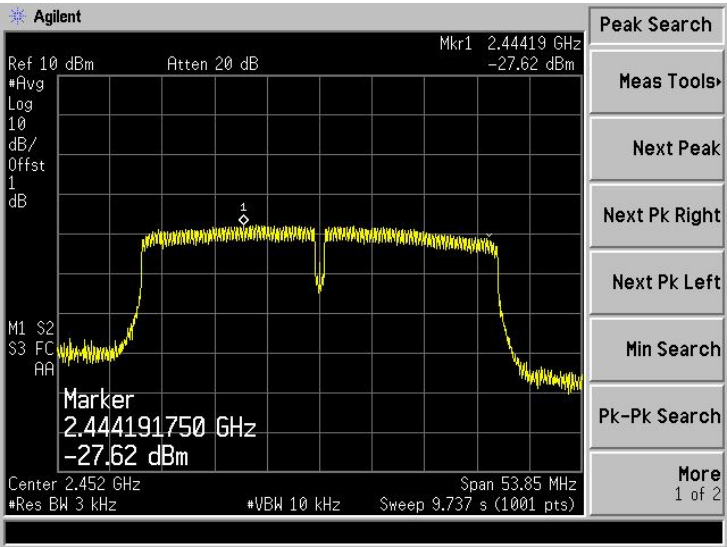
<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	




**APPENDIX B**

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	9.154	≥500
	2437	9.253	≥500
	2462	9.157	≥500
802.11g_54Mbps	2412	16.354	≥500
	2437	16.353	≥500
	2462	16.350	≥500
802.11n-HT20_MCS7	2412	17.598	≥500
	2437	17.587	≥500
	2462	17.599	≥500
802.11n-HT40_MCS7	2422	36.102	≥500
	2437	36.123	≥500
	2452	36.115	≥500

<p>802.11b-Low</p>	 <p>Agilent</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 12.6985 MHz <b>Occ BW % Pwr</b> 99.00 % <b>x dB Bandwidth</b> 9.154 MHz <b>x dB</b> -6.00 dB</p> <p><b>Transmit Freq Error</b> -32.828 kHz</p> <p>File Catalog Save Load Delete Copy Rename More 1 of 2</p>
<p>802.11b-Middle</p>	 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 12.7545 MHz <b>Occ BW % Pwr</b> 99.00 % <b>x dB Bandwidth</b> 9.253 MHz <b>x dB</b> -6.00 dB</p> <p><b>Transmit Freq Error</b> -65.035 kHz</p> <p>Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11b-High</p>	 <p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.462000000 GHz</b></p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 12.7385 MHz <b>Occ BW % Pwr</b> 99.00 % <b>x dB Bandwidth</b> 9.157 MHz <b>x dB</b> -6.00 dB</p> <p><b>Transmit Freq Error</b> -43.980 kHz</p> <p>Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>

<p>802.11g-Low</p>	 <p>Agilent</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.4093 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -26.284 kHz</p> <p>x dB Bandwidth 16.354 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	 <p>Agilent</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.437000000 GHz</b></p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.3808 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -35.553 kHz</p> <p>x dB Bandwidth 16.353 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	 <p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p><b>Center 2.462000000 GHz</b></p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 16.4190 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -33.360 kHz</p> <p>x dB Bandwidth 16.350 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	<p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4190 MHz Occ BW % Pwr 99.00 % x dB Bandwidth 16.350 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -33.360 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5554 MHz Occ BW % Pwr 99.00 % x dB Bandwidth 17.598 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 588.517 Hz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 11 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.5644 MHz Occ BW % Pwr 99.00 % x dB Bandwidth 17.599 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -11.812 kHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
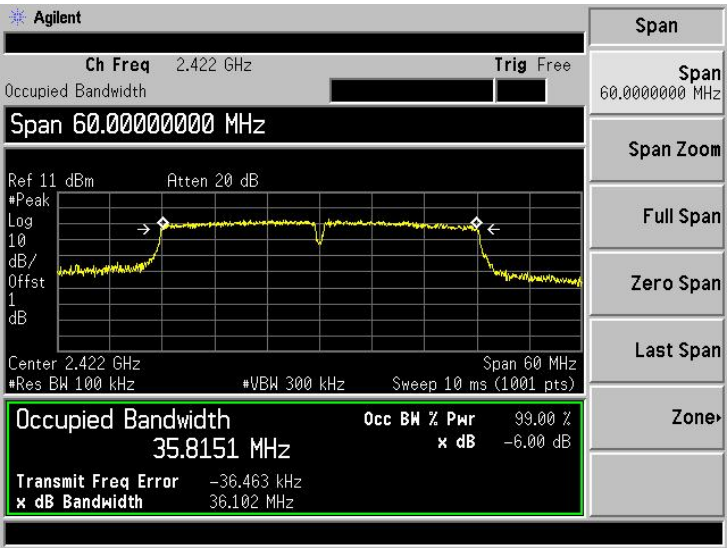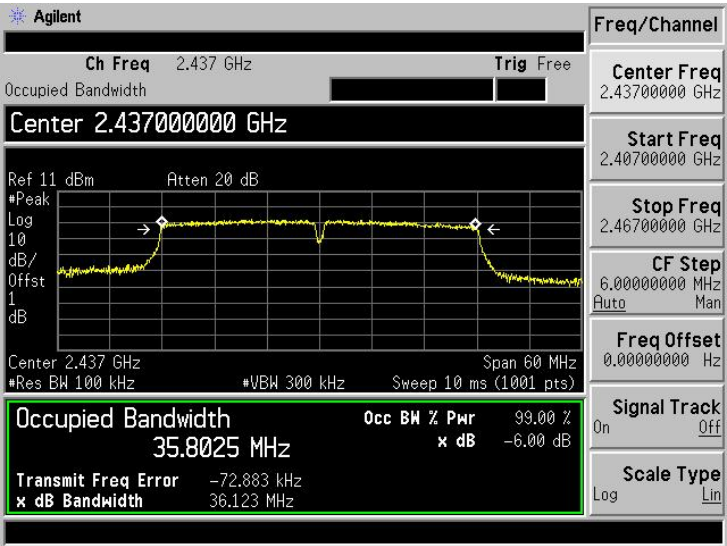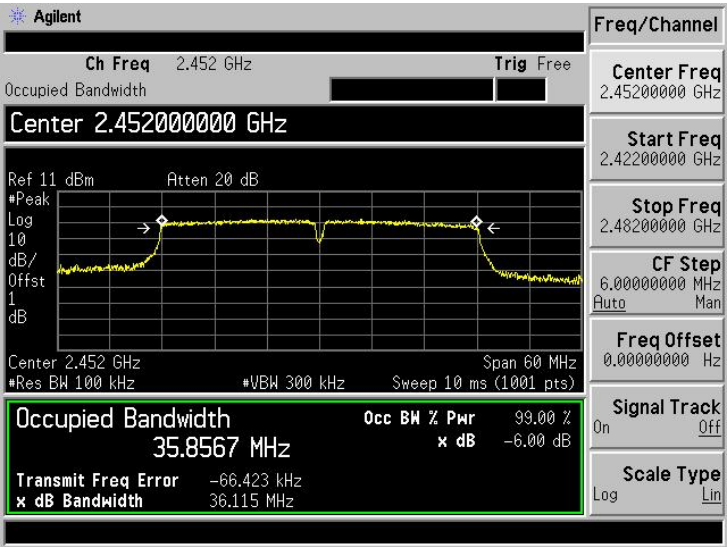
<p>802.11n-HT40-Low</p>	 <table border="1" data-bbox="1214 241 1353 786"> <tr><td>Span</td></tr> <tr><td>Span 60.0000000 MHz</td></tr> <tr><td>Span Zoom</td></tr> <tr><td>Full Span</td></tr> <tr><td>Zero Span</td></tr> <tr><td>Last Span</td></tr> <tr><td>Zone&gt;</td></tr> </table>	Span	Span 60.0000000 MHz	Span Zoom	Full Span	Zero Span	Last Span	Zone>		
Span										
Span 60.0000000 MHz										
Span Zoom										
Full Span										
Zero Span										
Last Span										
Zone>										
<p>802.11n-HT40-Middle</p>	 <table border="1" data-bbox="1214 824 1353 1368"> <tr><td>Freq/Channel</td></tr> <tr><td>Center Freq 2.43700000 GHz</td></tr> <tr><td>Start Freq 2.40700000 GHz</td></tr> <tr><td>Stop Freq 2.46700000 GHz</td></tr> <tr><td>CF Step 6.00000000 MHz</td></tr> <tr><td>Auto Man</td></tr> <tr><td>Freq Offset 0.00000000 Hz</td></tr> <tr><td>Signal Track On Off</td></tr> <tr><td>Scale Type Log Lin</td></tr> </table>	Freq/Channel	Center Freq 2.43700000 GHz	Start Freq 2.40700000 GHz	Stop Freq 2.46700000 GHz	CF Step 6.00000000 MHz	Auto Man	Freq Offset 0.00000000 Hz	Signal Track On Off	Scale Type Log Lin
Freq/Channel										
Center Freq 2.43700000 GHz										
Start Freq 2.40700000 GHz										
Stop Freq 2.46700000 GHz										
CF Step 6.00000000 MHz										
Auto Man										
Freq Offset 0.00000000 Hz										
Signal Track On Off										
Scale Type Log Lin										
<p>802.11n-HT40-High</p>	 <table border="1" data-bbox="1214 1406 1353 1951"> <tr><td>Freq/Channel</td></tr> <tr><td>Center Freq 2.45200000 GHz</td></tr> <tr><td>Start Freq 2.42200000 GHz</td></tr> <tr><td>Stop Freq 2.48200000 GHz</td></tr> <tr><td>CF Step 6.00000000 MHz</td></tr> <tr><td>Auto Man</td></tr> <tr><td>Freq Offset 0.00000000 Hz</td></tr> <tr><td>Signal Track On Off</td></tr> <tr><td>Scale Type Log Lin</td></tr> </table>	Freq/Channel	Center Freq 2.45200000 GHz	Start Freq 2.42200000 GHz	Stop Freq 2.48200000 GHz	CF Step 6.00000000 MHz	Auto Man	Freq Offset 0.00000000 Hz	Signal Track On Off	Scale Type Log Lin
Freq/Channel										
Center Freq 2.45200000 GHz										
Start Freq 2.42200000 GHz										
Stop Freq 2.48200000 GHz										
CF Step 6.00000000 MHz										
Auto Man										
Freq Offset 0.00000000 Hz										
Signal Track On Off										
Scale Type Log Lin										

**APPENDIX C**



Output power			
Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b_11Mbps	2412	16.15	30.00
	2437	16.11	30.00
	2462	16.04	30.00
802.11g_54Mbps	2412	14.12	30.00
	2437	14.08	30.00
	2462	13.27	30.00
802.11n HT20_MCS7	2412	13.11	30.00
	2437	13.19	30.00
	2462	13.81	30.00
802.11n HT40_MCS7	2422	11.24	30.00
	2437	11.55	30.00
	2452	11.20	30.00



## APPENDIX D



802.11b

Low

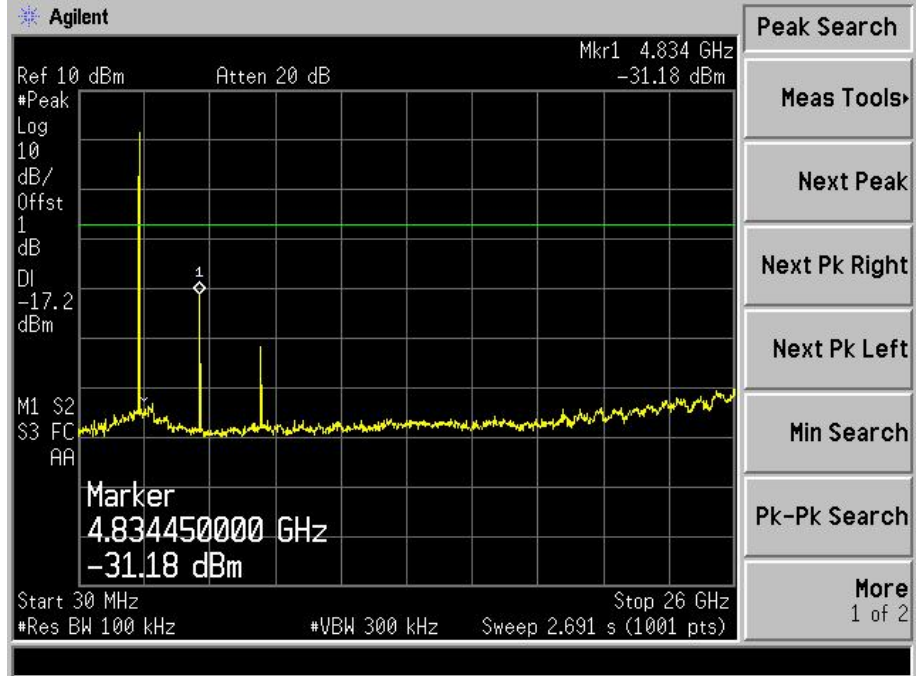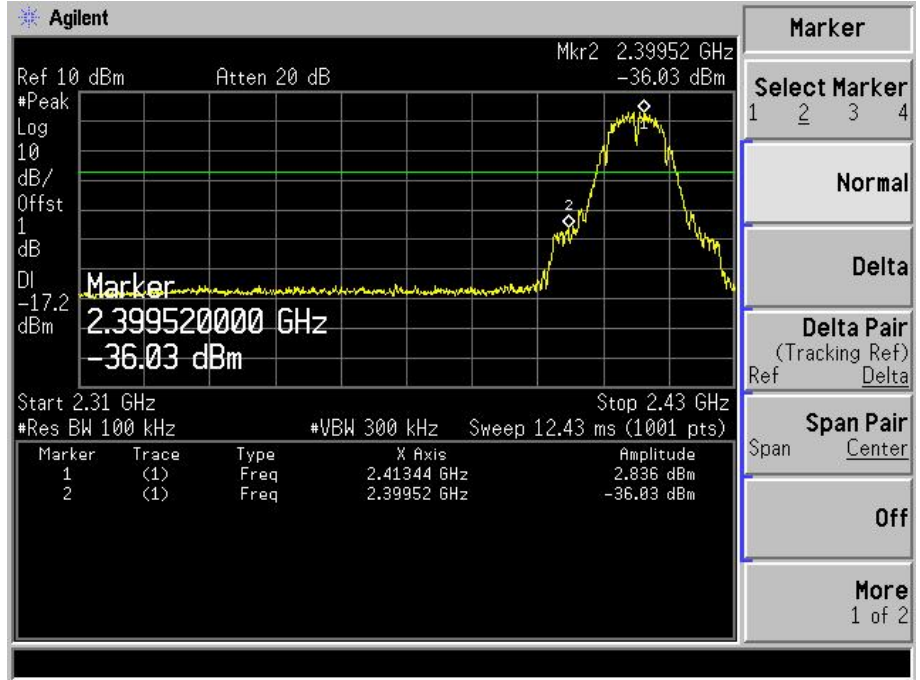



802.11b

Middle

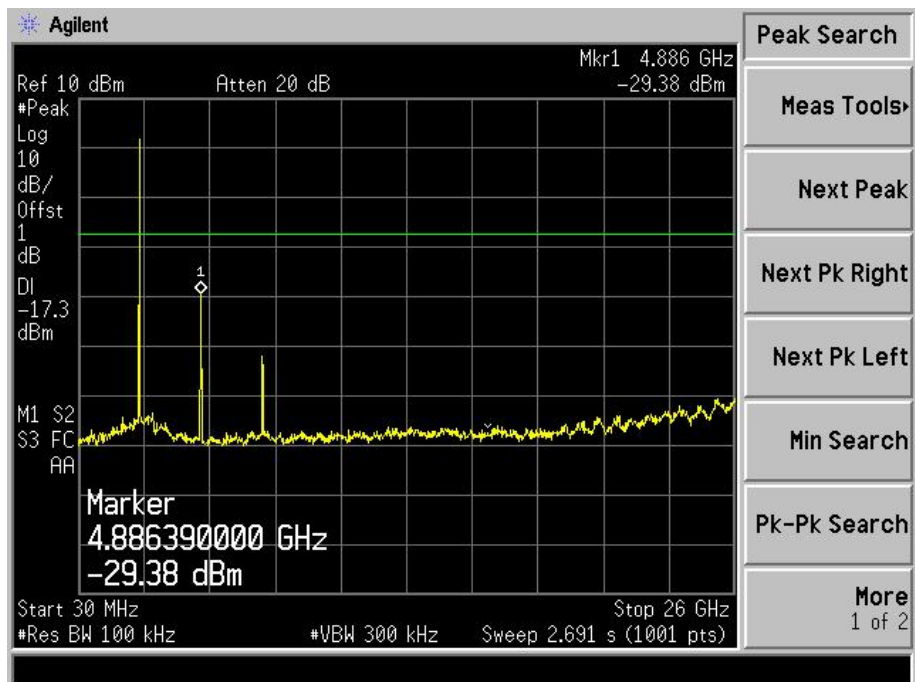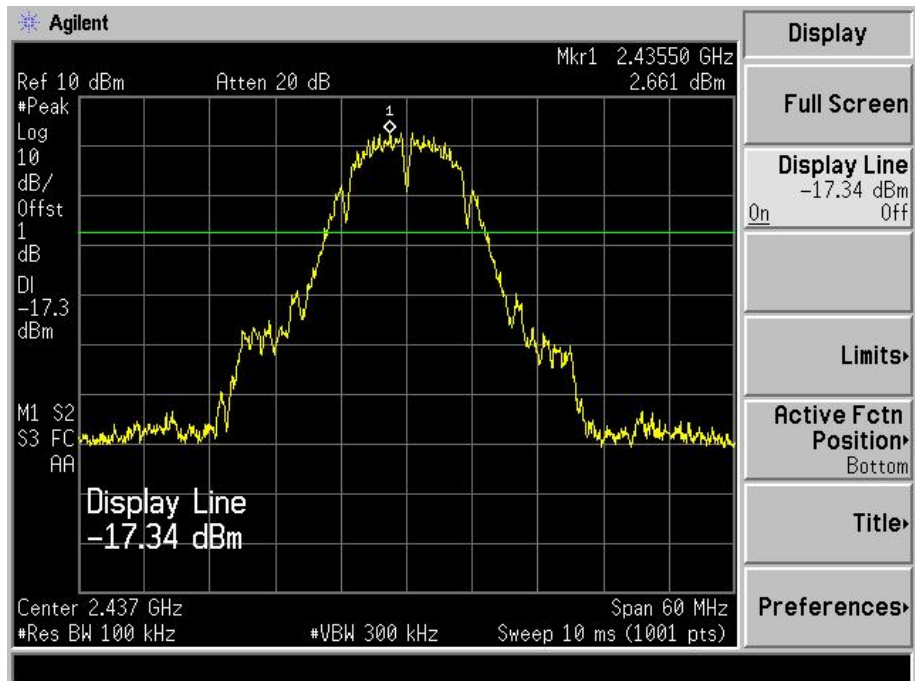



802.11b

High

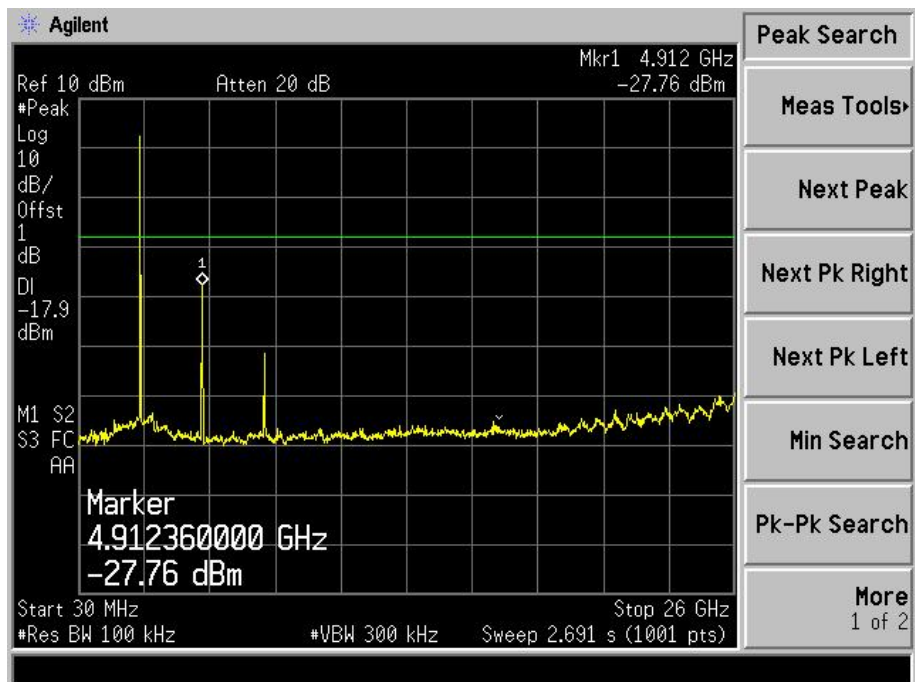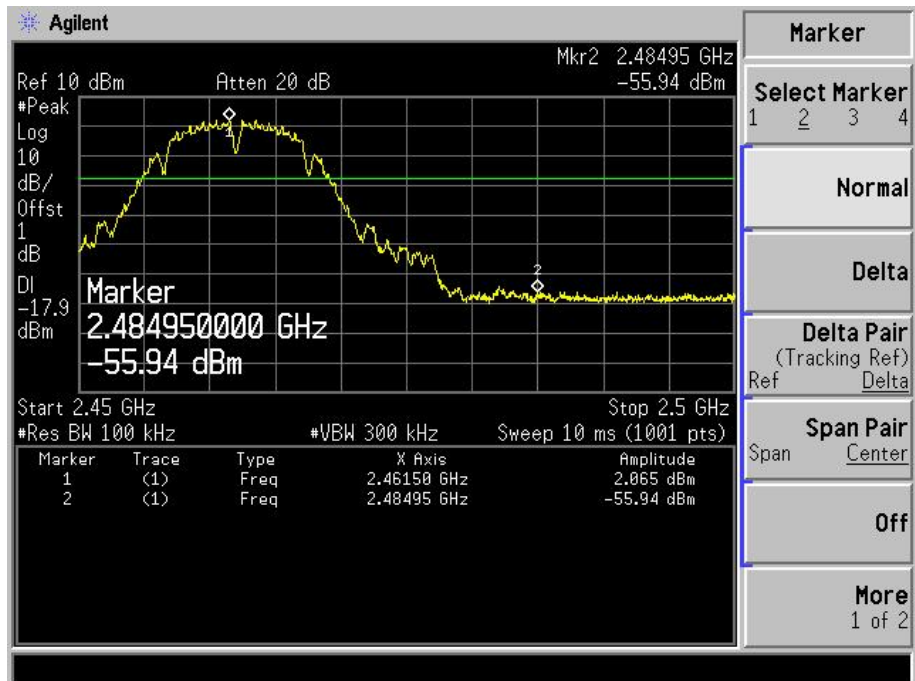



802.11g

Low

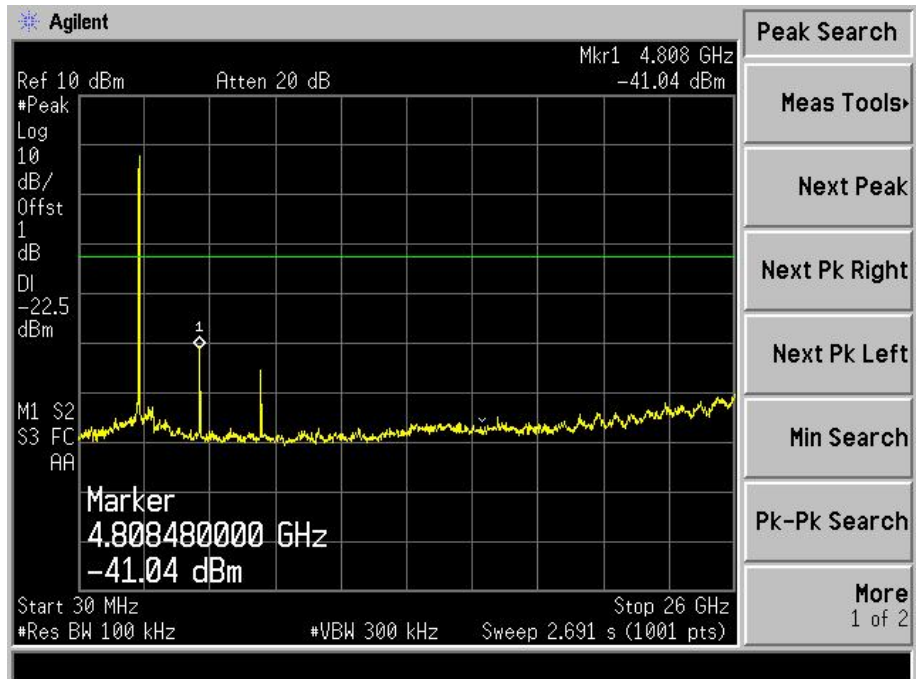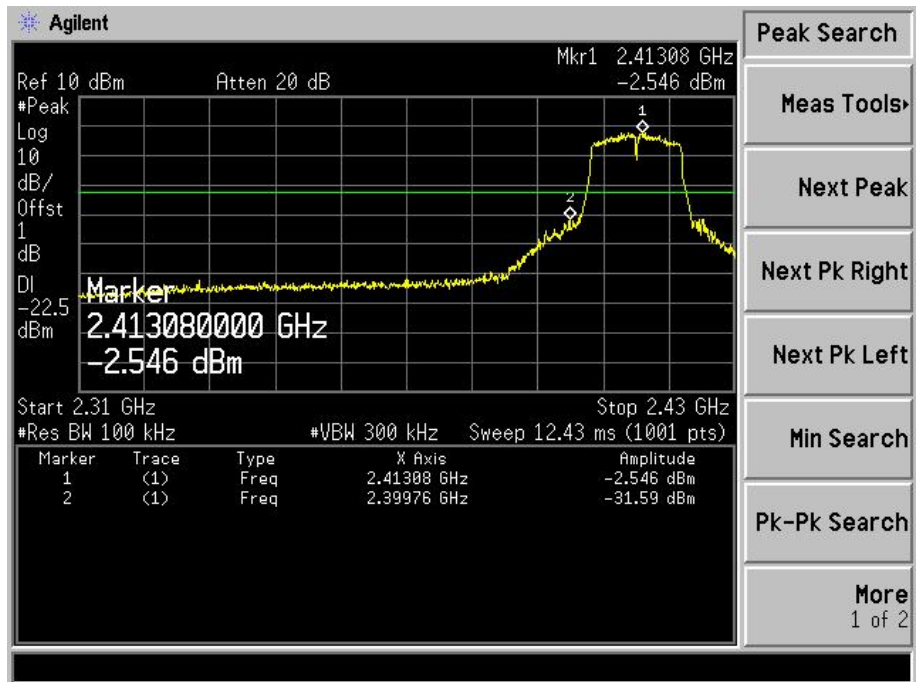



802.11g

Middle

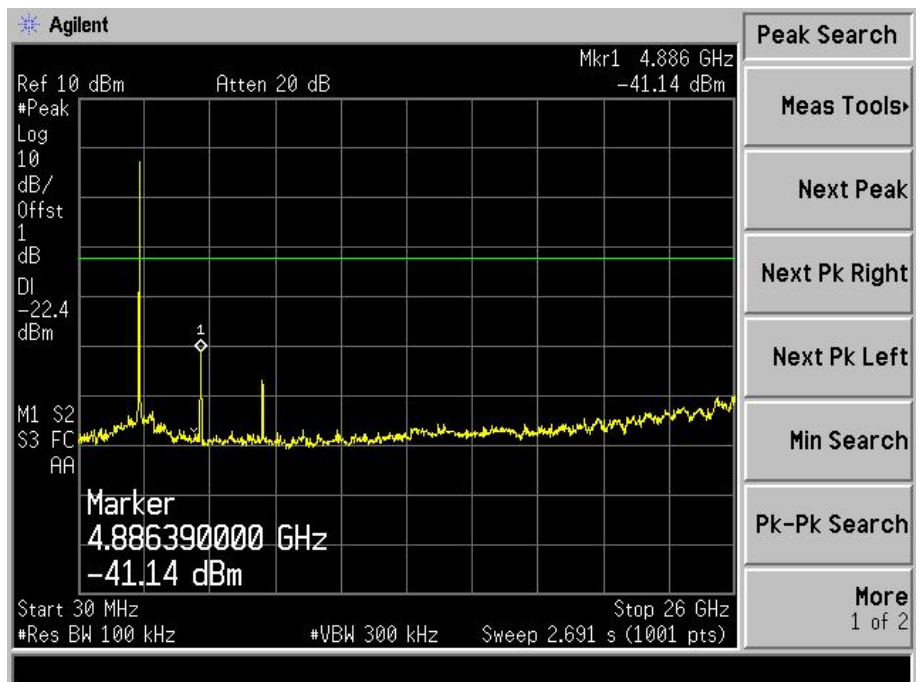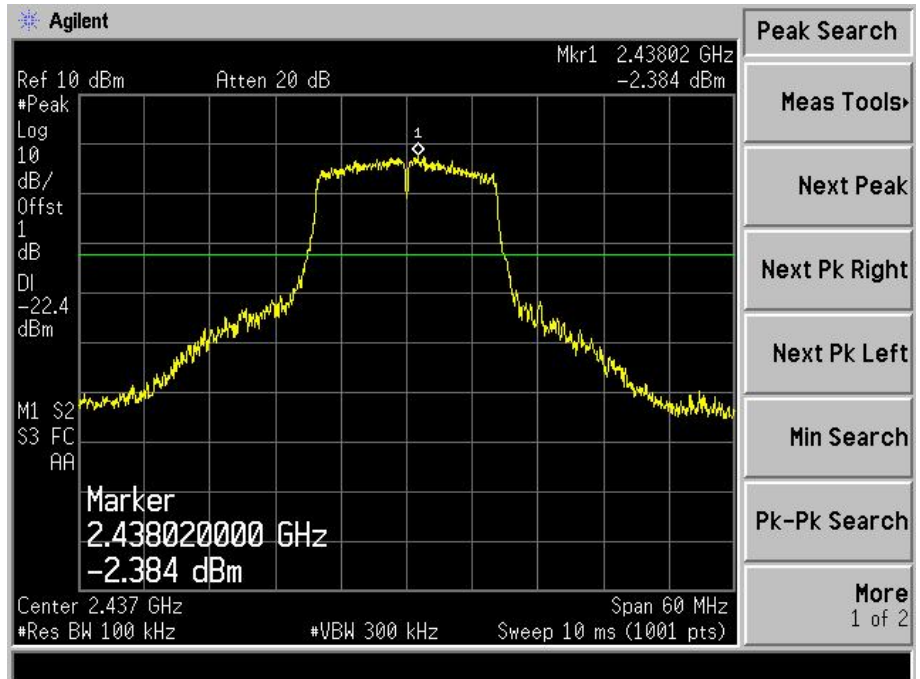



802.11g

High

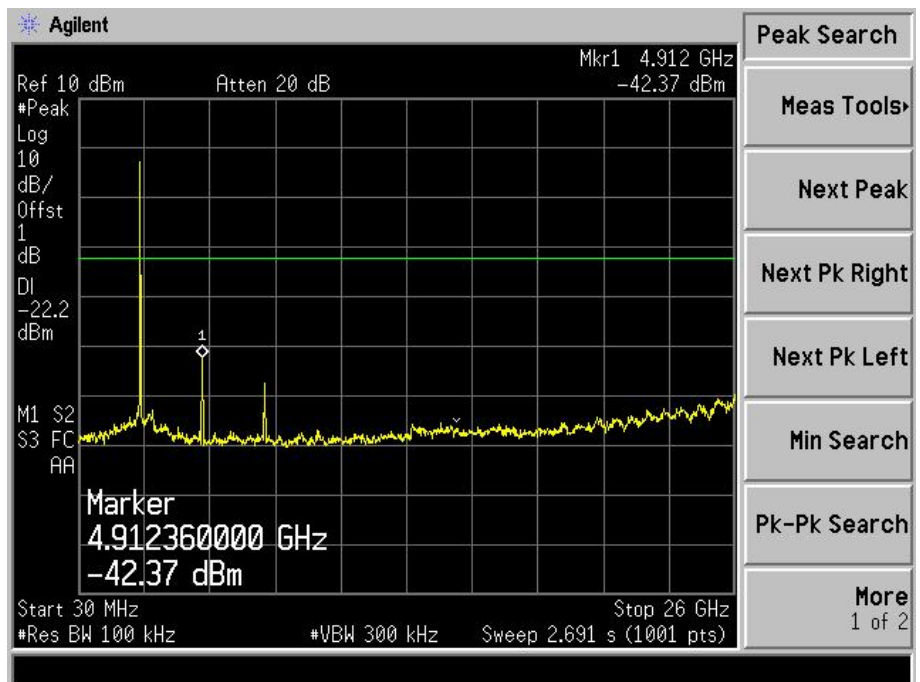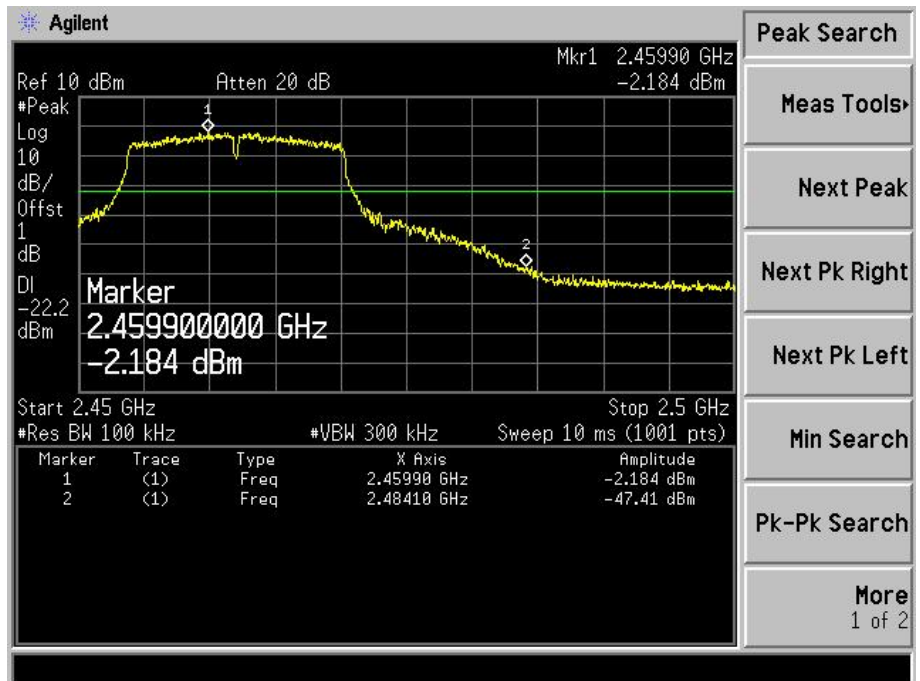



802.11n-HT20

Low

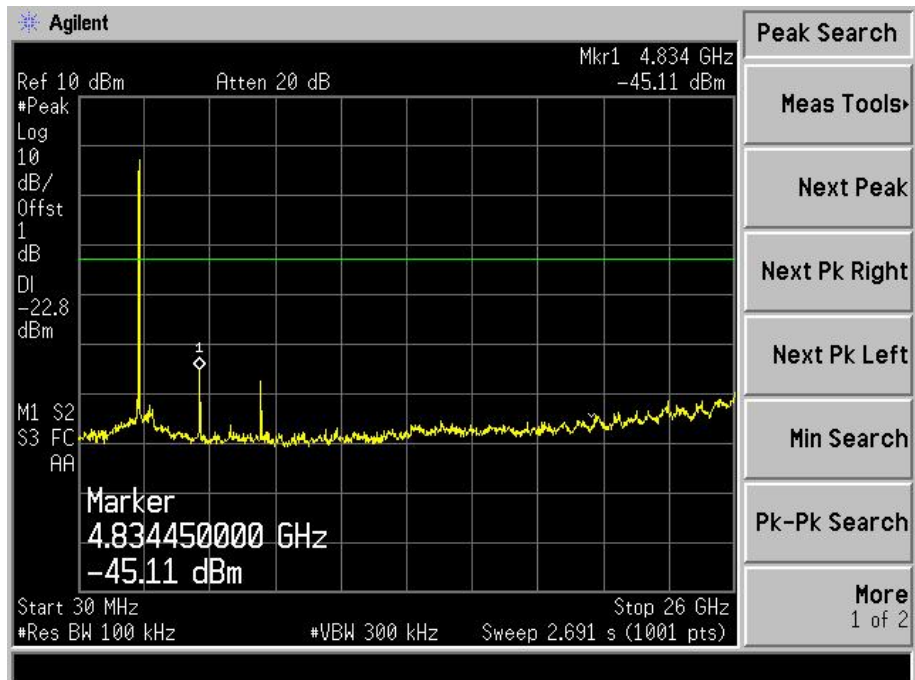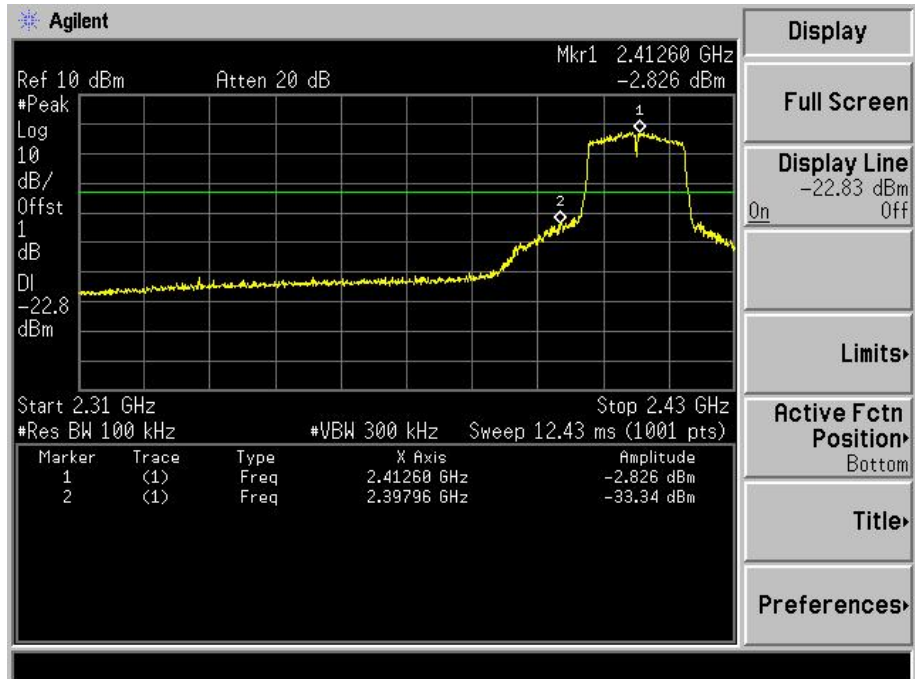

802.11n-HT20



Middle

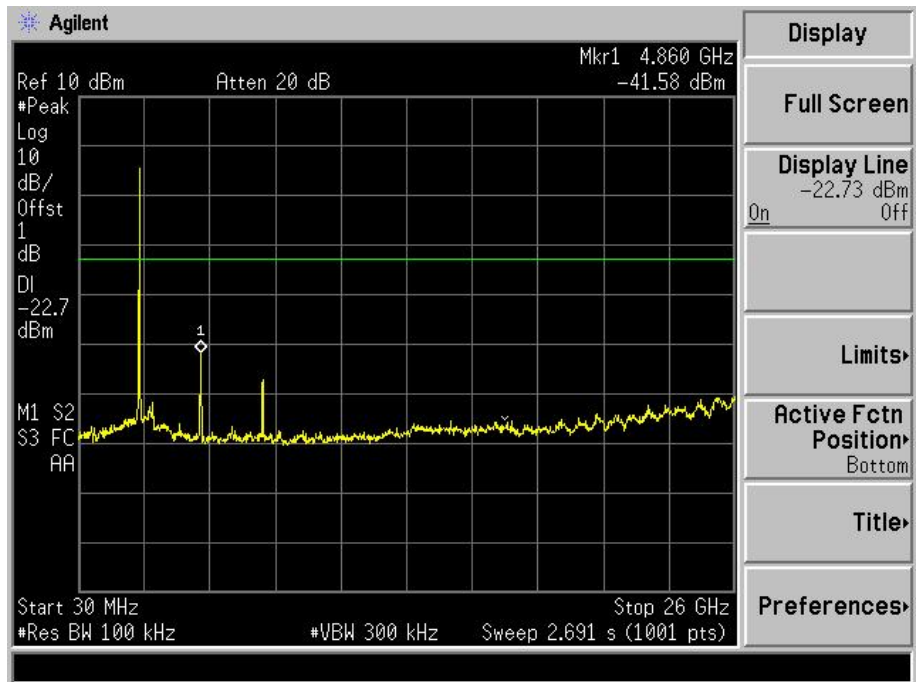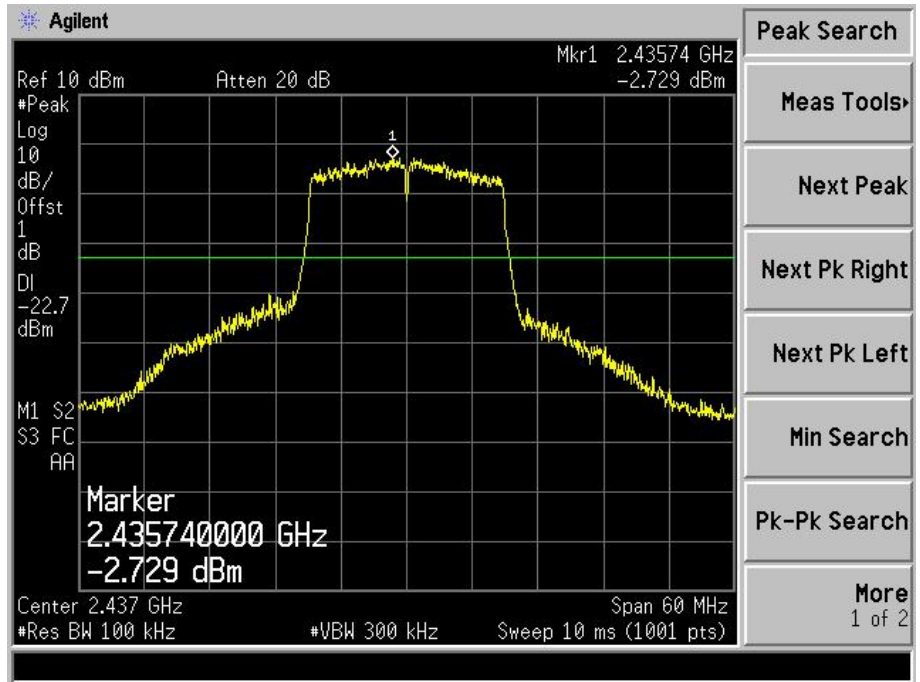





802.11n-HT20

High

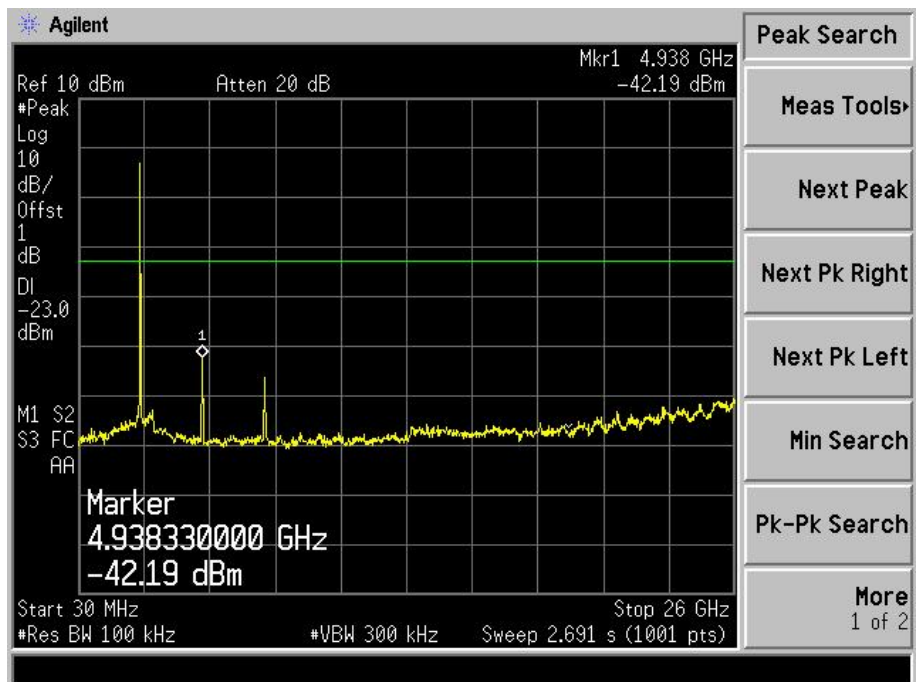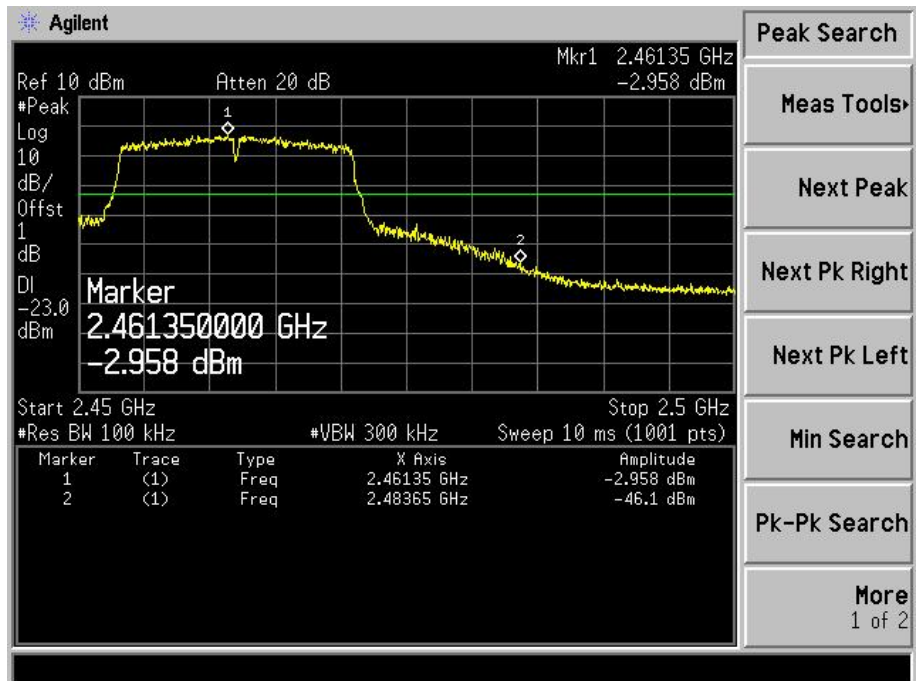



802.11n-HT40

Low

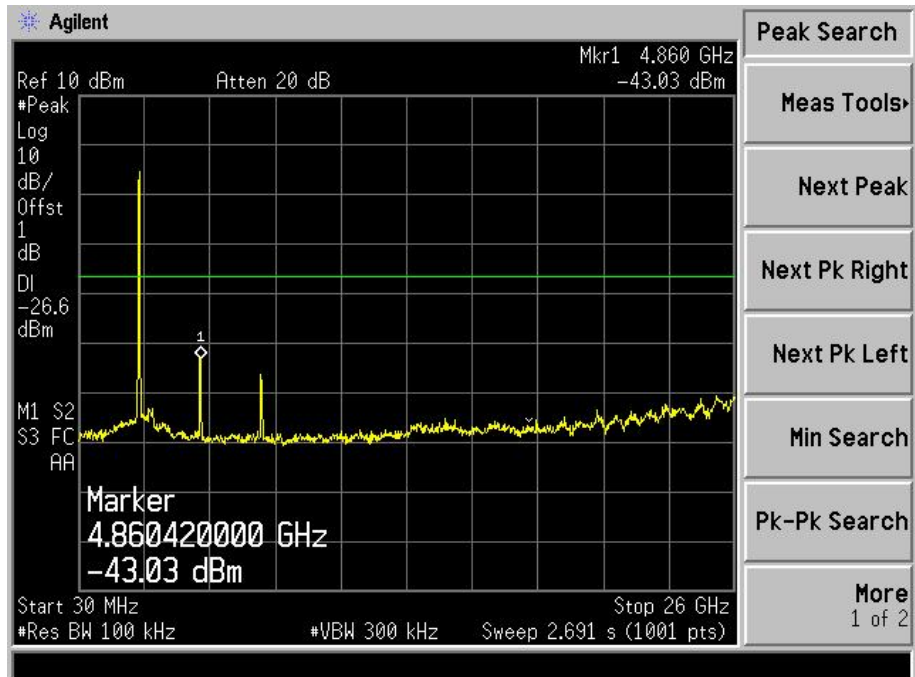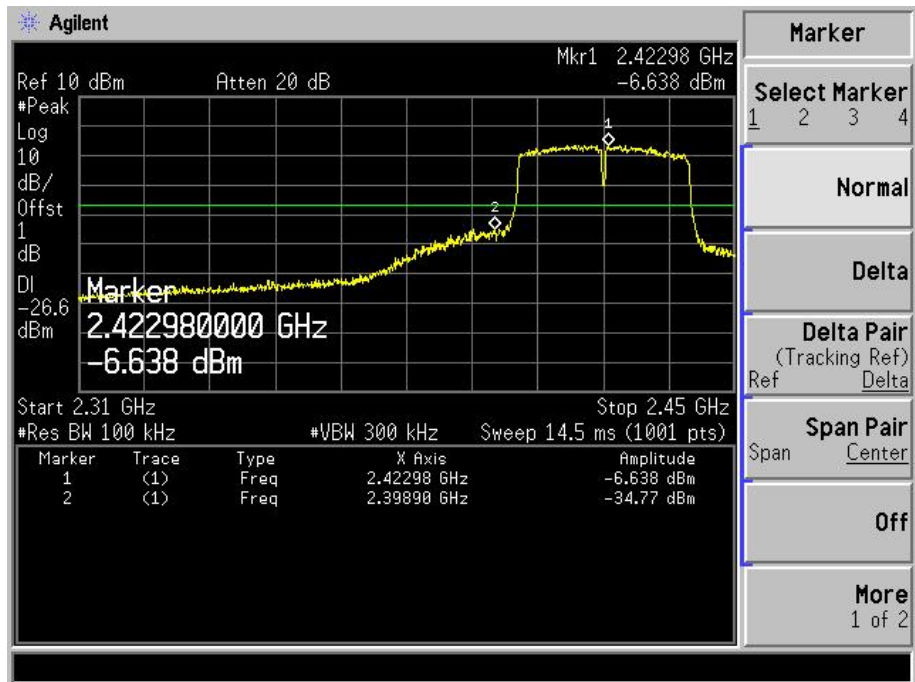



802.11n-HT40

Middle

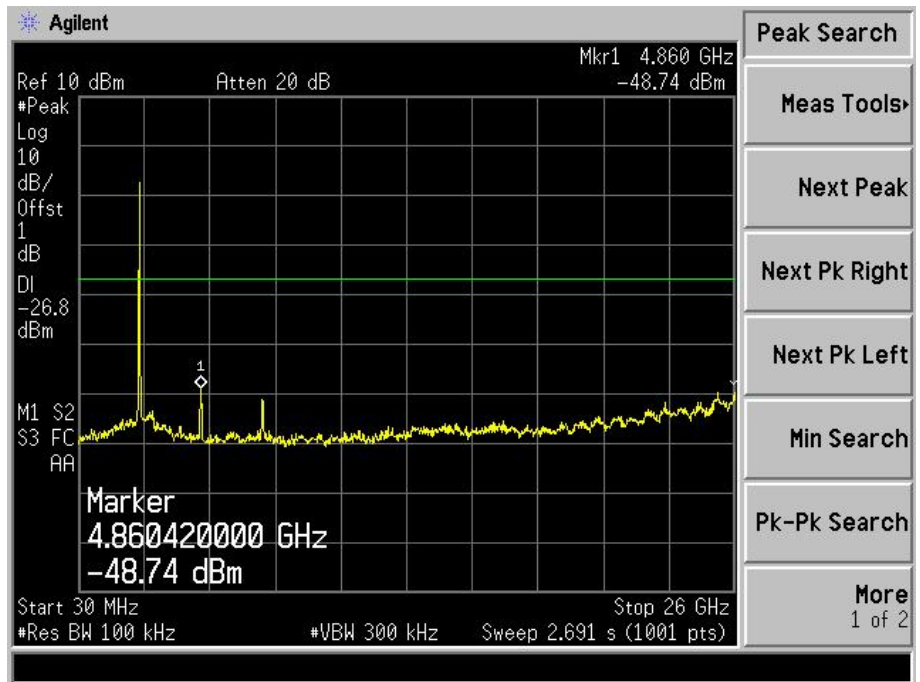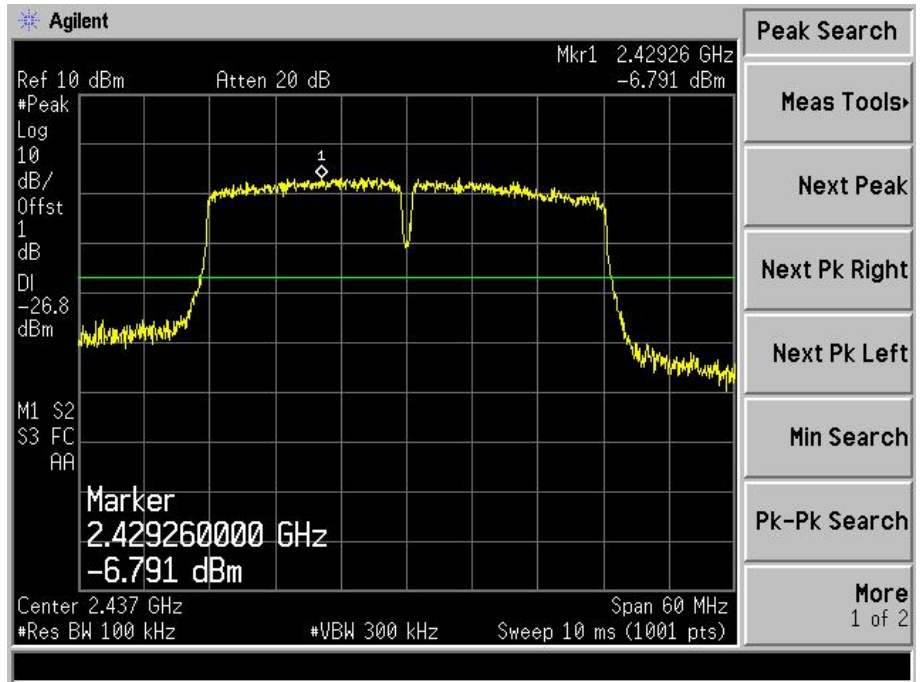



802.11n-HT40

High

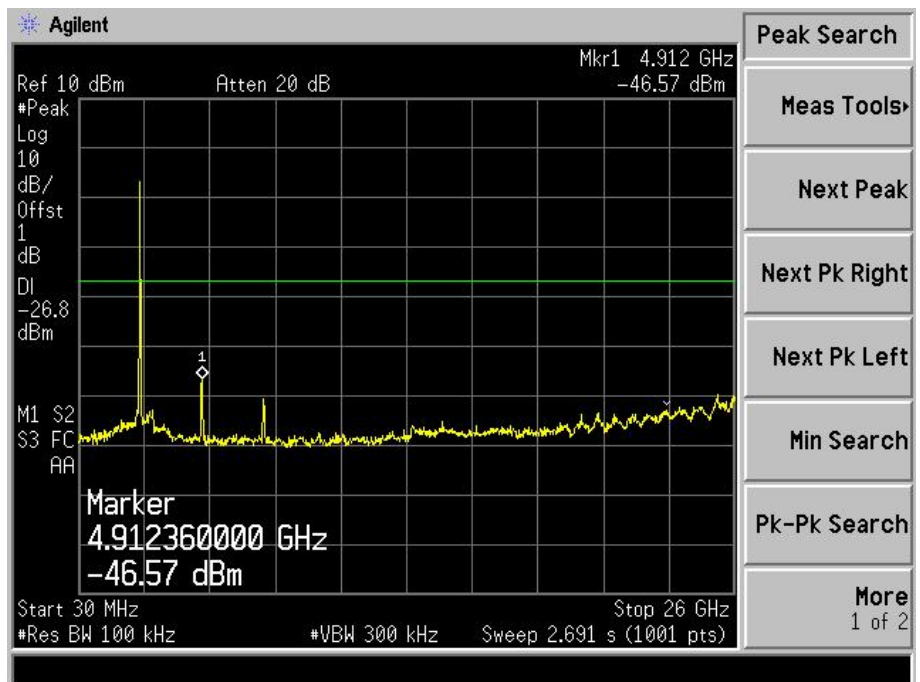
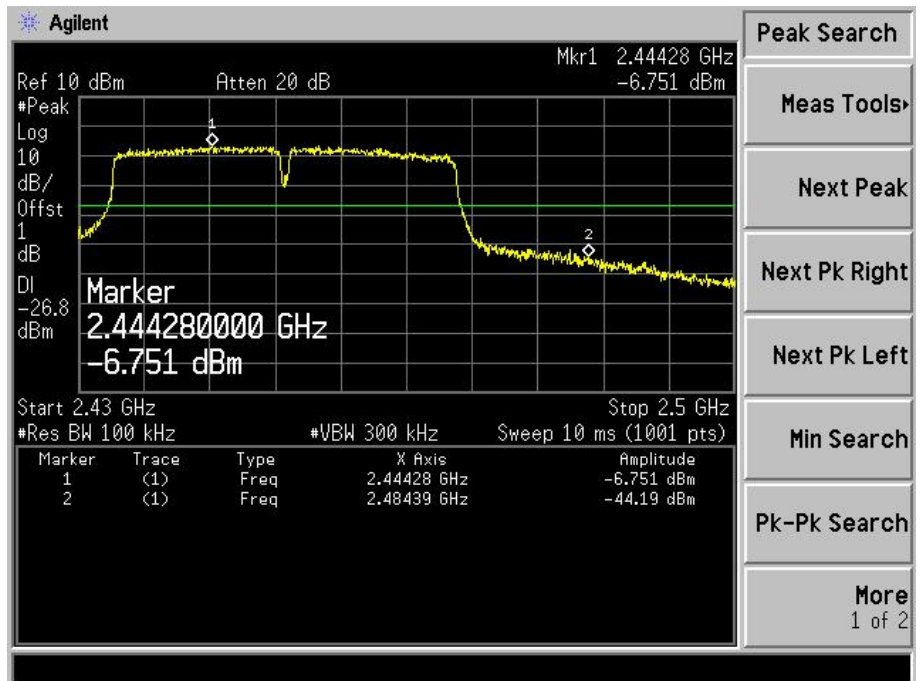


## APPENDIX E



802.11B

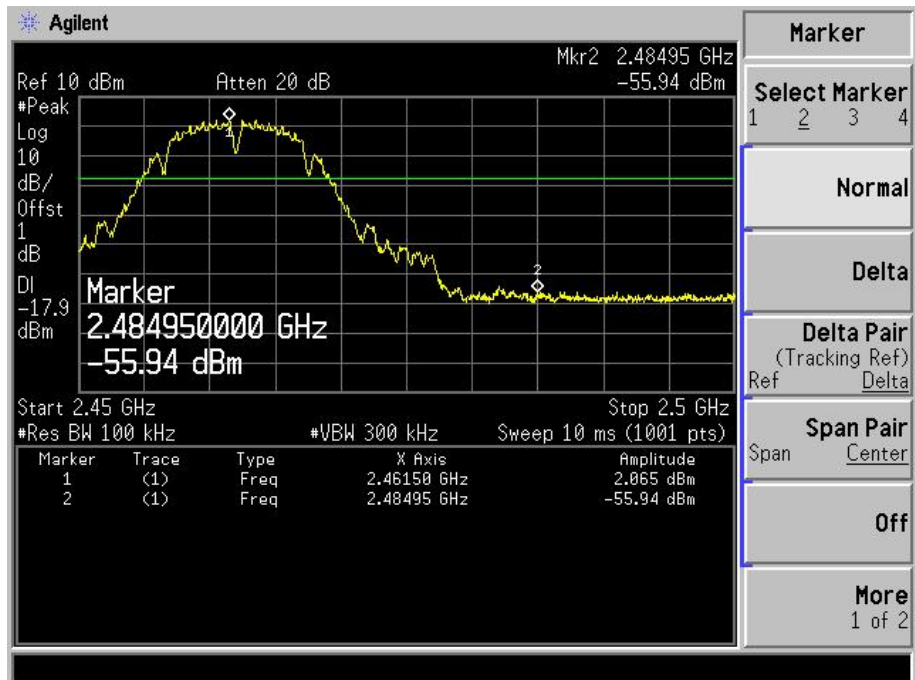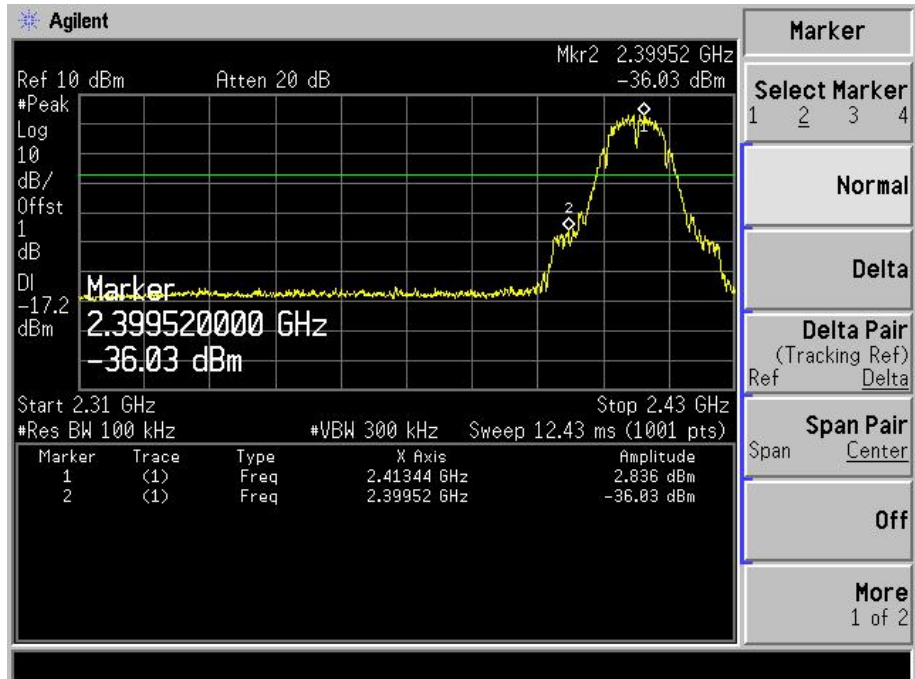



802.11G

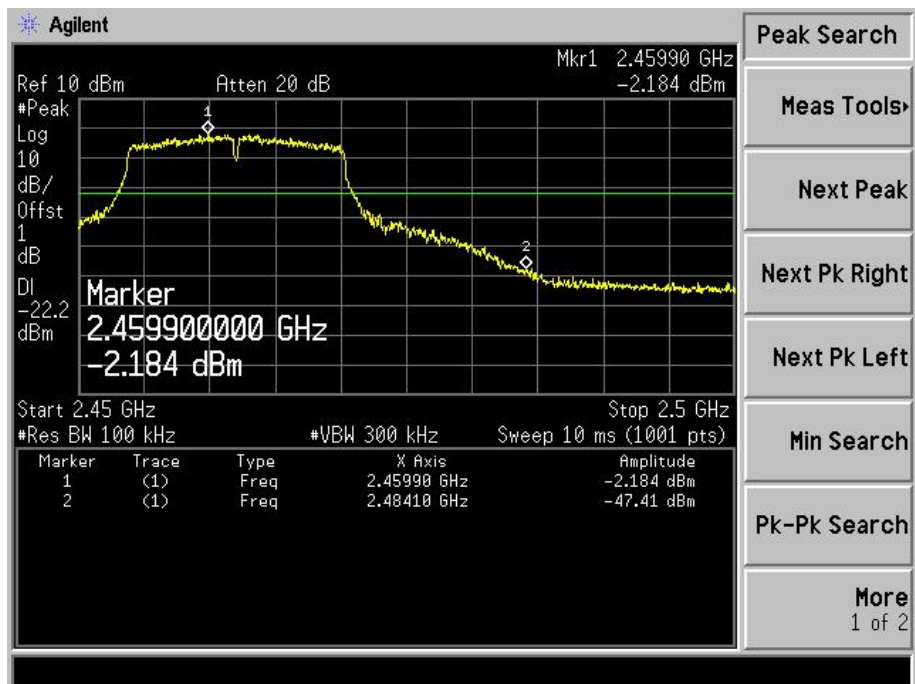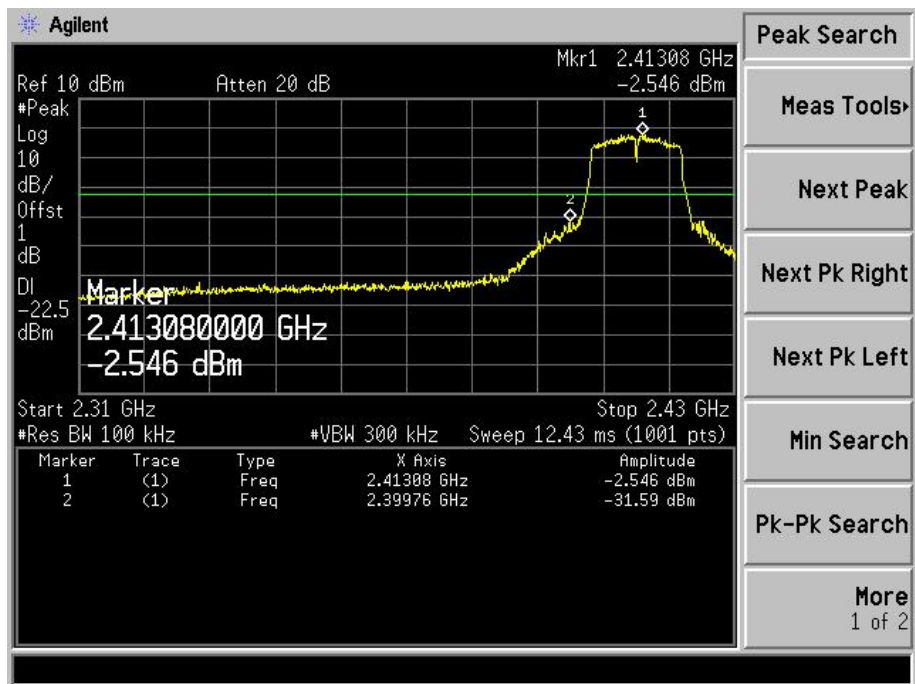

802.11N-HT20

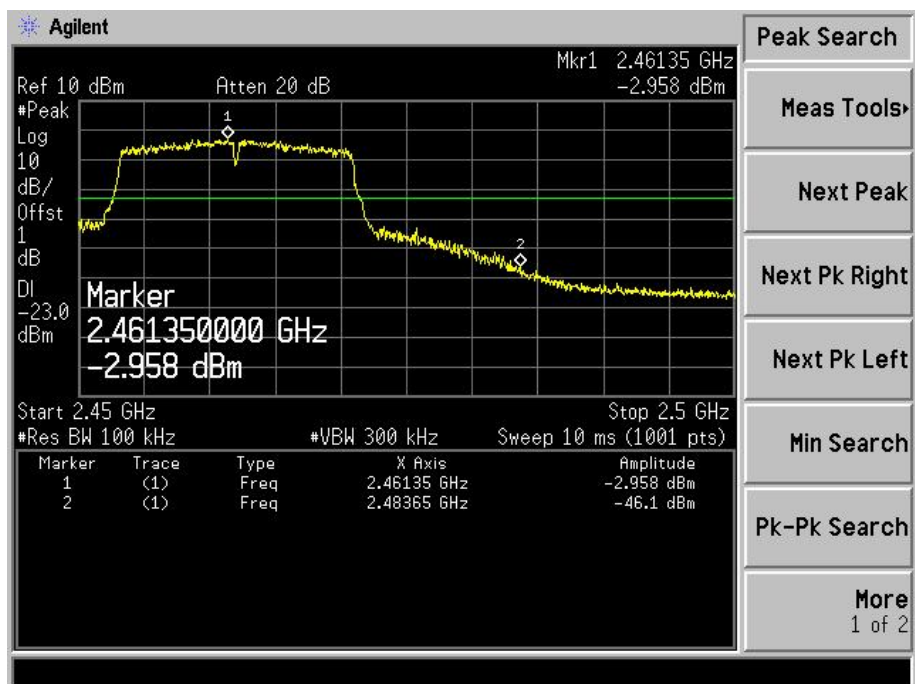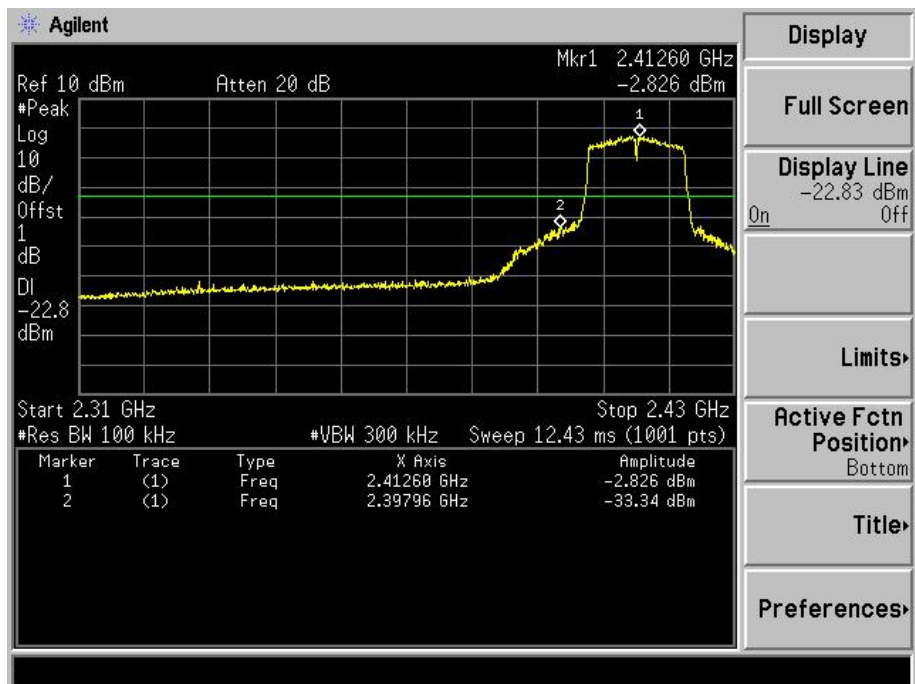

802.11N-HT40

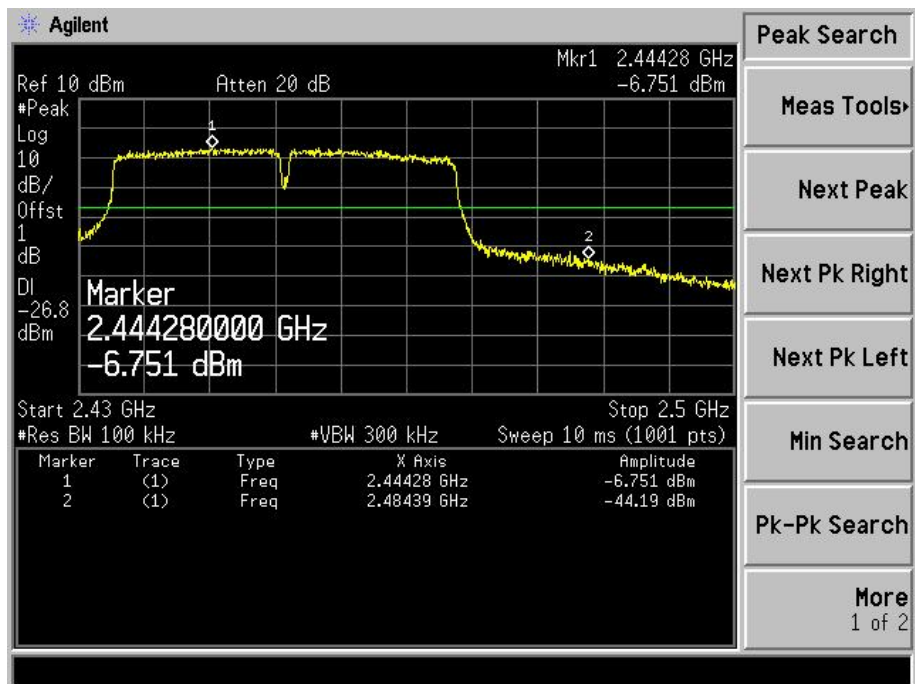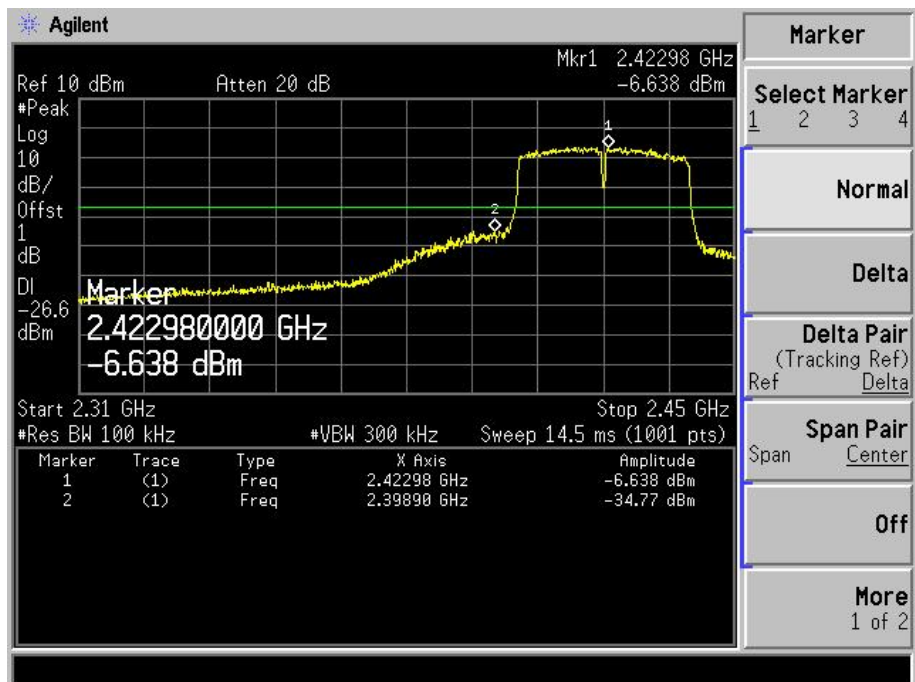



## **APPENDIX PHOTOGRAPHS**

---

Please refer to “ANNEX”

**\*\*\*\*\* END OF REPORT \*\*\*\*\***