




11G_Ant1_2412

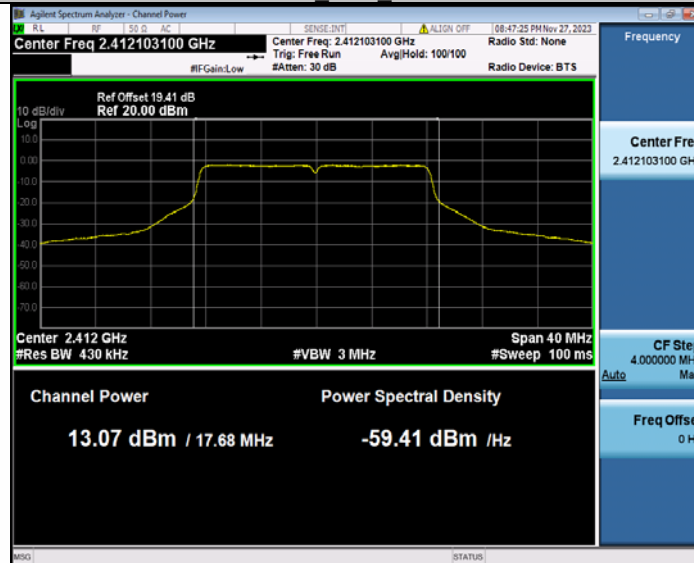


11G_Ant1_2437

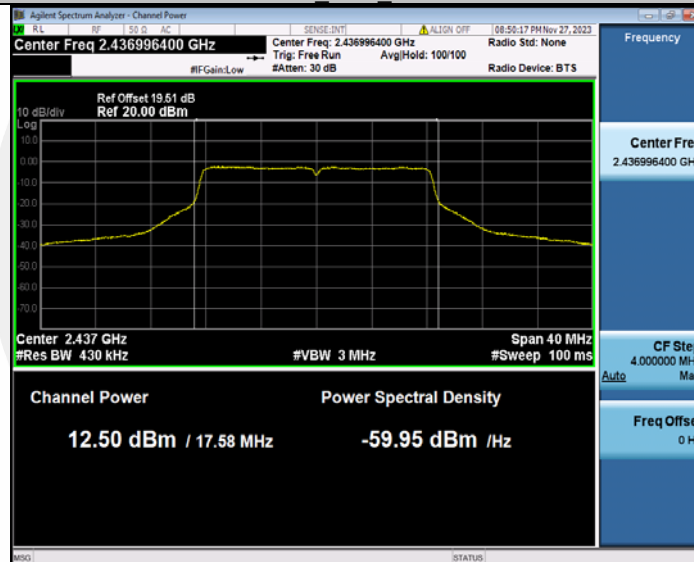


11G_Ant1_2462

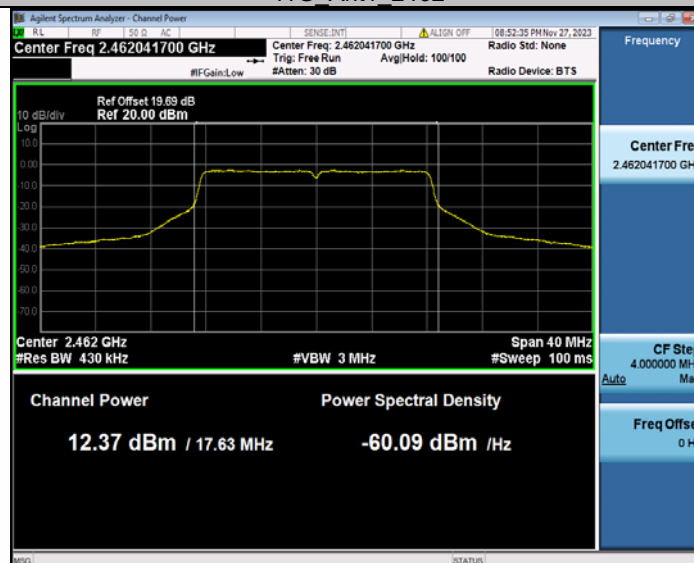


11N20SISO Ant1 2412

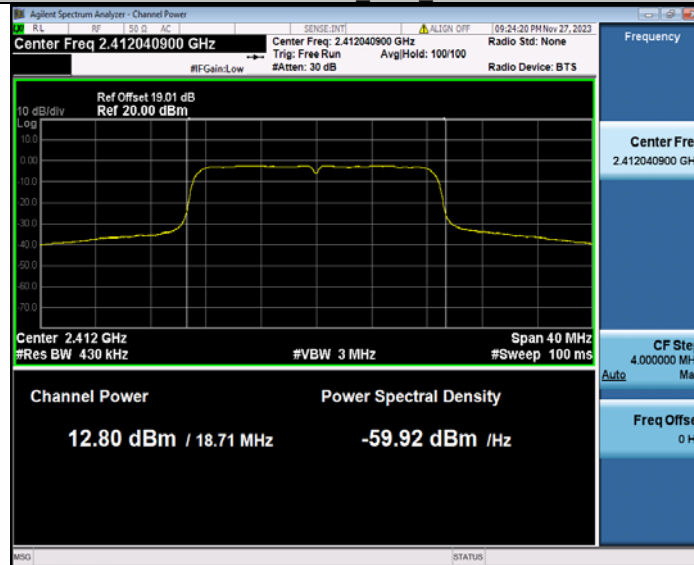


11N20SISO Ant1 2437

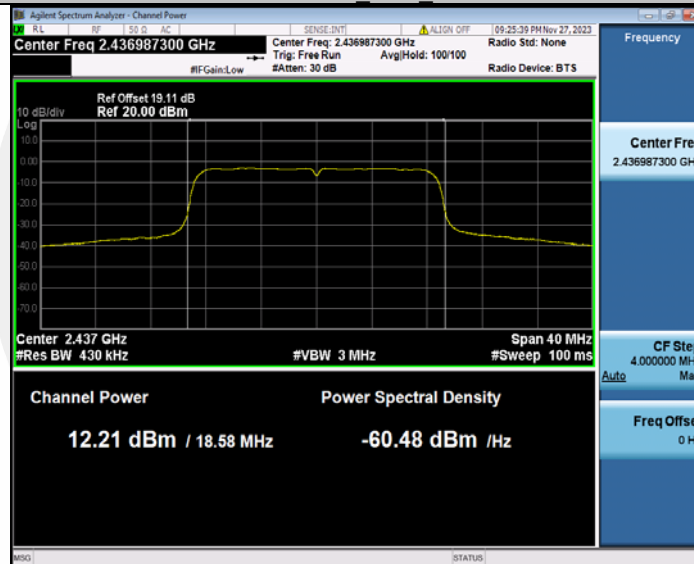


11N20SISO Ant1 2462

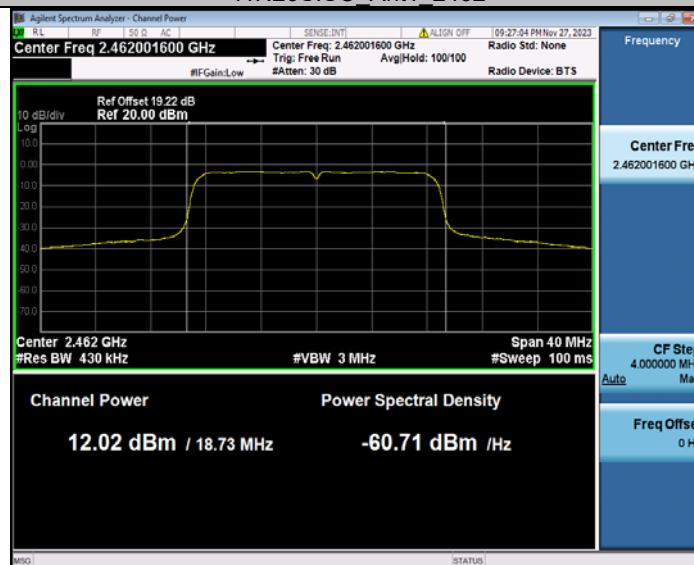


11N40SISO Ant1 2422

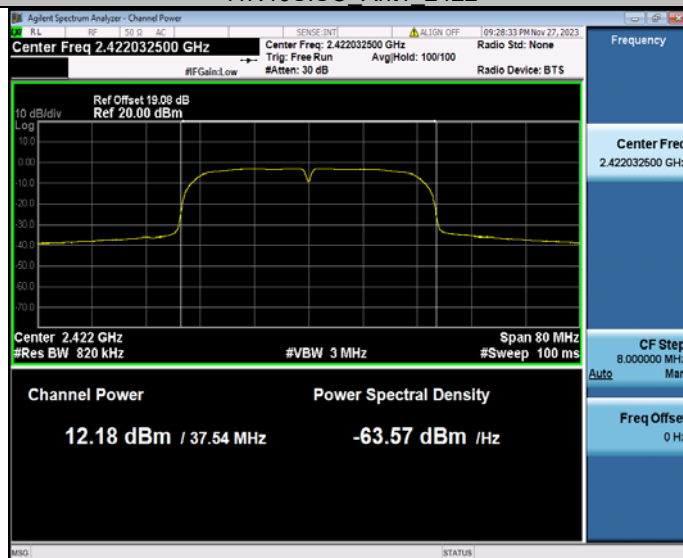

11N40SISO Ant1 2437

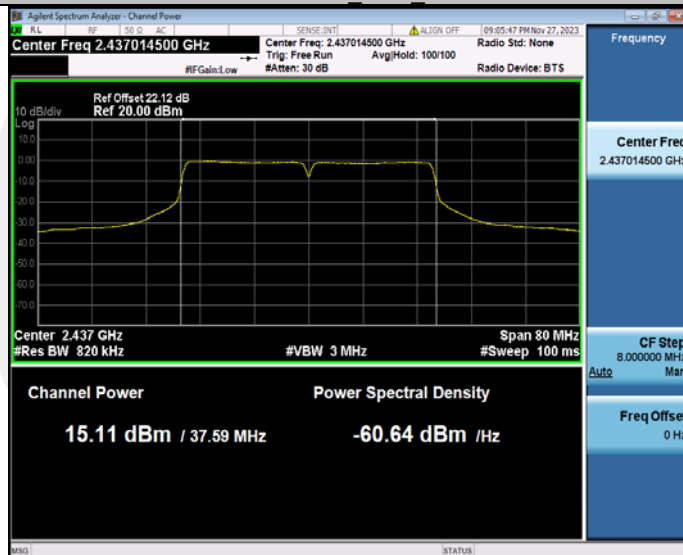

11N40SISO Ant1 2452

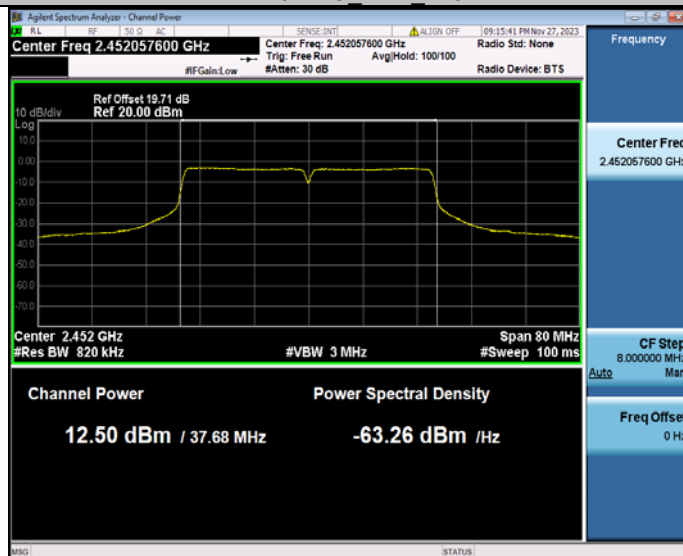

7.3 MAXIMUM POWER SPECTRAL DENSITY

7.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

7.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup.

7.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The transmitter output (antenna port) was connected to the spectrum analyzer.

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz.

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

7.3.5 Test Results

Temperature : 25°C
Humidity : 60 %
ATM Pressure: 1011 mbar
Test Engineer: XXH

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-16.29	≤8.00	PASS
		2437	-16.72	≤8.00	PASS
		2462	-17.17	≤8.00	PASS
11G	Ant1	2412	-21.09	≤8.00	PASS
		2437	-21.79	≤8.00	PASS
		2462	-21.52	≤8.00	PASS
11N20SISO	Ant1	2412	-21.41	≤8.00	PASS
		2437	-22.01	≤8.00	PASS
		2462	-22.38	≤8.00	PASS
11N40SISO	Ant1	2422	-24.99	≤8.00	PASS
		2437	-22.46	≤8.00	PASS
		2452	-25.24	≤8.00	PASS

11B Ant1 2412




11B Ant1 2437




11B Ant1 2462




11G Ant1 2412

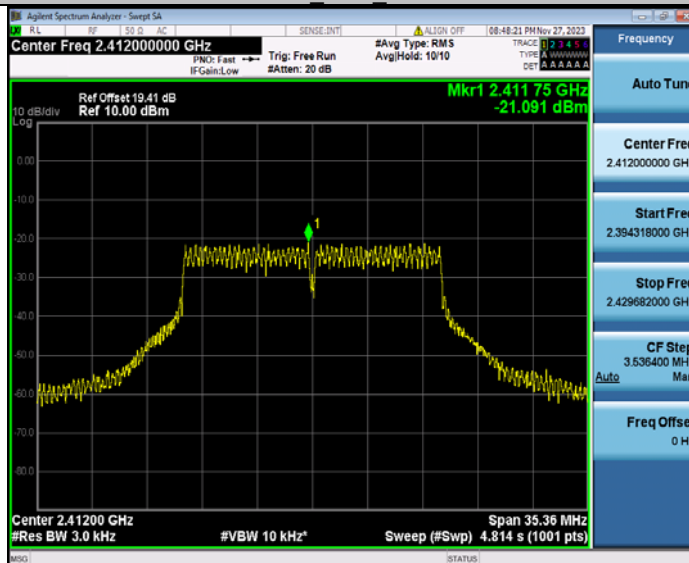


11G Ant1 2437

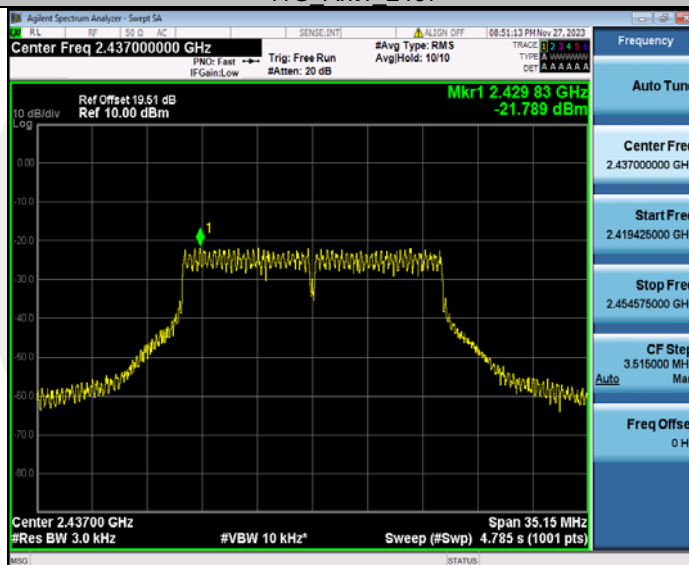


11G Ant1 2462

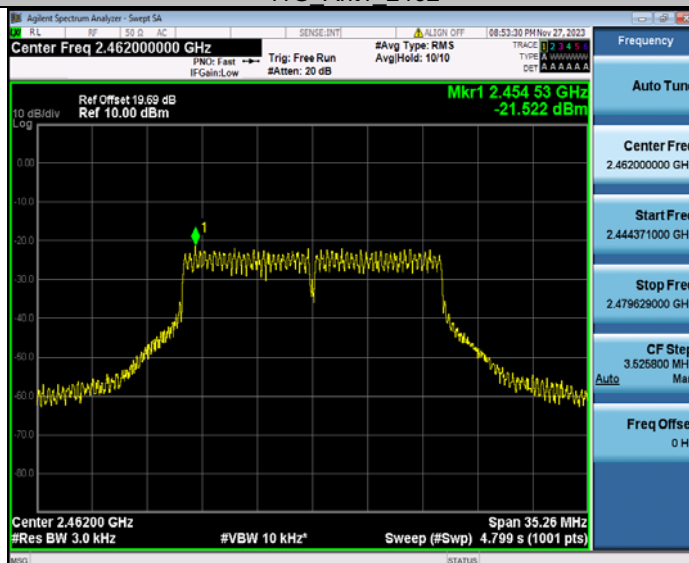


11N20SISO Ant1 2412

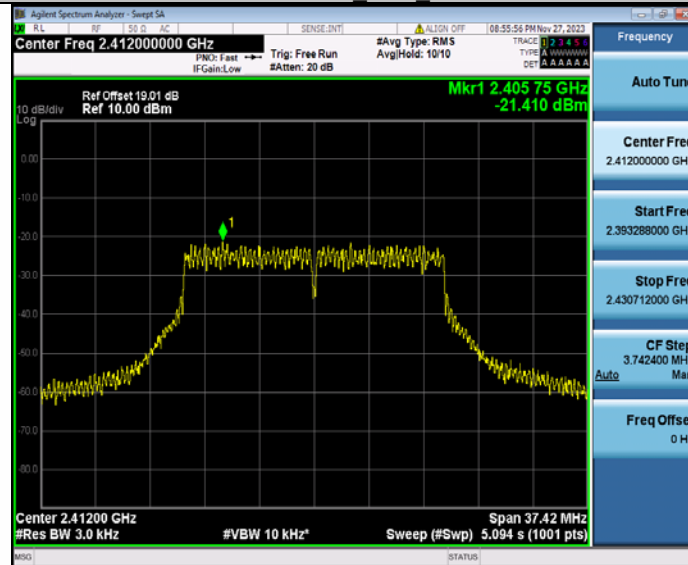


11N20SISO Ant1 2437

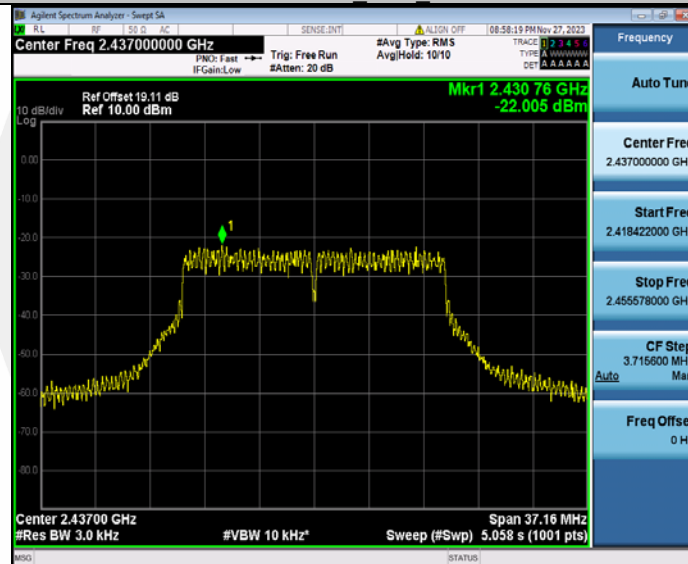


11N20SISO Ant1 2462

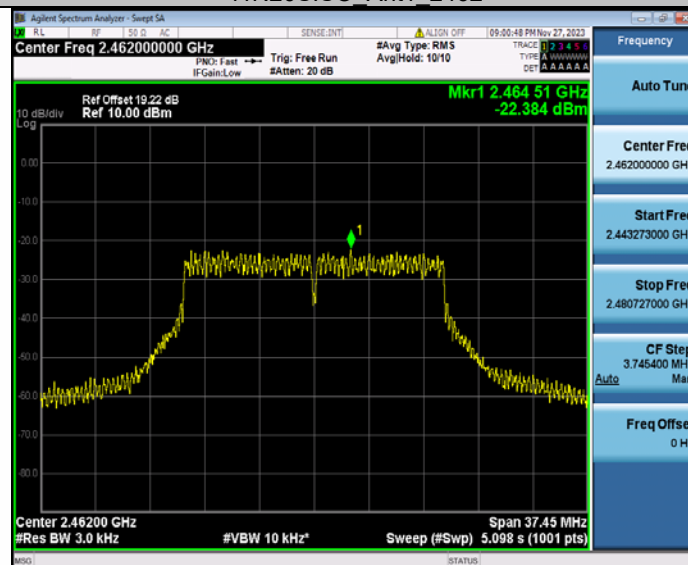


11N40SISO Ant1 2422

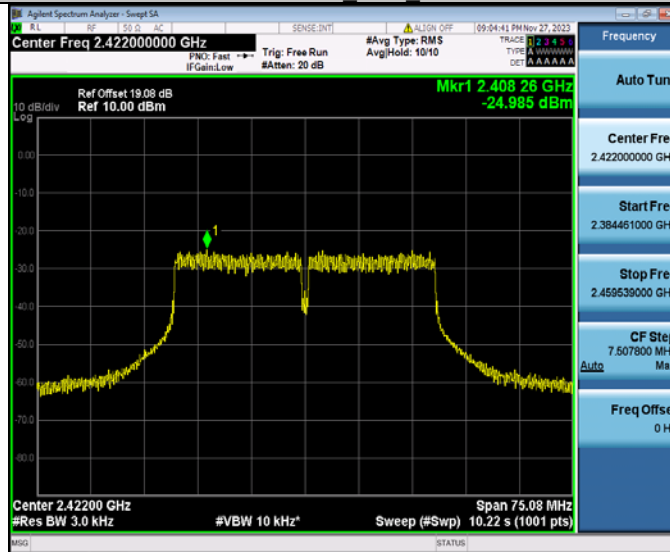

11N40SISO Ant1 2437

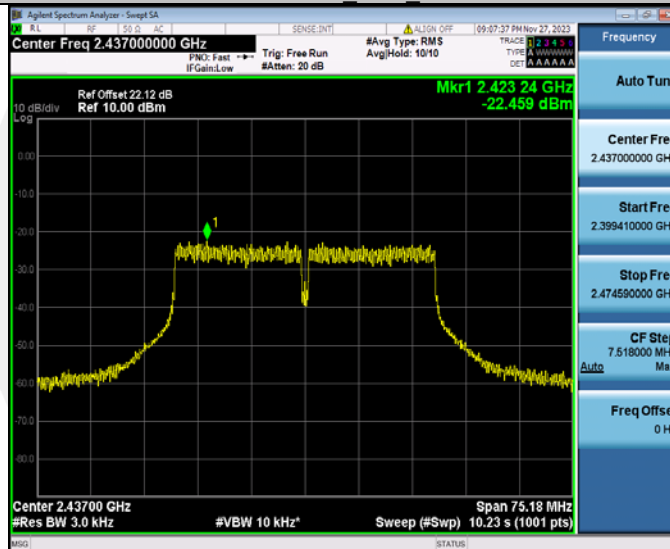

11N40SISO Ant1 2452

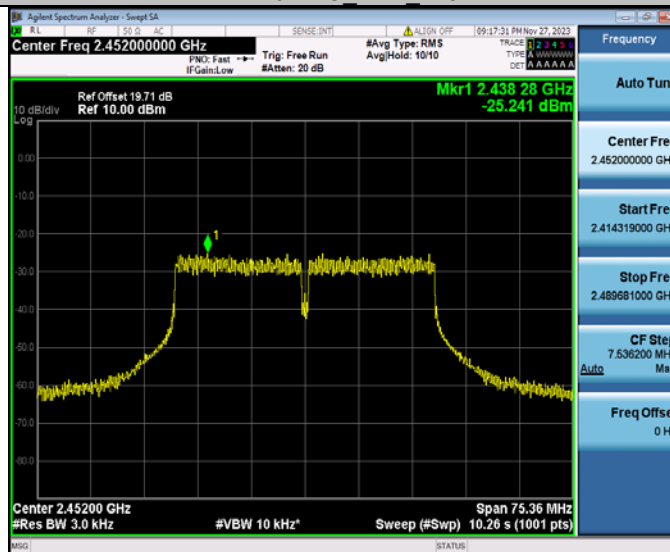

7.4 UNWANTED SPURIOUS EMISSIONS

7.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup.

7.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer.

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

7.4.5 Test Results

Temperature : 25°C

ATM Pressure: 1011 mbar

Humidity : 60 %

Test Engineer: XXH

Reference level measurement

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	Ant1	2412	2412.98	4.84
		2437	2437.75	3.52
		2462	2462.50	4.92


Band edge measurements

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	4.84	-37.94	≤-25.16	PASS
		High	2462	4.92	-38.93	≤-25.08	PASS

Conducted Spurious Emission

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	30~1000	4.84	-51.95	≤-25.16	PASS
			1000~26500	4.84	-52.12	≤-25.16	PASS
		2437	30~1000	3.52	-52.56	≤-26.48	PASS
			1000~26500	3.52	-51.82	≤-26.48	PASS
		2462	30~1000	4.92	-52.96	≤-25.08	PASS
			1000~26500	4.92	-50.37	≤-25.08	PASS

Reference level measurement

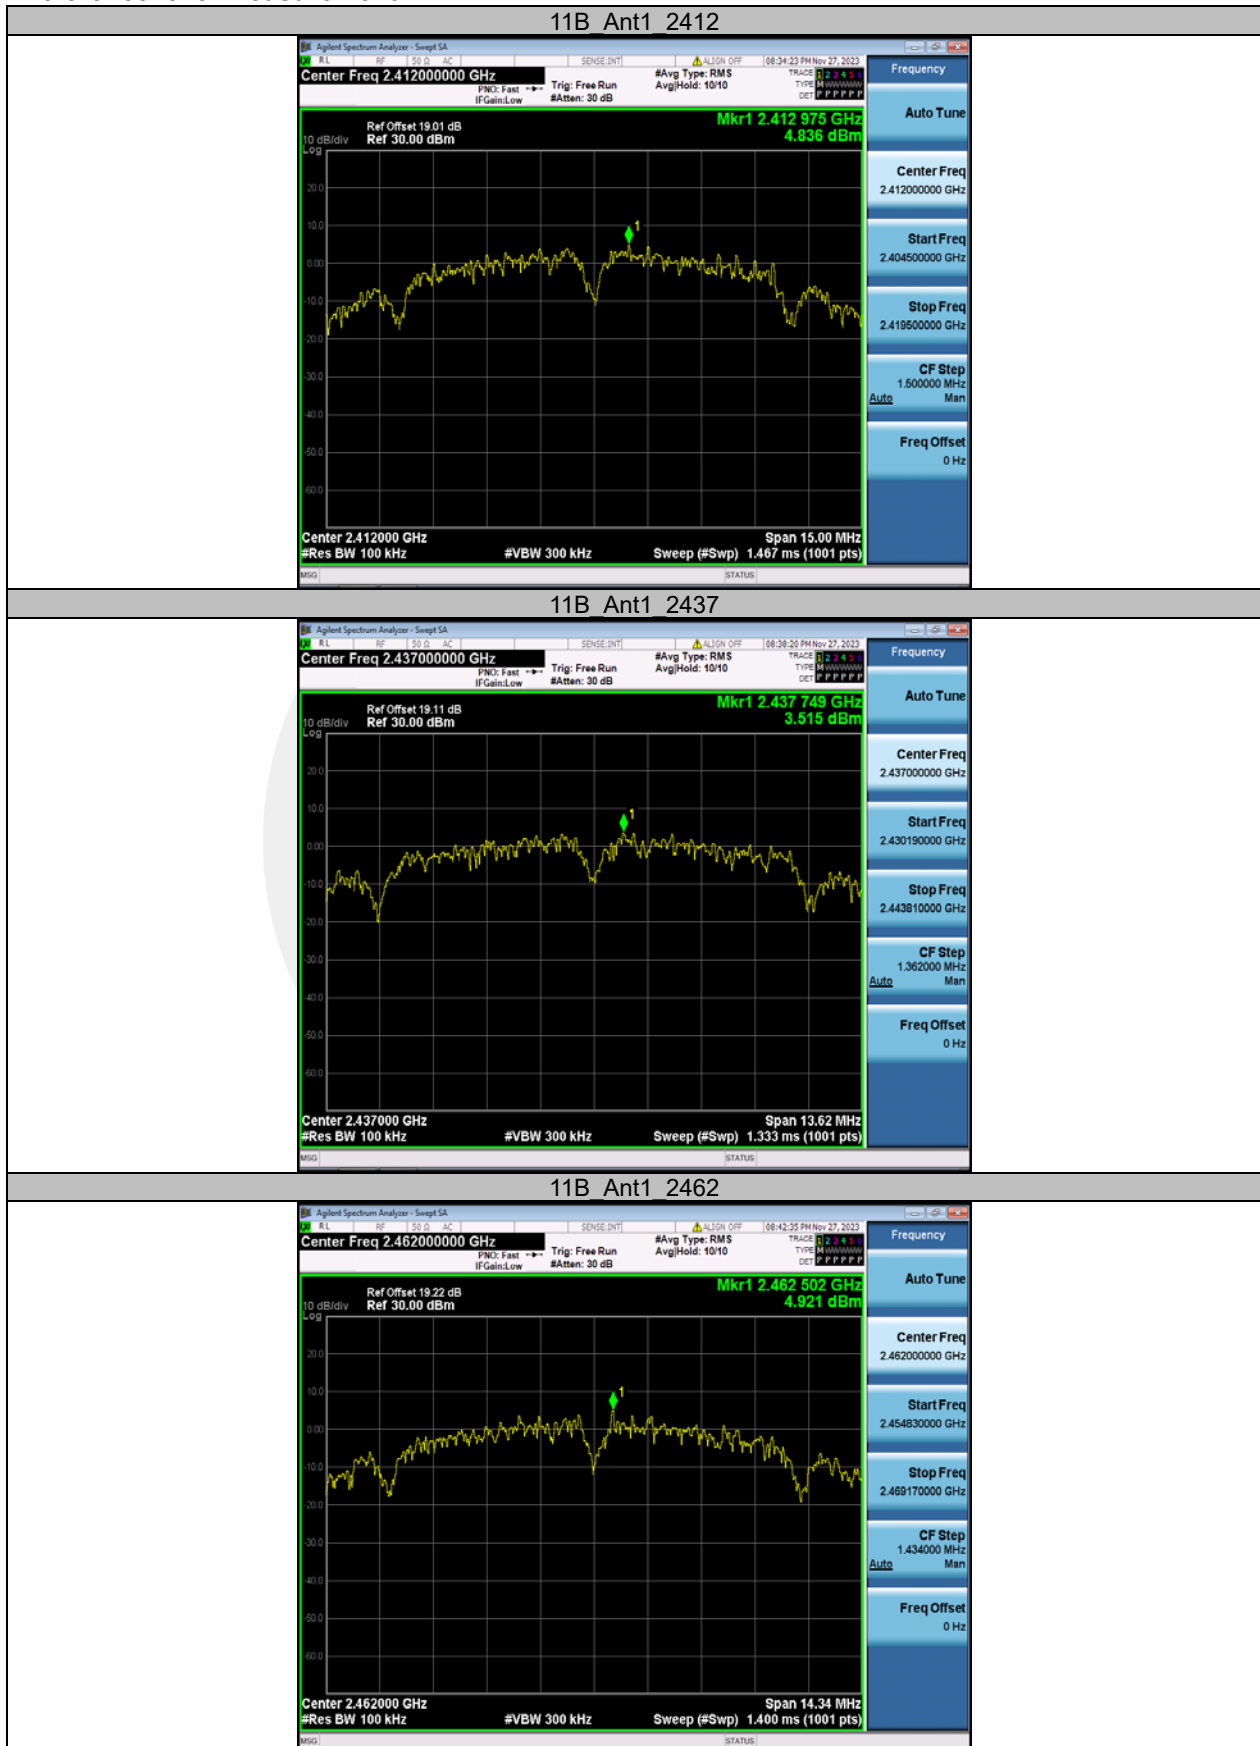


Band edge measurements




Conducted Spurious Emission


11B Ant1 2412 30~1000

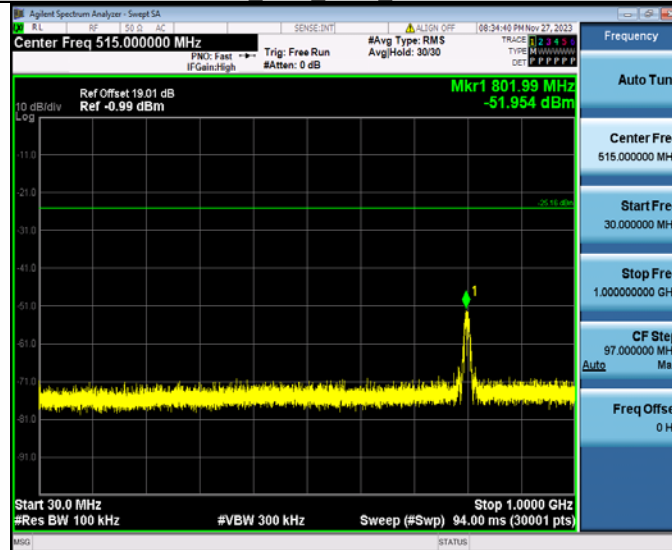


11B Ant1 2412 1000~26500

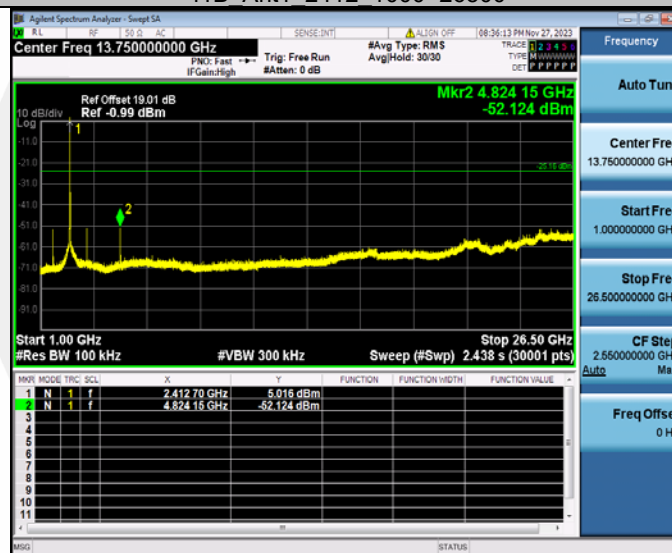


11B Ant1 2437 30~1000

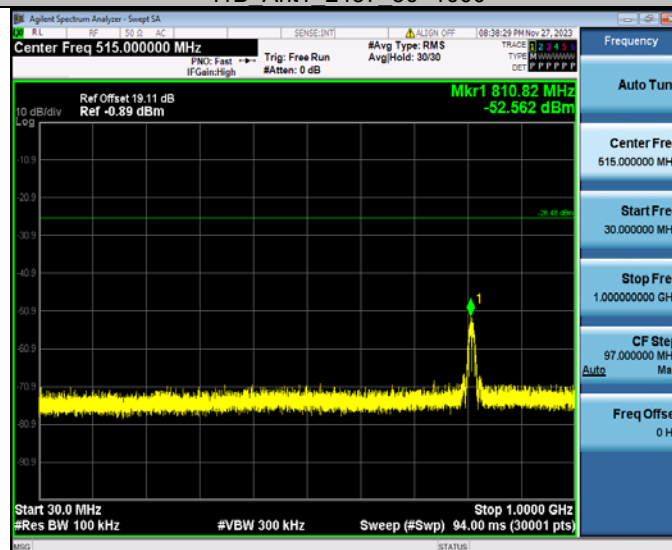


11B_Ant1_2437_1000~26500

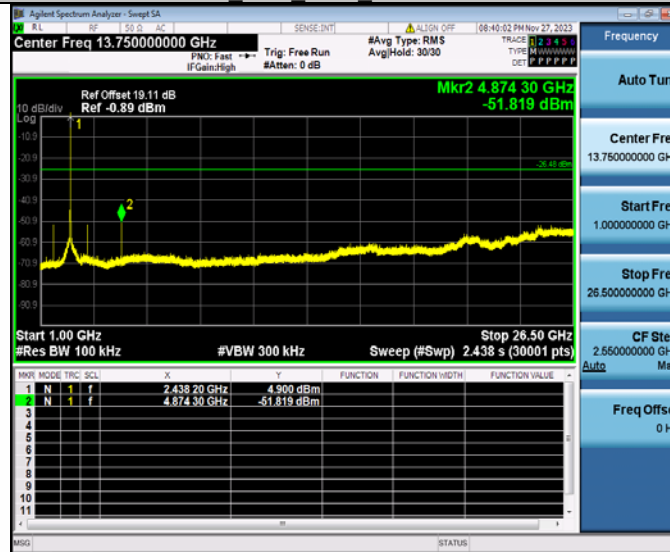

11B_Ant1_2462_30~1000

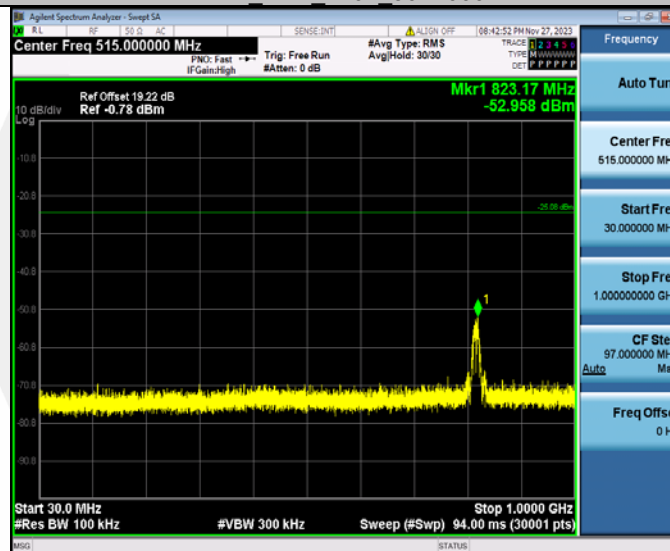

11B_Ant1_2462_1000~26500

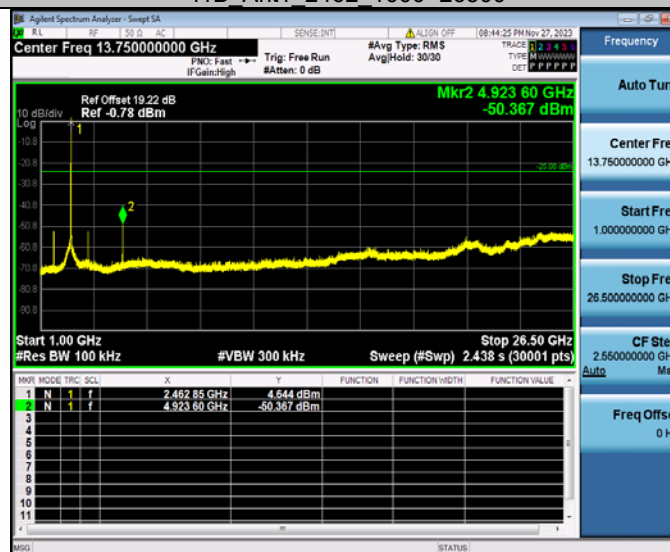

7.5 RADIATED EMISSION

7.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

7.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands.

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205 the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

7.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup.

7.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 1 MHz.

VBW ≥ RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Span = wide enough to fully capture the emission being measured.
 RBW = 100 kHz for
 VBW \geq RBW.
 Sweep = auto.
 Detector function = peak.
 Trace = max hold.

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Span = wide enough to fully capture the emission being measured.
 RBW = 9kHz.
 VBW \geq RBW.
 Sweep = auto.
 Detector function = peak.
 Trace = max hold.

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Span = wide enough to fully capture the emission being measured
 RBW = 200Hz.
 VBW \geq RBW.
 Sweep = auto.
 Detector function = peak.
 Trace = max hold.

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

7.5.5 Test Results

PASS

Temperature :	25°C	ATM Pressure:	1011 mbar
Humidity :	60 %	Test Engineer:	HZB

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB).

Limit line = Specific limits(dBuV) + distance extrapolation factor.

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All modes have been tested, and the worst result recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
11535	V	59.67	74.00	14.33	peak
14619.3	V	62.93	74.00	11.07	peak
17617.5	V	67.77	74.00	6.23	peak
11535	V	46.51	54.00	7.49	AVG
14619.37	V	47.08	54.00	6.92	AVG
17617.5	V	46.55	54.00	7.45	AVG
12421.8	H	59.47	74.00	14.53	peak
14568.7	H	63.14	74.00	10.86	peak
17641.8	H	66.84	74.00	7.16	peak
12421.87	H	49.36	54.00	4.64	AVG
14568.75	H	46.29	54.00	7.71	AVG
17641.87	H	45.56	54.00	8.44	AVG

Test mode: 802.11 b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
11473.1	V	59.56	74.00	14.44	peak
14670	V	63.25	74.00	10.75	peak
17595	V	67.85	74.00	6.15	peak
11473.12	V	47.18	54.00	6.82	AVG
14670	V	45.23	54.00	8.77	AVG
17595	V	47.53	54.00	6.47	AVG
11469.3	H	59.63	74.00	14.37	peak
14610	H	62.83	74.00	11.17	peak
17585.6	H	67.40	74.00	6.60	peak
11469.37	H	47.13	54.00	6.87	AVG
14610	H	46.96	54.00	7.04	AVG
17585.62	H	46.78	54.00	7.22	AVG

Test mode: 802.11 b		Frequency:		Channel 11: 2462MHz	
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
12463.1	V	59.54	74.00	14.46	peak
14685	V	62.37	74.00	11.63	peak
17634.3	V	66.80	74.00	7.20	peak
12463.12	V	49.13	54.00	4.87	AVG
14685	V	45.32	54.00	8.68	AVG
17634.37	V	46.03	54.00	7.97	AVG
11497.5	H	60.00	74.00	14.00	peak
14581.8	H	63.31	74.00	10.69	peak
17600.6	H	67.71	74.00	6.29	peak
11497.5	H	47.56	54.00	6.44	AVG
14581.87	H	46.67	54.00	7.33	AVG
17600.62	H	47.65	54.00	6.35	AVG

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor.
 (3) Correct Factor= Ant_F + Cab_L - Preamp.
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.