




Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00004.EMI

Date: 2024-08-19

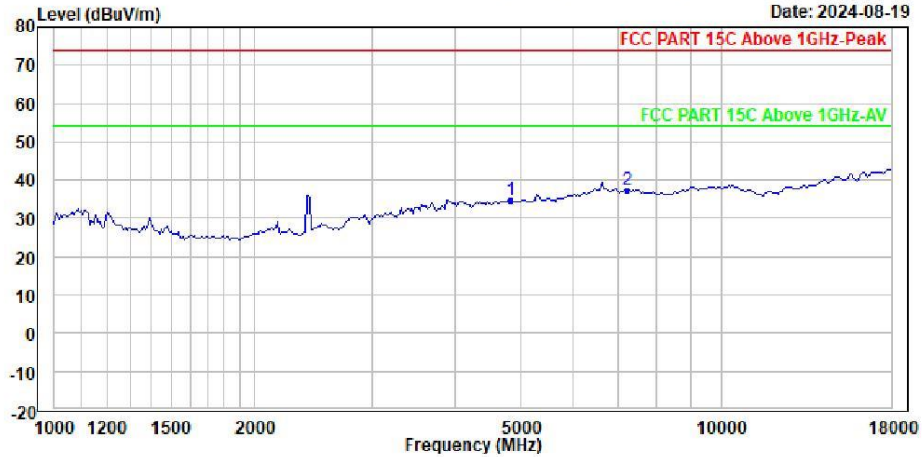

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	34.63	36.70	34.46	0.00	9.33	45.86	54.00	-19.37	Average
2	PP 7236.000	37.51	36.21	36.50	0.00	10.35	45.55	54.00	-16.49	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISEI3_00005.EMI

Date: 2024-08-19

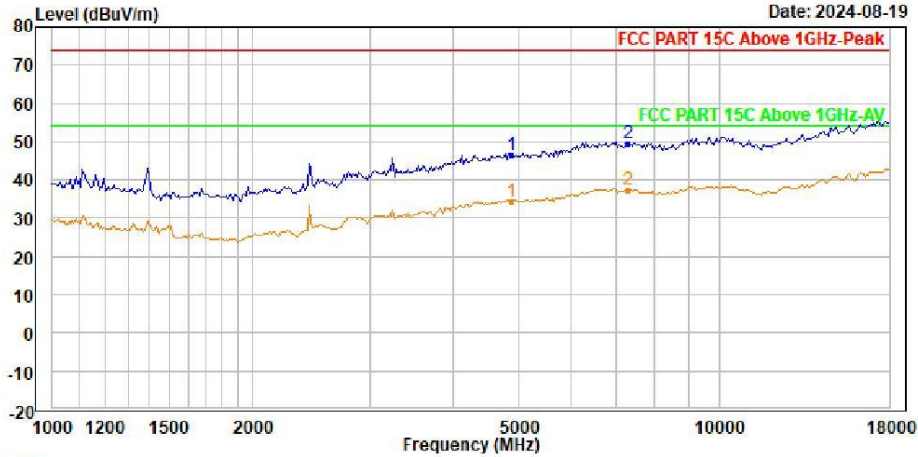

Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	46.47	48.52	34.47	0.00	9.35	45.87	74.00	-27.53	Peak
2 PP	7311.000	49.43	48.12	36.50	0.00	10.37	45.56	74.00	-24.57	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\RSE\2.4G_WIFI\RSE\3_00006.EMI

Date: 2024-08-19

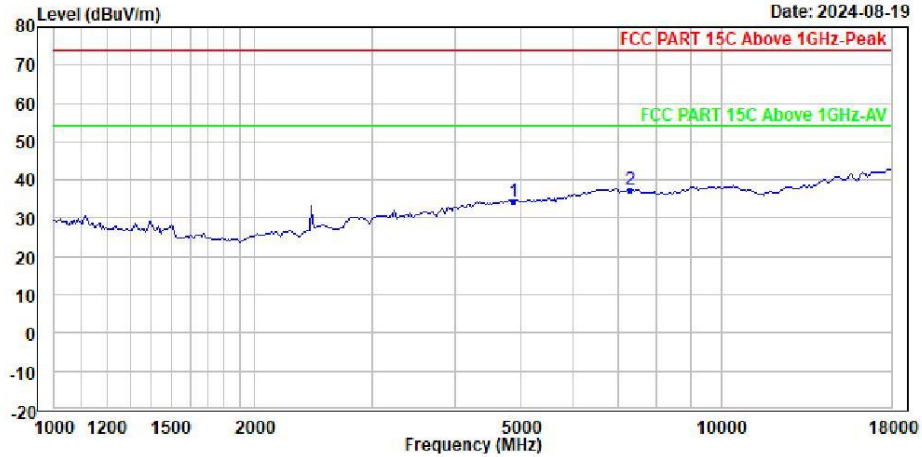

Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_B_2437
 Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.53	36.58	34.47	0.00	9.35	45.87	54.00	-19.47	Average
2	7311.000	37.47	36.16	36.50	0.00	10.37	45.56	54.00	-16.53	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00007.EMI

Date: 2024-08-19

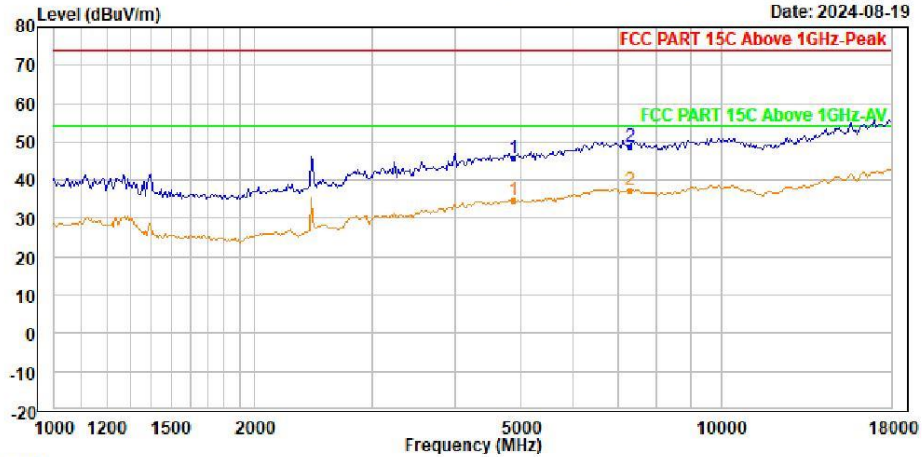

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	45.95	48.00	34.47	0.00	9.35	45.87	74.00	-28.05	Peak
2 PP	7311.000	48.72	47.41	36.50	0.00	10.37	45.56	74.00	-25.28	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RSEle3_00008.EMI

Date: 2024-08-19

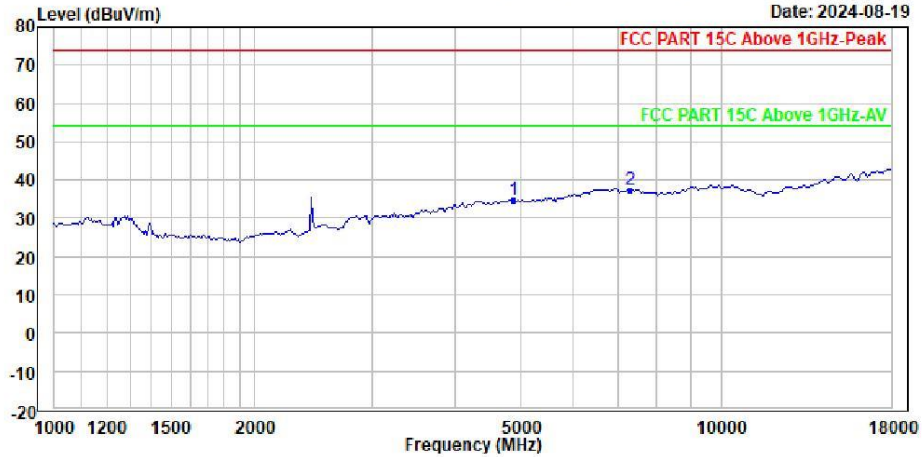

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.70	36.75	34.47	0.00	9.35	45.87	54.00	-19.30	Average
2	PP 7311.000	37.40	36.09	36.50	0.00	10.37	45.56	54.00	-16.60	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISEI3_00009.EMI

Date: 2024-08-19

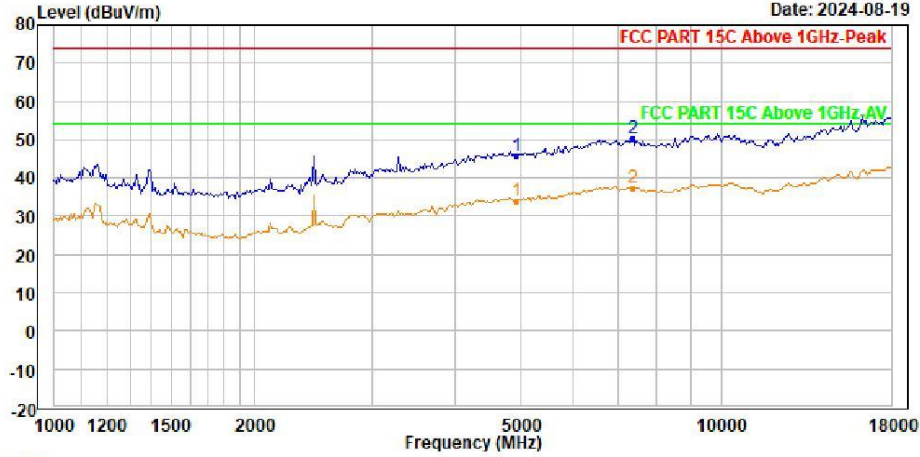

Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	45.83	47.86	34.48	0.00	9.37	45.88	74.00	-28.17	Peak
2 PP	7386.000	50.33	49.02	36.50	0.00	10.39	45.58	74.00	-23.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\RSEIe3_00010.EMI

Date: 2024-08-19

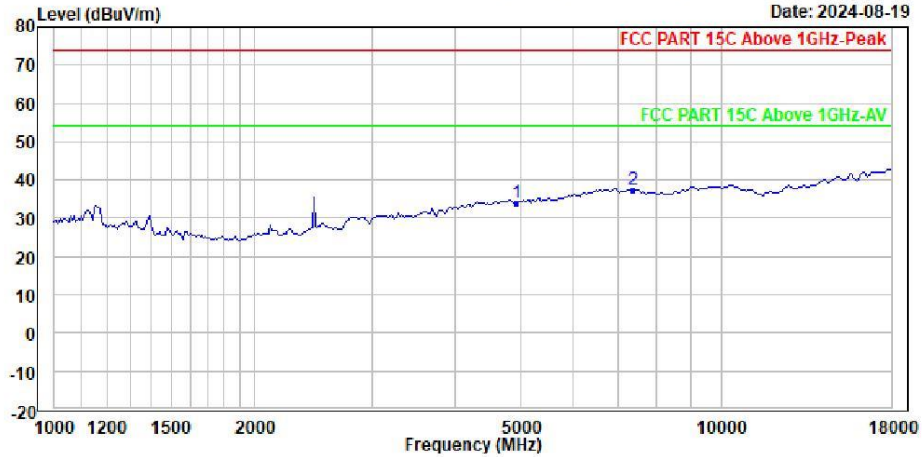

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.11	36.14	34.48	0.00	9.37	45.88	54.00	-19.89	Average
2	7386.000	37.55	36.24	36.50	0.00	10.39	45.58	54.00	-16.45	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00011.EMI

Date: 2024-08-19

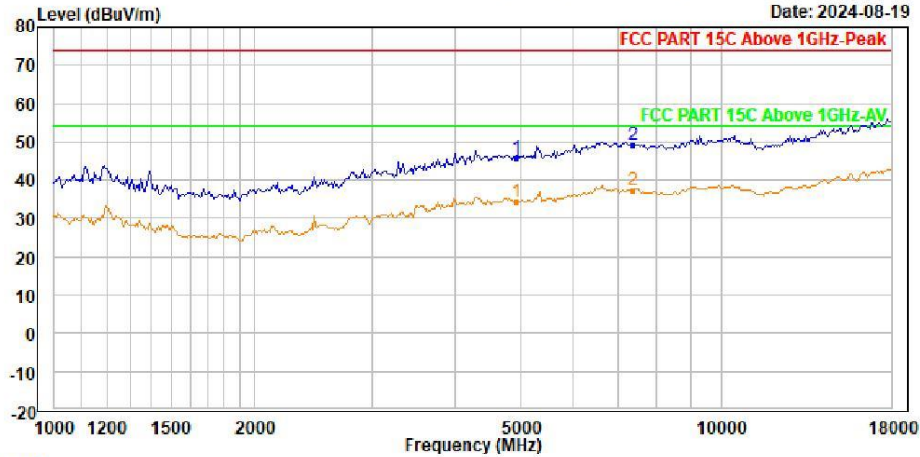

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	45.67	47.70	34.48	0.00	9.37	45.88	74.00	-28.33	Peak
2 PP	7386.000	49.32	48.01	36.50	0.00	10.39	45.58	74.00	-24.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISeI3_00012.EMI

Date: 2024-08-19

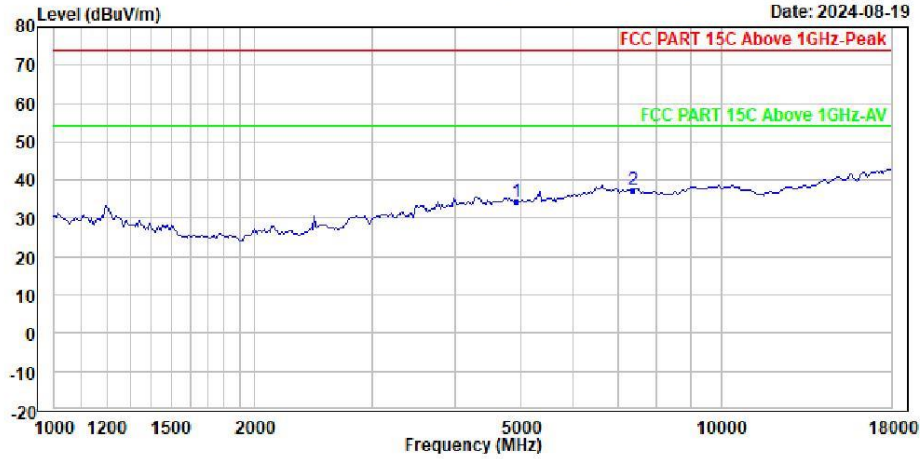


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_B_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.27	36.30	34.48	0.00	9.37	45.88	54.00	-19.73	Average
2	PP 7386.000	37.37	36.06	36.50	0.00	10.39	45.58	54.00	-16.63	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

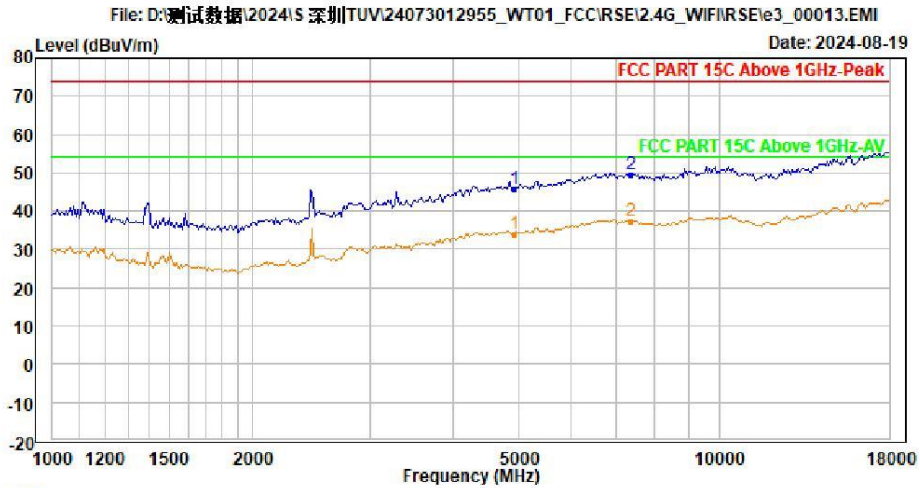

Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_G_2462
 Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	45.60	47.63	34.48	0.00	9.37	45.88	74.00	-28.40	Peak
2 PP	7386.000	49.53	48.22	36.50	0.00	10.39	45.58	74.00	-24.47	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00014.EMI

Date: 2024-08-19

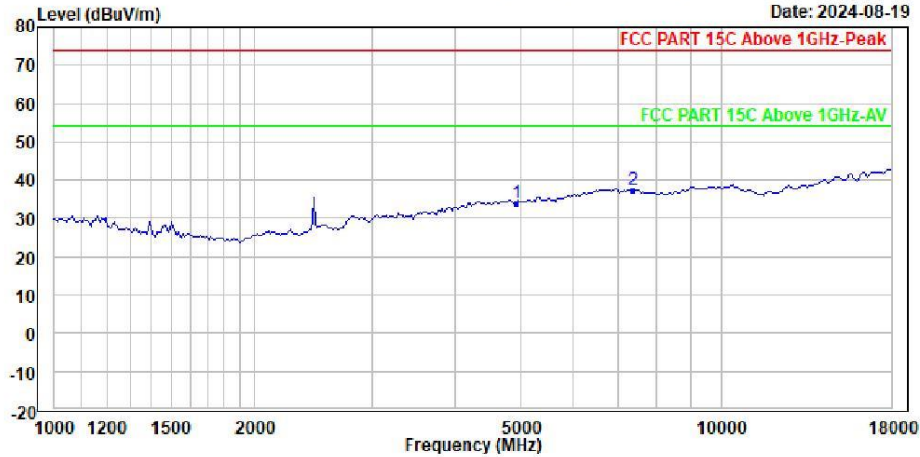

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.16	36.19	34.48	0.00	9.37	45.88	54.00	-19.84	Average
2	7386.000	37.46	36.15	36.50	0.00	10.39	45.58	54.00	-16.54	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00015.EMI

Date: 2024-08-19

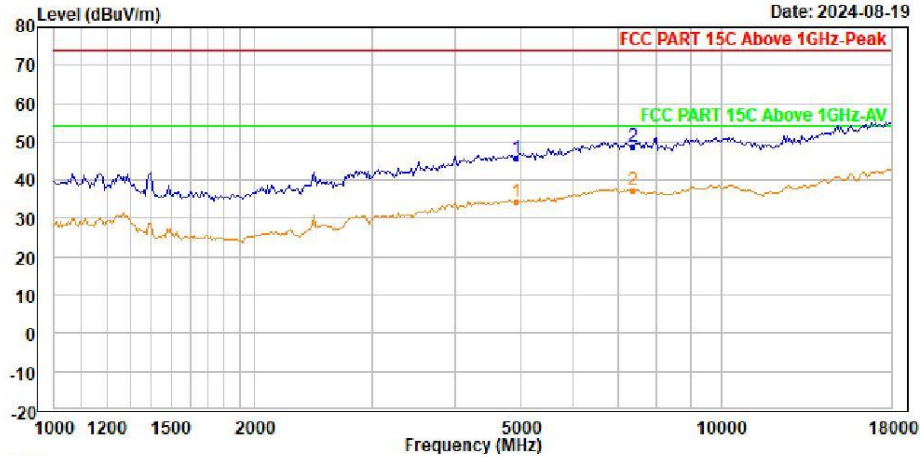


Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	45.85	47.88	34.48	0.00	9.37	45.88	74.00	-28.15	Peak
2 PP	7386.000	48.91	47.60	36.50	0.00	10.39	45.58	74.00	-25.09	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

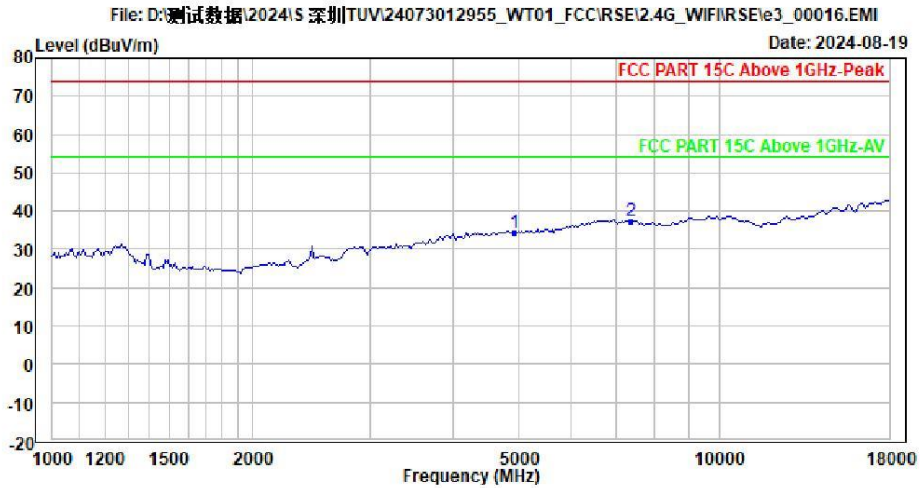

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.49	36.52	34.48	0.00	9.37	45.88	54.00	-19.51	Average
2	PP 7386.000	37.32	36.01	36.50	0.00	10.39	45.58	54.00	-16.68	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00017.EMI

Date: 2024-08-19

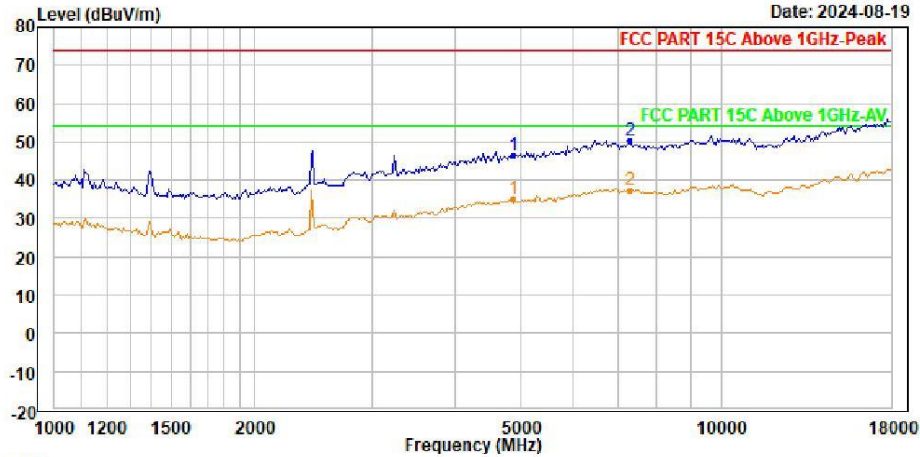


Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	46.39	48.44	34.47	0.00	9.35	45.87	74.00	-27.61	Peak
2 PP	7311.000	50.19	48.88	36.50	0.00	10.37	45.56	74.00	-23.81	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

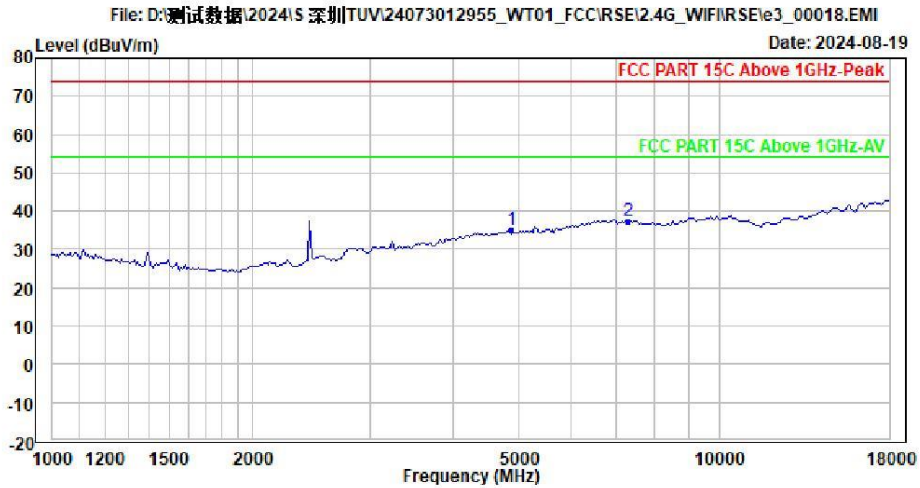

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	35.01	37.06	34.47	0.00	9.35	45.87	54.00	-18.99	Average
2	PP 7311.000	37.47	36.16	36.50	0.00	10.37	45.56	54.00	-16.53	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\ISEI3_00019.EMI

Date: 2024-08-19

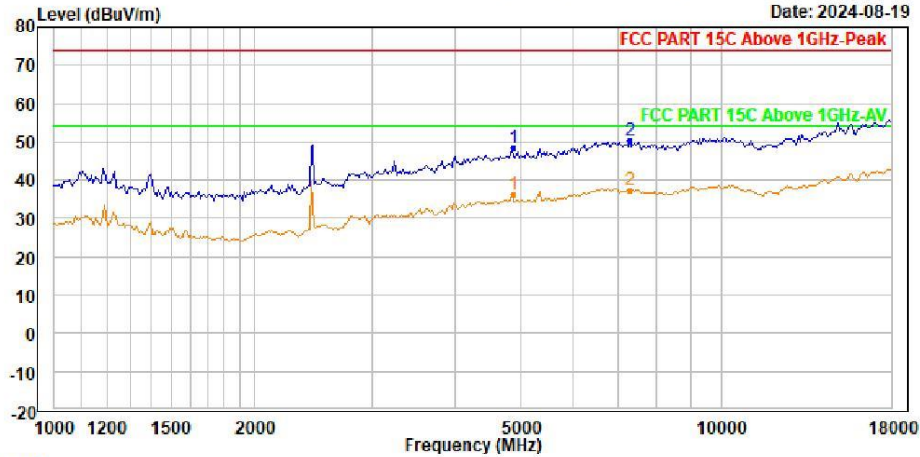

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	48.27	50.32	34.47	0.00	9.35	45.87	74.00	-25.73	Peak
2 PP	7311.000	50.33	49.02	36.50	0.00	10.37	45.56	74.00	-23.67	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RSEI3_00020.EMI

Date: 2024-08-19

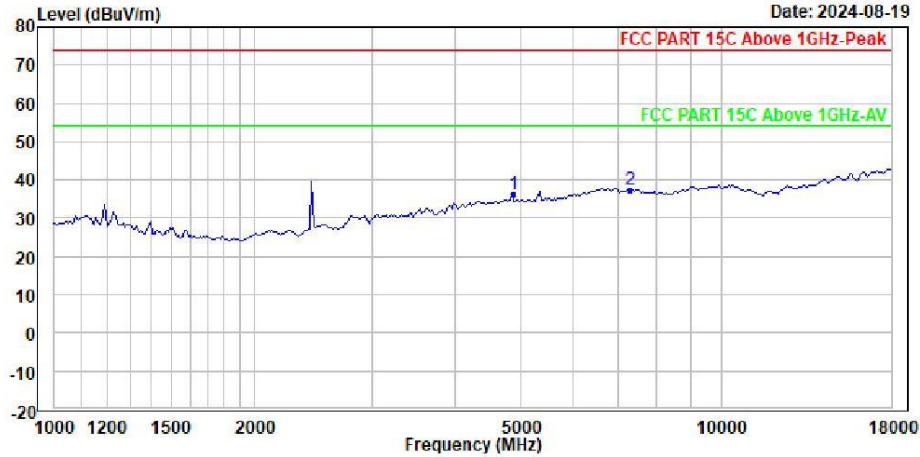

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	36.31	38.36	34.47	0.00	9.35	45.87	54.00	-17.69	Average
2	PP 7311.000	37.45	36.14	36.50	0.00	10.37	45.56	54.00	-16.55	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00021.EMI

Date: 2024-08-19

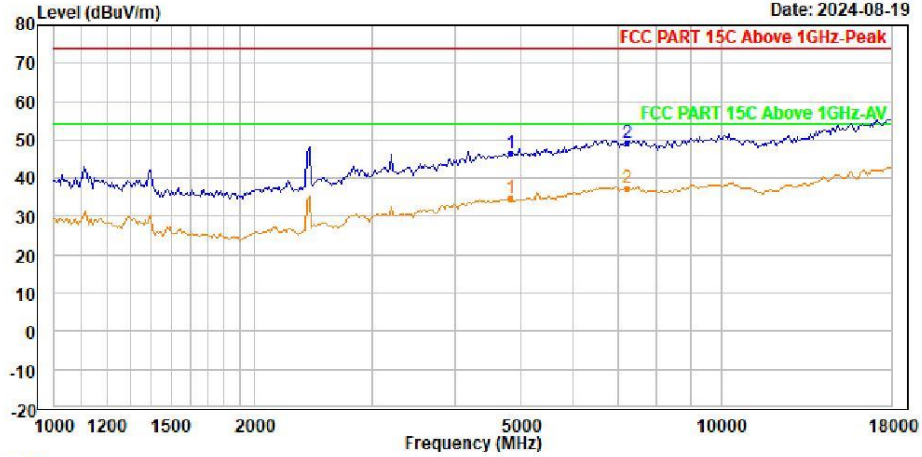


Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	46.43	48.50	34.46	0.00	9.33	45.86	74.00	-27.57	Peak
2 PP	7236.000	49.38	48.08	36.50	0.00	10.35	45.55	74.00	-24.62	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

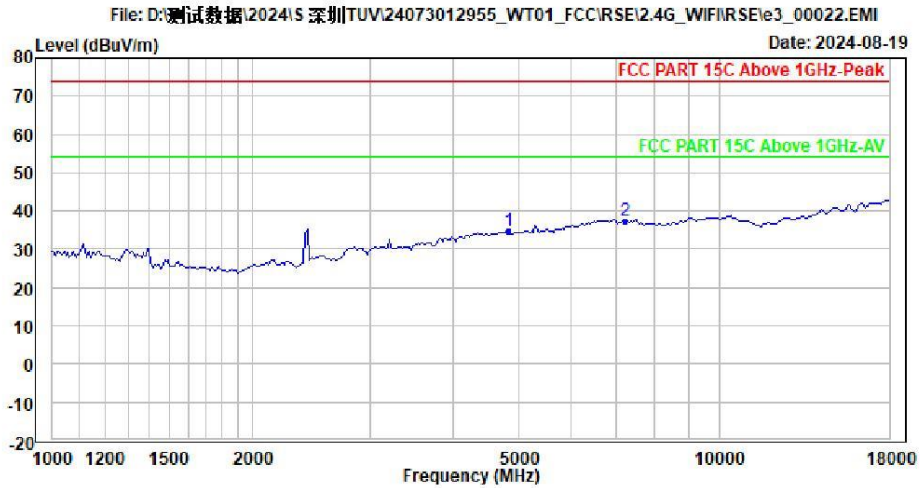


Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	34.83	36.90	34.46	0.00	9.33	45.86	54.00	-19.17	Average
2	PP 7236.000	37.47	36.17	36.50	0.00	10.35	45.55	54.00	-16.53	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

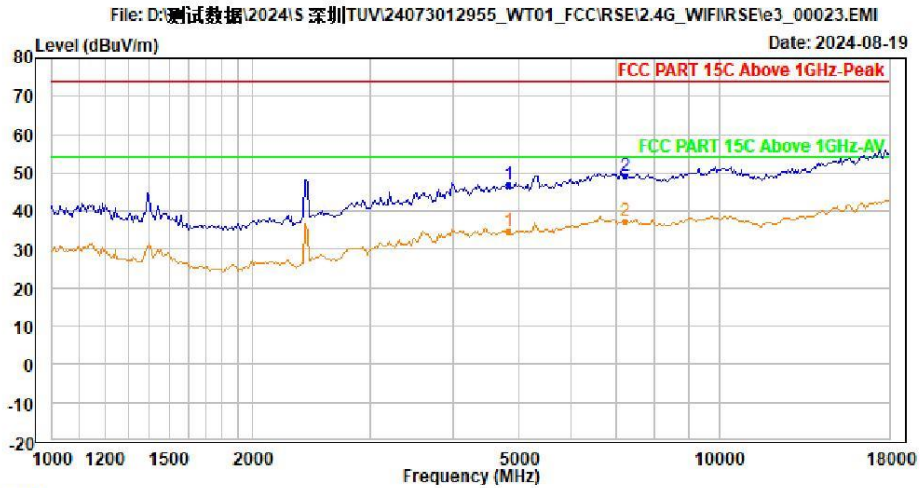

Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_G_2412
 Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	46.79	48.86	34.46	0.00	9.33	45.86	74.00	-27.21	Peak
2 PP	7236.000	49.38	48.08	36.50	0.00	10.35	45.55	74.00	-24.62	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISEI3_00024.EMI

Date: 2024-08-19

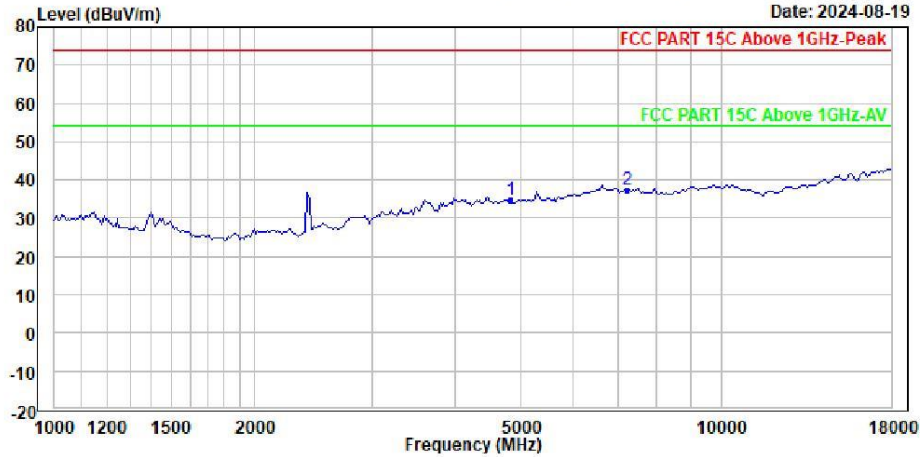


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_G_2412
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	34.77	36.84	34.46	0.00	9.33	45.86	54.00	-19.23	Average
2	7236.000	37.44	36.14	36.50	0.00	10.35	45.55	54.00	-16.56	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

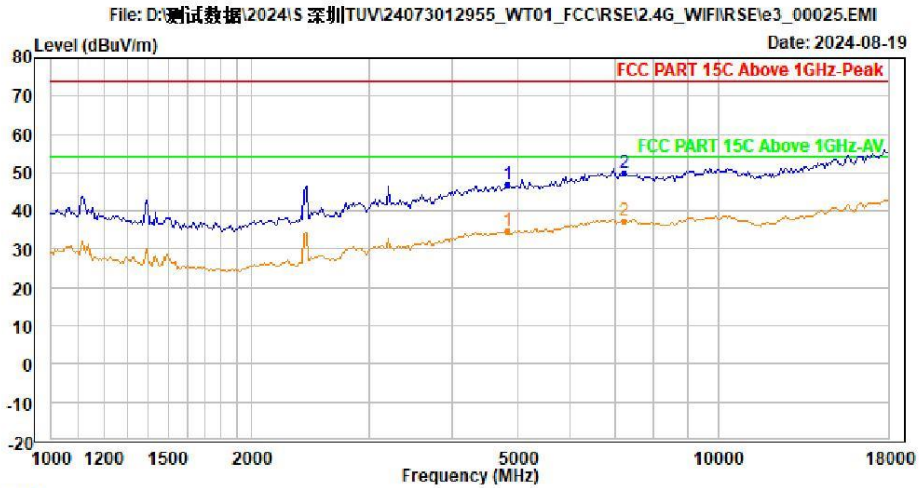


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N20_2412
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	47.02	49.09	34.46	0.00	9.33	45.86	74.00	-26.98	Peak
2 PP	7236.000	49.84	48.54	36.50	0.00	10.35	45.55	74.00	-24.16	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

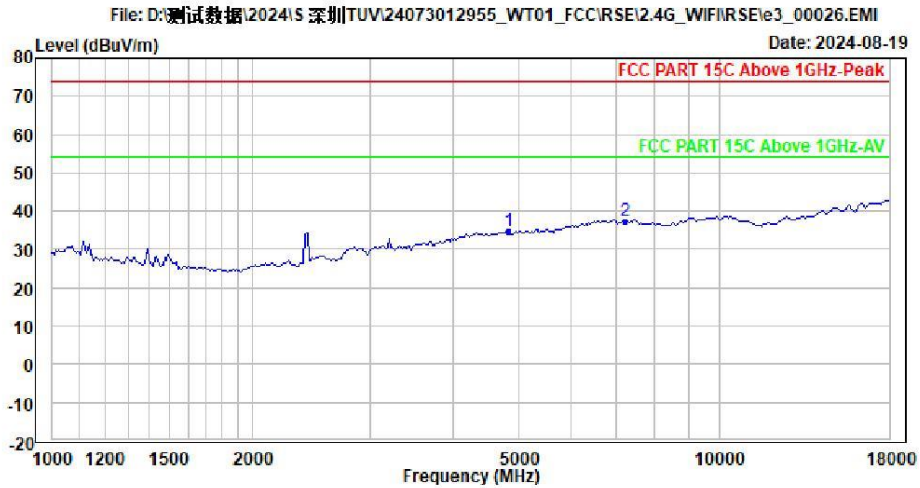

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	34.63	36.70	34.46	0.00	9.33	45.86	54.00	-19.37	Average
2	PP 7236.000	37.44	36.14	36.50	0.00	10.35	45.55	54.00	-16.56	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00027.EMI

Date: 2024-08-19

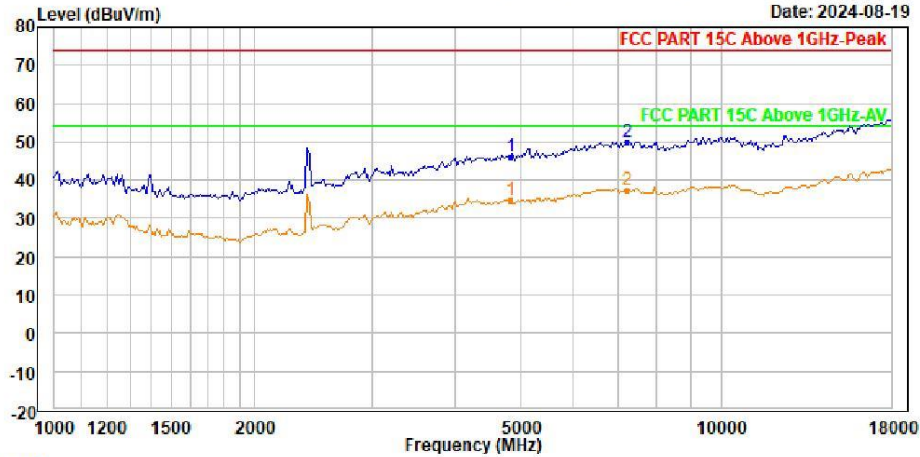

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	46.34	48.41	34.46	0.00	9.33	45.86	74.00	-27.66	Peak
2 PP	7236.000	49.84	48.54	36.50	0.00	10.35	45.55	74.00	-24.16	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\5 深圳TUV\24073012955_WT01_FCC\RSE\2.4G_WIFI\RSE\3_00028.EMI

Date: 2024-08-19

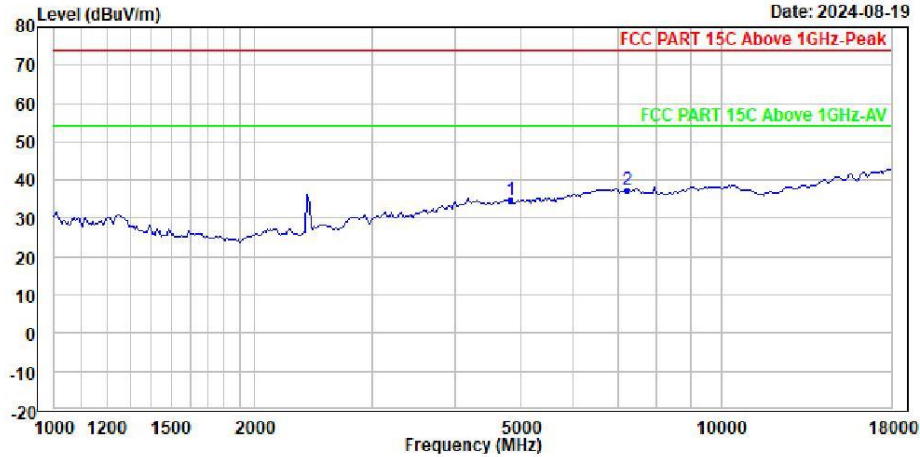

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2412
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4824.000	34.79	36.86	34.46	0.00	9.33	45.86	54.00	-19.21	Average
2	7236.000	37.44	36.14	36.50	0.00	10.35	45.55	54.00	-16.56	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\5 深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEIe3_00029.EMI

Date: 2024-08-19

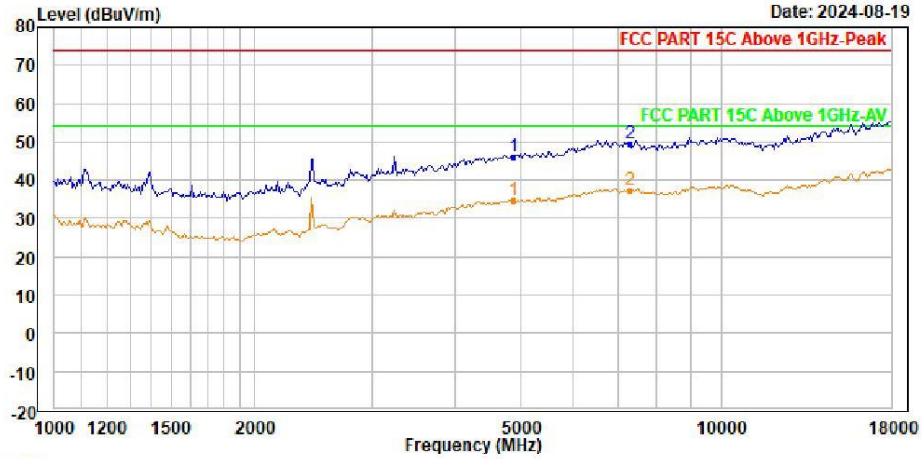


Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2437
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	45.98	48.03	34.47	0.00	9.35	45.87	74.00	-28.02	Peak
2 PP	7311.000	49.48	48.17	36.50	0.00	10.37	45.56	74.00	-24.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

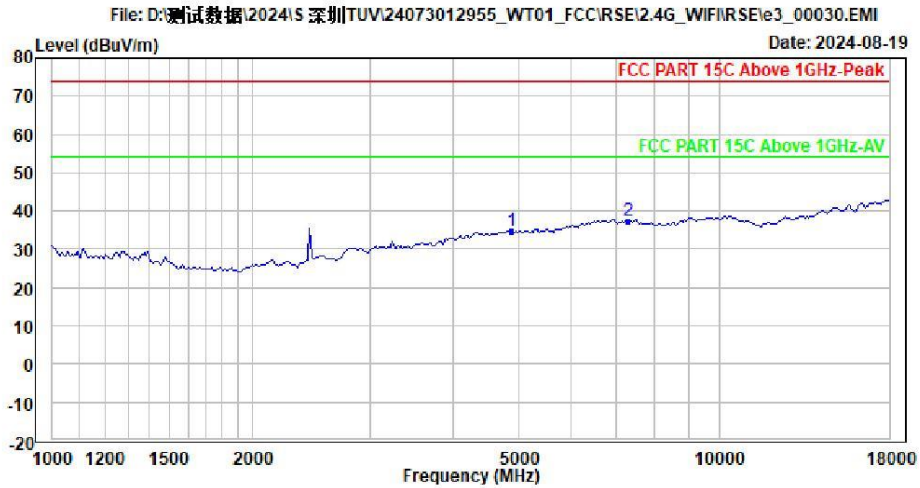

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.64	36.69	34.47	0.00	9.35	45.87	54.00	-19.36	Average
2	PP 7311.000	37.38	36.07	36.50	0.00	10.37	45.56	54.00	-16.62	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00031.EMI

Date: 2024-08-19

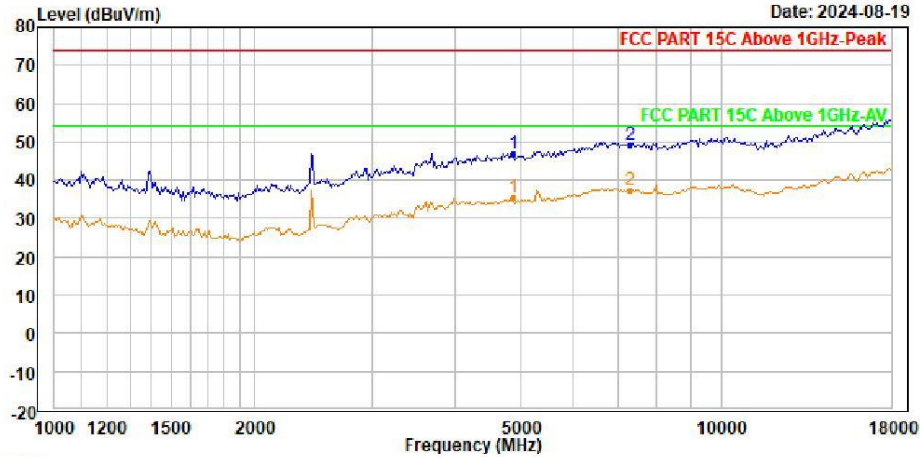

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	46.98	49.03	34.47	0.00	9.35	45.87	74.00	-27.02	Peak
2 PP	7311.000	49.19	47.88	36.50	0.00	10.37	45.56	74.00	-24.81	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\ISEI3_00032.EMI

Date: 2024-08-19

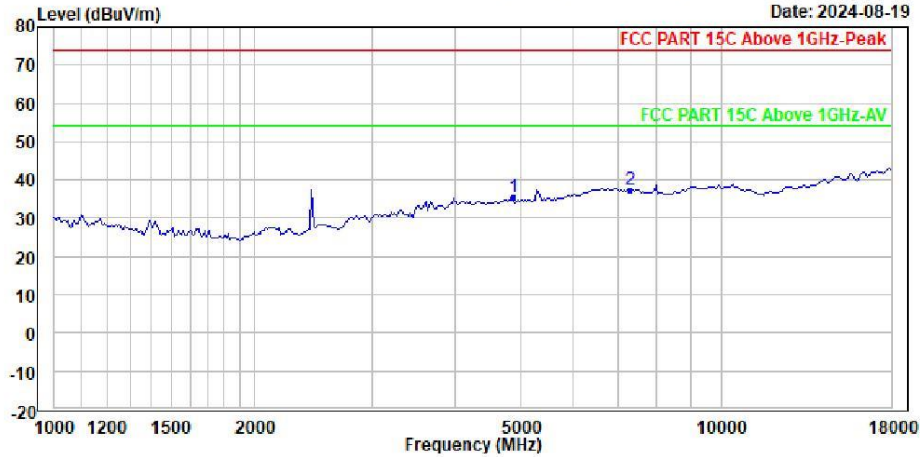

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	35.39	37.44	34.47	0.00	9.35	45.87	54.00	-18.61	Average
2	PP 7311.000	37.52	36.21	36.50	0.00	10.37	45.56	54.00	-16.48	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISEI3_00033.EMI

Date: 2024-08-19

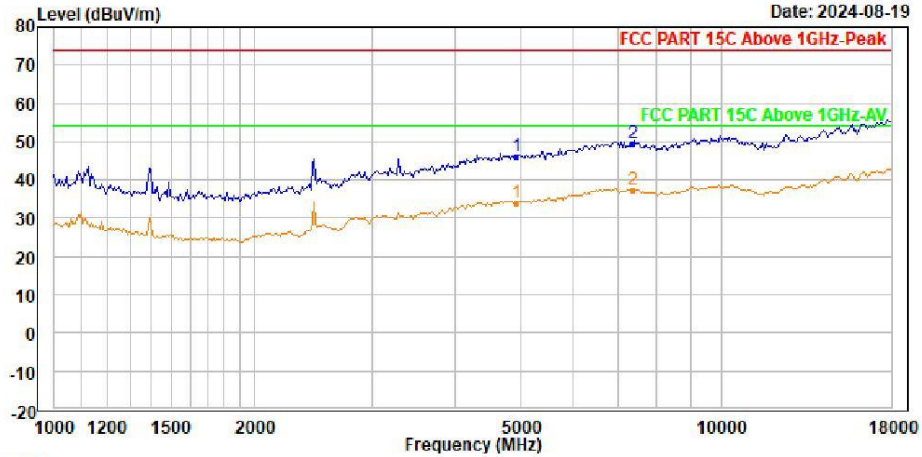

Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2462
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	46.05	48.08	34.48	0.00	9.37	45.88	74.00	-27.95	Peak
2 PP	7386.000	49.58	48.27	36.50	0.00	10.39	45.58	74.00	-24.42	Peak