




Shenzhen UnionTrust Quality and Technology Co., Ltd.

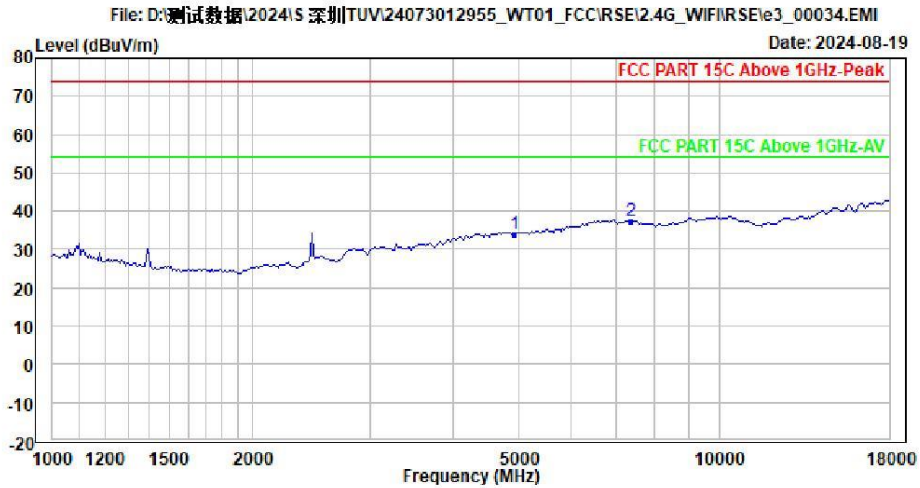

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.02	36.05	34.48	0.00	9.37	45.88	54.00	-19.98	Average
2	PP 7386.000	37.23	35.92	36.50	0.00	10.39	45.58	54.00	-16.77	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\ISEI3_00035.EMI

Date: 2024-08-19

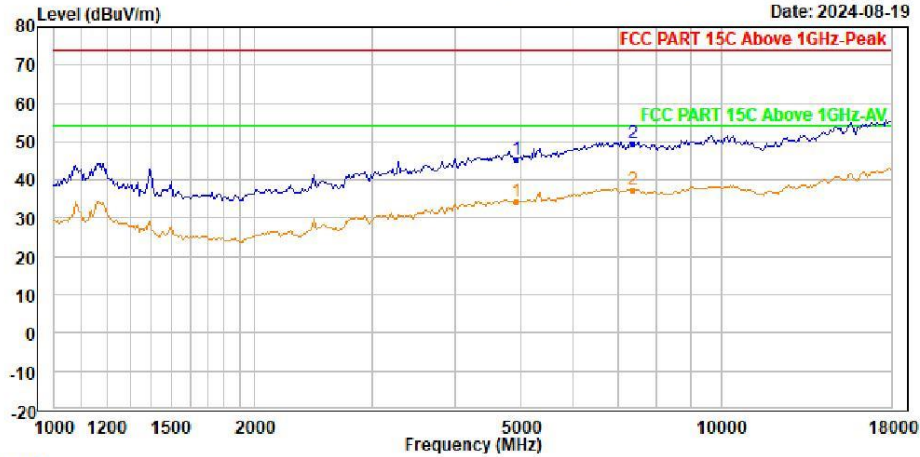

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	45.59	47.62	34.48	0.00	9.37	45.88	74.00	-28.41	Peak
2 PP	7386.000	49.57	48.26	36.50	0.00	10.39	45.58	74.00	-24.43	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00036.EMI

Date: 2024-08-19

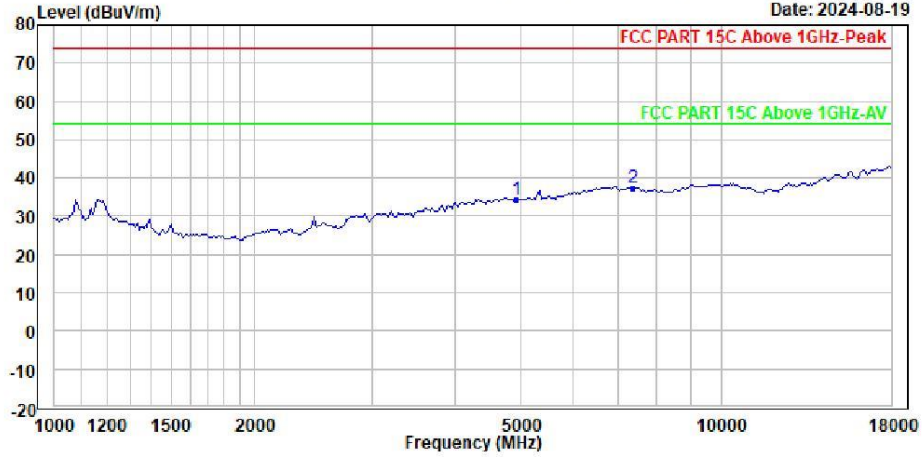

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N20_2462
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4924.000	34.25	36.28	34.48	0.00	9.37	45.88	54.00	-19.75	Average
2	PP 7386.000	37.25	35.94	36.50	0.00	10.39	45.58	54.00	-16.75	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISEI3_00037.EMI

Date: 2024-08-19

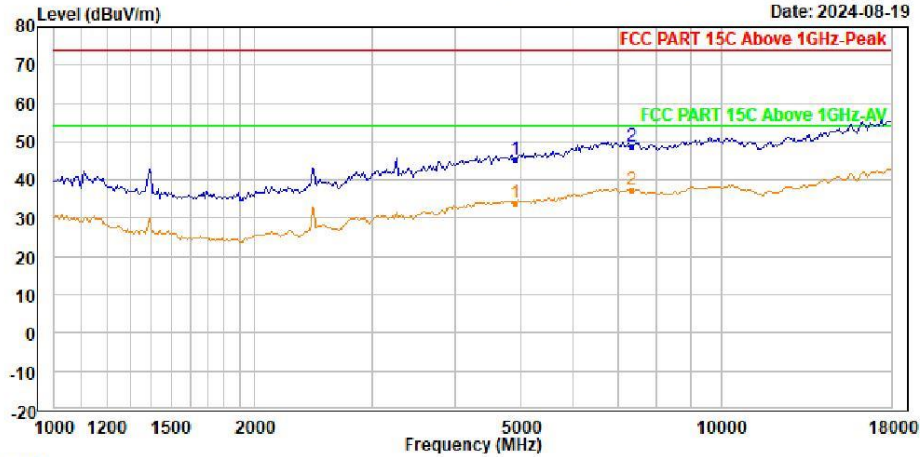

Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2452
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	45.41	47.45	34.48	0.00	9.36	45.88	74.00	-28.59	Peak
2 PP	7356.000	48.83	47.52	36.50	0.00	10.38	45.57	74.00	-25.17	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISEI3_00038.EMI

Date: 2024-08-19

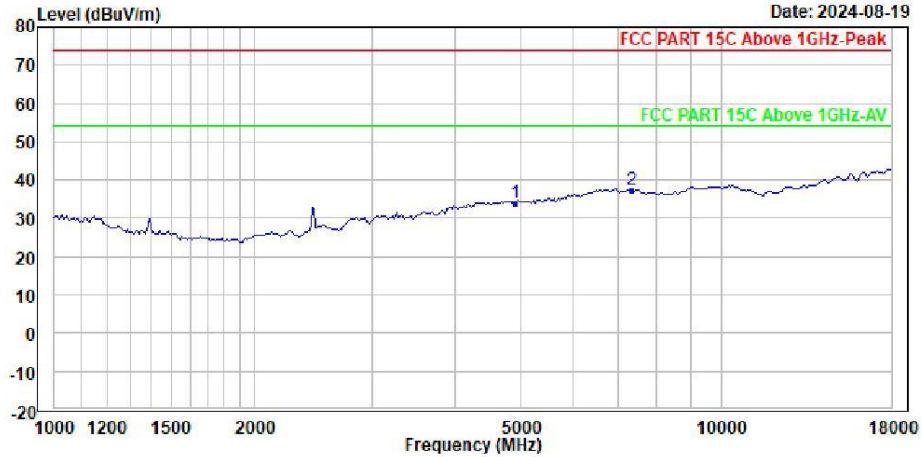

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2452
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	34.00	36.04	34.48	0.00	9.36	45.88	54.00	-20.00	Average
2	PP 7356.000	37.28	35.97	36.50	0.00	10.38	45.57	54.00	-16.72	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00039.EMI

Date: 2024-08-19

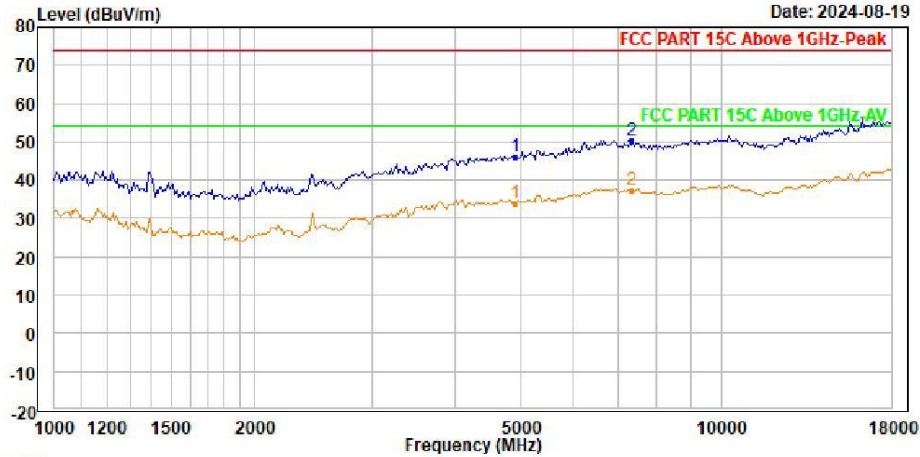


Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2452
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	46.25	48.29	34.48	0.00	9.36	45.88	74.00	-27.75	Peak
2 PP	7356.000	50.37	49.06	36.50	0.00	10.38	45.57	74.00	-23.63	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

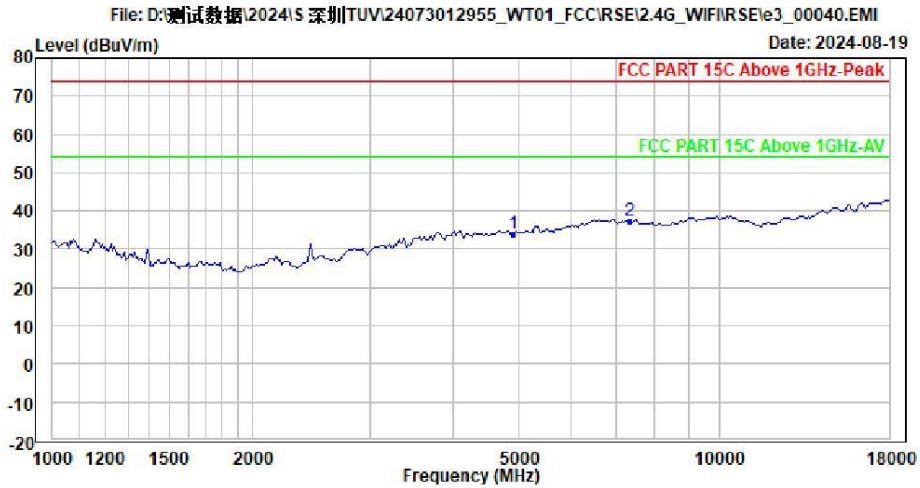

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2452
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4904.000	34.00	36.04	34.48	0.00	9.36	45.88	54.00	-20.00	Average
2	PP 7356.000	37.28	35.97	36.50	0.00	10.38	45.57	54.00	-16.72	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RISEI3_00041.EMI

Date: 2024-08-19

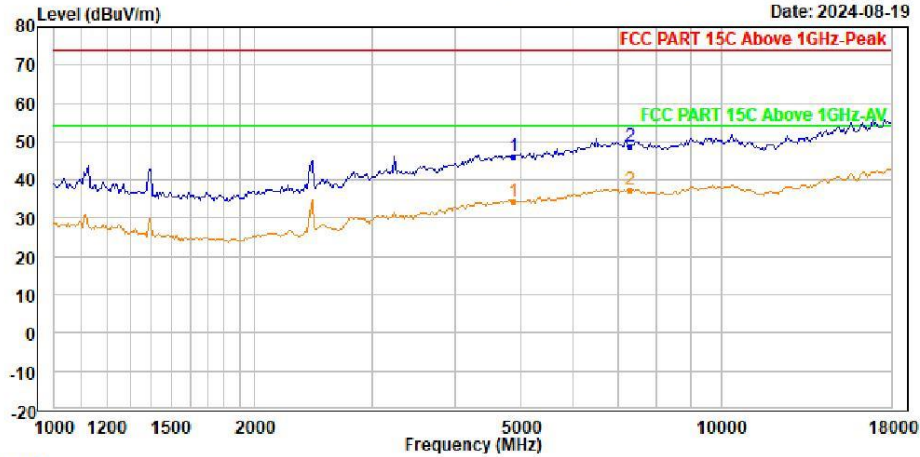

Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	46.19	48.24	34.47	0.00	9.35	45.87	74.00	-27.81	Peak
2 PP	7311.000	48.77	47.46	36.50	0.00	10.37	45.56	74.00	-25.23	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\5 深圳TUV\24073012955_WT01_FCC\RSE\2.4G_WIFI\RSE\3_00042.EMI

Date: 2024-08-19

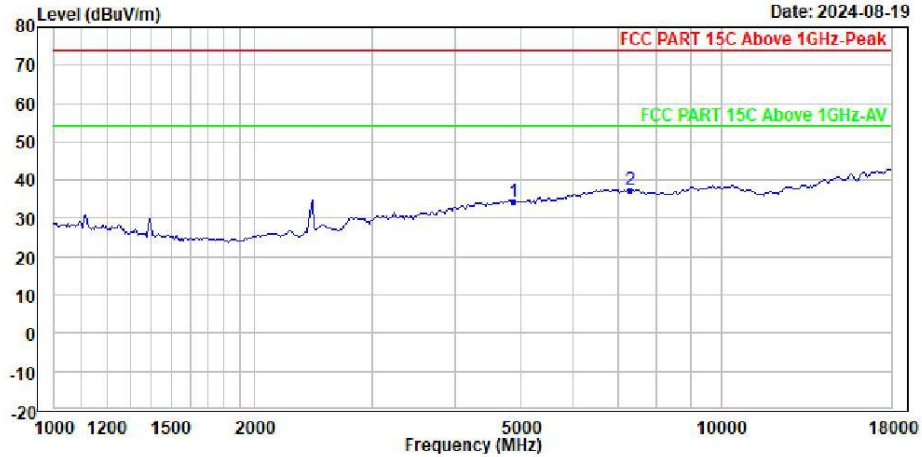

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.47	36.52	34.47	0.00	9.35	45.87	54.00	-19.53	Average
2	7311.000	37.29	35.98	36.50	0.00	10.37	45.56	54.00	-16.71	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEIe3_00043.EMI

Date: 2024-08-19

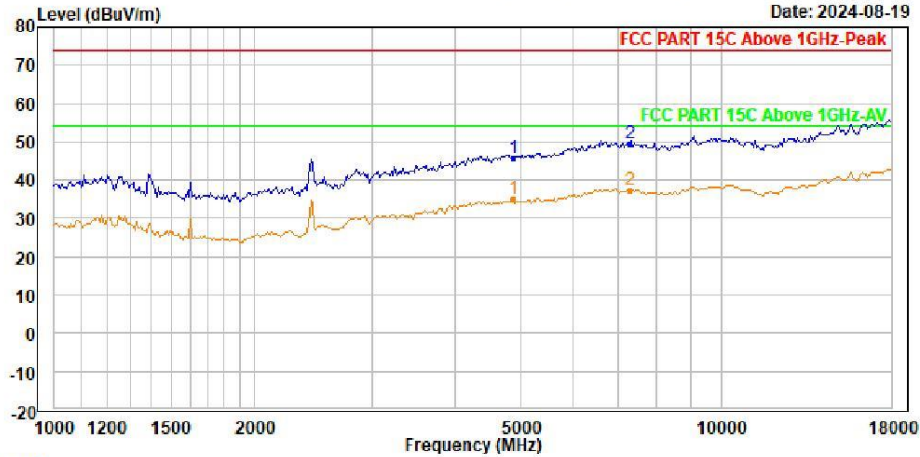

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	45.97	48.02	34.47	0.00	9.35	45.87	74.00	-28.03	Peak
2 PP	7311.000	49.41	48.10	36.50	0.00	10.37	45.56	74.00	-24.59	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\ISEI3_00044.EMI

Date: 2024-08-19

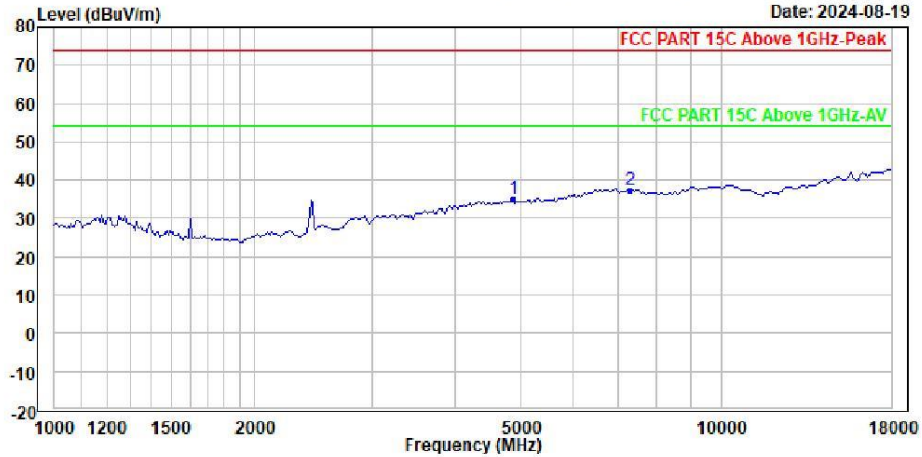

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2437
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4874.000	34.99	37.04	34.47	0.00	9.35	45.87	54.00	-19.01	Average
2	PP 7311.000	37.38	36.07	36.50	0.00	10.37	45.56	54.00	-16.62	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\5 深圳TUV\24073012955_WT01_FCCIRSEI2.4G_WIFIIRSEI3_00045.EMI

Date: 2024-08-19

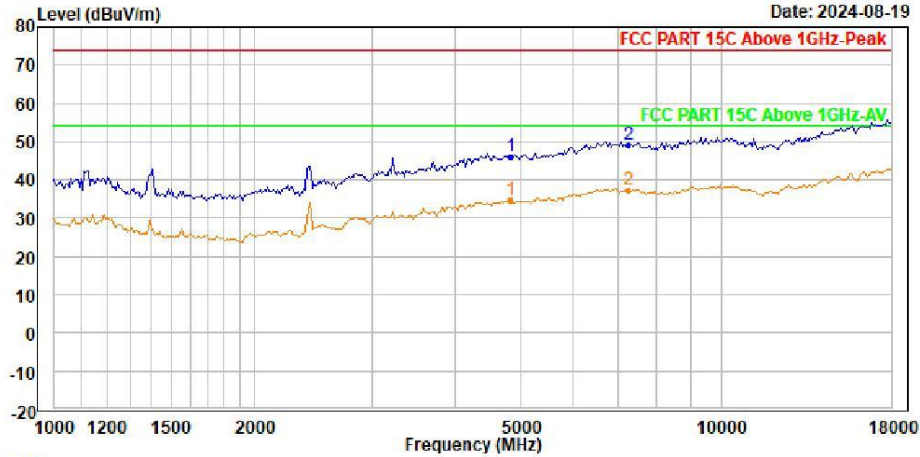

Trace: 1

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2422
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	46.15	48.21	34.47	0.00	9.34	45.87	74.00	-27.85	Peak
2 PP	7266.000	49.05	47.74	36.50	0.00	10.36	45.55	74.00	-24.95	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\5 深圳TUV\24073012955_WT01_FCC\IRSE\2.4G_WIFI\IRSE\3_00046.EMI

Date: 2024-08-19

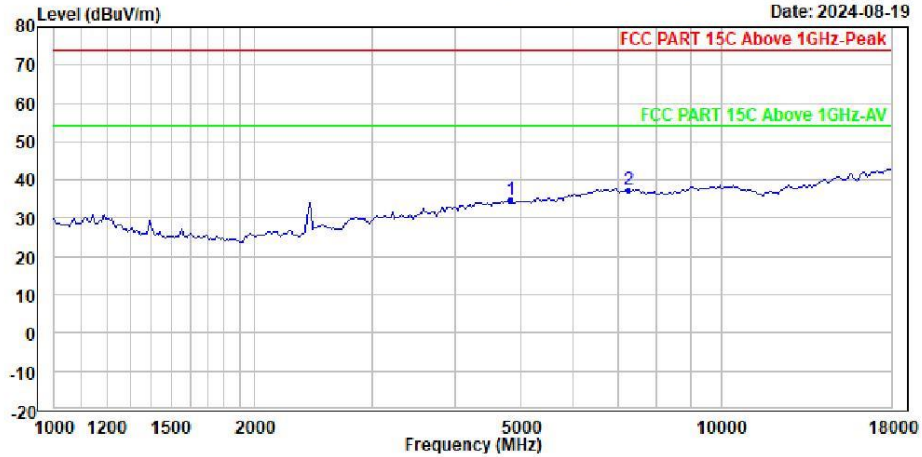

Condition : 3m Horizontal
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2422
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.60	36.66	34.47	0.00	9.34	45.87	54.00	-19.40	Average
2	7266.000	37.40	36.09	36.50	0.00	10.36	45.55	54.00	-16.60	Average



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\ISEI2.4G_WIFI\RSEle3_00047.EMI

Date: 2024-08-19

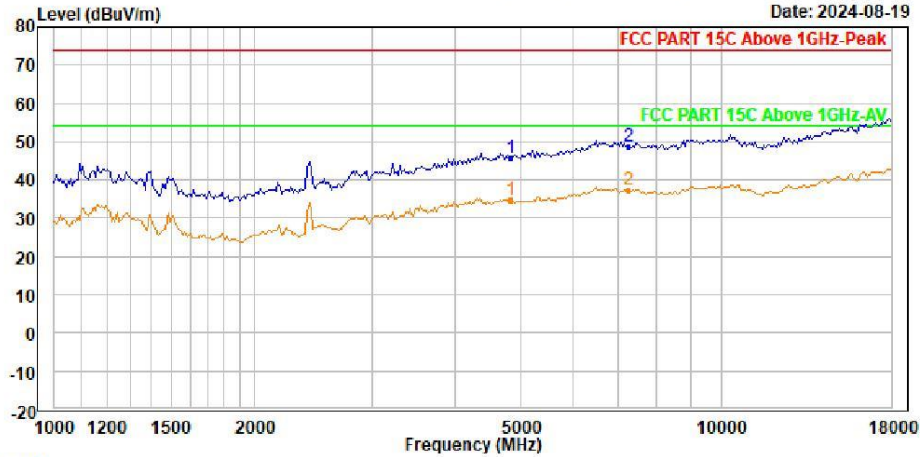

Trace: 1

Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2422
Remark :


	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	45.80	47.86	34.47	0.00	9.34	45.87	74.00	-28.20	Peak
2 PP	7266.000	48.86	47.55	36.50	0.00	10.36	45.55	74.00	-25.14	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\深圳TUV\24073012955_WT01_FCC\IRSEI2.4G_WIFI\IRSEI3_00048.EMI

Date: 2024-08-19

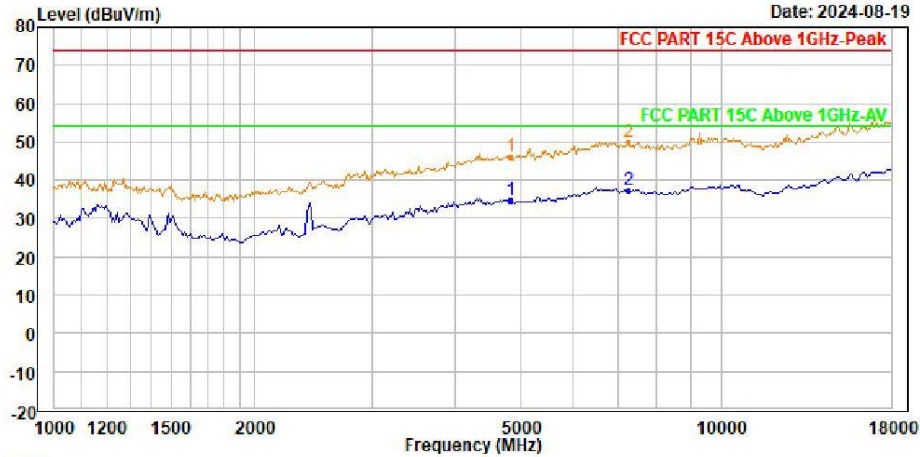

Trace: 1


Condition : 3m Vertical
Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
Press : 99.9kpa
Product : Typhur Sync One Wireless Thermometer
Model No. : WT01
Power Rating : AC 120V/60Hz
Test Engineer : Fire
Test Mode : 2.4G_N40_2422
Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	4844.000	34.88	36.94	34.47	0.00	9.34	45.87	54.00	-19.12	Average
2	7266.000	37.31	36.00	36.50	0.00	10.36	45.55	54.00	-16.69	Average

Appendix A.4: Test Results of Radiated Emissions in Restricted Bands, 2.4GHz Wi-Fi



Shenzhen UnionTrust Quality and Technology Co., Ltd.

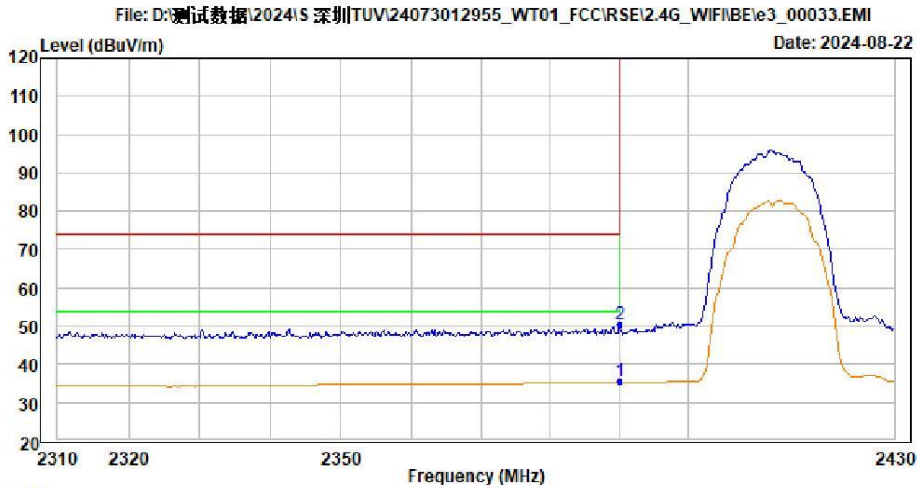


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%) : 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_B_2412
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	35.45	33.95	31.55	10.00	7.35	47.40	54.00	-18.55	Average
2	PK 2390.000	50.34	48.84	31.55	10.00	7.35	47.40	74.00	-23.66	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

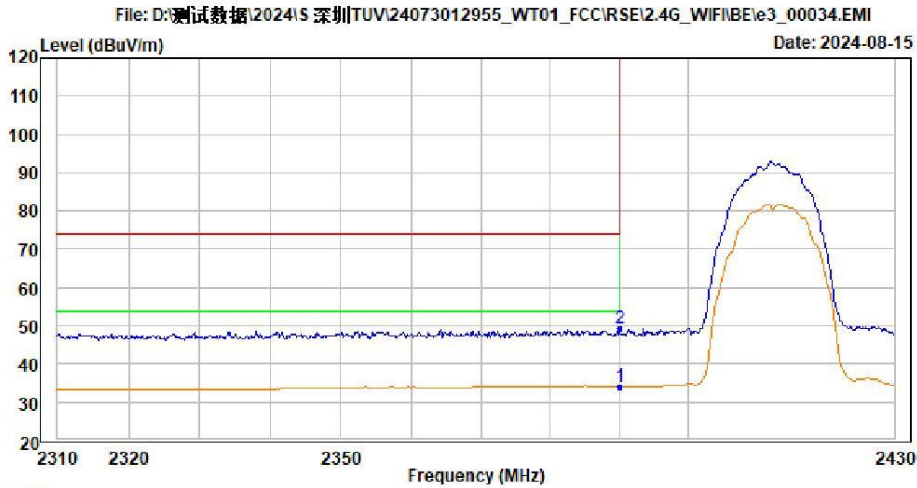


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_B_2412
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	34.20	32.70	31.55	10.00	7.35	47.40	54.00	-19.80	Average
2	PK 2390.000	49.29	47.79	31.55	10.00	7.35	47.40	74.00	-24.71	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

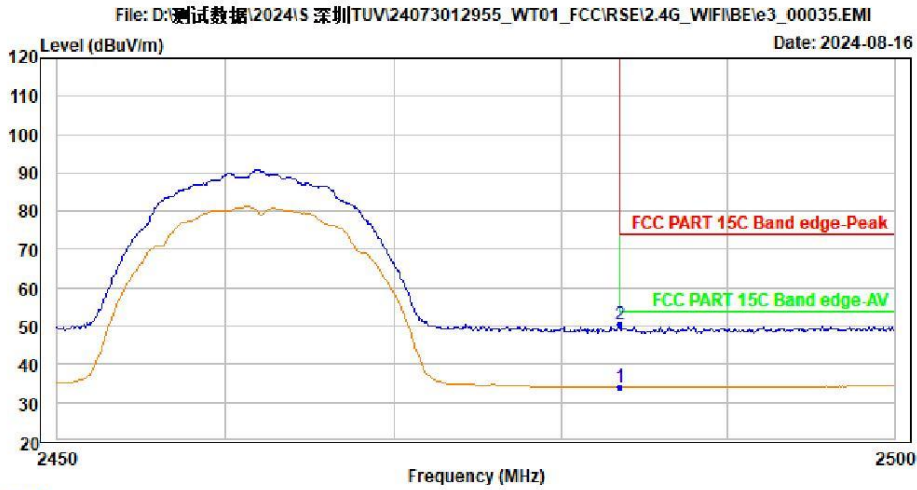


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_B_2462
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.04	32.29	31.68	10.00	7.47	47.40	54.00	-19.96	Average
2	PK 2483.500	50.48	48.73	31.68	10.00	7.47	47.40	74.00	-23.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

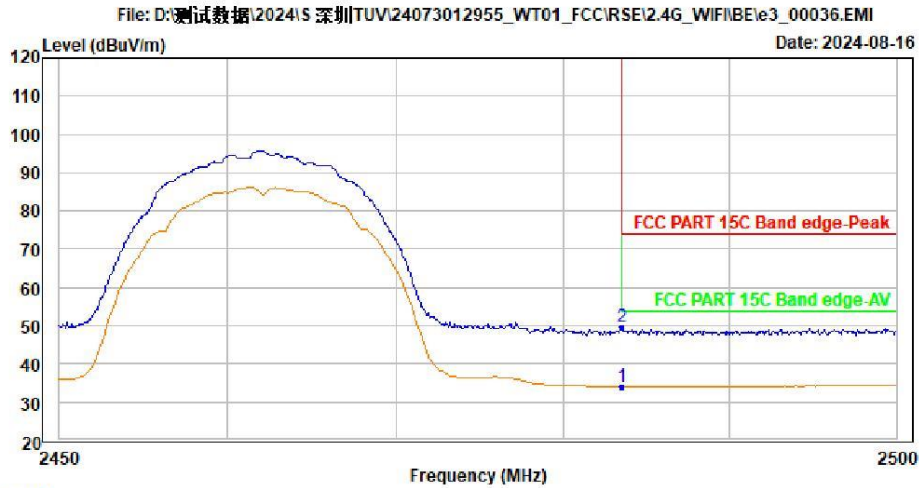


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_B_2462
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.17	32.42	31.68	10.00	7.47	47.40	54.00	-19.83	Average
2	PK 2483.500	49.52	47.77	31.68	10.00	7.47	47.40	74.00	-24.48	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

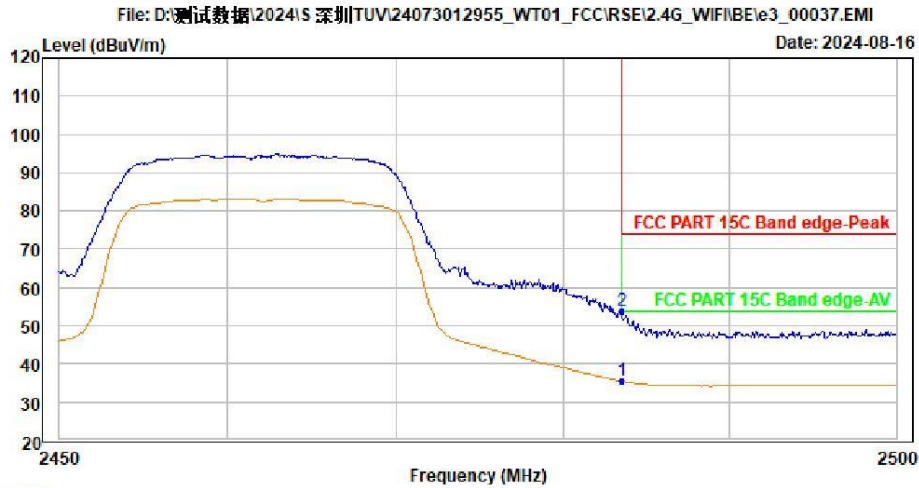


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_G_2462
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	35.53	33.78	31.68	10.00	7.47	47.40	54.00	-18.47	Average
2	PK 2483.500	53.73	51.98	31.68	10.00	7.47	47.40	74.00	-20.27	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

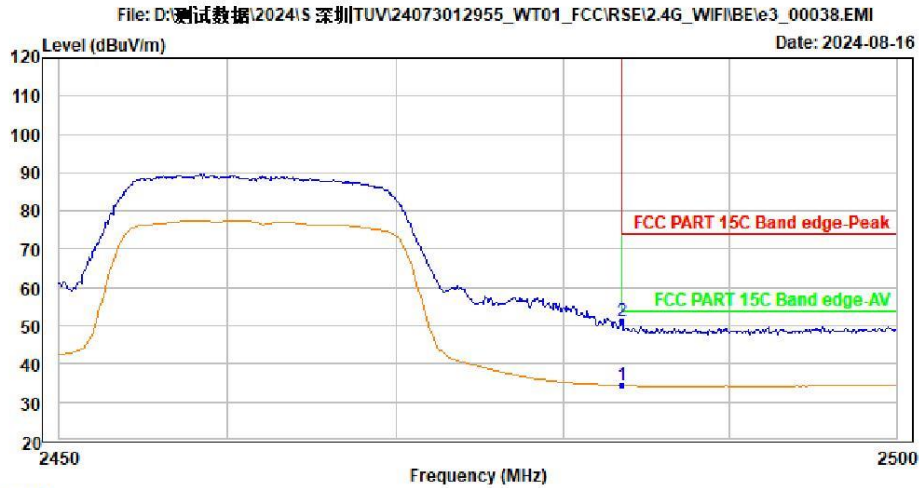


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_G_2462
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.36	32.61	31.68	10.00	7.47	47.40	54.00	-19.64	Average
2	PK 2483.500	51.32	49.57	31.68	10.00	7.47	47.40	74.00	-22.68	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

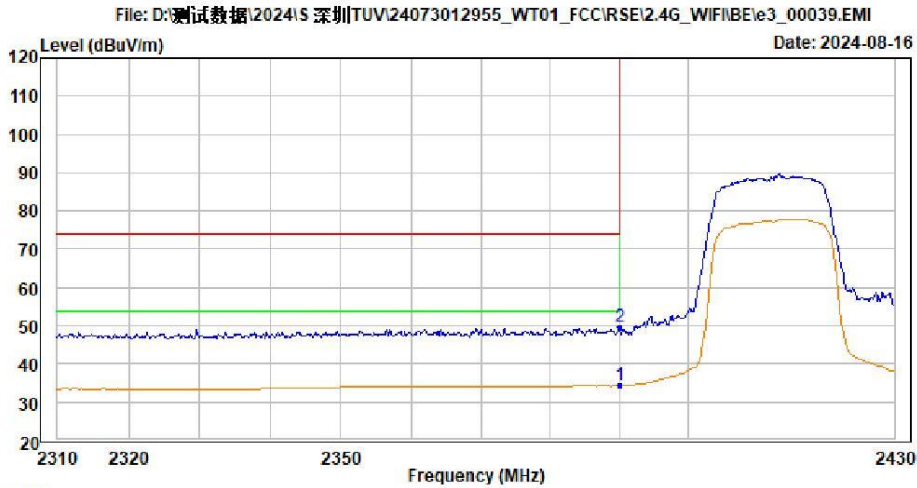


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_G_2412
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	34.34	32.84	31.55	10.00	7.35	47.40	54.00	-19.66	Average
2	PK 2390.000	49.68	48.18	31.55	10.00	7.35	47.40	74.00	-24.32	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

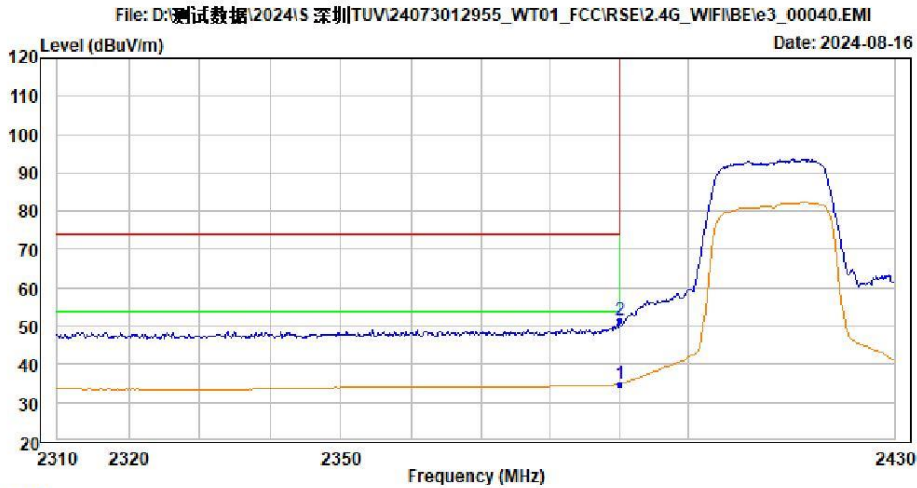


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_G_2412
 Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2390.000	35.02	33.52	31.55	10.00	7.35	47.40	54.00	-18.98	Average
2 PK 2390.000	51.48	49.98	31.55	10.00	7.35	47.40	74.00	-22.52	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

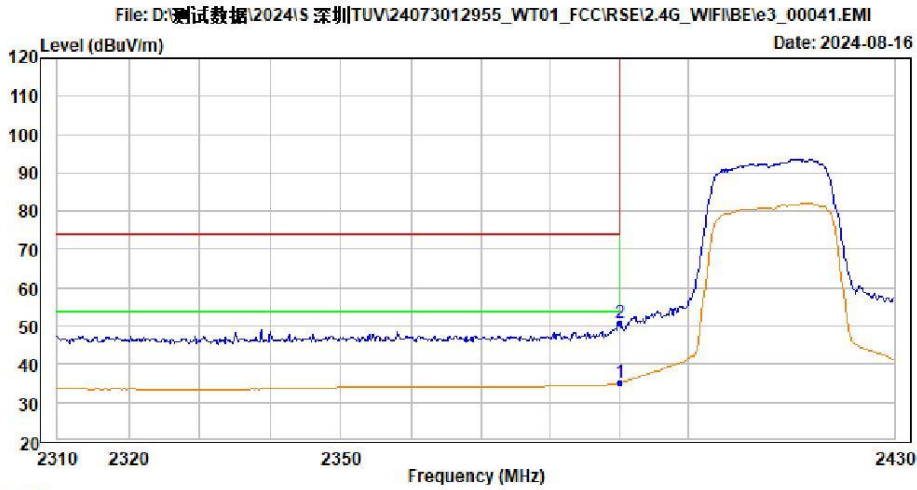


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N20_2412
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	35.17	33.67	31.55	10.00	7.35	47.40	54.00	-18.83	Average
2	PK 2390.000	50.96	49.46	31.55	10.00	7.35	47.40	74.00	-23.04	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

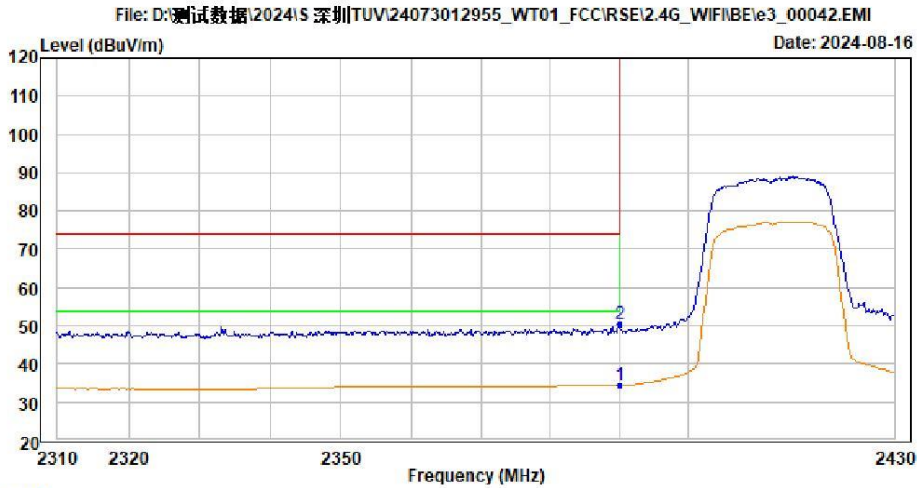


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N20_2412
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	34.41	32.91	31.55	10.00	7.35	47.40	54.00	-19.59	Average
2	PK 2390.000	50.35	48.85	31.55	10.00	7.35	47.40	74.00	-23.65	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

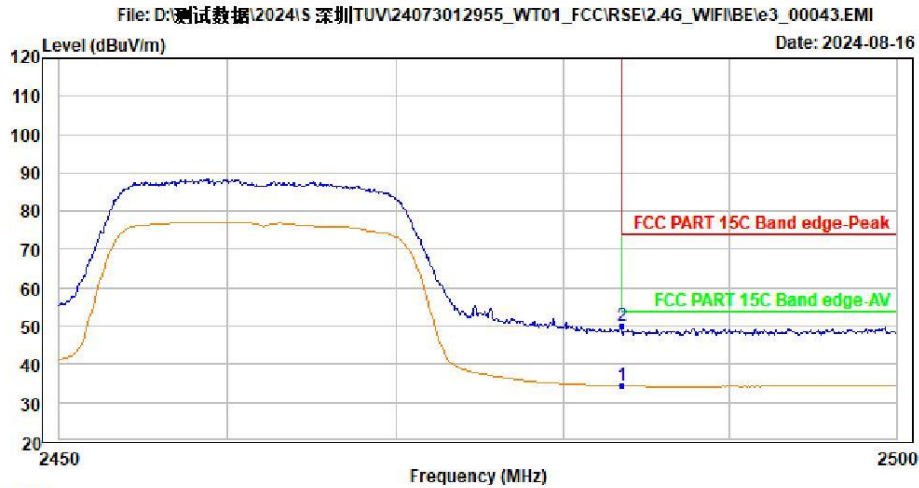


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N20_2462
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.40	32.65	31.68	10.00	7.47	47.40	54.00	-19.60	Average
2	PK 2483.500	49.91	48.16	31.68	10.00	7.47	47.40	74.00	-24.09	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

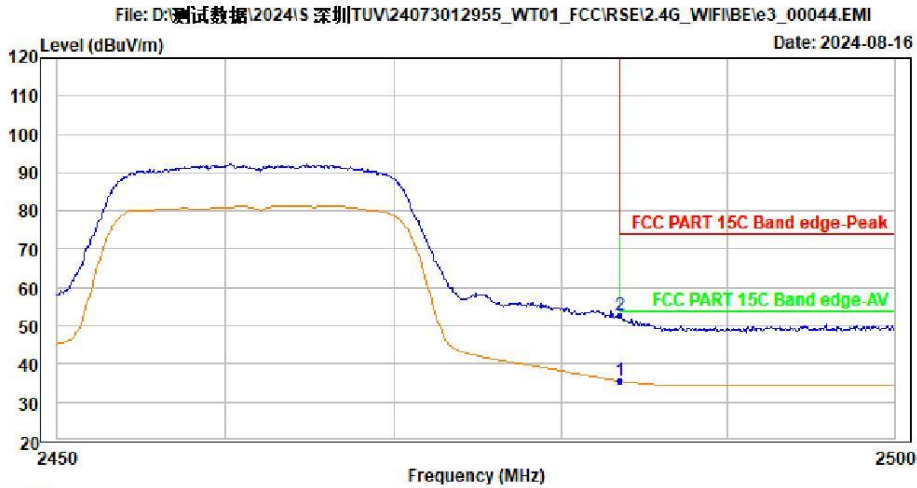


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N20_2462
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	35.57	33.82	31.68	10.00	7.47	47.40	54.00	-18.43	Average
2	PK 2483.500	52.69	50.94	31.68	10.00	7.47	47.40	74.00	-21.31	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

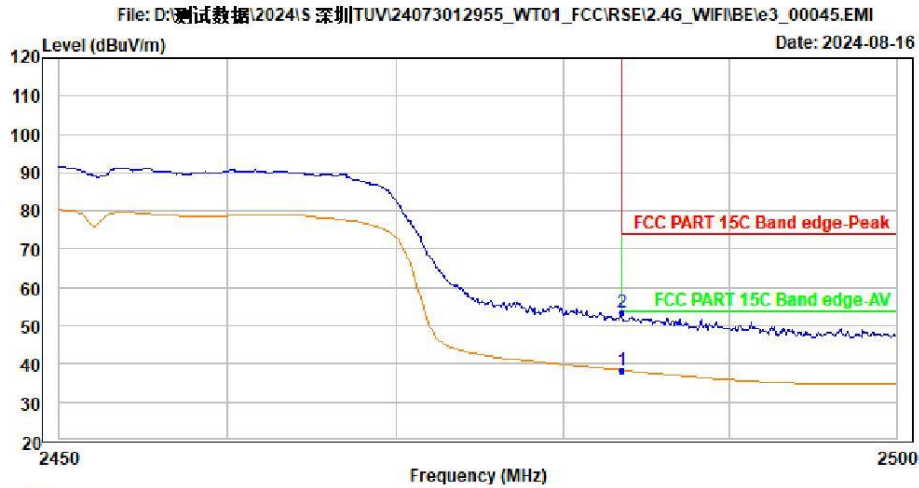


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N40_2452
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	38.39	36.64	31.68	10.00	7.47	47.40	54.00	-15.61	Average
2	PK 2483.500	53.39	51.64	31.68	10.00	7.47	47.40	74.00	-20.61	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

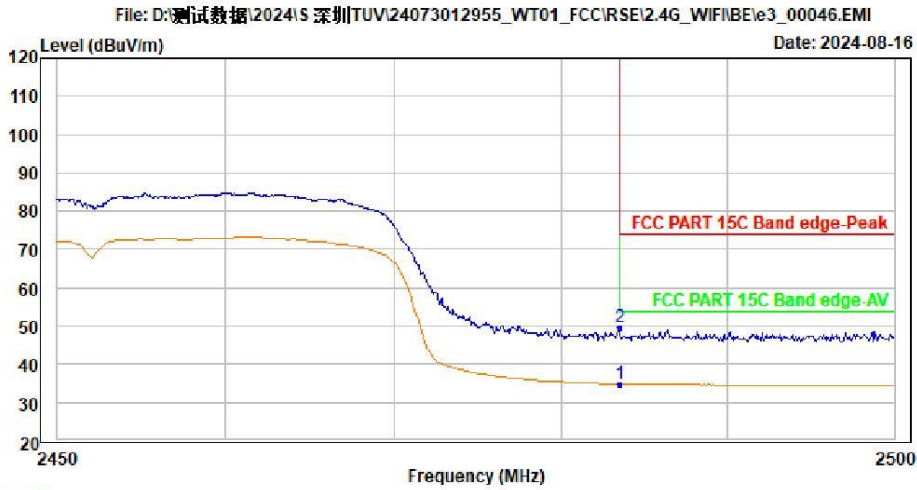


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N40_2452
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2483.500	34.91	33.16	31.68	10.00	7.47	47.40	54.00	-19.09	Average
2	PK 2483.500	49.79	48.04	31.68	10.00	7.47	47.40	74.00	-24.21	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

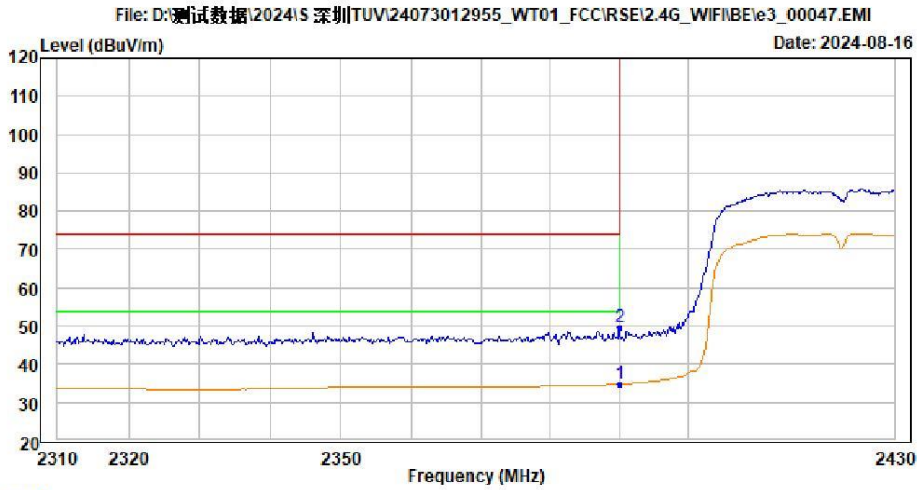


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N40_2422
 Remark :

	Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
	MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1	PP 2390.000	34.80	33.30	31.55	10.00	7.35	47.40	54.00	-19.20	Average
2	PK 2390.000	49.57	48.07	31.55	10.00	7.35	47.40	74.00	-24.43	Peak



Shenzhen UnionTrust Quality and Technology Co., Ltd.

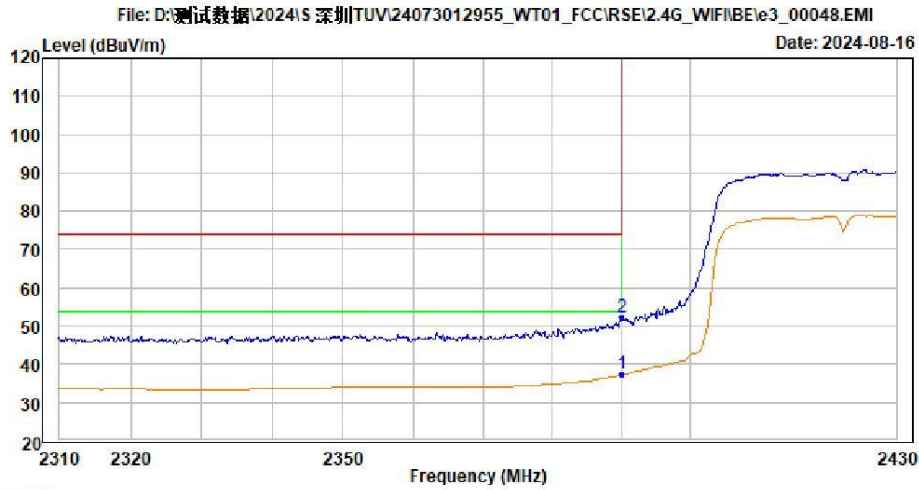


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 24.8(C)/54.3(%)
 Press : 99.9kpa
 Product : Typhur Sync One Wireless Thermometer
 Model No. : WT01
 Power Rating : AC 120V/60Hz
 Test Engineer : Fire
 Test Mode : 2.4G_N40_2422
 Remark :

Freq	Level	Read Level	Ant Factor	Aux Factor	Cable Loss	Preamp Factor	Limit Line	Over Limit	Remark
MHz	dBuV/m	dBuV	dB/m	dB	dB	dB	dBuV/m	dB	
1 PP 2390.000	37.33	35.83	31.55	10.00	7.35	47.40	54.00	-16.67	Average
2 PK 2390.000	52.33	50.83	31.55	10.00	7.35	47.40	74.00	-21.67	Peak


Appendix A.5: Test Results of Conducted Emission on AC Mains

Site:	LAB	Phase:	L1	Temperature(°C):	25.6(°C)
Limit:	QP	atm.press.:	100.4 kpa	Humidity(%):	61.6%RH
EUT:	Typhur Sync One Wireless Thermometer	Test Time:	2024/8/12 15:09:47		
M/N.:	WT01	Power Rating:	AC120/60Hz		
Mode:	Charging + Wireless link	Test Engineer:	linson		
Note:					

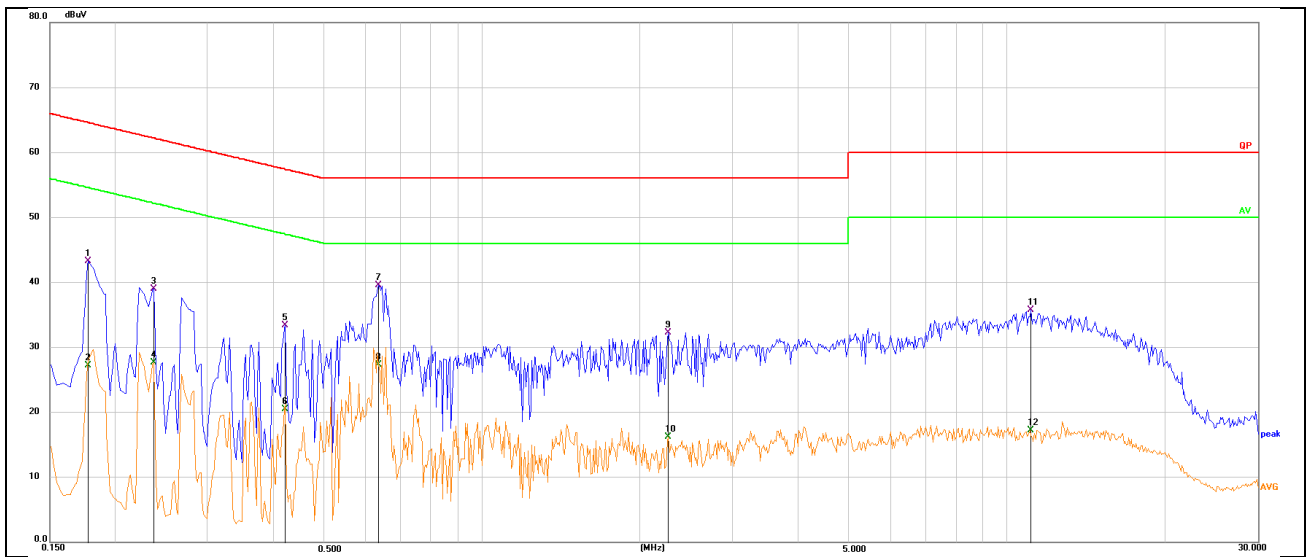

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1770	33.08	10.18	43.26	64.63	-21.37	QP
2	0.1770	17.03	10.18	27.21	54.63	-27.42	AVG
3	0.2354	28.82	10.17	38.99	62.26	-23.27	QP
4	0.2354	17.44	10.17	27.61	52.26	-24.65	AVG
5	0.4200	23.25	10.13	33.38	57.45	-24.07	QP
6	0.4200	10.38	10.13	20.51	47.45	-26.94	AVG
7	0.6360	29.36	10.19	39.55	56.00	-16.45	QP
8	0.6360	17.17	10.19	27.36	46.00	-18.64	AVG
9	2.2650	22.02	10.23	32.25	56.00	-23.75	QP
10	2.2650	5.98	10.23	16.21	46.00	-29.79	AVG
11	11.1165	25.28	10.48	35.76	60.00	-24.24	QP
12	11.1165	6.77	10.48	17.25	50.00	-32.75	AVG

Site:	LAB	Phase: N	Temperature(°C):25.6(°C)
Limit:	QP	atm.press.: 100.4 kpa	Humidity(%): 61.6%RH
EUT:	Typhur Sync One Wireless Thermometer	Test Time:	2024/8/12 15:11:46
M/N.:	WT01	Power Rating:	AC120/60Hz
Mode:	Charging + Wireless link	Test Engineer:	linson
Note:			

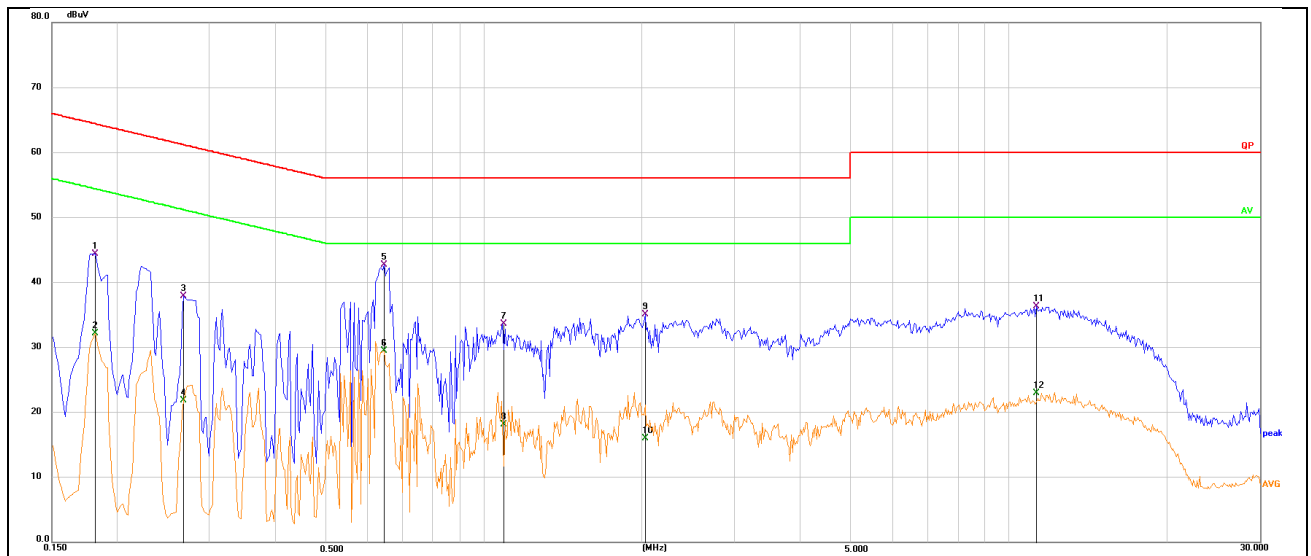

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1814	34.22	10.10	44.32	64.42	-20.10	QP
2	0.1814	22.03	10.10	32.13	54.42	-22.29	AVG
3	0.2670	27.79	10.09	37.88	61.21	-23.33	QP
4	0.2670	11.70	10.09	21.79	51.21	-29.42	AVG
5	0.6450	32.39	10.25	42.64	56.00	-13.36	QP
6	0.6450	19.17	10.25	29.42	46.00	-16.58	AVG
7	1.0859	23.46	10.17	33.63	56.00	-22.37	QP
8	1.0859	7.97	10.17	18.14	46.00	-27.86	AVG
9	2.0264	24.72	10.34	35.06	56.00	-20.94	QP
10	2.0264	5.60	10.34	15.94	46.00	-30.06	AVG
11	11.2920	25.83	10.46	36.29	60.00	-23.71	QP
12	11.2920	12.43	10.46	22.89	50.00	-27.11	AVG