

Test Report

Verified code: 974388

Report No.: E202312279773-1

Customer: North Valley Electronics, Inc.

Address: Building 1 and 1-3 floors of Building 2 of Jinan Energy Industry Park,
No.1815 Gangyuan 7th Road, High-tech Zone, Jinan City, Shandong Province, China

Sample Name: Telematics Box

Sample Model: TX4000

Receive Sample Date: Dec.28,2023

Test Date: Dec.30,2023 ~ Jan.10,2024

Reference Document: CFR Title 47 Part 2, CFR Title 47 Part 22 Subpart H,
CFR Title 47 Part 24 Subpart E, CFR Title 47 Part 27 Subpart C

Test Result: Pass

Prepared by: Wen Wenwen
Wen Wenwen

Reviewed by: Peng Huarui
Peng Huarui

Approved by: Zhao Zetian
Zhao Zetian



GRG METROLOGY & TEST GROUP CO., LTD.

Issued Date: 2024-01-30

GRG METROLOGY & TEST GROUP CO., LTD.

Address: No.163, Pingyun Road, West of Huangpu Avenue, Guangzhou, Guangdong, China
Tel: (+86) 400-602-0999 FAX: (+86) 020-38698685 Web: <http://www.grgtest.com>



Statement

1. The report is invalid without "special seal for inspection and testing"; some copies are invalid; The report is invalid if it is altered or missing; The report is invalid without the signature of the person who prepared, reviewed and approved it.
2. The sample information is provided by the client and responsible for its authenticity; The content of the report is only valid for the samples sent this time.
3. When there are reports in both Chinese and English, the Chinese version will prevail when the language problems are inconsistent.
4. If there is any objection concerning the report, please inform us within 15 days from the date of receiving the report.
5. Without the agreement of the laboratory, the client is not authorized to use the test results for unapproved propaganda.

----- The following blanks -----

TABLE OF CONTENTS

1.	TEST RESULT SUMMARY	5
1.1	TEST STANDARDS	5
1.2	TEST RESULT	5
2.	GENERAL DESCRIPTION OF EUT	8
2.1	APPLICANT	8
2.2	MANUFACTURER.....	8
2.3	FACTORY	8
2.4	BASIC DESCRIPTION OF EQUIPMENT UNDER TEST.....	8
2.5	CONFIGURATION OF SYSTEM UNDER TEST.....	10
2.6	DESIGNATION OF EMISSION	10
2.7	TEST FREQUENCIES	11
3.	LABORATORY AND MEASUREMENT UNCERTAINTY	12
3.1	LABORATORY	12
3.2	ACCREDITATIONS	12
3.3	MEASUREMENT UNCERTAINTY	12
4.	LIST OF USED TEST EQUIPMENT AT GRGT.....	13
5.	EFFECTIVE (ISOTROPIC) RADIATED POWER OUTPUT DATA	14
5.1	LIMIT.....	14
5.2	TEST PROCEDURES	14
5.3	TEST SETUP	14
5.4	TEST RESULTS	15
6.	FIELD STRENGTH OF SPURIOUS RADIATION.....	16
6.1	LIMIT.....	16
6.2	TEST PROCEDURES	16
6.3	TEST SETUP	17
6.4	DATA SAMPLE	19
6.5	TEST RESULTS	20
7.	TEST PHOTO	92
8.	PHOTOGRAPH OF THE EUT.....	93

----- The following blanks -----

REPORT ISSUED HISTORY

Report Version	Report No.	Description	Compile Date
1.0	E202312279773-1	Original Issue	2024-01-30

Note: Except for radiated spurious emissions, The test results of all conducted test items please refer to the module FCC test report (Report No.: HR/2019/1001601) which issued on 2019/2/28 by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.

----- The following blanks -----

1. TEST RESULT SUMMARY

1.1 TEST STANDARDS

No.	Identity	Document Title
1	FCC CFR Title 47 Part 2 Section 2.1047, 21049	Frequency Allocations And Radio Treaty Mattres; General Rules And Regulations
2	FCC CFR Title 47 Part 22 Subpart H	Cellular Radiotelephone Service
3	FCC CFR Title 47 Part 24 Subpart E	Broadband PCS
4	FCC CFR Title 47 Part 27 Subpart C	Technical Standards

1.2 TEST RESULT

GSM850 & UMTS Band 5			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913(a)(5)	EIRP ≤ 11.5 W	PASS ¹
Peak-Average Ratio	§22.913(d)	Limit ≤ 13 dB	PASS ¹
Modulation Characteristics	§2.1047	Digital modulation	PASS ¹
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	PASS ¹
Band Edges Compliance	§2.1051, §22.917(b)(1)	Refer to section 9.1	PASS ¹
Spurious Emission at Antenna Terminals	§2.1051, §22.917(a)	≤ -13 dBm/1MHz	PASS ¹
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	≤ -13 dBm/1MHz.	PASS ²
Frequency Stability	§2.1055, §22.355	$\leq \pm 2.5$ ppm.	PASS ¹

Note 1: Except for Field Strength of Spurious Radiation, The test results of all conducted test items please refer to the module FCC test report (Report No.: HR/2019/1001601) which issued on 2019/2/28 by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.

Note 2: . Field Strength of Spurious Radiation test items DC 12V and DC 24V are tested, and the report only shows the worst data of DC 24V.

GSM1900 & UMTS Band 2			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232(c)	EIRP $\leq$ 2 W	PASS ¹
Peak-Average Ratio	§24.232(d)	Limit $\leq$ 13 dB	PASS ¹
Modulation Characteristics	§2.1047	Digital modulation	PASS ¹
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	PASS ¹
Band Edges Compliance	§2.1051, §24.238(a)(b)	Refer to section 9.1	PASS ¹
Spurious Emission at Antenna Terminals	§2.1051, §24.238(a)(b)	$\leq$ -13 dBm/1MHz	PASS ¹
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	$\leq$ -13 dBm/1MHz.	PASS ²
Frequency Stability	§2.1055, §24.235	$\leq$ $\pm$ 2.5ppm.	PASS ¹

Note 1: Except for Field Strength of Spurious Radiation, The test results of all conducted test items please refer to the module FCC test report (Report No.: HR/2019/1001601) which issued on 2019/2/28 by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.

Note 2: . Field Strength of Spurious Radiation test items DC 12V and DC 24V are tested, and the report only shows the worst data of DC 24V.

----- The following blanks -----

UMTS Band 4			
Item	FCC Rule No.	Requirements	Result
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)(4)	EIRP ≤ 1 W	PASS ¹
Peak-Average Ratio	§27.50	Limit ≤ 13 dB	PASS ¹
Modulation Characteristics	§2.1047	Digital modulation	PASS ¹
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	PASS ¹
Band Edges Compliance	§2.1051, §27.53(h)(1) §27.53(h)(3)(i)	Refer to section 9.1	PASS ¹
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)(1)	≤ -13 dBm/1MHz	PASS ¹
Field Strength of Spurious Radiation	§2.1053, §27.53(h)(1)	≤ -13 dBm/1MHz.	PASS ²
Frequency Stability	§2.1055, §27.54	$\leq \pm 2.5$ ppm.	PASS ¹

Note 1: Except for Field Strength of Spurious Radiation, The test results of all conducted test items please refer to the module FCC test report (Report No.: HR/2019/1001601) which issued on 2019/2/28 by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.

Note 2: . Field Strength of Spurious Radiation test items DC 12V and DC 24V are tested, and the report only shows the worst data of DC 24V.

----- The following blanks -----

2. GENERAL DESCRIPTION OF EUT

2.1 APPLICANT

Name:	North Valley Electronics,Inc.
Address:	Building 1 and 1-3 floors of Building 2 of Jinan Energy Industry Park, No.1815 Gangyuan 7th Road, High-tech Zone, Jinan City, Shandong Province, China

2.2 MANUFACTURER

Name:	North Valley Electronics,Inc.
Address:	Building 1 and 1-3 floors of Building 2 of Jinan Energy Industry Park, No.1815 Gangyuan 7th Road, High-tech Zone, Jinan City, Shandong Province, China

2.3 FACTORY

Name:	North Valley Electronics,Inc.
Address:	Building 1 and 1-3 floors of Building 2 of Jinan Energy Industry Park, No.1815 Gangyuan 7th Road, High-tech Zone, Jinan City, Shandong Province, China


2.4 BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

Equipment:	Telematics Box
Model No.:	TX4000
Trade Name:	/
Brand Name:	NVR
Adding Model:	/
FCC ID:	2BEJG-TX4000
Module FCC ID:	XMR201903EG25G
Power supply:	DC 24V(Battery 3.7V) or DC 12V(Battery 3.7V)
Hardware Version:	0.1.4
Software Version:	00.02.08
Antenna Type:	External Antenna
Antenna Gain:	GSM850: 3.71dBi GSM1900:-1.04dBi UMTS Band 2: -1.04dBi UMTS Band 4: -1.12dBi UMTS Band 5: 3.71dBi
Power Class:	GSM850: 4 GSM1900: 1 UMTS: 3

Frequency range:	GSM850: Tx 824MHz~849MHz, Rx 869MHz ~ 894 MHz GSM1900: Tx 1850MHz~1910MHz, Rx 1930MHz ~ 1990 MHz UMTS Band 2: Tx 1850MHz~1910MHz, Rx 1930MHz ~ 1990 MHz UMTS Band 4: Tx 1710MHz~1755MHz, Rx 2110MHz ~ 2155 MHz UMTS Band 5: Tx 824MHz~849MHz, Rx 869MHz ~ 894 MHz
Bandwidth:	GSM850: 0.2MHz GSM1900: 0.2MHz UMTS Band 2: 5MHz UMTS Band 4: 5MHz UMTS Band 5: 5MHz
Modulation:	GSM850: GMSK,8PSK GSM1900: GMSK,8PSK UMTS Band 2: QPSK UMTS Band 4: QPSK UMTS Band 5: QPSK
Sample No.:	E202312279773-0001
IMEI:	864677069946952
Temperature Range:	-20℃~50℃
Voltage Range:	DC 9V~36V
Sample Submitting Way:	☒ Provided by customer ☐ Sampling
Note:	The EUT antenna gain is provided by the applicant. This report is made solely on the basis of such data and/or information. We accept no responsibility for the authenticity and completeness of the above data and information and the validity of the results and/or conclusions.

----- The following blanks -----

2.5 CONFIGURATION OF SYSTEM UNDER TEST



2.6 DESIGNATION OF EMISSION

Test Mode	Emission Designator
GSM850(GSM)	247KGXW
GSM850(EDGE)	245KG7W
GSM1900(GSM)	249KGXW
GSM1900(EDGE)	249KG7W
WCDMA Band II	4M15F9W
WCDMA Band IV	4M14F9W
WCDMA Band V	4M13F9W

Note 1: The Bandwidth test results please refer to the module FCC test report (Report No.: HR/2019/1001601) which issued on 2019/2/28 by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.

----- The following blanks -----

2.7 TEST FREQUENCIES

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM850	TX	Channel 128	Channel 190	Channel 251
		824.2MHz	836.6 MHz	848.8 MHz
	RX	Channel 128	Channel 190	Channel 251
		869.2 MHz	881.6 MHz	893.8 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
GSM1900	TX	Channel 512	Channel 661	Channel 810
		1850.2MHz	1880.0 MHz	1909.8 MHz
	RX	Channel 512	Channel 661	Channel 810
		1930.2 MHz	1960.0 MHz	1989.8 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA BAND II	TX	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA BAND IV	TX	Channel 1312	Channel 1413	Channel 1513
		1712.4MHz	1732.6 MHz	1752.6 MHz
	RX	Channel 1537	Channel 1638	Channel 1738
		2112.4 MHz	2132.6 MHz	2152.6 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA BAND V	TX	Channel 4132	Channel 4182	Channel 4233
		826.4MHz	836.4 MHz	846.6 MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4 MHz	881.4 MHz	891.6 MHz

----- The following blanks -----

3. LABORATORY AND MEASUREMENT UNCERTAINTY

3.1 LABORATORY

The tests and measurements refer to this report were performed by Report of Shenzhen EMC Laboratory of GRG METROLOGY & TEST GROUP CO., LTD.

Add.: No.1301 Guanguang Road Xinlan Community, Guanlan Street, Longhua District
Shenzhen, 518110, People's Republic of China.

P.C.: 518110

Tel : 0755-61180008

Fax: 0755-61180008

3.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA A2LA(Certificate #2861.01)

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada ISED (Company Number: 24897, CAB identifier:CN0069)

USA FCC (Registration Number: 759402, Designation Number:CN1198)

Copies of granted accreditation certificates are available for downloading from our web site,
<http://www.grgtest.com>

3.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement		Frequency	Uncertainty
Radiated Emission	Horizontal	30MHz~1000MHz	4.30dB
		1GHz~18GHz	5.60dB
		18GHz~40GHz	3.65dB
	Vertical	30MHz~1000MHz	4.30dB
		1GHz~18GHz	5.60dB
		18GHz~40GHz	3.65dB
	Coaxial	9kHz~30MHz	4.46dB
	Coplanar	9kHz~30MHz	4.46dB

Measurement	Uncertainty
RF frequency	6.0×10^{-6}
RF power conducted	0.8dB
Occupied channel bandwidth	0.4dB
Unwanted emission, conducted	0.7dB
Humidity	6%
Temperature	2°C

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4. LIST OF USED TEST EQUIPMENT AT GRGT

RSE system:

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Keysight	N9010B	MY60680122	2024-03-19
Loop Antenna	TESEQ	HLA6121	52599	2024-12-29
Bi-log Antenna	Schwarzbeck	VULB 9163	01279	2024-03-05
Horn Antenna	Schwarzbeck	BBHA9120D (1201)	02143	2024-07-15
Horn Antenna	Schwarzbeck	BBHA9170	BBHA 9170-497	2024-09-18
Amplifier	tonscend	TAP9E6343	AP20E806065	2024-04-16
Amplifier	tonscend	TAP01018048	AP20E8060075	2024-04-11
Amplifier	tonscend	TAP184050	AP20E806070	2024-04-11
Wideband radio Communication Tester	R&S	CMW500	144611-nC	2024-04-16
Test S/W	tonscend	JS36-RSE/2.5.1.5		
Dc Source	LW	PS-305DM	180704439	2024-11-03

Note: The calibration interval of the test instruments is 12 months.

5. EFFECTIVE (ISOTROPIC) RADIATED POWER OUTPUT DATA

5.1 LIMIT

According to FCC section 22.913 (a)(5) the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232 (c) the mobile and portable stations are limited to 2 watts EIRP.

According to FCC section 27.50 (d) (4) mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

5.2 TEST PROCEDURES

Measurement Procedure: FCC KDB 971168 D01 V03r01

1. Connect the test system to the UE antenna connector.
2. A call is set up according to the Generic call setup procedure.
3. Set and send continuously up power control commands to the UE, until the UE output power shall be maximum level.
4. Read the conducted power in the base station.

Remark:


- a: For getting the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should be taken to calculate it,

$$\text{EIRP [dBm]} = \text{Conducted output power [dBm]} + \text{Gain [dBi]}$$

$$\text{ERP [dBm]} = \text{Conducted output power [dBm]} + \text{Gain [dBi]} - 2.15\text{dB}$$

$$P [\text{dBm}] = 10 \lg(p/1\text{mw})$$

5.3 TEST SETUP

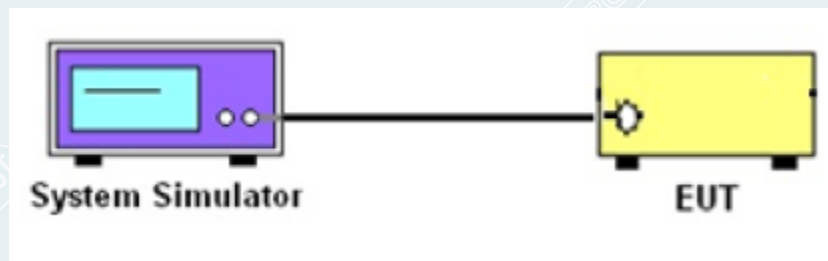

----- The following blanks -----

5.4 TEST RESULTS

Effective Radiated Power

GSM

BAND	Channel	Power(dBm)	ERP(dBm)	Limit(dBm)	Verdict
GSM850	128	32.32	33.88	38.45	PASS
GSM850	190	32.53	34.09	38.45	PASS
GSM850	251	32.20	33.76	38.45	PASS
EGPRS850	128	26.51	28.07	38.45	PASS
EGPRS850	190	26.67	28.23	38.45	PASS
EGPRS850	251	26.67	28.23	38.45	PASS

BAND	Channel	Power(dBm)	EIRP(dBm)	Limit(dBm)	Verdict
GSM1900	512	29.66	28.62	33.00	PASS
GSM1900	661	29.41	28.37	33.00	PASS
GSM1900	810	29.18	28.14	33.00	PASS
EGPRS1900	512	26.20	25.16	33.00	PASS
EGPRS1900	661	25.92	24.90	33.00	PASS
EGPRS1900	810	25.67	24.63	33.00	PASS

WCDMA

BAND	Channel	Power(dBm)	EIRP(dBm)	Limit(dBm)	Verdict
Band II	9262	23.88	22.84	33.00	PASS
Band II	9400	23.79	22.75	33.00	PASS
Band II	9538	23.76	22.72	33.00	PASS
Band IV	1312	23.82	22.70	30.00	PASS
Band IV	1413	23.74	22.62	30.00	PASS
Band IV	1513	23.64	22.52	30.00	PASS

BAND	Channel	Power(dBm)	EIRP(dBm)	Limit(dBm)	Verdict
Band V	4132	23.86	25.42	38.45	PASS
Band V	4182	23.81	25.37	38.45	PASS
Band V	4233	23.76	25.32	38.45	PASS

Note 1: The Conducted output power test results please refer to the module FCC test report (Report No.: HR/2019/1001601) which issued on 2019/2/28 by SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch.

6. FIELD STRENGTH OF SPURIOUS RADIATION

6.1 LIMIT

According to FCC section 22.917(a), 24.238(a), 27.53(h)(1), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

6.2 TEST PROCEDURES

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 7

Below 1GHz test procedure as below:

- 1). The EUT was powered on and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360 ° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.

4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.

5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.

6). The output power into the substitution antenna was then measured.

7). Steps 5) and 6) were repeated with both antennas polarized.

8) Calculate power in dBm by the following formula:

$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$.

Above 1GHz test procedure as below:

1. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber

2. Calculate power in dBm by the following formula:

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

Where:

Pg is the generator output power into the substitution antenna.

3. Test the EUT in the lowest channel, the middle channel the Highest channel

4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.

5. Repeat above procedures until all frequencies measured was complete

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10*the fundamental frequency (separated into at least two plots per channel)

2. RBW=100kHz for emission below 1GHz and 1MHz for emission above 1GHz.

3. Number of sweep point $\geq 2 * \text{span} / \text{RBW}$

4. Detector=RMS

5. Trace mode = trace average for continuous emissions, max hold for pulse emissions

6. The trace was allowed to stabilize

6.3 TEST SETUP

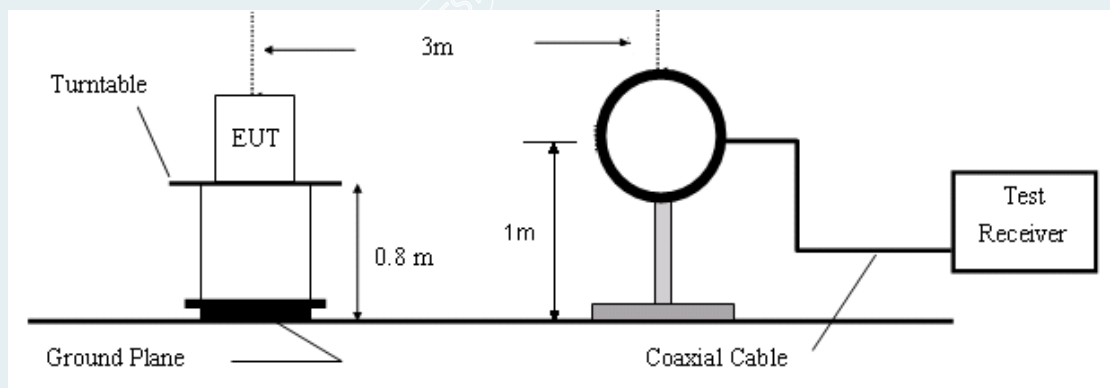


Figure 1. 9kHz to 30MHz radiated emissions test configuration

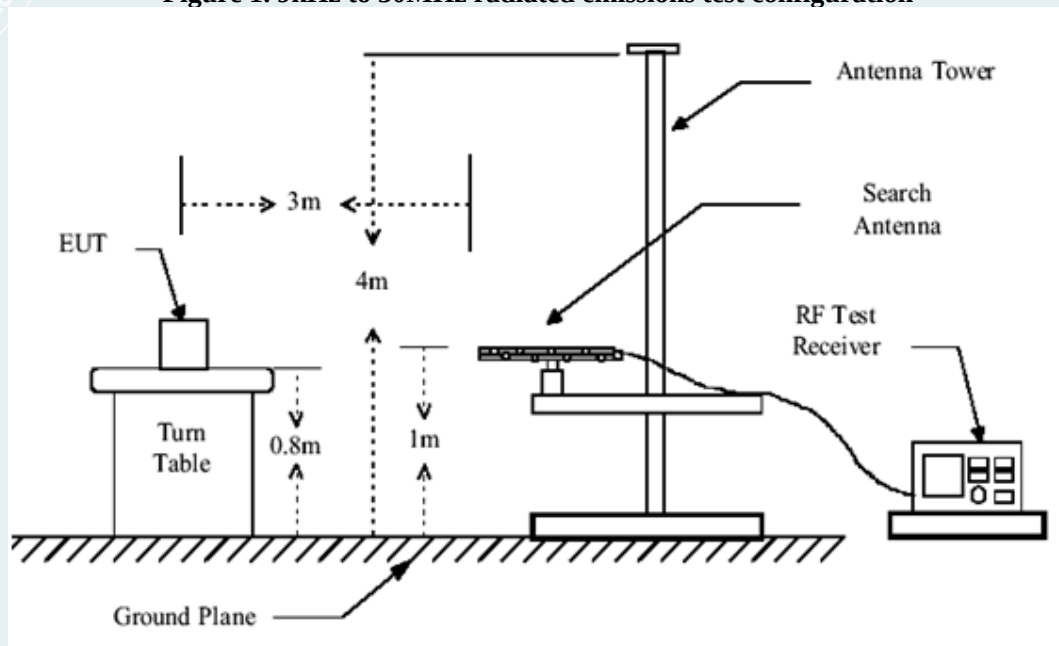


Figure 2. 30MHz to 1GHz radiated emissions test configuration

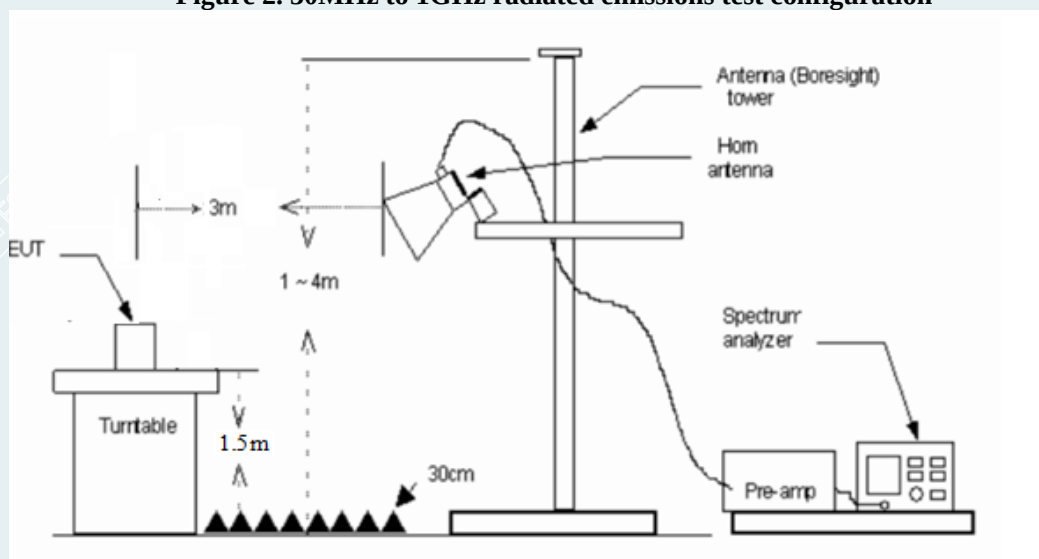


Figure 3. 1GHz-18GHz radiated emissions test configuration

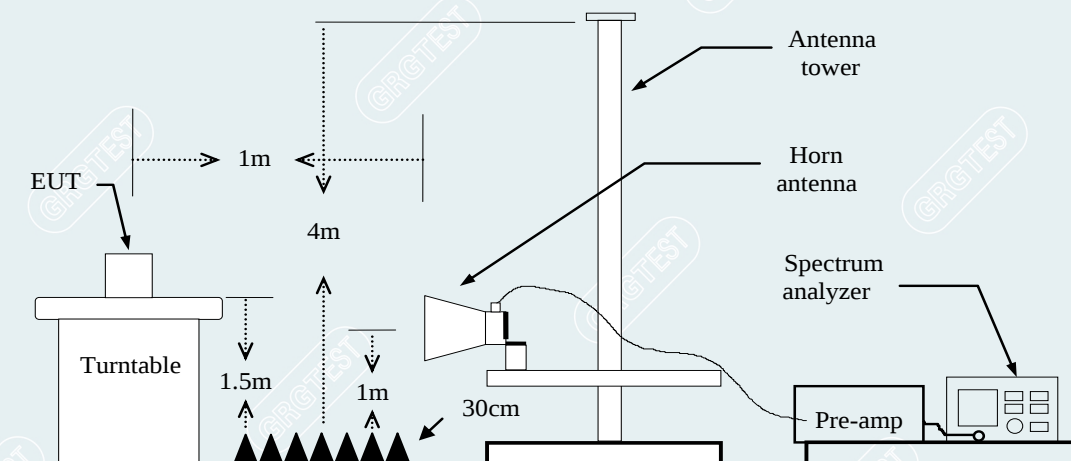


Figure 4. Above 18GHz radiated emissions test configuration

----- The following blanks -----

6.4 DATA SAMPLE

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
x	xxxx	-66.69	-77.73	-25.00	52.73	-11.04	RMS	Horizontal

Frequency (MHz) = Emission frequency in MHz

Ant. Pol. (H/V) = Antenna polarization

Reading (dBm) = Uncorrected Analyzer / Receiver reading

Result (dBm) = Reading (dBm) + Correction Factor (dBm)

Limit (dBm) = Limit stated in standard

Margin (dB) = Remark Result (dBm) – Limit (dBm)

Peak = Peak Reading

RMS = RMS Reading


AVG = Average Reading

----- The following blanks -----

6.5 TEST RESULTS

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	128	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

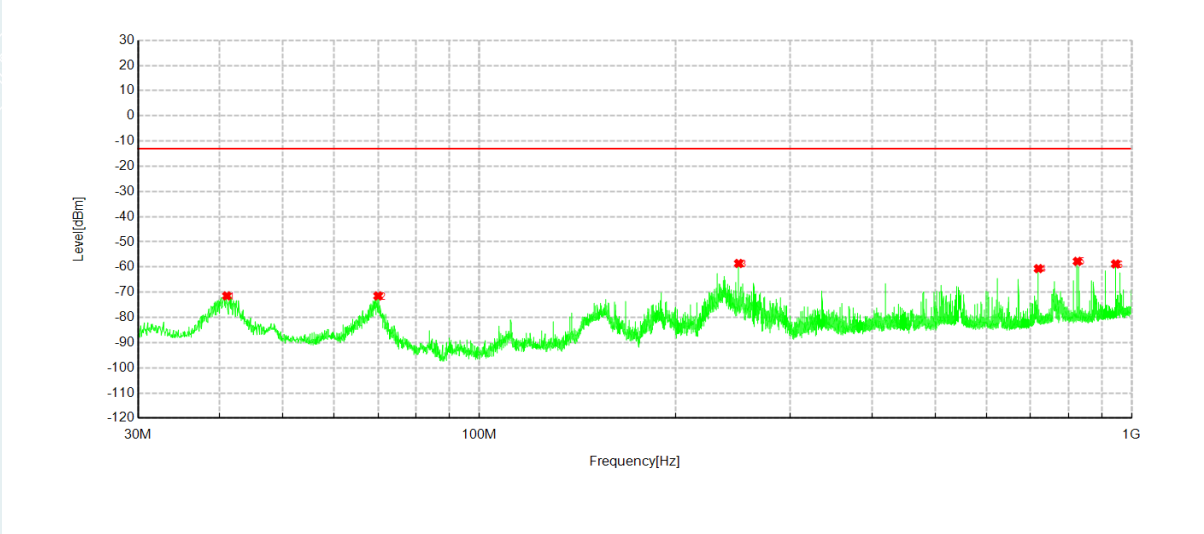


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.058	-57.12	-71.46	-13.00	58.46	-14.34	RMS	Horizontal
2	70.0125	-49.14	-71.47	-13.00	58.47	-22.33	RMS	Horizontal
3	249.996	-41.78	-58.58	-13.00	45.58	-16.80	RMS	Horizontal
4	720.058	-51.08	-60.63	-13.00	47.63	-9.55	RMS	Horizontal
5	826.37	-49.91	-57.75	-13.00	44.75	-7.84	RMS	Horizontal
6	945.68	-51.87	-58.78	-13.00	45.78	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	128	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

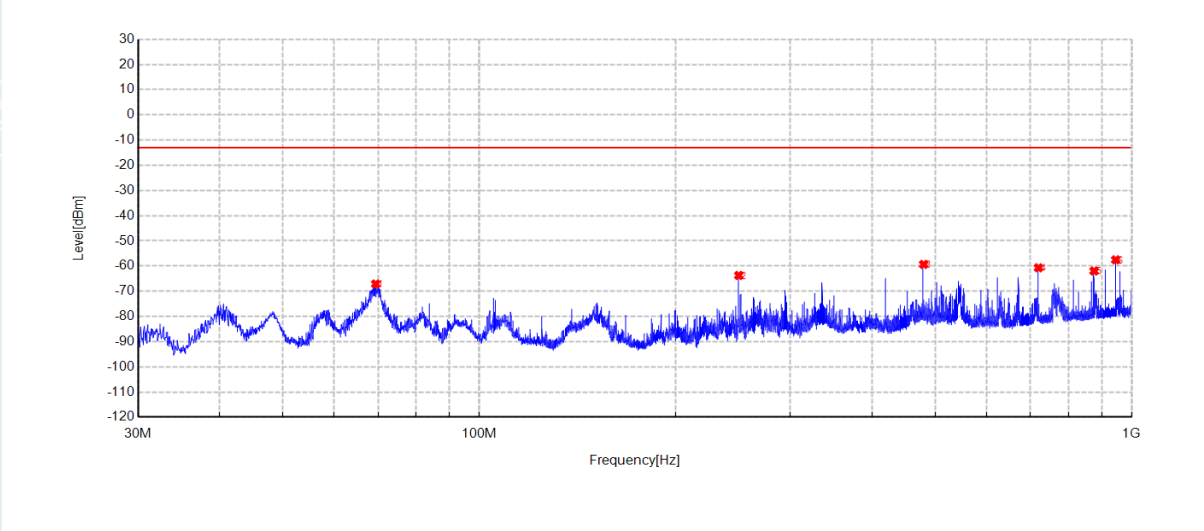


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.4305	-44.42	-67.11	-13.00	54.11	-22.69	RMS	Vertical
2	249.996	-42.93	-63.72	-13.00	50.72	-20.79	RMS	Vertical
3	480.0315	-46.46	-59.35	-13.00	46.35	-12.89	RMS	Vertical
4	720.058	-51.48	-60.69	-13.00	47.69	-9.21	RMS	Vertical
5	876.034	-54.42	-61.96	-13.00	48.96	-7.54	RMS	Vertical
6	945.6315	-50.77	-57.53	-13.00	44.53	-6.76	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	190	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

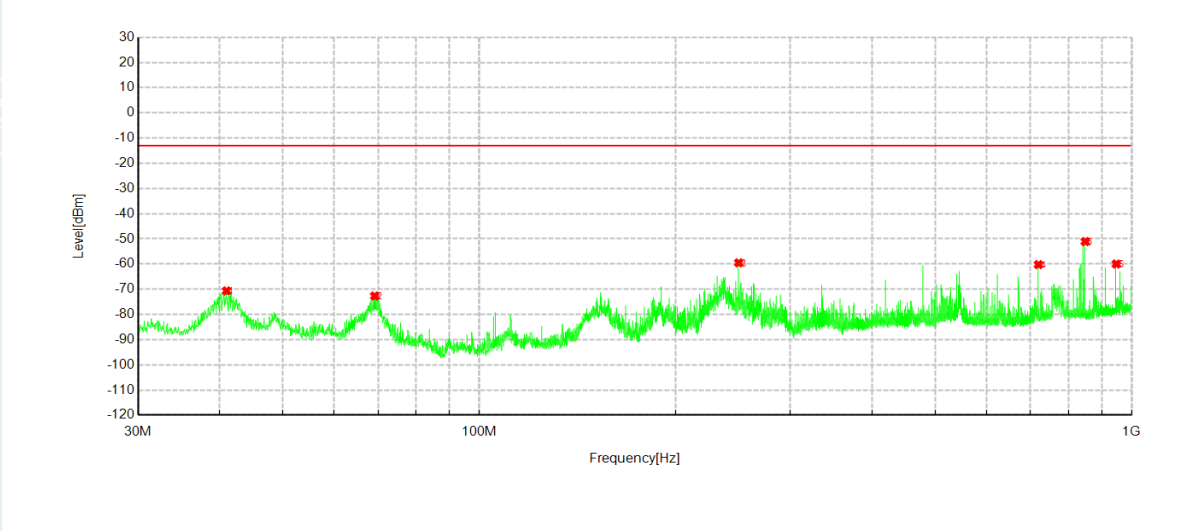


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.0095	-56.33	-70.66	-13.00	57.66	-14.33	RMS	Horizontal
2	69.188	-50.84	-72.68	-13.00	59.68	-21.84	RMS	Horizontal
3	249.996	-42.72	-59.52	-13.00	46.52	-16.80	RMS	Horizontal
4	720.058	-50.68	-60.23	-13.00	47.23	-9.55	RMS	Horizontal
5	849.3105	-42.89	-51.07	-13.00	38.07	-8.18	RMS	Horizontal
6	947.62	-53.05	-59.98	-13.00	46.98	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	190	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

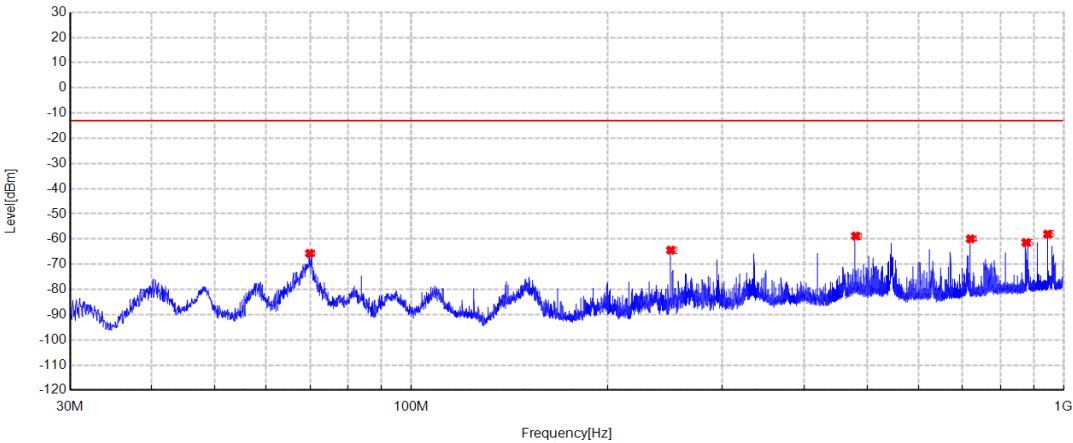


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.9155	-43.02	-65.68	-13.00	52.68	-22.66	RMS	Vertical
2	249.996	-43.63	-64.42	-13.00	51.42	-20.79	RMS	Vertical
3	480.08	-45.91	-58.80	-13.00	45.80	-12.89	RMS	Vertical
4	720.058	-50.72	-59.93	-13.00	46.93	-9.21	RMS	Vertical
5	875.9855	-53.87	-61.41	-13.00	48.41	-7.54	RMS	Vertical
6	945.6315	-51.28	-58.04	-13.00	45.04	-6.76	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	251	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

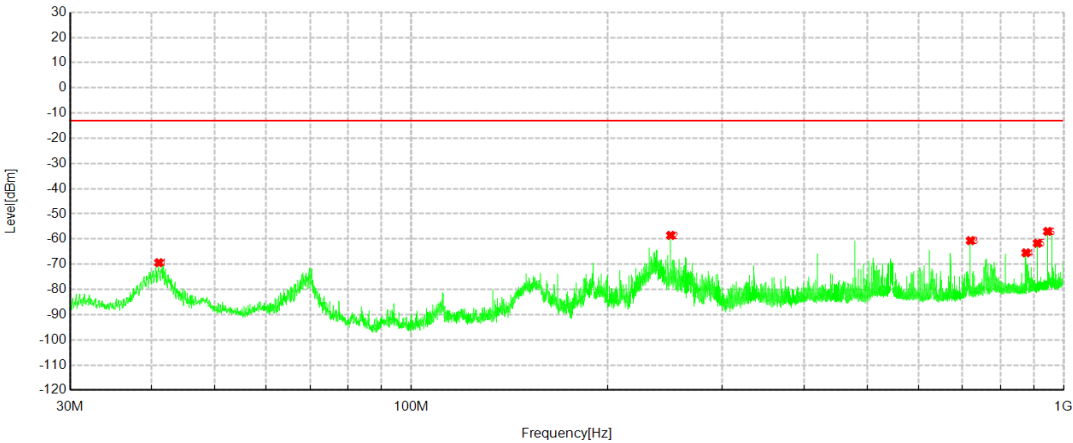


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.058	-55.06	-69.40	-13.00	56.40	-14.34	RMS	Horizontal
2	249.996	-41.74	-58.54	-13.00	45.54	-16.80	RMS	Horizontal
3	720.058	-51.09	-60.64	-13.00	47.64	-9.55	RMS	Horizontal
4	876.0825	-57.21	-65.46	-13.00	52.46	-8.25	RMS	Horizontal
5	912.0695	-54.12	-61.67	-13.00	48.67	-7.55	RMS	Horizontal
6	945.583	-50.07	-56.98	-13.00	43.98	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	251	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		


Test Graph

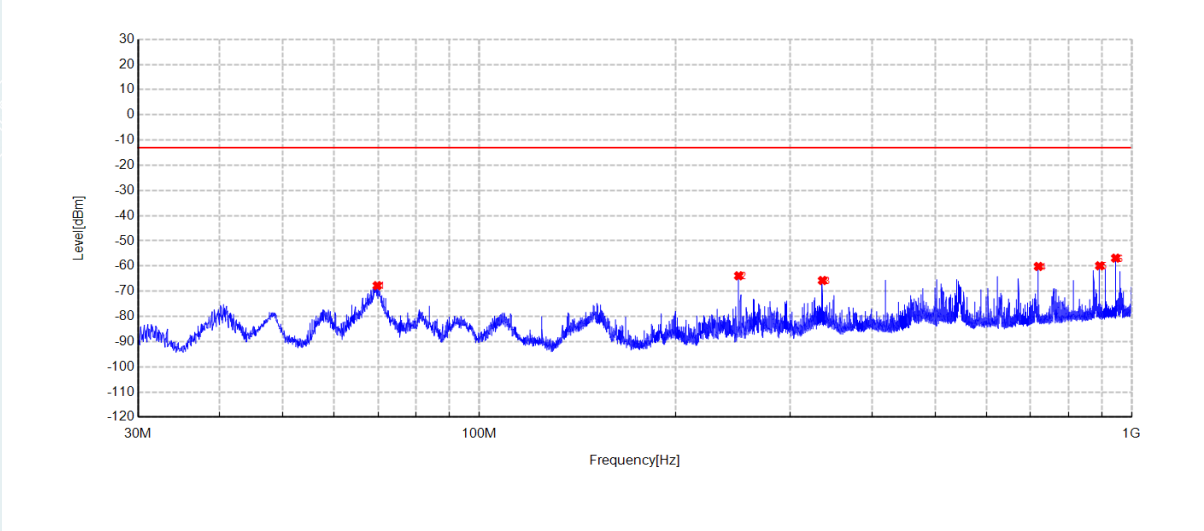

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.8185	-45.12	-67.78	-13.00	54.78	-22.66	RMS	Vertical
2	249.996	-43.08	-63.87	-13.00	50.87	-20.79	RMS	Vertical
3	336.035	-50.47	-65.74	-13.00	52.74	-15.27	RMS	Vertical
4	720.058	-50.95	-60.16	-13.00	47.16	-9.21	RMS	Vertical
5	893.8335	-52.23	-59.89	-13.00	46.89	-7.66	RMS	Vertical
6	945.6315	-50.10	-56.86	-13.00	43.86	-6.76	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	190	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

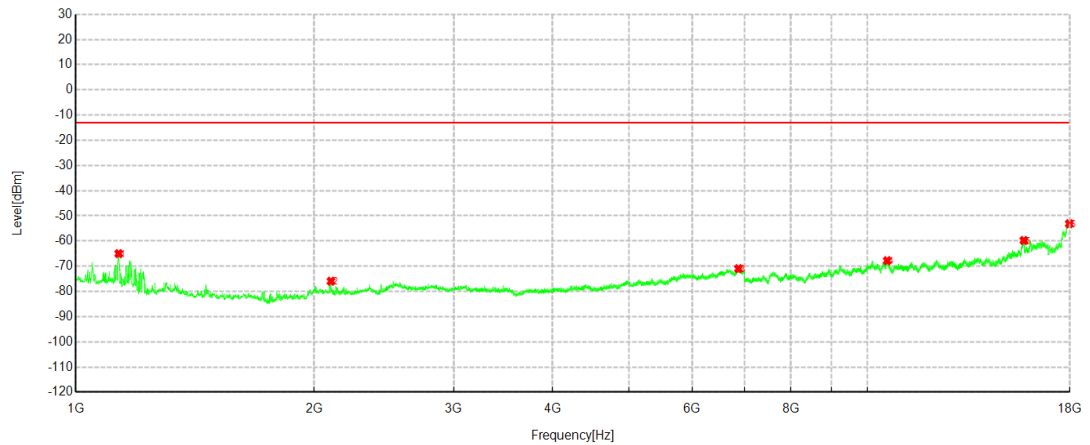Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1132.6	-46.66	-65.00	-13.00	52.00	-18.34	RMS	Horizontal
2	2099.9	-55.87	-75.94	-13.00	62.94	-20.07	RMS	Horizontal
3	6870.1	-59.34	-70.97	-13.00	57.97	-11.63	RMS	Horizontal
4	10588.85	-61.01	-67.79	-13.00	54.79	-6.78	RMS	Horizontal
5	15758.55	-56.12	-59.78	-13.00	46.78	-3.66	RMS	Horizontal
6	17983	-57.05	-53.12	-13.00	40.12	3.93	RMS	Horizontal


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	190	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

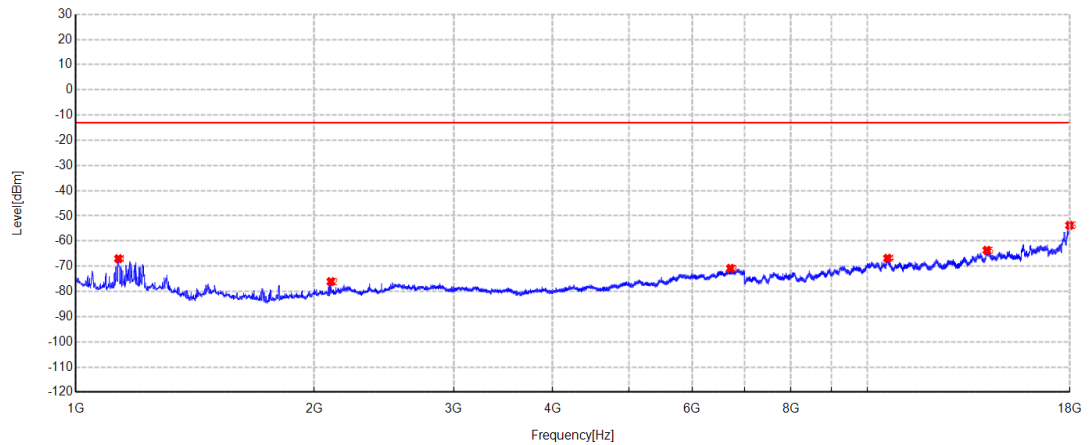Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1131.75	-47.51	-67.01	-13.00	54.01	-19.50	RMS	Vertical
2	2099.05	-55.83	-76.10	-13.00	63.10	-20.27	RMS	Vertical
3	6710.3	-58.83	-70.83	-13.00	57.83	-12.00	RMS	Vertical
4	10599.05	-61.31	-66.84	-13.00	53.84	-5.53	RMS	Vertical
5	14149.5	-60.66	-63.67	-13.00	50.67	-3.01	RMS	Vertical
6	17995.75	-57.13	-53.79	-13.00	40.79	3.34	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	128	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		


Test Graph

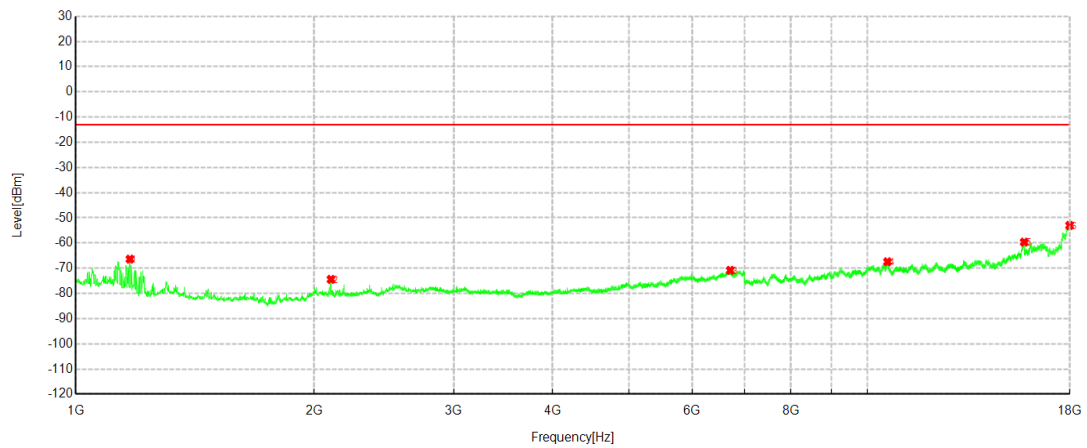

Suspected Data List


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1170	-46.48	-66.39	-13.00	53.39	-19.91	RMS	Horizontal
2	2099.9	-54.36	-74.43	-13.00	61.43	-20.07	RMS	Horizontal
3	6706.9	-59.35	-70.84	-13.00	57.84	-11.49	RMS	Horizontal
4	10597.35	-61.01	-67.45	-13.00	54.45	-6.44	RMS	Horizontal
5	15772.15	-55.87	-59.65	-13.00	46.65	-3.78	RMS	Horizontal
6	17998.3	-56.66	-53.02	-13.00	40.02	3.64	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	128	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

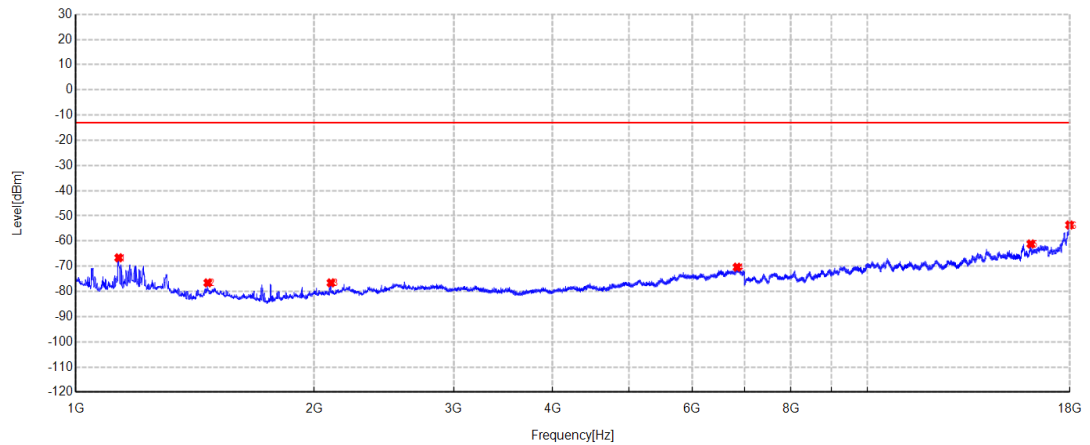Test Graph**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1132.6	-47.17	-66.65	-13.00	53.65	-19.48	RMS	Vertical
2	1467.5	-55.45	-76.59	-13.00	63.59	-21.14	RMS	Vertical
3	2099.9	-56.32	-76.59	-13.00	63.59	-20.27	RMS	Vertical
4	6842.9	-58.88	-70.38	-13.00	57.38	-11.50	RMS	Vertical
5	16081.55	-54.59	-61.16	-13.00	48.16	-6.57	RMS	Vertical
6	17999.15	-57.10	-53.64	-13.00	40.64	3.46	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	251	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

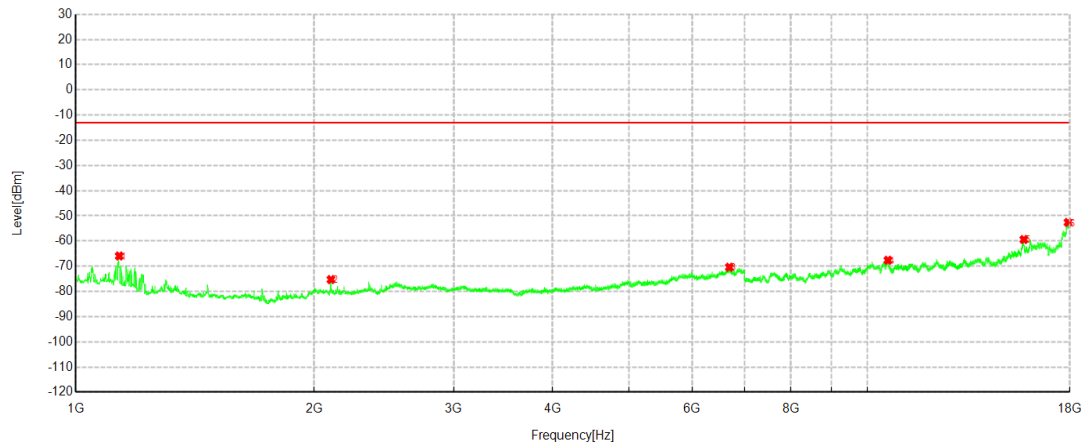Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1134.3	-47.57	-65.94	-13.00	52.94	-18.37	RMS	Horizontal
2	2099.9	-55.22	-75.29	-13.00	62.29	-20.07	RMS	Horizontal
3	6689.9	-58.98	-70.40	-13.00	57.40	-11.42	RMS	Horizontal
4	10612.65	-61.08	-67.63	-13.00	54.63	-6.55	RMS	Horizontal
5	15759.4	-55.75	-59.41	-13.00	46.41	-3.66	RMS	Horizontal
6	17919.25	-57.14	-52.62	-13.00	39.62	4.52	RMS	Horizontal


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	251	Band:	850
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

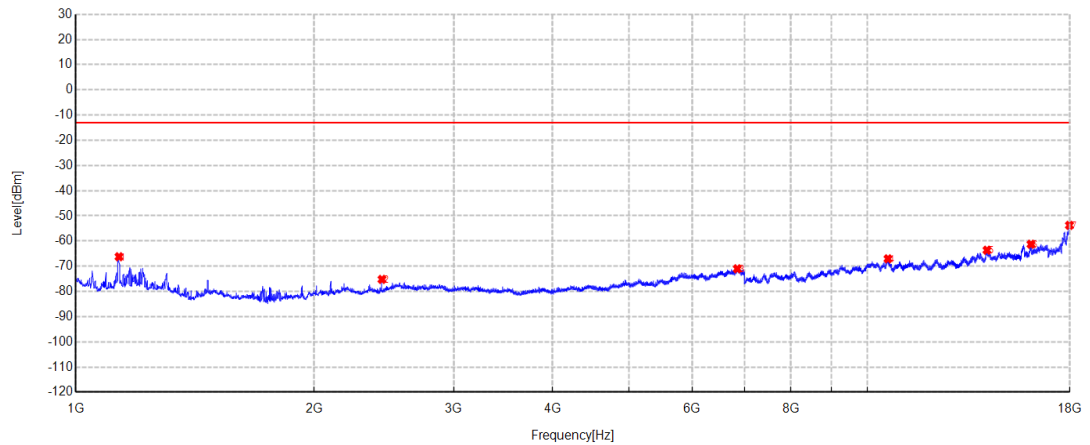Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133.45	-46.77	-66.23	-13.00	53.23	-19.46	RMS	Vertical
2	2435.65	-56.21	-75.22	-13.00	62.22	-19.01	RMS	Vertical
3	6847.15	-59.60	-71.01	-13.00	58.01	-11.41	RMS	Vertical
4	10613.5	-61.42	-67.04	-13.00	54.04	-5.62	RMS	Vertical
5	14155.45	-60.58	-63.62	-13.00	50.62	-3.04	RMS	Vertical
6	16088.35	-54.68	-61.27	-13.00	48.27	-6.59	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	512	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

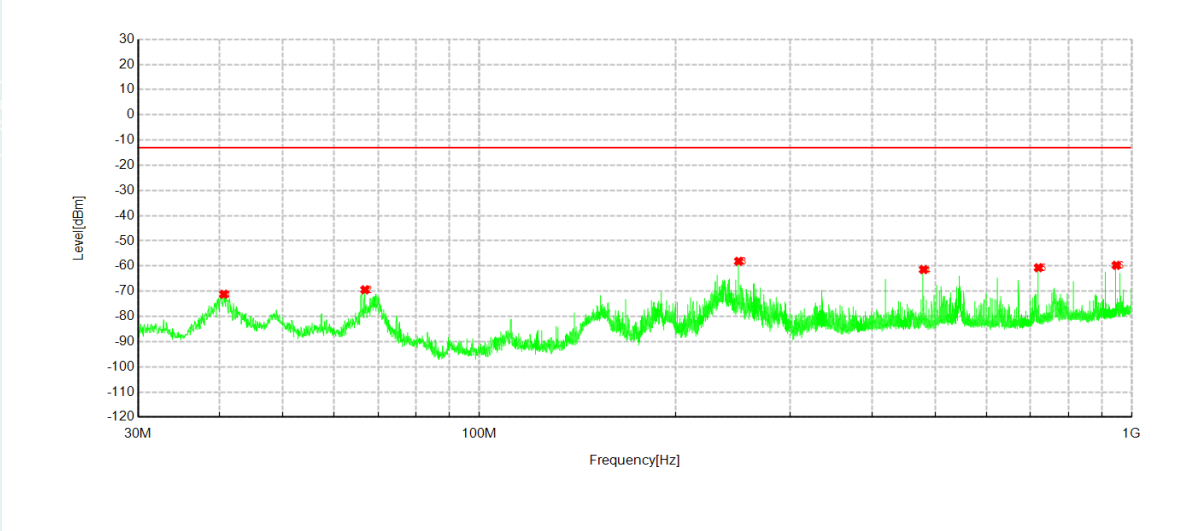


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-56.94	-71.19	-13.00	58.19	-14.25	RMS	Horizontal
2	66.86	-48.98	-69.43	-13.00	56.43	-20.45	RMS	Horizontal
3	249.996	-41.31	-58.11	-13.00	45.11	-16.80	RMS	Horizontal
4	480.08	-47.33	-61.40	-13.00	48.40	-14.07	RMS	Horizontal
5	720.058	-51.12	-60.67	-13.00	47.67	-9.55	RMS	Horizontal
6	947.6685	-52.78	-59.71	-13.00	46.71	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	512	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

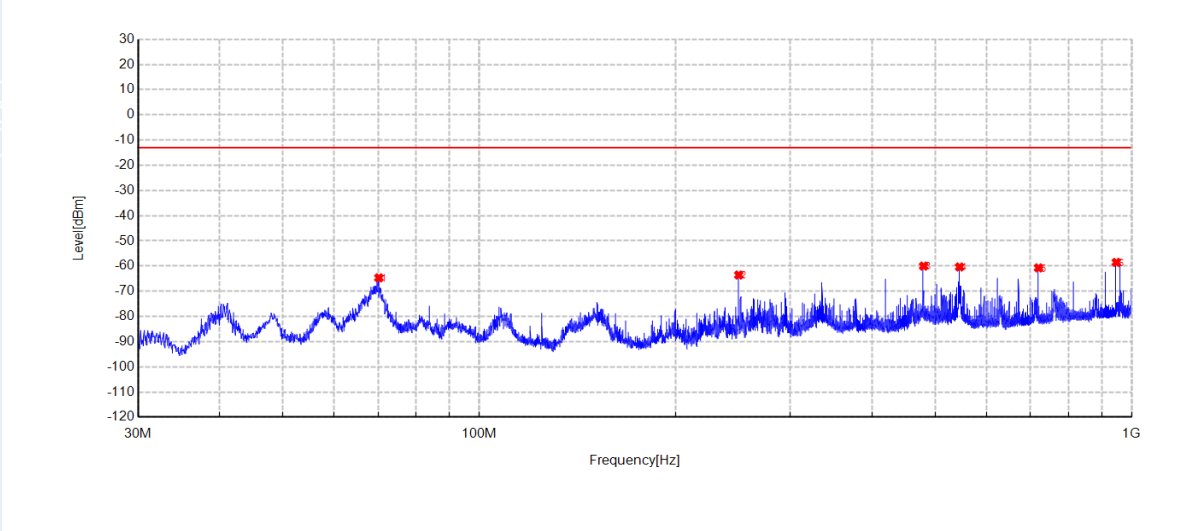


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	70.2065	-41.99	-64.68	-13.00	51.68	-22.69	RMS	Vertical
2	249.996	-42.77	-63.56	-13.00	50.56	-20.79	RMS	Vertical
3	480.08	-47.12	-60.01	-13.00	47.01	-12.89	RMS	Vertical
4	545.0215	-49.49	-60.36	-13.00	47.36	-10.87	RMS	Vertical
5	720.058	-51.51	-60.72	-13.00	47.72	-9.21	RMS	Vertical
6	947.5715	-51.75	-58.54	-13.00	45.54	-6.79	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	661	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

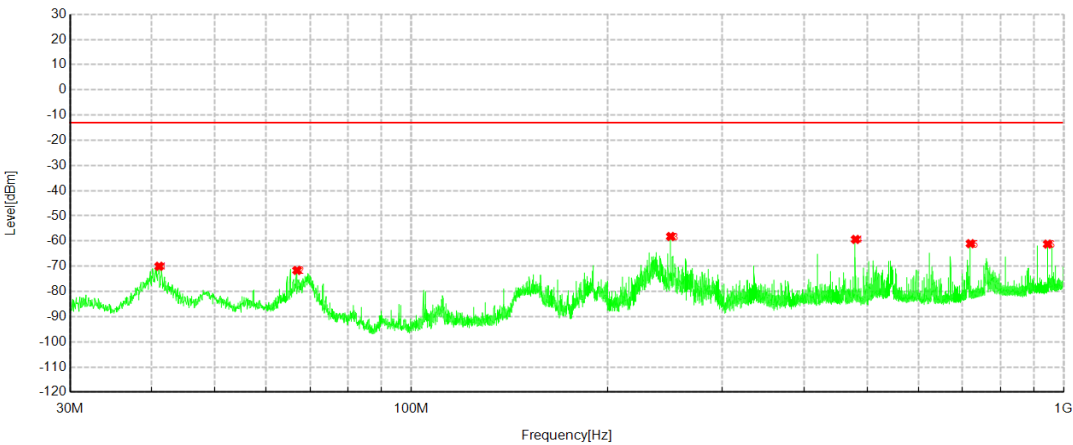


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.1065	-55.68	-70.03	-13.00	57.03	-14.35	RMS	Horizontal
2	66.86	-51.20	-71.65	-13.00	58.65	-20.45	RMS	Horizontal
3	249.996	-41.39	-58.19	-13.00	45.19	-16.80	RMS	Horizontal
4	480.0315	-45.29	-59.36	-13.00	46.36	-14.07	RMS	Horizontal
5	720.058	-51.49	-61.04	-13.00	48.04	-9.55	RMS	Horizontal
6	945.6315	-54.32	-61.23	-13.00	48.23	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	661	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

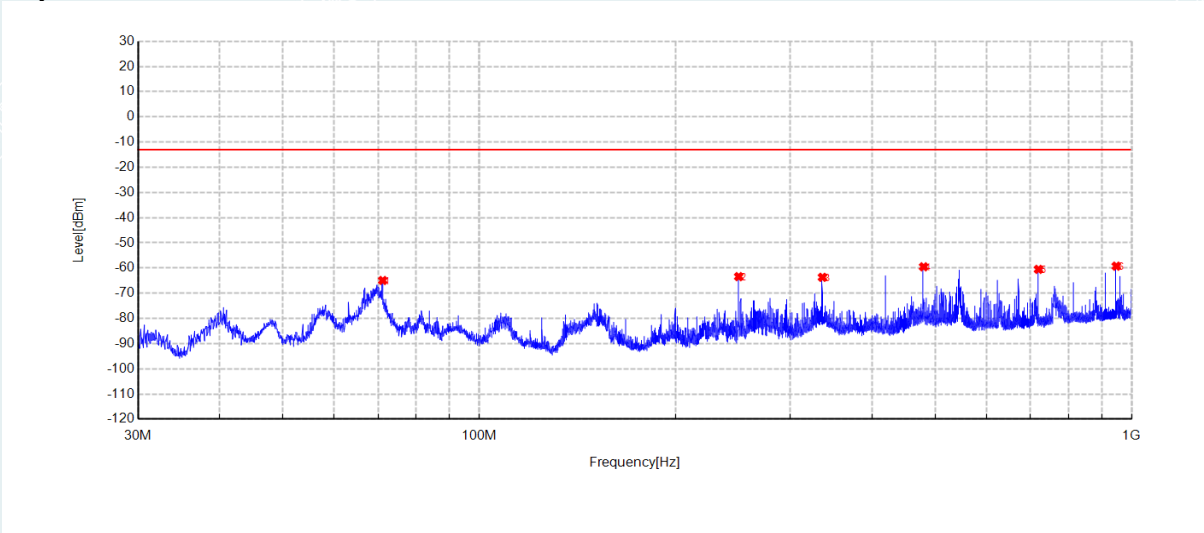


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	71.1765	-42.04	-64.93	-13.00	51.93	-22.89	RMS	Vertical
2	249.996	-42.61	-63.40	-13.00	50.40	-20.79	RMS	Vertical
3	335.9865	-48.41	-63.68	-13.00	50.68	-15.27	RMS	Vertical
4	480.08	-46.61	-59.50	-13.00	46.50	-12.89	RMS	Vertical
5	720.058	-51.31	-60.52	-13.00	47.52	-9.21	RMS	Vertical
6	947.62	-52.46	-59.25	-13.00	46.25	-6.79	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	810	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

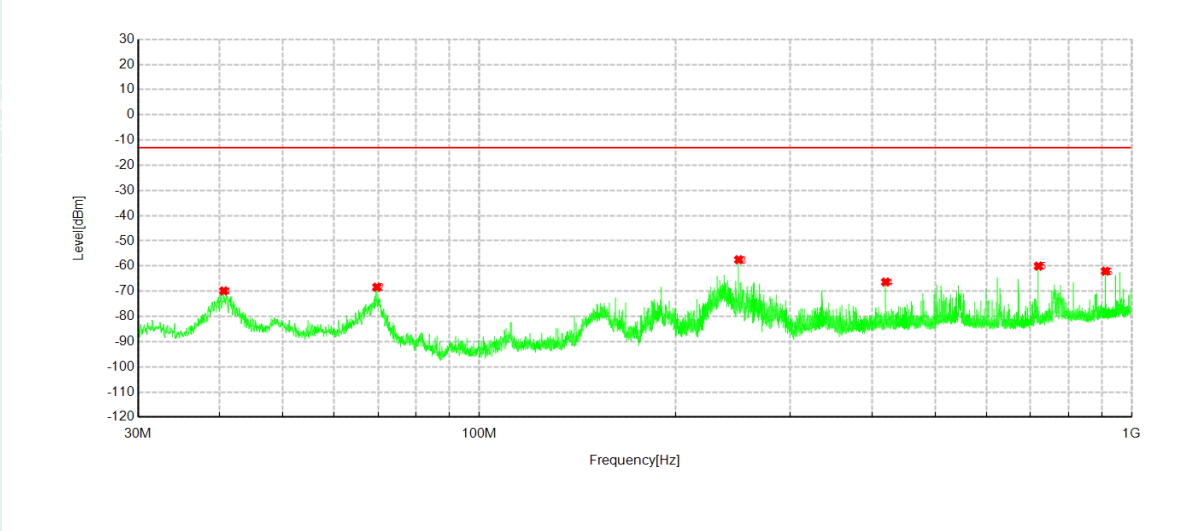


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-55.62	-69.87	-13.00	56.87	-14.25	RMS	Horizontal
2	69.7215	-46.23	-68.39	-13.00	55.39	-22.16	RMS	Horizontal
3	249.996	-40.68	-57.48	-13.00	44.48	-16.80	RMS	Horizontal
4	419.9885	-52.39	-66.35	-13.00	53.35	-13.96	RMS	Horizontal
5	720.058	-50.48	-60.03	-13.00	47.03	-9.55	RMS	Horizontal
6	912.118	-54.49	-62.04	-13.00	49.04	-7.55	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	810	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		


Test Graph

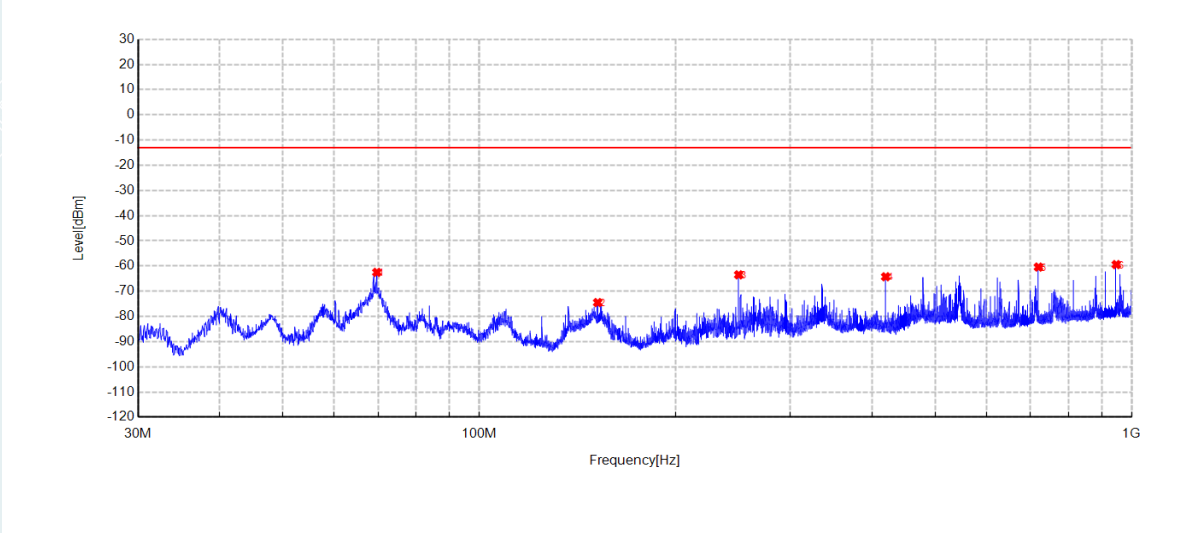

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.7215	-39.83	-62.50	-13.00	49.50	-22.67	RMS	Vertical
2	151.9775	-56.78	-74.50	-13.00	61.50	-17.72	RMS	Vertical
3	249.996	-42.69	-63.48	-13.00	50.48	-20.79	RMS	Vertical
4	419.9885	-49.29	-64.25	-13.00	51.25	-14.96	RMS	Vertical
5	720.058	-51.20	-60.41	-13.00	47.41	-9.21	RMS	Vertical
6	947.62	-52.63	-59.42	-13.00	46.42	-6.79	RMS	Vertical


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	512	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-01-07		

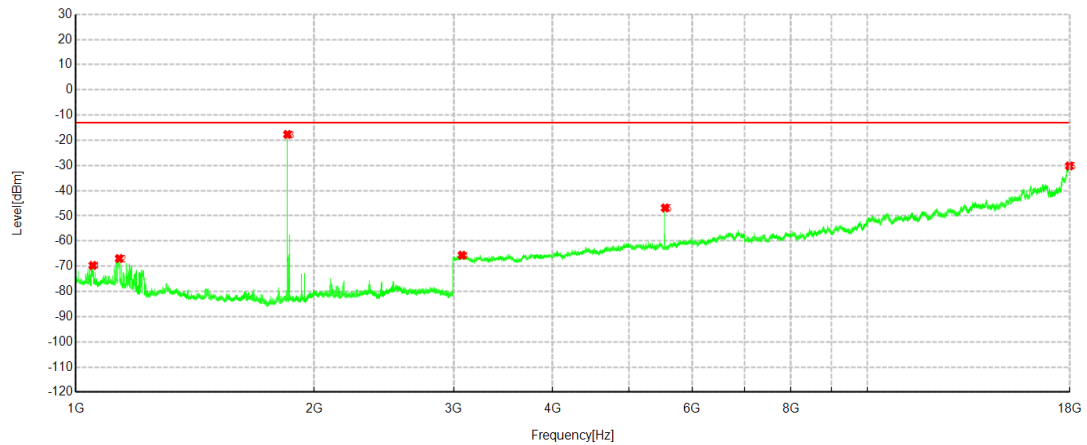Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1050.3	-51.37	-69.71	-13.00	56.71	-18.34	RMS	Horizontal
2	1133.9	-48.58	-66.94	-13.00	53.94	-18.36	RMS	Horizontal
3	1850.2	4.37	-17.68	/	/	-22.05	RMS	Horizontal
4	3074.25	-62.61	-65.65	-13.00	52.65	-3.04	RMS	Horizontal
5	5550	-50.83	-46.86	-13.00	33.86	3.97	RMS	Horizontal
6	17987.25	-66.72	-30.20	-13.00	17.20	36.52	RMS	Horizontal

NOTE: NO.3 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	512	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-01-07		

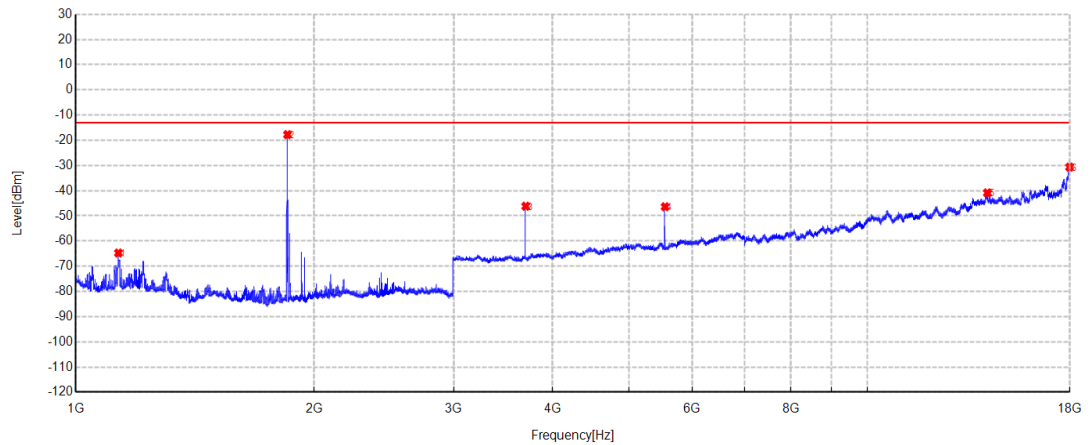Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1131.6	-45.25	-64.75	-13.00	51.75	-19.50	RMS	Vertical
2	1850.3	4.26	-17.76	/	/	-22.02	RMS	Vertical
3	3699.75	-43.91	-46.18	-13.00	33.18	-2.27	RMS	Vertical
4	5550	-50.44	-46.40	-13.00	33.40	4.04	RMS	Vertical
5	14170.5	-69.96	-40.89	-13.00	27.89	29.07	RMS	Vertical
6	17999.25	-66.95	-30.67	-13.00	17.67	36.28	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	661	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-01-07		

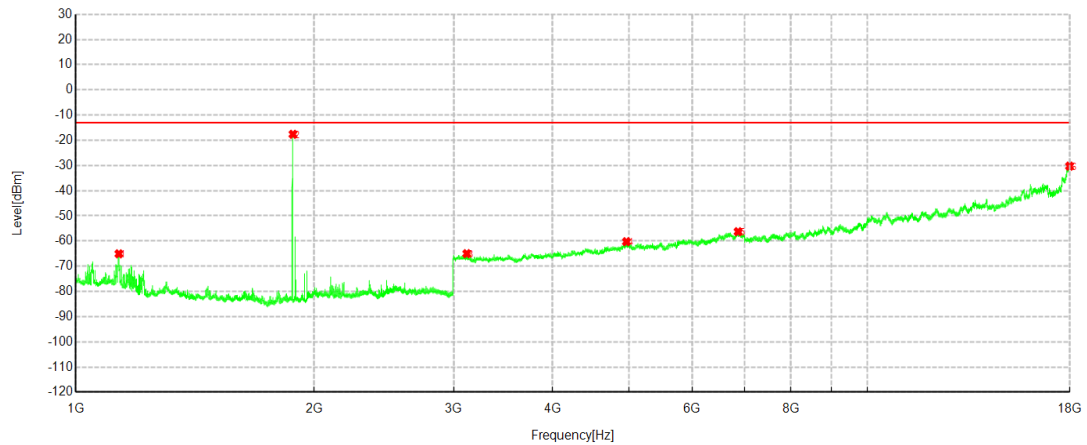Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133.1	-46.73	-65.07	-13.00	52.07	-18.34	RMS	Horizontal
2	1880	4.40	-17.62	/	/	-22.02	RMS	Horizontal
3	3117	-61.81	-65.01	-13.00	52.01	-3.20	RMS	Horizontal
4	4959	-64.46	-60.26	-13.00	47.26	4.20	RMS	Horizontal
5	6861.75	-66.68	-56.28	-13.00	43.28	10.40	RMS	Horizontal
6	17999.25	-66.71	-30.28	-13.00	17.28	36.43	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	661	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-01-07		

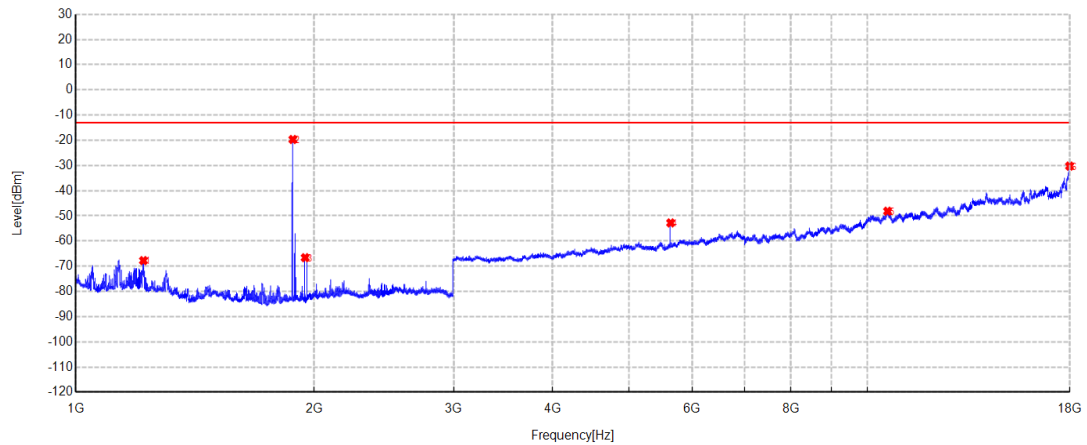Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1216.9	-48.57	-67.76	-13.00	54.76	-19.19	RMS	Vertical
2	1879.5	2.10	-19.69	/	/	-21.79	RMS	Vertical
3	1947.8	-44.83	-66.60	-13.00	53.60	-21.77	RMS	Vertical
4	5640	-58.02	-52.80	-13.00	39.80	5.22	RMS	Vertical
5	10599.75	-70.86	-48.16	-13.00	35.16	22.70	RMS	Vertical
6	17999.25	-66.54	-30.26	-13.00	17.26	36.28	RMS	Vertical


NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	810	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-01-07		

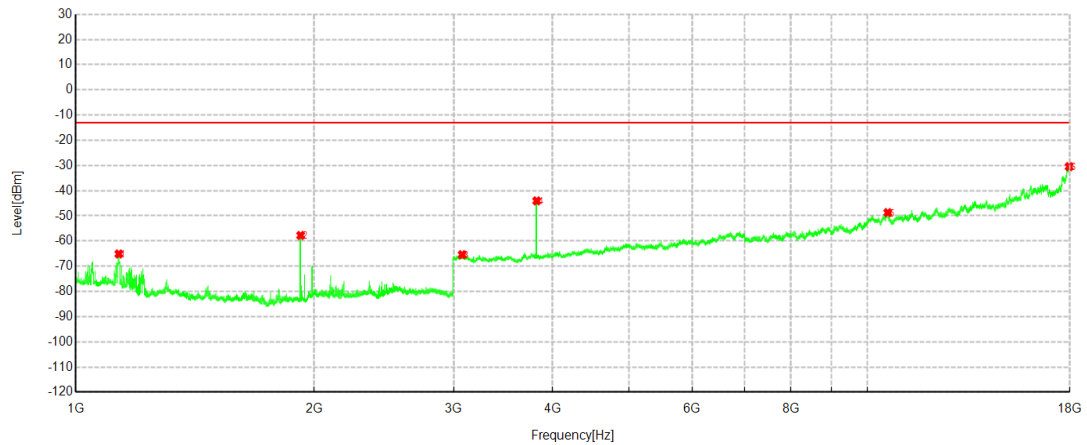Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133	-46.79	-65.13	-13.00	52.13	-18.34	RMS	Horizontal
2	1922.3	-35.89	-57.76	-13.00	44.76	-21.87	RMS	Horizontal
3	3075	-62.37	-65.41	-13.00	52.41	-3.04	RMS	Horizontal
4	3819.75	-42.73	-44.06	-13.00	31.06	-1.33	RMS	Horizontal
5	10607.25	-70.41	-48.72	-13.00	35.72	21.69	RMS	Horizontal
6	17976.75	-67.07	-30.47	-13.00	17.47	36.60	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	810	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-01-07		

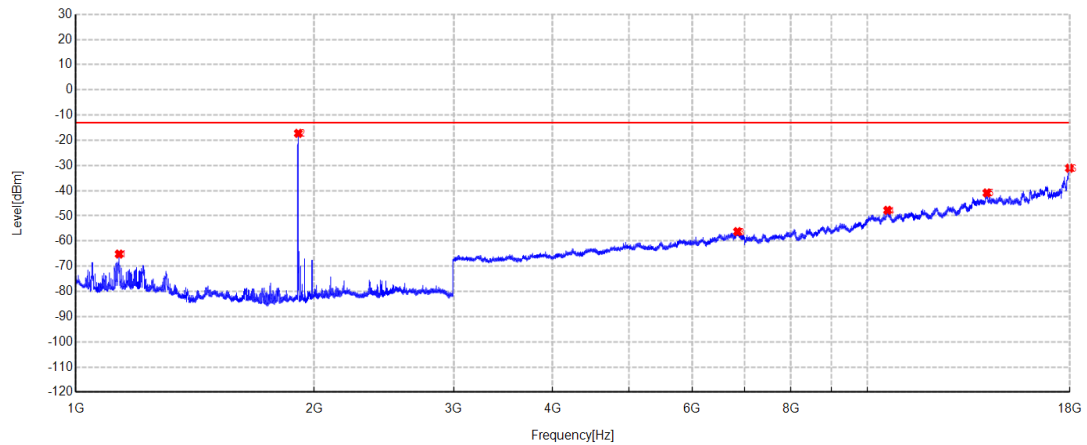
Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133.9	-45.73	-65.17	-13.00	52.17	-19.44	RMS	Vertical
2	1909.8	4.39	-17.26	/	/	-21.65	RMS	Vertical
3	6852	-66.98	-56.25	-13.00	43.25	10.73	RMS	Vertical
4	10602	-70.47	-47.79	-13.00	34.79	22.68	RMS	Vertical
5	14152.5	-70.58	-40.91	-13.00	27.91	29.67	RMS	Vertical
6	17992.5	-67.04	-31.09	-13.00	18.09	35.95	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	512	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

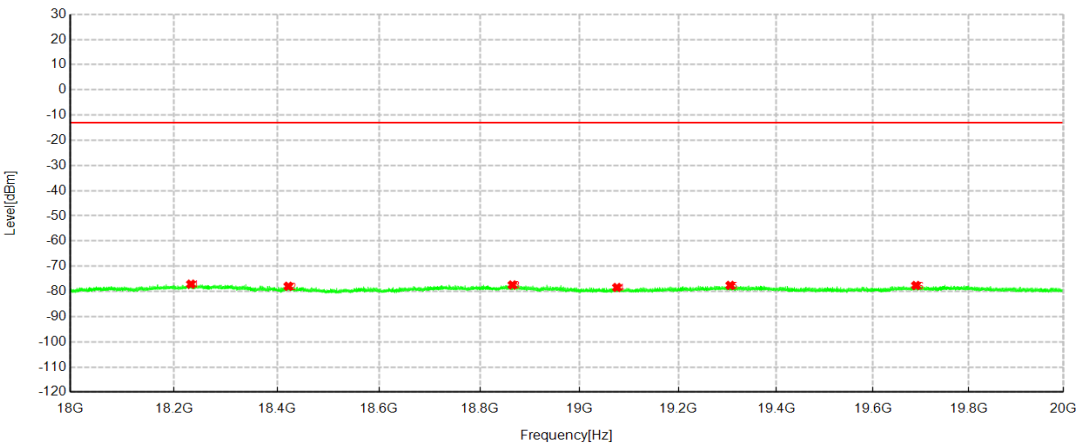


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18232.40	-62.02	-77.12	-13.00	64.12	-15.10	RMS	Horizontal
2	18421.77	-61.70	-77.95	-13.00	64.95	-16.25	RMS	Horizontal
3	18864.67	-61.41	-77.43	-13.00	64.43	-16.02	RMS	Horizontal
4	19075.00	-62.11	-78.43	-13.00	65.43	-16.32	RMS	Horizontal
5	19305.49	-61.80	-77.60	-13.00	64.60	-15.80	RMS	Horizontal
6	19689.42	-62.23	-77.64	-13.00	64.64	-15.41	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	512	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

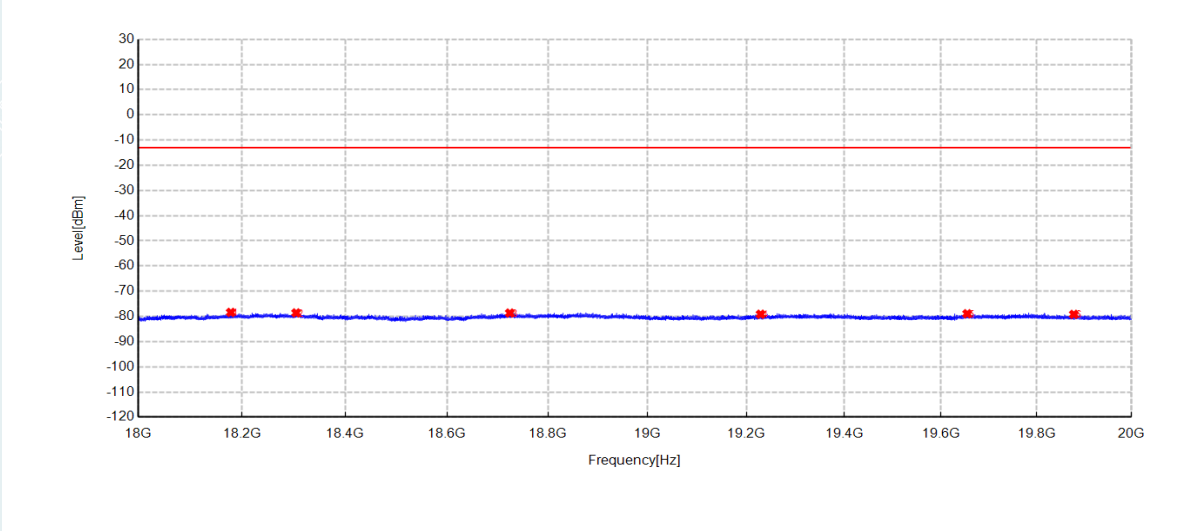


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18178.16	-62.01	-78.40	-13.00	65.40	-16.39	RMS	Vertical
2	18304.57	-62.26	-78.60	-13.00	65.60	-16.34	RMS	Vertical
3	18724.02	-62.29	-78.65	-13.00	65.65	-16.36	RMS	Vertical
4	19228.60	-62.63	-79.13	-13.00	66.13	-16.50	RMS	Vertical
5	19654.54	-62.64	-78.93	-13.00	65.93	-16.29	RMS	Vertical
6	19877.99	-62.99	-79.17	-13.00	66.17	-16.18	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	661	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

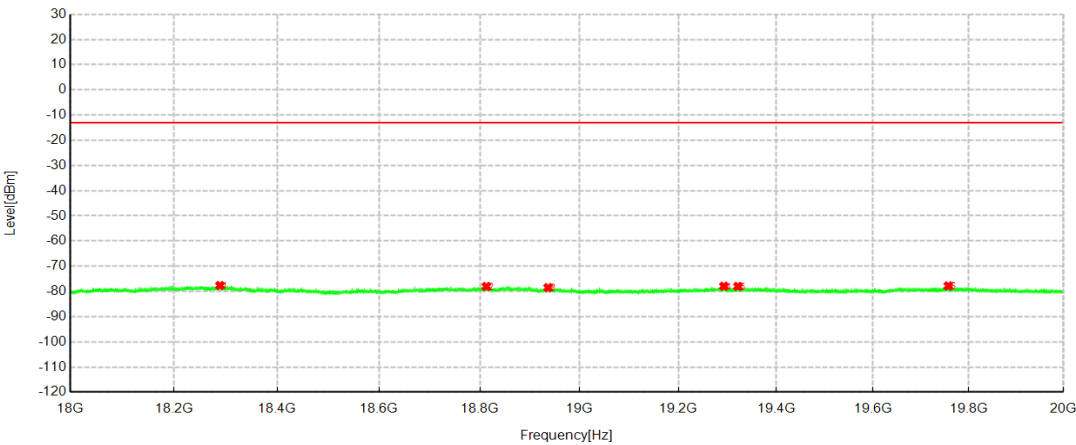


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18288.73	-62.35	-77.64	-13.00	64.64	-15.29	RMS	Horizontal
2	18812.59	-62.23	-78.02	-13.00	65.02	-15.79	RMS	Horizontal
3	18936.19	-62.16	-78.48	-13.00	65.48	-16.32	RMS	Horizontal
4	19292.53	-62.15	-77.92	-13.00	64.92	-15.77	RMS	Horizontal
5	19321.33	-62.16	-77.99	-13.00	64.99	-15.83	RMS	Horizontal
6	19757.03	-62.62	-77.80	-13.00	64.80	-15.18	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	661	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

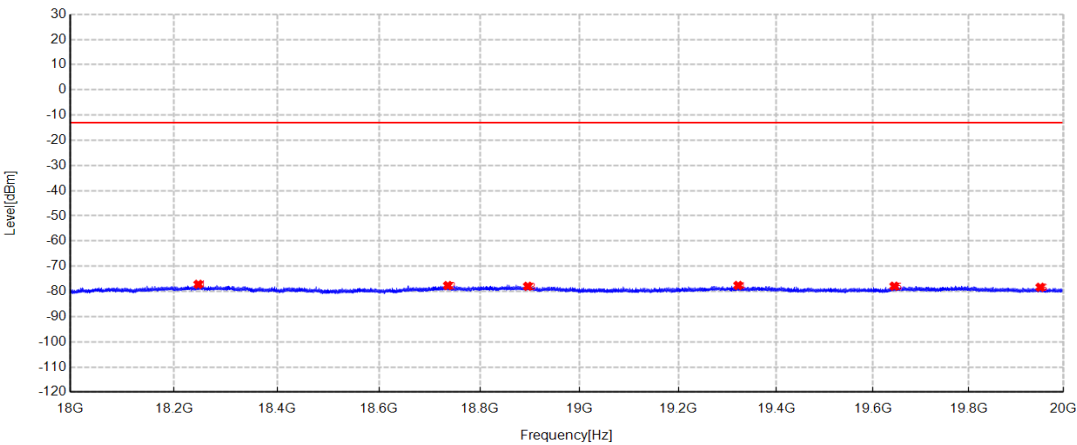


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18246.64	-61.14	-77.18	-13.00	64.18	-16.04	RMS	Vertical
2	18735.86	-61.38	-77.67	-13.00	64.67	-16.29	RMS	Vertical
3	18895.39	-61.21	-77.96	-13.00	64.96	-16.75	RMS	Vertical
4	19321.65	-61.08	-77.62	-13.00	64.62	-16.54	RMS	Vertical
5	19644.14	-61.61	-77.92	-13.00	64.92	-16.31	RMS	Vertical
6	19950.71	-62.05	-78.35	-13.00	65.35	-16.30	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	810	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

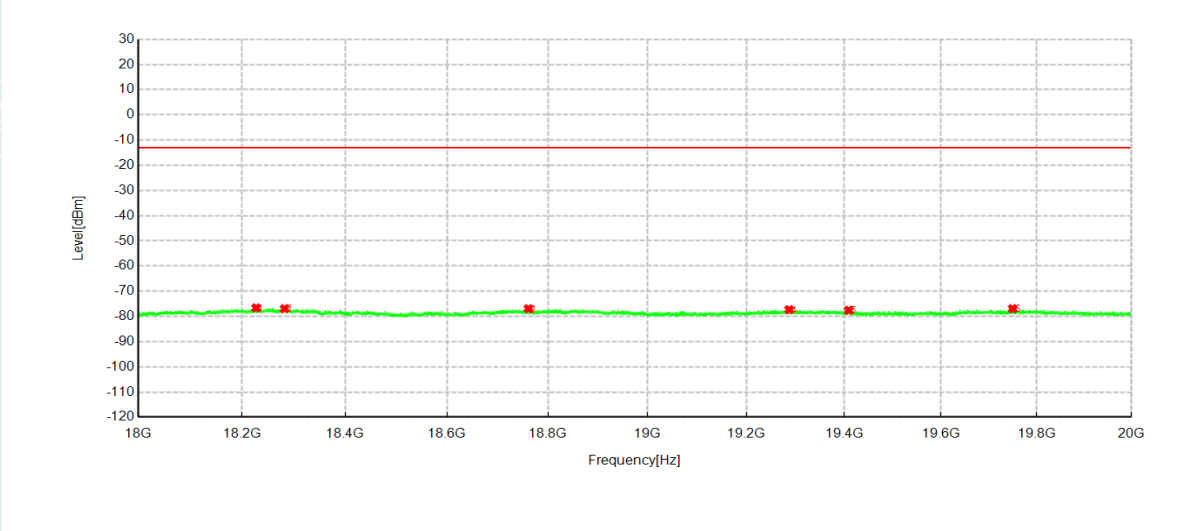


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18226.96	-61.49	-76.62	-13.00	63.62	-15.13	RMS	Horizontal
2	18282.01	-61.69	-76.92	-13.00	63.92	-15.23	RMS	Horizontal
3	18761.07	-61.37	-76.94	-13.00	63.94	-15.57	RMS	Horizontal
4	19286.85	-61.56	-77.32	-13.00	64.32	-15.76	RMS	Horizontal
5	19409.17	-61.55	-77.55	-13.00	64.55	-16.00	RMS	Horizontal
6	19749.43	-61.76	-76.92	-13.00	63.92	-15.16	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	810	Band:	1900
Mode:	GSM	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

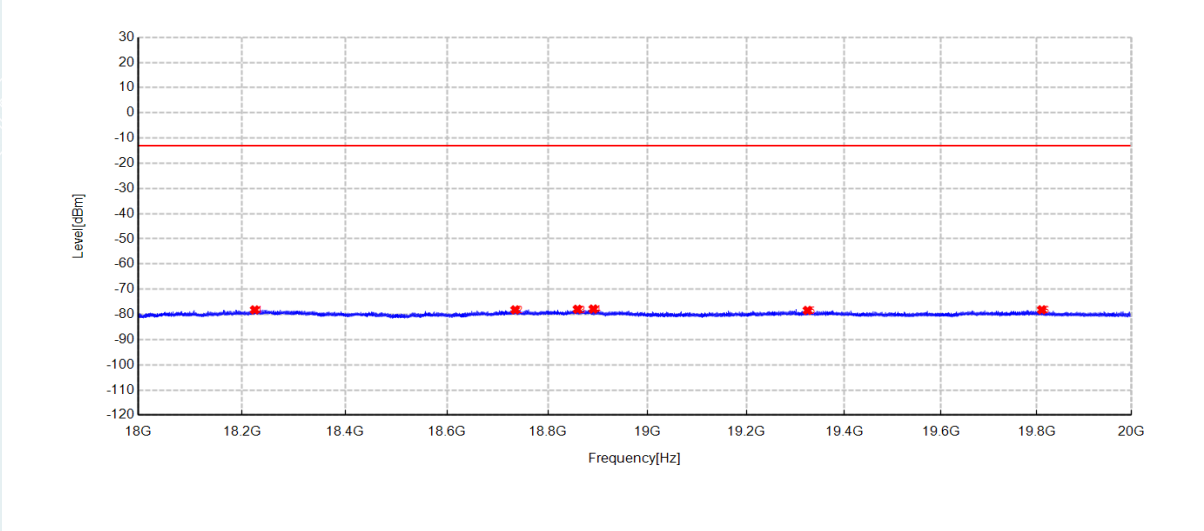


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18224.24	-62.05	-78.20	-13.00	65.20	-16.15	RMS	Vertical
2	18734.58	-61.88	-78.18	-13.00	65.18	-16.30	RMS	Vertical
3	18858.91	-61.33	-77.95	-13.00	64.95	-16.62	RMS	Vertical
4	18890.51	-61.12	-77.85	-13.00	64.85	-16.73	RMS	Vertical
5	19324.45	-61.86	-78.41	-13.00	65.41	-16.55	RMS	Vertical
6	19810.63	-62.10	-78.17	-13.00	65.17	-16.07	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9537	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

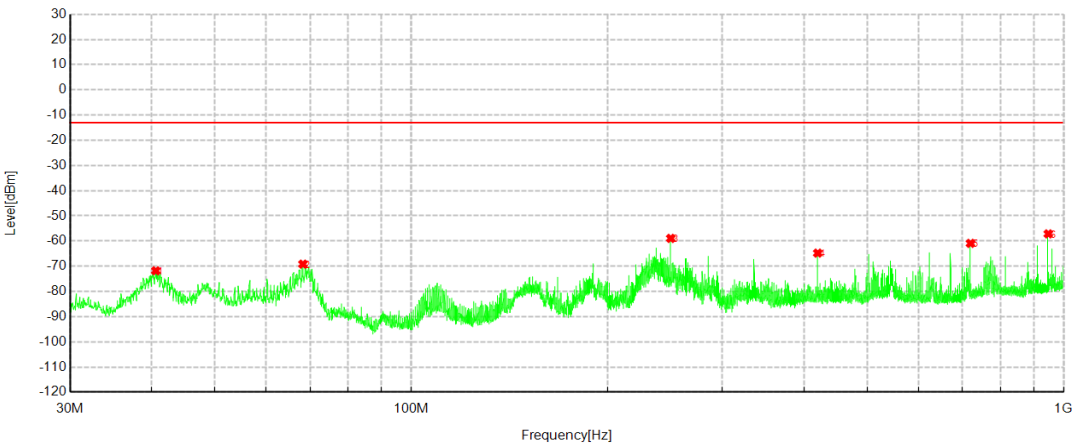


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-57.56	-71.81	-13.00	58.81	-14.25	RMS	Horizontal
2	68.2665	-47.88	-69.17	-13.00	56.17	-21.29	RMS	Horizontal
3	249.996	-42.14	-58.94	-13.00	45.94	-16.80	RMS	Horizontal
4	419.9885	-50.83	-64.79	-13.00	51.79	-13.96	RMS	Horizontal
5	720.058	-51.37	-60.92	-13.00	47.92	-9.55	RMS	Horizontal
6	947.62	-50.22	-57.15	-13.00	44.15	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9537	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

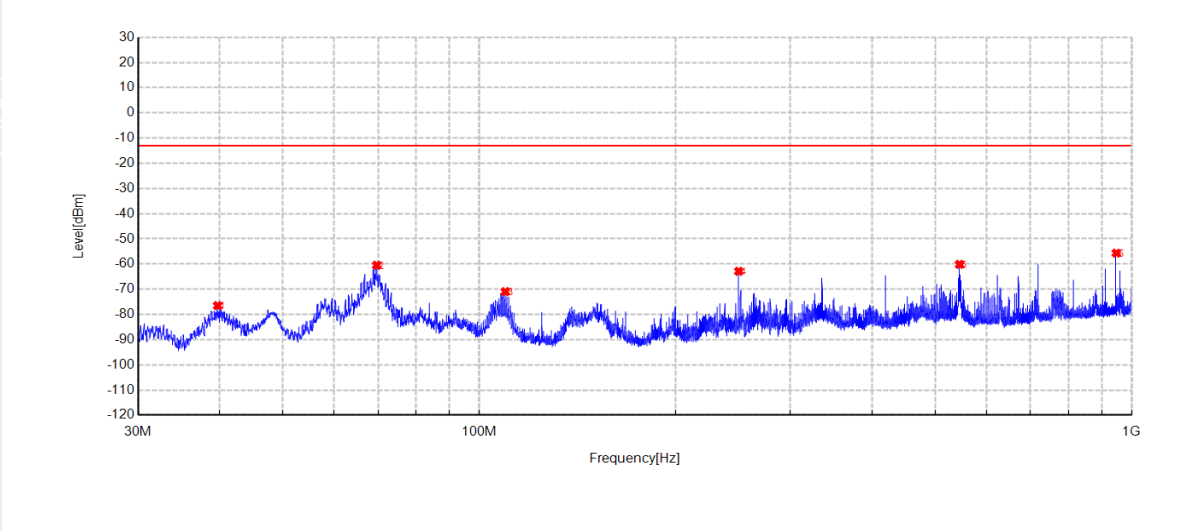


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	39.7485	-52.82	-76.51	-13.00	63.51	-23.69	RMS	Vertical
2	69.673	-37.82	-60.49	-13.00	47.49	-22.67	RMS	Vertical
3	109.6855	-56.55	-70.96	-13.00	57.96	-14.41	RMS	Vertical
4	249.996	-42.08	-62.87	-13.00	49.87	-20.79	RMS	Vertical
5	544.973	-49.26	-60.13	-13.00	47.13	-10.87	RMS	Vertical
6	947.62	-48.88	-55.67	-13.00	42.67	-6.79	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9400	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

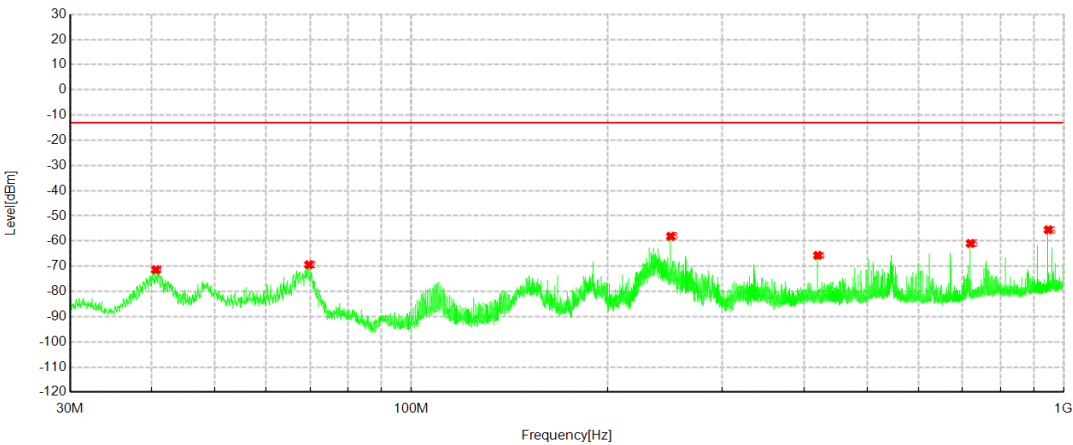


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-57.14	-71.39	-13.00	58.39	-14.25	RMS	Horizontal
2	69.7215	-47.26	-69.42	-13.00	56.42	-22.16	RMS	Horizontal
3	249.996	-41.32	-58.12	-13.00	45.12	-16.80	RMS	Horizontal
4	420.037	-51.74	-65.70	-13.00	52.70	-13.96	RMS	Horizontal
5	720.058	-51.40	-60.95	-13.00	47.95	-9.55	RMS	Horizontal
6	947.62	-48.60	-55.53	-13.00	42.53	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9400	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

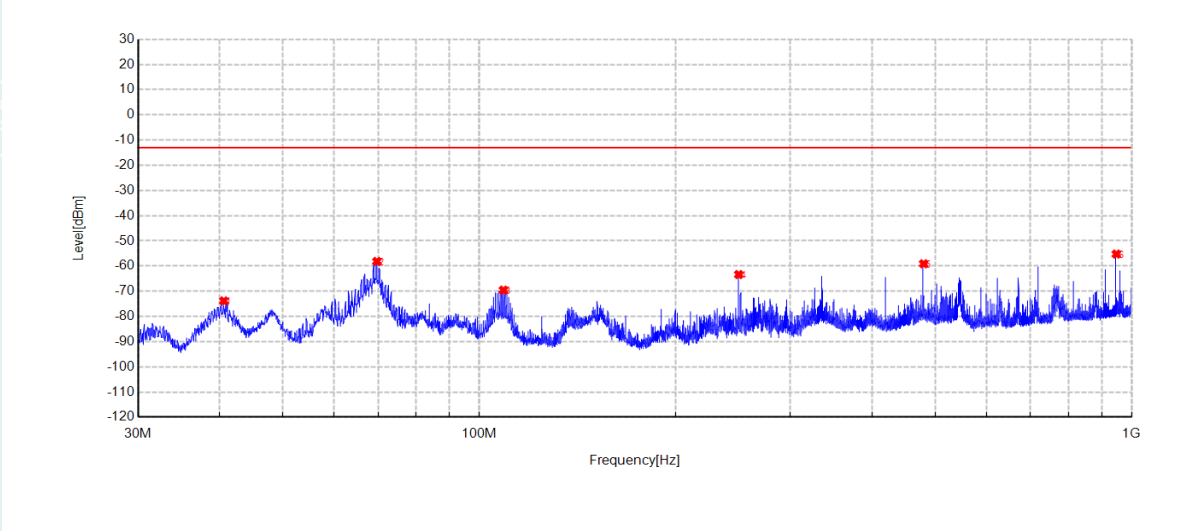


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-50.31	-73.84	-13.00	60.84	-23.53	RMS	Vertical
2	69.7215	-35.51	-58.18	-13.00	45.18	-22.67	RMS	Vertical
3	108.958	-54.90	-69.55	-13.00	56.55	-14.65	RMS	Vertical
4	249.996	-42.58	-63.37	-13.00	50.37	-20.79	RMS	Vertical
5	480.08	-46.21	-59.10	-13.00	46.10	-12.89	RMS	Vertical
6	947.6685	-48.46	-55.25	-13.00	42.25	-6.79	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9263	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

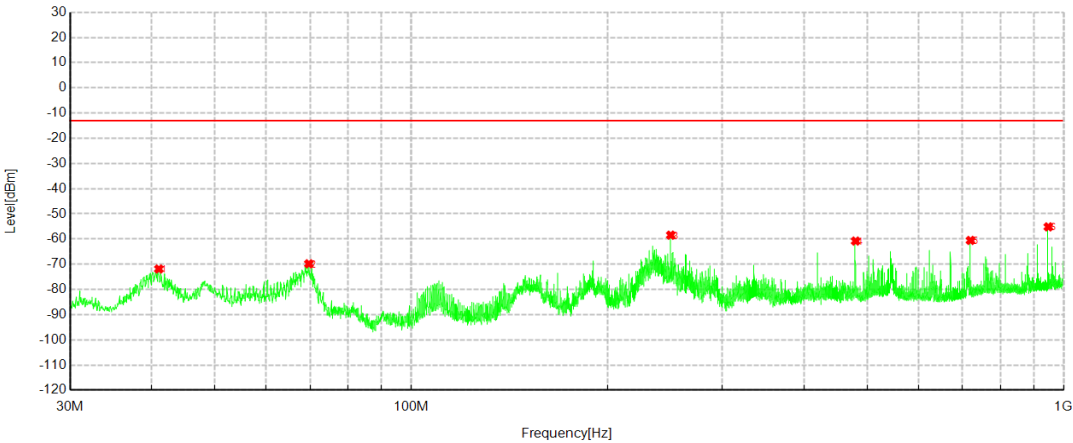


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.058	-57.54	-71.88	-13.00	58.88	-14.34	RMS	Horizontal
2	69.7215	-47.67	-69.83	-13.00	56.83	-22.16	RMS	Horizontal
3	249.996	-41.65	-58.45	-13.00	45.45	-16.80	RMS	Horizontal
4	480.0315	-46.73	-60.80	-13.00	47.80	-14.07	RMS	Horizontal
5	720.058	-50.99	-60.54	-13.00	47.54	-9.55	RMS	Horizontal
6	947.6685	-48.24	-55.17	-13.00	42.17	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9263	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		


Test Graph

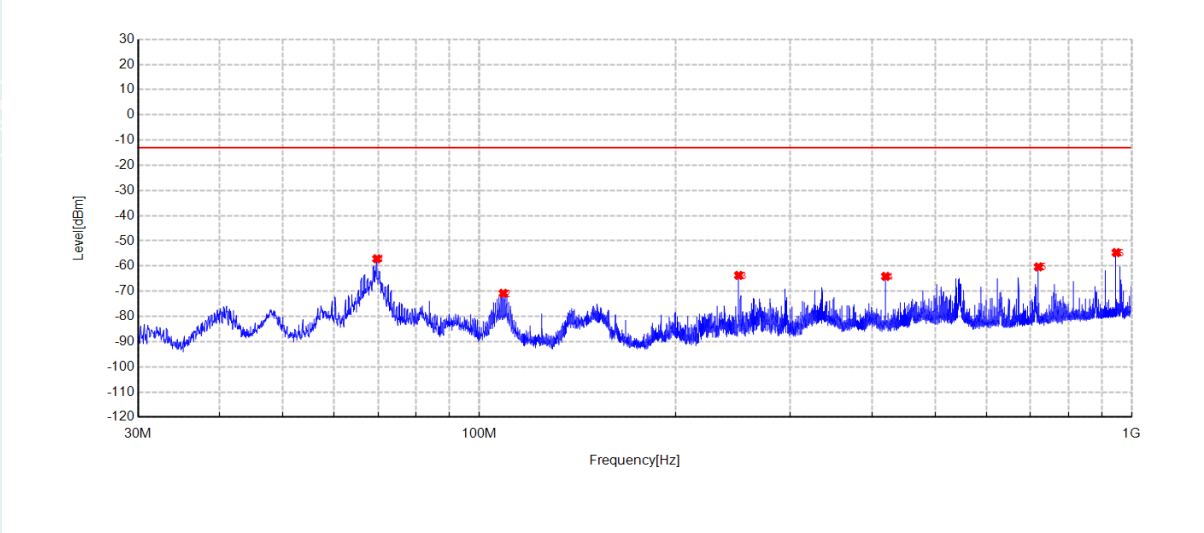

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.7215	-34.44	-57.11	-13.00	44.11	-22.67	RMS	Vertical
2	108.9095	-56.15	-70.82	-13.00	57.82	-14.67	RMS	Vertical
3	249.996	-42.91	-63.70	-13.00	50.70	-20.79	RMS	Vertical
4	419.9885	-49.15	-64.11	-13.00	51.11	-14.96	RMS	Vertical
5	720.058	-51.14	-60.35	-13.00	47.35	-9.21	RMS	Vertical
6	947.62	-47.88	-54.67	-13.00	41.67	-6.79	RMS	Vertical


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9263	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

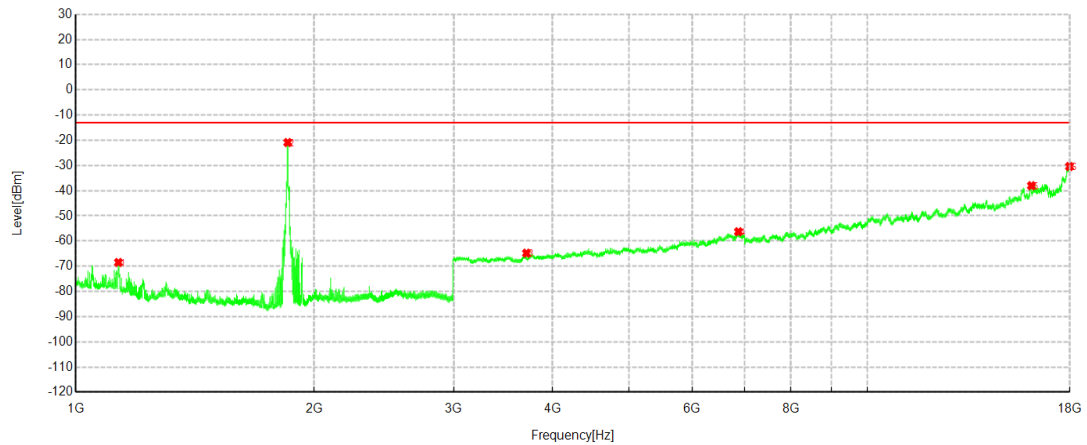Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1131.6	-50.19	-68.50	-13.00	55.50	-18.31	RMS	Horizontal
2	1851.7	1.14	-20.90	/	/	-22.04	RMS	Horizontal
3	3708	-63.10	-64.82	-13.00	51.82	-1.72	RMS	Horizontal
4	6869.25	-66.64	-56.30	-13.00	43.30	10.34	RMS	Horizontal
5	16108.5	-65.39	-38.04	-13.00	25.04	27.35	RMS	Horizontal
6	17994.75	-66.88	-30.41	-13.00	17.41	36.47	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9263	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

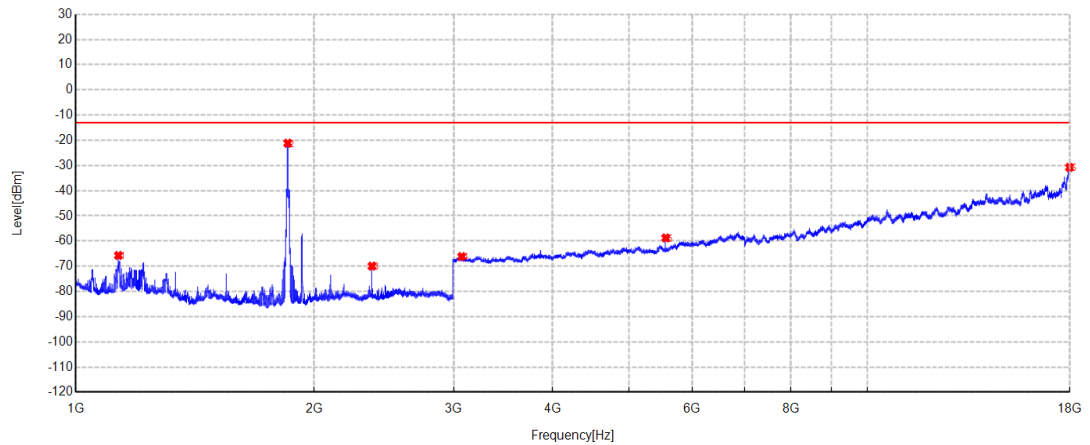Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1131.6	-46.25	-65.75	-13.00	52.75	-19.50	RMS	Vertical
2	1851.7	0.82	-21.18	/	/	-22.00	RMS	Vertical
3	2365.7	-51.15	-69.96	-13.00	56.96	-18.81	RMS	Vertical
4	3071.25	-62.81	-66.17	-13.00	53.17	-3.36	RMS	Vertical
5	5559.75	-62.86	-58.78	-13.00	45.78	4.08	RMS	Vertical
6	17994	-66.80	-30.78	-13.00	17.78	36.02	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9400	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

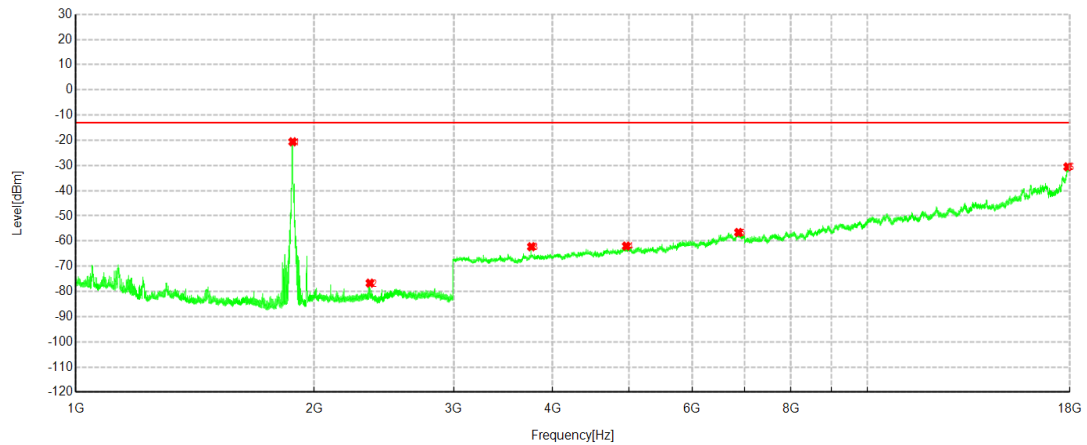Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1878.7	1.42	-20.61	/	/	-22.03	RMS	Horizontal
2	2351.9	-58.39	-76.71	-13.00	63.71	-18.32	RMS	Horizontal
3	3762	-60.90	-62.27	-13.00	49.27	-1.37	RMS	Horizontal
4	4957.5	-66.21	-62.01	-13.00	49.01	4.20	RMS	Horizontal
5	6871.5	-66.91	-56.59	-13.00	43.59	10.32	RMS	Horizontal
6	17901.75	-67.25	-30.55	-13.00	17.55	36.70	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9400	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

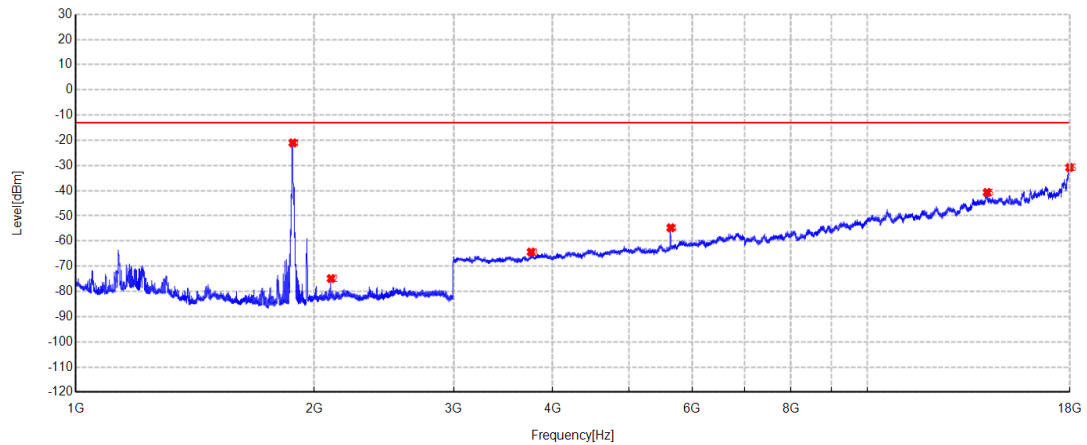Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1879.2	0.75	-21.04	/	/	-21.79	RMS	Vertical
2	2100.2	-54.63	-74.90	-13.00	61.90	-20.27	RMS	Vertical
3	3758.25	-62.84	-64.38	-13.00	51.38	-1.54	RMS	Vertical
4	5642.25	-60.02	-54.75	-13.00	41.75	5.27	RMS	Vertical
5	14157	-70.24	-40.72	-13.00	27.72	29.52	RMS	Vertical
6	17998.5	-67.08	-30.83	-13.00	17.83	36.25	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9537	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

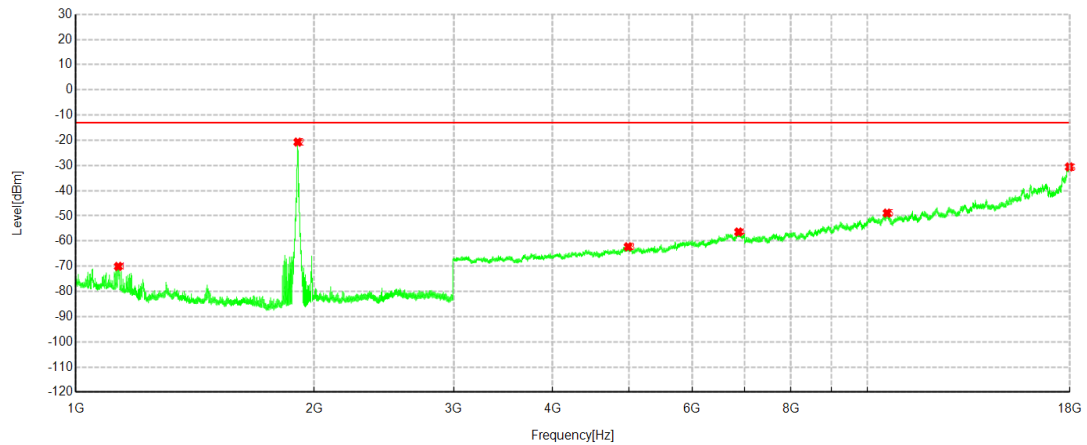Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1131.1	-51.78	-70.08	-13.00	57.08	-18.30	RMS	Horizontal
2	1906.5	1.24	-20.73	/	/	-21.97	RMS	Horizontal
3	4983.75	-66.49	-62.29	-13.00	49.29	4.20	RMS	Horizontal
4	6872.25	-66.72	-56.40	-13.00	43.40	10.32	RMS	Horizontal
5	10585.5	-70.24	-48.91	-13.00	35.91	21.33	RMS	Horizontal
6	17985	-67.12	-30.58	-13.00	17.58	36.54	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9537	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

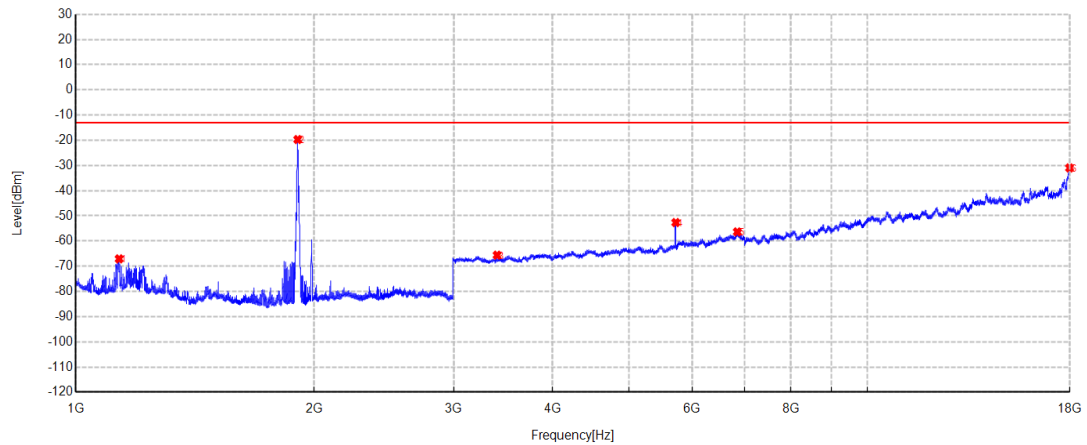
Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1134	-47.62	-67.07	-13.00	54.07	-19.45	RMS	Vertical
2	1906.3	1.94	-19.71	/	/	-21.65	RMS	Vertical
3	3404.25	-62.60	-65.61	-13.00	52.61	-3.01	RMS	Vertical
4	5724.75	-57.82	-52.66	-13.00	39.66	5.16	RMS	Vertical
5	6846.75	-67.02	-56.36	-13.00	43.36	10.66	RMS	Vertical
6	17997	-67.17	-30.99	-13.00	17.99	36.18	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9263	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

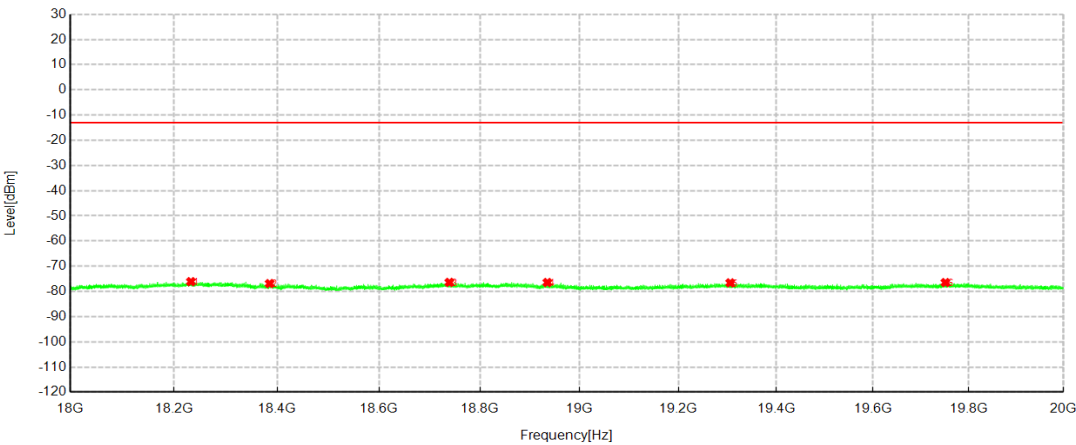


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18232.40	-61.02	-76.12	-13.00	63.12	-15.10	RMS	Horizontal
2	18385.21	-60.89	-76.88	-13.00	63.88	-15.99	RMS	Horizontal
3	18739.06	-60.83	-76.41	-13.00	63.41	-15.58	RMS	Horizontal
4	18934.75	-60.14	-76.45	-13.00	63.45	-16.31	RMS	Horizontal
5	19305.49	-60.80	-76.60	-13.00	63.60	-15.80	RMS	Horizontal
6	19751.11	-61.32	-76.48	-13.00	63.48	-15.16	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9263	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

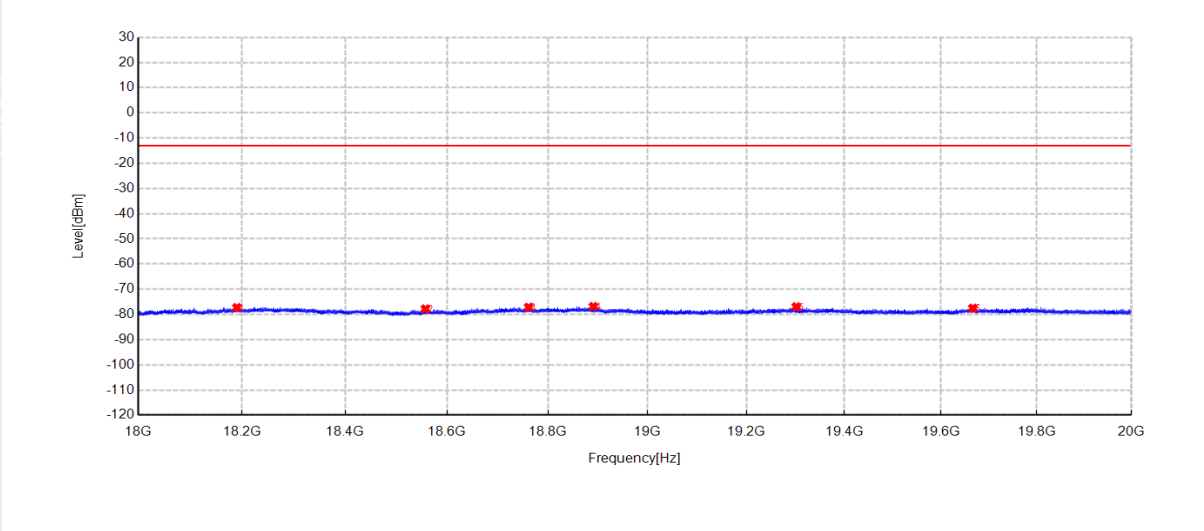


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18189.76	-60.94	-77.27	-13.00	64.27	-16.33	RMS	Vertical
2	18557.06	-60.63	-77.82	-13.00	64.82	-17.19	RMS	Vertical
3	18761.31	-60.86	-77.13	-13.00	64.13	-16.27	RMS	Vertical
4	18890.51	-60.12	-76.85	-13.00	63.85	-16.73	RMS	Vertical
5	19301.41	-60.45	-76.96	-13.00	63.96	-16.51	RMS	Vertical
6	19666.22	-61.28	-77.52	-13.00	64.52	-16.24	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9400	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

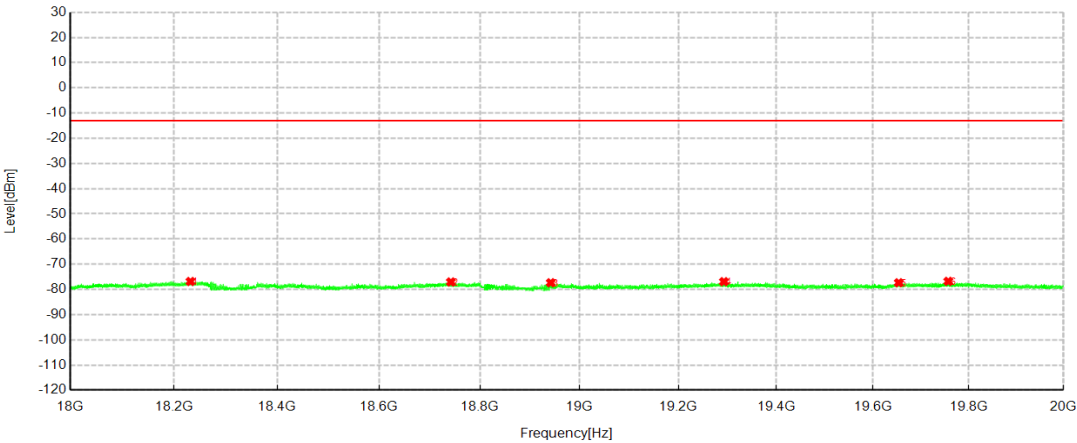


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18231.52	-61.75	-76.85	-13.00	63.85	-15.10	RMS	Horizontal
2	18741.94	-61.47	-77.04	-13.00	64.04	-15.57	RMS	Horizontal
3	18941.47	-61.00	-77.34	-13.00	64.34	-16.34	RMS	Horizontal
4	19292.53	-61.15	-76.92	-13.00	63.92	-15.77	RMS	Horizontal
5	19653.58	-61.78	-77.34	-13.00	64.34	-15.56	RMS	Horizontal
6	19757.03	-61.62	-76.80	-13.00	63.80	-15.18	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9400	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

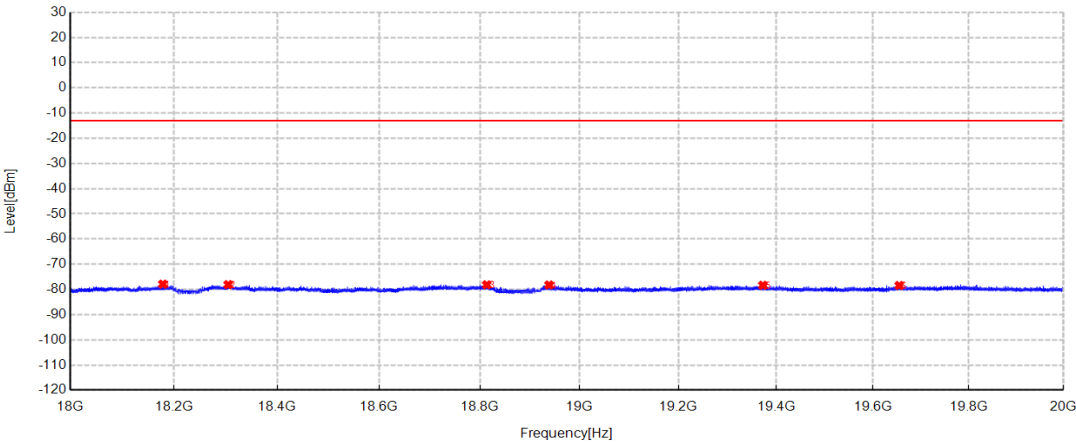


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18178.16	-61.51	-77.90	-13.00	64.90	-16.39	RMS	Vertical
2	18304.57	-61.76	-78.10	-13.00	65.10	-16.34	RMS	Vertical
3	18813.39	-61.71	-78.17	-13.00	65.17	-16.46	RMS	Vertical
4	18938.19	-61.32	-78.23	-13.00	65.23	-16.91	RMS	Vertical
5	19372.29	-61.75	-78.36	-13.00	65.36	-16.61	RMS	Vertical
6	19654.54	-62.14	-78.43	-13.00	65.43	-16.29	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9537	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

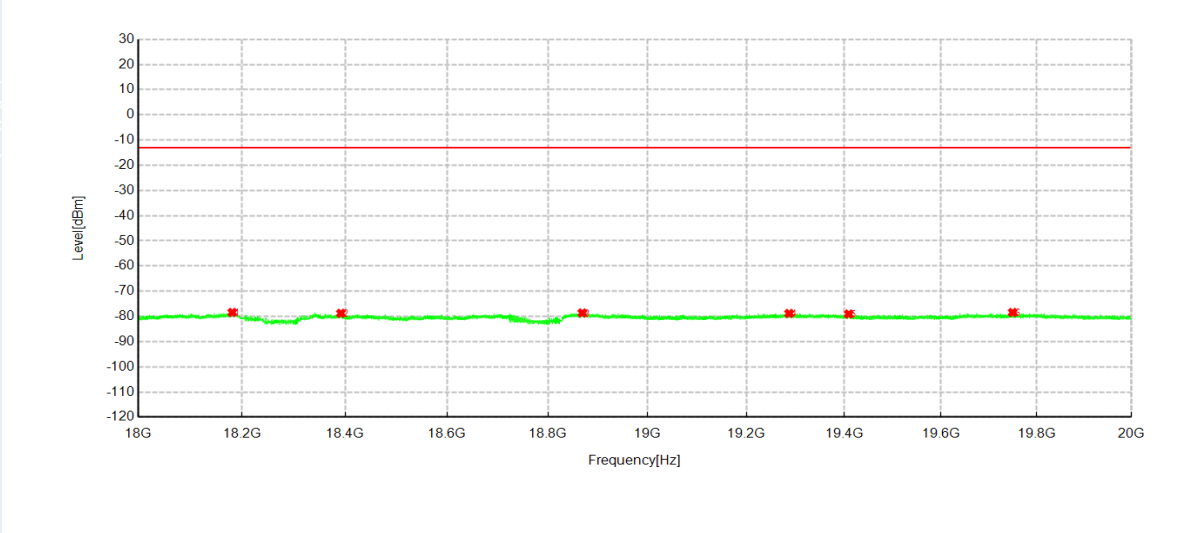


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18180.96	-63.03	-78.42	-13.00	65.42	-15.39	RMS	Horizontal
2	18391.53	-62.72	-78.76	-13.00	65.76	-16.04	RMS	Horizontal
3	18868.43	-62.60	-78.62	-13.00	65.62	-16.02	RMS	Horizontal
4	19286.85	-63.06	-78.82	-13.00	65.82	-15.76	RMS	Horizontal
5	19409.17	-63.05	-79.05	-13.00	66.05	-16.00	RMS	Horizontal
6	19749.43	-63.26	-78.42	-13.00	65.42	-15.16	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	9537	Band:	II
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

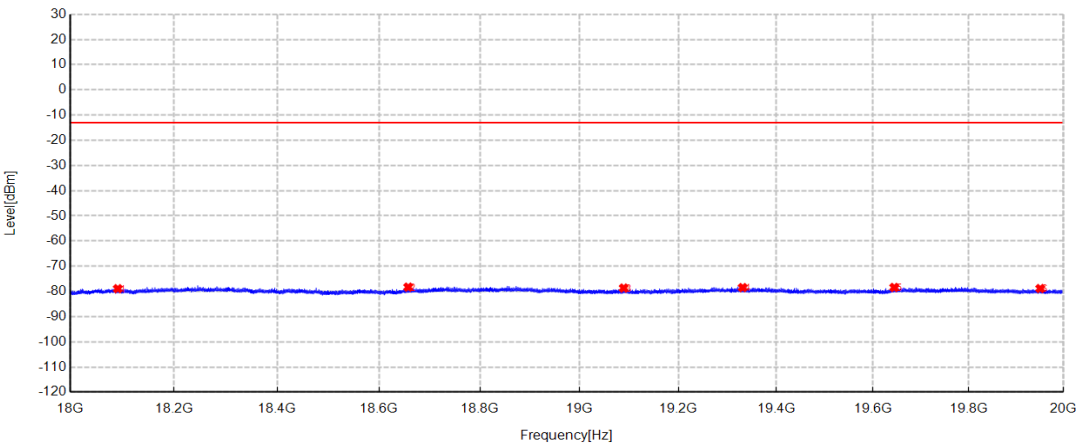


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18091.52	-62.08	-78.92	-13.00	65.92	-16.84	RMS	Vertical
2	18657.38	-61.61	-78.30	-13.00	65.30	-16.69	RMS	Vertical
3	19088.60	-61.77	-78.66	-13.00	65.66	-16.89	RMS	Vertical
4	19330.93	-61.92	-78.47	-13.00	65.47	-16.55	RMS	Vertical
5	19644.14	-62.11	-78.42	-13.00	65.42	-16.31	RMS	Vertical
6	19950.71	-62.55	-78.85	-13.00	65.85	-16.30	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1512	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

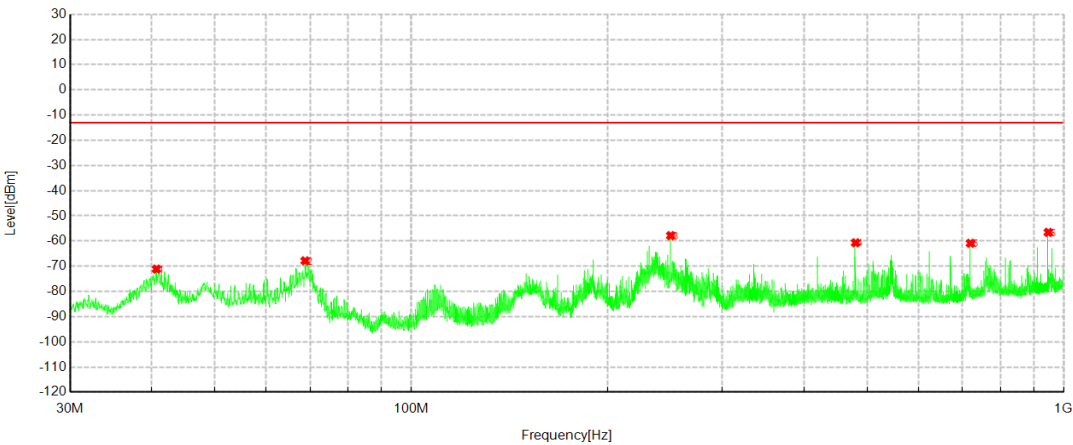


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.7185	-56.88	-71.14	-13.00	58.14	-14.26	RMS	Horizontal
2	68.8	-46.24	-67.85	-13.00	54.85	-21.61	RMS	Horizontal
3	249.996	-41.04	-57.84	-13.00	44.84	-16.80	RMS	Horizontal
4	480.0315	-46.62	-60.69	-13.00	47.69	-14.07	RMS	Horizontal
5	720.058	-51.33	-60.88	-13.00	47.88	-9.55	RMS	Horizontal
6	947.62	-49.63	-56.56	-13.00	43.56	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1512	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

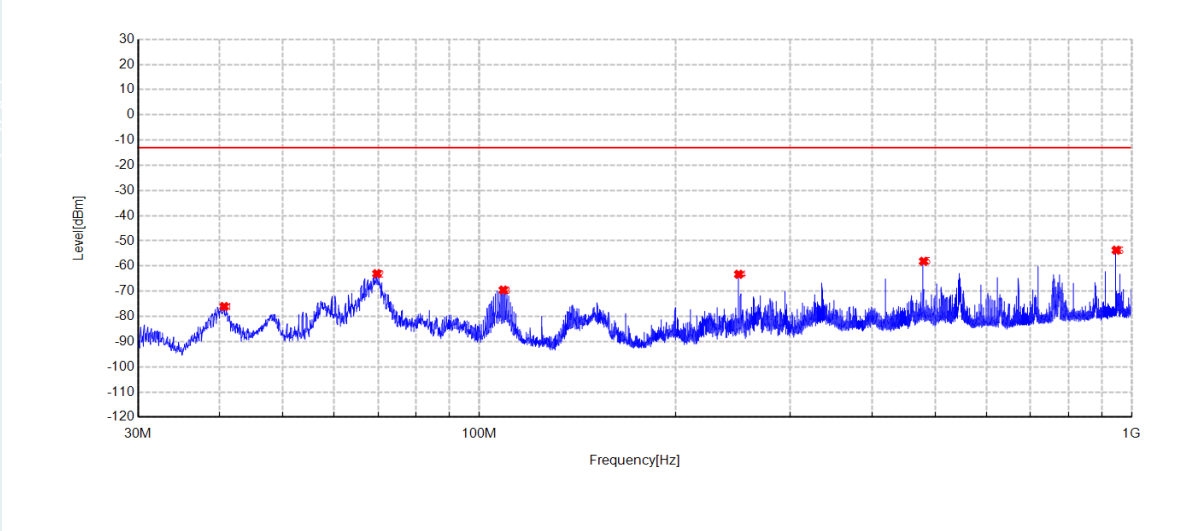


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.67	-52.55	-76.07	-13.00	63.07	-23.52	RMS	Vertical
2	69.7215	-40.36	-63.03	-13.00	50.03	-22.67	RMS	Vertical
3	108.9095	-54.86	-69.53	-13.00	56.53	-14.67	RMS	Vertical
4	249.996	-42.49	-63.28	-13.00	50.28	-20.79	RMS	Vertical
5	480.0315	-45.22	-58.11	-13.00	45.11	-12.89	RMS	Vertical
6	947.5715	-46.91	-53.70	-13.00	40.70	-6.79	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1450	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

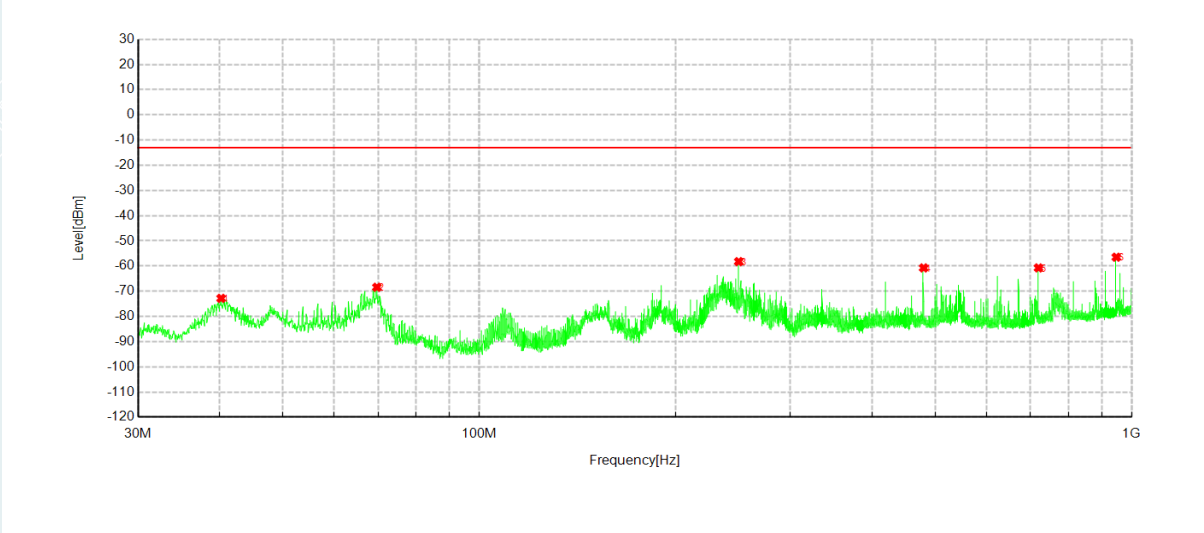


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.2335	-58.65	-72.82	-13.00	59.82	-14.17	RMS	Horizontal
2	69.7215	-46.27	-68.43	-13.00	55.43	-22.16	RMS	Horizontal
3	249.996	-41.44	-58.24	-13.00	45.24	-16.80	RMS	Horizontal
4	480.08	-46.67	-60.74	-13.00	47.74	-14.07	RMS	Horizontal
5	720.058	-51.18	-60.73	-13.00	47.73	-9.55	RMS	Horizontal
6	947.62	-49.56	-56.49	-13.00	43.49	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1450	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

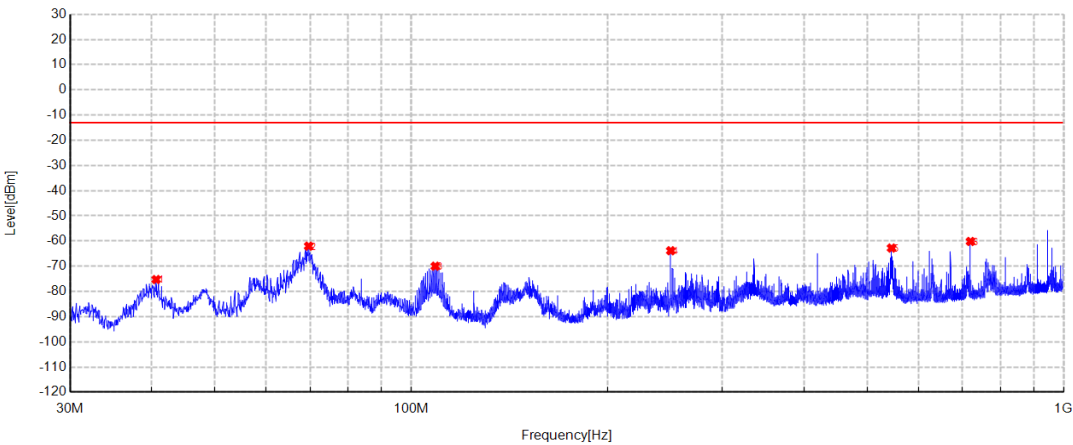


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.67	-51.76	-75.28	-13.00	62.28	-23.52	RMS	Vertical
2	69.673	-39.36	-62.03	-13.00	49.03	-22.67	RMS	Vertical
3	108.9095	-55.32	-69.99	-13.00	56.99	-14.67	RMS	Vertical
4	249.996	-43.06	-63.85	-13.00	50.85	-20.79	RMS	Vertical
5	544.973	-51.91	-62.78	-13.00	49.78	-10.87	RMS	Vertical
6	720.058	-50.95	-60.16	-13.00	47.16	-9.21	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1313	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

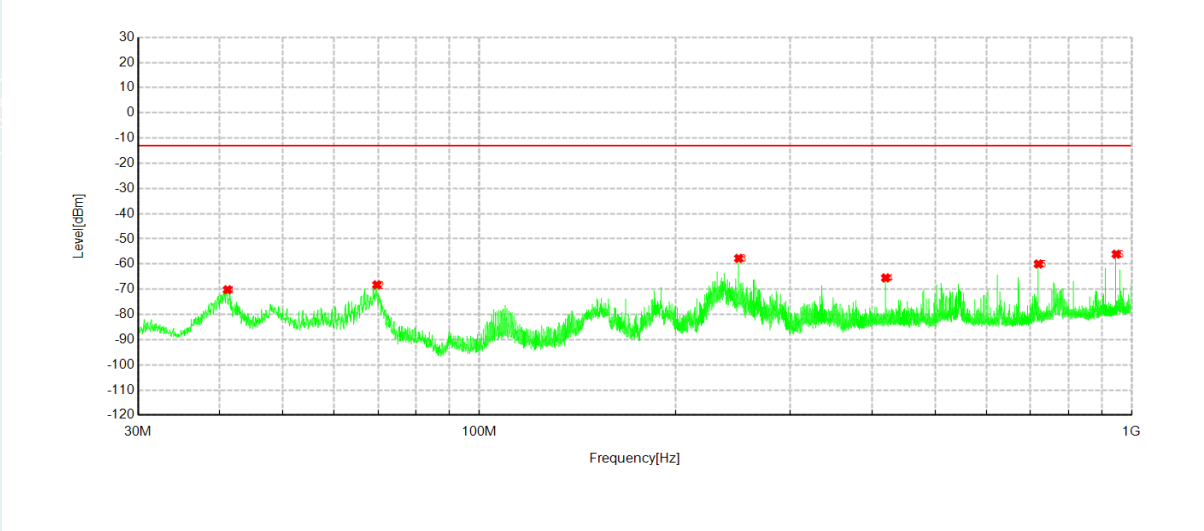


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.155	-55.83	-70.19	-13.00	57.19	-14.36	RMS	Horizontal
2	69.7215	-46.10	-68.26	-13.00	55.26	-22.16	RMS	Horizontal
3	249.996	-40.96	-57.76	-13.00	44.76	-16.80	RMS	Horizontal
4	419.94	-51.55	-65.51	-13.00	52.51	-13.96	RMS	Horizontal
5	720.058	-50.42	-59.97	-13.00	46.97	-9.55	RMS	Horizontal
6	947.6685	-49.16	-56.09	-13.00	43.09	-6.93	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1313	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		


Test Graph

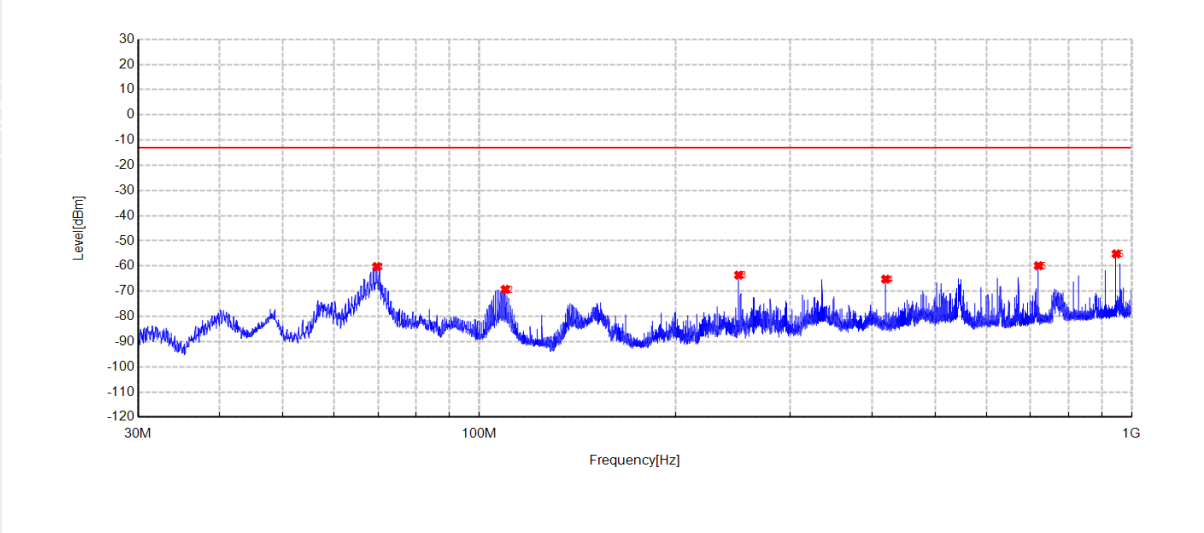

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.7215	-37.55	-60.22	-13.00	47.22	-22.67	RMS	Vertical
2	109.6855	-54.85	-69.26	-13.00	56.26	-14.41	RMS	Vertical
3	249.996	-42.81	-63.60	-13.00	50.60	-20.79	RMS	Vertical
4	419.9885	-50.25	-65.21	-13.00	52.21	-14.96	RMS	Vertical
5	720.058	-50.66	-59.87	-13.00	46.87	-9.21	RMS	Vertical
6	947.62	-48.38	-55.17	-13.00	42.17	-6.79	RMS	Vertical


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1313	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

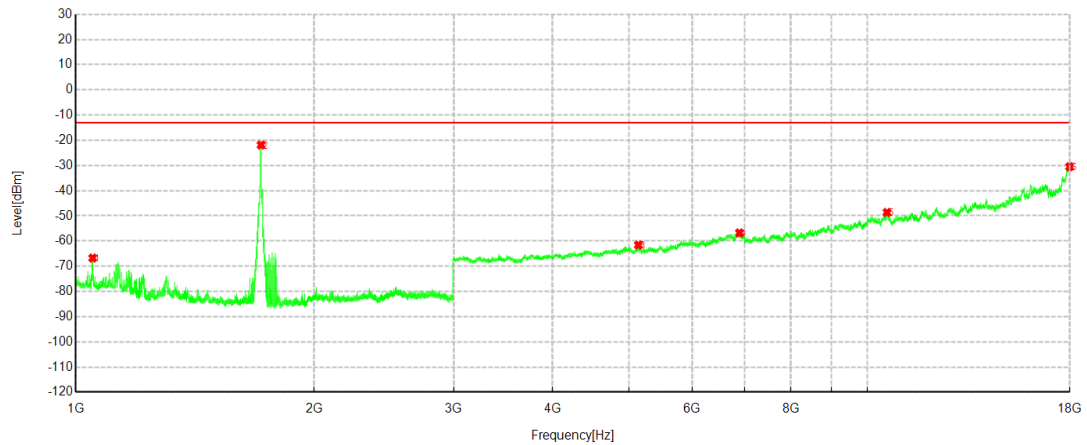Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1049.9	-48.40	-66.75	-13.00	53.75	-18.35	RMS	Horizontal
2	1713.4	1.41	-21.91	/	/	-23.32	RMS	Horizontal
3	5134.5	-66.15	-61.59	-13.00	48.59	4.56	RMS	Horizontal
4	6888.75	-66.96	-56.77	-13.00	43.77	10.19	RMS	Horizontal
5	10582.5	-69.86	-48.64	-13.00	35.64	21.22	RMS	Horizontal
6	17999.25	-66.94	-30.51	-13.00	17.51	36.43	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1313	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

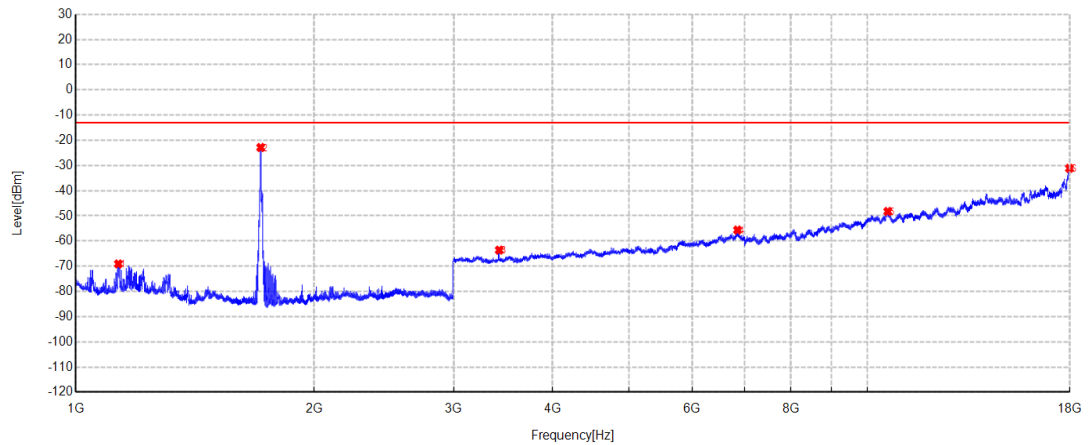Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1131.3	-49.57	-69.09	-13.00	56.09	-19.52	RMS	Vertical
2	1711.4	0.78	-22.87	/	/	-23.65	RMS	Vertical
3	3426	-60.36	-63.60	-13.00	50.60	-3.24	RMS	Vertical
4	6851.25	-66.38	-55.63	-13.00	42.63	10.75	RMS	Vertical
5	10606.5	-70.86	-48.26	-13.00	35.26	22.60	RMS	Vertical
6	17994	-67.16	-31.14	-13.00	18.14	36.02	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1450	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

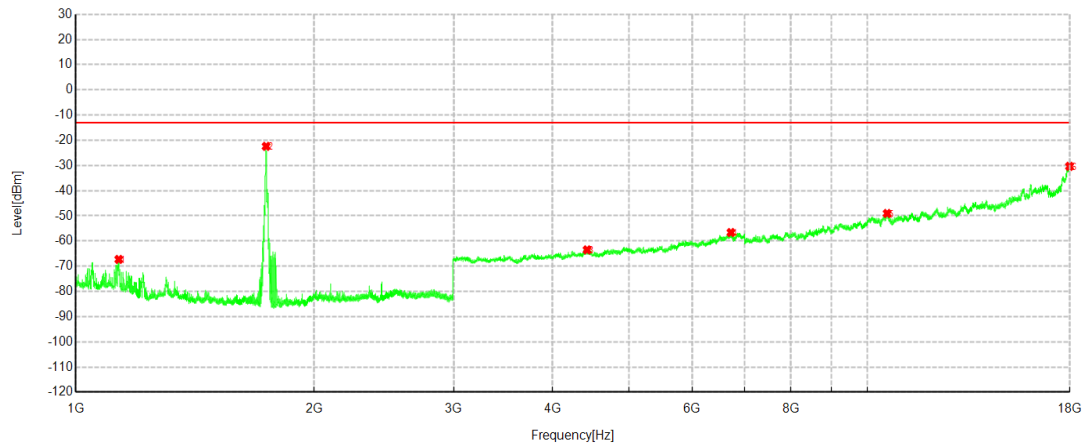Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1132.9	-48.95	-67.29	-13.00	54.29	-18.34	RMS	Horizontal
2	1739	1.54	-22.42	/	/	-23.96	RMS	Horizontal
3	4423.5	-65.19	-63.50	-13.00	50.50	1.69	RMS	Horizontal
4	6721.5	-66.58	-56.62	-13.00	43.62	9.96	RMS	Horizontal
5	10587	-70.44	-49.06	-13.00	36.06	21.38	RMS	Horizontal
6	17996.25	-66.82	-30.36	-13.00	17.36	36.46	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1450	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

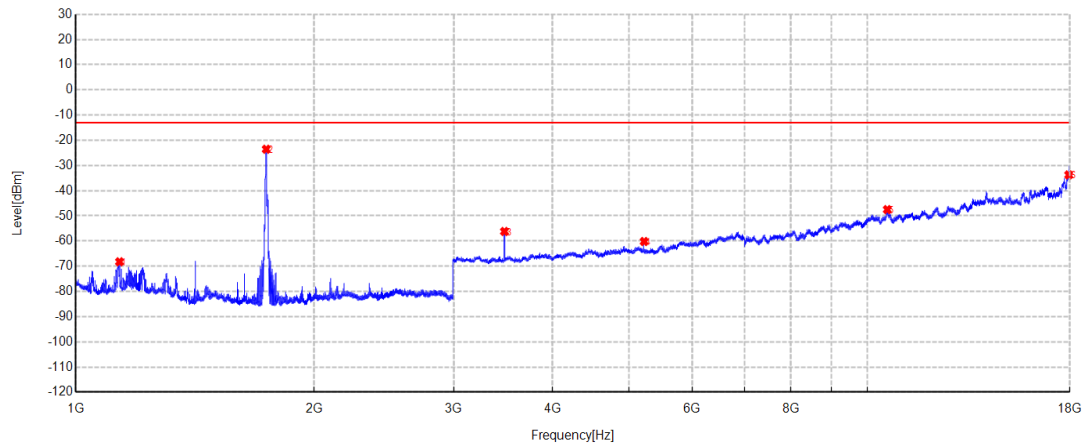Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1135.2	-48.82	-68.23	-13.00	55.23	-19.41	RMS	Vertical
2	1739.3	0.45	-23.56	/	/	-24.01	RMS	Vertical
3	3477.75	-53.22	-56.20	-13.00	43.20	-2.98	RMS	Vertical
4	5221.5	-64.04	-60.18	-13.00	47.18	3.86	RMS	Vertical
5	10590.75	-69.78	-47.51	-13.00	34.51	22.27	RMS	Vertical
6	17955	-67.85	-33.76	-13.00	20.76	34.09	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1512	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

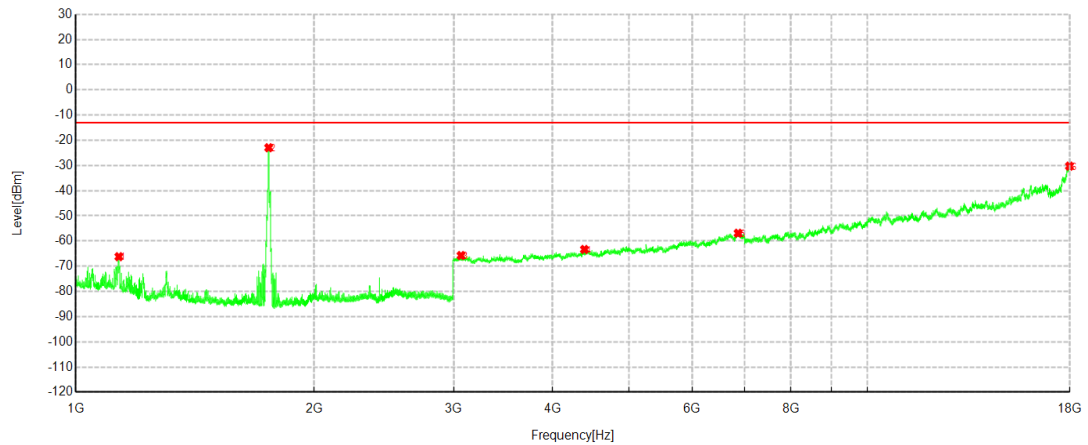Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133.1	-47.87	-66.21	-13.00	53.21	-18.34	RMS	Horizontal
2	1751.8	1.24	-22.96	/	/	-24.20	RMS	Horizontal
3	3065.25	-62.67	-65.75	-13.00	52.75	-3.08	RMS	Horizontal
4	4389	-64.67	-63.34	-13.00	50.34	1.33	RMS	Horizontal
5	6862.5	-67.29	-56.90	-13.00	43.90	10.39	RMS	Horizontal
6	17994	-66.75	-30.28	-13.00	17.28	36.47	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	1512	Band:	IV
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:24.5℃;Humi:53%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2023-12-30		

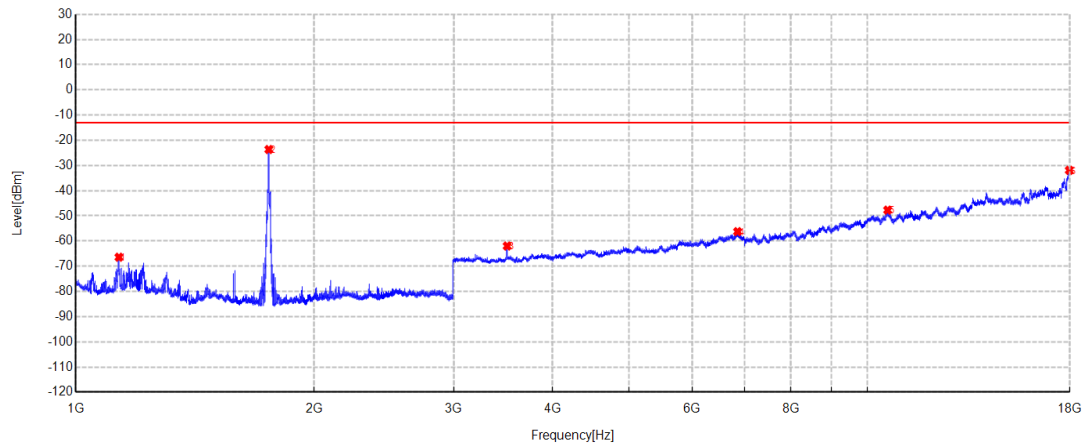
Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133.3	-46.96	-66.42	-13.00	53.42	-19.46	RMS	Vertical
2	1752.6	0.43	-23.66	/	/	-24.09	RMS	Vertical
3	3505.5	-59.47	-61.98	-13.00	48.98	-2.51	RMS	Vertical
4	6852	-66.99	-56.26	-13.00	43.26	10.73	RMS	Vertical
5	10602.75	-70.38	-47.72	-13.00	34.72	22.66	RMS	Vertical
6	17983.5	-67.43	-31.93	-13.00	18.93	35.50	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	4232	Band:	V
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

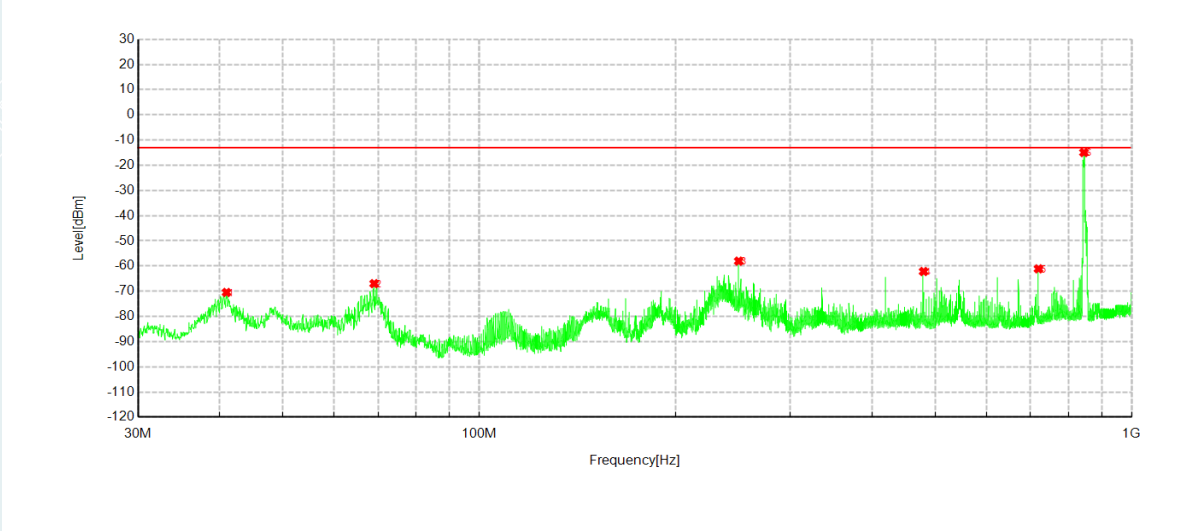


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.0095	-56.15	-70.48	-13.00	57.48	-14.33	RMS	Horizontal
2	69.0425	-45.23	-66.98	-13.00	53.98	-21.75	RMS	Horizontal
3	249.996	-41.25	-58.05	-13.00	45.05	-16.80	RMS	Horizontal
4	480.08	-48.10	-62.17	-13.00	49.17	-14.07	RMS	Horizontal
5	720.058	-51.56	-61.11	-13.00	48.11	-9.55	RMS	Horizontal
6	845.382	-6.97	-14.95	/	/	-7.98	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	4232	Band:	V
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

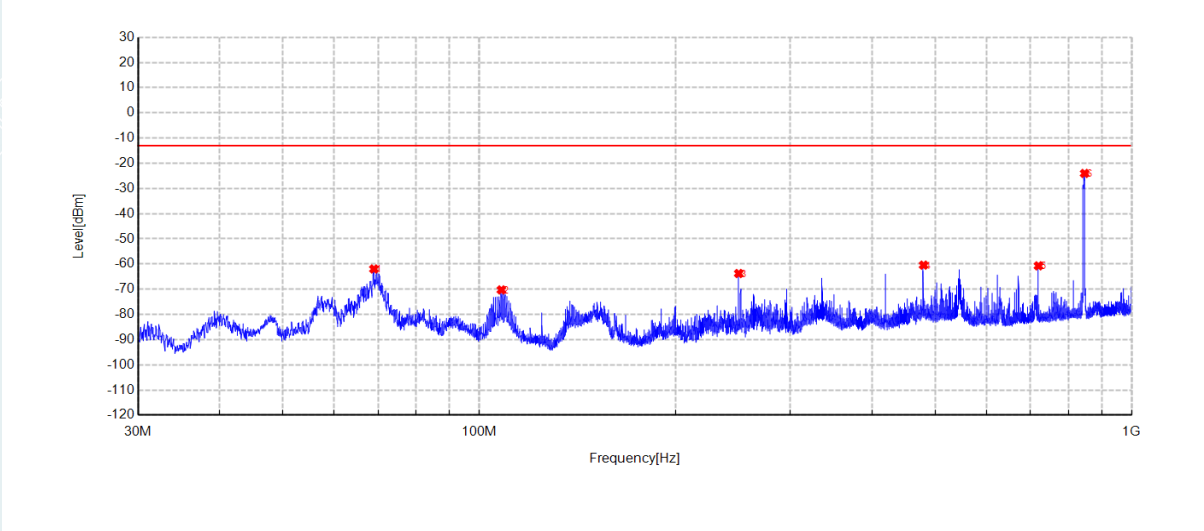


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	68.994	-39.24	-61.96	-13.00	48.96	-22.72	RMS	Vertical
2	108.182	-55.36	-70.27	-13.00	57.27	-14.91	RMS	Vertical
3	249.996	-42.96	-63.75	-13.00	50.75	-20.79	RMS	Vertical
4	479.983	-47.54	-60.43	-13.00	47.43	-12.89	RMS	Vertical
5	720.058	-51.50	-60.71	-13.00	47.71	-9.21	RMS	Vertical
6	847.3705	-15.81	-24.03	/	/	-8.22	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	4175	Band:	V
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

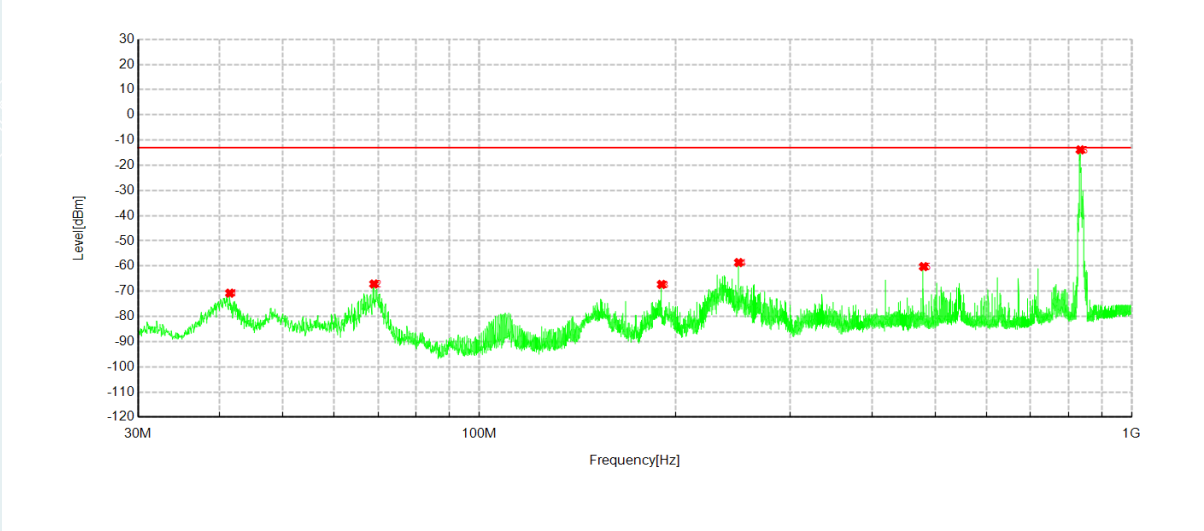


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.4945	-56.33	-70.76	-13.00	57.76	-14.43	RMS	Horizontal
2	68.994	-45.40	-67.12	-13.00	54.12	-21.72	RMS	Horizontal
3	190.3895	-44.72	-67.29	-13.00	54.29	-22.57	RMS	Horizontal
4	249.996	-41.82	-58.62	-13.00	45.62	-16.80	RMS	Horizontal
5	480.0315	-46.16	-60.23	-13.00	47.23	-14.07	RMS	Horizontal
6	834.6635	-6.08	-13.88	/	/	-7.80	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	4175	Band:	V
Mode:	WCDMA	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

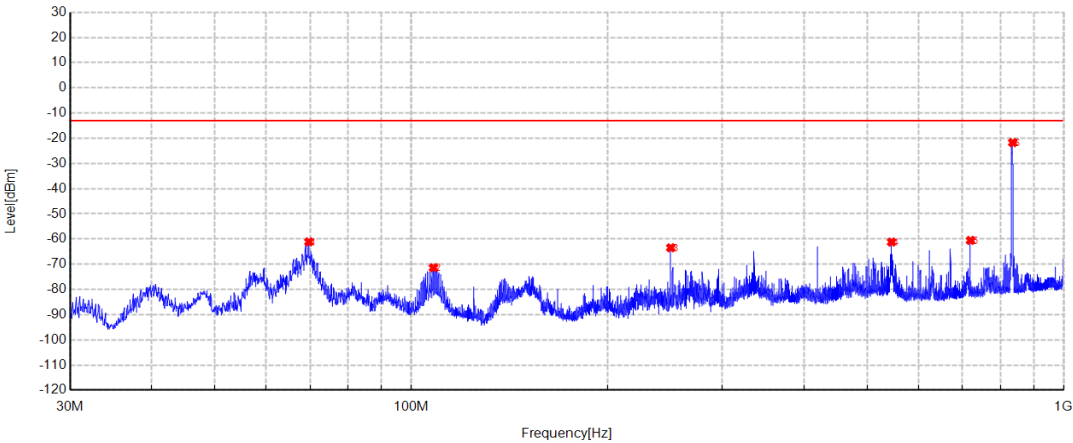

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.7215	-38.46	-61.13	-13.00	48.13	-22.67	RMS	Vertical
2	108.182	-56.49	-71.40	-13.00	58.40	-14.91	RMS	Vertical
3	249.996	-42.67	-63.46	-13.00	50.46	-20.79	RMS	Vertical
4	545.0215	-50.33	-61.20	-13.00	48.20	-10.87	RMS	Vertical
5	720.058	-51.33	-60.54	-13.00	47.54	-9.21	RMS	Vertical
6	835.876	-13.61	-21.73	/	/	-8.12	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.