


Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	18900	Band:	Band=2 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

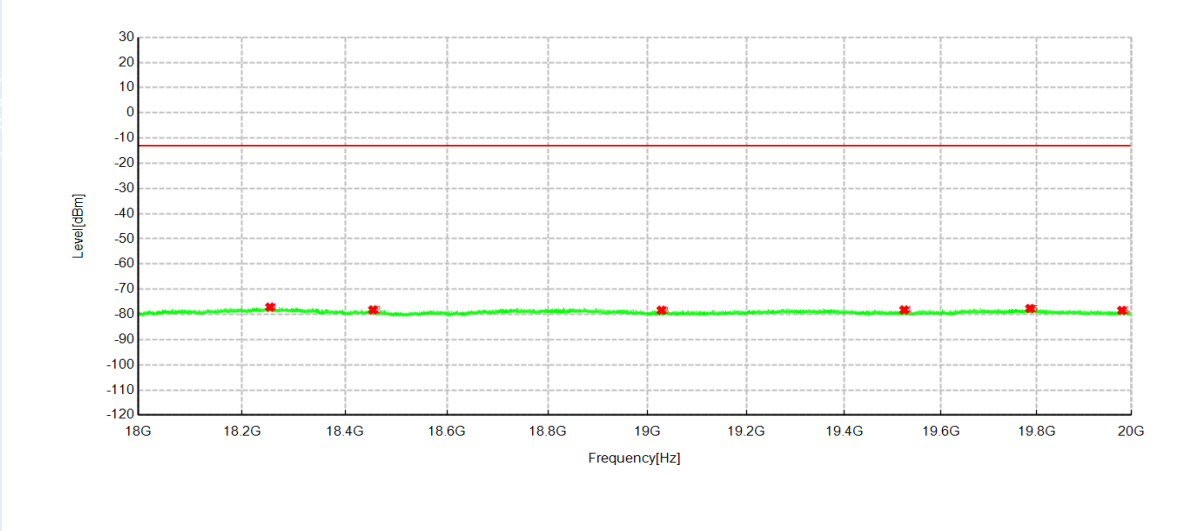


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18253.77	-62.05	-77.08	-13.00	64.08	-15.03	RMS	Horizontal
2	18454.25	-61.70	-78.19	-13.00	65.19	-16.49	RMS	Horizontal
3	19027.24	-61.85	-78.34	-13.00	65.34	-16.49	RMS	Horizontal
4	19523.50	-62.12	-78.20	-13.00	65.20	-16.08	RMS	Horizontal
5	19785.75	-62.39	-77.64	-13.00	64.64	-15.25	RMS	Horizontal
6	19979.59	-62.66	-78.42	-13.00	65.42	-15.76	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	18900	Band:	Band=2 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

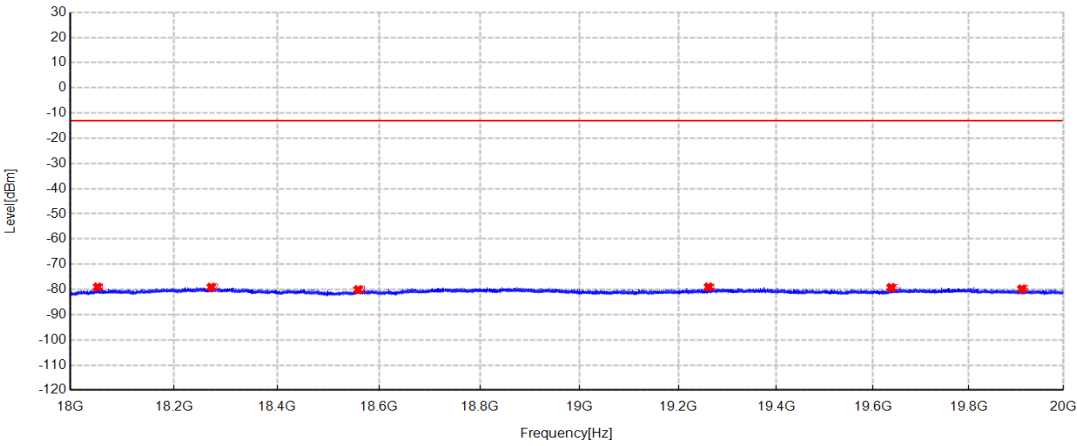


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18052.80	-61.98	-79.02	-13.00	66.02	-17.04	RMS	Vertical
2	18271.69	-62.96	-79.11	-13.00	66.11	-16.15	RMS	Vertical
3	18558.50	-62.92	-80.10	-13.00	67.10	-17.18	RMS	Vertical
4	19261.01	-62.56	-79.01	-13.00	66.01	-16.45	RMS	Vertical
5	19637.58	-62.89	-79.23	-13.00	66.23	-16.34	RMS	Vertical
6	19911.83	-63.58	-79.82	-13.00	66.82	-16.24	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	19100	Band:	Band=2 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

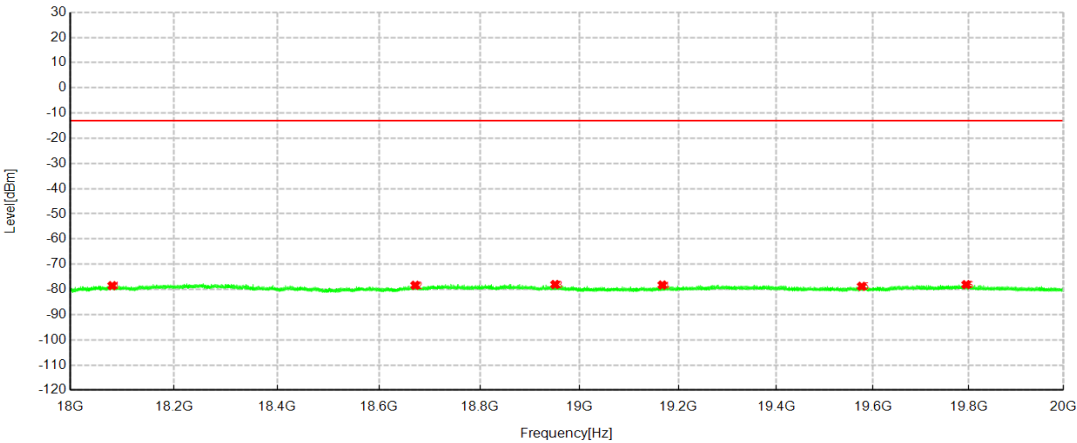


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18080.88	-62.55	-78.51	-13.00	65.51	-15.96	RMS	Horizontal
2	18671.30	-62.42	-78.36	-13.00	65.36	-15.94	RMS	Horizontal
3	18950.19	-61.65	-78.03	-13.00	65.03	-16.38	RMS	Horizontal
4	19166.92	-62.27	-78.25	-13.00	65.25	-15.98	RMS	Horizontal
5	19576.54	-62.90	-78.76	-13.00	65.76	-15.86	RMS	Horizontal
6	19794.63	-62.82	-78.10	-13.00	65.10	-15.28	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	19100	Band:	Band=2 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:24.6℃;Humi:51%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-10		

Test Graph

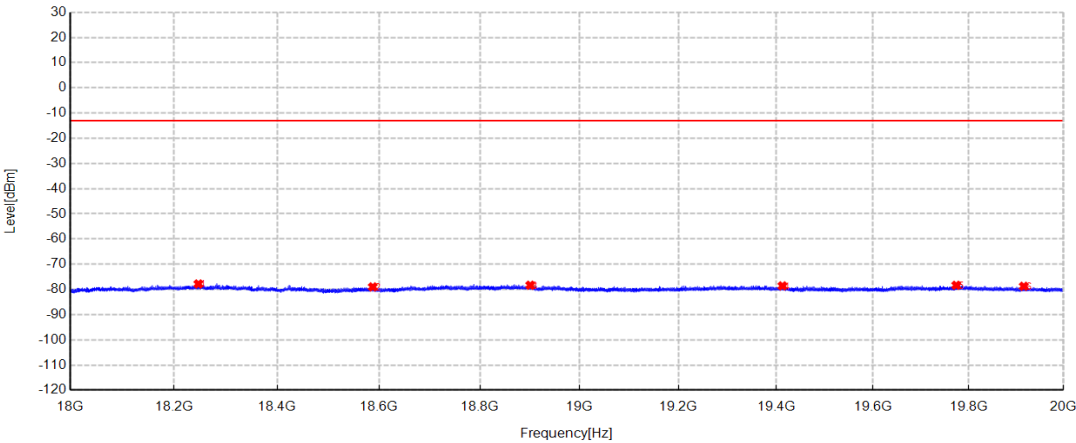


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18246.80	-61.80	-77.83	-13.00	64.83	-16.03	RMS	Vertical
2	18587.38	-61.96	-79.00	-13.00	66.00	-17.04	RMS	Vertical
3	18900.35	-61.56	-78.33	-13.00	65.33	-16.77	RMS	Vertical
4	19412.69	-61.93	-78.59	-13.00	65.59	-16.66	RMS	Vertical
5	19773.67	-62.34	-78.35	-13.00	65.35	-16.01	RMS	Vertical
6	19915.83	-62.51	-78.75	-13.00	65.75	-16.24	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20050	Band:	Band=4 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

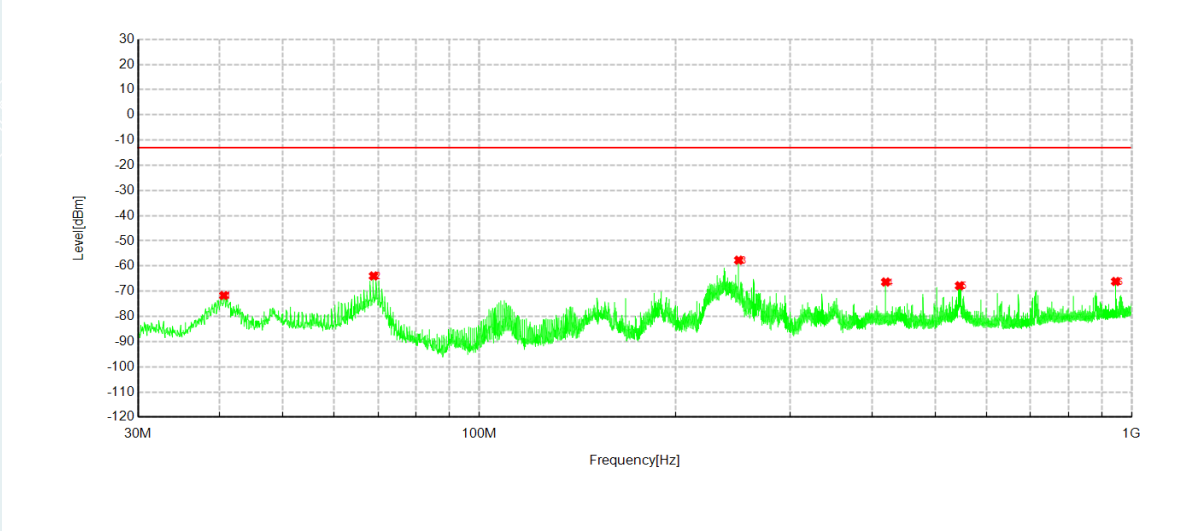


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-57.45	-71.70	-13.00	58.70	-14.25	RMS	Horizontal
2	68.897	-42.28	-63.95	-13.00	50.95	-21.67	RMS	Horizontal
3	249.996	-40.88	-57.68	-13.00	44.68	-16.80	RMS	Horizontal
4	420.037	-52.38	-66.34	-13.00	53.34	-13.96	RMS	Horizontal
5	545.07	-56.71	-67.83	-13.00	54.83	-11.12	RMS	Horizontal
6	945.68	-59.22	-66.13	-13.00	53.13	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20050	Band:	Band=4 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

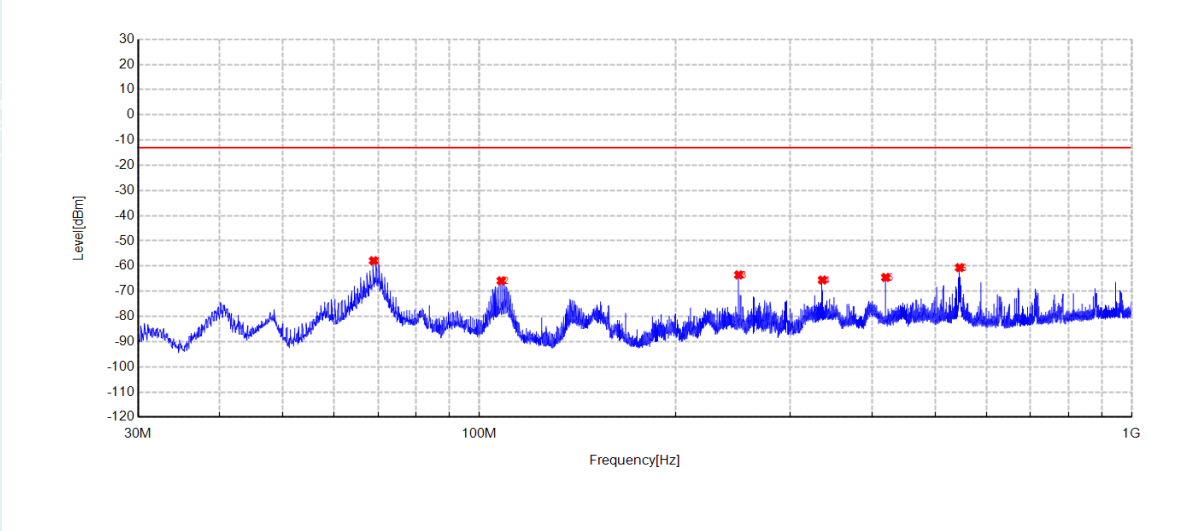


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	68.897	-35.16	-57.88	-13.00	44.88	-22.72	RMS	Vertical
2	108.1335	-50.93	-65.85	-13.00	52.85	-14.92	RMS	Vertical
3	249.996	-42.73	-63.52	-13.00	50.52	-20.79	RMS	Vertical
4	335.9865	-50.29	-65.56	-13.00	52.56	-15.27	RMS	Vertical
5	419.9885	-49.56	-64.52	-13.00	51.52	-14.96	RMS	Vertical
6	545.0215	-49.77	-60.64	-13.00	47.64	-10.87	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20175	Band:	Band=4 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

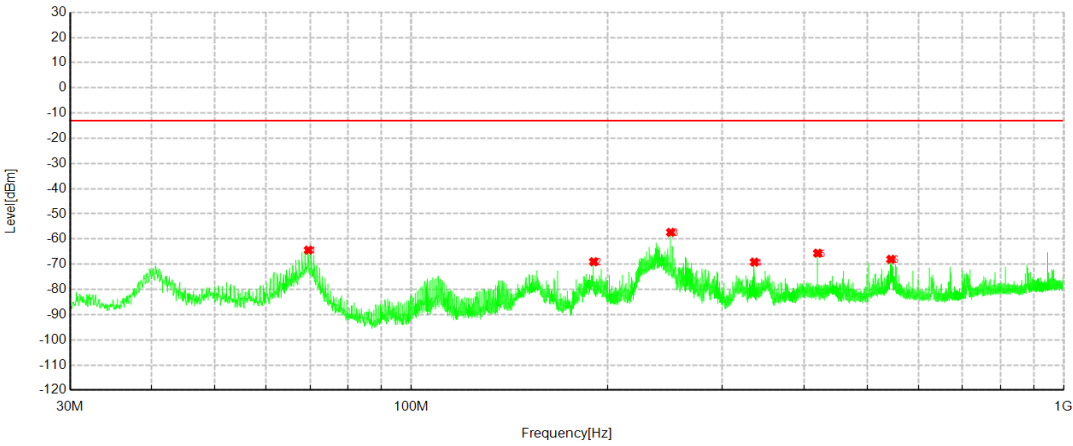


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.6245	-42.29	-64.39	-13.00	51.39	-22.10	RMS	Horizontal
2	190.4865	-46.47	-69.02	-13.00	56.02	-22.55	RMS	Horizontal
3	249.996	-40.55	-57.35	-13.00	44.35	-16.80	RMS	Horizontal
4	335.9865	-52.10	-69.15	-13.00	56.15	-17.05	RMS	Horizontal
5	419.9885	-51.65	-65.61	-13.00	52.61	-13.96	RMS	Horizontal
6	543.809	-56.98	-68.04	-13.00	55.04	-11.06	RMS	Horizontal
7	69.6245	-42.29	-64.39	-13.00	51.39	-22.10	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20175	Band:	Band=4 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

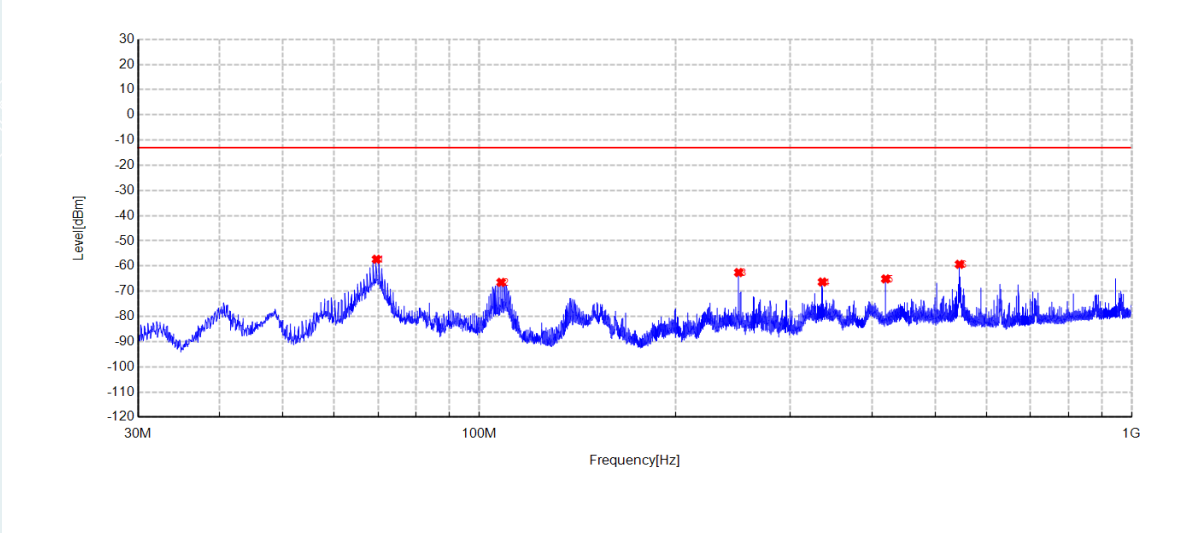


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.6245	-34.65	-57.33	-13.00	44.33	-22.68	RMS	Vertical
2	108.085	-51.54	-66.48	-13.00	53.48	-14.94	RMS	Vertical
3	249.996	-41.79	-62.58	-13.00	49.58	-20.79	RMS	Vertical
4	335.9865	-51.07	-66.34	-13.00	53.34	-15.27	RMS	Vertical
5	419.9885	-50.14	-65.10	-13.00	52.10	-14.96	RMS	Vertical
6	544.973	-48.45	-59.32	-13.00	46.32	-10.87	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20300	Band:	Band=4 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

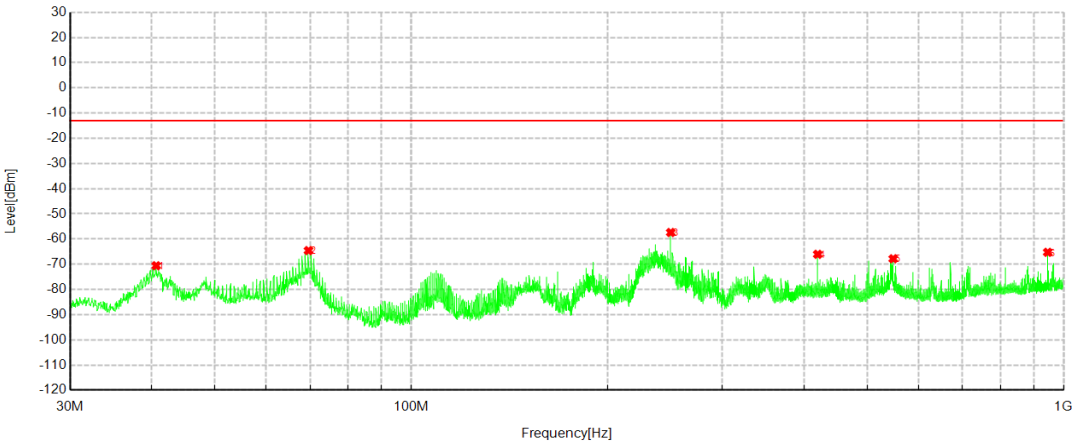


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.67	-56.34	-70.60	-13.00	57.60	-14.26	RMS	Horizontal
2	69.6245	-42.48	-64.58	-13.00	51.58	-22.10	RMS	Horizontal
3	249.996	-40.61	-57.41	-13.00	44.41	-16.80	RMS	Horizontal
4	419.9885	-52.10	-66.06	-13.00	53.06	-13.96	RMS	Horizontal
5	548.174	-56.55	-67.83	-13.00	54.83	-11.28	RMS	Horizontal
6	945.6315	-58.35	-65.26	-13.00	52.26	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20300	Band:	Band=4 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

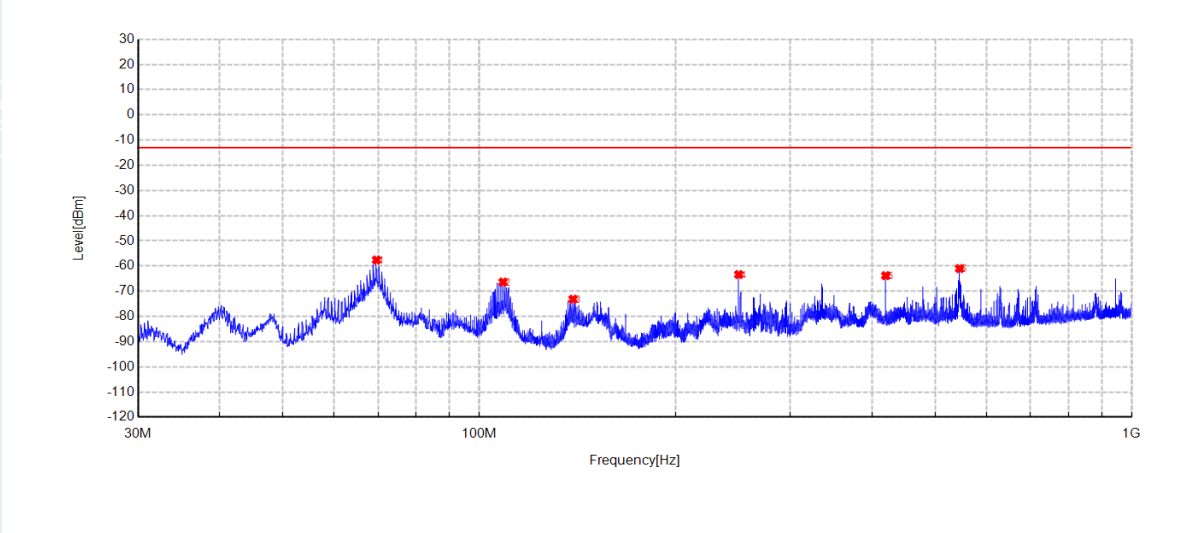


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.6245	-34.91	-57.59	-13.00	44.59	-22.68	RMS	Vertical
2	108.8125	-51.66	-66.36	-13.00	53.36	-14.70	RMS	Vertical
3	139.2705	-56.47	-73.17	-13.00	60.17	-16.70	RMS	Vertical
4	249.996	-42.58	-63.37	-13.00	50.37	-20.79	RMS	Vertical
5	419.9885	-48.85	-63.81	-13.00	50.81	-14.96	RMS	Vertical
6	545.0215	-50.14	-61.01	-13.00	48.01	-10.87	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20050	Band:	Band=4 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	
Date:	2024-01-07		
Standard:			

Test Graph

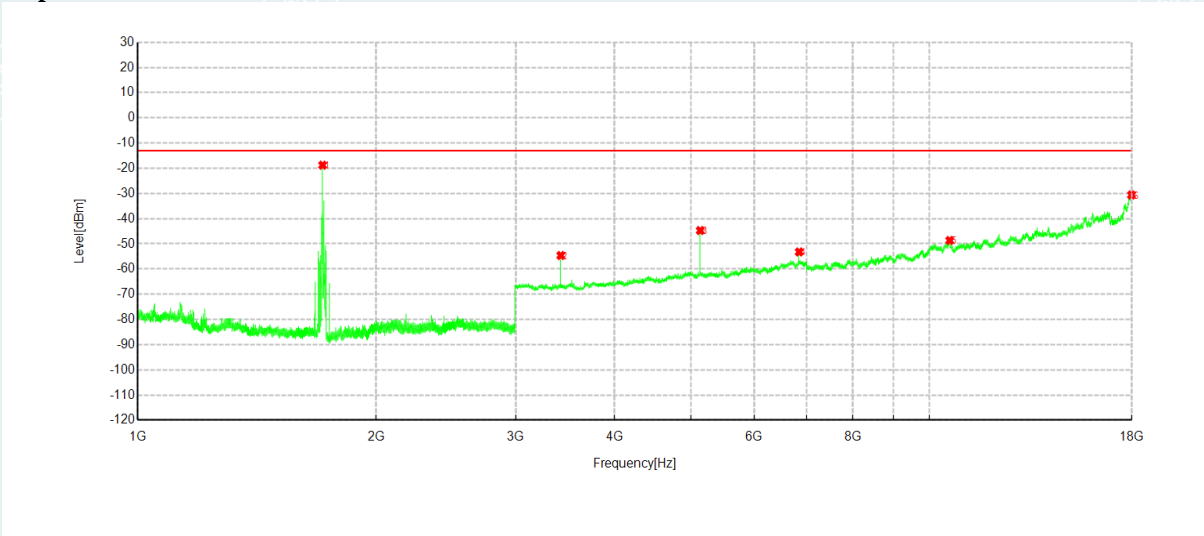


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1711.1	4.49	-18.78	/	/	-23.27	RMS	Horizontal
2	3421.5	-51.75	-54.62	-13.00	41.62	-2.87	RMS	Horizontal
3	5133	-49.24	-44.71	-13.00	31.71	4.53	RMS	Horizontal
4	6844.5	-63.49	-53.21	-13.00	40.21	10.28	RMS	Horizontal
5	10604.25	-70.40	-48.65	-13.00	35.65	21.75	RMS	Horizontal
6	17993.25	-67.08	-30.60	-13.00	17.60	36.48	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20050	Band:	Band=4 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

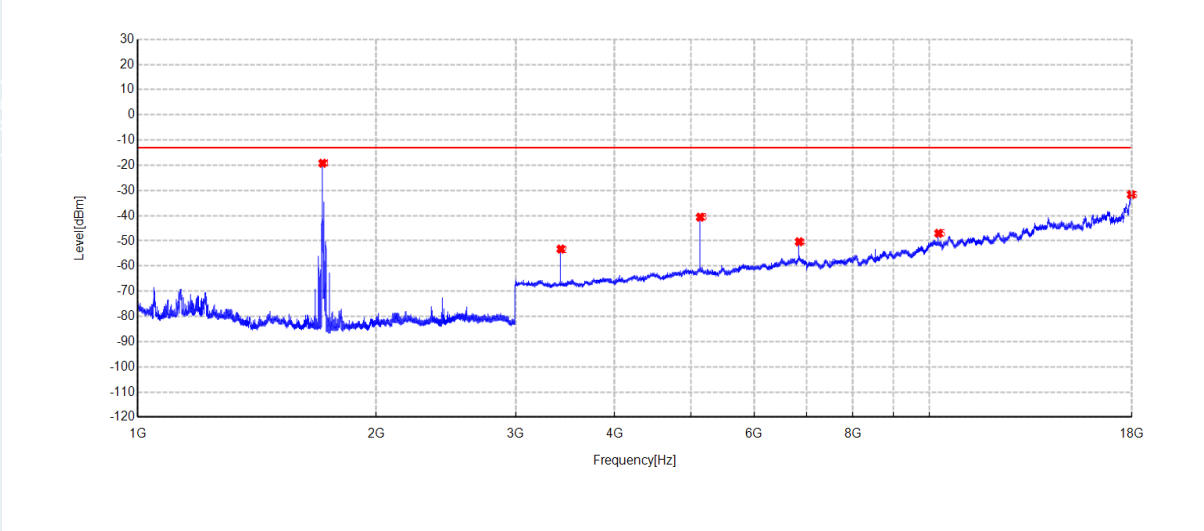


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1711.1	4.45	-19.19	/	/	-23.64	RMS	Vertical
2	3421.5	-50.06	-53.26	-13.00	40.26	-3.20	RMS	Vertical
3	5133	-45.51	-40.61	-13.00	27.61	4.90	RMS	Vertical
4	6843.75	-60.92	-50.36	-13.00	37.36	10.56	RMS	Vertical
5	10266.75	-68.24	-47.03	-13.00	34.03	21.21	RMS	Vertical
6	17976	-66.76	-31.63	-13.00	18.63	35.13	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20175	Band:	Band=4 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

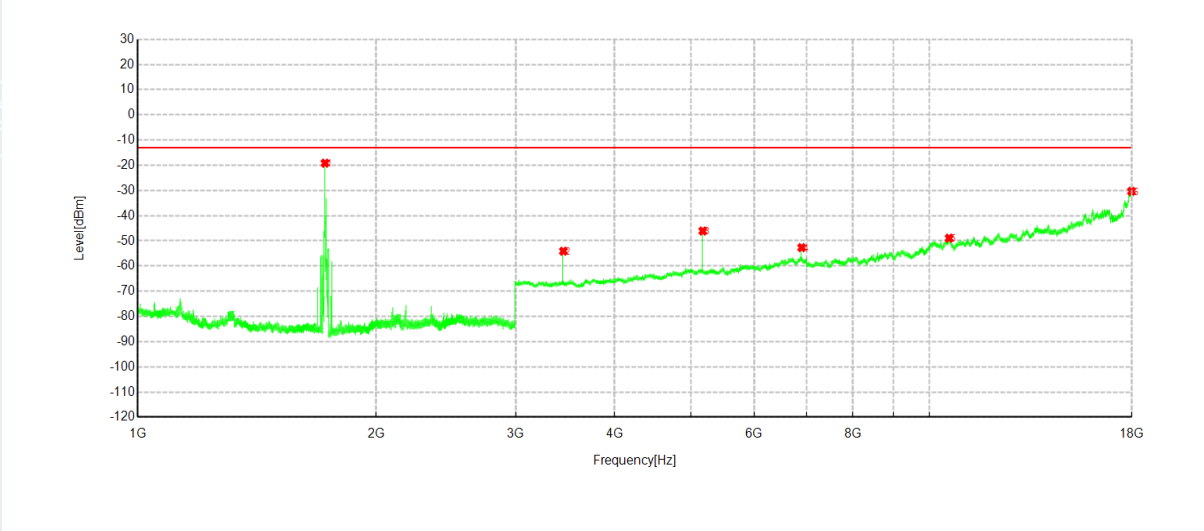


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1723.5	4.41	-19.17	/	/	-23.58	RMS	Horizontal
2	3447	-50.97	-54.10	-13.00	41.10	-3.13	RMS	Horizontal
3	5170.5	-50.45	-46.10	-13.00	33.10	4.35	RMS	Horizontal
4	6894	-62.83	-52.68	-13.00	39.68	10.15	RMS	Horizontal
5	10587	-70.32	-48.94	-13.00	35.94	21.38	RMS	Horizontal
6	17994	-66.81	-30.34	-13.00	17.34	36.47	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20175	Band:	Band=4 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

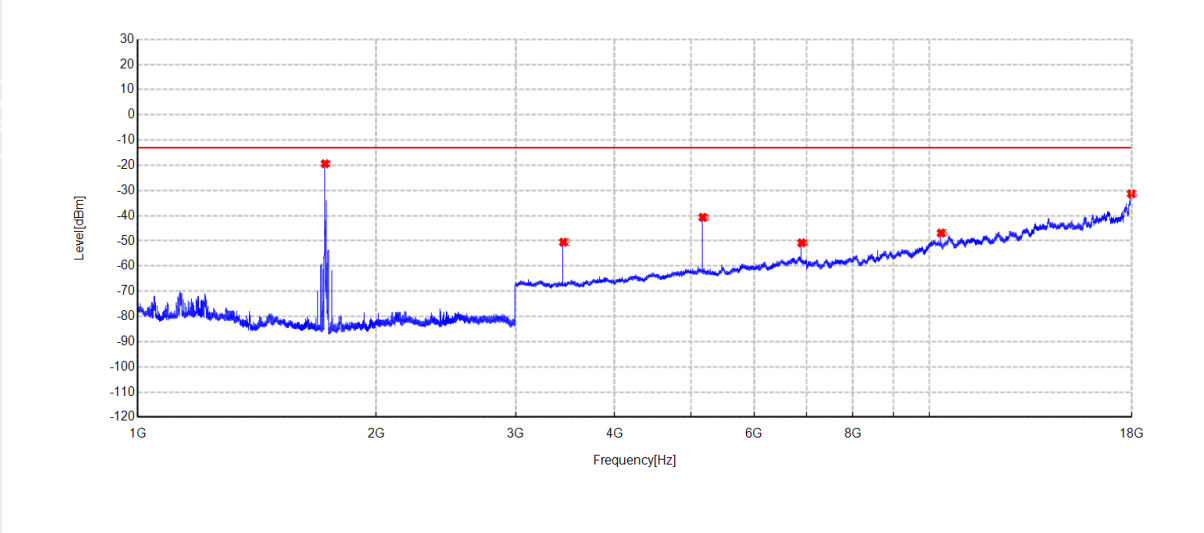


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1723.5	4.39	-19.41	/	/	-23.80	RMS	Vertical
2	3447	-47.07	-50.53	-13.00	37.53	-3.46	RMS	Vertical
3	5170.5	-45.30	-40.67	-13.00	27.67	4.63	RMS	Vertical
4	6894	-60.50	-50.81	-13.00	37.81	9.69	RMS	Vertical
5	10341.75	-68.25	-46.90	-13.00	33.90	21.35	RMS	Vertical
6	17978.25	-66.56	-31.32	-13.00	18.32	35.24	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20300	Band:	Band=4 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

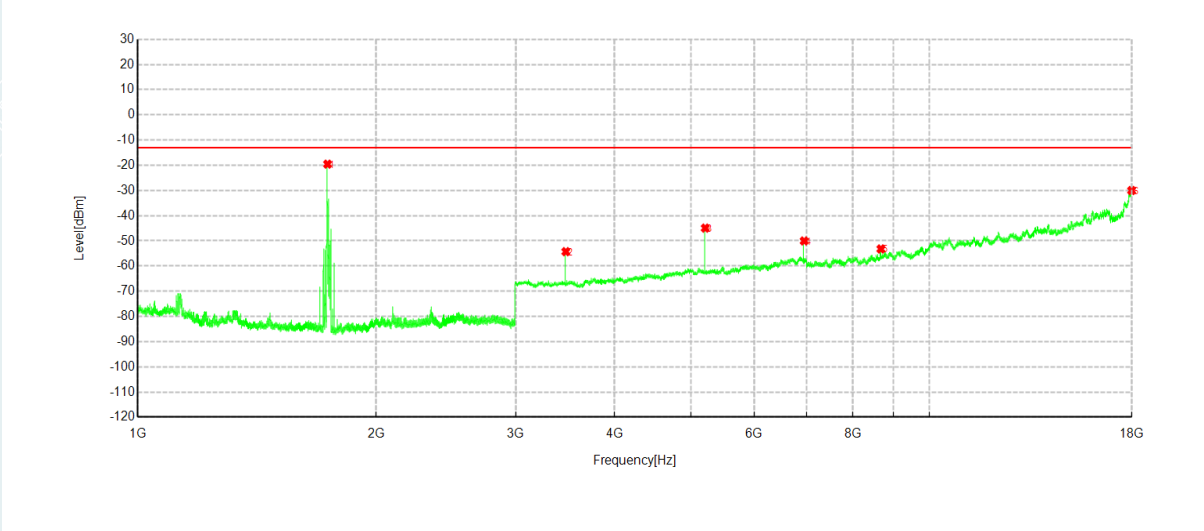


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1736	4.34	-19.55	/	/	-23.89	RMS	Horizontal
2	3471.75	-51.39	-54.29	-13.00	41.29	-2.90	RMS	Horizontal
3	5208	-48.70	-44.95	-13.00	31.95	3.75	RMS	Horizontal
4	6944.25	-59.27	-50.04	-13.00	37.04	9.23	RMS	Horizontal
5	8680.5	-68.74	-53.21	-13.00	40.21	15.53	RMS	Horizontal
6	17998.5	-66.46	-30.02	-13.00	17.02	36.44	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20300	Band:	Band=4 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

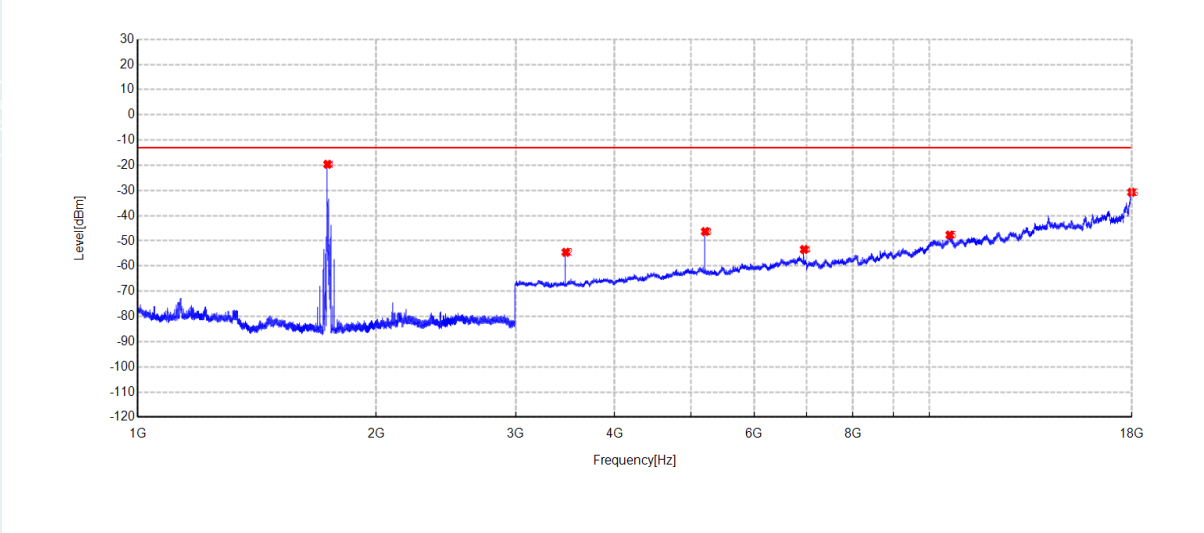


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1736.1	4.34	-19.62	/	/	-23.96	RMS	Vertical
2	3471.75	-51.45	-54.54	-13.00	41.54	-3.09	RMS	Vertical
3	5208	-50.13	-46.31	-13.00	33.31	3.82	RMS	Vertical
4	6944.25	-62.27	-53.43	-13.00	40.43	8.84	RMS	Vertical
5	10605.75	-70.28	-47.67	-13.00	34.67	22.61	RMS	Vertical
6	17998.5	-66.97	-30.72	-13.00	17.72	36.25	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20450	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-10-08		

Test Graph

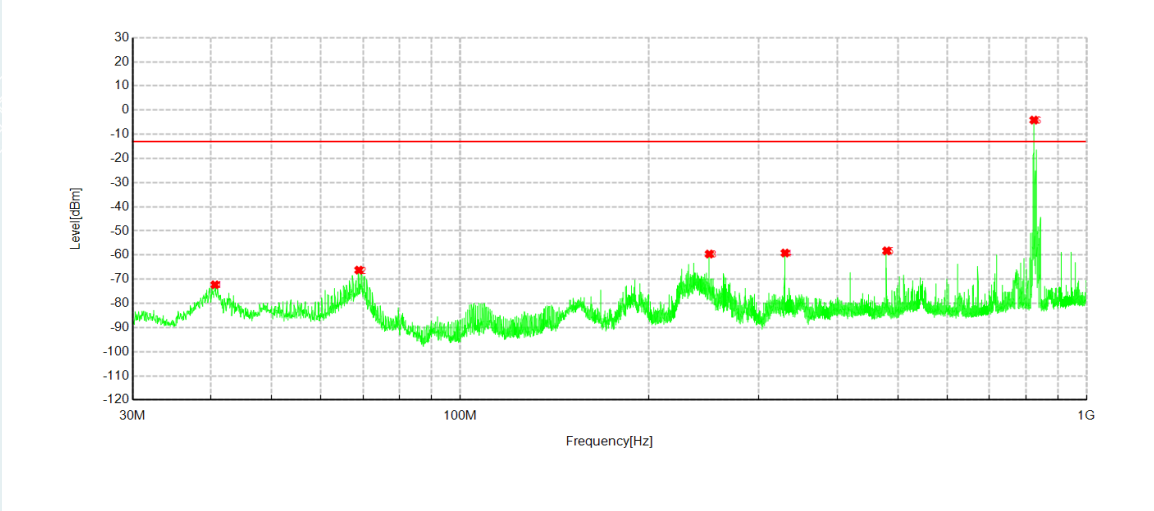


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-58.06	-72.31	-13.00	59.31	-14.25	RMS	Horizontal
2	68.9455	-44.54	-66.24	-13.00	53.24	-21.70	RMS	Horizontal
3	249.996	-42.78	-59.58	-13.00	46.58	-16.80	RMS	Horizontal
4	330.312	-42.14	-59.16	-13.00	46.16	-17.02	RMS	Horizontal
5	480.0315	-44.19	-58.26	-13.00	45.26	-14.07	RMS	Horizontal
6	824.527	3.69	-4.14	/	/	-7.83	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20450	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-10-08		

Test Graph

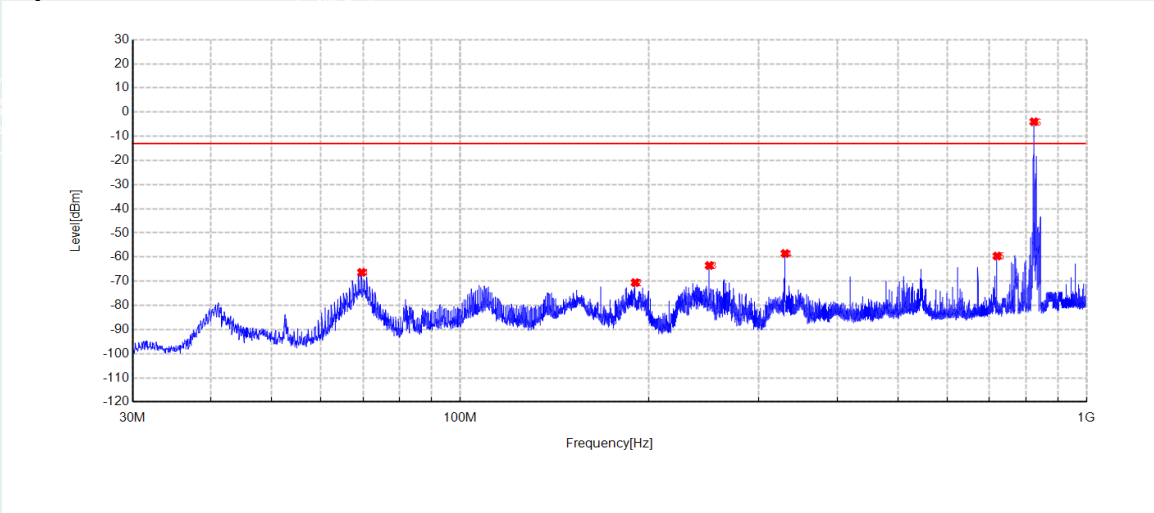


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.673	-43.67	-66.34	-13.00	53.34	-22.67	RMS	Vertical
2	190.3895	-49.70	-70.58	-13.00	57.58	-20.88	RMS	Vertical
3	249.996	-42.71	-63.50	-13.00	50.50	-20.79	RMS	Vertical
4	330.3605	-43.08	-58.52	-13.00	45.52	-15.44	RMS	Vertical
5	720.058	-50.37	-59.58	-13.00	46.58	-9.21	RMS	Vertical
6	824.527	3.88	-3.99	/	/	-7.87	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20525	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-10-08		

Test Graph

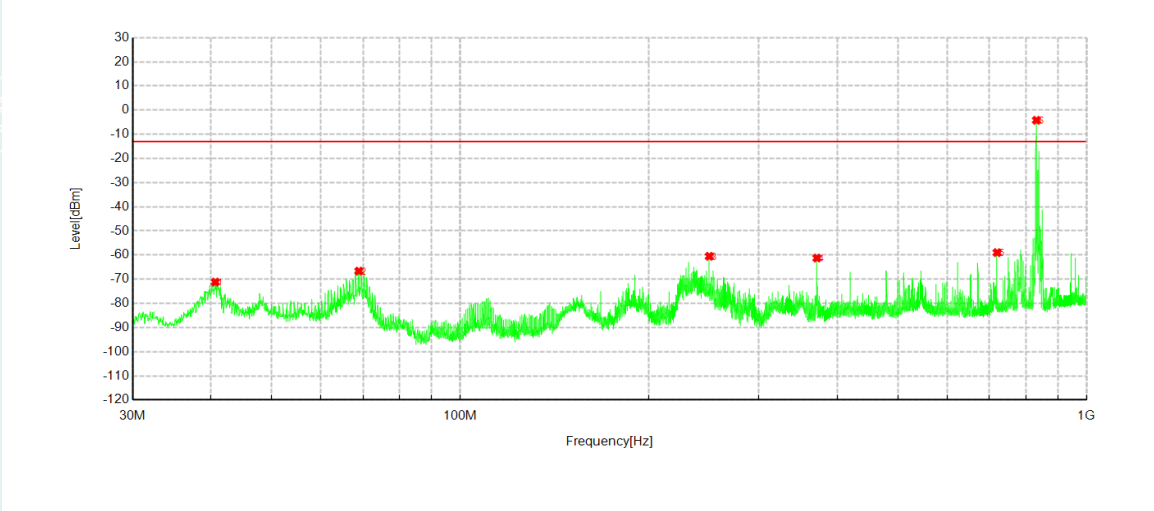


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.67	-56.93	-71.19	-13.00	58.19	-14.26	RMS	Horizontal
2	68.9455	-44.93	-66.63	-13.00	53.63	-21.70	RMS	Horizontal
3	249.996	-43.72	-60.52	-13.00	47.52	-16.80	RMS	Horizontal
4	371.343	-45.01	-61.23	-13.00	48.23	-16.22	RMS	Horizontal
5	720.058	-49.44	-58.99	-13.00	45.99	-9.55	RMS	Horizontal
6	832.093	3.63	-4.21	/	/	-7.84	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20525	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-10-08		

Test Graph

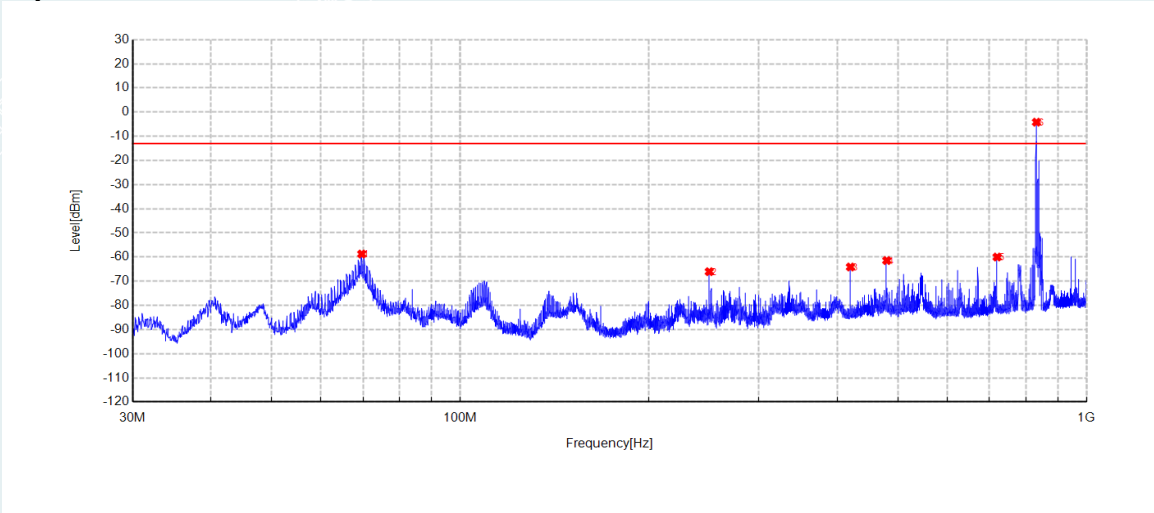


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.673	-36.07	-58.74	-13.00	45.74	-22.67	RMS	Vertical
2	249.996	-45.26	-66.05	-13.00	53.05	-20.79	RMS	Vertical
3	419.9885	-49.15	-64.11	-13.00	51.11	-14.96	RMS	Vertical
4	480.08	-48.55	-61.44	-13.00	48.44	-12.89	RMS	Vertical
5	720.058	-50.78	-59.99	-13.00	46.99	-9.21	RMS	Vertical
6	832.093	3.89	-4.17	/	/	-8.06	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20600	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-10-08		

Test Graph

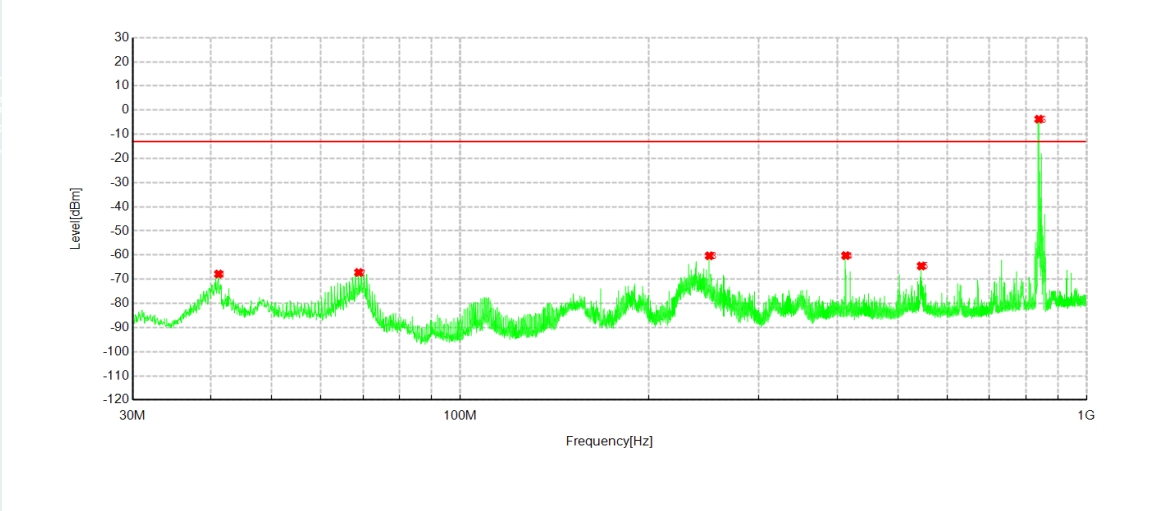


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.155	-53.49	-67.85	-13.00	54.85	-14.36	RMS	Horizontal
2	68.897	-45.53	-67.20	-13.00	54.20	-21.67	RMS	Horizontal
3	249.996	-43.51	-60.31	-13.00	47.31	-16.80	RMS	Horizontal
4	412.8105	-45.92	-60.22	-13.00	47.22	-14.30	RMS	Horizontal
5	544.973	-53.40	-64.52	-13.00	51.52	-11.12	RMS	Horizontal
6	839.6105	3.96	-3.75	/	/	-7.71	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20600	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-10-08		

Test Graph

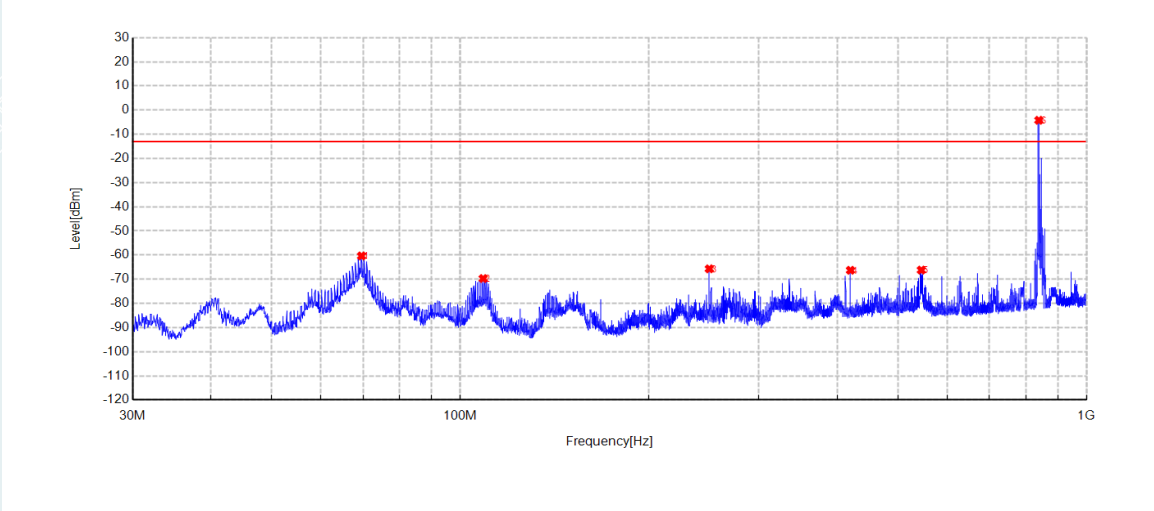


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.6245	-37.68	-60.36	-13.00	47.36	-22.68	RMS	Vertical
2	108.861	-55.05	-69.73	-13.00	56.73	-14.68	RMS	Vertical
3	249.996	-44.90	-65.69	-13.00	52.69	-20.79	RMS	Vertical
4	420.037	-51.33	-66.29	-13.00	53.29	-14.96	RMS	Vertical
5	545.0215	-55.34	-66.21	-13.00	53.21	-10.87	RMS	Vertical
6	839.562	3.99	-4.20	/	/	-8.19	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20450	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

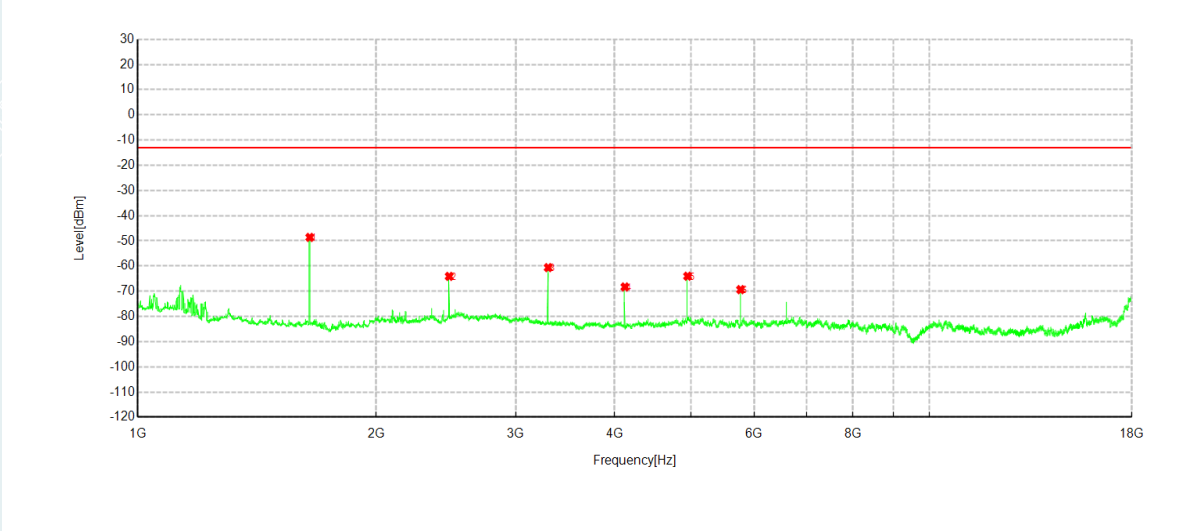


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1648.55	-26.61	-48.63	-13.00	35.63	-22.02	RMS	Horizontal
2	2473.05	-45.89	-64.10	-13.00	51.10	-18.21	RMS	Horizontal
3	3298.4	-42.27	-60.62	-13.00	47.62	-18.35	RMS	Horizontal
4	4122.9	-50.44	-68.30	-13.00	55.30	-17.86	RMS	Horizontal
5	4947.4	-49.37	-64.04	-13.00	51.04	-14.67	RMS	Horizontal
6	5771.9	-55.14	-69.36	-13.00	56.36	-14.22	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20450	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

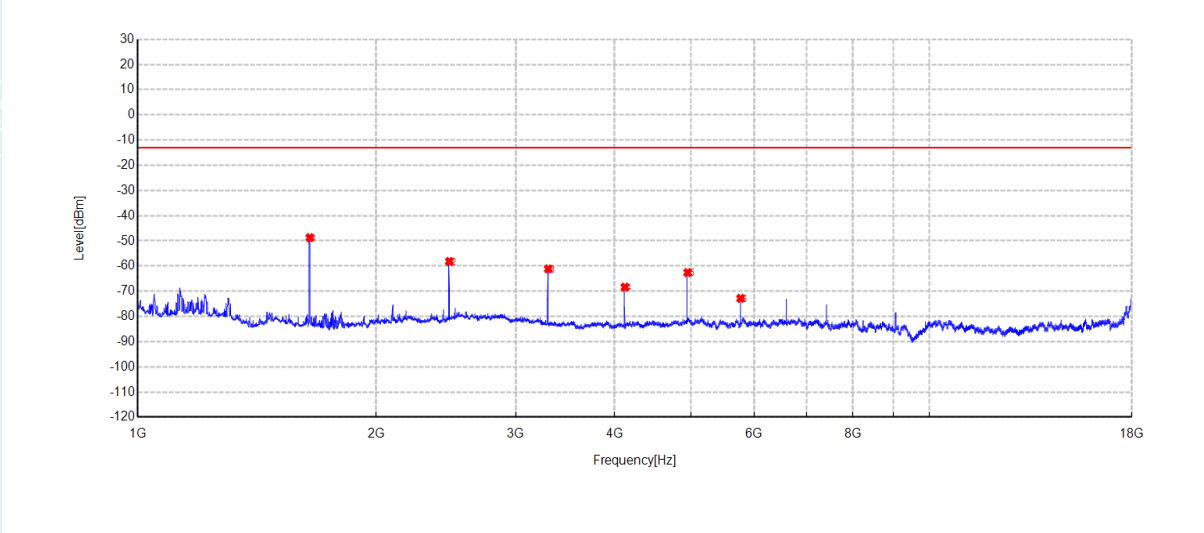


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1648.55	-26.42	-48.75	-13.00	35.75	-22.33	RMS	Vertical
2	2473.9	-39.72	-58.18	-13.00	45.18	-18.46	RMS	Vertical
3	3298.4	-42.47	-61.13	-13.00	48.13	-18.66	RMS	Vertical
4	4122.9	-50.61	-68.39	-13.00	55.39	-17.78	RMS	Vertical
5	4947.4	-47.80	-62.60	-13.00	49.60	-14.80	RMS	Vertical
6	5771.9	-58.89	-72.85	-13.00	59.85	-13.96	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20525	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

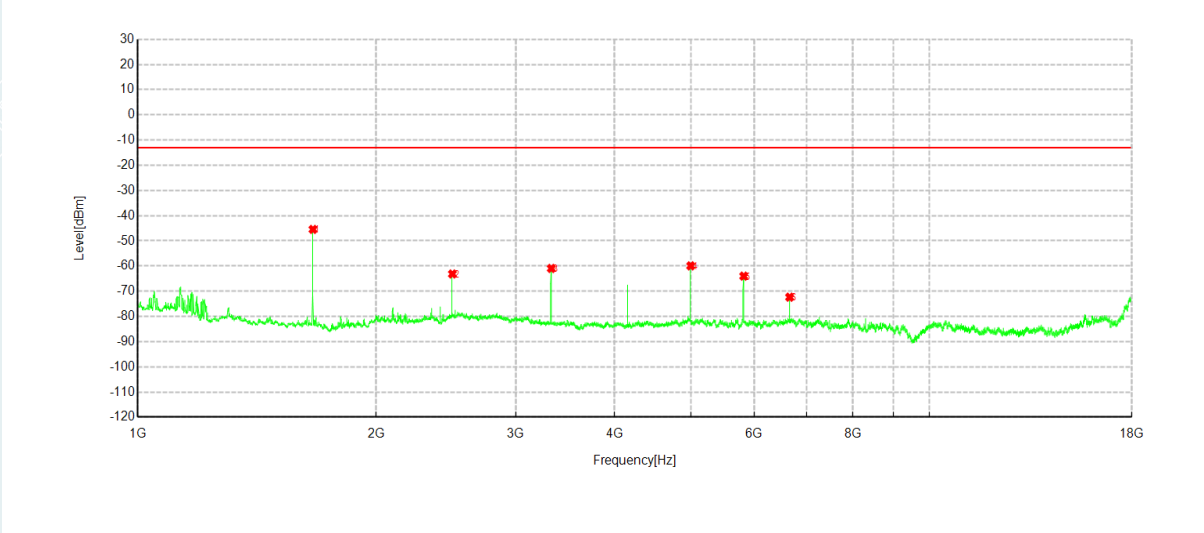


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1663.85	-23.18	-45.46	-13.00	32.46	-22.28	RMS	Horizontal
2	2496	-45.60	-63.15	-13.00	50.15	-17.55	RMS	Horizontal
3	3328.15	-42.51	-60.95	-13.00	47.95	-18.44	RMS	Horizontal
4	4992.45	-45.37	-59.92	-13.00	46.92	-14.55	RMS	Horizontal
5	5824.6	-50.55	-64.00	-13.00	51.00	-13.45	RMS	Horizontal
6	6656.75	-60.89	-72.36	-13.00	59.36	-11.47	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20525	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

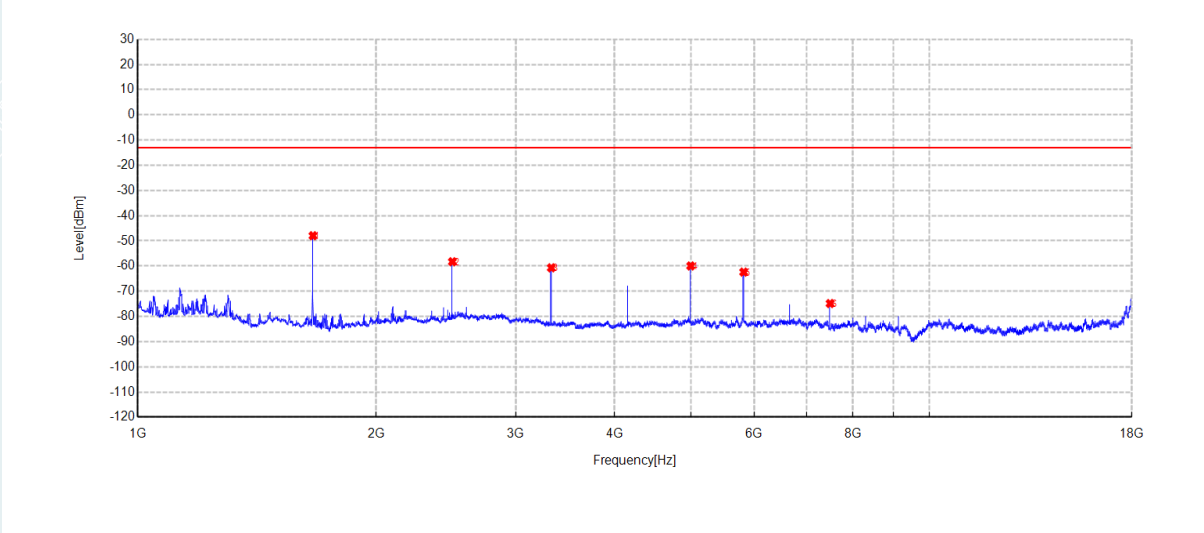


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1663.85	-25.32	-47.96	-13.00	34.96	-22.64	RMS	Vertical
2	2496	-40.25	-58.30	-13.00	45.30	-18.05	RMS	Vertical
3	3328.15	-42.03	-60.70	-13.00	47.70	-18.67	RMS	Vertical
4	4992.45	-44.86	-59.96	-13.00	46.96	-15.10	RMS	Vertical
5	5824.6	-49.27	-62.40	-13.00	49.40	-13.13	RMS	Vertical
6	7488.9	-62.88	-74.87	-13.00	61.87	-11.99	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20600	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

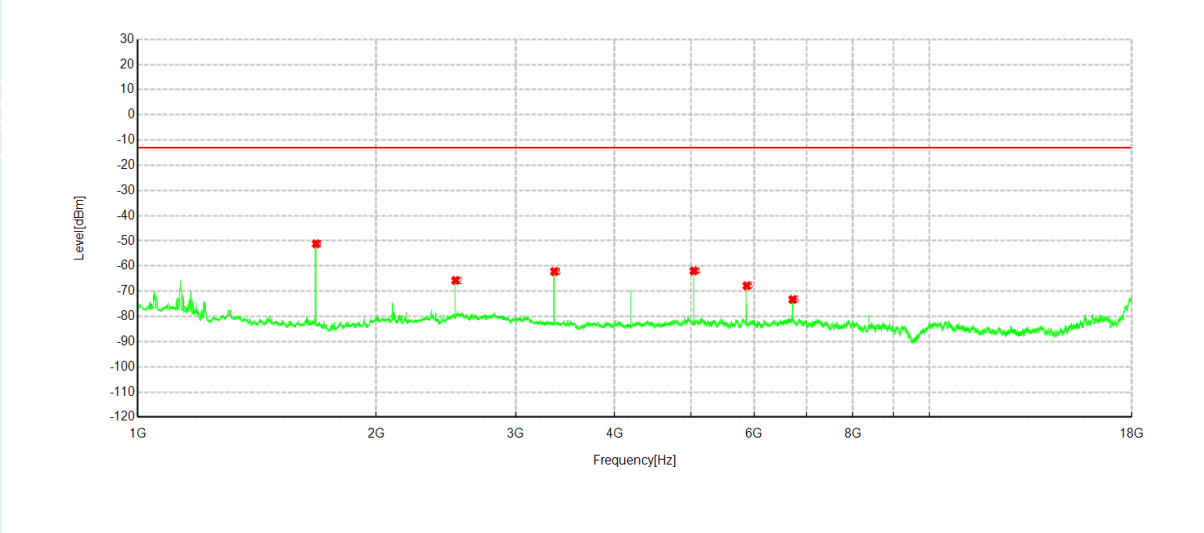


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1679.15	-28.60	-51.18	-13.00	38.18	-22.58	RMS	Horizontal
2	2518.95	-48.66	-65.71	-13.00	52.71	-17.05	RMS	Horizontal
3	3357.9	-43.71	-62.18	-13.00	49.18	-18.47	RMS	Horizontal
4	5037.5	-46.88	-61.95	-13.00	48.95	-15.07	RMS	Horizontal
5	5877.3	-54.13	-67.84	-13.00	54.84	-13.71	RMS	Horizontal
6	6716.25	-61.69	-73.29	-13.00	60.29	-11.60	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20600	Band:	Band=5 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

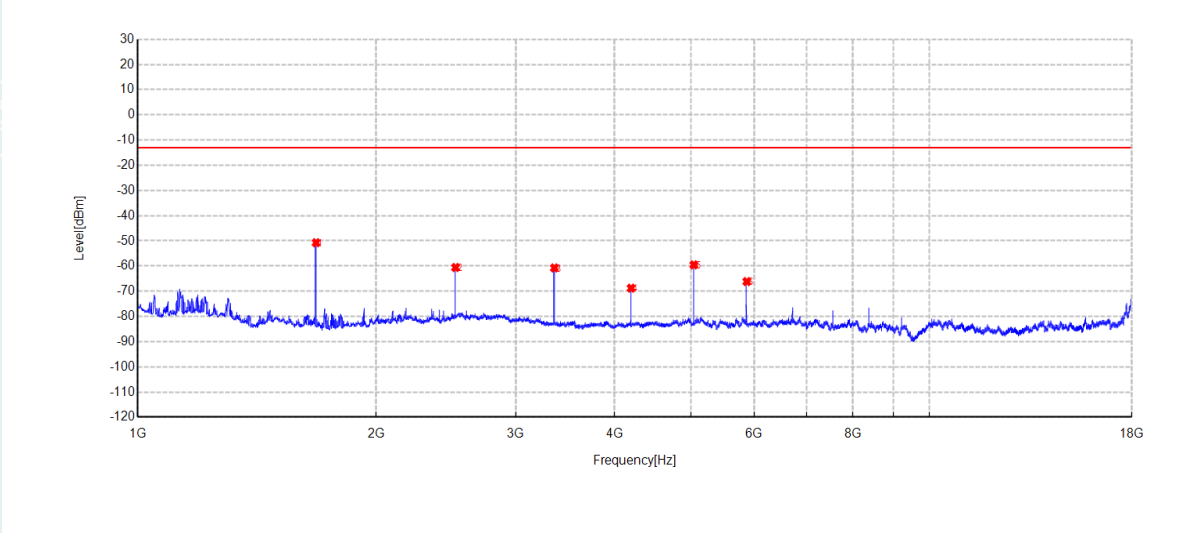


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1679.15	-27.74	-50.74	-13.00	37.74	-23.00	RMS	Vertical
2	2518.95	-43.12	-60.59	-13.00	47.59	-17.47	RMS	Vertical
3	3357.9	-42.10	-60.75	-13.00	47.75	-18.65	RMS	Vertical
4	4197.7	-51.70	-68.78	-13.00	55.78	-17.08	RMS	Vertical
5	5037.5	-44.29	-59.52	-13.00	46.52	-15.23	RMS	Vertical
6	5877.3	-52.50	-66.17	-13.00	53.17	-13.67	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21350	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

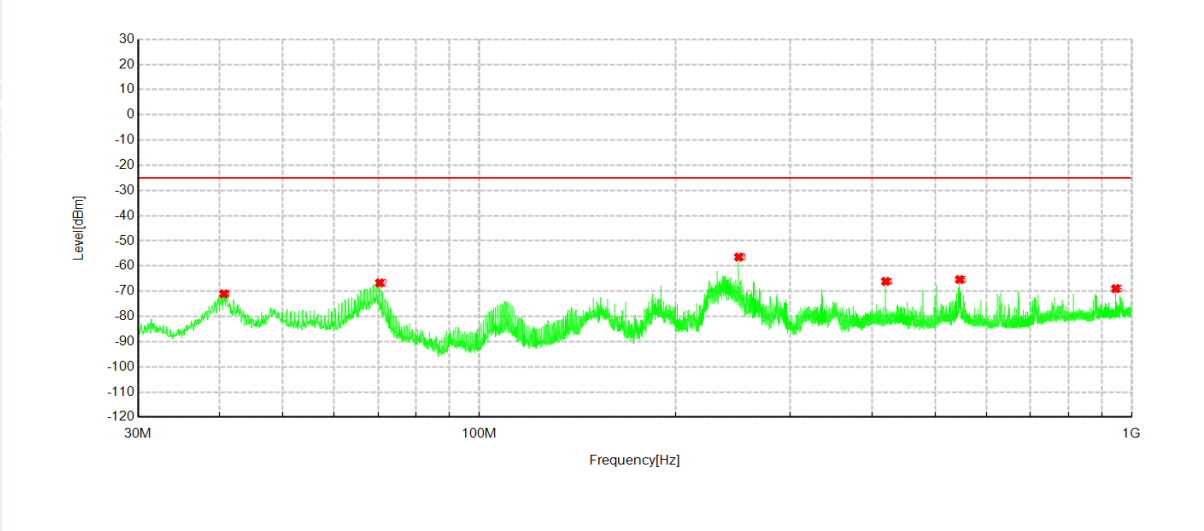


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-56.78	-71.03	-25.00	46.03	-14.25	RMS	Horizontal
2	70.4005	-44.24	-66.70	-25.00	41.70	-22.46	RMS	Horizontal
3	249.996	-39.64	-56.44	-25.00	31.44	-16.80	RMS	Horizontal
4	420.037	-52.14	-66.10	-25.00	41.10	-13.96	RMS	Horizontal
5	545.0215	-54.23	-65.35	-25.00	40.35	-11.12	RMS	Horizontal
6	945.583	-62.06	-68.97	-25.00	43.97	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21350	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

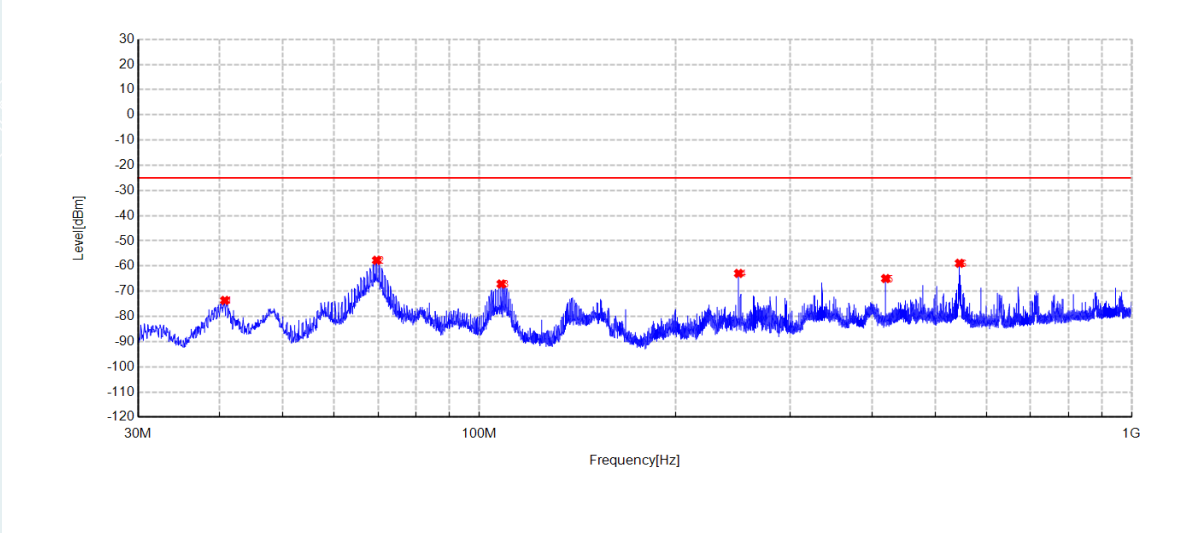


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.767	-50.15	-73.65	-25.00	48.65	-23.50	RMS	Vertical
2	69.673	-35.05	-57.72	-25.00	32.72	-22.67	RMS	Vertical
3	108.1335	-52.20	-67.12	-25.00	42.12	-14.92	RMS	Vertical
4	249.996	-42.14	-62.93	-25.00	37.93	-20.79	RMS	Vertical
5	419.9885	-50.00	-64.96	-25.00	39.96	-14.96	RMS	Vertical
6	545.0215	-48.04	-58.91	-25.00	33.91	-10.87	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21100	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

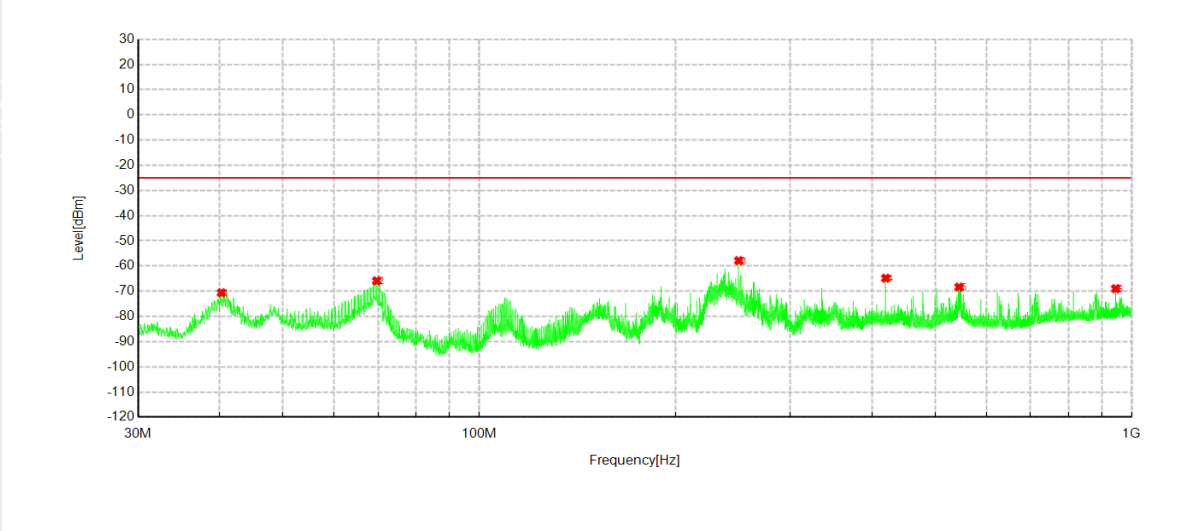


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.282	-56.42	-70.60	-25.00	45.60	-14.18	RMS	Horizontal
2	69.673	-43.74	-65.87	-25.00	40.87	-22.13	RMS	Horizontal
3	249.996	-41.05	-57.85	-25.00	32.85	-16.80	RMS	Horizontal
4	419.9885	-50.86	-64.82	-25.00	39.82	-13.96	RMS	Horizontal
5	544.003	-57.28	-68.35	-25.00	43.35	-11.07	RMS	Horizontal
6	945.6315	-62.09	-69.00	-25.00	44.00	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21100	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

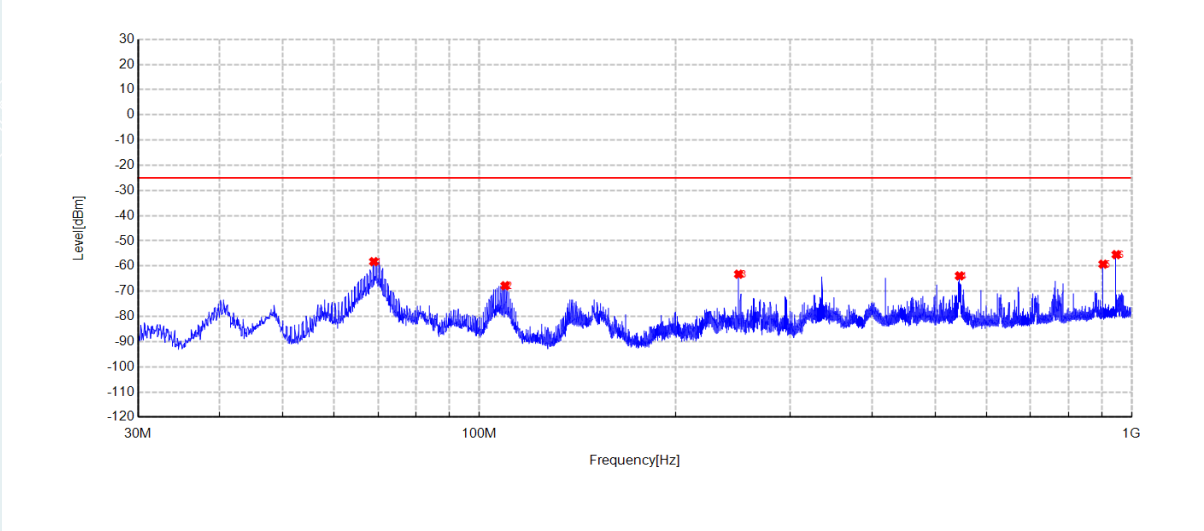


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	68.9455	-35.53	-58.25	-25.00	33.25	-22.72	RMS	Vertical
2	109.637	-53.39	-67.81	-25.00	42.81	-14.42	RMS	Vertical
3	249.996	-42.45	-63.24	-25.00	38.24	-20.79	RMS	Vertical
4	544.973	-53.03	-63.90	-25.00	38.90	-10.87	RMS	Vertical
5	904.552	-51.37	-59.26	-25.00	34.26	-7.89	RMS	Vertical
6	947.62	-48.69	-55.48	-25.00	30.48	-6.79	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20850	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

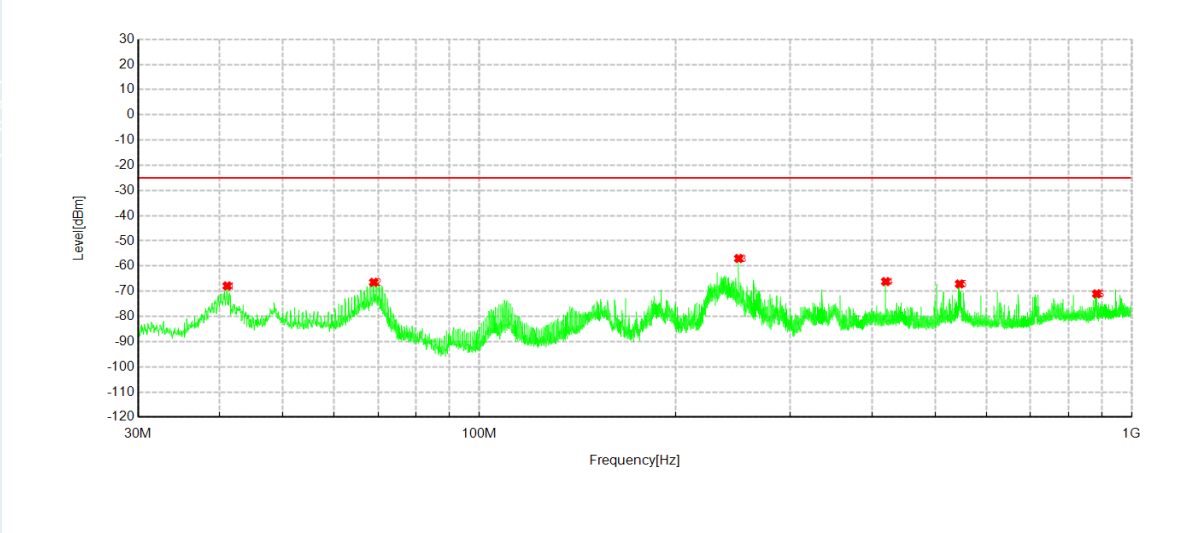


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.1065	-53.53	-67.88	-25.00	42.88	-14.35	RMS	Horizontal
2	68.9455	-44.76	-66.46	-25.00	41.46	-21.70	RMS	Horizontal
3	249.996	-40.20	-57.00	-25.00	32.00	-16.80	RMS	Horizontal
4	419.9885	-52.21	-66.17	-25.00	41.17	-13.96	RMS	Horizontal
5	545.0215	-55.99	-67.11	-25.00	42.11	-11.12	RMS	Horizontal
6	884.376	-62.93	-71.03	-25.00	46.03	-8.10	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20850	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		


Test Graph

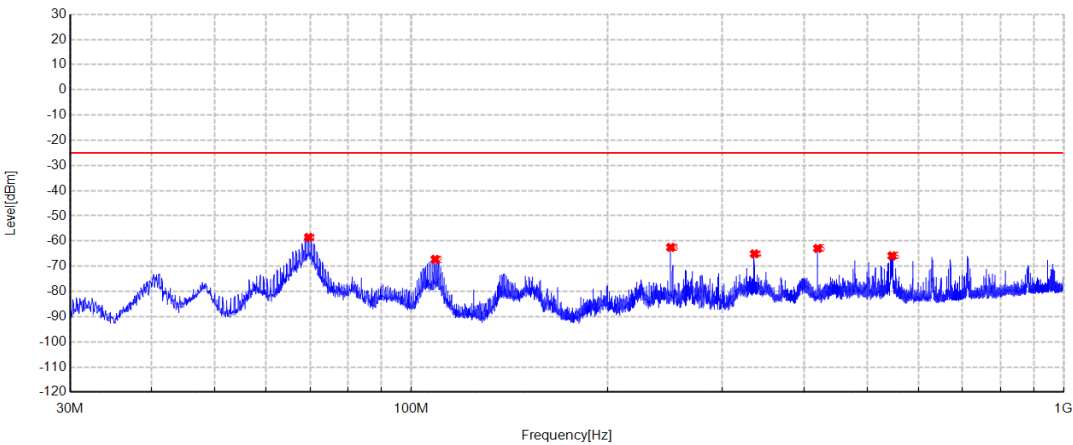

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.673	-35.88	-58.55	-25.00	33.55	-22.67	RMS	Vertical
2	108.861	-52.57	-67.25	-25.00	42.25	-14.68	RMS	Vertical
3	249.996	-41.73	-62.52	-25.00	37.52	-20.79	RMS	Vertical
4	335.9865	-49.81	-65.08	-25.00	40.08	-15.27	RMS	Vertical
5	419.9885	-47.97	-62.93	-25.00	37.93	-14.96	RMS	Vertical
6	545.943	-54.98	-65.86	-25.00	40.86	-10.88	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20850	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

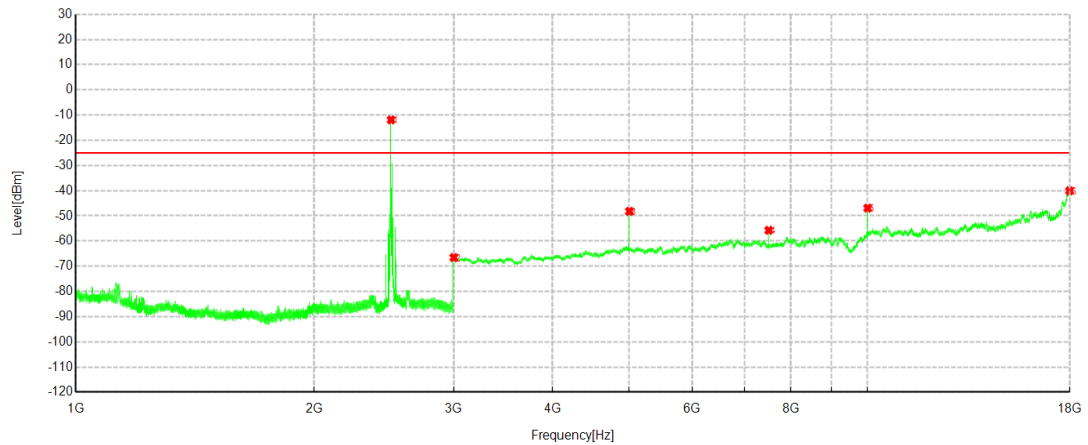
Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	2501.1	5.51	-11.91	/	/	-17.42	RMS	Horizontal
2	3001.5	-62.88	-66.56	-25.00	41.56	-3.68	RMS	Horizontal
3	5001.75	-52.44	-48.24	-25.00	23.24	4.20	RMS	Horizontal
4	7503	-66.17	-55.74	-25.00	30.74	10.43	RMS	Horizontal
5	10004.25	-66.12	-46.94	-25.00	21.94	19.18	RMS	Horizontal
6	17998.5	-76.50	-40.06	-25.00	15.06	36.44	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20850	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

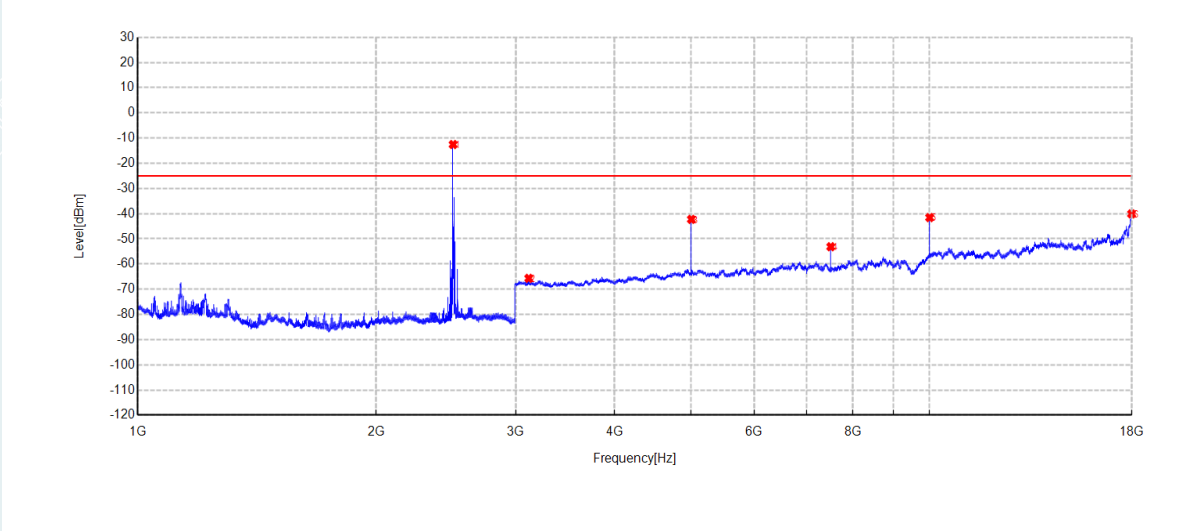


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	2501.1	5.39	-12.56	/	/	-17.95	RMS	Vertical
2	3117	-62.08	-65.67	-25.00	40.67	-3.59	RMS	Vertical
3	5001.75	-45.85	-42.26	-25.00	17.26	3.59	RMS	Vertical
4	7503	-63.40	-53.13	-25.00	28.13	10.27	RMS	Vertical
5	10004.25	-61.71	-41.56	-25.00	16.56	20.15	RMS	Vertical
6	17997.75	-76.30	-40.09	-25.00	15.09	36.21	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21100	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

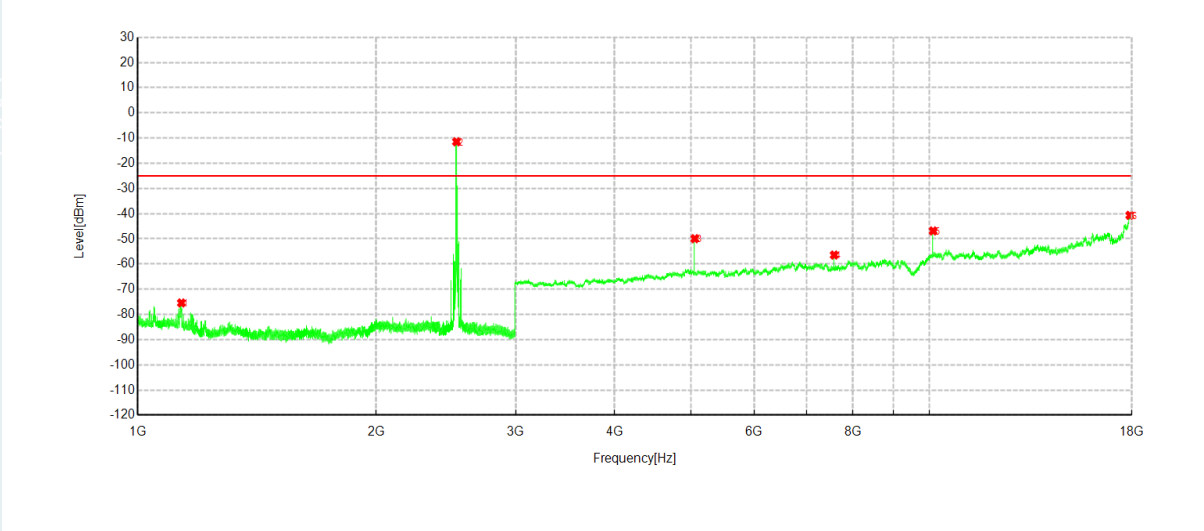


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1134.7	-57.05	-75.44	-25.00	50.44	-18.39	RMS	Horizontal
2	2526.1	5.42	-11.48	/	/	-16.90	RMS	Horizontal
3	5052	-53.96	-49.94	-25.00	24.94	4.02	RMS	Horizontal
4	7578	-67.66	-56.43	-25.00	31.43	11.23	RMS	Horizontal
5	10104	-66.70	-46.86	-25.00	21.86	19.84	RMS	Horizontal
6	17907	-77.36	-40.66	-25.00	15.66	36.70	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21100	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

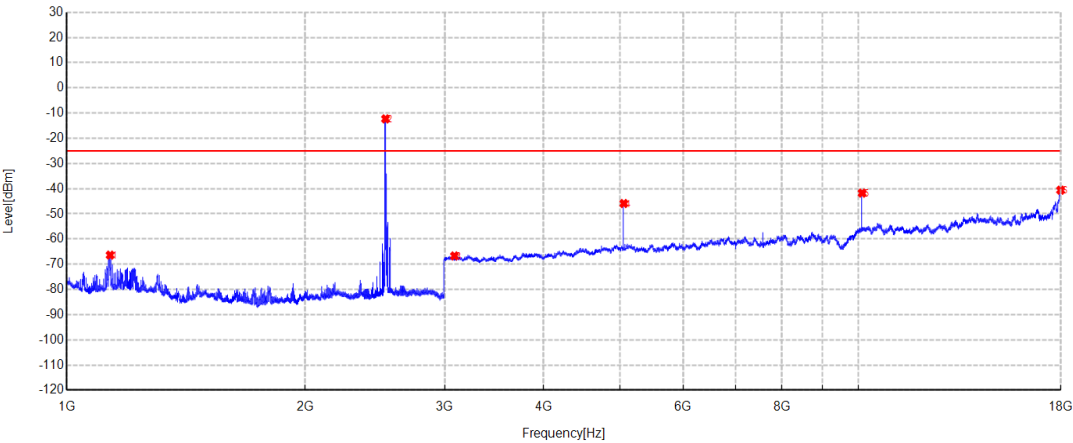


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133.9	-46.94	-66.38	-25.00	41.38	-19.44	RMS	Vertical
2	2526.1	4.96	-12.32	/	/	-17.28	RMS	Vertical
3	3087	-63.24	-66.70	-25.00	41.70	-3.46	RMS	Vertical
4	5052	-49.92	-45.89	-25.00	20.89	4.03	RMS	Vertical
5	10104.75	-62.04	-41.76	-25.00	16.76	20.28	RMS	Vertical
6	17998.5	-76.85	-40.60	-25.00	15.60	36.25	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21350	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

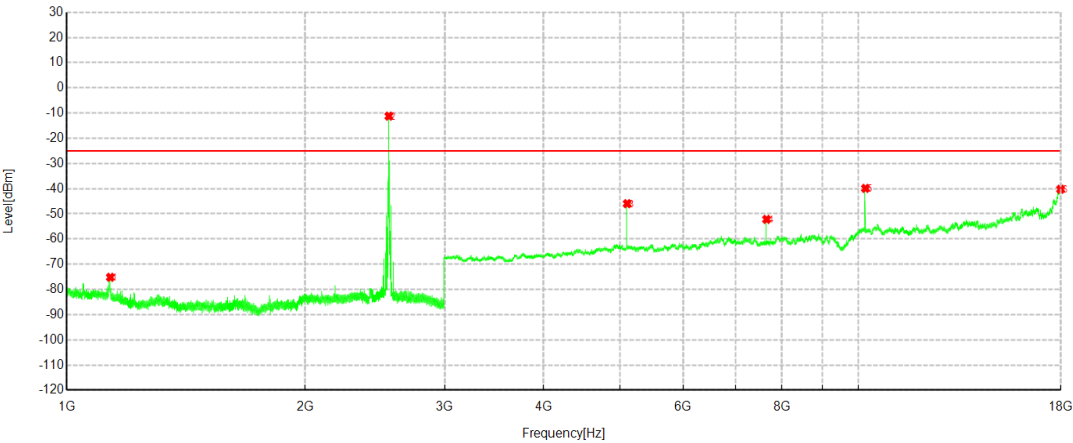


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1134.6	-56.81	-75.19	-25.00	50.19	-18.38	RMS	Horizontal
2	2551.1	5.21	-11.22	/	/	-16.43	RMS	Horizontal
3	5102.25	-49.98	-45.96	-25.00	20.96	4.02	RMS	Horizontal
4	7653	-63.01	-52.19	-25.00	27.19	10.82	RMS	Horizontal
5	10204.5	-59.87	-39.89	-25.00	14.89	19.98	RMS	Horizontal
6	17999.25	-76.66	-40.23	-25.00	15.23	36.43	RMS	Horizontal

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21350	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

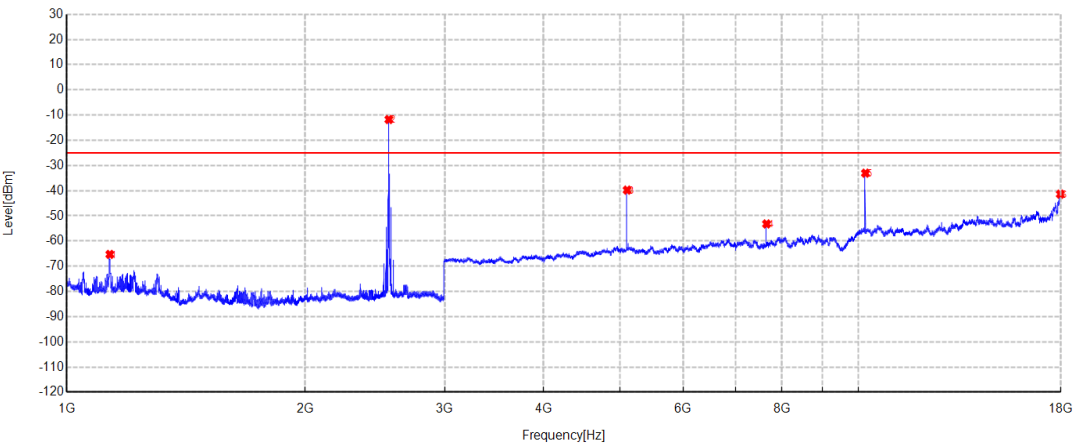


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1133	-45.83	-65.30	-25.00	40.30	-19.47	RMS	Vertical
2	2551.2	4.91	-11.76	/	/	-16.67	RMS	Vertical
3	5102.25	-44.11	-39.78	-25.00	14.78	4.33	RMS	Vertical
4	7653	-64.02	-53.21	-25.00	28.21	10.81	RMS	Vertical
5	10204.5	-53.51	-33.06	-25.00	8.06	20.45	RMS	Vertical
6	17985.75	-77.01	-41.39	-25.00	16.39	35.62	RMS	Vertical

NOTE: NO.2 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20850	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:25.6℃;Humi:54%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-09		

Test Graph

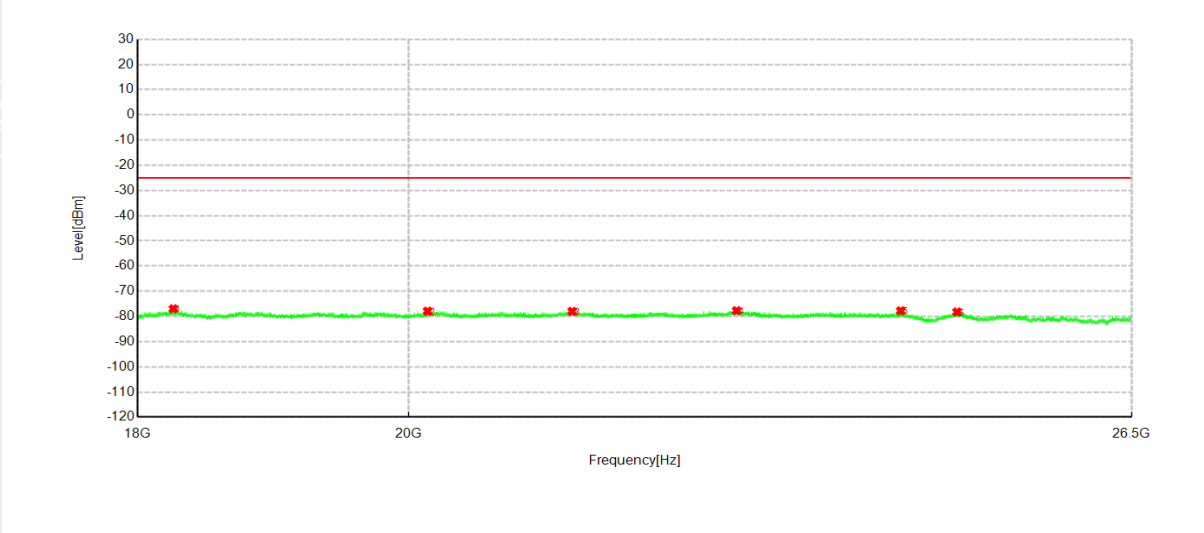


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18249.57	-61.97	-76.97	-25.00	51.97	-15.00	RMS	Horizontal
2	20148.20	-62.79	-77.91	-25.00	52.91	-15.12	RMS	Horizontal
3	21314.45	-64.14	-77.99	-25.00	52.99	-13.85	RMS	Horizontal
4	22723.80	-65.48	-77.72	-25.00	52.72	-12.24	RMS	Horizontal
5	24221.90	-65.68	-77.76	-25.00	52.76	-12.08	RMS	Horizontal
6	24759.81	-66.86	-78.22	-25.00	53.22	-11.36	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	20850	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:25.6℃;Humi:54%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-09		

Test Graph

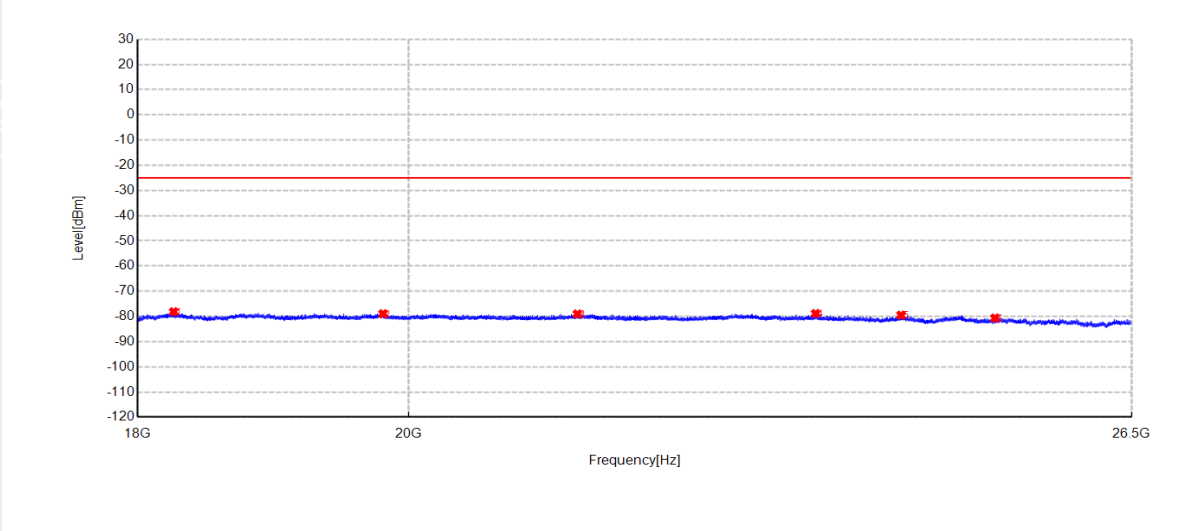


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18251.95	-62.11	-78.14	-25.00	53.14	-16.03	RMS	Vertical
2	19801.73	-62.88	-78.93	-25.00	53.93	-16.05	RMS	Vertical
3	21358.31	-64.19	-79.01	-25.00	54.01	-14.82	RMS	Vertical
4	23433.75	-65.31	-78.84	-25.00	53.84	-13.53	RMS	Vertical
5	24224.96	-66.03	-79.49	-25.00	54.49	-13.46	RMS	Vertical
6	25127.70	-67.35	-80.65	-25.00	55.65	-13.30	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21100	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:25.6℃;Humi:54%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-09		

Test Graph

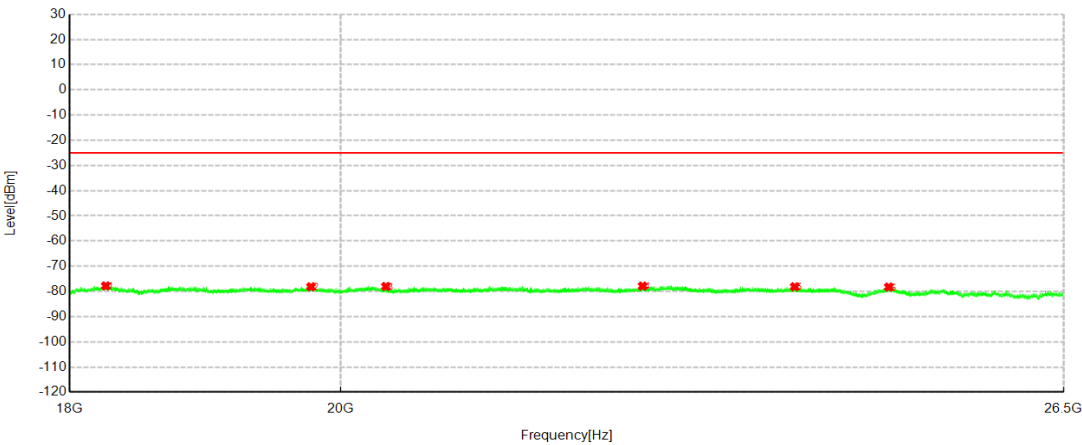


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18252.63	-62.79	-77.81	-25.00	52.81	-15.02	RMS	Horizontal
2	19770.45	-62.95	-78.16	-25.00	53.16	-15.21	RMS	Horizontal
3	20355.27	-63.18	-78.02	-25.00	53.02	-14.84	RMS	Horizontal
4	22494.63	-65.47	-77.88	-25.00	52.88	-12.41	RMS	Horizontal
5	23867.27	-65.95	-78.14	-25.00	53.14	-12.19	RMS	Horizontal
6	24757.43	-66.92	-78.26	-25.00	53.26	-11.34	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21100	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:25.6℃;Humi:54%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-09		

Test Graph

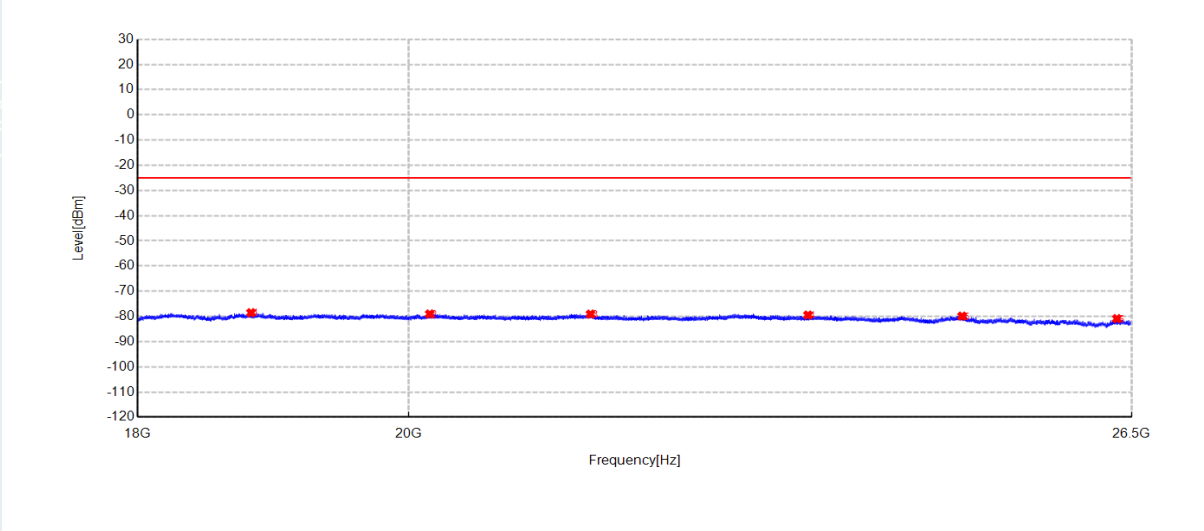


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18809.91	-62.09	-78.53	-25.00	53.53	-16.44	RMS	Vertical
2	20164.86	-63.09	-79.03	-25.00	54.03	-15.94	RMS	Vertical
3	21467.45	-64.63	-79.09	-25.00	54.09	-14.46	RMS	Vertical
4	23364.05	-65.85	-79.46	-25.00	54.46	-13.61	RMS	Vertical
5	24808.43	-66.96	-79.90	-25.00	54.90	-12.94	RMS	Vertical
6	26349.03	-67.55	-80.88	-25.00	55.88	-13.33	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21350	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:25.6℃;Humi:54%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-09		

Test Graph

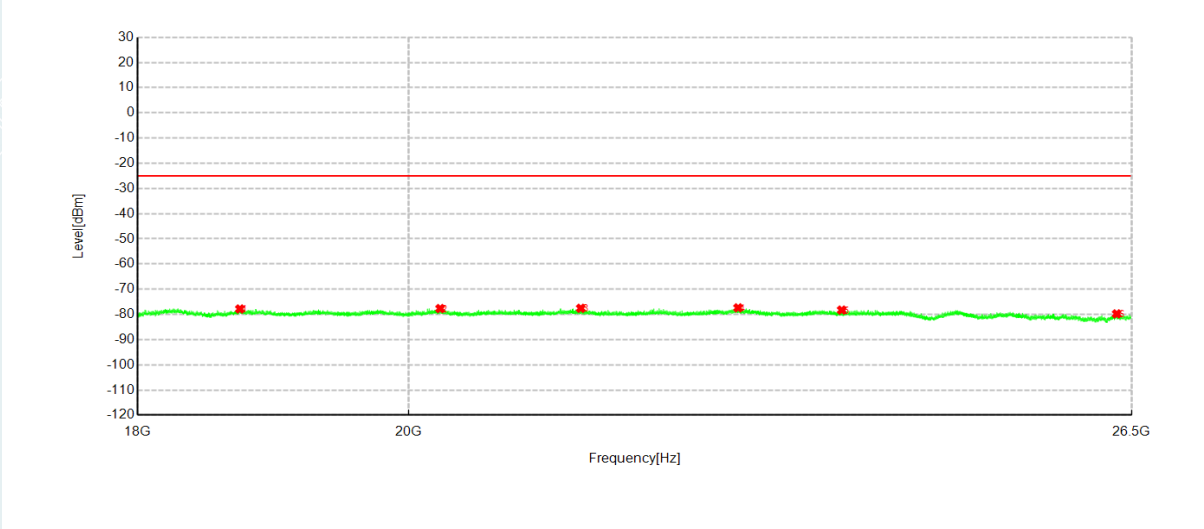


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18728.64	-62.20	-77.83	-25.00	52.83	-15.63	RMS	Horizontal
2	20247.14	-63.02	-77.67	-25.00	52.67	-14.65	RMS	Horizontal
3	21386.19	-63.80	-77.56	-25.00	52.56	-13.76	RMS	Horizontal
4	22737.06	-65.15	-77.38	-25.00	52.38	-12.23	RMS	Horizontal
5	23672.78	-65.93	-78.27	-25.00	53.27	-12.34	RMS	Horizontal
6	26347.33	-67.73	-79.78	-25.00	54.78	-12.05	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	21350	Band:	Band=7 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:25.6℃;Humi:54%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-09		

Test Graph

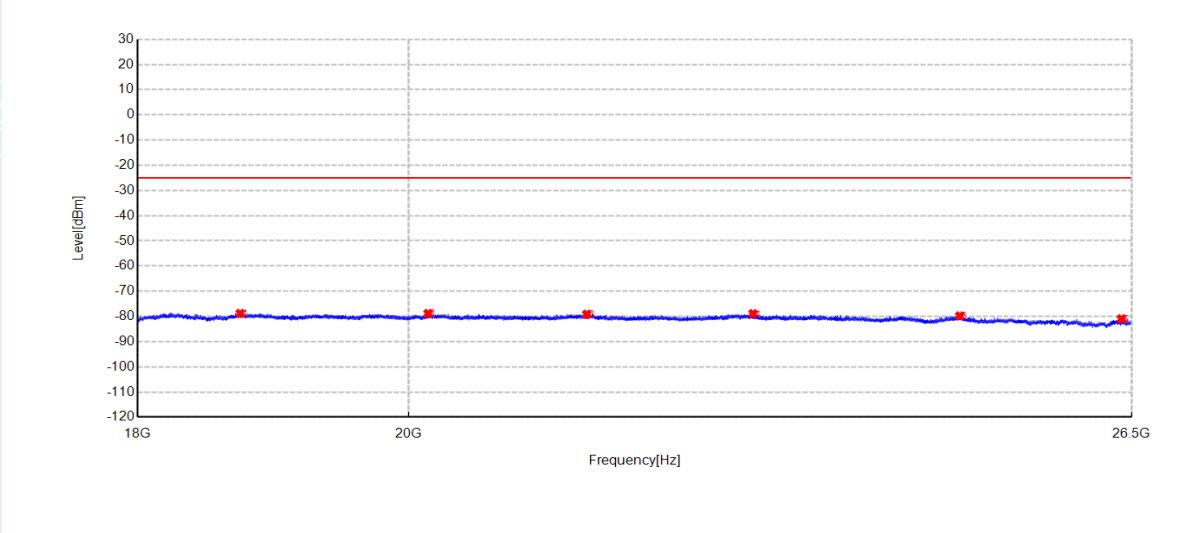


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	18731.36	-62.47	-78.78	-25.00	53.78	-16.31	RMS	Vertical
2	20152.28	-62.83	-78.81	-25.00	53.81	-15.98	RMS	Vertical
3	21435.83	-64.56	-79.12	-25.00	54.12	-14.56	RMS	Vertical
4	22868.99	-65.21	-78.89	-25.00	53.89	-13.68	RMS	Vertical
5	24785.99	-66.96	-79.82	-25.00	54.82	-12.86	RMS	Vertical
6	26395.95	-67.88	-80.95	-25.00	55.95	-13.07	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23060	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

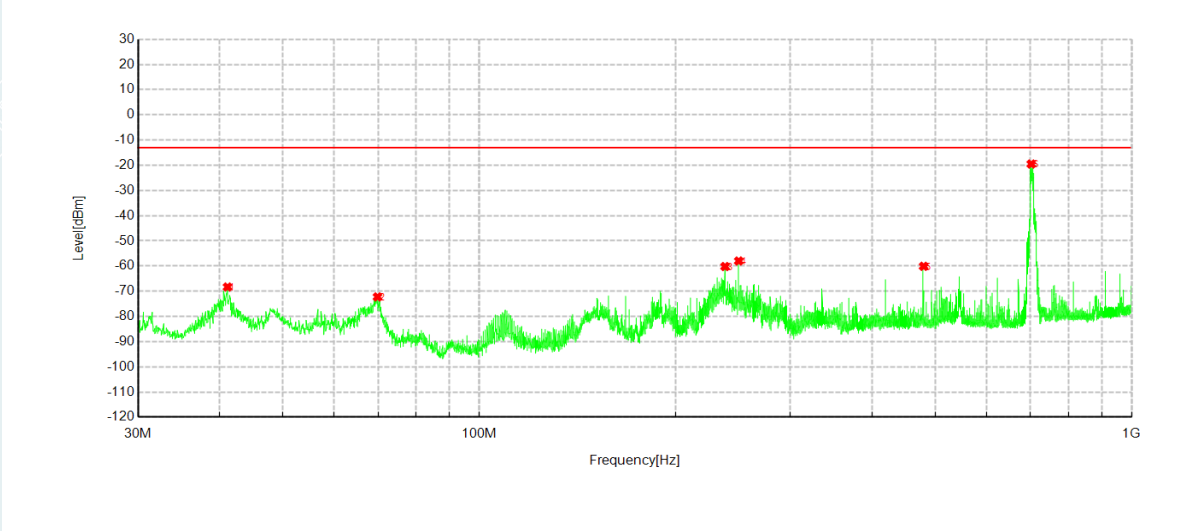


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.155	-53.96	-68.32	-13.00	55.32	-14.36	RMS	Horizontal
2	69.867	-50.00	-72.25	-13.00	59.25	-22.25	RMS	Horizontal
3	238.2105	-43.71	-60.20	-13.00	47.20	-16.49	RMS	Horizontal
4	249.996	-41.19	-57.99	-13.00	44.99	-16.80	RMS	Horizontal
5	480.08	-46.03	-60.10	-13.00	47.10	-14.07	RMS	Horizontal
6	701.8705	-9.20	-19.51	/	/	-10.31	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23060	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

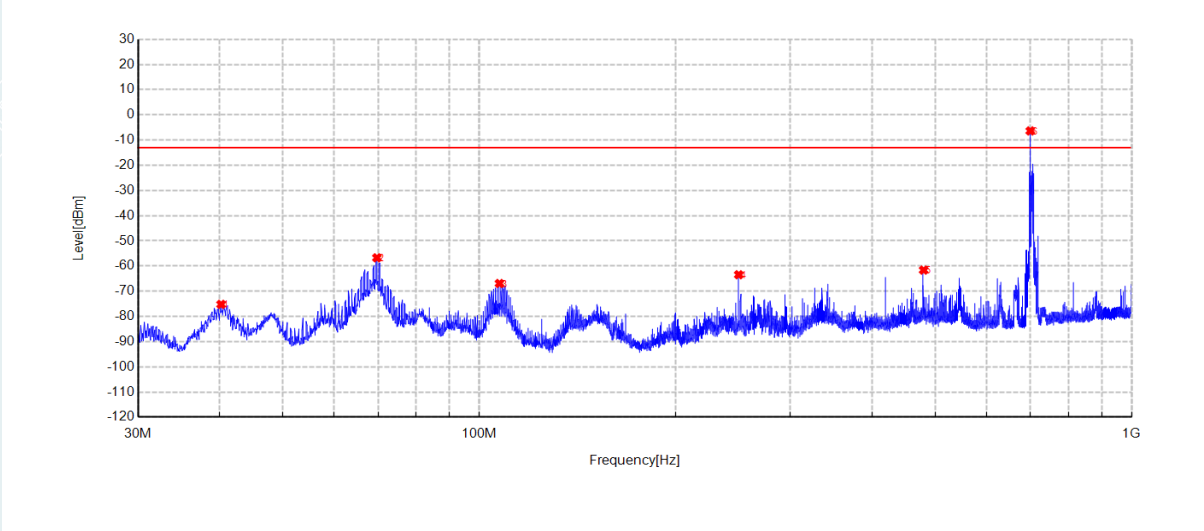


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.2335	-51.62	-75.22	-13.00	62.22	-23.60	RMS	Vertical
2	69.7215	-34.06	-56.73	-13.00	43.73	-22.67	RMS	Vertical
3	107.4545	-51.77	-66.91	-13.00	53.91	-15.14	RMS	Vertical
4	249.996	-42.66	-63.45	-13.00	50.45	-20.79	RMS	Vertical
5	480.08	-48.72	-61.61	-13.00	48.61	-12.89	RMS	Vertical
6	699.5425	3.33	-6.37	/	/	-9.70	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23095	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

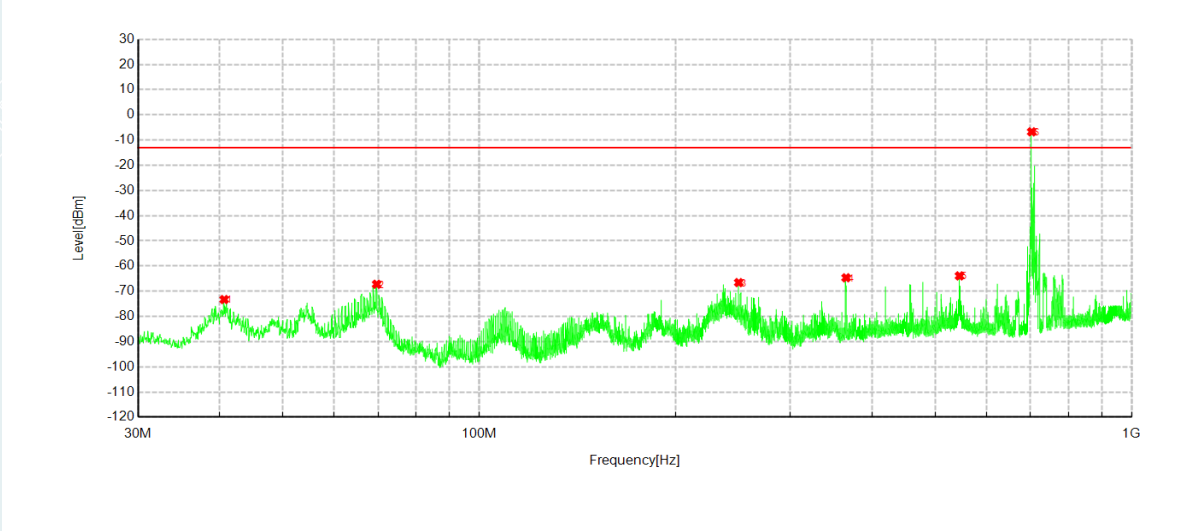


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.67	-59.04	-73.30	-13.00	60.30	-14.26	RMS	Horizontal
2	69.673	-45.09	-67.22	-13.00	54.22	-22.13	RMS	Horizontal
3	249.996	-49.77	-66.57	-13.00	53.57	-16.80	RMS	Horizontal
4	365.1835	-48.12	-64.66	-13.00	51.66	-16.54	RMS	Horizontal
5	544.973	-52.79	-63.91	-13.00	50.91	-11.12	RMS	Horizontal
6	703.083	3.53	-6.73	/	/	-10.26	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23095	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

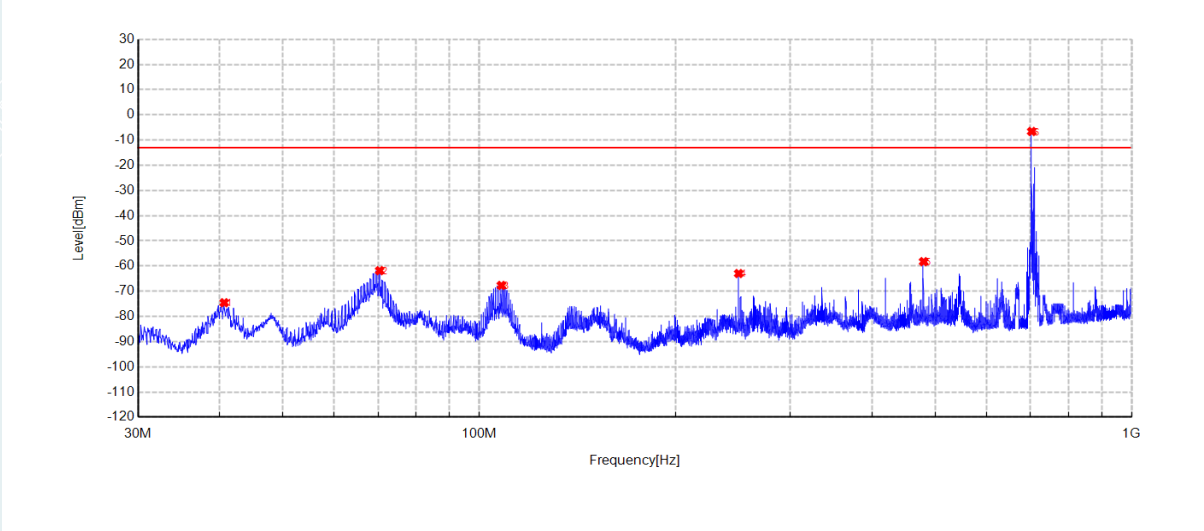


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.67	-51.04	-74.56	-13.00	61.56	-23.52	RMS	Vertical
2	70.4005	-39.10	-61.83	-13.00	48.83	-22.73	RMS	Vertical
3	108.182	-52.79	-67.70	-13.00	54.70	-14.91	RMS	Vertical
4	249.996	-42.18	-62.97	-13.00	49.97	-20.79	RMS	Vertical
5	480.0315	-45.37	-58.26	-13.00	45.26	-12.89	RMS	Vertical
6	703.1315	3.04	-6.59	/	/	-9.63	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23130	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

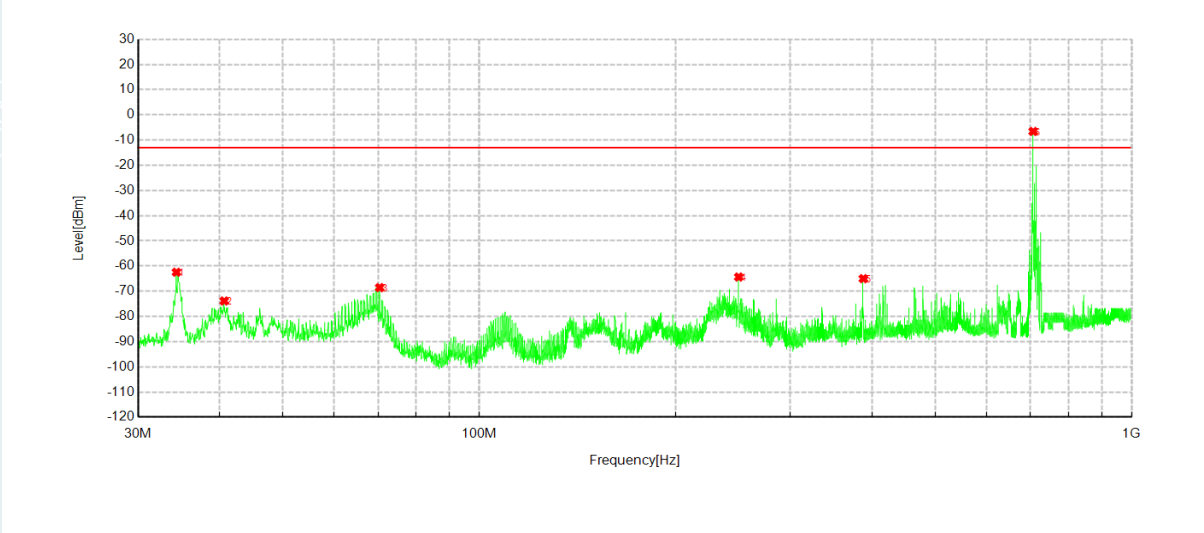


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	34.365	-48.45	-62.46	-13.00	49.46	-14.01	RMS	Horizontal
2	40.67	-59.61	-73.87	-13.00	60.87	-14.26	RMS	Horizontal
3	70.4005	-46.10	-68.56	-13.00	55.56	-22.46	RMS	Horizontal
4	249.996	-47.56	-64.36	-13.00	51.36	-16.80	RMS	Horizontal
5	388.027	-49.40	-65.01	-13.00	52.01	-15.61	RMS	Horizontal
6	706.6235	3.56	-6.58	/	/	-10.14	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23130	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

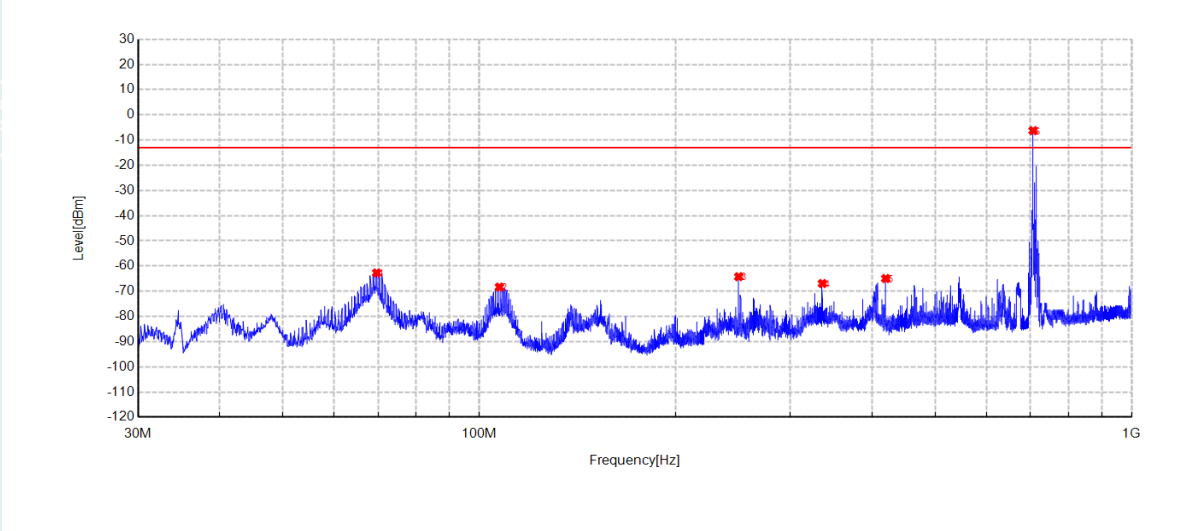


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.673	-40.04	-62.71	-13.00	49.71	-22.67	RMS	Vertical
2	107.4545	-53.20	-68.34	-13.00	55.34	-15.14	RMS	Vertical
3	249.996	-43.44	-64.23	-13.00	51.23	-20.79	RMS	Vertical
4	335.938	-51.66	-66.93	-13.00	53.93	-15.27	RMS	Vertical
5	419.9885	-49.98	-64.94	-13.00	51.94	-14.96	RMS	Vertical
6	706.575	3.29	-6.26	/	/	-9.55	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23060	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

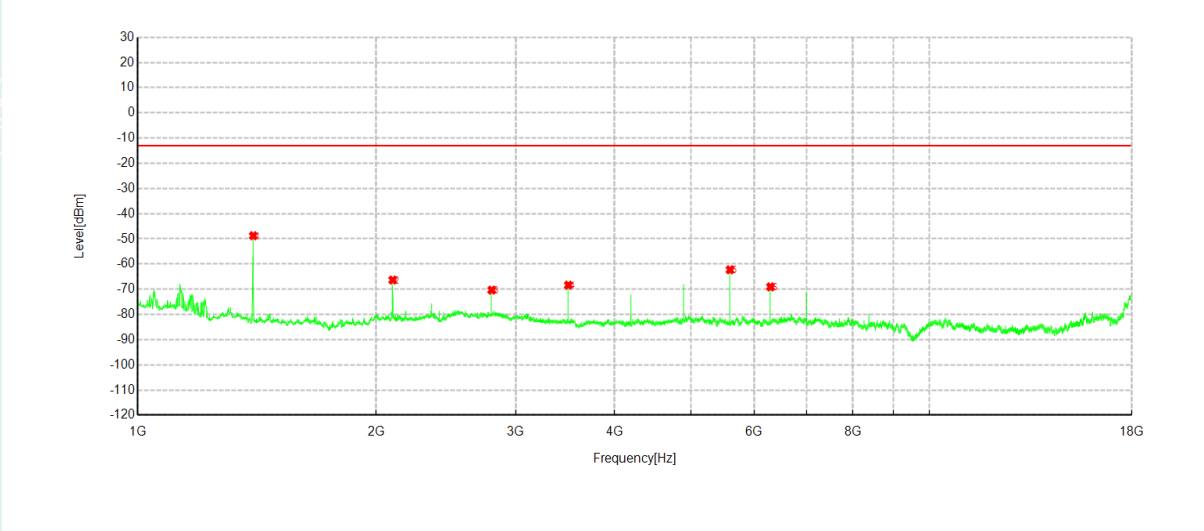


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1398.65	-26.38	-48.77	-13.00	35.77	-22.39	RMS	Horizontal
2	2098.2	-46.30	-66.35	-13.00	53.35	-20.05	RMS	Horizontal
3	2798.6	-53.83	-70.34	-13.00	57.34	-16.51	RMS	Horizontal
4	3497.3	-50.36	-68.38	-13.00	55.38	-18.02	RMS	Horizontal
5	5596.8	-47.37	-62.28	-13.00	49.28	-14.91	RMS	Horizontal
6	6296.35	-55.52	-69.06	-13.00	56.06	-13.54	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23060	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

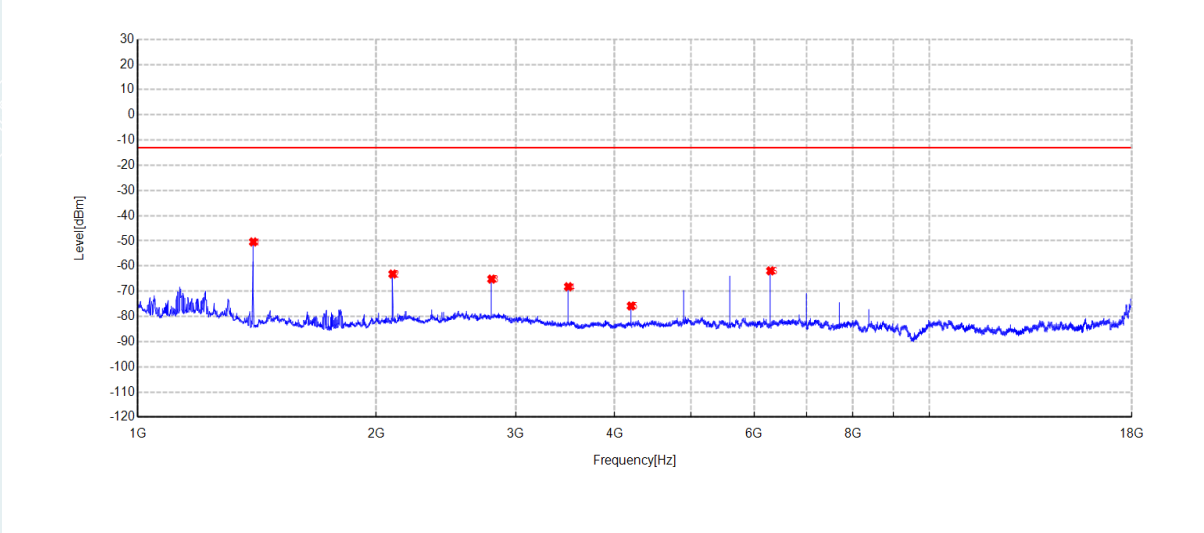


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1398.65	-26.61	-50.43	-13.00	37.43	-23.82	RMS	Vertical
2	2098.2	-42.90	-63.17	-13.00	50.17	-20.27	RMS	Vertical
3	2797.75	-48.19	-65.19	-13.00	52.19	-17.00	RMS	Vertical
4	3497.3	-50.16	-68.21	-13.00	55.21	-18.05	RMS	Vertical
5	4197.7	-58.77	-75.85	-13.00	62.85	-17.08	RMS	Vertical
6	6296.35	-48.07	-61.91	-13.00	48.91	-13.84	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23095	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

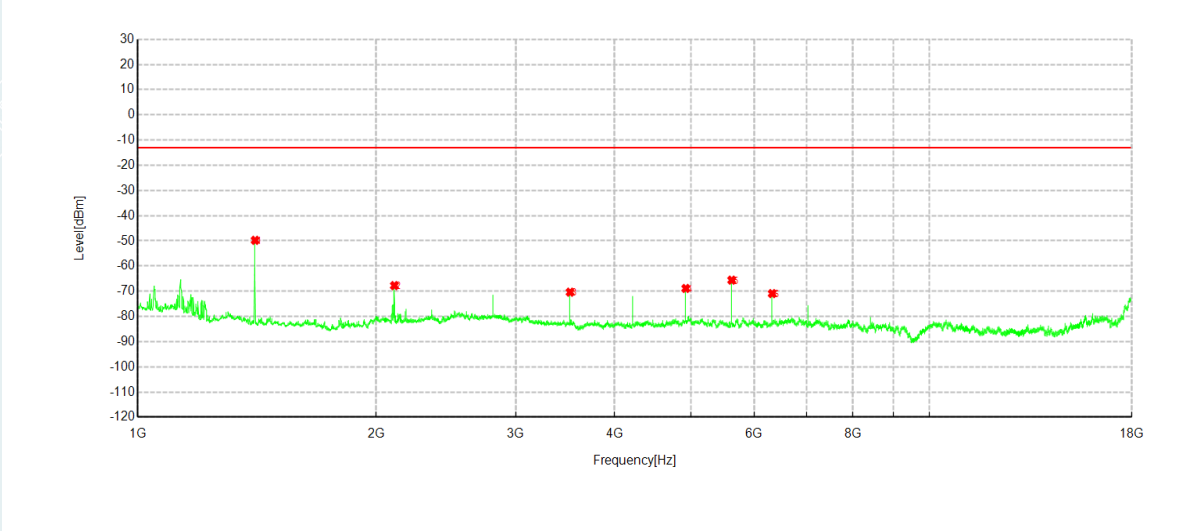


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1406.3	-27.42	-49.79	-13.00	36.79	-22.37	RMS	Horizontal
2	2108.4	-47.67	-67.76	-13.00	54.76	-20.09	RMS	Horizontal
3	3515.15	-52.31	-70.38	-13.00	57.38	-18.07	RMS	Horizontal
4	4921.05	-53.87	-68.89	-13.00	55.89	-15.02	RMS	Horizontal
5	5624.85	-50.99	-65.59	-13.00	52.59	-14.60	RMS	Horizontal
6	6327.8	-57.62	-70.93	-13.00	57.93	-13.31	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23095	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

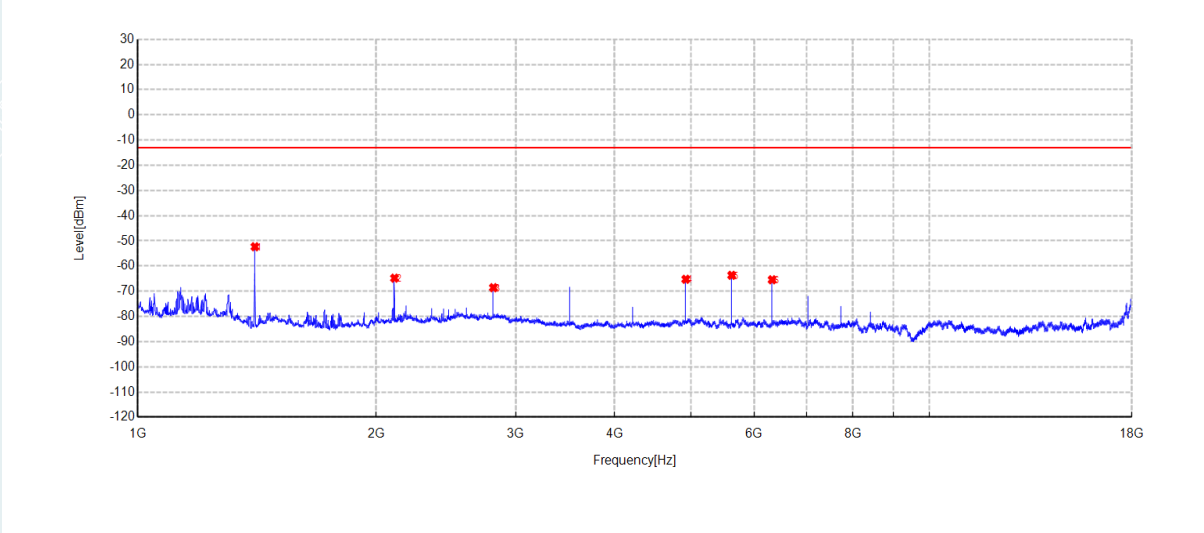


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1405.45	-28.71	-52.34	-13.00	39.34	-23.63	RMS	Vertical
2	2109.25	-44.64	-64.81	-13.00	51.81	-20.17	RMS	Vertical
3	2812.2	-51.64	-68.58	-13.00	55.58	-16.94	RMS	Vertical
4	4921.05	-50.13	-65.25	-13.00	52.25	-15.12	RMS	Vertical
5	5624.85	-48.92	-63.67	-13.00	50.67	-14.75	RMS	Vertical
6	6326.95	-51.96	-65.45	-13.00	52.45	-13.49	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23130	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

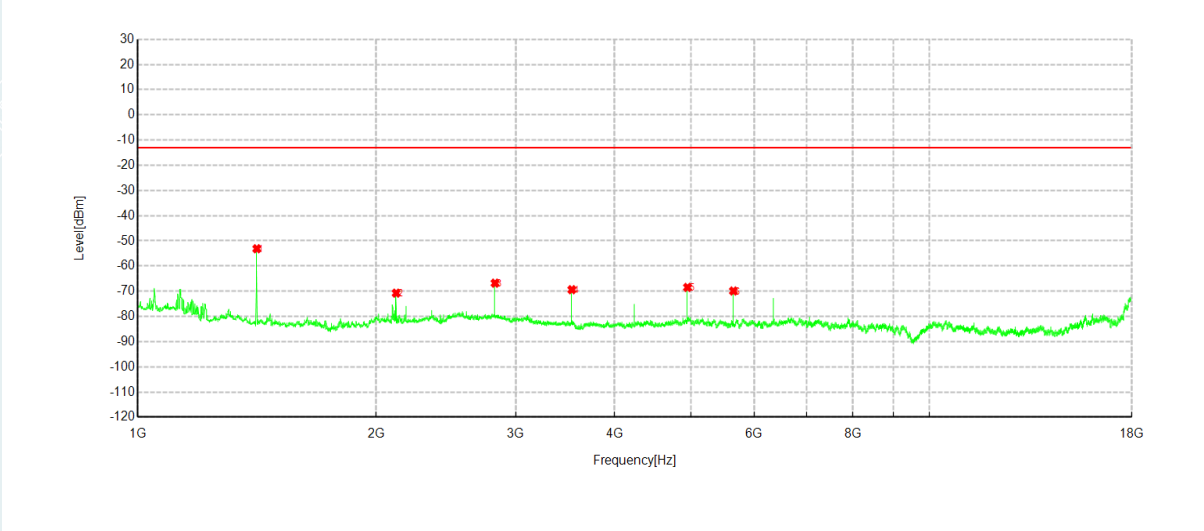


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1413.1	-30.83	-53.13	-13.00	40.13	-22.30	RMS	Horizontal
2	2119.45	-50.62	-70.75	-13.00	57.75	-20.13	RMS	Horizontal
3	2825.8	-50.07	-66.79	-13.00	53.79	-16.72	RMS	Horizontal
4	3533	-51.23	-69.39	-13.00	56.39	-18.16	RMS	Horizontal
5	4945.7	-53.78	-68.48	-13.00	55.48	-14.70	RMS	Horizontal
6	5652.9	-55.61	-69.90	-13.00	56.90	-14.29	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23130	Band:	Band=12 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

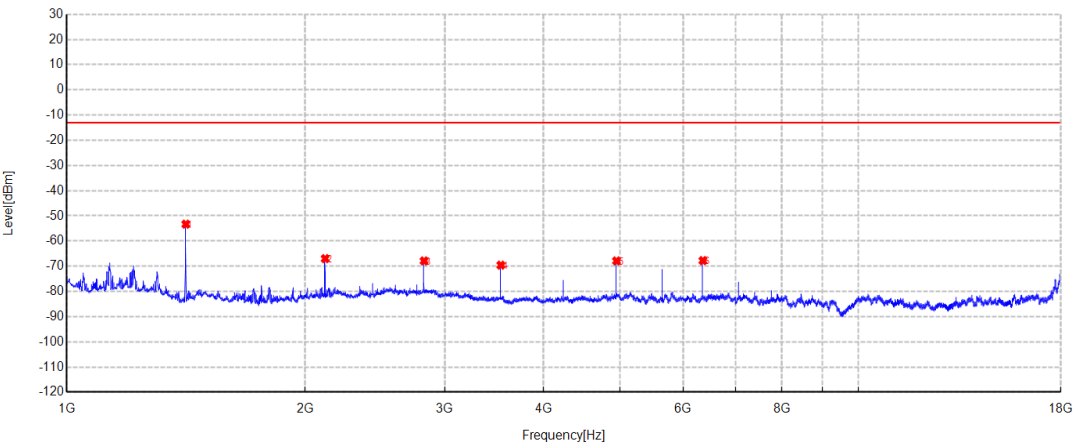


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1413.1	-30.05	-53.31	-13.00	40.31	-23.26	RMS	Vertical
2	2119.45	-46.91	-66.98	-13.00	53.98	-20.07	RMS	Vertical
3	2825.8	-50.99	-67.89	-13.00	54.89	-16.90	RMS	Vertical
4	3533	-51.46	-69.57	-13.00	56.57	-18.11	RMS	Vertical
5	4945.7	-53.07	-67.89	-13.00	54.89	-14.82	RMS	Vertical
6	6359.25	-54.62	-67.76	-13.00	54.76	-13.14	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23230	Band:	Band=13 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

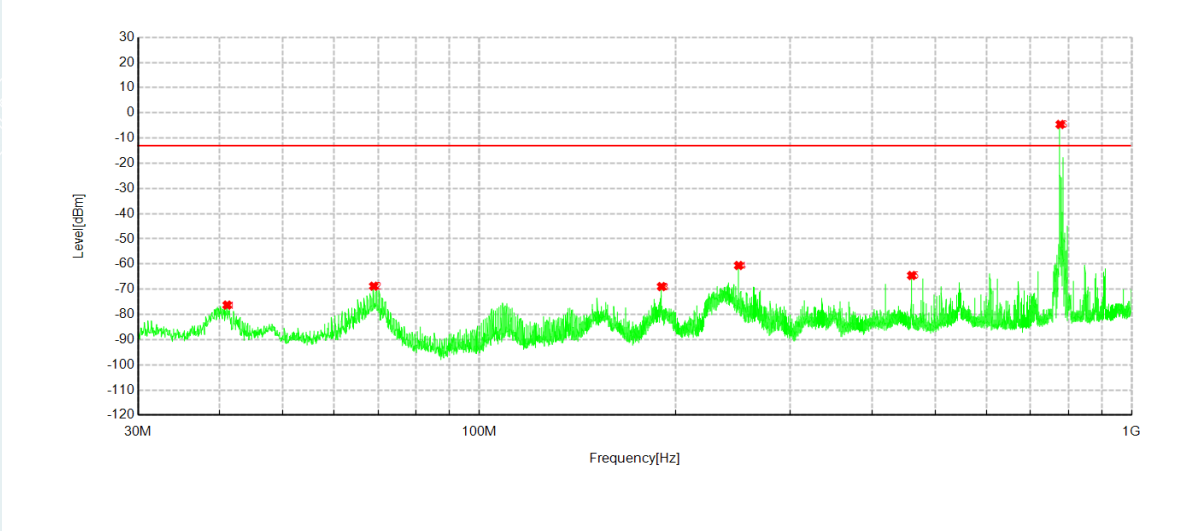


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	41.1065	-61.94	-76.29	-13.00	63.29	-14.35	RMS	Horizontal
2	68.9455	-47.10	-68.80	-13.00	55.80	-21.70	RMS	Horizontal
3	190.3895	-46.38	-68.95	-13.00	55.95	-22.57	RMS	Horizontal
4	249.996	-43.78	-60.58	-13.00	47.58	-16.80	RMS	Horizontal
5	460.389	-50.50	-64.55	-13.00	51.55	-14.05	RMS	Horizontal
6	777.6275	3.89	-4.59	/	/	-8.48	RMS	Horizontal

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23230	Band:	Band=13 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

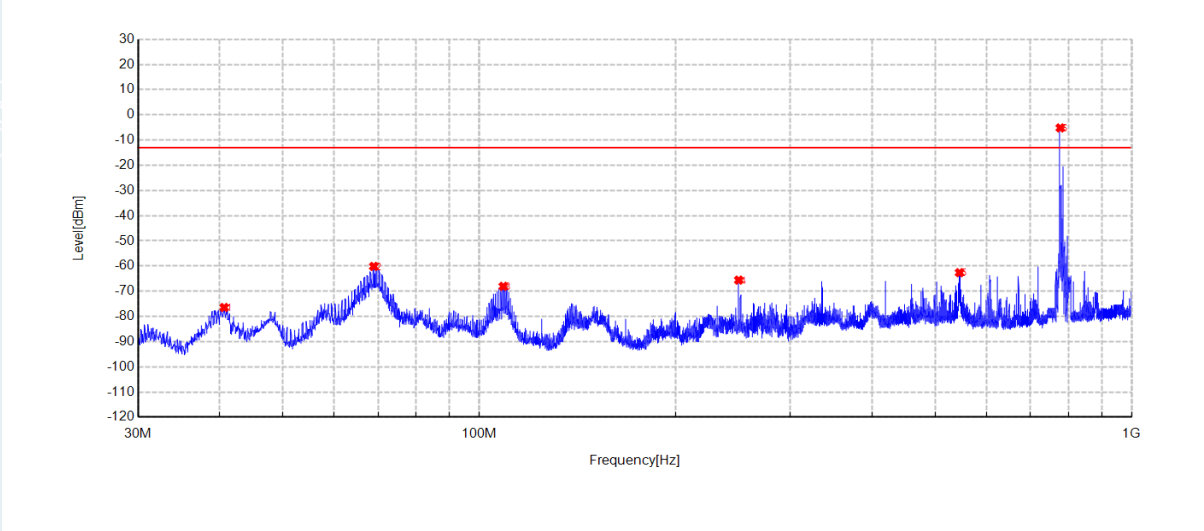


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.67	-52.93	-76.45	-13.00	63.45	-23.52	RMS	Vertical
2	68.9455	-37.42	-60.14	-13.00	47.14	-22.72	RMS	Vertical
3	108.9095	-53.39	-68.06	-13.00	55.06	-14.67	RMS	Vertical
4	249.996	-44.79	-65.58	-13.00	52.58	-20.79	RMS	Vertical
5	544.973	-51.75	-62.62	-13.00	49.62	-10.87	RMS	Vertical
6	777.6275	3.86	-5.18	/	/	-9.04	RMS	Vertical

NOTE: NO.6 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23230	Band:	Band=13 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

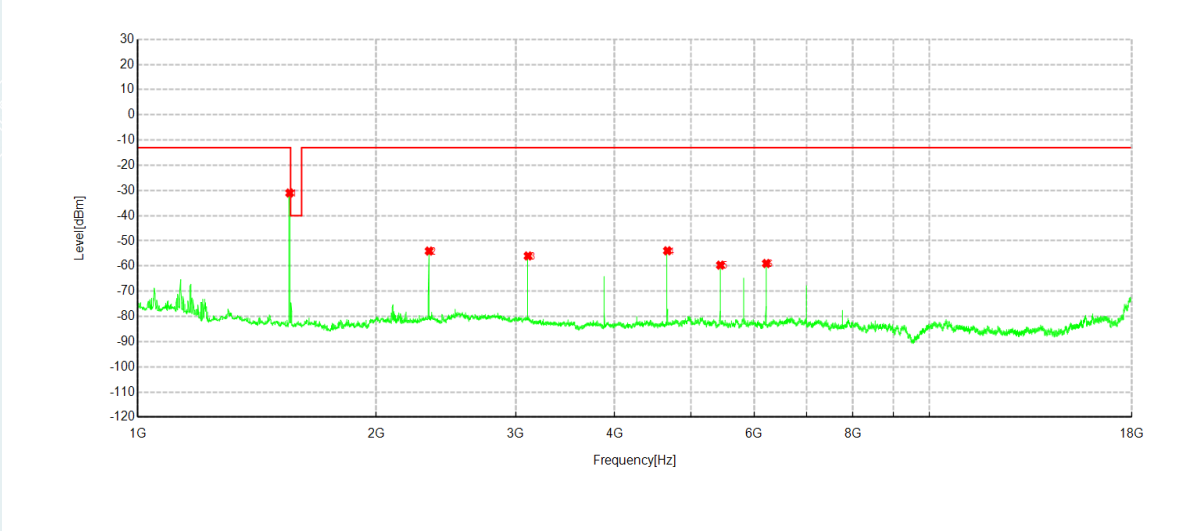


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1555.05	-8.38	-31.00	-13.00	18.00	-22.62	RMS	Horizontal
2	2332.8	-35.56	-54.06	-13.00	41.06	-18.50	RMS	Horizontal
3	3110.55	-38.77	-56.00	-13.00	43.00	-17.23	RMS	Horizontal
4	4665.2	-37.42	-53.94	-13.00	40.94	-16.52	RMS	Horizontal
5	5442.95	-45.03	-59.65	-13.00	46.65	-14.62	RMS	Horizontal
6	6220.7	-45.55	-58.99	-13.00	45.99	-13.44	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	23230	Band:	Band=13 BW=10MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

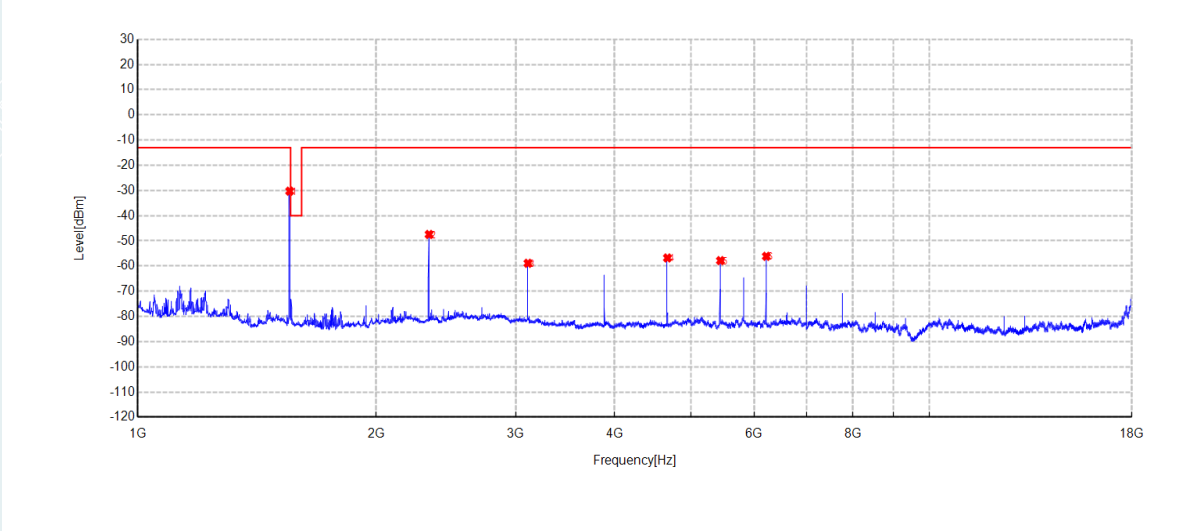


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1555.05	-8.37	-30.28	-13.00	17.28	-21.91	RMS	Vertical
2	2332.8	-28.38	-47.46	-13.00	34.46	-19.08	RMS	Vertical
3	3109.7	-41.21	-58.91	-13.00	45.91	-17.70	RMS	Vertical
4	4665.2	-39.91	-56.79	-13.00	43.79	-16.88	RMS	Vertical
5	5442.95	-43.02	-57.84	-13.00	44.84	-14.82	RMS	Vertical
6	6220.7	-42.86	-56.14	-13.00	43.14	-13.28	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26140	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

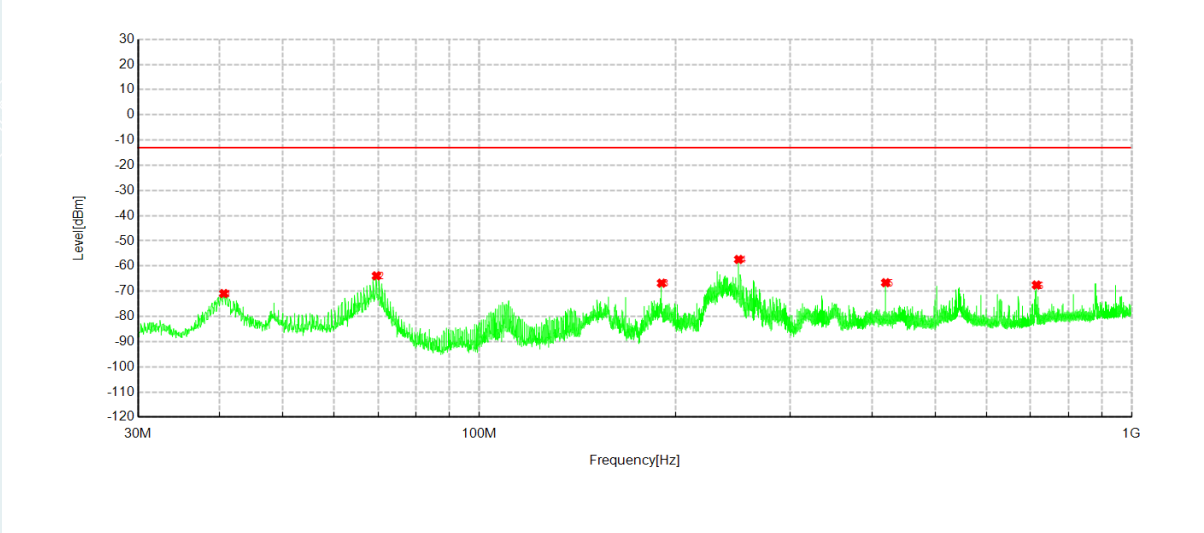


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.6215	-56.67	-70.92	-13.00	57.92	-14.25	RMS	Horizontal
2	69.6245	-41.80	-63.90	-13.00	50.90	-22.10	RMS	Horizontal
3	190.3895	-44.23	-66.80	-13.00	53.80	-22.57	RMS	Horizontal
4	249.996	-40.59	-57.39	-13.00	44.39	-16.80	RMS	Horizontal
5	419.94	-52.66	-66.62	-13.00	53.62	-13.96	RMS	Horizontal
6	715.014	-57.76	-67.54	-13.00	54.54	-9.78	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26140	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

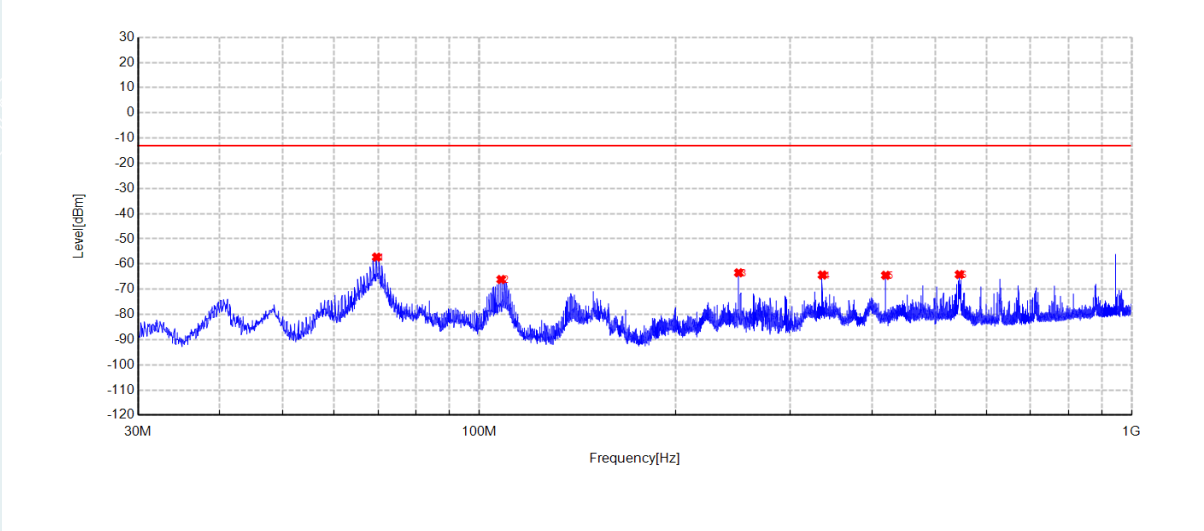


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.673	-34.58	-57.25	-13.00	44.25	-22.67	RMS	Vertical
2	108.085	-51.20	-66.14	-13.00	53.14	-14.94	RMS	Vertical
3	249.996	-42.67	-63.46	-13.00	50.46	-20.79	RMS	Vertical
4	335.9865	-49.09	-64.36	-13.00	51.36	-15.27	RMS	Vertical
5	419.9885	-49.52	-64.48	-13.00	51.48	-14.96	RMS	Vertical
6	544.8275	-53.30	-64.17	-13.00	51.17	-10.87	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26365	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

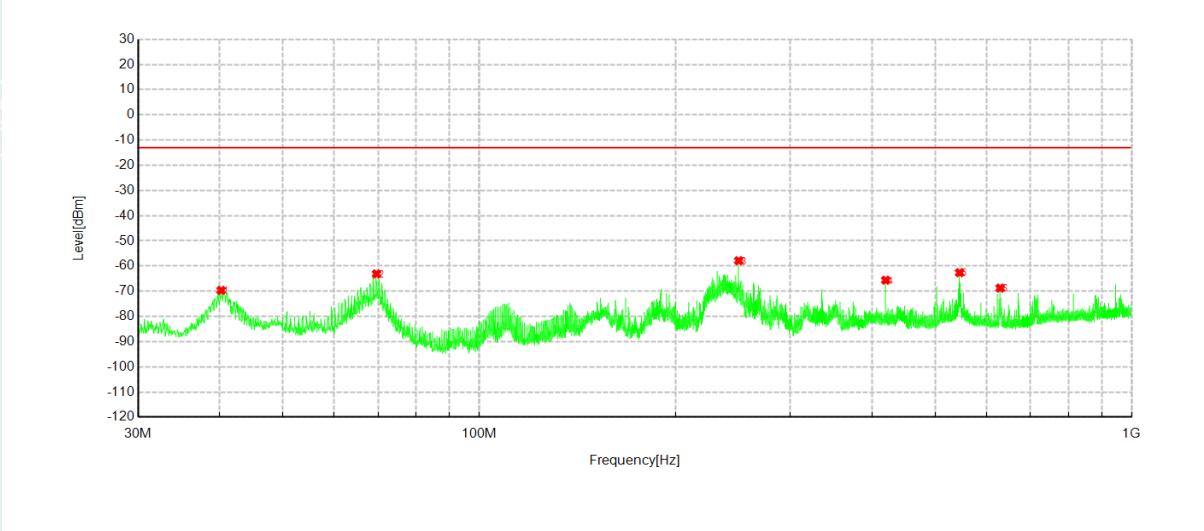


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	40.2335	-55.48	-69.65	-13.00	56.65	-14.17	RMS	Horizontal
2	69.6245	-41.01	-63.11	-13.00	50.11	-22.10	RMS	Horizontal
3	249.996	-41.07	-57.87	-13.00	44.87	-16.80	RMS	Horizontal
4	419.9885	-51.66	-65.62	-13.00	52.62	-13.96	RMS	Horizontal
5	545.0215	-51.52	-62.64	-13.00	49.64	-11.12	RMS	Horizontal
6	628.975	-58.50	-68.75	-13.00	55.75	-10.25	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26365	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

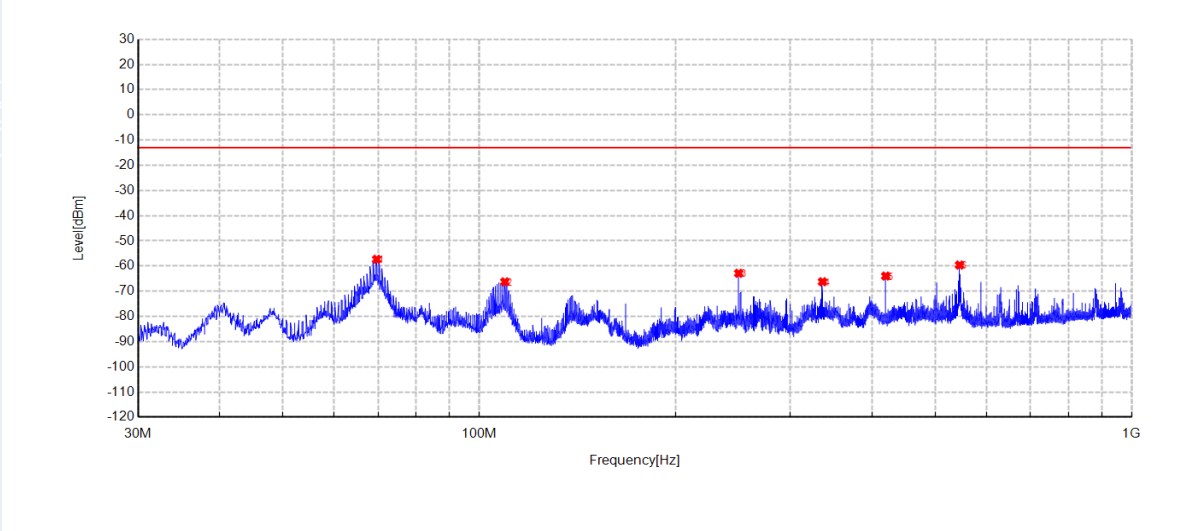


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.673	-34.65	-57.32	-13.00	44.32	-22.67	RMS	Vertical
2	109.54	-51.81	-66.27	-13.00	53.27	-14.46	RMS	Vertical
3	249.996	-42.09	-62.88	-13.00	49.88	-20.79	RMS	Vertical
4	336.035	-50.97	-66.24	-13.00	53.24	-15.27	RMS	Vertical
5	419.9885	-49.01	-63.97	-13.00	50.97	-14.96	RMS	Vertical
6	544.973	-48.73	-59.60	-13.00	46.60	-10.87	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26590	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Grap

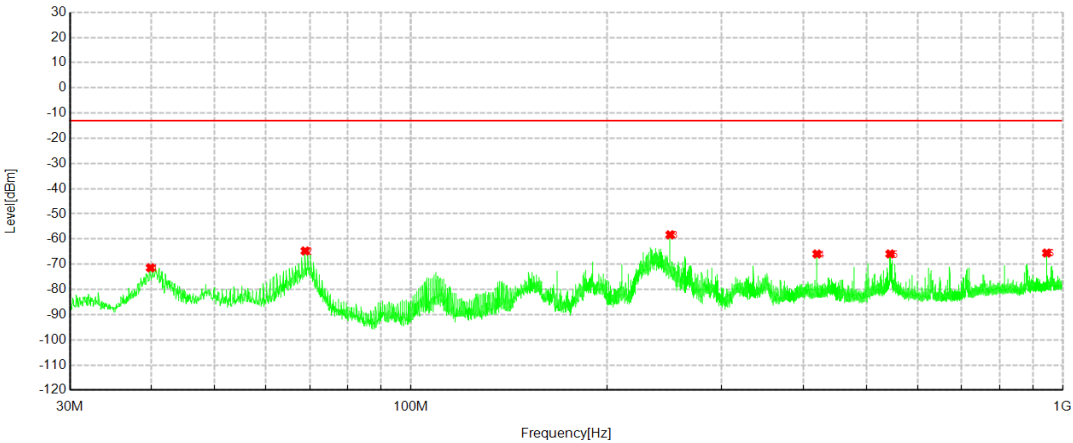


h

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	39.894	-57.30	-71.42	-13.00	58.42	-14.12	RMS	Horizontal
2	68.897	-43.06	-64.73	-13.00	51.73	-21.67	RMS	Horizontal
3	249.996	-41.52	-58.32	-13.00	45.32	-16.80	RMS	Horizontal
4	419.9885	-51.97	-65.93	-13.00	52.93	-13.96	RMS	Horizontal
5	543.7605	-54.85	-65.91	-13.00	52.91	-11.06	RMS	Horizontal
6	945.6315	-58.65	-65.56	-13.00	52.56	-6.91	RMS	Horizontal

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26590	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-08		

Test Graph

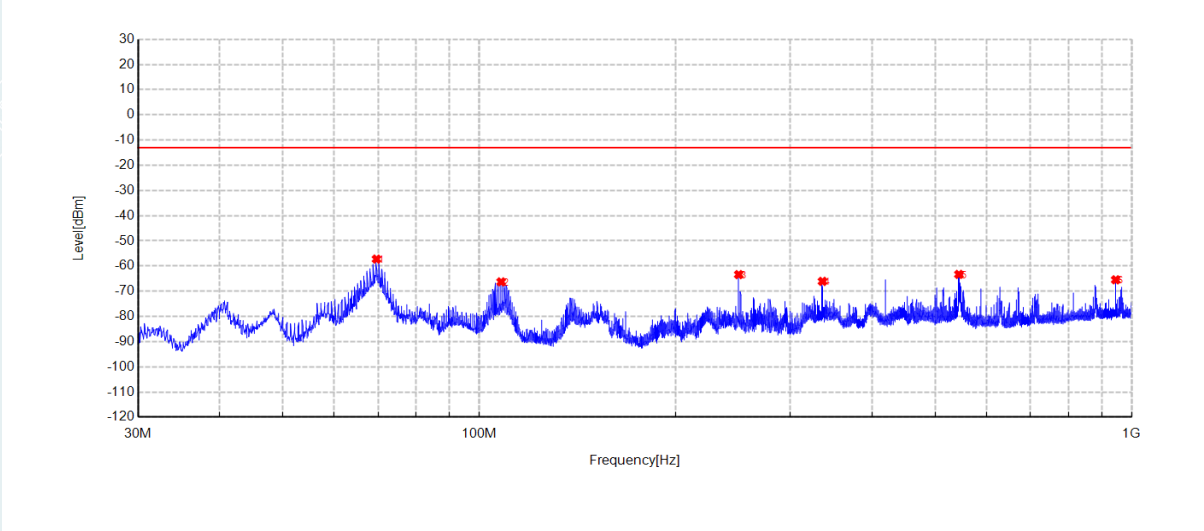


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	69.6245	-34.57	-57.25	-13.00	44.25	-22.68	RMS	Vertical
2	108.085	-51.35	-66.29	-13.00	53.29	-14.94	RMS	Vertical
3	249.996	-42.60	-63.39	-13.00	50.39	-20.79	RMS	Vertical
4	335.9865	-50.82	-66.09	-13.00	53.09	-15.27	RMS	Vertical
5	543.7605	-52.45	-63.31	-13.00	50.31	-10.86	RMS	Vertical
6	945.6315	-58.71	-65.47	-13.00	52.47	-6.76	RMS	Vertical

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26140	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

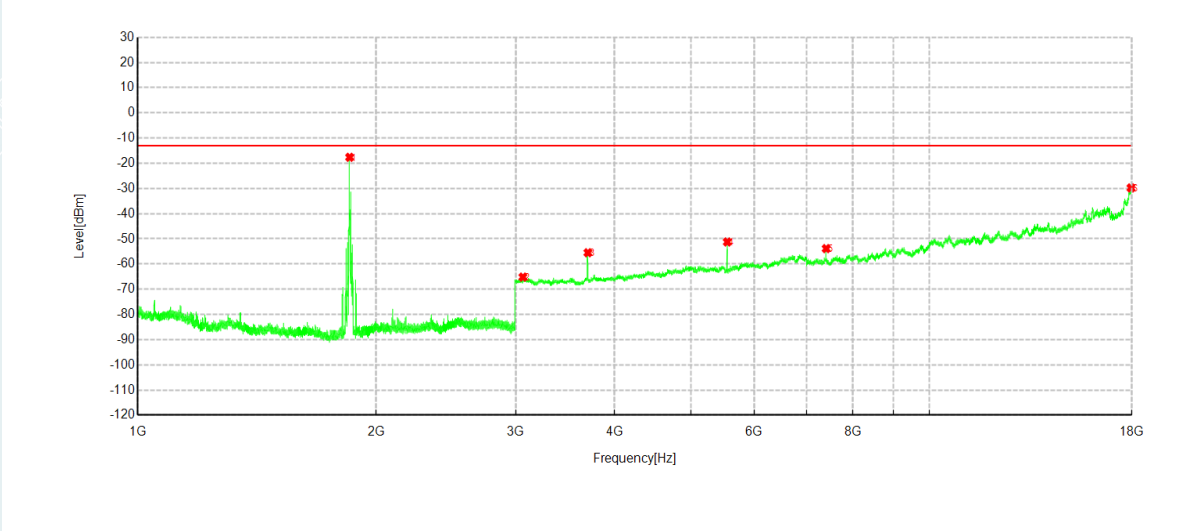


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1851.1	4.42	-17.63	/	/	-22.05	RMS	Horizontal
2	3064.5	-62.11	-65.19	-13.00	52.19	-3.08	RMS	Horizontal
3	3702	-53.74	-55.51	-13.00	42.51	-1.77	RMS	Horizontal
4	5553	-55.25	-51.25	-13.00	38.25	4.00	RMS	Horizontal
5	7404	-65.92	-53.87	-13.00	40.87	12.05	RMS	Horizontal
6	17968.5	-66.44	-29.78	-13.00	16.78	36.66	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26140	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

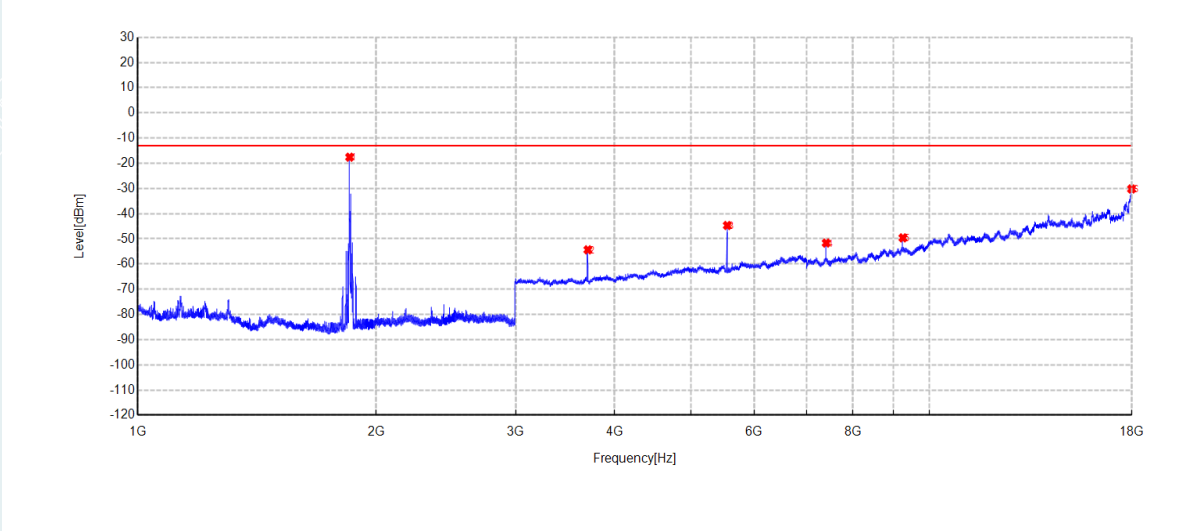


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1851.1	4.42	-17.59	/	/	-22.01	RMS	Vertical
2	3702	-52.10	-54.35	-13.00	41.35	-2.25	RMS	Vertical
3	5553	-48.74	-44.69	-13.00	31.69	4.05	RMS	Vertical
4	7404	-63.88	-51.66	-13.00	38.66	12.22	RMS	Vertical
5	9255	-67.56	-49.61	-13.00	36.61	17.95	RMS	Vertical
6	17999.25	-66.48	-30.20	-13.00	17.20	36.28	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26365	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

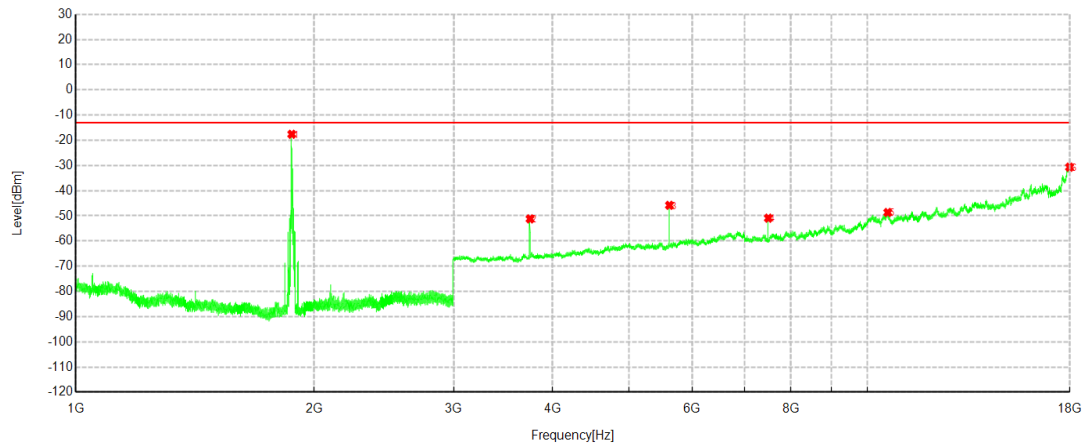
Test Graph**Suspected Data List**

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1873.6	4.41	-17.62	/	/	-22.03	RMS	Horizontal
2	3747	-49.78	-51.20	-13.00	38.20	-1.42	RMS	Horizontal
3	5620.5	-50.71	-45.81	-13.00	32.81	4.90	RMS	Horizontal
4	7494	-61.38	-50.92	-13.00	37.92	10.46	RMS	Horizontal
5	10606.5	-70.36	-48.66	-13.00	35.66	21.70	RMS	Horizontal
6	17999.25	-67.11	-30.68	-13.00	17.68	36.43	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26365	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

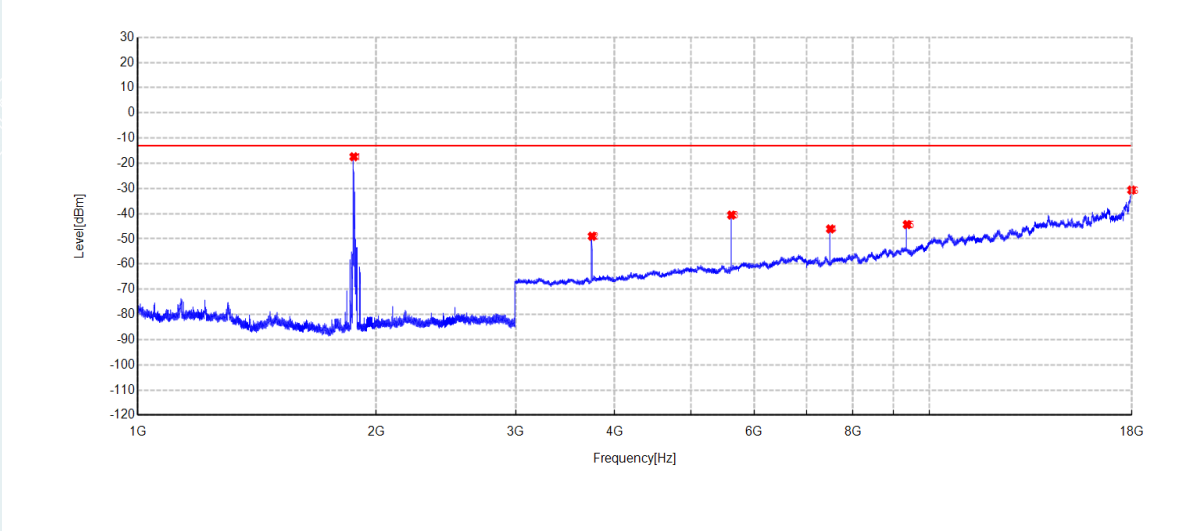


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1873.6	4.41	-17.42	/	/	-21.83	RMS	Vertical
2	3747	-47.32	-48.97	-13.00	35.97	-1.65	RMS	Vertical
3	5620.5	-45.32	-40.57	-13.00	27.57	4.75	RMS	Vertical
4	7494	-56.42	-46.07	-13.00	33.07	10.35	RMS	Vertical
5	9368.25	-62.47	-44.34	-13.00	31.34	18.13	RMS	Vertical
6	17997	-66.83	-30.65	-13.00	17.65	36.18	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26590	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

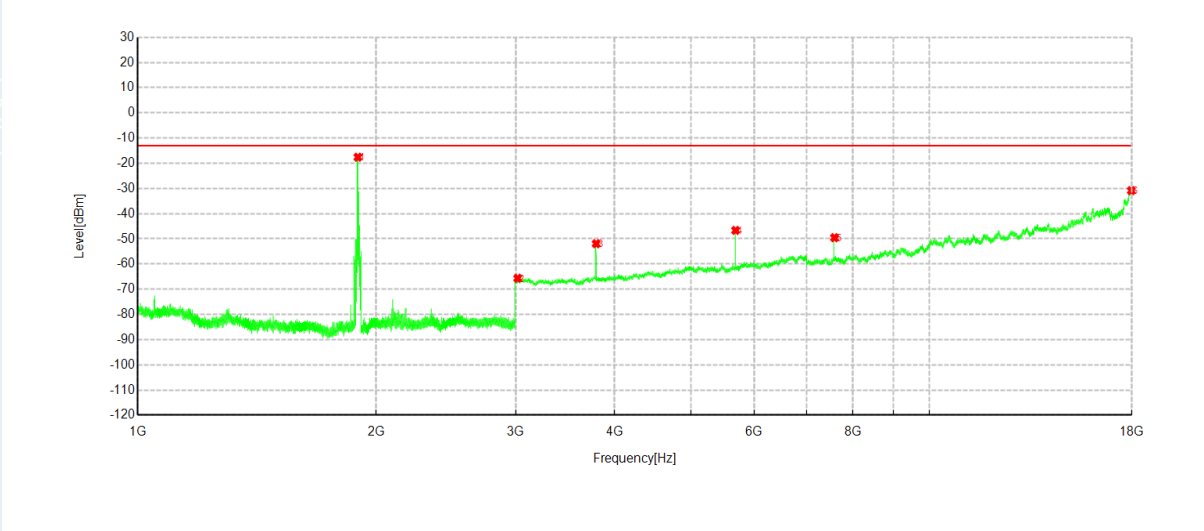


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1896.1	4.43	-17.59	/	/	-22.02	RMS	Horizontal
2	3018	-62.14	-65.64	-13.00	52.64	-3.50	RMS	Horizontal
3	3792	-50.63	-51.93	-13.00	38.93	-1.30	RMS	Horizontal
4	5688	-51.83	-46.64	-13.00	33.64	5.19	RMS	Horizontal
5	7584	-60.83	-49.54	-13.00	36.54	11.29	RMS	Horizontal
6	17985	-67.39	-30.85	-13.00	17.85	36.54	RMS	Horizontal

NOTE: NO.1 is the fundamental frequency signal.

Project Information			
ProjectNo:	E202312279773	EUT:	Telematics Box
Channel	26590	Band:	Band=25 BW=20MHz
Mode:	LTE	Voltage:	DC 24V
Environment:	Temp:23.5℃;Humi:52%RH	Engineer:	Zhang Zishan
SN:	E202312279773-0001	Remark:	/
Date:	2024-01-07		

Test Graph

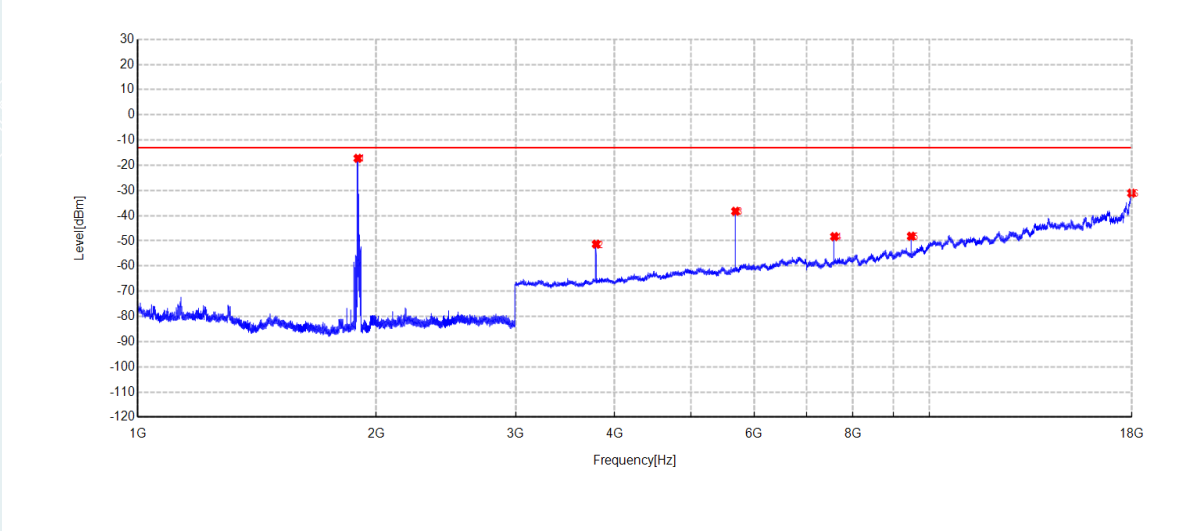

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Detector	Polarity
1	1896.1	4.41	-17.25	/	/	-21.66	RMS	Vertical
2	3792	-50.03	-51.32	-13.00	38.32	-1.29	RMS	Vertical
3	5688	-43.44	-38.27	-13.00	25.27	5.17	RMS	Vertical
4	7584	-59.16	-48.31	-13.00	35.31	10.85	RMS	Vertical
5	9480.75	-66.12	-48.18	-13.00	35.18	17.94	RMS	Vertical
6	17994.75	-67.15	-31.09	-13.00	18.09	36.06	RMS	Vertical

NOTE: NO.1 is the fundamental frequency signal.