

TEST REPORT

FCC/ISED Sigfox Test for IET10N
Certification

APPLICANT
SJIT Co.,Ltd

REPORT NO.
HCT-RF-2406-FI004-R1

DATE OF ISSUE
July 15, 2024

Tested by
Kyung Jun Woo



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST
REPORT**

REPORT NO.
HCT-RF-2406-FI004-R1

DATE OF ISSUE
July 15, 2024

Applicant **SJIT Co.,Ltd**
54-11 Dongtanhana 1-gil, Hwaseong-si, Gyeonggi-do, Republic of Korea

Product Name Asset Tracker
Model Name IET10N

FCC ID 2BEK7IET10N
IC 32019-IET10N

Date of Test February 02, 2024 ~ June 14, 2024
July 10, 2024 ~ July 12, 2024 (Simultaneous transfer operations)

RF Peak Output Power 19.186 dBm (82.91 mW)

FCC Classification FCC Part 15 Spread Spectrum Transmitter

Test Standard Used FCC Rule: Part 15.247
ISED Rule: RSS-247 Issue 3 (August 2023),
RSS-Gen Issue 5_Amendment 2 (February 2021)

Location of Test Permanent Testing Lab On Site Testing
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Republic of Korea)

Test Results PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 14, 2024	Initial Release
1	July 15, 2024	- Revised AC Power line Test result on page 33 - Revised HVIN/HMN on page 5 - Added tests for simultaneous transfer operations - Added test equipment on page 63, 64

Notice

Content

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance.

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. Requirements for Frequency Hopping Device(FHSS) transmitter(15.247)	9
3. TEST METHODOLOGY	10
EUT CONFIGURATION	10
EUT EXERCISE	10
GENERAL TEST PROCEDURES	10
DESCRIPTION OF TEST MODES	11
4. INSTRUMENT CALIBRATION	11
5. FACILITIES AND ACCREDITATIONS	11
FACILITIES	11
EQUIPMENT	11
6. ANTENNA REQUIREMENTS	12
7. MEASUREMENT UNCERTAINTY	13
8. DESCRIPTION OF TESTS	14
9. SUMMARY OF TEST RESULTS	35
10. TEST RESULT	36
10.1 PEAK POWER	36
10.2 BAND EDGES	38
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)	40
10.4 NUMBER OF HOPPING FREQUENCY	44
10.5 TIME OF OCCUPANCY (DWELL TIME)	46
10.6 SPURIOUS EMISSIONS	48
10.6.1 CONDUCTED SPURIOUS EMISSIONS	48
10.6.2 RADIATED SPURIOUS EMISSIONS	50
10.7 RECEIVER SPURIOUS EMISSIONS	61
11. LIST OF TEST EQUIPMENT	62
12. Annex A_EUT AND TEST SETUP PHOTO	65

1. EUT DESCRIPTION

Model	IET10N
EUT Type	Asset Tracker
Power Supply	DC 3.6 V
Frequency Range	RC2 - TX : 902.1375 MHz – 904.6625 MHz - RX : 905.1375 MHz – 907.6625 MHz RC4 - TX : 920.1375 MHz – 922.6625 MHz - RX : 921.6375 MHz – 924.1625 MHz
Max. RF Output Power	19.186 dBm (82.91 mW)
Modulation Type	TX : DBPSK RX : 2GFSK
Number of Channels	RC2: 54 Channels (9 Macro channels x 6 Micro channels) RC4: 54 Channels (9 Macro channels x 6 Micro channels)
Antenna Specification	Chip Antenna Peak Gain : 2.50 dBi(RC2), 2.40 dBi(RC4)
Date(s) of Tests	February 02, 2024 ~ June 14, 2024
PMN (Product Marketing Number)	IET10N
HVIN (Hardware Version Identification Number)	Ver1.1
FVIN (Firmware Version Identification Number)	N00_V056
HMN (Host Marketing Name)	N/A
EUT serial numbers	Radiated : T10BN00G501001 Conducted : T10BN00G501002

ANTENNA CONFIGURATIONS

1. This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 900M and 2.4 GHz Bands simultaneously on each antenna.

RSDB Scenario	Bluetooth Ant.	SIGFOX Ant.	WiFi Ant.	Test Case
BLE + WiFi	on	on	-	Scenario1
BLE + SIGFOX	on	-	on	Scenario2

Frequency hopping channel list

[RC2] Frequency Band : 902.1375 ~ 904.6625 MHz

-	Micro Channel 1 (MHz)	Micro Channel 2 (MHz)	Micro Channel 3 (MHz)	Micro Channel 4 (MHz)	Micro Channel 5 (MHz)	Micro Channel 6 (MHz)
1 Macro Channel	902.1375	902.1625	902.1875	902.2125	902.2375	902.2625
2 Macro Channel	902.4375	902.4625	902.4875	902.5125	902.5375	902.5625
3 Macro Channel	902.7375	902.7625	902.7875	902.8125	902.8375	902.8625
4 Macro Channel	903.0375	903.0625	903.0875	903.1125	903.1375	903.1625
5 Macro Channel	903.3375	903.3625	903.3875	903.4125	903.4375	903.4625
6 Macro Channel	903.6375	903.6625	903.6875	903.7125	903.7375	903.7625
7 Macro Channel	903.9375	903.9625	903.9875	904.0125	904.0375	904.0625
8 Macro Channel	904.2375	904.2625	904.2875	904.3125	904.3375	904.3625
9 Macro Channel	904.5375	904.5625	904.5875	904.6125	904.6375	904.6625

[RC2]

Low ch : 902.1375 MHz

Mid ch : 903.4125 MHz

High ch : 904.6625 MHz

[RC4] Frequency Band : 920.1375 ~ 922.6625 MHz

-	Micro Channel 1 (MHz)	Micro Channel 2 (MHz)	Micro Channel 3 (MHz)	Micro Channel 4 (MHz)	Micro Channel 5 (MHz)	Micro Channel 6 (MHz)
1 Macro Channel	920.1375	920.1625	920.1875	920.2125	920.2375	920.2625
2 Macro Channel	920.4375	920.4625	920.4875	920.5125	920.5375	920.5625
3 Macro Channel	920.7375	920.7625	920.7875	920.8125	920.8375	920.8625
4 Macro Channel	921.0375	921.0625	921.0875	921.1125	921.1375	921.1625
5 Macro Channel	921.3375	921.3625	921.3875	921.4125	921.4375	921.4625
6 Macro Channel	921.6375	921.6625	921.6875	921.7125	921.7375	921.7625
7 Macro Channel	921.9375	921.9625	921.9875	922.0125	922.0375	922.0625
8 Macro Channel	922.2375	922.2625	922.2875	922.3125	922.3375	922.3625
9 Macro Channel	922.5375	922.5625	922.5875	922.6125	922.6375	922.6625

[RC4]

Low ch : 920.1375 MHz

Mid ch : 921.4125 MHz

High ch : 922.6625 MHz

2. Requirements for Frequency Hopping Device(FHSS) transmitter(15.247)

This Sigfox module has been tested by a Sigfox Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.
 - RSS-247 5.1 (a): The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the RSS-Gen issue 5, RSS-247 issue 3.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting (RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 11, 2024 (Registration Number: KR0032).

For ISSED, test facility was accepted dated March 13, 2024 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

According to RSS-GEN(Issue 5) Section 6.8:

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

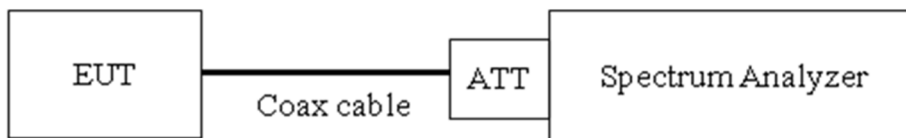

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013 & Procedure 10(b)(6)(i) in KDB 558074 v05r02)


- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW \geq RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to § 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

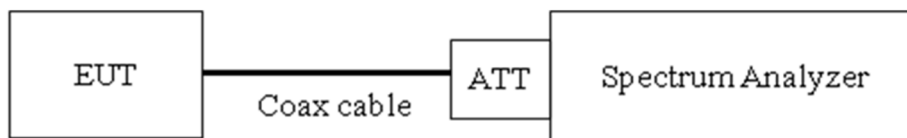

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to § 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel & According to § 15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

Test Configuration

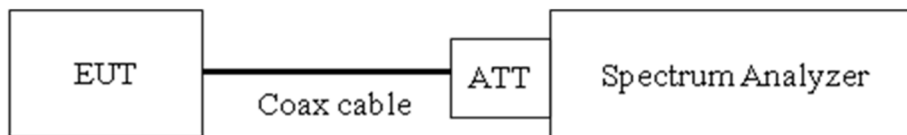

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.
And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to § 15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

Test Configuration

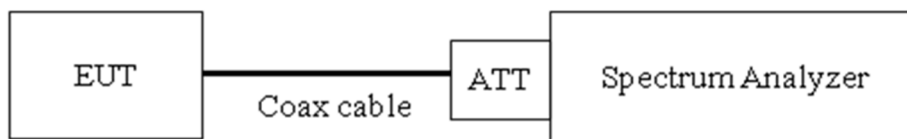

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to § 15.247(a)(1)(i), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period

Test Configuration

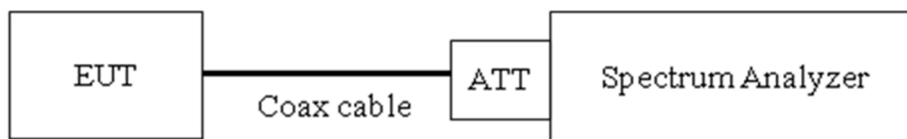

Test Procedure

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013 & Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold


The marker-delta function was used to determine the dwell time.

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

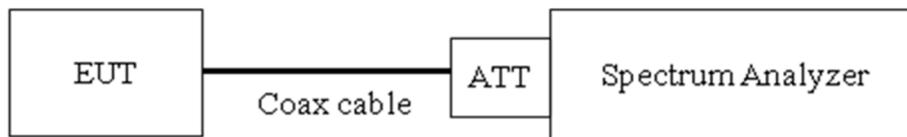

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.75
100	10.80
200	10.84
300	10.89
400	10.95
500	10.95
600	10.96
700	10.97
800	10.98
902	11.00
928	11.00
1 000	11.00
2 000	11.05
2 400	11.30
2 500	11.39
3 000	11.39
4 000	11.54
5 000	11.78
6 000	12.30
7 000	12.39
8 000	12.39
9 000	12.48
10 000	12.61
11 000	12.61
12 000	12.69
13 000	12.79
14 000	12.88
15 000	12.97
16 000	12.98
17 000	13.01
18 000	13.11
19 000	13.19
20 000	13.40
21 000	13.53
22 000	13.45
23 000	13.12
24 000	13.25
25 000	13.24
26 000	13.25

Note :

1. 902 ~ 928 MHz is fundamental frequency range.

8.7. Radiated Test

Limit

FCC

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

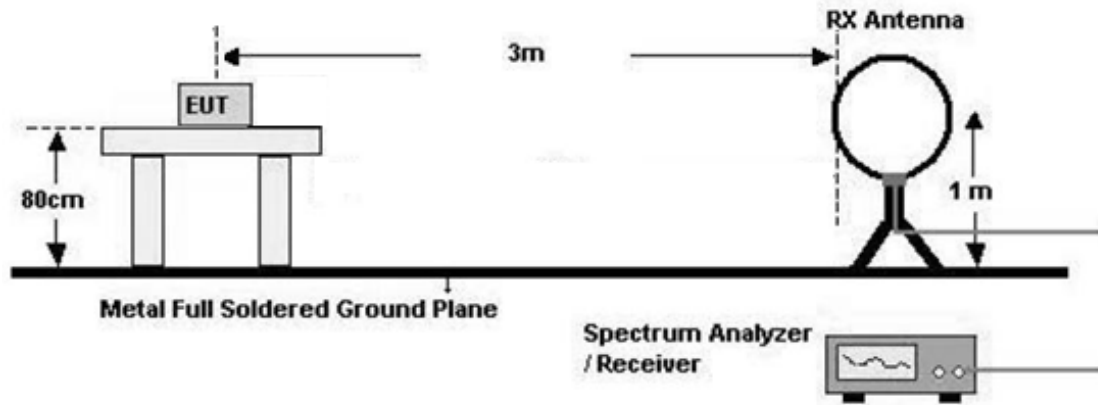

30 MHz - 1 GHz

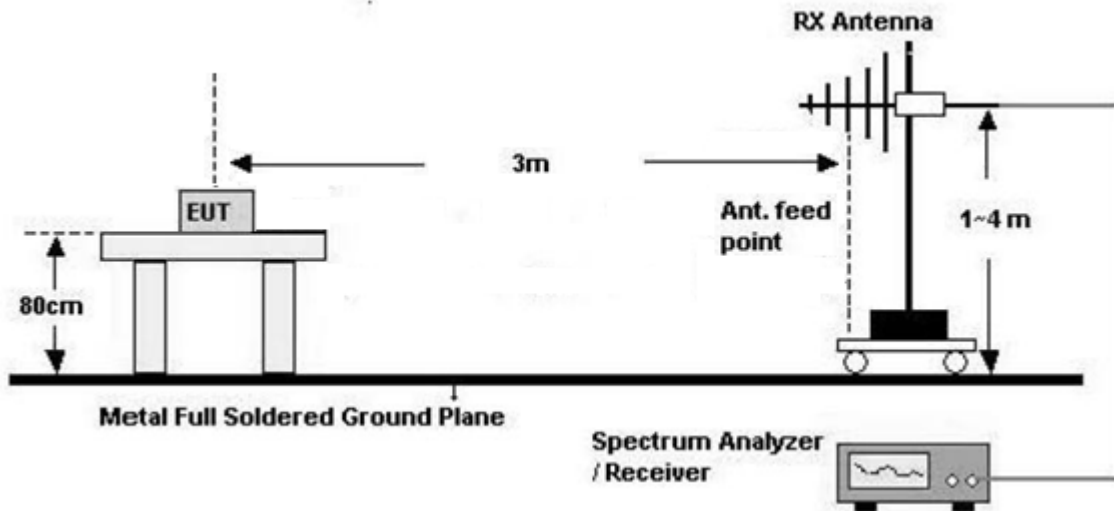

Above 1 GHz

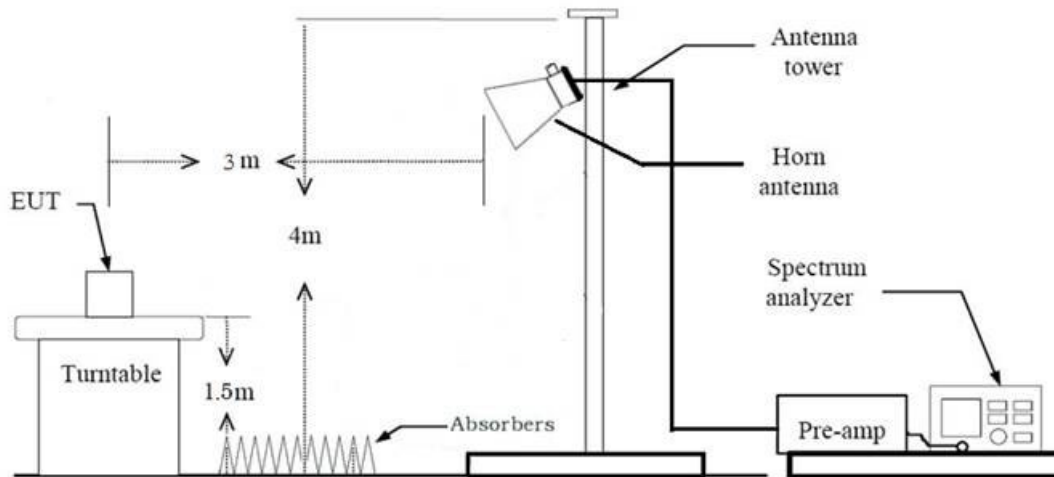

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※In general, (1) is used mainly
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 1/ τ Hz, where τ = pulse width in seconds
 - The actual setting value of VBW = 10 kHz
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 10th Harmonics
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 1/ τ Hz, where τ = pulse width in seconds
 - The actual setting value of VBW = 10 kHz
8. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
9. Total(Measurement Type : Peak, Average)
 - = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.9. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

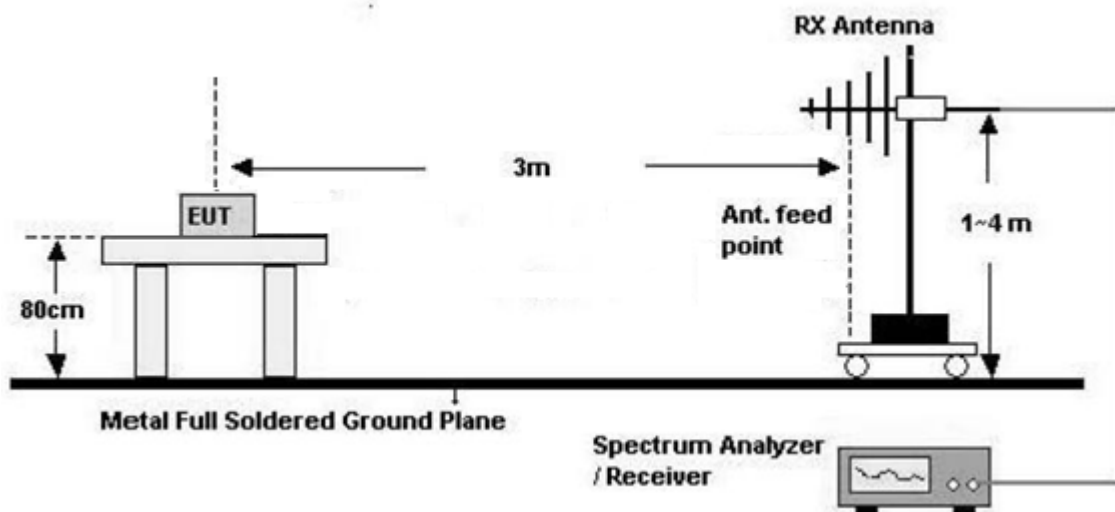

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

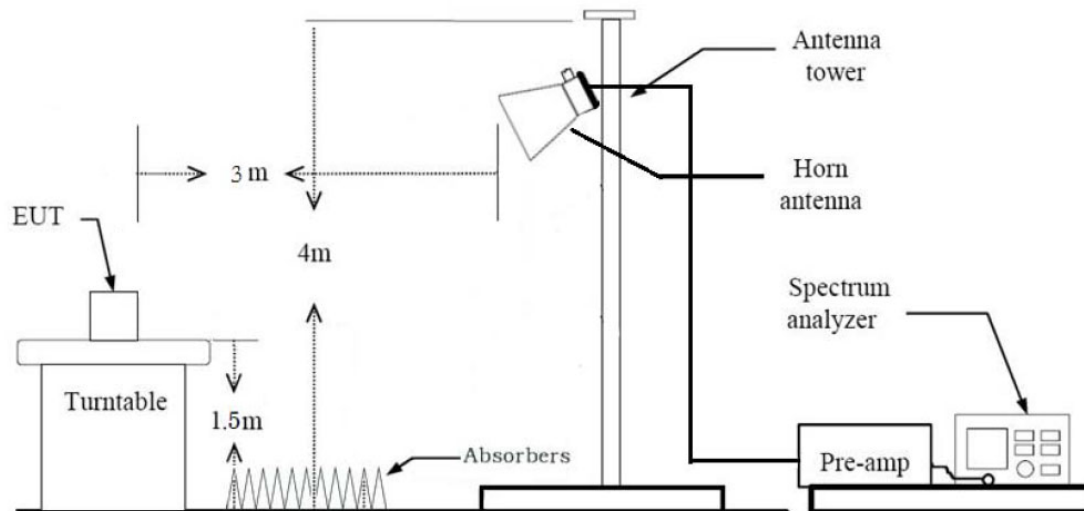

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 10th Harmonics
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average):

- We performed using a reduced video BW method was done with the analyzer in linear mode
- Measured Frequency Range : 1 GHz – 10th Harmonics
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 1/ τ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 10 kHz

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

8.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : Y
3. All data rate of operation were investigated and the test results are worst case in highest datarate of each mode.
 - RC2 : bitrate 600 bps
 - RC4 : bitrate 600 bps
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone
2. EUT Axis
 - RSDB Scenario 2 : X-H
3. All of RSDB Scenario were investigated and the worst case configuration results are reported.
4. The RSDB mode test investigated both intermodulation and radiated spurious emissions.

And the worst results were reported.

 - Worst result: Radiated spurious emissions
 - Intermodulation: No signals are generated.
 - Radiated spurious emissions: cf. Section 8.7.

RSDB Scenario	Bluetooth Ant.	SIGFOX Ant.	WiFi Ant.	Test Case
BLE + WiFi	on	on		-
BLE + SIGFOX	on		on	Scenario2

5. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

RSDB Scenario 2	Description	BLE Emission	SIGFOX Emission
Bluetooth ANT.	Antenna	Ant0	Ant0
	Channel	39	Macro 5 / Micro 4
+	Data Rate	1 Mbps	600 bps
SIGFOX Ant.	Mode	GFSK	RC2

Note : BLE RSDB Data refer to [BLE] Test Report

AC Power line Conducted Emissions

1. Not Tested

Conducted test

1. The EUT was configured with data rate of highest power.

- RC2 : bitrate 600 bps
- RC4 : bitrate 600 bps

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	ISED Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§ 15.247(a)(1)(i)	RSS-247, 5.1 c)	< 250 kHz	Conducted	PASS
Occupied Bandwidth	N/A	RSS-GEN, 6.7	N/A		N/A
Conducted Maximum Peak Output Power	§ 15.247(b)(2)	RSS-247, 5.4 a)	< 1 W		PASS
Carrier Frequency Separation	§ 15.247(a)(1)	RSS-247, 5.1 b)	> 25 kHz or > 20 dB BW of hopping channel		PASS
Number of Hopping Frequencies	§ 15.247(a)(1)(i)	RSS-247, 5.1 c)	≥ 50		PASS
Time of Occupancy	§ 15.247(a)(1)(i)	RSS-247, 5.1 c)	< 400 ms (20s)		PASS
Conducted Spurious Emissions	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	RSS-247, 5.5	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§ 15.207(a)	RSS-GEN, 8.8	cf. Section 8.8		N/A (Note.1)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9	cf. Section 8.7		Radiated
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	RSS-GEN, 8.9 RSS-GEN, 8.10	cf. Section 8.7	PASS	
Receiver Spurious Emissions	N/A	RSS-GEN, 7	cf. Section 8.9	PASS	

Note

1. The device only employ battery power for operation.

10. TEST RESULT


10.1 PEAK POWER

Channel	Frequency (MHz)	Output Power (RC2)		Limit (mW)	Result
		(dBm)	(mW)		
Low	902.1375	19.186	82.91	1 000	PASS
Mid	903.4125	19.179	82.78		PASS
High	904.6625	19.168	82.57		PASS


Channel	Frequency (MHz)	Output Power (RC4)		Limit (mW)	Result
		(dBm)	(mW)		
Low	920.1375	19.087	81.04	1 000	PASS
Mid	921.4125	19.095	81.19		PASS
High	922.6625	19.080	80.91		PASS

☐ Test Plots


Peak Power (RC2-CH Low)

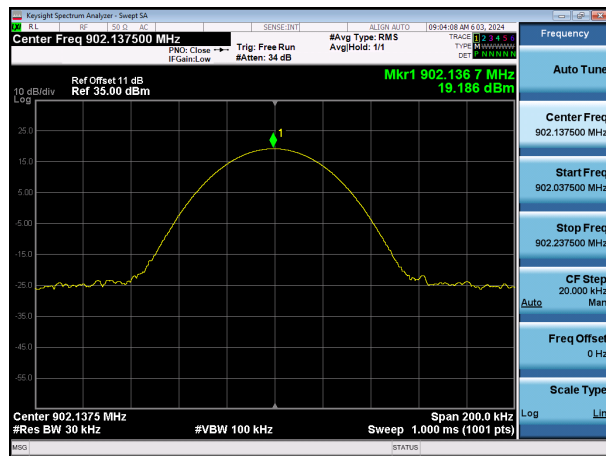


Peak Power (RC4-CH Low)

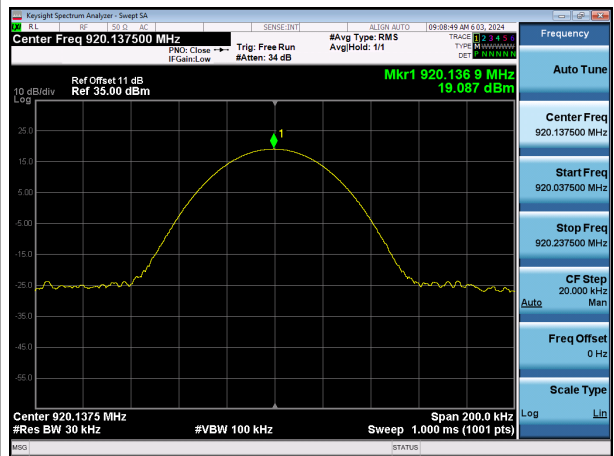


Peak Power (RC2-CH Mid)

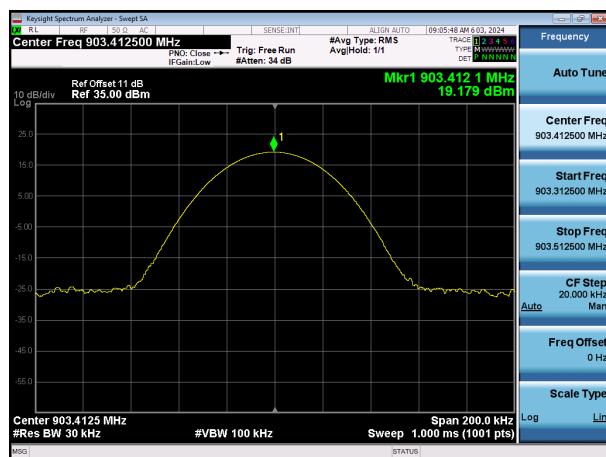


Peak Power (RC4-CH Mid)

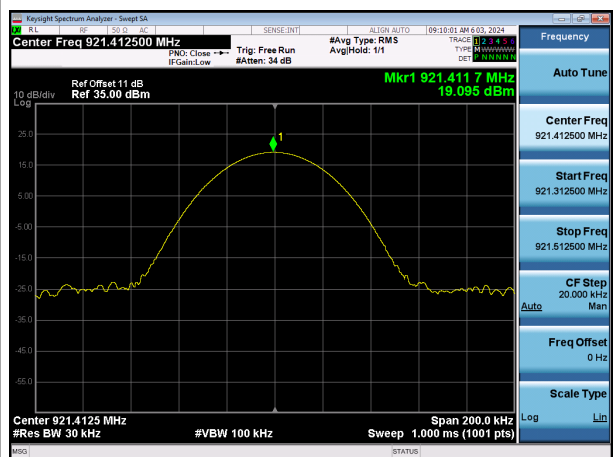

Peak Power (RC2-CH High)

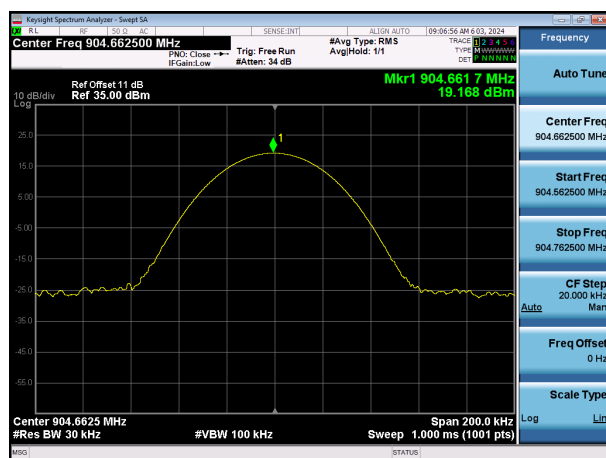

Peak Power (RC4-CH High)

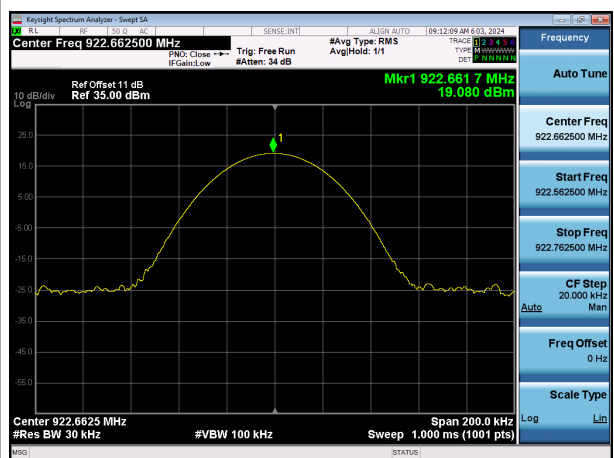

10.2 BAND EDGES

- Without hopping


Frequency (MHz)	Channel	Position	sigfox (dB)	Limit	Margin	Result
				(dBc)	GFSK (dBc)	
902.1375	F1	Lower	23.597	20	3.597	Pass
922.6625	F3	Upper	71.033		51.033	Pass

- With hopping


Frequency (MHz)	Channel	Position	sigfox (dB)	Limit	Margin	Result
				(dBc)	GFSK (dBc)	
902.1375	F1	Lower	23.540	20	3.540	Pass
922.6625	F3	Upper	70.230		50.230	Pass

Test Plots


Without hopping (RC2-Lowest Band Edge)

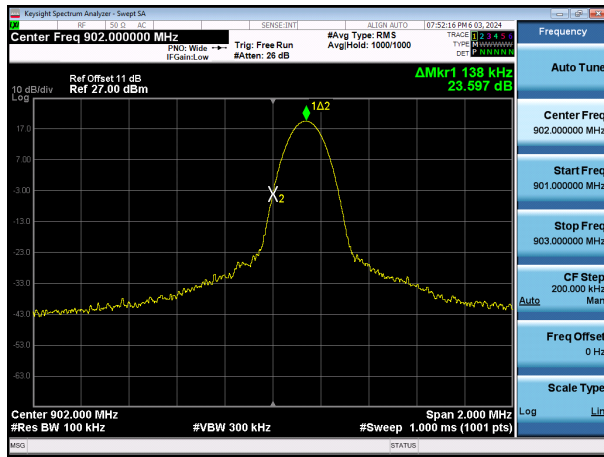

Without hopping (RC4-Highest Band Edge)

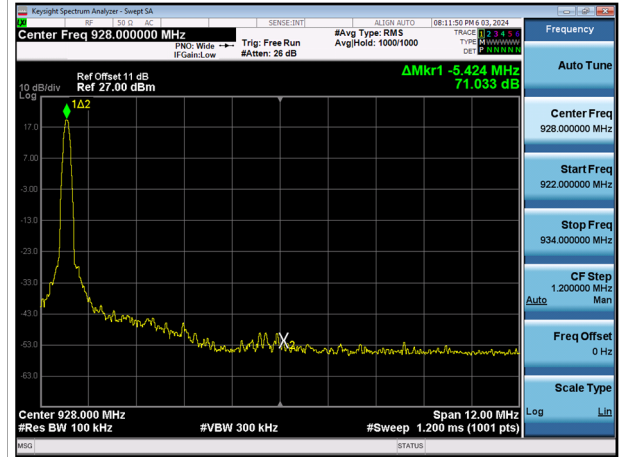

With hopping (RC2-Lowest Band Edge)

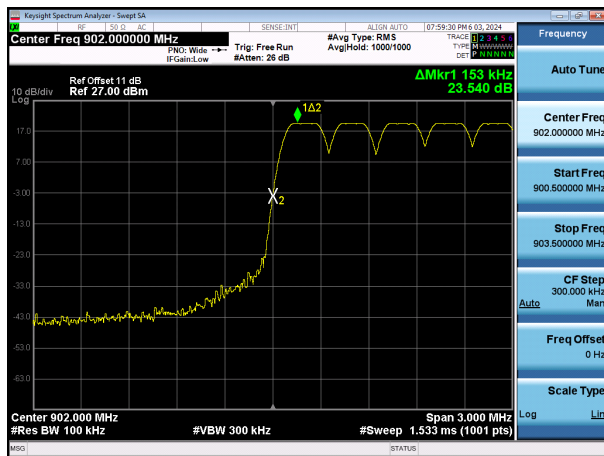

With hopping (RC4-Highest Band Edge)



10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)


Channel Separation (kHz)		20 dB Bandwidth (kHz)			Limit (kHz)	Result
RC2	RC4	Channel	RC2	RC4		
25.05	25.05	Low	21.900	21.750	>25 or >20 dB BW of hopping channel	Pass
		Mid	21.600	21.525		
		High	21.700	21.575		

Occupied Bandwidth (99 % BW)


99 % BW (kHz)				
Channel	RC	Low-ch	Mid-ch	High-ch
	RC2	25.398	25.454	25.456
	RC4	25.410	25.454	25.449

☐ Test Plots

Channel Separation (RC2)

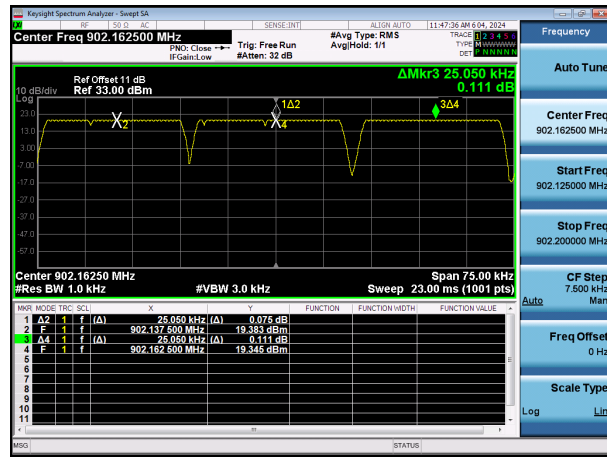


Channel Separation (RC4)

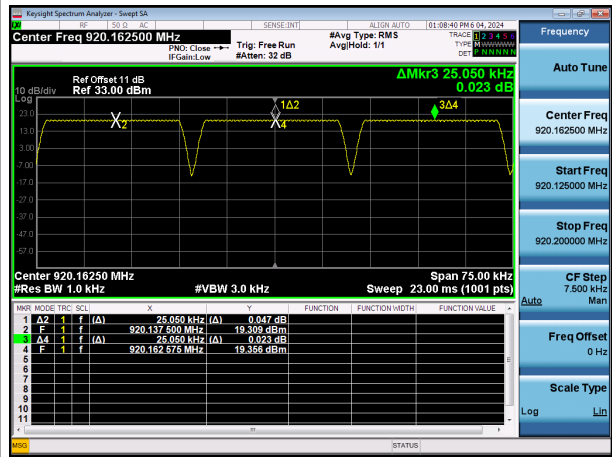


Test Plots


20 dB Bandwidth (RC2-CH Low)

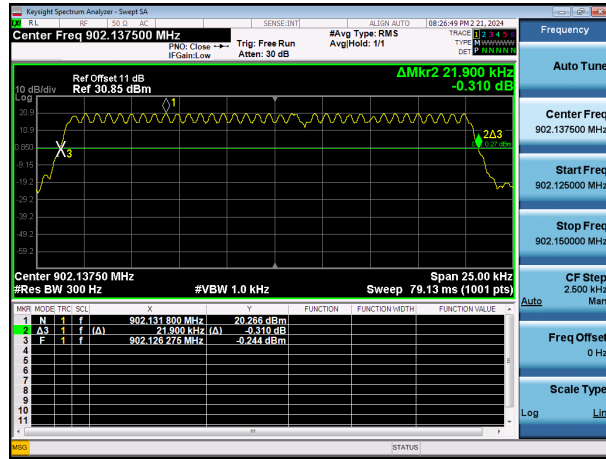


20 dB Bandwidth (RC4-CH Low)

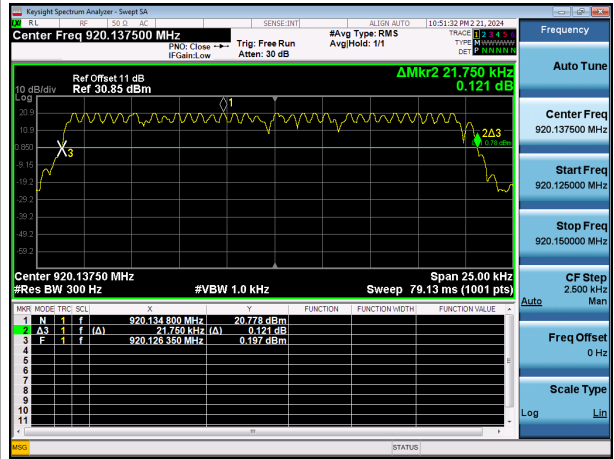


20 dB Bandwidth (RC2-CH Mid)

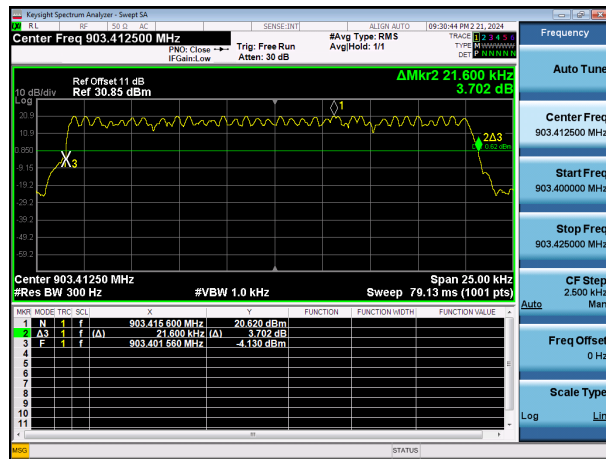


20 dB Bandwidth (RC4-CH Mid)

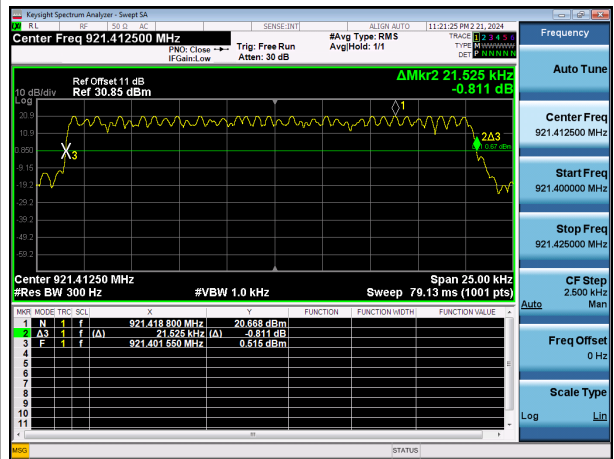


20 dB Bandwidth (RC2-CH High)

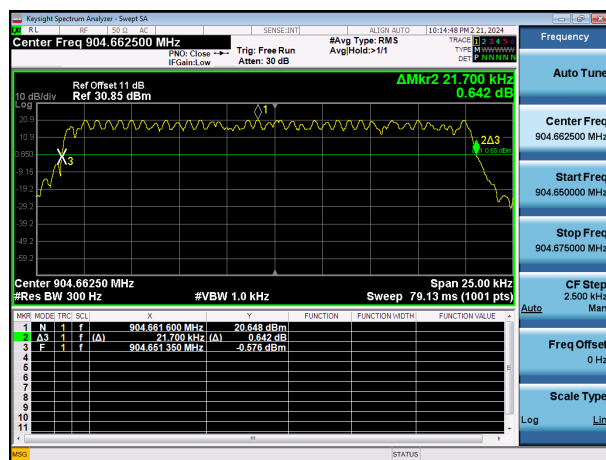


20 dB Bandwidth (RC4-CH High)

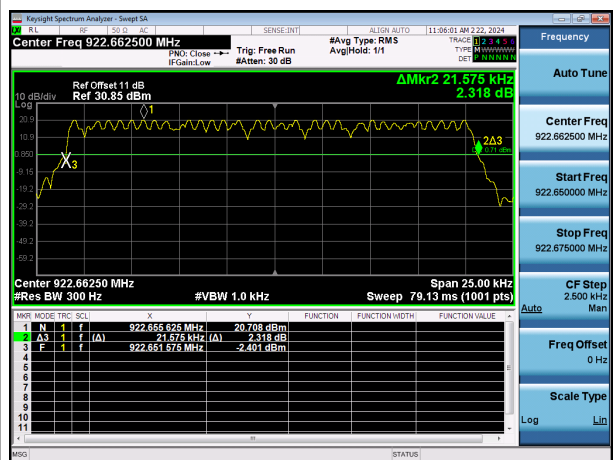


Occupied Bandwidth (RC2-CH Low)

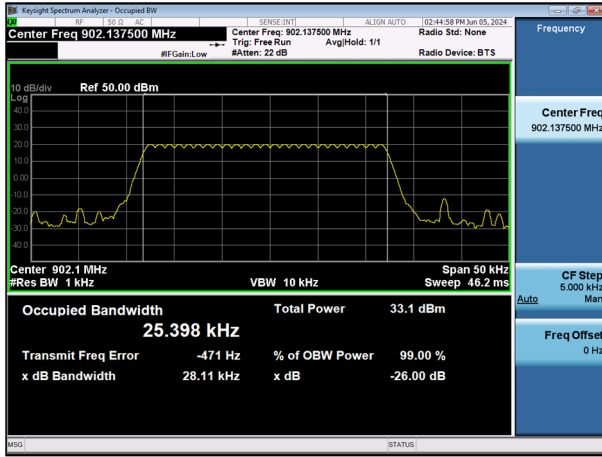


Occupied Bandwidth (RC4-CH Low)

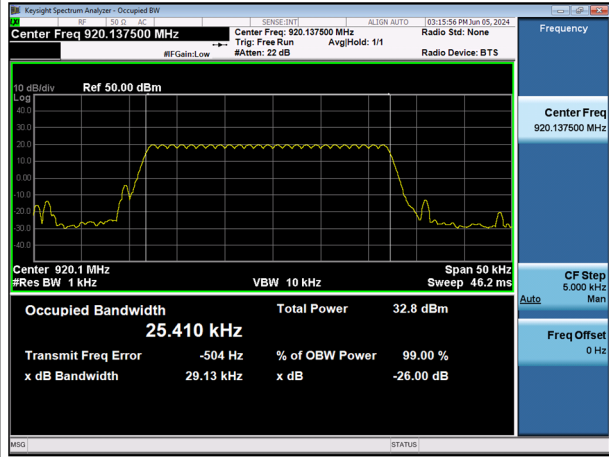


Occupied Bandwidth (RC2-CH Mid)

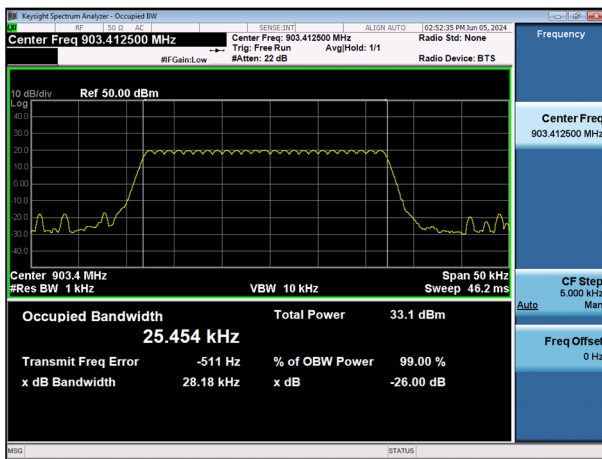


Occupied Bandwidth (RC4-CH Mid)

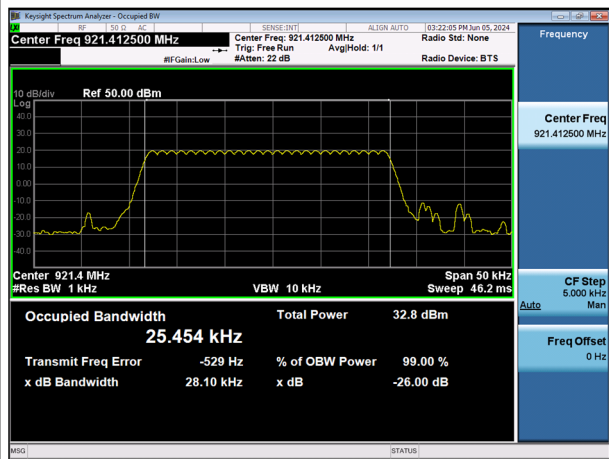

Occupied Bandwidth (RC2-CH High)

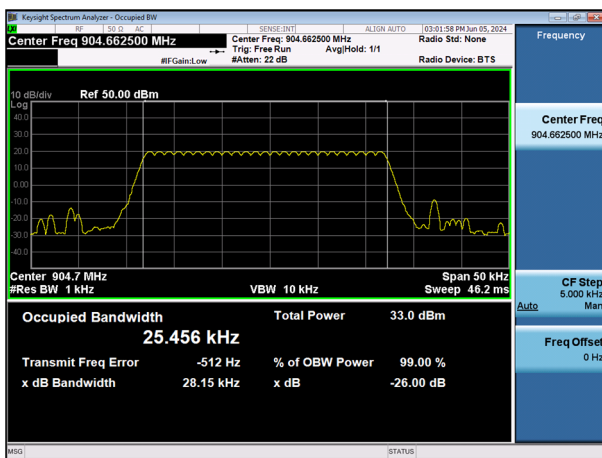

Occupied Bandwidth (RC4-CH High)

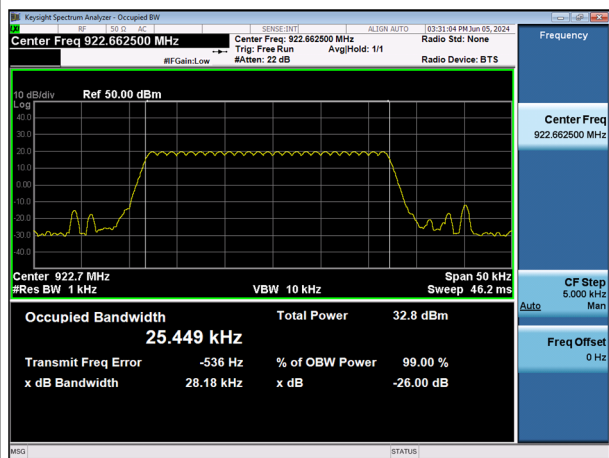


10.4 NUMBER OF HOPPING FREQUENCY

Test Data (Number of Hopping Frequencies : $9 \times 6 = 54$)


No. of Macro CH		No. of Micro CH		Result (No. of CH)	
RC2	RC4	RC2	RC4	RC2	RC4
9	9	6	6	54	54

Test Plots


Number of macro channels (RC2)

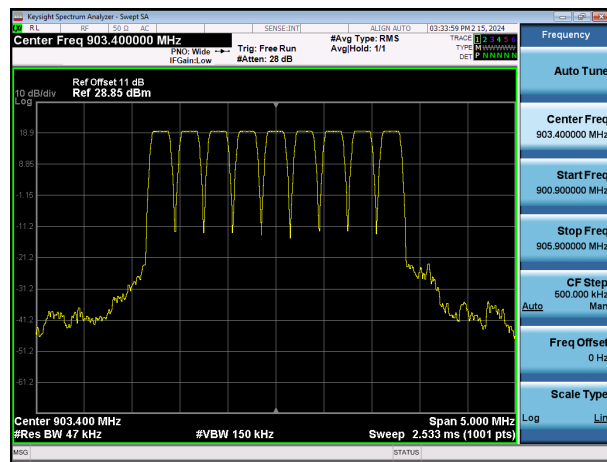

Number of macro channels (RC4)

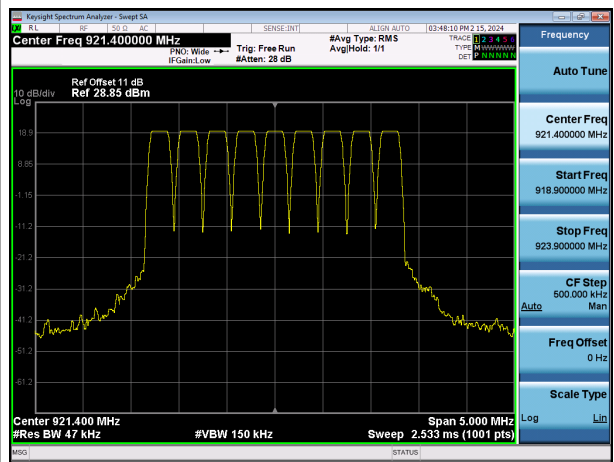

Number of micro channels in one single macro channel (RC2)

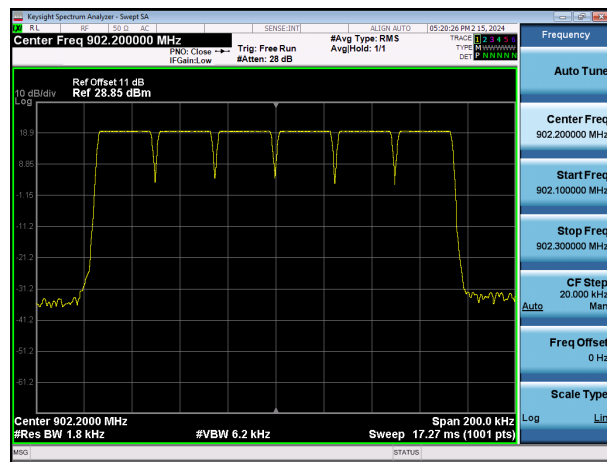

Number of micro channels in one single macro channel (RC4)





10.5 TIME OF OCCUPANCY (DWELL TIME)

-	Channel	RC2	RC4	Limit (ms)	Result
Dwell Time (ms)	Low	349.5	349.5	400	Pass

Test Plots

Dwell time = 349.5 ms (RC2)

Dwell time = 349.5 ms (RC4)

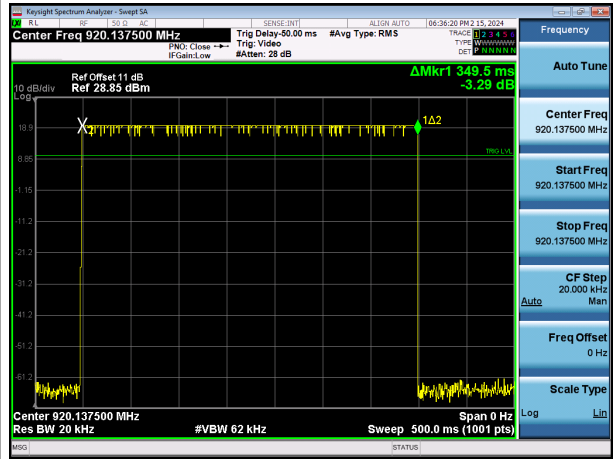
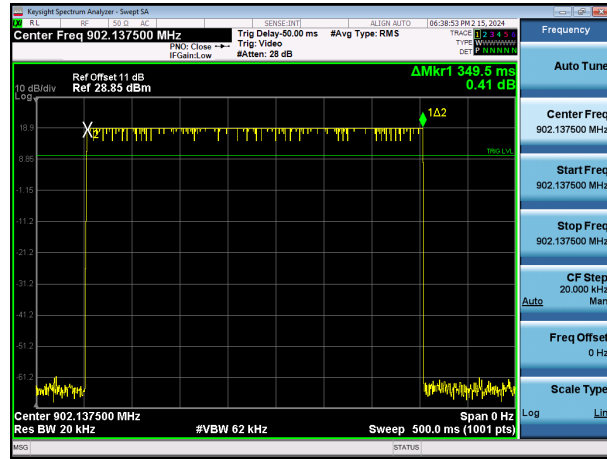


Hops / channel @ 20s = 1

Hops / channel @ 20s = 1

(The highest emission is only relevant_RC2)

(The highest emission is only relevant_RC4)

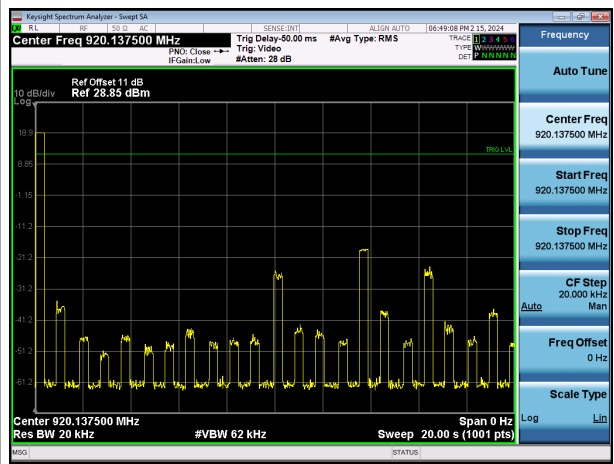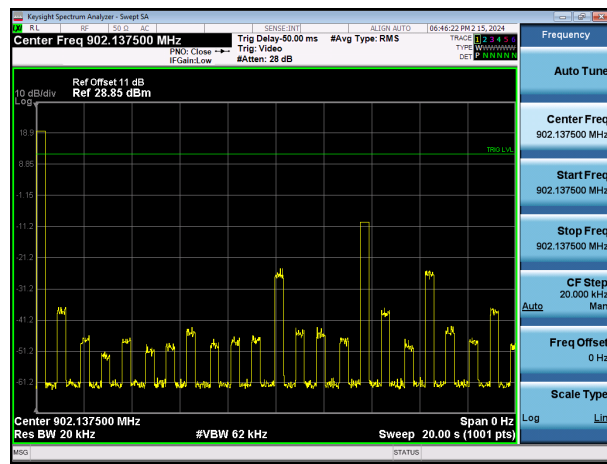

10.6 SPURIOUS EMISSIONS


10.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

☐ Test Plots

Spurious Emission - Limit : -1.847 dBm (RC2)

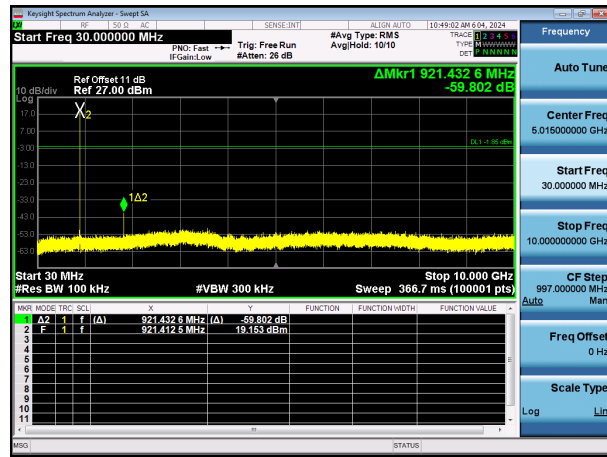

Spurious Emission - Limit : -1.645 dBm (RC4)

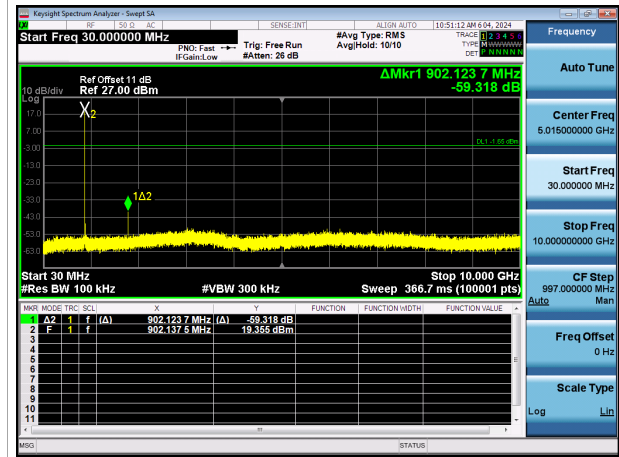

10.6.2 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Measured Value	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Channel : RC2_Low

Frequency	Measured Value	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB μ V]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2 706.413	51.00	H	51.00	73.98	22.98	PK
2 706.413	38.82	H	38.82	53.98	15.16	AV
3 608.550	51.86	H	51.86	73.98	22.12	PK
3 608.550	40.37	H	40.37	53.98	13.61	AV
4 510.688	52.65	H	52.65	73.98	21.33	PK
4 510.688	40.44	H	40.44	53.98	13.54	AV
5 412.825	56.66	H	56.66	73.98	17.32	PK
5 412.825	48.57	H	48.57	53.98	5.41	AV
8 119.238	51.28	H	51.28	73.98	22.70	PK
8 119.238	42.78	H	42.78	53.98	11.20	AV
9 021.375	52.36	H	52.36	73.98	21.62	PK
9 021.375	40.79	H	40.79	53.98	13.19	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

Channel : RC4_Low

Frequency	Measured Value	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB μ V]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2 760.4125	49.28	V	49.28	73.98	24.70	PK
2 760.4125	36.94	V	36.94	53.98	17.04	AV
3 680.5500	51.66	V	51.66	73.98	22.32	PK
3 680.5500	40.11	V	40.11	53.98	13.87	AV
4 600.6875	53.91	V	53.91	73.98	20.07	PK
4 600.6875	42.67	V	42.67	53.98	11.31	AV
7 361.1000	53.22	V	53.22	73.98	20.76	PK
7 361.1000	47.28	V	47.28	53.98	6.70	AV
8 281.2375	49.86	V	49.86	73.98	24.12	PK
8 281.2375	37.73	V	37.73	53.98	16.25	AV
2 760.4125	49.28	V	49.28	73.98	24.70	PK
2 760.4125	36.94	V	36.94	53.98	17.04	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

Channel : RC2_Mid

Frequency	Measured Value	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB μ V]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2 710.238	50.34	H	50.34	73.98	23.64	PK
2 710.238	39.18	H	39.18	53.98	14.80	AV
3 613.650	52.01	H	52.01	73.98	21.97	PK
3 613.650	41.29	H	41.29	53.98	12.69	AV
4 517.063	53.42	H	53.42	73.98	20.56	PK
4 517.063	41.19	H	41.19	53.98	12.79	AV
5 420.475	56.36	H	56.36	73.98	17.62	PK
5 420.475	48.58	H	48.58	53.98	5.40	AV
8 130.713	50.48	H	50.48	73.98	23.50	PK
8 130.713	40.35	H	40.35	53.98	13.63	AV
9 034.125	51.83	H	51.83	73.98	22.15	PK
9 034.125	41.61	H	41.61	53.98	12.37	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

Channel : RC4_Mid

Frequency	Measured Value	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBμV]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]	
2 764.2375	49.95	V	49.95	73.98	24.03	PK
2 764.2375	36.83	V	36.83	53.98	17.15	AV
3 685.6500	51.39	V	51.39	73.98	22.59	PK
3 685.6500	40.11	V	40.11	53.98	13.87	AV
4 607.0625	53.48	V	53.48	73.98	20.50	PK
4 607.0625	42.66	V	42.66	53.98	11.32	AV
7 371.3000	54.03	V	54.03	73.98	19.95	PK
7 371.3000	49.05	V	49.05	53.98	4.93	AV
8 292.7125	50.18	V	50.18	73.98	23.80	PK
8 292.7125	36.93	V	36.93	53.98	17.05	AV
2 764.2375	49.95	V	49.95	73.98	24.03	PK
2 764.2375	36.83	V	36.83	53.98	17.15	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

Channel : RC2_High

Frequency	Measured Value	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB μ V]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2 713.988	50.18	H	50.18	73.98	23.80	PK
2 713.988	38.37	H	38.37	53.98	15.61	AV
3 618.650	52.11	H	52.11	73.98	21.87	PK
3 618.650	42.07	H	42.07	53.98	11.91	AV
4 523.313	53.45	H	53.45	73.98	20.53	PK
4 523.313	41.72	H	41.72	53.98	12.26	AV
5 427.975	55.89	H	55.89	73.98	18.09	PK
5 427.975	46.72	H	46.72	53.98	7.26	AV
8 141.963	51.06	H	51.06	73.98	22.92	PK
8 141.963	40.87	H	40.87	53.98	13.11	AV
9 046.625	51.94	H	51.94	73.98	22.04	PK
9 046.625	41.05	H	41.05	53.98	12.93	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

Channel : RC4_High

Frequency	Measured Value	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB μ V]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2 767.9875	50.05	V	50.05	73.98	23.93	PK
2 767.9875	37.36	V	37.36	53.98	16.62	AV
3 690.6500	52.18	V	52.18	73.98	21.80	PK
3 690.6500	39.48	V	39.48	53.98	14.50	AV
4 613.3125	54.51	V	54.51	73.98	19.47	PK
4 613.3125	42.33	V	42.33	53.98	11.65	AV
7 381.3000	55.66	V	55.66	73.98	18.32	PK
7 381.3000	50.52	V	50.52	53.98	3.46	AV
8 303.9625	49.79	V	49.79	73.98	24.19	PK
8 303.9625	36.57	V	36.57	53.98	17.41	AV
2 767.9875	50.05	V	50.05	73.98	23.93	PK
2 767.9875	37.36	V	37.36	53.98	16.62	AV

Note :

1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

[DBS]

Macro Channel 5+Micro Channel 4


Frequency	Measured Value	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dB μ V]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]	
2 710.2375	50.98	H	50.98	73.98	23.00	PK
2 710.2375	39.53	H	39.53	53.98	14.45	AV
3 613.6500	46.30	H	46.30	73.98	27.68	PK
3 613.6500	38.23	H	38.23	53.98	15.75	AV
4 517.0625	47.55	H	47.55	73.98	26.43	PK
4 517.0625	39.49	H	39.49	53.98	14.49	AV
5 420.4750	52.84	H	52.84	73.98	21.14	PK
5 420.4750	49.74	H	49.74	53.98	4.24	AV
8 130.7125	49.63	H	49.63	73.98	24.35	PK
8 130.7125	37.73	H	37.73	53.98	16.25	AV
9 034.1250	51.55	H	51.55	73.98	22.43	PK
9 034.1250	40.42	H	40.42	53.98	13.56	AV

Note :


1. Non Restricted Band refer to Conducted Spurious emission test result (20 dBc)

Test Plots


Radiated Spurious Emissions plot – Average Result (RC2 6th Harmonic)

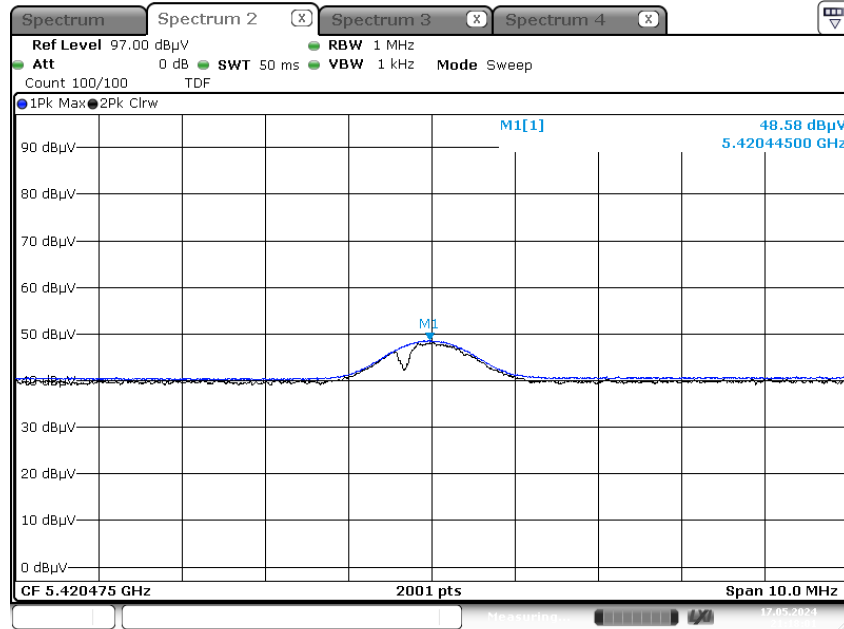

Radiated Spurious Emissions plot – Peak Result (RC2 6th Harmonic)

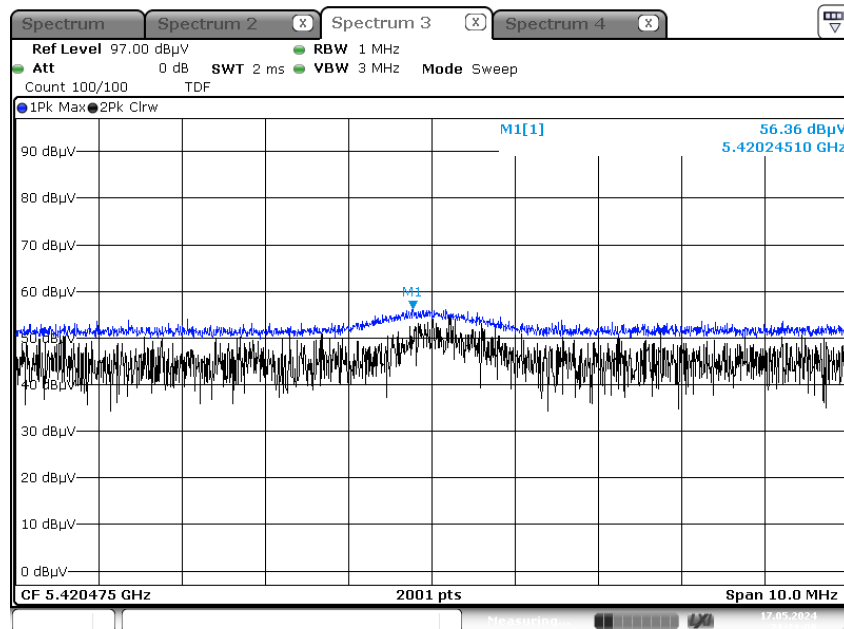


Radiated Spurious Emissions plot – Average Result (RC4 8th Harmonic)

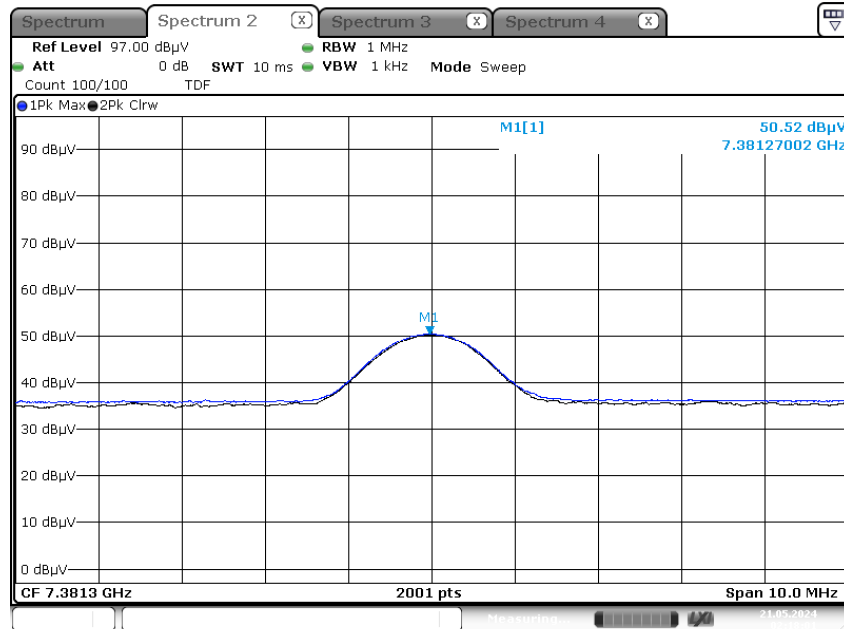

Date: 21.MAY.2024 02:18:02

Radiated Spurious Emissions plot – Peak Result (RC4 8th Harmonic)

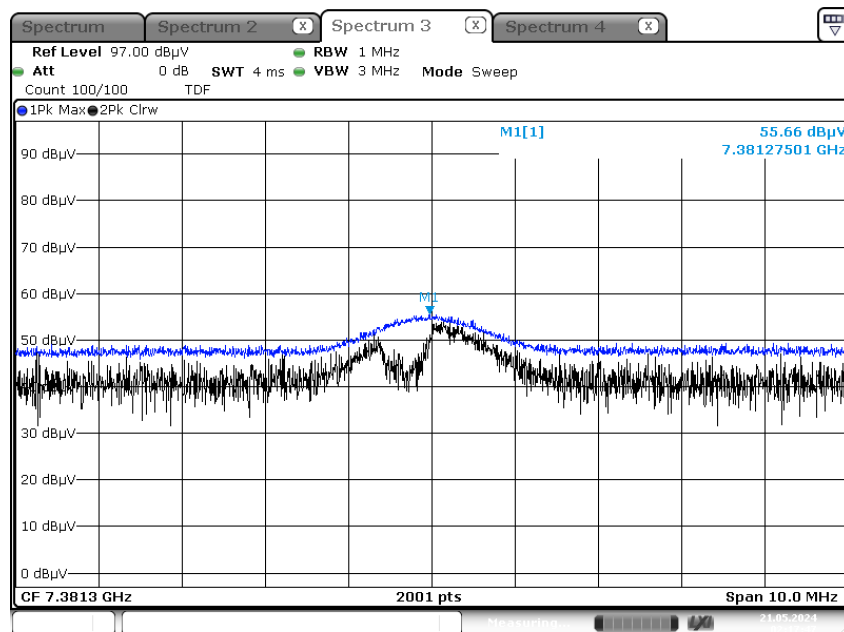


Date: 21.MAY.2024 02:17:47

Note : Only the worst case plots for Radiated Spurious Emissions.


[DBS]

Radiated Spurious Emissions plot – Average Result (RC2 6th Harmonic)

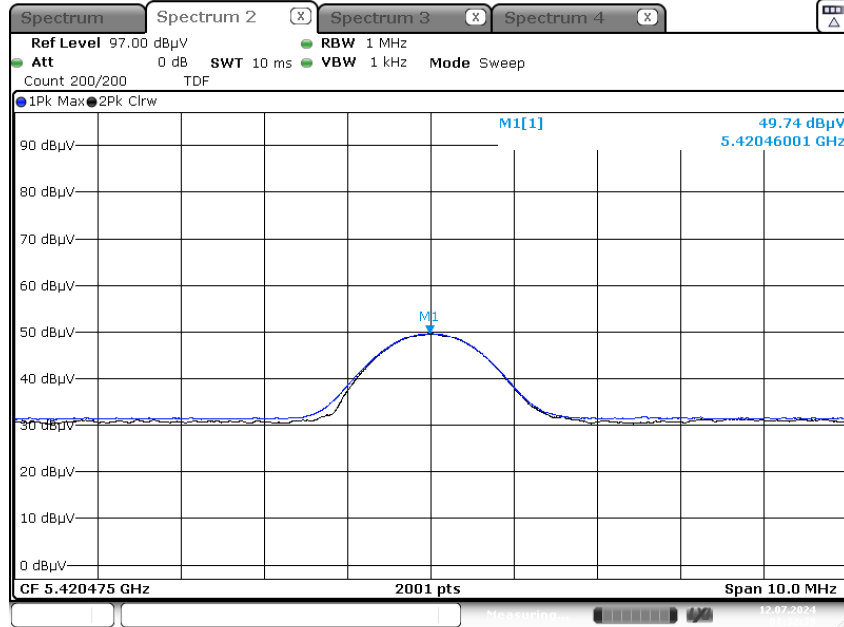

Date: 12.JUL.2024 01:32:39

Radiated Spurious Emissions plot – Peak Result (RC2 6th Harmonic)

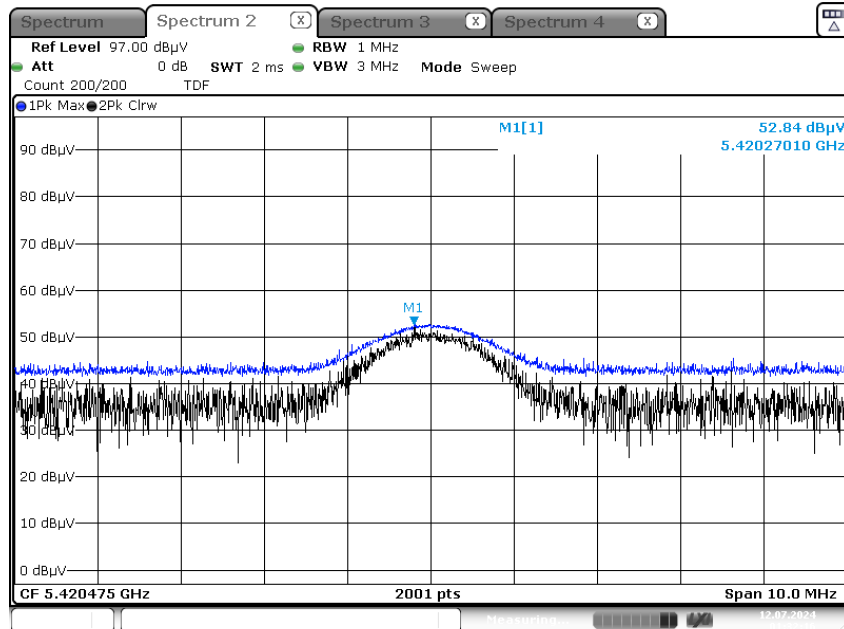

Date: 12.JUL.2024 01:32:16

10.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Measured Value	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Measured Value	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm/m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB

No Critical peaks found

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Signal Analyzer	N9030A	Keysight	MY55410508	09/04/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	02/28/2025	Annual
Power Sensor	N1921A	Agilent	MY57820067	02/22/2025	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/30/2024	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2025	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/02/2025	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	05/28/2025	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	02/20/2025	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/15/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	S3AM	08/03/2025	Biennial
Controller (Antenna mast & Turn Table)	CO3000	Innco system	CO3000/ 15421/57580623/G	N/A	N/A
Antenna Position Tower	MA4640	Innco system	9320422	04/05/2025	Biennial
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Turn Table	N/A	Innco system	5930623	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/07/2026	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/07/2025	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1151	07/14/2025	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM2009001	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5- 2370/2520-60/12SS	Wainwright Instruments	2	01/02/2025	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	5	06/04/2025	Annual
Band Reject Filter	WRCJV12-4900-5100- 5900-6100-50SS	Wainwright Instruments	6	06/04/2025	Annual
Band Reject Filter	WRCJV5100/5850- 40/50-8EEK	Wainwright Instruments	1	02/14/2025	Annual
RF Switching System	FBSR-03A (3G HPF+LNA)	T&M SYSTEM	S3L1	11/17/2024	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S5L1	03/12/2025	Annual
RF Switching System	FBSR-03A (10dB ATT+LNA)	T&M SYSTEM	S3L2	11/17/2024	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S5L4	03/12/2025	Annual
RF Switching System	FBSR-03A (7G HPF+LNA)	T&M SYSTEM	S3L3	11/17/2024	Annual
RF Switching System	FBSR-03A (3dB ATT+LNA)	T&M SYSTEM	S3L4	11/17/2024	Annual
Power Amplifier	CBL18265035	CERNEK	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEK	25956	02/26/2025	Annual

Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/19/2025	Annual
High Pass Filter	F5	Wainwright Instruments	F5	05/16/2024	Annual
Spectrum Analyzer	FSV40 (9 kHz ~ 40 GHz)	Rohde & Schwarz	100900	12/06/2024	Annual
Spectrum Analyzer	FSV40 (9 kHz ~ 40 GHz)	Rohde & Schwarz	101510	03/28/2025	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

12. Annex A_EUT AND TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2406-FI004-P