


2.4G-2.483G Inverted F Antenna Specification


SPECIFICATIONS	
Frequency (MHz)	2400-2483
Peak Gain (dBi)	2.499
Average Gain (dBi)	>-4
VSWR	<3.2
Impedance (Ω)	50Ω
Antenna Type	PCB Antenna
Polarization	Linear
Manufacture	JIANGSU MULIN INTELLIGENCE ELECTRIC CO., LTD.
Address:	No. 6, Xiajia Road, Henglin Town, Economic Development Zone, Changzhou, Jiangsu, China
Test equipment	HWA-TECH

Antenna Photo & Length (mm)

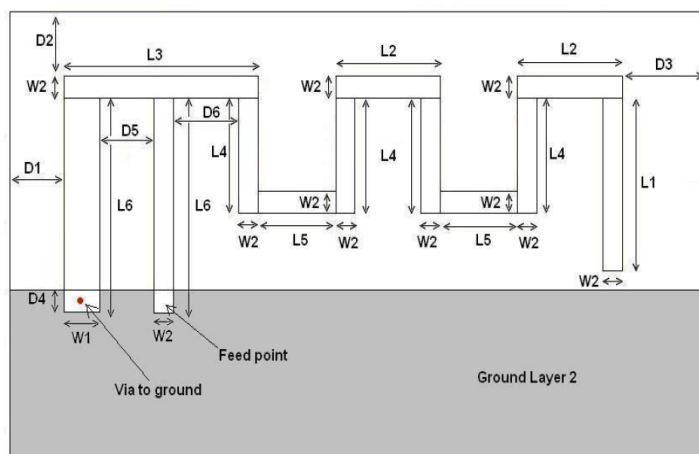

L1	3.94 mm
L2	2.70 mm
L3	5.00 mm
L4	2.64 mm
L5	2.00 mm
L6	4.90 mm
W1	0.90 mm
W2	0.50 mm
D1	0.50 mm
D2	0.30 mm
D3	0.30 mm
D4	0.50 mm
D5	1.40mm
D6	1.70 mm


Antenna passive S-parameters: VSWR、Return Loss、Smith

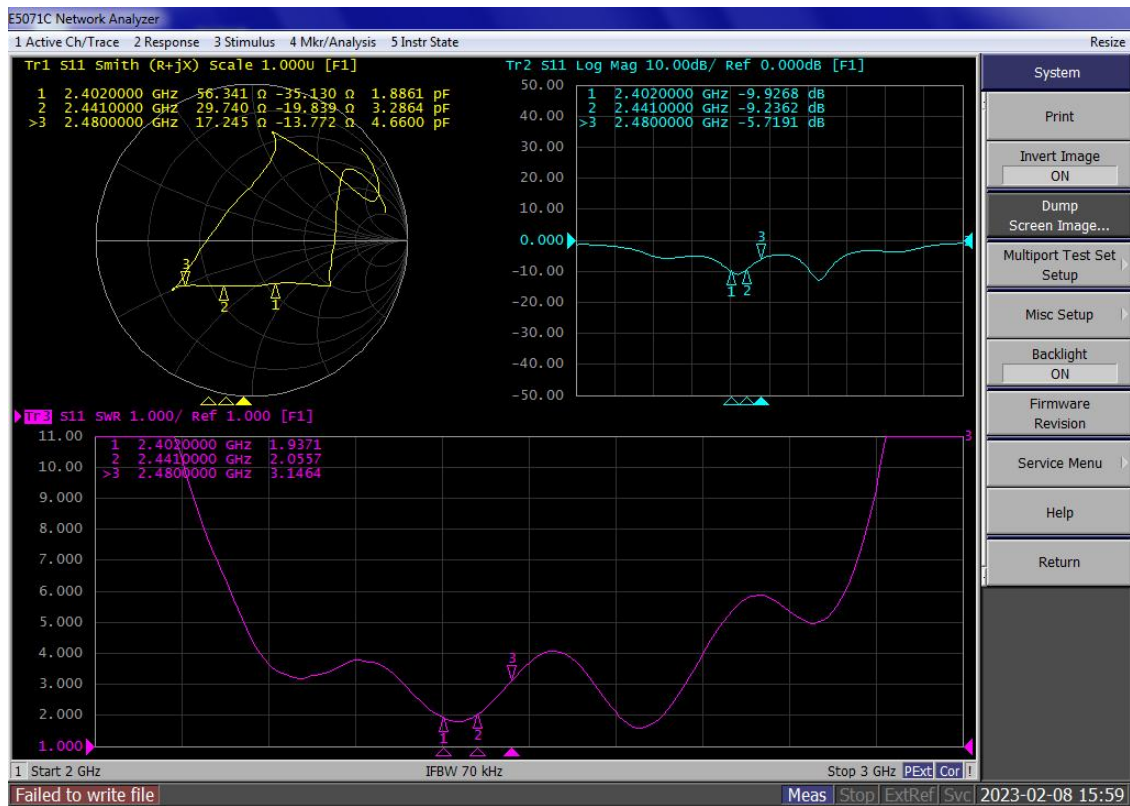


Antenna efficiency and gain:

Frequency (MHz)	Gain (dBi)	Effciency (%)	AverageGain (dBi)	Efficiency (dB)
2400	1.433	59.329%	-2.717	-2.267
2410	0.927	51.861%	-3.416	-2.852
2420	0.829	52.112%	-3.166	-2.831
2430	0.881	49.299%	-3.258	-3.072
2440	1.192	50.672%	-3.144	-2.952
2450	1.688	53.067%	-2.735	-2.752
2460	2.194	59.423%	-2.276	-2.260
2470	2.118	56.680%	-2.438	-2.466
2480	2.499	61.727%	-2.112	-2.095
Average	1.529	54.908%	-2.806	-2.616
Peak	2.499	61.727%	-2.112	-2.095


2440MHz 2D-Theta Pattern

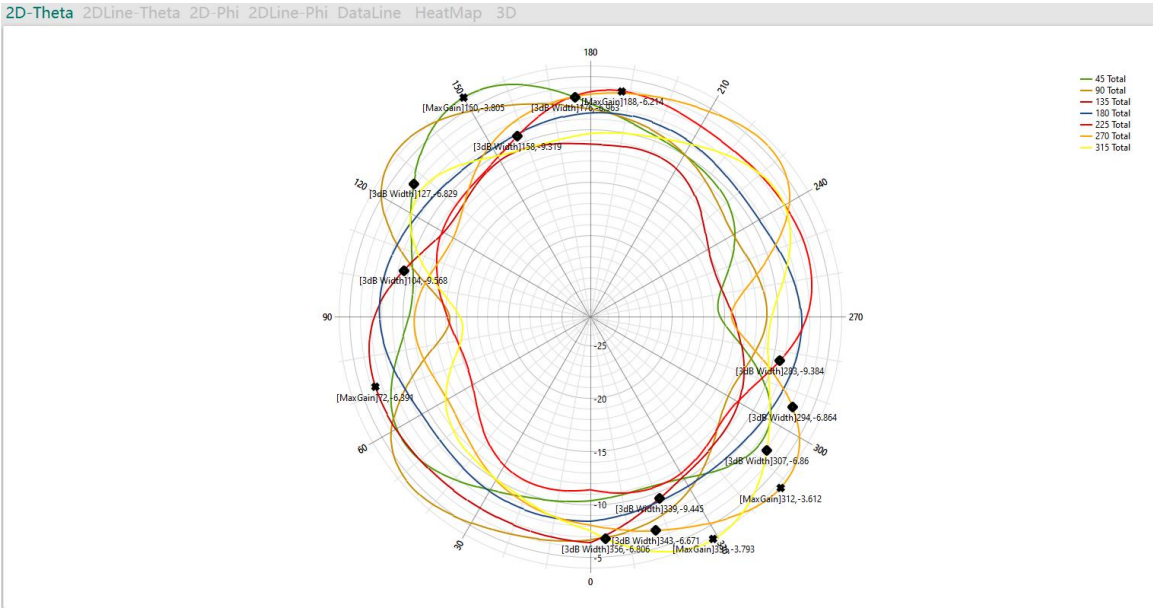


2440MHz 2D-Phi Pattern

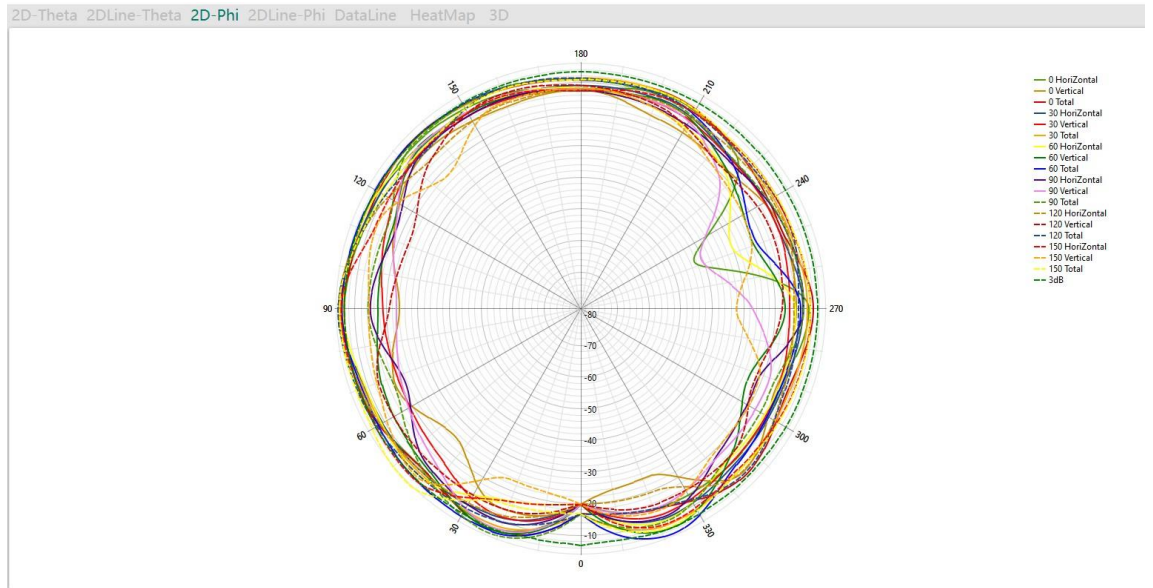

2440MHz 3D-Horizontal Pattern

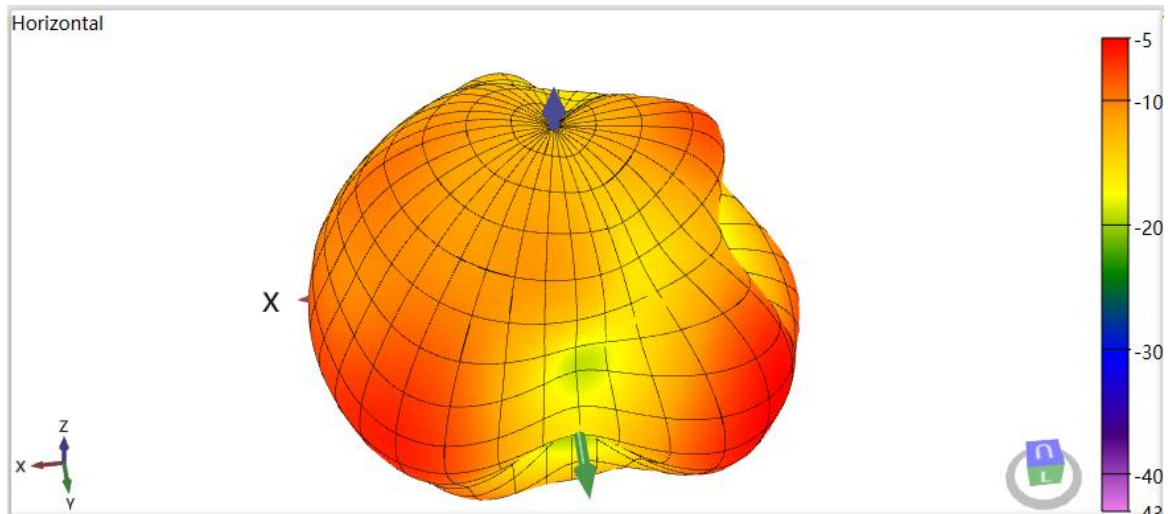

2440MHz 3D-Vertical Pattern

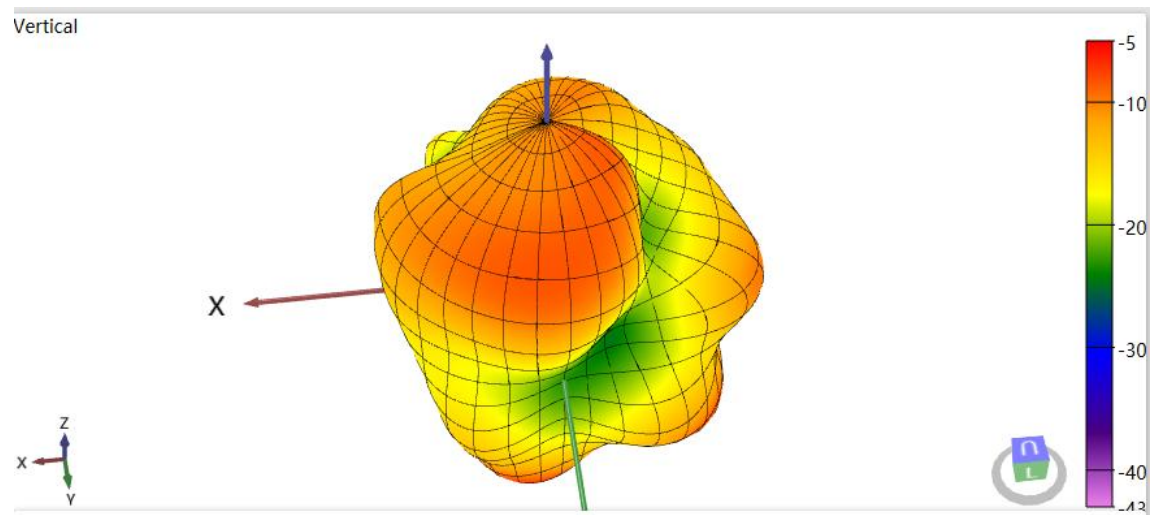

2440MHz 3D-Total Pattern

