

Starmatrix Industries

RF TEST REPORT

Report Type:

FCC Part 15.247 RF report

Model:

SMP7501AW, SMP7502AW

REPORT NUMBER:

231100587SHA-001

ISSUE DATE:

May 27, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.247-02_V1 © 2018 Intertek



Applicant: Starmatrix Industries
NO.1, Xinwanbao Road, Phoenix Industrial Park, Yanling, Danyang,
Zhenjiang, Jiangsu,China

Manufacturer: Starmatrix Industries
NO.1, Xinwanbao Road, Phoenix Industrial Park, Yanling, Danyang,
Zhenjiang, Jiangsu,China

Manufacturer Site: Starmatrix Industries
NO.1, Xinwanbao Road, Phoenix Industrial Park, Yanling, Danyang,
Zhenjiang, Jiangsu,China

Product Name: VARIABLE SPEED SWIMMING POOL PUMP

Type/Model: SMP7501AW, SMP7502AW

FCC ID: 2BEPJ-SMP


SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2021): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

PREPARED BY:



Project Engineer
Dylan Tang

REVIEWED BY:



Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

- REVISION HISTORY..... 5**
- MEASUREMENT RESULT SUMMARY 6**
- 1 GENERAL INFORMATION 7**
 - 1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) 7
 - 1.2 TECHNICAL SPECIFICATION..... 7
 - 1.3 DESCRIPTION OF TEST FACILITY..... 8
- 2 TEST SPECIFICATIONS..... 9**
 - 2.1 STANDARDS OR SPECIFICATION 9
 - 2.2 MODE OF OPERATION DURING THE TEST 9
 - 2.3 TEST SOFTWARE LIST 10
 - 2.4 TEST PERIPHERALS LIST..... 10
 - 2.5 TEST ENVIRONMENT CONDITION: 10
 - 2.6 INSTRUMENT LIST 11
 - 2.7 MEASUREMENT UNCERTAINTY..... 12
- 3 MINIMUM 6DB BANDWIDTH..... 13**
 - 3.1 LIMIT 13
 - 3.2 MEASUREMENT PROCEDURE 13
 - 3.3 TEST CONFIGURATION 13
 - 3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH..... 13
- 4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P..... 14**
 - 4.1 LIMIT 14
 - 4.2 MEASUREMENT PROCEDURE 14
 - 4.3 TEST CONFIGURATION 15
 - 4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER..... 15
- 5 POWER SPECTRUM DENSITY 16**
 - 5.1 LIMIT 16
 - 5.2 MEASUREMENT PROCEDURE 16
 - 5.3 TEST CONFIGURATION 17
 - 5.4 TEST RESULTS OF POWER SPECTRUM DENSITY 17
- 6 EMISSION OUTSIDE THE FREQUENCY BAND 18**
 - 6.1 LIMIT 18
 - 6.2 MEASUREMENT PROCEDURE 18
 - 6.3 TEST CONFIGURATION 19
 - 6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND..... 19
- 7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS..... 20**
 - 7.1 LIMIT 20
 - 7.2 MEASUREMENT PROCEDURE 20
 - 7.3 TEST CONFIGURATION 22
 - 7.4 TEST RESULTS OF RADIATED EMISSIONS 24
- 8 POWER LINE CONDUCTED EMISSION..... 28**
 - 8.1 LIMIT 28
 - 8.2 TEST CONFIGURATION 28
 - 8.3 MEASUREMENT PROCEDURE 29

TEST REPORT

8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	30
9	OCCUPIED BANDWIDTH	34
9.1	LIMIT	34
9.2	MEASUREMENT PROCEDURE	34
9.3	TEST CONFIGURATION	34
9.4	THE RESULTS OF OCCUPIED BANDWIDTH	34
10	ANTENNA REQUIREMENT.....	35

Revision History

Report No.	Version	Description	Issued Date
231100587SHA-001	Rev. 01	Initial issue of report	May 27, 2024

Measurement result summary

TEST ITEM	FCC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	Pass
Power spectrum density	15.247(e)	Pass
Emission outside the frequency band	15.247(d)	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	Pass
Power line conducted emission	15.207(a)	Pass
Occupied bandwidth	-	Tested
Antenna requirement	15.203	Pass

Notes: 1: NA =Not Applicable

TEST REPORT

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	VARIABLE SPEED SWIMMING POOL PUMP
Type/Model:	SMP7501AW, SMP7502AW
Description of EUT:	The EUT is VARIABLE SPEED SWIMMING POOL PUMP, it supports Bluetooth and WIF function. The differences between SMP7501AW and SMP7502AW is that the supply voltage and power line, two models of PCB layout and circuit design are the same.
Rating:	AC 110V ~120 V 60Hz for SMP7501AW AC 220V ~240 V 60Hz for SMP7502AW
Category of EUT:	Class A
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	RQM006_800W_WIFI SV1.0
Hardware Version:	RQM006 HV2.0
Sample received date:	December 1, 2023
Date of test:	December 1, 2023 ~ May 20, 2024

1.2 Technical Specification

Frequency Range:	2402-2480MHz
Support Standards:	IEEE 802.15.1
Type of Modulation:	GFSK
Channel Number:	40
Data Rate:	1Mbps,2Mbps
Antenna Information:	3.37dBi, PCB antenna

TEST REPORT

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-4243, G-845, C-4723, T-2252
	NVLAP Accreditation Lab NVLAP LAB CODE: 200849-0
	A2LA Accreditation Lab Certificate Number: 3309.02

TEST REPORT

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2021)
ANSI C63.10 (2020)
KDB 558074 (v05)

2.2 Mode of operation during the test

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)				2402 ~ 2480			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Data rate VS Power:

The test setting software is offered by the manufactory. The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases.

Test software and Power Setting parameter			
Test Software	EspRFTsetTool		
Working Mode	BLE		
Test Channel	2402MHz	2440MHz	2480MHz
Power Setting	11	11	11

TEST REPORT

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Radiated test mode: EUT transmitted signal with BT antenna;

Conducted test mode: EUT transmitted signal from BT RF port connected to SPA directly;

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL, 5480	NA

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	23°C	52% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	22°C	55% RH
Power line conducted emission	21°C	52% RH

TEST REPORT

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2025-02-27
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2024-11-19
<input type="checkbox"/>	A.M.N.	R&S	ENV4200	EC 3558	2024-06-05
<input checked="" type="checkbox"/>	Attenuator	Hua Xiang	Ts5-10db-6g	EC 6194-1	2024-12-07
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2025-01-11
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2024-08-22
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2024-09-12
<input type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC 5262	2024-06-15
<input checked="" type="checkbox"/>	Pre-amplifier	Tonscend	tap01018050	EC 6432-1	2024-12-07
<input checked="" type="checkbox"/>	Horn antenna	Tonscend	bha9120d	EC 6432-2	2024-02-15
<input type="checkbox"/>	Horn antenna	ETS	3116c	EC 5955	2024-07-22
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2024-07-08
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2025-03-07
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030B	EC 6078	2023-06-04
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2024-03-05
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2024-03-05
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2024-03-05
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC 6209	2025-01-30
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2025-03-07
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5182A	EC 6172	2024-08-08
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5181A	EC 6171	2024-08-08
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2024-03-06
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2024-03-24
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2024-08-16

TEST REPORT

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB

TEST REPORT

3 Minimum 6dB bandwidth

Test result: Pass


3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

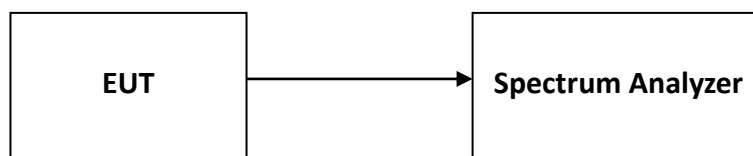

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

TEST REPORT

4 Maximum conducted output power and e.i.r.p.

Test result: Pass


4.1 Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

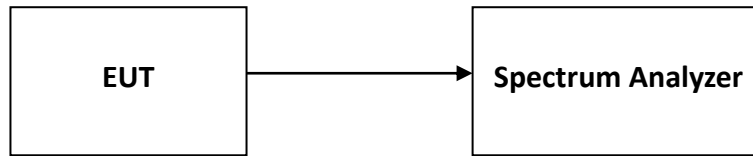TEST REPORT**4.3 Test Configuration****4.4 Test Results of Maximum conducted output power**

Please refer to Appendix A

TEST REPORT

5 Power spectrum density

Test result: Pass


5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.

5.2 Measurement Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

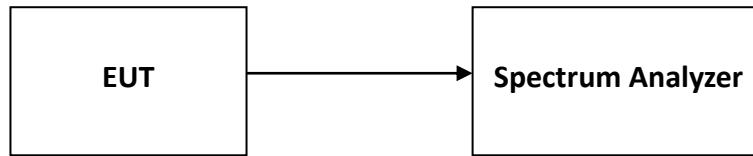TEST REPORT**5.3 Test Configuration****5.4 Test Results of Power spectrum density**

Please refer to Appendix A

TEST REPORT

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

Reference level measurement


Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

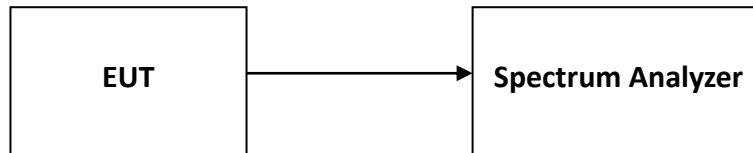TEST REPORT**6.3 Test Configuration****6.4 The results of Emission outside the frequency band**

Please refer to Appendix A

TEST REPORT

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	282	3
88 ~ 216	474	3
216 ~ 960	669	3
Above 960	500	3

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

TEST REPORT

- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported


TEST REPORT

7.3 Test Configuration

For Radiated emission below 30MHz:

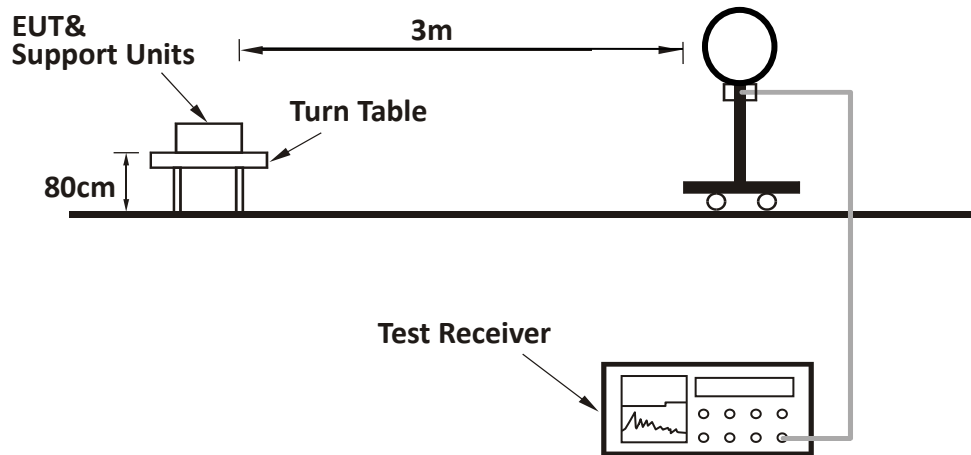


For Radiated emission 30MHz to 1GHz:

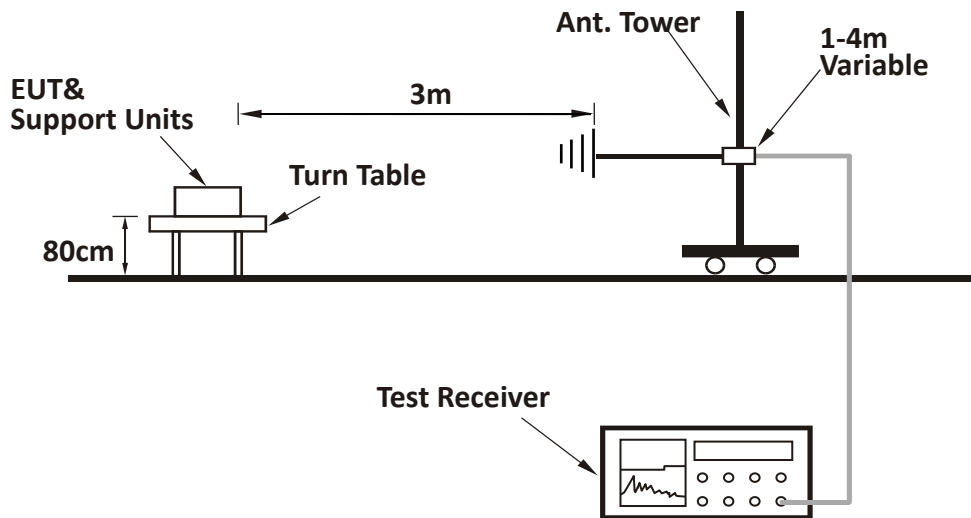

TEST REPORT

For Radiated emission above 1GHz:

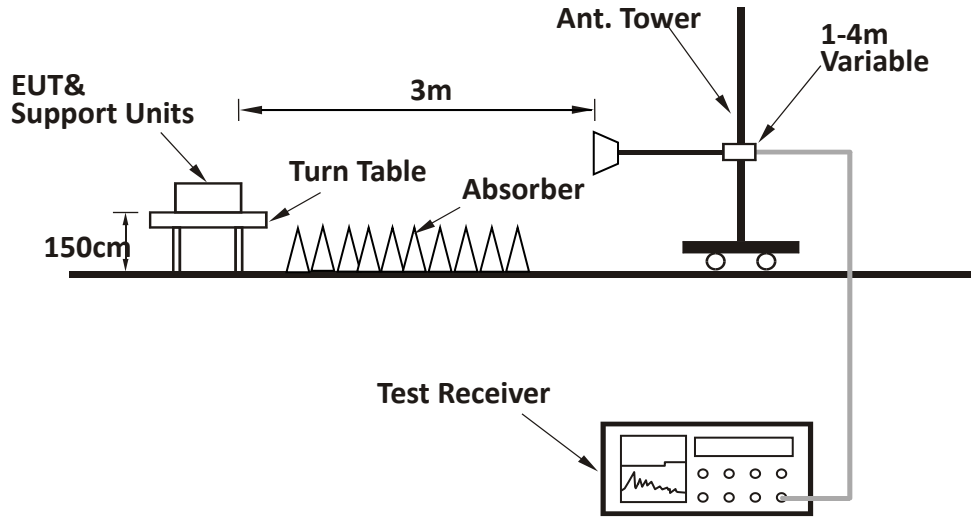


TEST REPORT

7.4 Test Results of Radiated Emissions


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

Horizontal

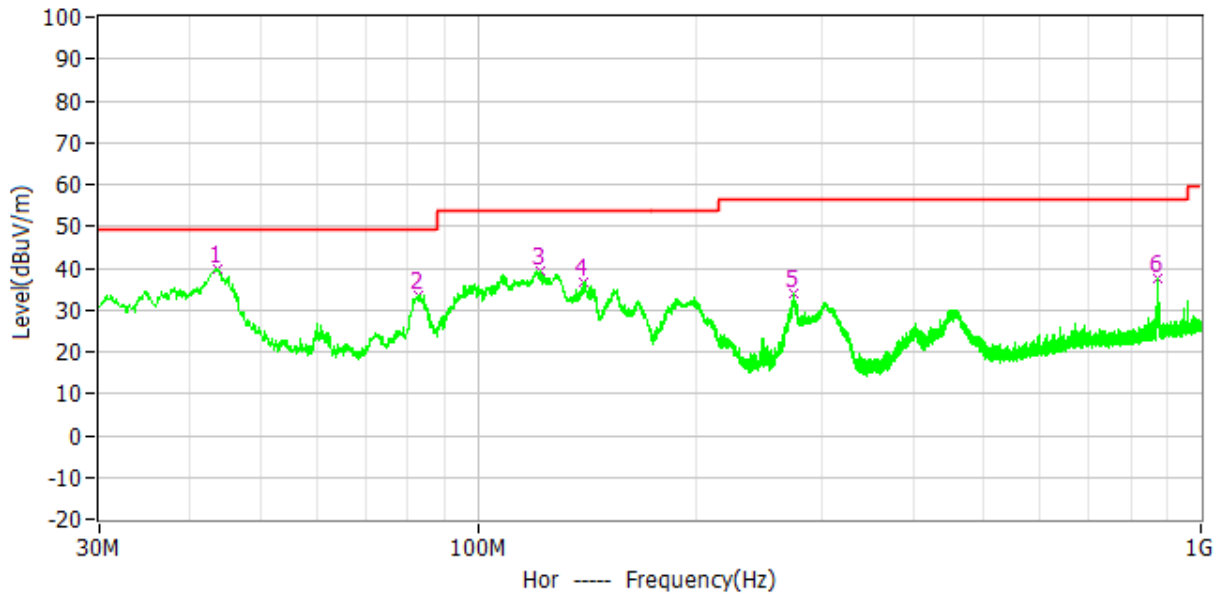

Vertical

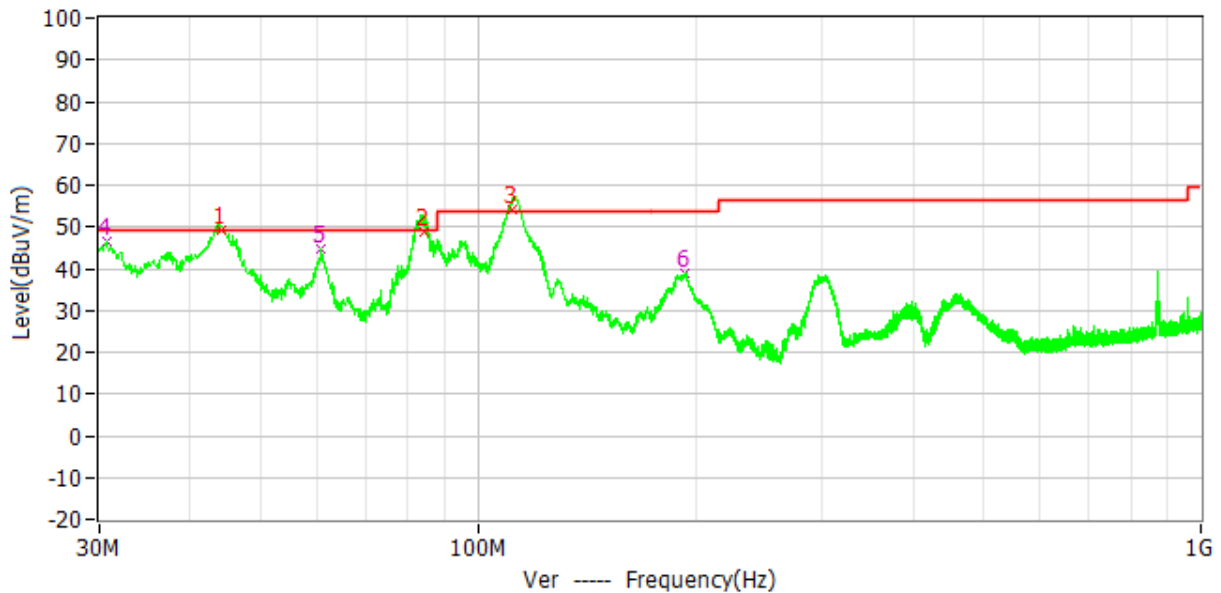

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	43.580	39.6	14.1	49.0	9.4	QP
H	82.865	33.6	10.1	49.0	15.4	QP
H	122.247	39.3	12.3	53.5	14.2	QP
H	140.095	36.6	14.1	53.5	16.9	QP
H	272.985	33.9	14.1	56.5	22.6	QP
H	869.147	37.6	25.8	56.5	18.9	QP
V	44.167	48.5	21.1	49.0	0.5	QP
V	84.317	48.6	19.9	49.0	0.4	QP
V	111.444	53.2	17.5	53.5	0.3	QP
V	30.679	46.4	13.1	49.0	2.6	QP
V	60.846	44.6	17.5	49.0	4.4	QP
V	193.057	38.9	24.8	53.5	14.6	QP

Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz

1M

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	31.7	103.5	Fundamental	/	PK
	V	2402.00	31.7	100.0	Fundamental	/	PK
	H	2390.00	31.7	48.2	74.00	25.8	PK
	V	2390.00	31.7	48.5	74.00	25.5	PK
	H	4804.00	-15.3	46.1	74.00	27.9	PK
	H	7206.00	-9.0	43.7	74.00	30.3	PK
	V	4804.00	-15.3	47.5	74.00	26.5	PK
	V	7206.00	-9.0	44.2	74.00	29.8	PK
M	H	4852.00	-15.0	53.7	74.00	20.3	PK
	H	7278.00	-8.8	38.4	74.00	35.6	PK
	V	4852.00	-15.0	53.8	74.00	20.2	PK
	V	7278.00	-8.8	38.5	74.00	35.5	PK

TEST REPORT

H	H	2480.00	31.9	102.1	Fundamental	/	PK
	V	2480.00	31.9	99.1	Fundamental	/	PK
	H	2483.50	31.9	53.9	74.00	20.1	PK
	V	2483.50	31.9	50.0	74.00	24.0	PK
	H	4960.00	-14.9	47.9	74.00	26.1	PK
	H	7440.00	-8.5	44.3	74.00	29.7	PK
	V	4960.00	-14.9	44.1	74.00	29.9	PK
	V	7440.00	-8.5	44.3	74.00	29.7	PK

2M

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2402.00	31.7	104.5	Fundamental	/	PK
	V	2402.00	31.7	101.1	Fundamental	/	PK
	H	2390.00	31.7	48.0	74.00	26.0	PK
	V	2390.00	31.7	47.3	74.00	26.7	PK
	H	4804.00	-15.3	47.2	74.00	26.8	PK
	H	7206.00	-9.0	44.1	74.00	29.9	PK
	V	4804.00	-15.3	47.0	74.00	27.0	PK
	V	7206.00	-9.0	44.9	74.00	29.1	PK
M	H	4852.00	-15.0	53.5	74.00	20.5	PK
	H	7278.00	-8.8	39.2	74.00	34.8	PK
	V	4852.00	-15.0	53.9	74.00	20.1	PK
	V	7278.00	-8.8	38.8	74.00	35.2	PK
H	H	2480.00	31.9	102.0	Fundamental	/	PK
	V	2480.00	31.9	98.8	Fundamental	/	PK
	H	2483.50	31.9	54.9	74.00	19.1	PK
	H	2483.50	31.9	37.0	54.00	17.0	AV
	V	2483.50	31.9	51.3	74.00	22.7	PK
	H	4960.00	-14.9	48.5	74.00	25.5	PK
	H	7440.00	-8.5	45.1	74.00	28.9	PK
	V	4960.00	-14.9	47.9	74.00	26.1	PK
	V	7440.00	-8.5	44.8	74.00	29.2	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor

TEST REPORT

3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

8 Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	79	66
0.5-30	73	60

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

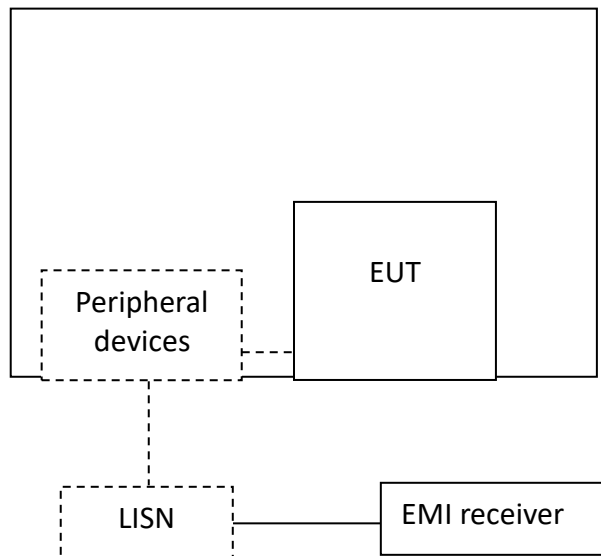

TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT


8.4 Test Results of Power line conducted emission

SMP7501AW:

L Line

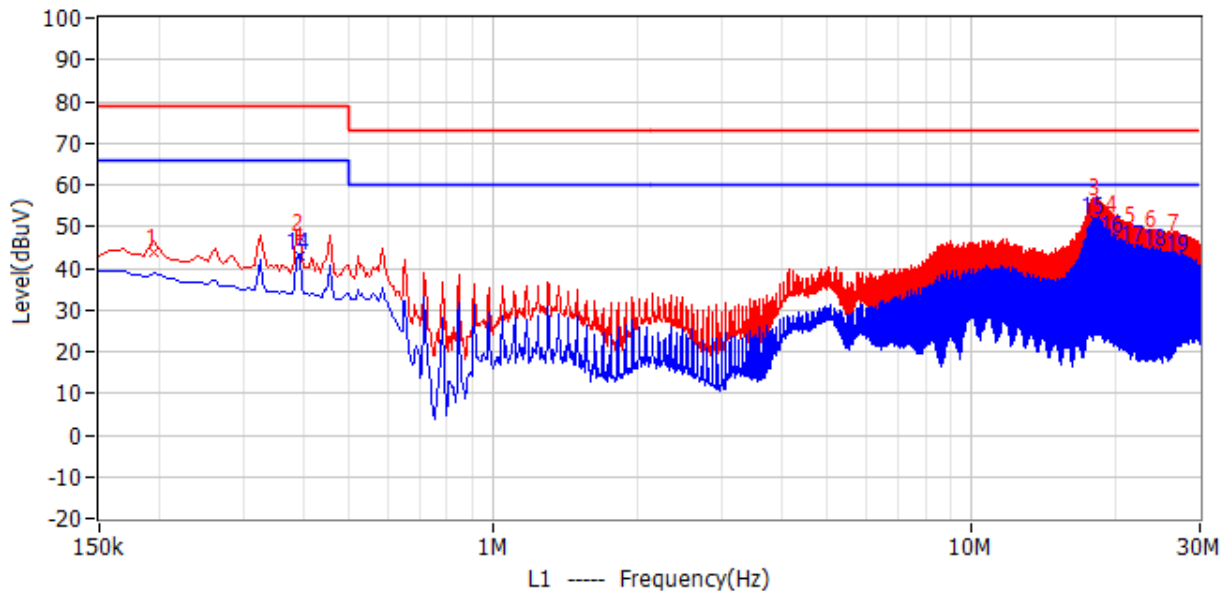

N Line

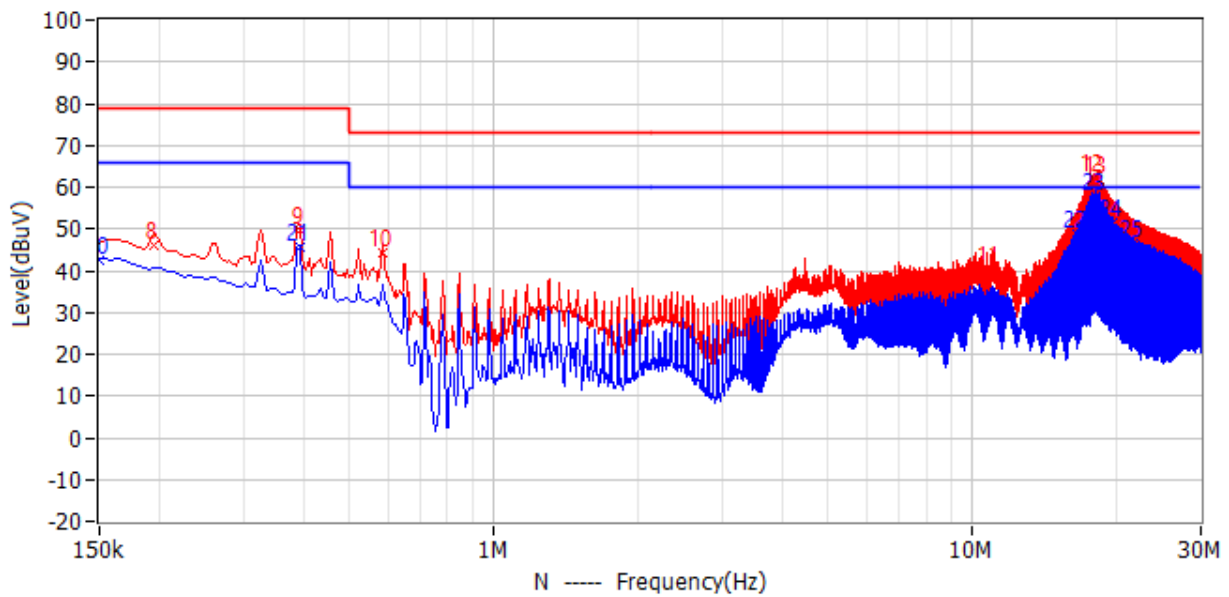

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	195.000kHz	79.0	43.9	35.1	37.7	6.2	QP	L1
2	393.000kHz	79.0	47.2	31.8	41.0	6.2	QP	L1
3	18.245MHz	73.0	56.0	17.0	48.8	7.2	QP	L1
4	19.743MHz	73.0	51.8	21.2	44.5	7.3	QP	L1
5	21.764MHz	73.0	49.1	23.9	41.7	7.4	QP	L1
6	23.847MHz	73.0	48.1	24.9	40.6	7.5	QP	L1
7	26.651MHz	73.0	47.2	25.8	39.5	7.7	QP	L1
8	195.000kHz	79.0	45.9	33.1	39.7	6.2	QP	N
9	393.000kHz	79.0	49.5	29.5	43.3	6.2	QP	N
10	586.500kHz	73.0	44.2	28.8	38.0	6.2	QP	N
11	10.946MHz	73.0	40.4	32.6	33.7	6.7	QP	N
12	17.984MHz	73.0	62.1	10.9	55.0	7.1	QP	N
13	18.245MHz	73.0	61.8	11.2	54.6	7.2	QP	N
14	393.000kHz	66.0	42.9	23.1	36.7	6.2	AV	L1
15	18.114MHz	60.0	51.6	8.4	44.4	7.2	AV	L1
16	19.874MHz	60.0	47.0	13.0	39.7	7.3	AV	L1
17	21.831MHz	60.0	44.8	15.2	37.4	7.4	AV	L1
18	24.306MHz	60.0	43.7	16.3	36.2	7.5	AV	L1
19	27.240MHz	60.0	42.4	17.6	34.7	7.7	AV	L1
20	150.000kHz	66.0	42.4	23.6	36.2	6.2	AV	N
21	393.000kHz	66.0	45.7	20.3	39.5	6.2	AV	N
22	16.485MHz	60.0	48.9	11.1	41.9	7.0	AV	N
23	18.114MHz	60.0	57.8	2.2	50.7	7.1	AV	N
24	19.613MHz	60.0	51.3	8.7	44.1	7.2	AV	N
25	21.696MHz	60.0	46.7	13.3	39.4	7.3	AV	N

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Reading + Factor


3. Margin = Limit - Level

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.


TEST REPORT

SMP7502AW:

L Line

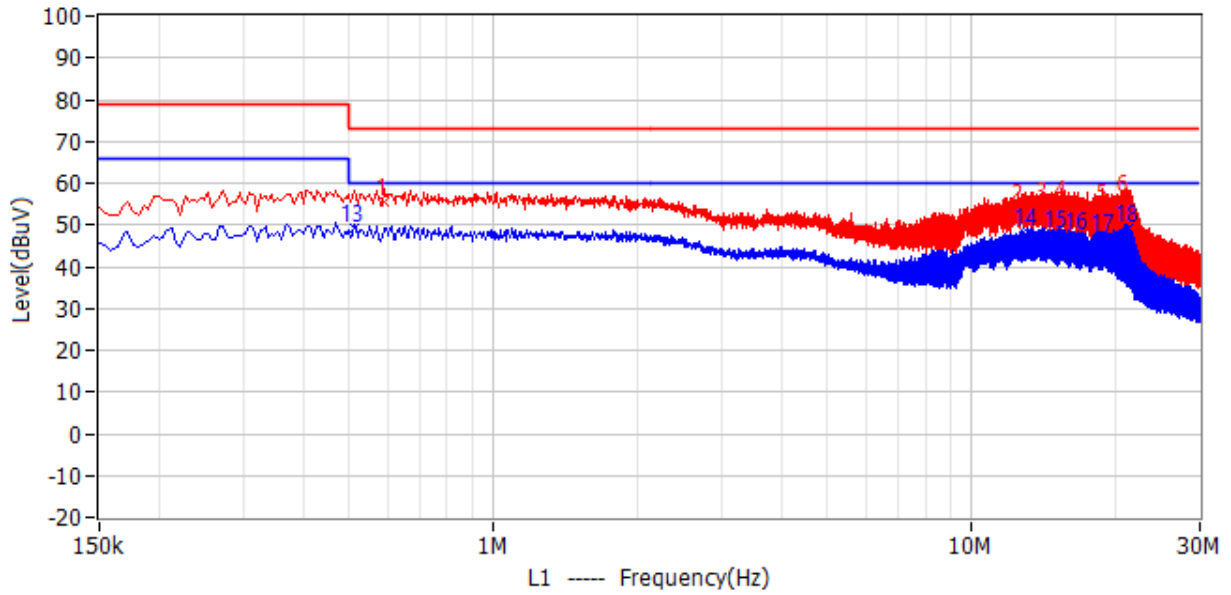

N Line

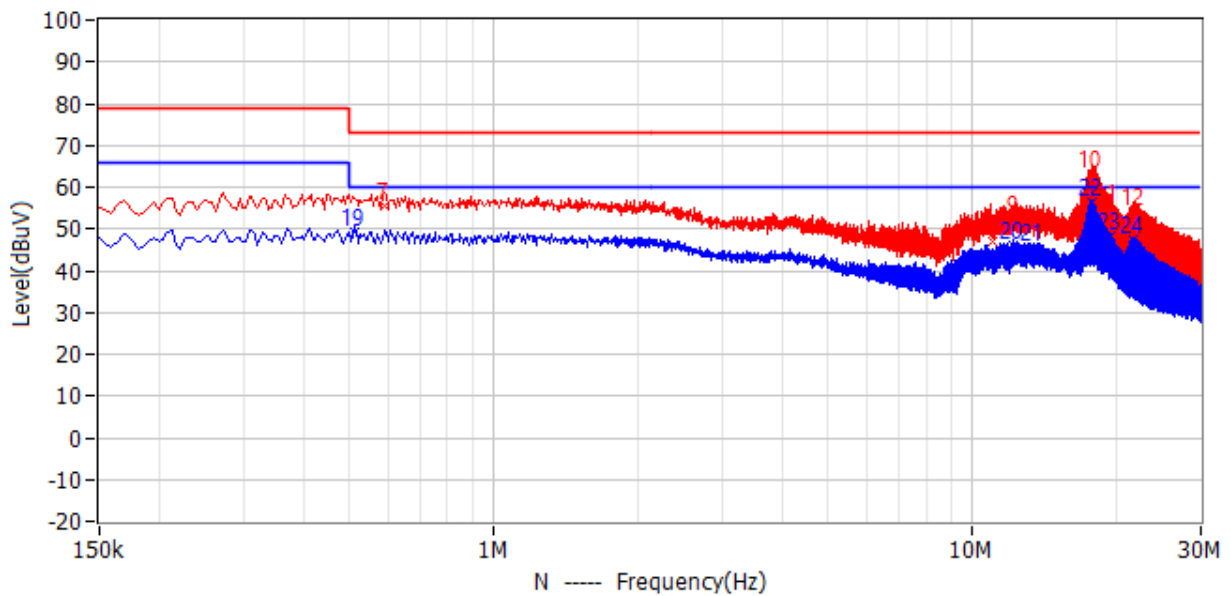

TEST REPORT

Test Data:

No.	Frequency	Limit dBuV	Level dBuV	Margin dB	Reading dBuV	Factor dB	Detector	Phase
1	591.000kHz	73.0	55.6	17.4	49.4	6.2	QP	L1
2	12.624MHz	73.0	54.1	18.9	47.3	6.8	QP	L1
3	14.136MHz	73.0	54.8	18.2	47.9	6.9	QP	L1
4	15.518MHz	73.0	54.9	18.1	47.9	7.0	QP	L1
5	19.001MHz	73.0	54.0	19.0	46.8	7.2	QP	L1
6	20.909MHz	73.0	56.5	16.5	49.2	7.3	QP	L1
7	591.000kHz	73.0	55.4	17.6	49.2	6.2	QP	N
8	10.995MHz	73.0	46.9	26.1	40.2	6.7	QP	N
9	12.233MHz	73.0	52.4	20.6	45.7	6.7	QP	N
10	17.696MHz	73.0	63.2	9.8	56.1	7.1	QP	N
11	19.338MHz	73.0	54.9	18.1	47.7	7.2	QP	N
12	21.966MHz	73.0	54.3	18.7	47.0	7.3	QP	N
13	510.000kHz	60.0	49.0	11.0	42.8	6.2	AV	L1
14	13.088MHz	60.0	48.1	11.9	41.3	6.8	AV	L1
15	15.126MHz	60.0	48.0	12.0	41.1	6.9	AV	L1
16	16.638MHz	60.0	47.5	12.5	40.4	7.1	AV	L1
17	18.938MHz	60.0	47.1	12.9	39.9	7.2	AV	L1
18	21.242MHz	60.0	49.4	10.6	42.1	7.3	AV	L1
19	510.000kHz	60.0	49.3	10.7	43.1	6.2	AV	N
20	12.170MHz	60.0	46.0	14.0	39.2	6.8	AV	N
21	13.484MHz	60.0	45.6	14.4	38.8	6.8	AV	N
22	17.763MHz	60.0	56.2	3.8	49.1	7.1	AV	N
23	19.406MHz	60.0	48.2	11.8	41.0	7.2	AV	N
24	21.642MHz	60.0	47.3	12.7	40.0	7.3	AV	N

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.*
- 2. Level = Reading + Factor*
- 3. Margin = Limit - Level*
- 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.*

TEST REPORT

9 Occupied Bandwidth

Test result: Tested

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

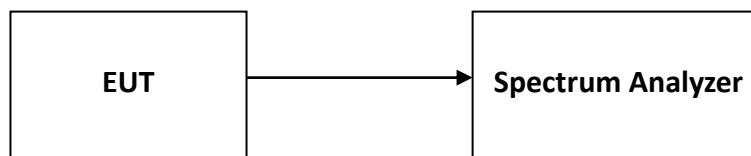

9.4 The results of Occupied Bandwidth

Please refer to Appendix A

TEST REPORT

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****