



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

# TEST REPORT

## FCC Part 15C

Report Reference No.....: CTA240315901

FCC ID.....: 2BEUO-K9

Compiled by

( position+printed name+signature).....: File administrators Zoey Cao

Supervised by

( position+printed name+signature).....: Project Engineer Amy Wen

Approved by

( position+printed name+signature).....: RF Manager Eric Wang

Date of issue .....: 2024-03-16



Eric Wang

Testing Laboratory Name.....: Shenzhen CTA Testing Technology Co., Ltd.

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name.....: Guangzhou Hongding Electronic Technology Co. , Ltd.

Address.....: 503, Building C, Daxin Industrial Park, No. 3 East Development Road,Xisan Village, Luopu Street, Panyu District, Guangzhou City, China

Test specification.....:

Standard.....: FCC Part 15C

**Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Security cameras

Trade Mark.....: /

Manufacturer.....: Guangzhou Hongding Electronic Technology Co. , Ltd.

Model/Type reference.....: K9

Listed Models.....: K10、K11

Ratings.....: DC 5V from USB

Result.....: PASS

# TEST REPORT

Equipment under Test : Security cameras

Model /Type : K9

Listed Models : K10、K11

**Applicant** : **Guangzhou Hongding Electronic Technology Co. , Ltd.**

Address : 503, Building C, Daxin Industrial Park, No. 3 East Development Road,Xisan Village, Luopu Street, Panyu District, Guangzhou City, China

**Manufacturer** : **Guangzhou Hongding Electronic Technology Co. , Ltd.**

Address : 503, Building C, Daxin Industrial Park, No. 3 East Development Road,Xisan Village, Luopu Street, Panyu District, Guangzhou City, China

<b>Test result</b>	<b>Pass *</b>
--------------------	---------------

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>4</b>
1.1.	Test Standards	4
1.2.	Test Description	4
1.3.	Address of the test laboratory	4
1.4.	Test Facility	4
1.5.	Statement of the measurement uncertainty	4
<b>2.</b>	<b><u>GENERAL INFORMATION</u></b>	<b>6</b>
2.1.	General Remarks	6
2.2.	Environmental conditions	6
2.3.	General Description of EUT	6
2.4.	Operation state	6
2.5.	Equipments Used during the Test	7
2.6.	Related Submittal(s) / Grant (s)	8
2.7.	Modifications	8
2.8.	Environmental conditions	8
<b>3.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>9</b>
3.1.	Antenna requirement	9
3.2.	Conducted Emissions (AC Main)	10
3.3.	Conducted Peak Output Power	13
3.4.	Power Spectral Density	14
3.5.	6dB bandwidth	20
3.6.	Restricted band	26
3.7.	Band edge and Spurious Emissions (conducted)	31
3.8.	Spurious Emissions (radiated)	32
<b>4.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>53</b>
<b>5.</b>	<b><u>EXTERANAL AND INTERNAL PHOTOS</u></b>	<b>54</b>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v05](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules

### 1.2. Test Description

Test Item	FCC Rule	Result
Antenna requirement	15.203/15.247(c)	PASS
Line Conducted Emissions (AC Main)	15.207	PASS
Conducted Peak Output Power	15.247(b)(3)	PASS
Power Spectral Density	15.247(e)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Restricted band	15.247(d)/15.205	PASS
Spurious Emissions	15.247(d)/15.209	PASS

### 1.3. Address of the test laboratory

**Shenzhen CTA Testing Technology Co., Ltd.**

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

### 1.4. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 517856 Designation Number: CN1318**

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**A2LA-Lab Cert. No.: 6534.01**

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

**ISED#: 27890 CAB identifier: CN0127**

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

### 1.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01"Electromagnetic

compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Global Test Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Global Test Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)
Conducted Power	9KHz~18GHz	0.61 dB	(1)
Spurious RF Conducted Emission	9KHz~40GHz	1.22 dB	(1)
Band Edge Compliance of RF Emission	9KHz~40GHz	1.22 dB	(1)
Occupied Bandwidth	9KHz~40GHz	-	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 2. GENERAL INFORMATION

### 2.1. General Remarks

Date of receipt of test sample	:	2024.03.01
Testing commenced on	:	2024.03.01
Testing concluded on	:	2024.03.15

### 2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

### 2.3. General Description of EUT

Name of EUT	Security cameras
Model Number	K9
Power Supply	DC 5V from USB
Frequency Range	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Modulation Type	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Channel separation:	5MHz
Antenna Type	Integral antenna
Antenna Gain	-3.78dBi
Sample ID:	CTA2403159#1

Note: For more details, refer to the user's manual of the EUT.

### 2.4. Operation state

#### ➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	01	-
02	2417	02	-
03	2422	03	2422
04	2427	04	2427
05	2432	05	2432
06	2437	06	2437
07	2442	07	2442
08	2447	08	2447
09	2452	09	2452

10	2457	10	-
11	2462	11	-

➤ **Test mode**

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

## 2.5. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2023/09/19	2024/09/18
LISN	R&S	ESH2-Z5	893606/008	2023/09/19	2024/09/18
EMI Test Receiver	R&S	ESPI3	101841-cd	2023/09/19	2024/09/18
EMI Test Receiver	R&S	ESCI7	101102	2023/09/19	2024/09/18
Spectrum Analyzer	Agilent	N9020A	MY48010425	2023/09/19	2024/09/18
Spectrum Analyzer	R&S	FSV40	100019	2023/09/19	2024/09/18
Vector Signal generator	Agilent	N5181A	MY49060502	2023/09/19	2024/09/18
Signal generator	Agilent	E4421B	3610AO1069	2023/09/19	2024/09/18
Climate Chamber	ESPEC	EL-10KA	A20120523	2023/09/19	2024/09/18
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2023/09/19	2024/09/18
Active Loop Antenna	Beijing Da Ze Technology Co.,Ltd.	ZN30900C	15006	2023/09/19	2024/09/18
Bilog Antenna	Schwarzbeck	VULB9163	000976	2023/09/19	2024/09/18
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2023/09/19	2024/09/18
Amplifier	Schwarzbeck	BBV 9743	#202	2023/09/19	2024/09/18
Amplifier	Schwarzbeck	BBV9179	9719-025	2023/09/19	2024/09/18
Amplifier	EMCI	EMC051845B	980355	2023/09/19	2024/09/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2023/09/19	2024/09/18
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2023/09/19	2024/09/18
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2023/09/19	2024/09/18
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2023/09/19	2024/09/18
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2023/09/19	2024/09/18
Data acquisition card	Agilent	U2531A	TW53323507	2023/09/19	2024/09/18
Power Sensor	Agilent	U2021XA	MY5365004	2023/09/19	2024/09/18
Test Control Unit	Tonscend	JS0806-1	178060067	2023/09/19	2024/09/18
Automated filter bank	Tonscend	JS0806-F	19F8060177	2023/09/19	2024/09/18
Radio Communication	HP	8920A	116250	2023/09/19	2024/09/18

Tester					
EMI Test Software	Tonscend	JS1120-1	Ver 2.6.8.0518	/	/
EMI Test Software	Tonscend	JS1120-3	Ver 2.5.77.0418	/	/
EMI Test Software	Tonscend	JS32-CE	Ver 2.5	/	/
EMI Test Software	Tonscend	JS32-RE	Ver 2.5.1.8	/	/

Note: The Cal.Interval was one year.

## 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for filing to comply with Section 15.247 of the FCC Part 15, Subpart C rules.

## 2.7. Modifications

No modifications were implemented to meet testing criteria.

## 2.8. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba



### **3. TEST CONDITIONS AND RESULTS**

#### **3.1. Antenna requirement**

##### **REQUIREMENT:**

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400–2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

##### **TEST RESULTS**

**Passed**       **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

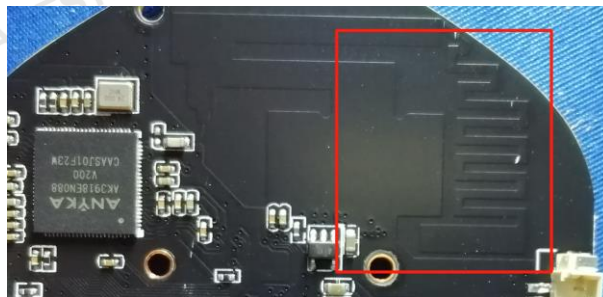

### 3.2. Conducted Emissions (AC Main)


#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### TEST CONFIGURATION

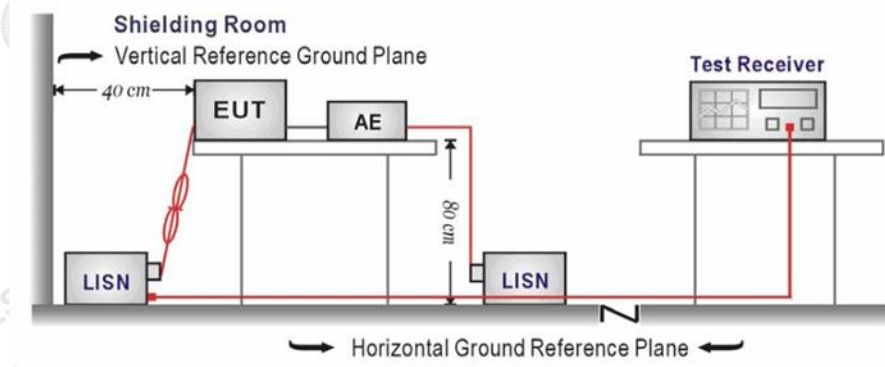

#### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

#### TEST MODE:


Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

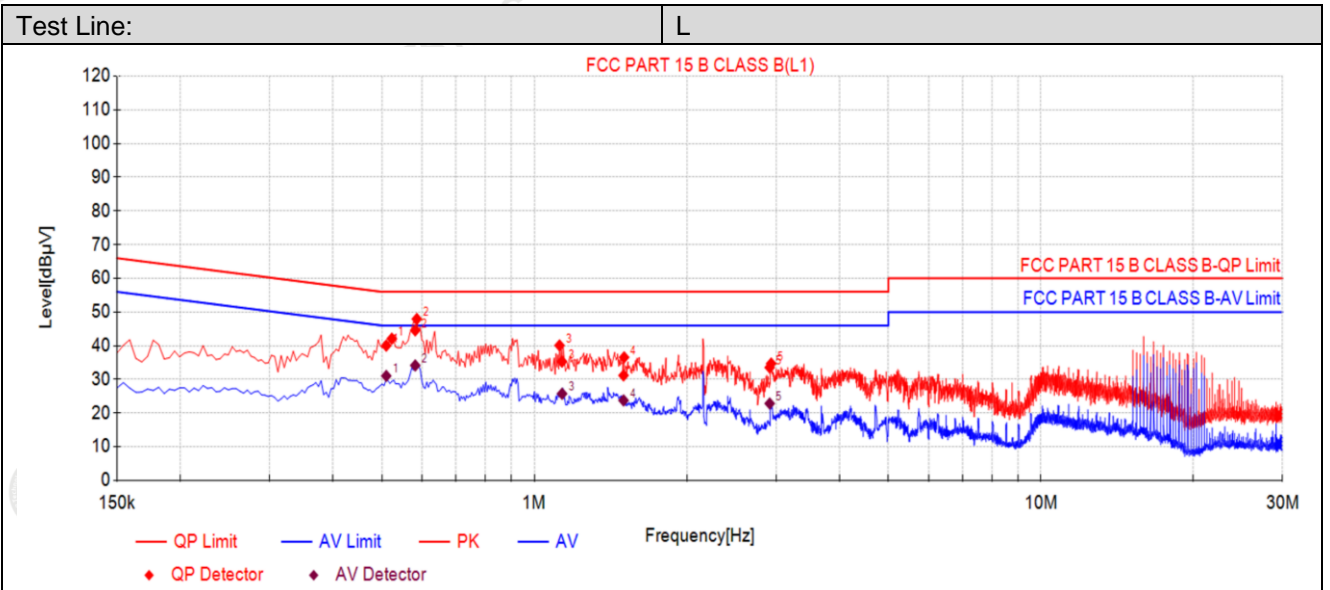

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB µV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.5104	10.50	29.51	40.01	56.00	15.99	20.53	31.03	46.00	14.97	PASS
2	0.5823	10.50	34.06	44.56	56.00	11.44	23.65	34.15	46.00	11.85	PASS
3	1.1348	10.50	24.78	35.28	56.00	20.72	15.26	25.76	46.00	20.24	PASS
4	1.5007	10.50	20.70	31.20	56.00	24.80	13.27	23.77	46.00	22.23	PASS
5	2.9158	10.50	23.04	33.54	56.00	22.46	12.35	22.85	46.00	23.15	PASS

Note:1).QP Value (dBµV)= QP Reading (dBµV)+ Factor (dB)

2). Factor (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). QPMargin(dB) = QP Limit (dBµV) - QP Value (dBµV)

4). AVMargin(dB) = AV Limit (dBµV) - AV Value (dBµV)

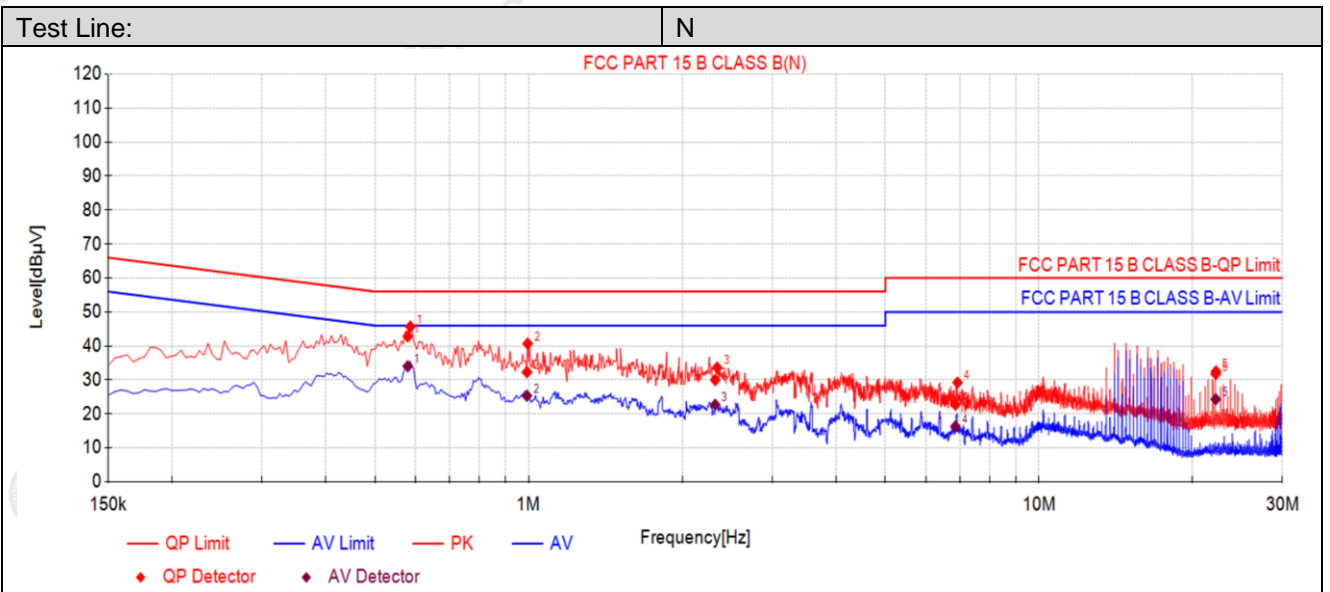

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading[dB µV]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.5799	10.50	32.33	42.83	56.00	13.17	23.52	34.02	46.00	11.98	PASS
2	0.9926	10.50	21.80	32.30	56.00	23.70	14.84	25.34	46.00	20.66	PASS
3	2.3218	10.50	19.47	29.97	56.00	26.03	12.20	22.70	46.00	23.30	PASS
4	6.8619	10.50	12.21	22.71	60.00	37.29	5.81	16.31	50.00	33.69	PASS
5	22.2026	10.50	21.26	31.76	60.00	28.24	13.83	24.33	50.00	25.67	PASS


- Note:1). QP Value (dBµV) = QP Reading (dBµV) + Factor (dB)  
 2). Factor (dB) = insertion loss of LISN (dB) + Cable loss (dB)  
 3). QPMargin(dB) = QP Limit (dBµV) - QP Value (dBµV)  
 4). AVMargin(dB) = AV Limit (dBµV) - AV Value (dBµV)

### 3.3. Conducted Peak Output Power

**LIMIT**

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

**TEST CONFIGURATION**

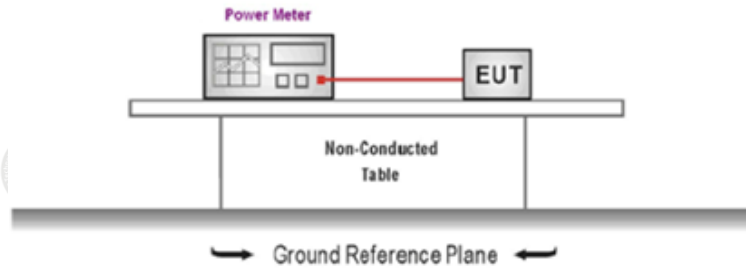

**TEST PROCEDURE**

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

Passed       Not Applicable


Type	Channel	Peak Output power (dBm)	Limit (dBm)	Result
802.11b	01	17.77	≤30.00	Pass
	06	18.30		
	11	18.27		
802.11g	01	15.06	≤30.00	Pass
	06	15.50		
	11	15.72		
802.11n(HT20)	01	14.13	≤30.00	Pass
	06	14.66		
	11	14.96		
802.11n(HT40)	03	13.31	≤30.00	Pass
	06	13.63		
	09	13.85		

### 3.4. Power Spectral Density

#### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):**For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST CONFIGURATION

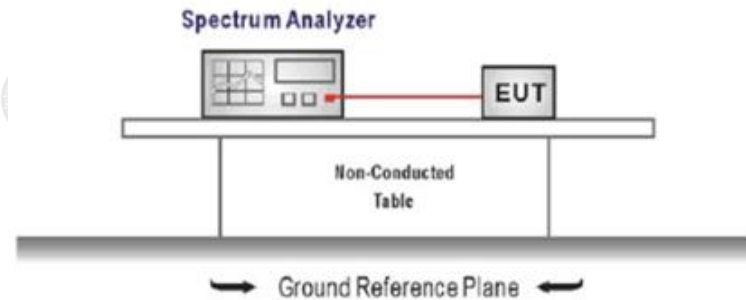

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
Center frequency=DTS channel center frequency  
Span =1.5 times the DTS bandwidth  
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW  
Sweep time = auto couple  
Detector = peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST MODE:




Please refer to the clause 3.3

#### TEST RESULTS




Passed       Not Applicable




Type	Channel	Power Spectral Density (dBm/30KHz)	Limit (dBm/3KHz)	Result
802.11b	01	2.55	≤8.00	Pass
	06	2.47		
	11	1.81		
802.11g	01	-9.01	≤8.00	Pass
	06	-8.44		
	11	-8.39		
802.11n(HT20)	01	-9.90	≤8.00	Pass
	06	-9.34		
	11	-9.21		
802.11n(HT40)	03	-13.79	≤8.00	Pass
	06	-13.65		
	09	-13.64		




Test plot as follows:

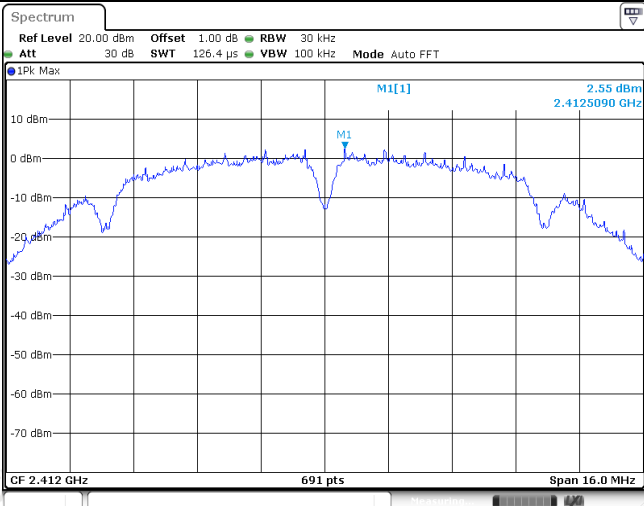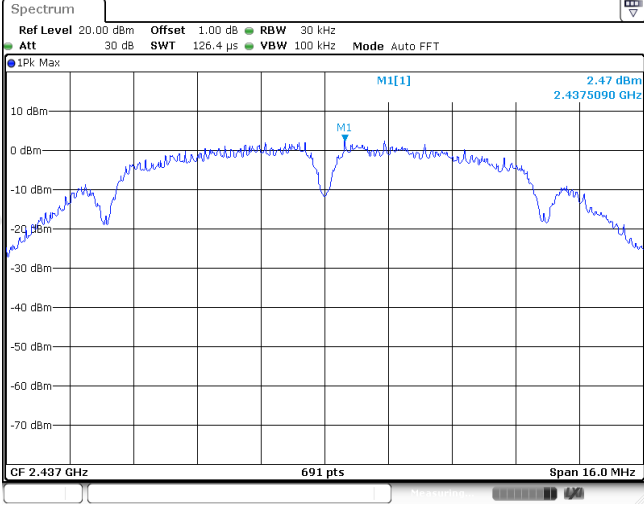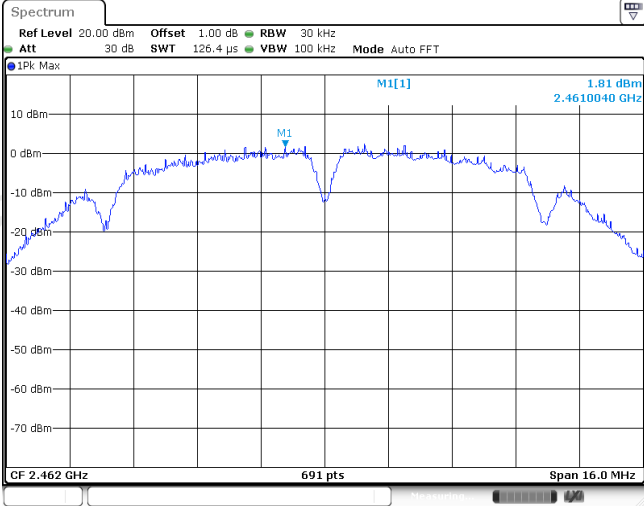Type:		802.11b
CH01		
CH06		
CH11		

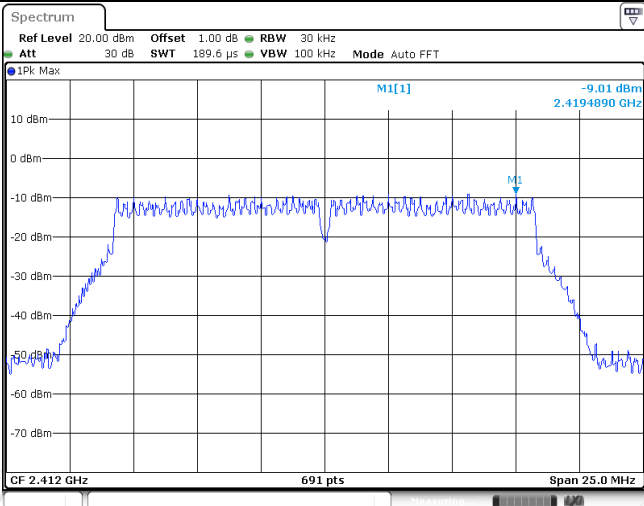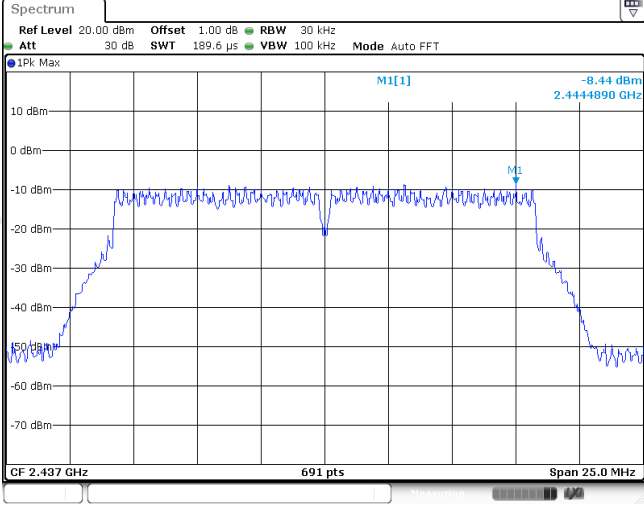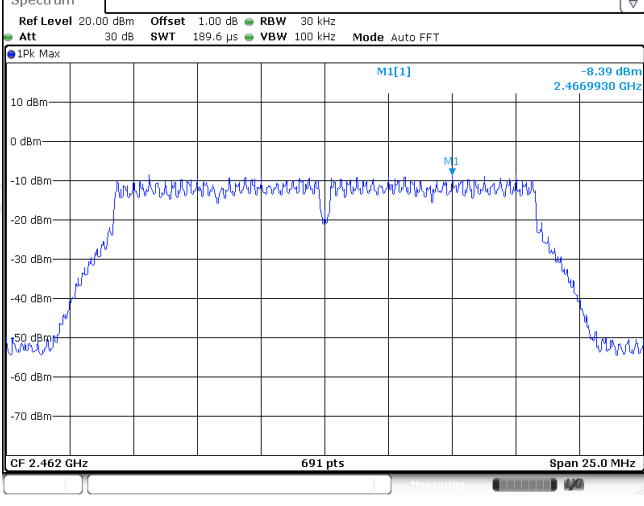

Type:		802.11g
CH01		
CH06		
CH11		

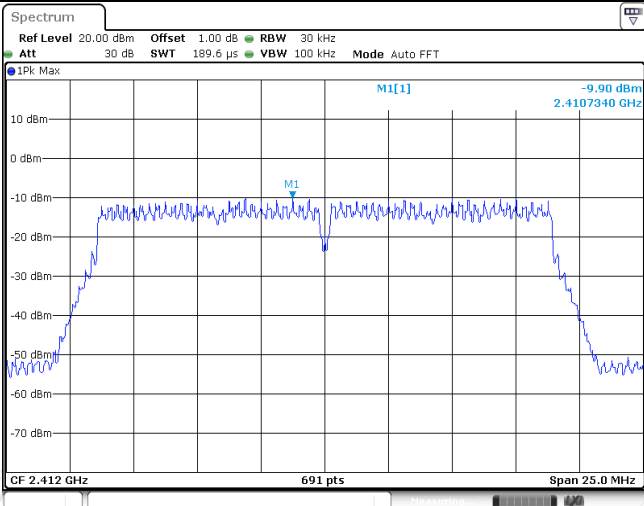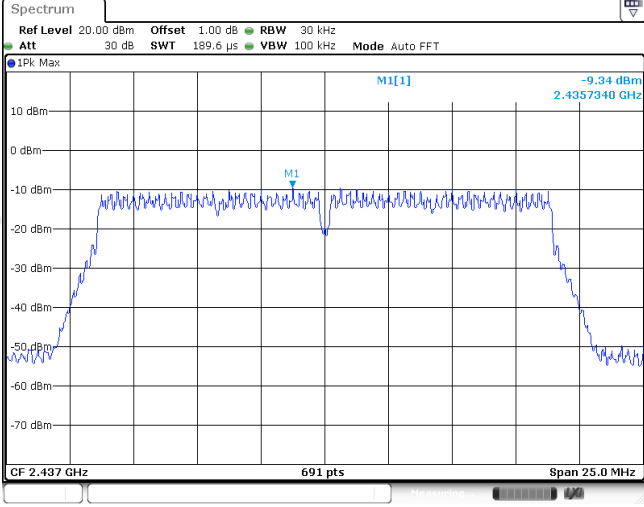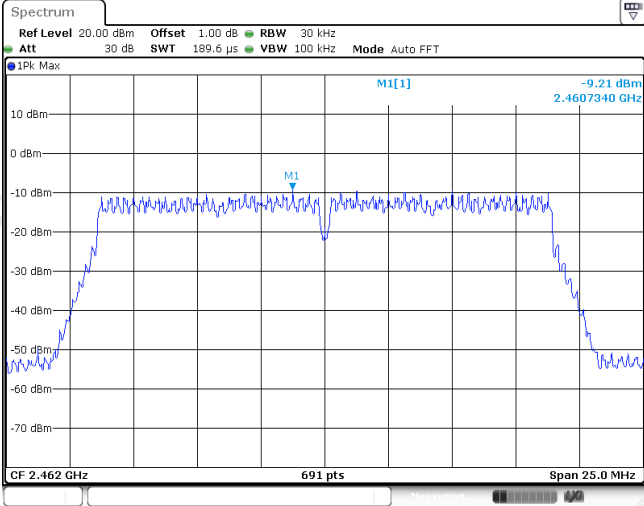Type:		802.11n(HT20)
CH01		
CH06		
CH11		

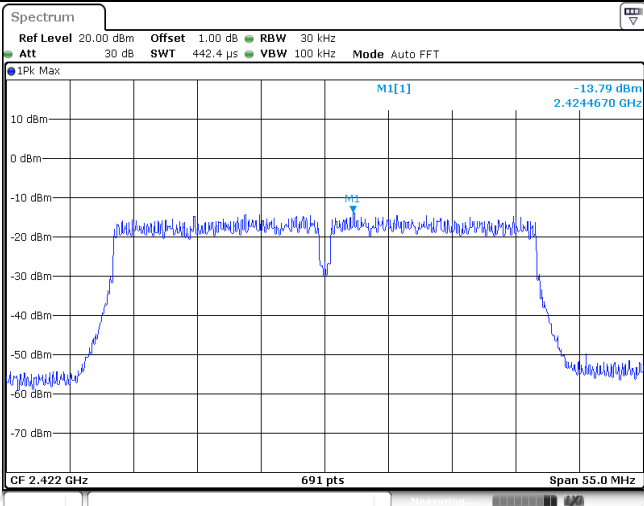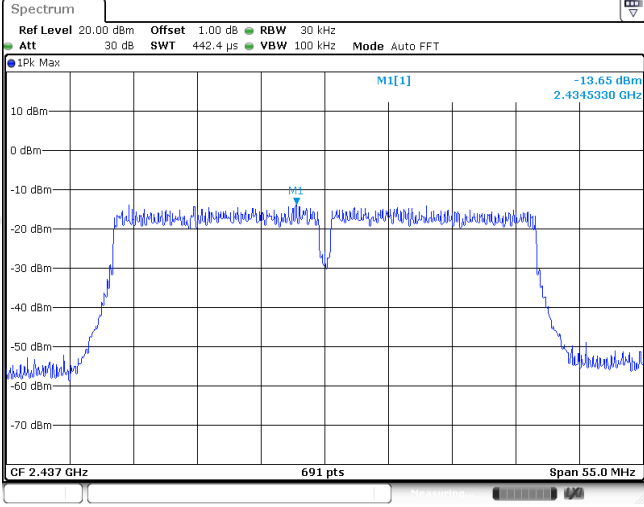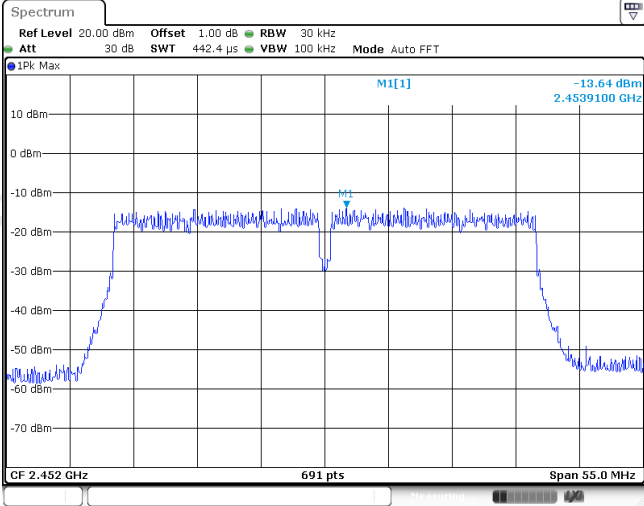Type:		802.11n(HT40)
CH03		
CH06		
CH09		


### 3.5. 6dB bandwidth

#### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):**

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST CONFIGURATION

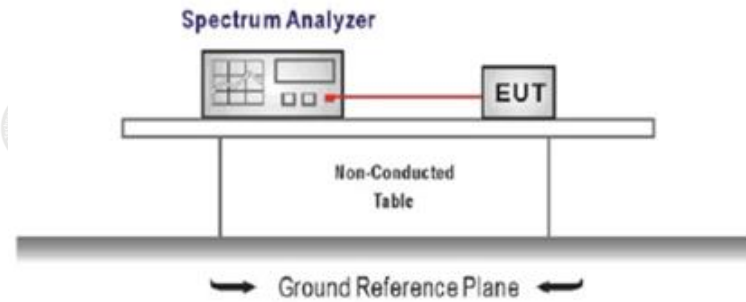

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency = DTS channel center frequency  
Span = 2 x DTS bandwidth  
RBW = 100 kHz, VBW ≥ 3 x RBW  
Sweep time = auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

#### TEST MODE:




Please refer to the clause 3.3




#### TEST RESULTS




Passed       Not Applicable

Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	9.60	≥500	Pass
	06	8.64		
	11	9.60		
802.11g	01	16.44	≥500	Pass
	06	16.41		
	11	16.44		
802.11n(HT20)	01	17.64	≥500	Pass
	06	17.76		
	11	17.64		
802.11n(HT40)	03	36.06	≥500	Pass
	06	36.48		
	09	35.88		




Test plot as follows:

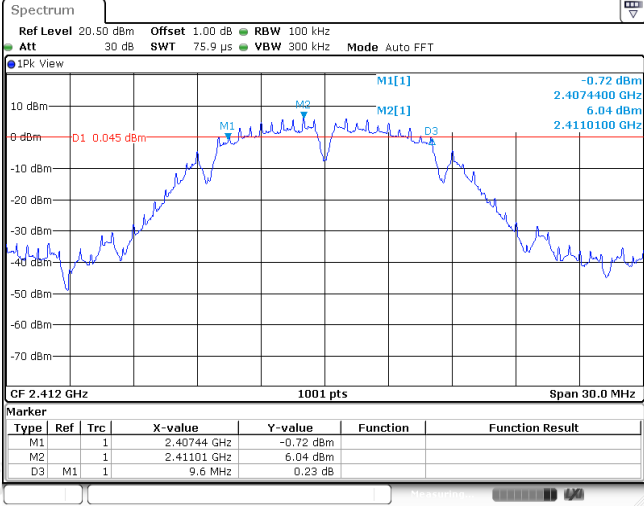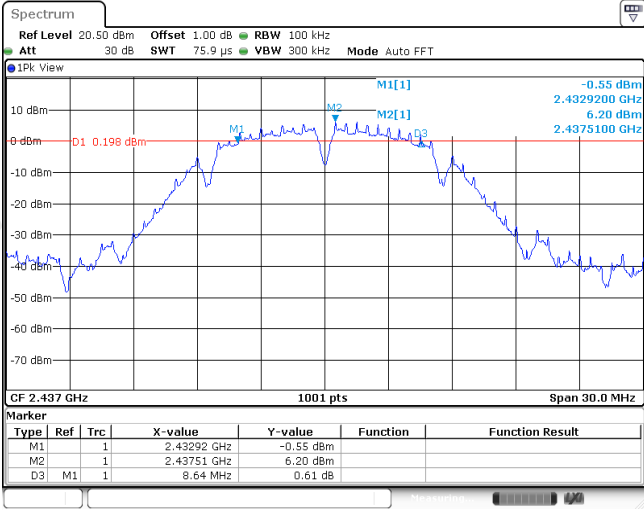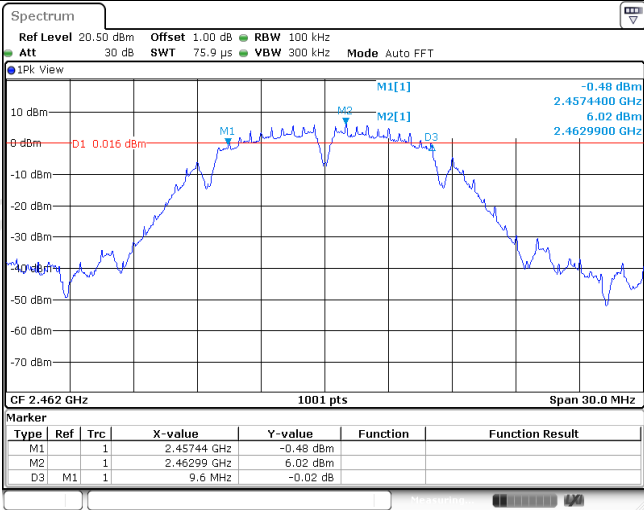Type:	802.11b																												
<p>CH01</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40744 GHz</td> <td>-0.72 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.41101 GHz</td> <td>6.04 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>9.6 MHz</td> <td>0.23 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40744 GHz	-0.72 dBm			M2		1	2.41101 GHz	6.04 dBm			D3	M1	1	9.6 MHz	0.23 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40744 GHz	-0.72 dBm																									
M2		1	2.41101 GHz	6.04 dBm																									
D3	M1	1	9.6 MHz	0.23 dB																									
<p>CH06</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.43292 GHz</td> <td>-0.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.43751 GHz</td> <td>6.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>8.64 MHz</td> <td>0.61 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.43292 GHz	-0.55 dBm			M2		1	2.43751 GHz	6.20 dBm			D3	M1	1	8.64 MHz	0.61 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.43292 GHz	-0.55 dBm																									
M2		1	2.43751 GHz	6.20 dBm																									
D3	M1	1	8.64 MHz	0.61 dB																									
<p>CH11</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.45744 GHz</td> <td>-0.48 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.46299 GHz</td> <td>6.02 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>9.6 MHz</td> <td>-0.02 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.45744 GHz	-0.48 dBm			M2		1	2.46299 GHz	6.02 dBm			D3	M1	1	9.6 MHz	-0.02 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.45744 GHz	-0.48 dBm																									
M2		1	2.46299 GHz	6.02 dBm																									
D3	M1	1	9.6 MHz	-0.02 dB																									

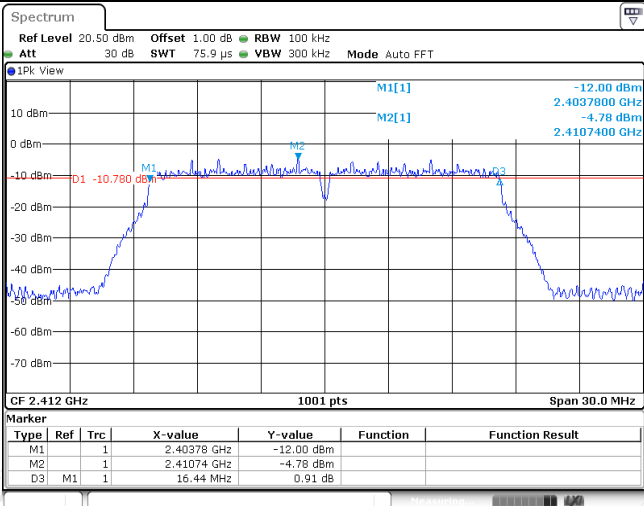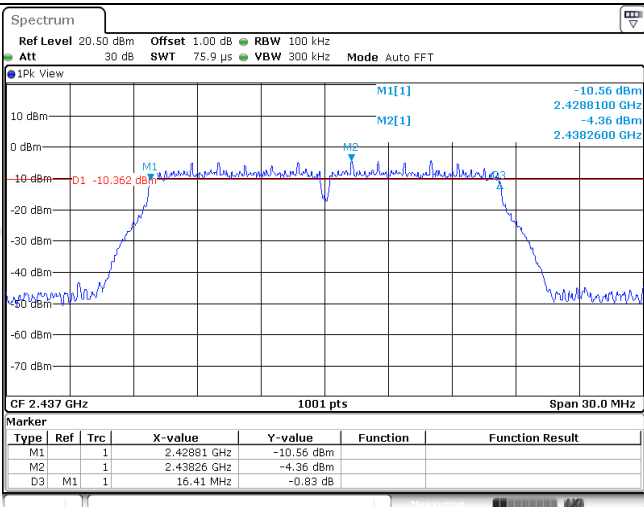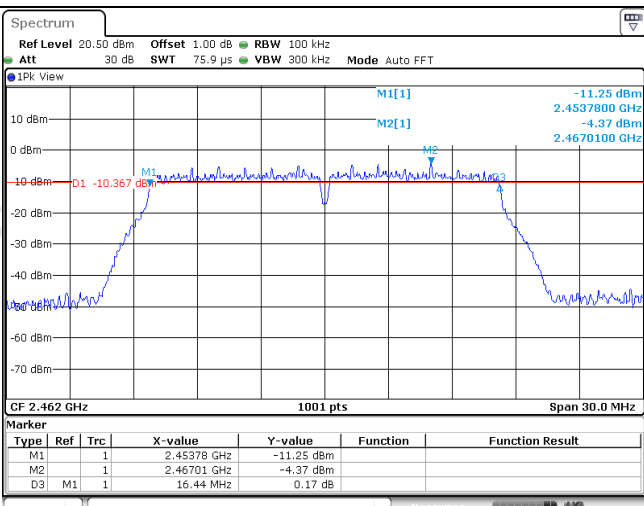Type:	802.11g																												
<p>CH01</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -12.00 dBm 2.4037800 GHz M2[1] -4.78 dBm 2.4107400 GHz</p> <p>D1 -10.780 dBm</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40378 GHz</td> <td>-12.00 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.41074 GHz</td> <td>-4.78 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>16.44 MHz</td> <td>0.91 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40378 GHz	-12.00 dBm			M2		1	2.41074 GHz	-4.78 dBm			D3	M1	1	16.44 MHz	0.91 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40378 GHz	-12.00 dBm																									
M2		1	2.41074 GHz	-4.78 dBm																									
D3	M1	1	16.44 MHz	0.91 dB																									
<p>CH06</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -10.56 dBm 2.4288100 GHz M2[1] -4.36 dBm 2.4382600 GHz</p> <p>D1 -10.362 dBm</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.42881 GHz</td> <td>-10.56 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.43826 GHz</td> <td>-4.36 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>16.41 MHz</td> <td>-0.83 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.42881 GHz	-10.56 dBm			M2		1	2.43826 GHz	-4.36 dBm			D3	M1	1	16.41 MHz	-0.83 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.42881 GHz	-10.56 dBm																									
M2		1	2.43826 GHz	-4.36 dBm																									
D3	M1	1	16.41 MHz	-0.83 dB																									
<p>CH11</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -11.25 dBm 2.4537800 GHz M2[1] -4.37 dBm 2.4670100 GHz</p> <p>D1 -10.367 dBm</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.45378 GHz</td> <td>-11.25 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.46701 GHz</td> <td>-4.37 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>16.44 MHz</td> <td>0.17 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.45378 GHz	-11.25 dBm			M2		1	2.46701 GHz	-4.37 dBm			D3	M1	1	16.44 MHz	0.17 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.45378 GHz	-11.25 dBm																									
M2		1	2.46701 GHz	-4.37 dBm																									
D3	M1	1	16.44 MHz	0.17 dB																									

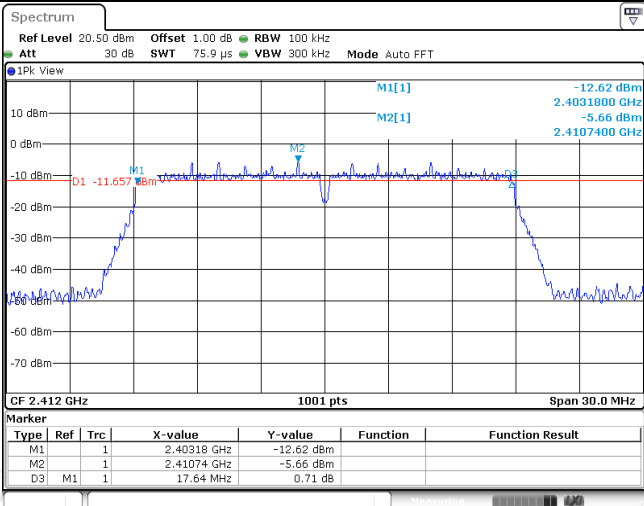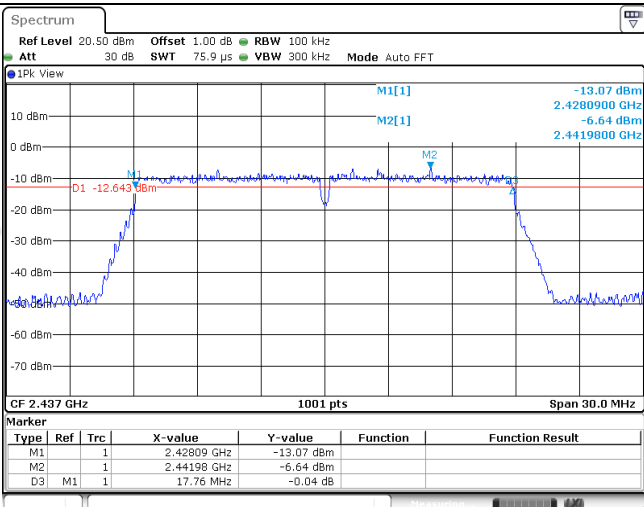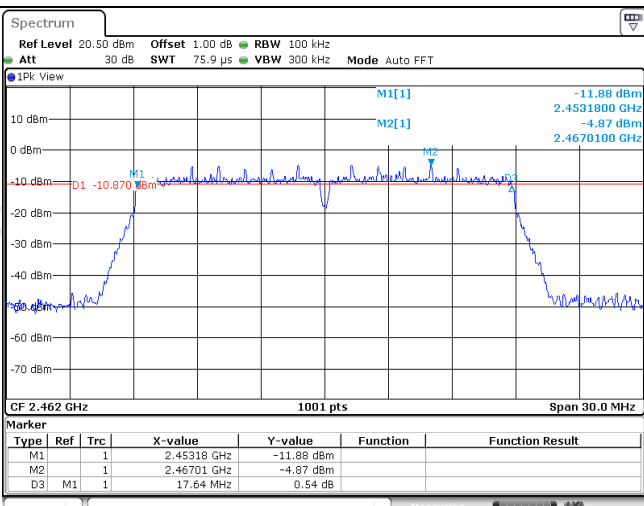Type:	802.11n(HT20)																												
CH01	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -12.62 dBm 2.4031800 GHz M2[1] -5.66 dBm 2.4107400 GHz</p> <p>D1 -11.657 dBm</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40318 GHz</td> <td>-12.62 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.41074 GHz</td> <td>-5.66 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>17.64 MHz</td> <td>0.71 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40318 GHz	-12.62 dBm			M2		1	2.41074 GHz	-5.66 dBm			D3	M1	1	17.64 MHz	0.71 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40318 GHz	-12.62 dBm																									
M2		1	2.41074 GHz	-5.66 dBm																									
D3	M1	1	17.64 MHz	0.71 dB																									
CH06	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -13.07 dBm 2.4280900 GHz M2[1] -6.64 dBm 2.4419800 GHz</p> <p>D1 -12.643 dBm</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.42809 GHz</td> <td>-13.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.44198 GHz</td> <td>-6.64 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>17.76 MHz</td> <td>-0.04 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.42809 GHz	-13.07 dBm			M2		1	2.44198 GHz	-6.64 dBm			D3	M1	1	17.76 MHz	-0.04 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.42809 GHz	-13.07 dBm																									
M2		1	2.44198 GHz	-6.64 dBm																									
D3	M1	1	17.76 MHz	-0.04 dB																									
CH11	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -11.88 dBm 2.4531800 GHz M2[1] -4.87 dBm 2.4670100 GHz</p> <p>D1 -10.870 dBm</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.45318 GHz</td> <td>-11.88 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.46701 GHz</td> <td>-4.87 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>17.64 MHz</td> <td>0.54 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.45318 GHz	-11.88 dBm			M2		1	2.46701 GHz	-4.87 dBm			D3	M1	1	17.64 MHz	0.54 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.45318 GHz	-11.88 dBm																									
M2		1	2.46701 GHz	-4.87 dBm																									
D3	M1	1	17.64 MHz	0.54 dB																									

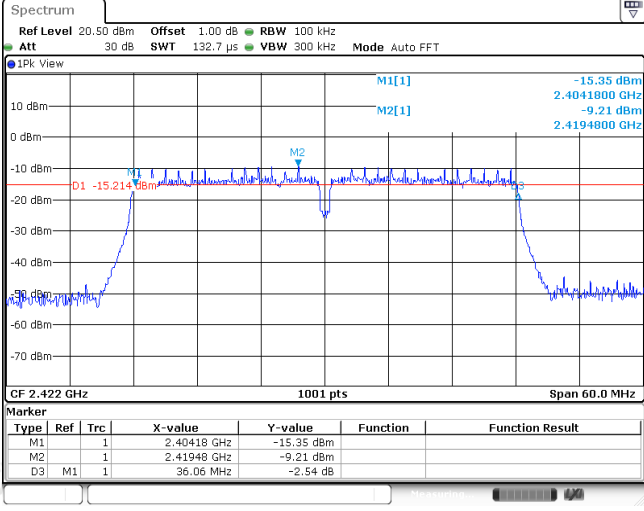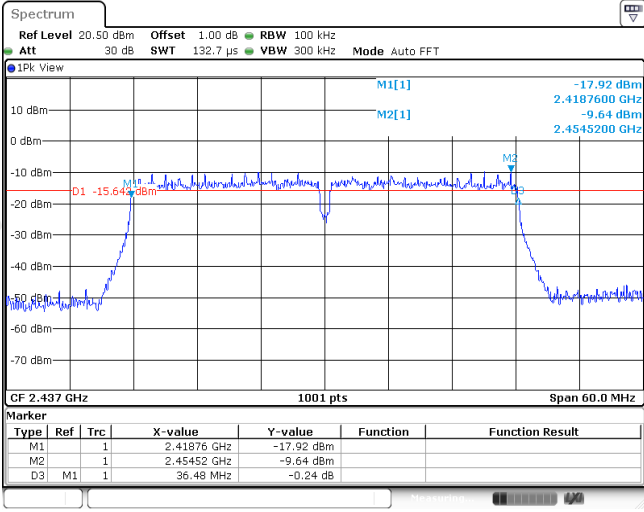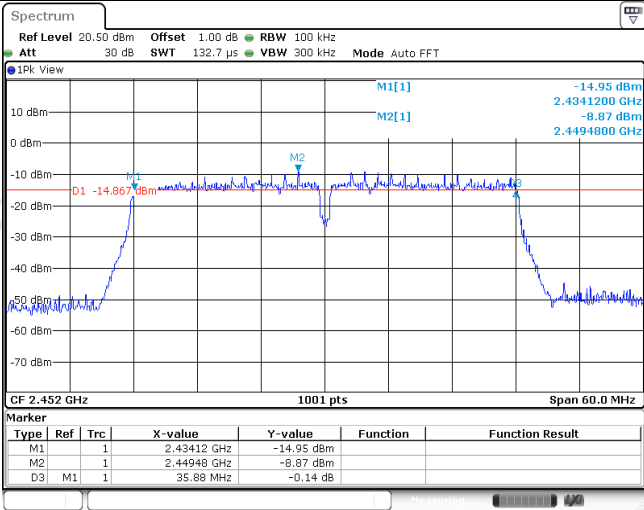

Type:	802.11n(HT40)																												
<p>CH03</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -15.35 dBm 2.4041800 GHz M2[1] -9.21 dBm 2.4194800 GHz</p> <p>D1 -15.214 dBm</p> <p>CF 2.422 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40418 GHz</td> <td>-15.35 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.41948 GHz</td> <td>-9.21 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>36.06 MHz</td> <td>-2.54 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40418 GHz	-15.35 dBm			M2		1	2.41948 GHz	-9.21 dBm			D3	M1	1	36.06 MHz	-2.54 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40418 GHz	-15.35 dBm																									
M2		1	2.41948 GHz	-9.21 dBm																									
D3	M1	1	36.06 MHz	-2.54 dB																									
<p>CH06</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -17.92 dBm 2.4187600 GHz M2[1] -9.64 dBm 2.4545200 GHz</p> <p>D1 -15.642 dBm</p> <p>CF 2.437 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.41876 GHz</td> <td>-17.92 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.45452 GHz</td> <td>-9.64 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>36.48 MHz</td> <td>-0.24 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.41876 GHz	-17.92 dBm			M2		1	2.45452 GHz	-9.64 dBm			D3	M1	1	36.48 MHz	-0.24 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.41876 GHz	-17.92 dBm																									
M2		1	2.45452 GHz	-9.64 dBm																									
D3	M1	1	36.48 MHz	-0.24 dB																									
<p>CH09</p>	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -14.95 dBm 2.4341200 GHz M2[1] -8.87 dBm 2.4494800 GHz</p> <p>D1 -14.867 dBm</p> <p>CF 2.452 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.43412 GHz</td> <td>-14.95 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.44948 GHz</td> <td>-8.87 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.88 MHz</td> <td>-0.14 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.43412 GHz	-14.95 dBm			M2		1	2.44948 GHz	-8.87 dBm			D3	M1	1	35.88 MHz	-0.14 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.43412 GHz	-14.95 dBm																									
M2		1	2.44948 GHz	-8.87 dBm																									
D3	M1	1	35.88 MHz	-0.14 dB																									


### 3.6. Restricted band

#### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

#### TEST CONFIGURATION

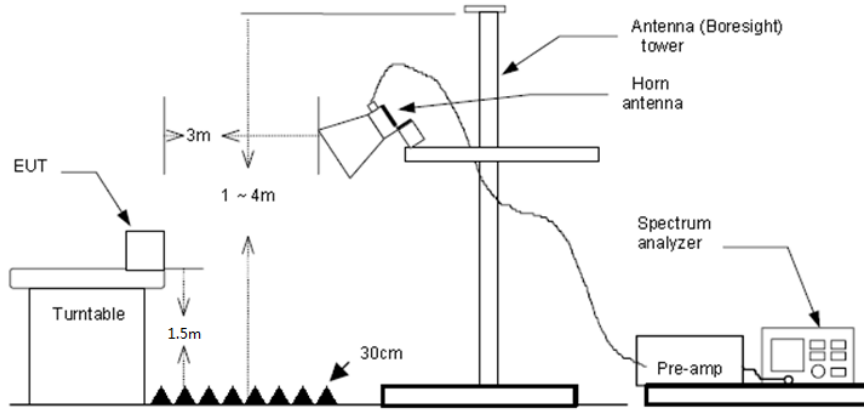

#### TEST PROCEDURE

- 1) The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow:  
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.  
 RBW=1MHz, VBW=3MHz RMS detector for Average value.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	26.96	28.05	6.62	0	61.63	74	-12.37	Vertical	Peak
2390.01	27.73	27.65	6.75	0	62.13	74	-11.87	Vertical	Peak
2310.00	27.94	28.05	6.62	0	62.61	74	-11.39	Horizontal	Peak
2390.01	26.44	27.65	6.75	0	60.84	74	-13.16	Horizontal	Peak
2310.00	12.34	28.05	6.62	0	47.01	54	-6.99	Vertical	Average
2390.01	12.06	27.65	6.75	0	46.46	54	-7.54	Vertical	Average
2310.00	12.33	28.05	6.62	0	47	54	-7	Horizontal	Average
2390.01	12.04	27.65	6.75	0	46.44	54	-7.56	Horizontal	Average

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	27.1	27.26	6.83	0	61.19	74	-12.81	Vertical	Peak
2500.00	26.54	27.2	6.84	0	60.58	74	-13.42	Vertical	Peak
2483.49	27.31	27.26	6.83	0	61.4	74	-12.6	Horizontal	Peak
2500.00	26.92	27.2	6.84	0	60.96	74	-13.04	Horizontal	Peak
2483.49	12	27.26	6.83	0	46.09	54	-7.91	Vertical	Average
2500.00	12	27.2	6.84	0	46.04	54	-7.96	Vertical	Average
2483.49	11.99	27.26	6.83	0	46.08	54	-7.92	Horizontal	Average
2500.00	12	27.2	6.84	0	46.04	54	-7.96	Horizontal	Average

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	26.54	28.05	6.62	0	61.21	74	-12.79	Vertical	Peak
2390.01	27.11	27.65	6.75	0	61.51	74	-12.49	Vertical	Peak
2310.00	26.52	28.05	6.62	0	61.19	74	-12.81	Horizontal	Peak
2390.01	25.96	27.65	6.75	0	60.36	74	-13.64	Horizontal	Peak
2310.00	12.32	28.05	6.62	0	46.99	54	-7.01	Vertical	Average
2390.01	12.98	27.65	6.75	0	47.38	54	-6.62	Vertical	Average
2310.00	12.33	28.05	6.62	0	47	54	-7	Horizontal	Average
2390.01	12.38	27.65	6.75	0	46.78	54	-7.22	Horizontal	Average

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	25.6	27.26	6.83	0	59.69	74	-14.31	Vertical	Peak
2500.00	26.14	27.2	6.84	0	60.18	74	-13.82	Vertical	Peak
2483.49	26.53	27.26	6.83	0	60.62	74	-13.38	Horizontal	Peak
2500.00	26.02	27.2	6.84	0	60.06	74	-13.94	Horizontal	Peak
2483.49	12.17	27.26	6.83	0	46.26	54	-7.74	Vertical	Average
2500.00	12.01	27.2	6.84	0	46.05	54	-7.95	Vertical	Average
2483.49	12.12	27.26	6.83	0	46.21	54	-7.79	Horizontal	Average
2500.00	12	27.2	6.84	0	46.04	54	-7.96	Horizontal	Average

802.11n(HT20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	25.1	28.05	6.62	0	59.77	74	-14.23	Vertical	Peak
2390.01	26.06	27.65	6.75	0	60.46	74	-13.54	Vertical	Peak
2310.00	27.09	28.05	6.62	0	61.76	74	-12.24	Horizontal	Peak
2390.01	26.1	27.65	6.75	0	60.5	74	-13.5	Horizontal	Peak
2310.00	12.32	28.05	6.62	0	46.99	54	-7.01	Vertical	Average
2390.01	13.72	27.65	6.75	0	48.12	54	-5.88	Vertical	Average
2310.00	12.34	28.05	6.62	0	47.01	54	-6.99	Horizontal	Average
2390.01	12.56	27.65	6.75	0	46.96	54	-7.04	Horizontal	Average

802.11n(HT20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	25.52	27.26	6.83	0	59.61	74	-14.39	Vertical	Peak
2500.00	26.29	27.2	6.84	0	60.33	74	-13.67	Vertical	Peak
2483.49	25.77	27.26	6.83	0	59.86	74	-14.14	Horizontal	Peak
2500.00	24.79	27.2	6.84	0	58.83	74	-15.17	Horizontal	Peak
2483.49	12.21	27.26	6.83	0	46.3	54	-7.7	Vertical	Average
2500.00	12.03	27.2	6.84	0	46.07	54	-7.93	Vertical	Average
2483.49	12.37	27.26	6.83	0	46.46	54	-7.54	Horizontal	Average
2500.00	11.99	27.2	6.84	0	46.03	54	-7.97	Horizontal	Average

802.11n(HT40)					CH03				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	27.15	28.05	6.62	0	61.82	74	-12.18	Vertical	Peak
2389.99	26.57	27.65	6.75	0	60.97	74	-13.03	Vertical	Peak
2310.00	25.34	28.05	6.62	0	60.01	74	-13.99	Horizontal	Peak
2389.99	26.92	27.65	6.75	0	61.32	74	-12.68	Horizontal	Peak
2310.00	12.33	28.05	6.62	0	47	54	-7	Vertical	Average
2389.99	15.81	27.65	6.75	0	50.21	54	-3.79	Vertical	Average
2310.00	12.33	28.05	6.62	0	47	54	-7	Horizontal	Average
2389.99	13.82	27.65	6.75	0	48.22	54	-5.78	Horizontal	Average

802.11n(HT40)					CH09				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	26.31	27.26	6.83	0	60.4	74	-13.6	Vertical	Peak
2500.00	27.12	27.2	6.84	0	61.16	74	-12.84	Vertical	Peak
2483.50	26.1	27.26	6.83	0	60.19	74	-13.81	Horizontal	Peak
2500.00	26.67	27.2	6.84	0	60.71	74	-13.29	Horizontal	Peak
2483.50	13.47	27.26	6.83	0	47.56	54	-6.44	Vertical	Average
2500.00	12.16	27.2	6.84	0	46.2	54	-7.8	Vertical	Average
2483.50	13.28	27.26	6.83	0	47.37	54	-6.63	Horizontal	Average
2500.00	12.22	27.2	6.84	0	46.26	54	-7.74	Horizontal	Average


### 3.7. Band edge and Spurious Emissions (conducted)

#### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### TEST CONFIGURATION

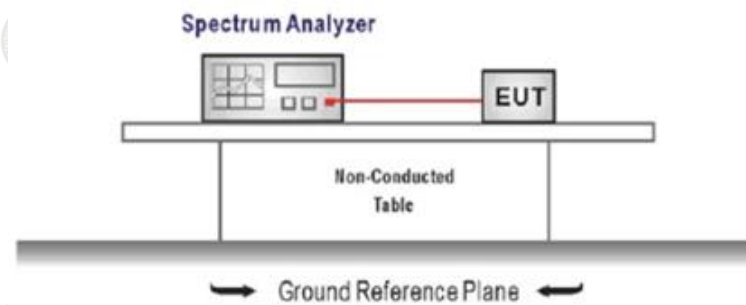

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
Center frequency=DTS channel center frequency  
The span = 1.5 times the DTS bandwidth.  
RBW = 100 kHz, VBW ≥ 3 x RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum PSD level

Note: the channel found to contain the maximum PSD level can be used to establish the reference level.



3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW ≥ 3 x RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

#### TEST MODE:



Please refer to the clause 3.3



#### TEST RESULTS



Passed  Not Applicable



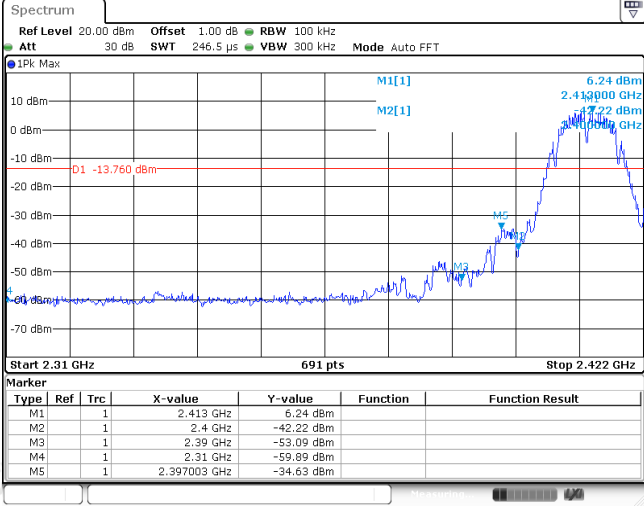
Test Item:	Bandedge	Type:	802.11b																																										
<p>CH01</p>	 <p><b>Spectrum</b>            Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz            Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT            1Pk Max</p> <p>Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.413 GHz</td> <td>6.24 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-42.22 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-53.09 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.89 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.397003 GHz</td> <td>-34.63 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.413 GHz	6.24 dBm			M2	1		2.4 GHz	-42.22 dBm			M3	1		2.39 GHz	-53.09 dBm			M4	1		2.31 GHz	-59.89 dBm			M5	1		2.397003 GHz	-34.63 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.413 GHz	6.24 dBm																																									
M2	1		2.4 GHz	-42.22 dBm																																									
M3	1		2.39 GHz	-53.09 dBm																																									
M4	1		2.31 GHz	-59.89 dBm																																									
M5	1		2.397003 GHz	-34.63 dBm																																									
<p>CH11</p>	 <p><b>Spectrum</b>            Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz            Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT            1Pk Max</p> <p>Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.46301 GHz</td> <td>6.40 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-47.81 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-54.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4860174 GHz</td> <td>-46.46 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.46301 GHz	6.40 dBm			M2	1		2.4835 GHz	-47.81 dBm			M3	1		2.5 GHz	-54.91 dBm			M4	1		2.4860174 GHz	-46.46 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.46301 GHz	6.40 dBm																																									
M2	1		2.4835 GHz	-47.81 dBm																																									
M3	1		2.5 GHz	-54.91 dBm																																									
M4	1		2.4860174 GHz	-46.46 dBm																																									

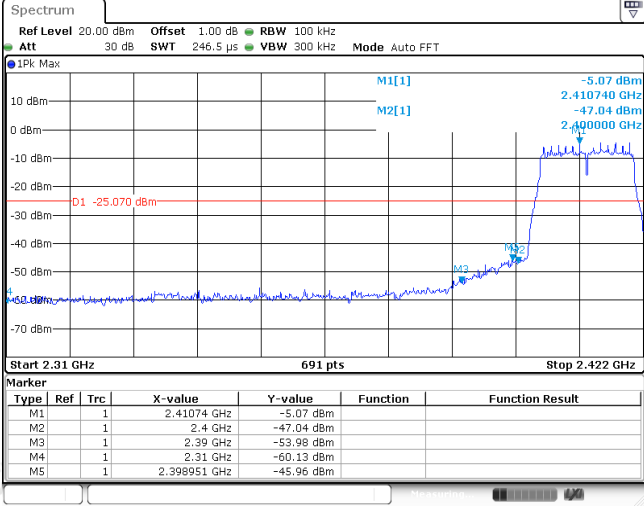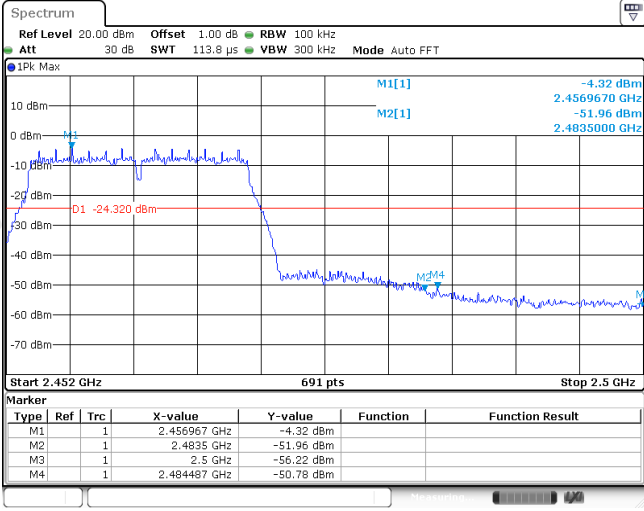


Test Item:	Bandedge	Type:	802.11g																																										
<p>CH01</p>	 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT</p> <p>Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41074 GHz</td> <td>-5.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-47.04 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-53.98 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-60.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.398951 GHz</td> <td>-45.96 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41074 GHz	-5.07 dBm			M2	1		2.4 GHz	-47.04 dBm			M3	1		2.39 GHz	-53.98 dBm			M4	1		2.31 GHz	-60.13 dBm			M5	1		2.398951 GHz	-45.96 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41074 GHz	-5.07 dBm																																									
M2	1		2.4 GHz	-47.04 dBm																																									
M3	1		2.39 GHz	-53.98 dBm																																									
M4	1		2.31 GHz	-60.13 dBm																																									
M5	1		2.398951 GHz	-45.96 dBm																																									
<p>CH11</p>	 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT</p> <p>Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.456967 GHz</td> <td>-4.32 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-51.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-56.22 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.484487 GHz</td> <td>-50.78 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.456967 GHz	-4.32 dBm			M2	1		2.4835 GHz	-51.96 dBm			M3	1		2.5 GHz	-56.22 dBm			M4	1		2.484487 GHz	-50.78 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.456967 GHz	-4.32 dBm																																									
M2	1		2.4835 GHz	-51.96 dBm																																									
M3	1		2.5 GHz	-56.22 dBm																																									
M4	1		2.484487 GHz	-50.78 dBm																																									

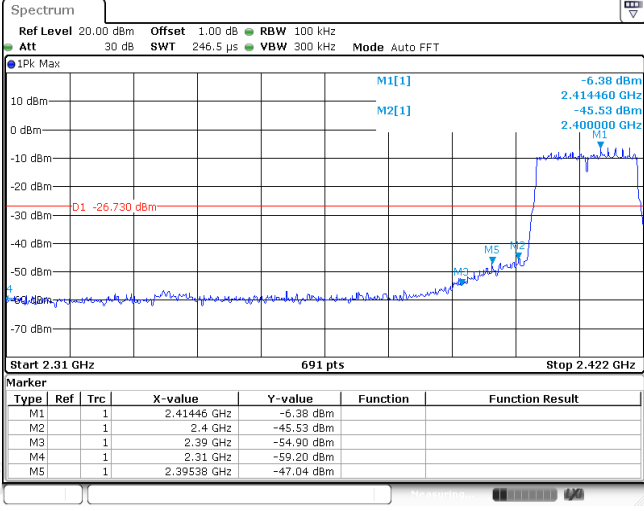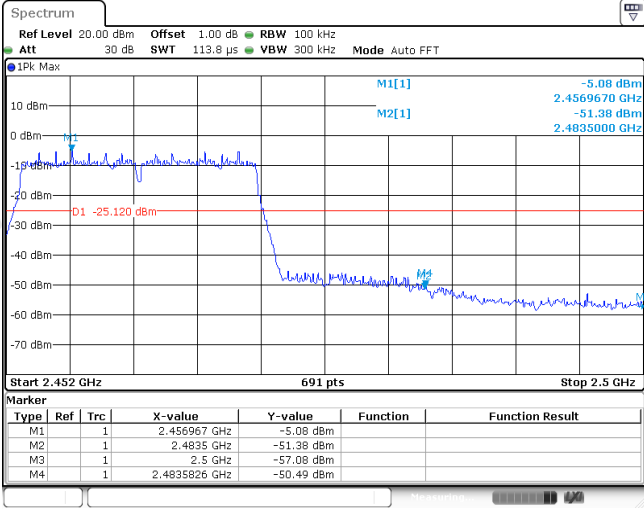Test Item:	Bandedge	Type:	802.11n(HT20)																																										
<p>CH01</p>	 <p><b>Marker Table for CH01:</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41446 GHz</td> <td>-6.38 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-45.53 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-54.90 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.39538 GHz</td> <td>-47.04 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41446 GHz	-6.38 dBm			M2	1		2.4 GHz	-45.53 dBm			M3	1		2.39 GHz	-54.90 dBm			M4	1		2.31 GHz	-59.20 dBm			M5	1		2.39538 GHz	-47.04 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41446 GHz	-6.38 dBm																																									
M2	1		2.4 GHz	-45.53 dBm																																									
M3	1		2.39 GHz	-54.90 dBm																																									
M4	1		2.31 GHz	-59.20 dBm																																									
M5	1		2.39538 GHz	-47.04 dBm																																									
<p>CH11</p>	 <p><b>Marker Table for CH11:</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.456967 GHz</td> <td>-5.08 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-51.38 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-57.08 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4835826 GHz</td> <td>-50.49 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.456967 GHz	-5.08 dBm			M2	1		2.4835 GHz	-51.38 dBm			M3	1		2.5 GHz	-57.08 dBm			M4	1		2.4835826 GHz	-50.49 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.456967 GHz	-5.08 dBm																																									
M2	1		2.4835 GHz	-51.38 dBm																																									
M3	1		2.5 GHz	-57.08 dBm																																									
M4	1		2.4835826 GHz	-50.49 dBm																																									

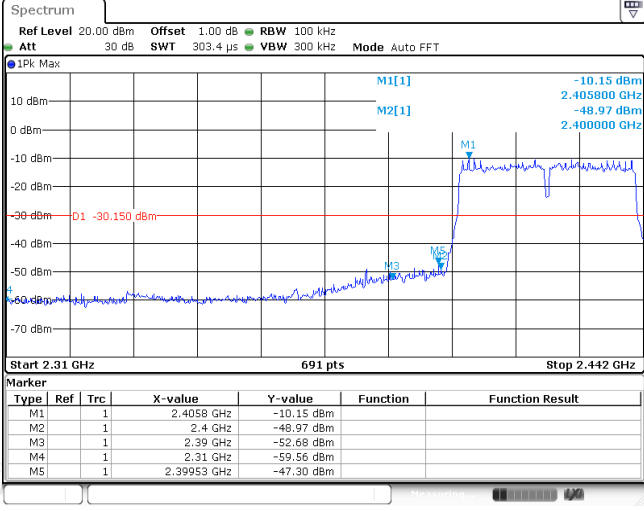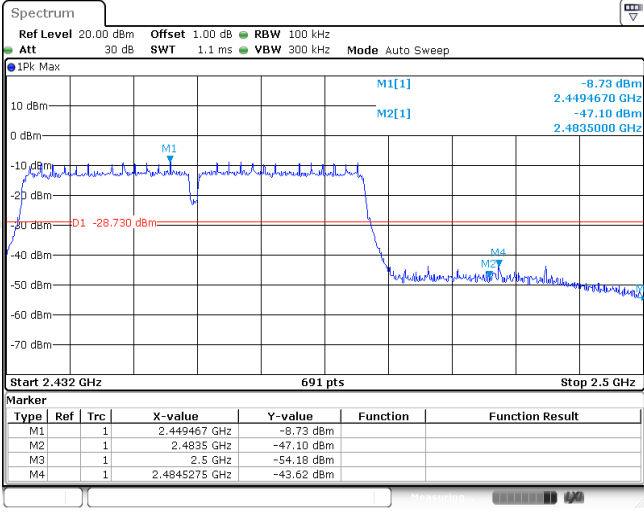
Test Item:	Bandedge	Type:	802.11n(HT40)																																										
<p>CH03</p>	 <p><b>Marker Table for CH03:</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.4058 GHz</td> <td>-10.15 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-48.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-52.68 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.56 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.39953 GHz</td> <td>-47.30 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.4058 GHz	-10.15 dBm			M2	1		2.4 GHz	-48.97 dBm			M3	1		2.39 GHz	-52.68 dBm			M4	1		2.31 GHz	-59.56 dBm			M5	1		2.39953 GHz	-47.30 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.4058 GHz	-10.15 dBm																																									
M2	1		2.4 GHz	-48.97 dBm																																									
M3	1		2.39 GHz	-52.68 dBm																																									
M4	1		2.31 GHz	-59.56 dBm																																									
M5	1		2.39953 GHz	-47.30 dBm																																									
<p>CH09</p>	 <p><b>Marker Table for CH09:</b></p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.449467 GHz</td> <td>-8.73 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-47.10 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-54.18 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4845275 GHz</td> <td>-43.62 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.449467 GHz	-8.73 dBm			M2	1		2.4835 GHz	-47.10 dBm			M3	1		2.5 GHz	-54.18 dBm			M4	1		2.4845275 GHz	-43.62 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.449467 GHz	-8.73 dBm																																									
M2	1		2.4835 GHz	-47.10 dBm																																									
M3	1		2.5 GHz	-54.18 dBm																																									
M4	1		2.4845275 GHz	-43.62 dBm																																									

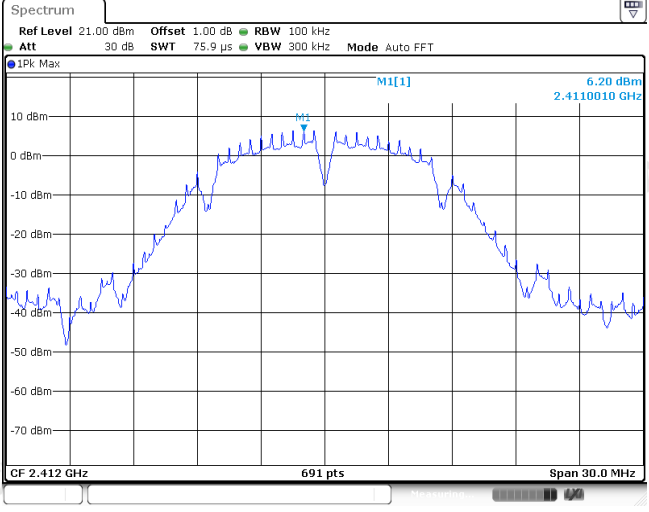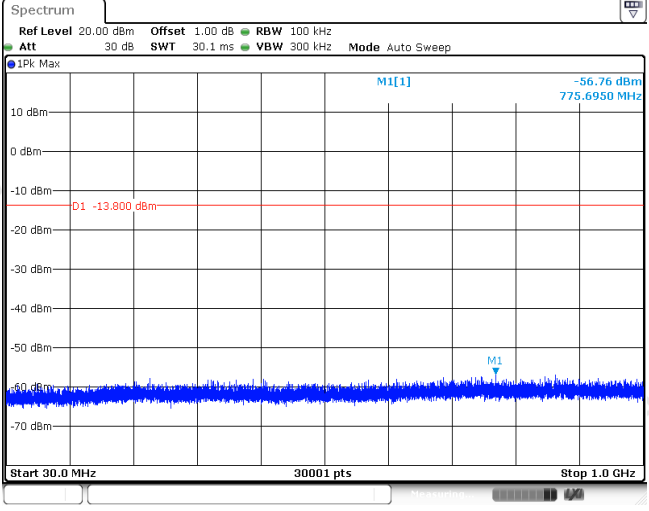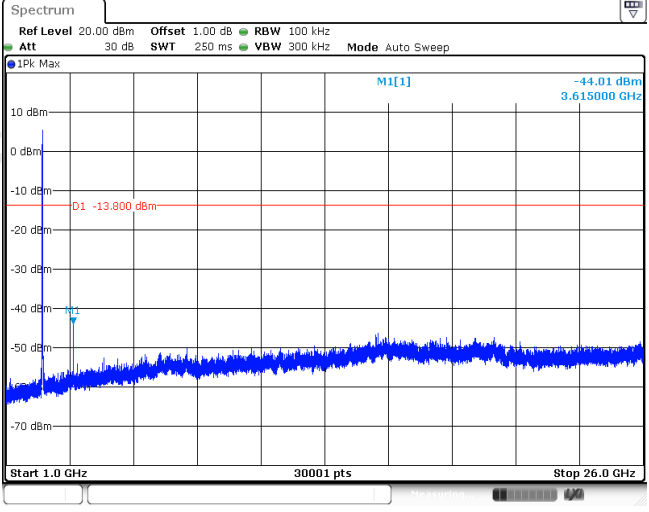Test Item:	SE	Type:	802.11b
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			


CH06  
Reference level

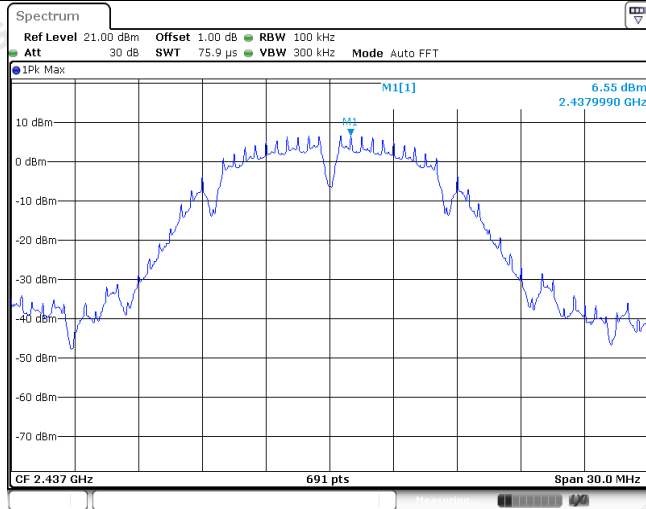


CH06  
30MHz~1000MHz

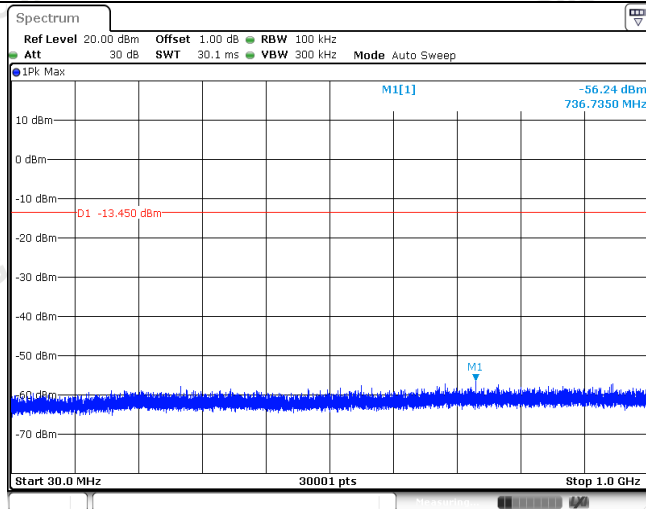


CH06  
1GHz~26GHz

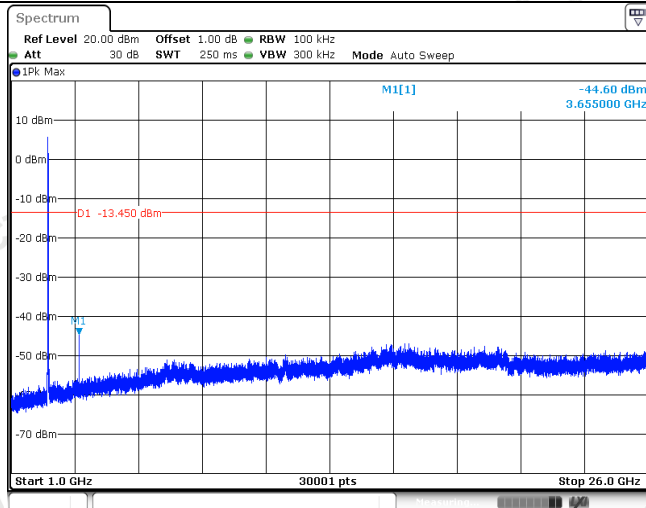


CH11  
Reference level



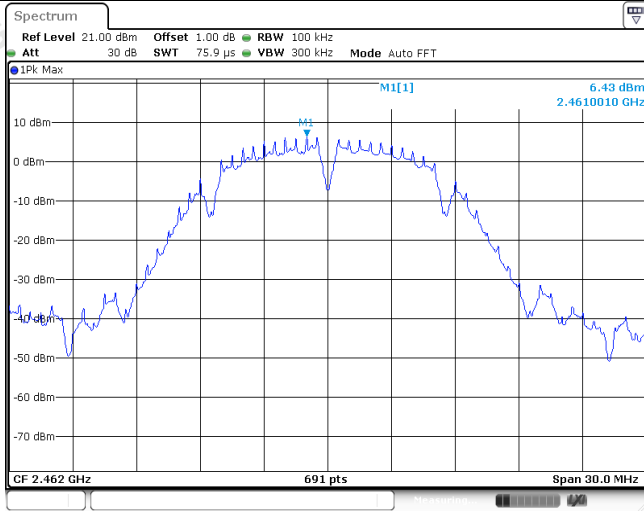


CH11  
30MHz~1000MHz

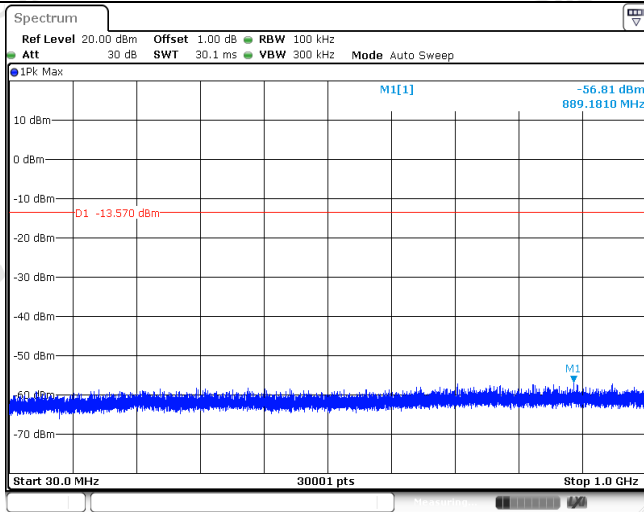


CH11  
1GHz~26GHz

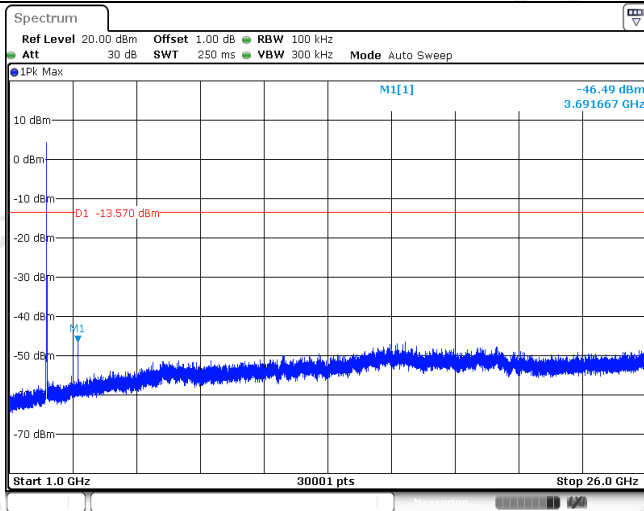


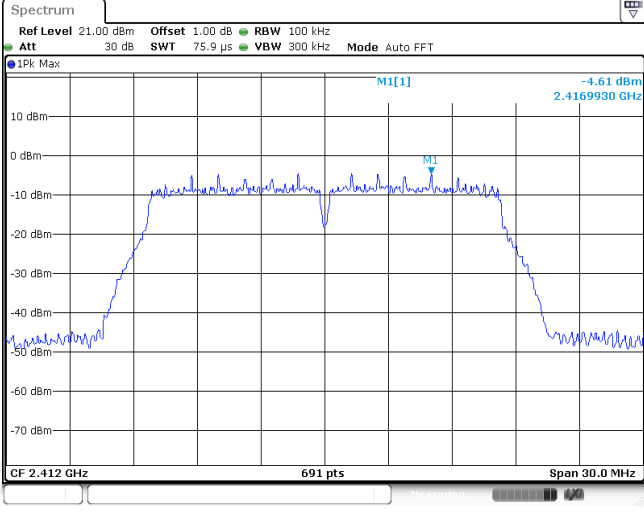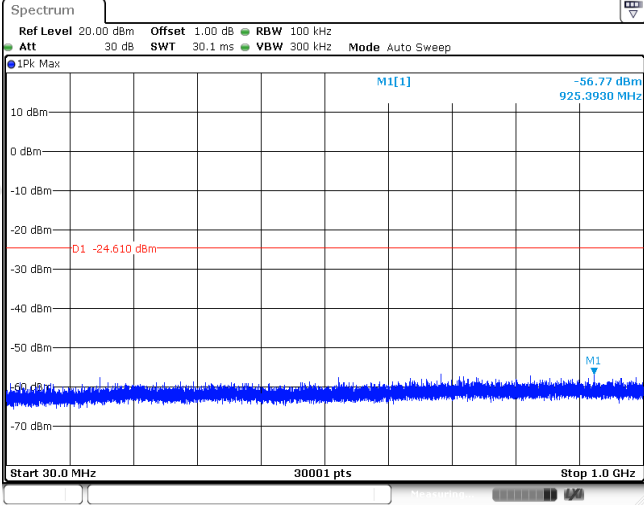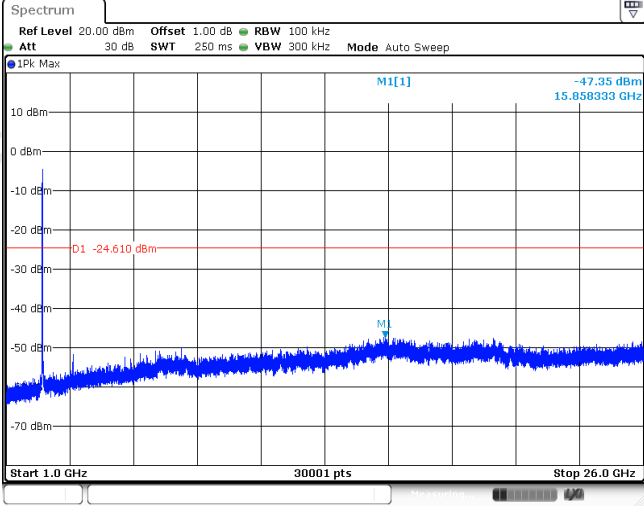Test Item:	SE	Type:	802.11g
CH01 Reference level	 <p>Spectrum</p> <p>Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz</p> <p>Att 30 dB SWT 75.9 <math>\mu</math>s VBW 300 kHz Mode Auto FFT</p> <p>1Pk Max</p> <p>M1[1] -4.61 dBm 2.4169930 GHz</p> <p>CF 2.412 GHz 691 pts Span 30.0 MHz</p>		
CH01 30MHz~1000MHz	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz</p> <p>Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep</p> <p>1Pk Max</p> <p>M1[1] -56.77 dBm 925.3930 MHz</p> <p>D1 -24.610 dBm</p> <p>Start 30.0 MHz 30001 pts Stop 1.0 GHz</p>		
CH01 1GHz~26GHz	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz</p> <p>Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep</p> <p>1Pk Max</p> <p>M1[1] -47.35 dBm 15.858333 GHz</p> <p>D1 -24.610 dBm</p> <p>Start 1.0 GHz 30001 pts Stop 26.0 GHz</p>		


CH06  
Reference level

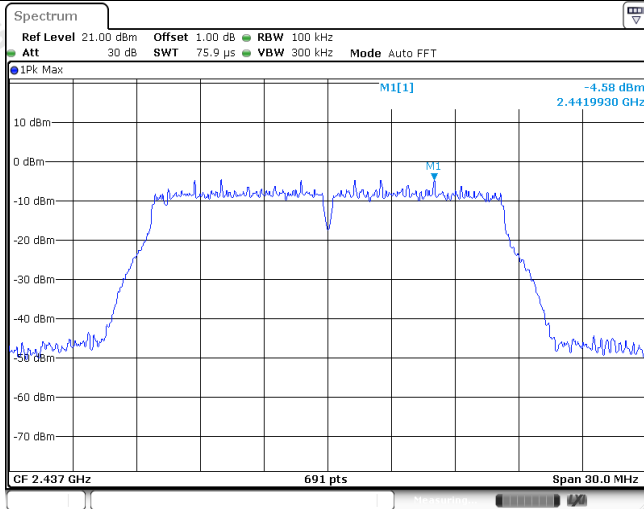

CH06  
30MHz~1000MHz

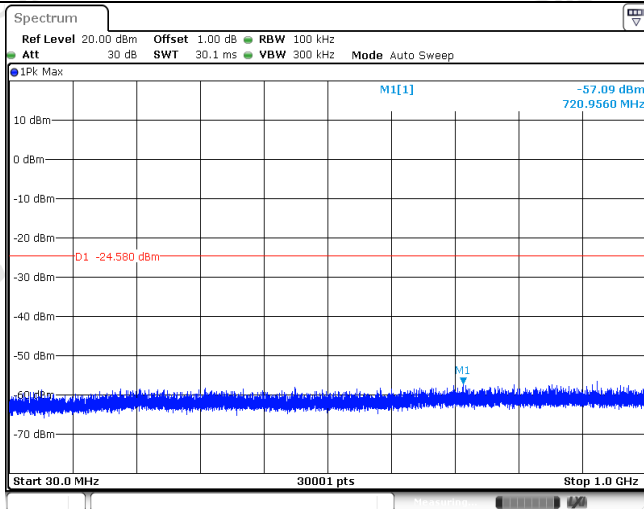


CH06  
1GHz~26GHz

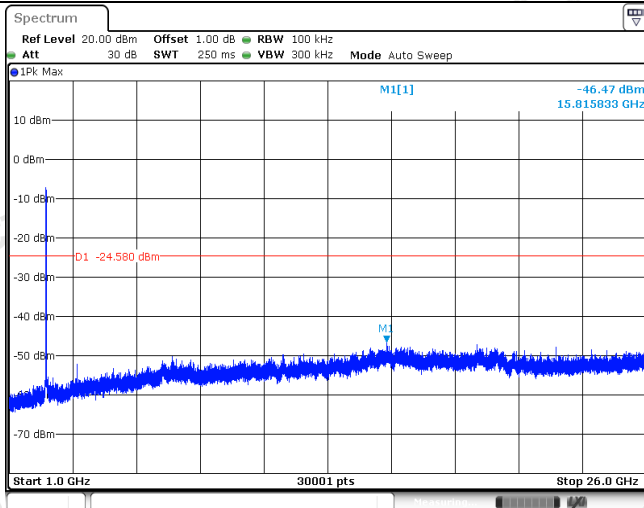





CH11  
Reference level

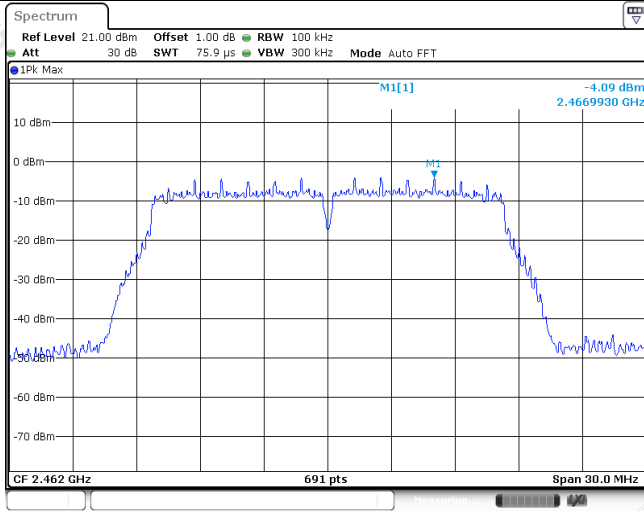

CH11  
30MHz~1000MHz

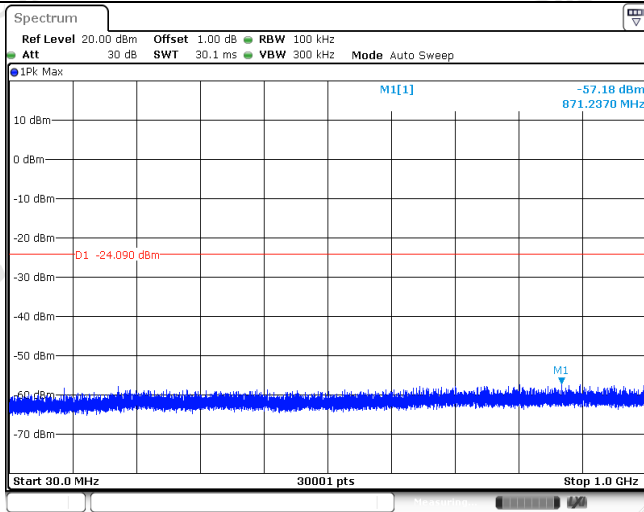


CH11  
1GHz~26GHz

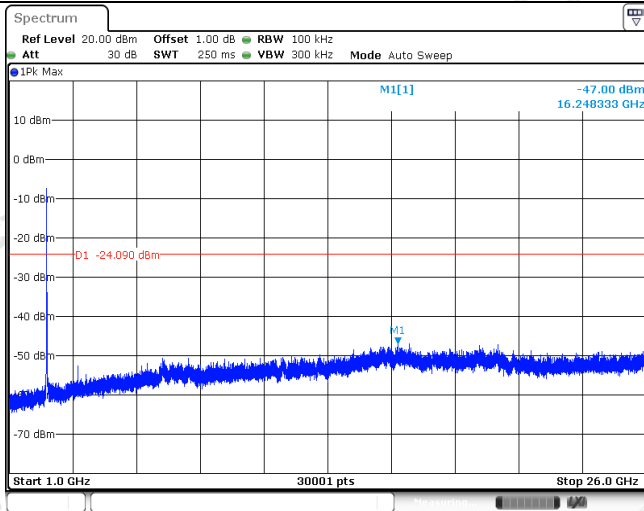


Test Item:	SE	Type:	802.11n(HT20)
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			


CH06  
Reference level

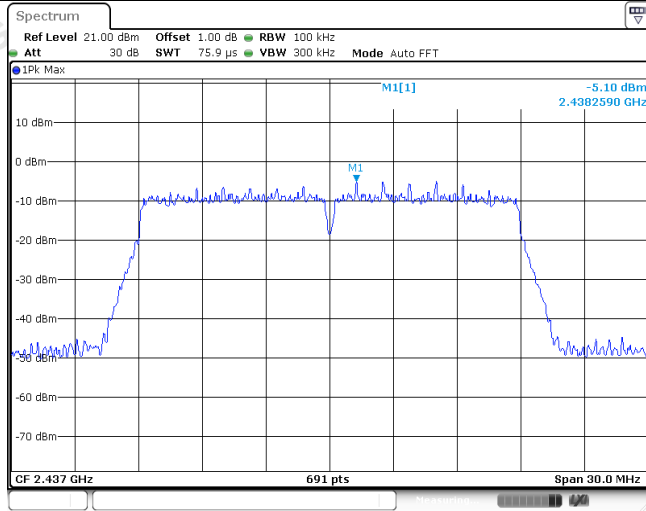


CH06  
30MHz~1000MHz

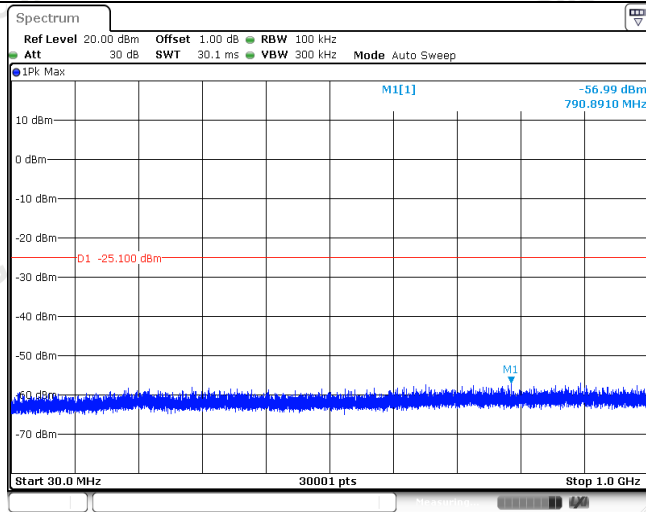


CH06  
1GHz~26GHz

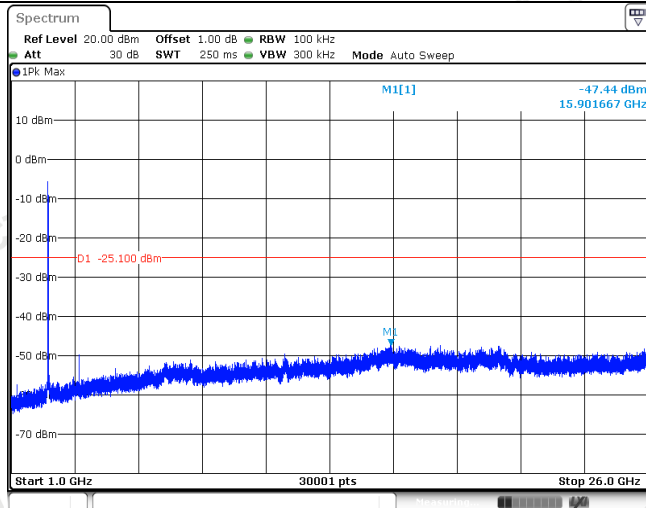


CH11  
Reference level

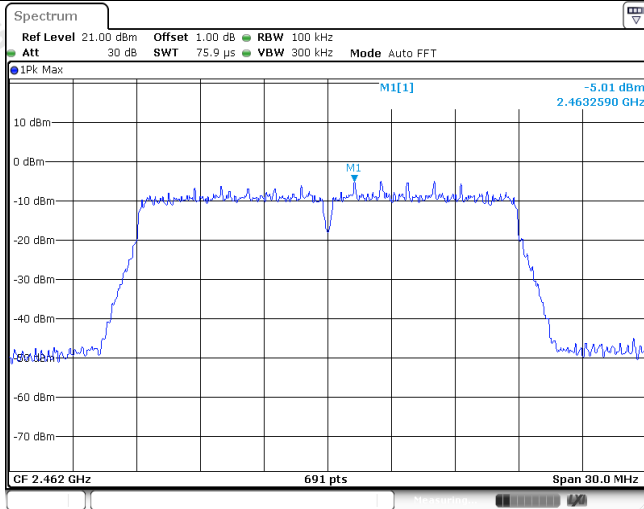

CH11  
30MHz~1000MHz

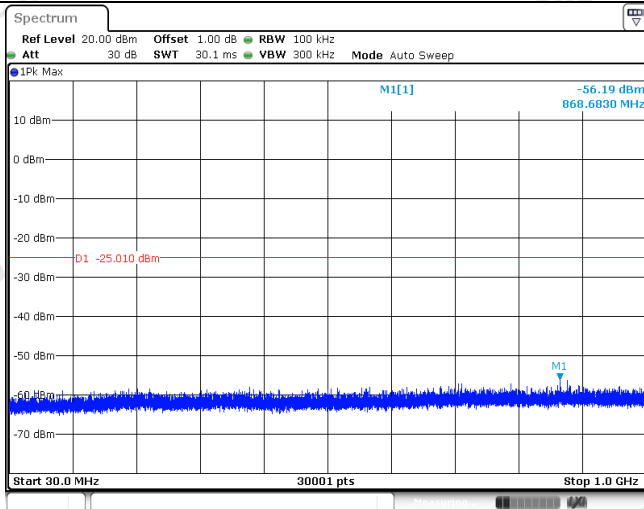


CH11  
1GHz~26GHz

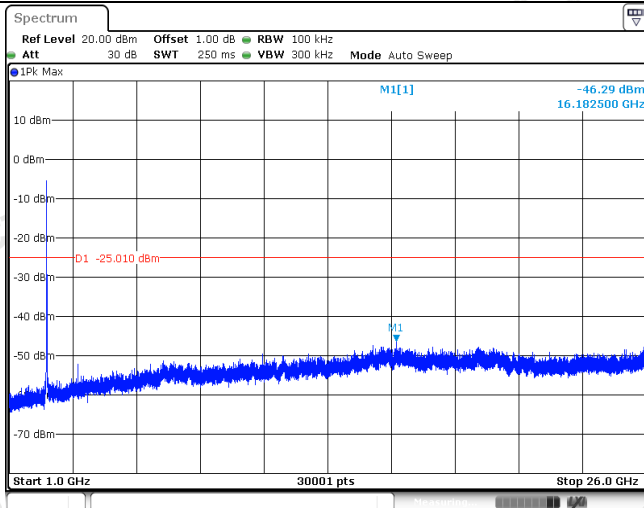


Test Item:	SE	Type:	802.11n(HT40)
<p>CH03 Reference level</p>			
<p>CH03 30MHz~1000MHz</p>			
<p>CH03 1GHz~26GHz</p>			


CH06  
Reference level

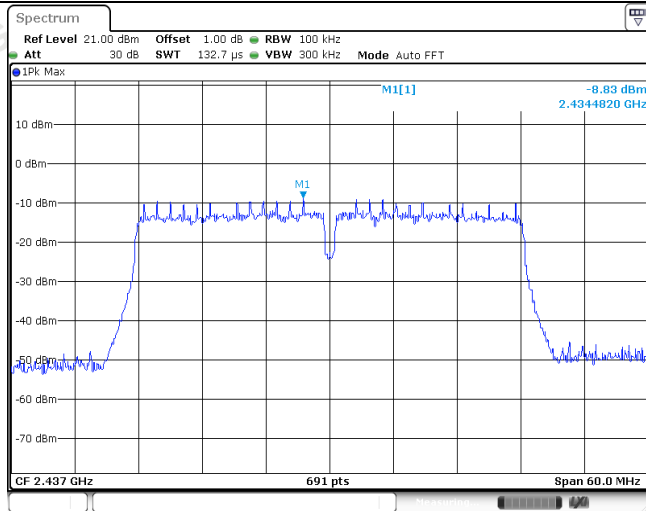


CH06  
30MHz~1000MHz

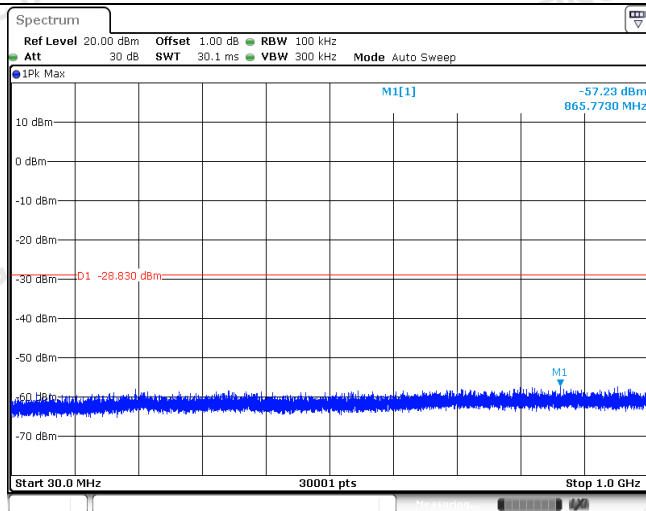


CH06  
1GHz~26GHz

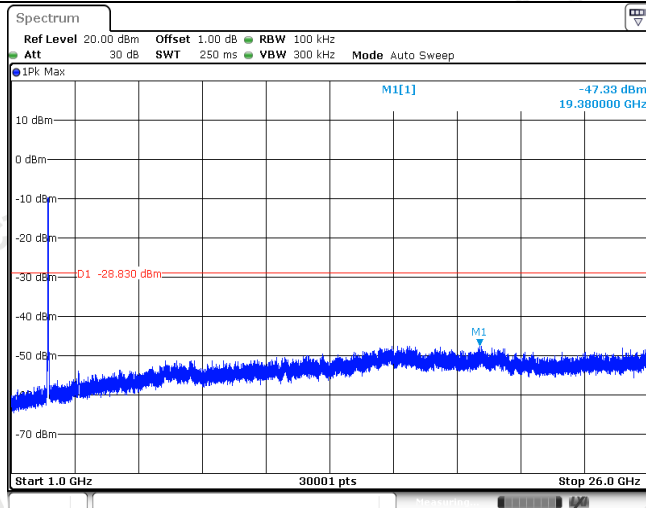


CH09  
Reference level

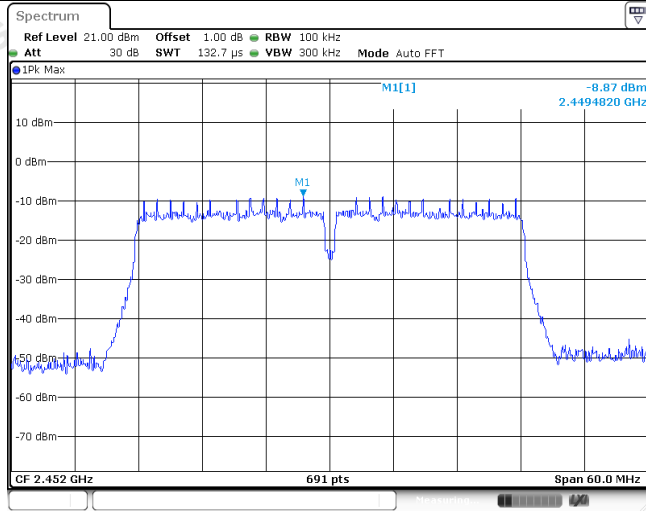

CH09  
30MHz~1000MHz

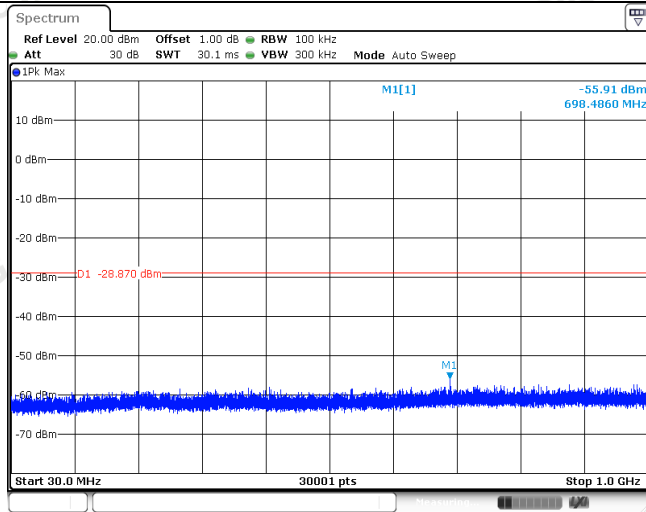

CH09  
1GHz~26GHz

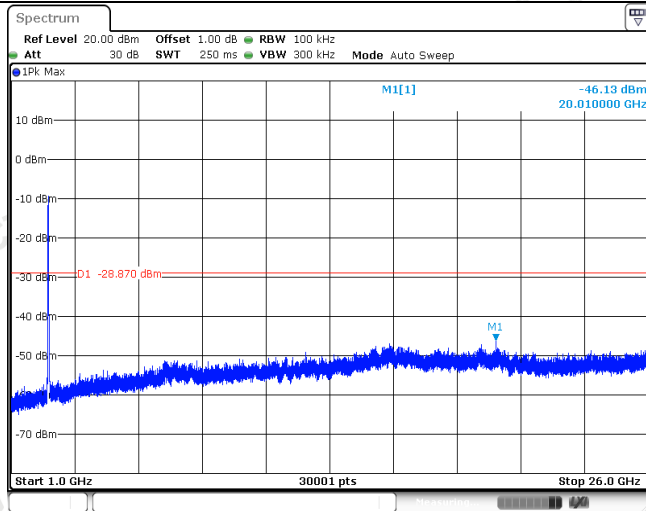

### 3.8. Spurious Emissions (radiated)


#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

#### TEST CONFIGURATION


➤ 9kHz ~30MHz

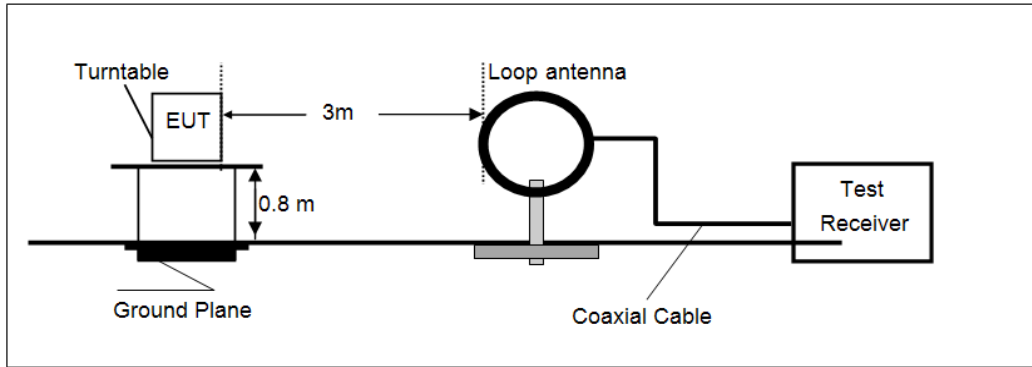

➤ 30MHz ~ 1GHz

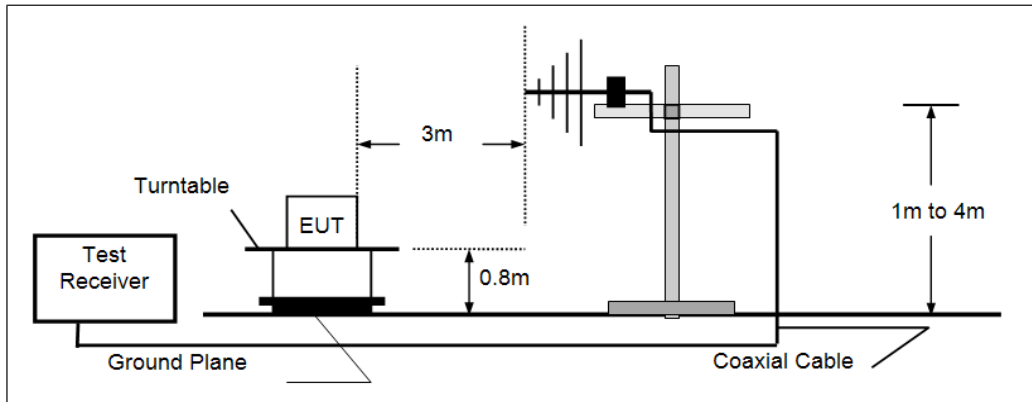

➤ Above 1GHz

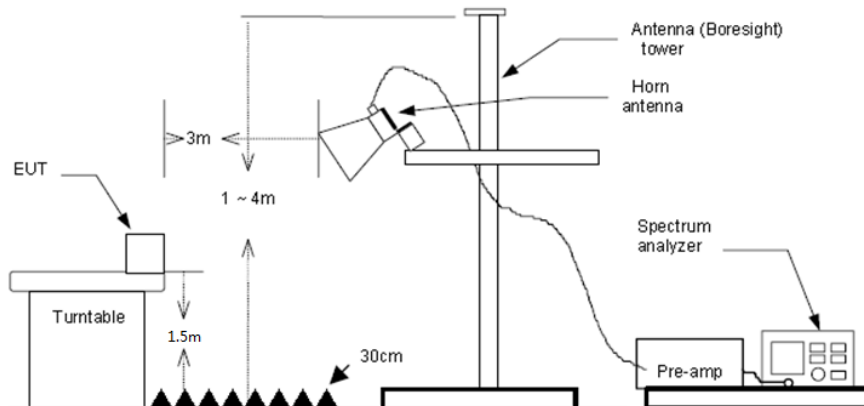



**TEST PROCEDURE**

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

**Passed**       **Not Applicable**

Note:

- 1) Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.

➤ **9kHz ~ 30MHz**


The EUT was pre-scanned the frequency band (9kHz~30MHz), found the radiated level lower than the limit, so don't show on the report.

➤ **30MHz ~1000MHz**

Have pre-scan all modulation mode, found the 802.11b mode CH01 which it was worst case, so only the worst case's data on the test report.

➤ 30MHz ~ 1GHz

Polarization: Vertical

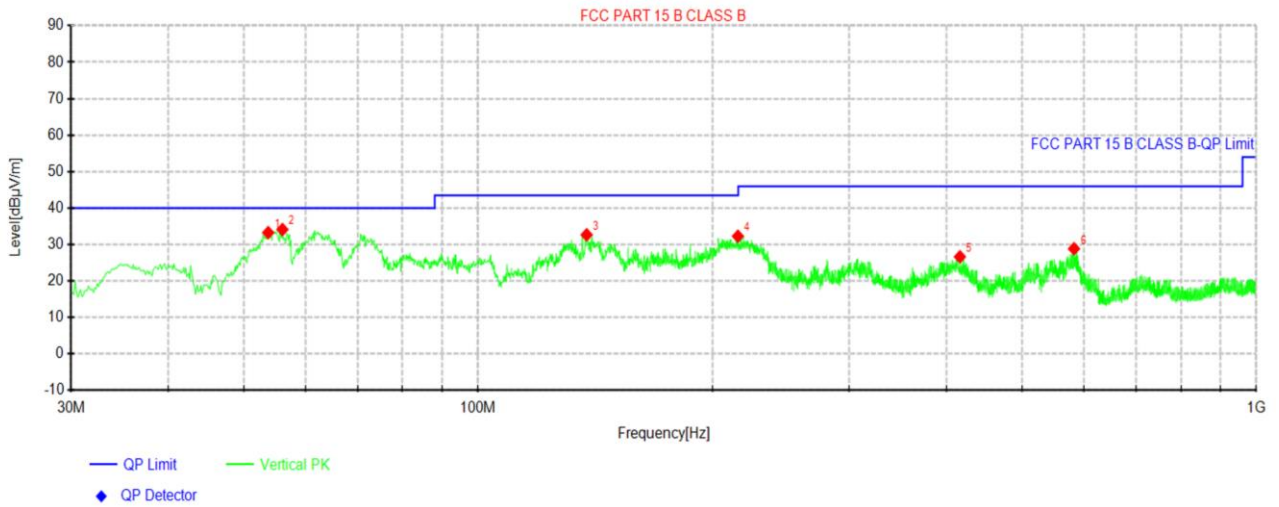

Suspected Data List


NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	53.765	50.14	33.27	-16.87	40.00	6.73	100	288	Vertical
2	56.0688	51.49	34.13	-17.36	40.00	5.87	100	288	Vertical
3	137.912	54.37	32.68	-21.69	43.50	10.82	100	273	Vertical
4	215.755	51.21	32.28	-18.93	43.50	11.22	100	311	Vertical
5	416.06	42.04	26.65	-15.39	46.00	19.35	100	24	Vertical
6	583.142	41.57	28.86	-12.71	46.00	17.14	100	195	Vertical

Note:1). Level (dBµV/m)= Reading (dBµV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Limit (dBµV/m) - Level (dBµV/m)

Polarization: Horizontal

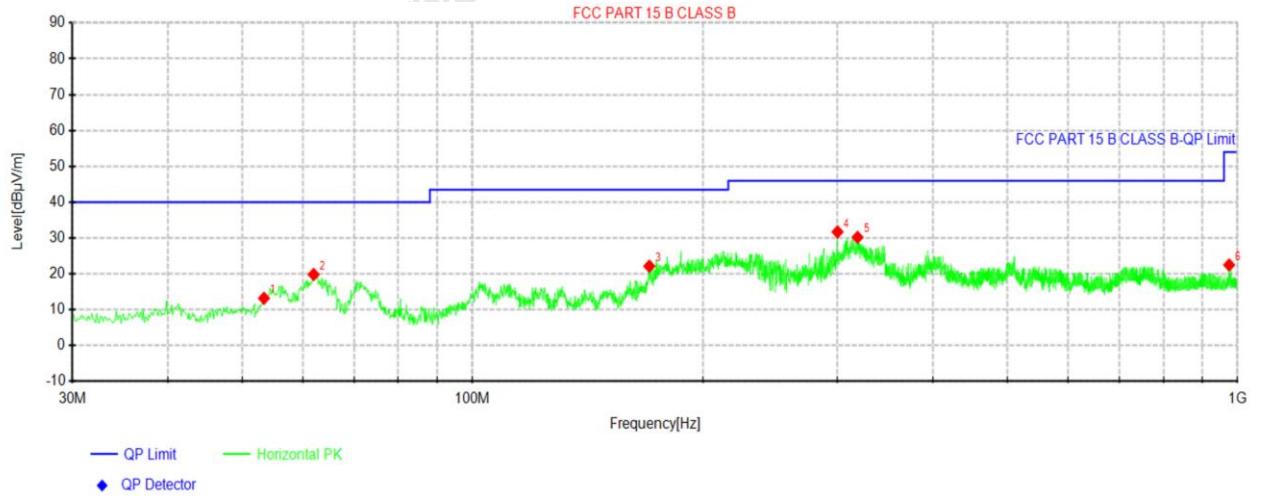

Suspected Data List									
NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	53.4012	30.01	13.22	-16.79	40.00	26.78	100	360	Horizontal
2	62.01	38.60	19.85	-18.75	40.00	20.15	100	349	Horizontal
3	170.286	43.20	22.17	-21.03	43.50	21.33	100	212	Horizontal
4	300.023	49.07	31.73	-17.34	46.00	14.27	100	329	Horizontal
5	318.696	47.16	30.22	-16.94	46.00	15.78	100	282	Horizontal
6	975.022	31.17	22.49	-8.68	54.00	31.51	100	18	Horizontal

- Note: 1). Level (dBµV/m) = Reading (dBµV) + Factor (dB/m)  
 2). Factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)  
 3). Margin (dB) = Limit (dBµV/m) - Level (dBµV/m)

## ➤ 1 GHz ~ 25 GHz

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1702.36	35.08	25.20	5.77	36.93	29.12	74.00	-44.88	Vertical	Peak
3616.45	37.31	29.30	8.29	38.27	36.63	74.00	-37.37	Vertical	Peak
4821.76	41.47	31.56	9.55	36.90	45.68	74.00	-28.32	Vertical	Peak
7081.70	32.81	35.55	11.85	34.91	45.30	74.00	-28.70	Vertical	Peak
1782.18	37.09	25.37	5.93	37.10	31.29	74.00	-42.71	Horizontal	Peak
3616.45	35.49	29.30	8.29	38.27	34.81	74.00	-39.19	Horizontal	Peak
4821.76	39.86	31.56	9.55	36.90	44.07	74.00	-29.93	Horizontal	Peak
7227.39	31.45	36.23	11.89	35.04	44.53	74.00	-29.47	Horizontal	Peak

802.11b					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1719.78	35.42	25.24	5.80	36.97	29.49	74.00	-44.51	Vertical	Peak
3616.45	36.29	29.30	8.29	38.27	35.61	74.00	-38.39	Vertical	Peak
4871.10	41.41	31.46	9.59	36.76	45.70	74.00	-28.30	Vertical	Peak
7451.57	31.95	36.20	12.24	34.86	45.53	74.00	-28.47	Vertical	Peak
1565.20	36.04	25.21	5.47	36.67	30.05	74.00	-43.95	Horizontal	Peak
3176.16	35.50	28.80	7.69	38.20	33.79	74.00	-40.21	Horizontal	Peak
4871.10	40.82	31.46	9.59	36.76	45.11	74.00	-28.89	Horizontal	Peak
7190.69	30.90	36.14	11.86	35.07	43.83	74.00	-30.17	Horizontal	Peak


802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1768.62	44.55	25.34	5.90	37.07	38.72	74.00	-35.28	Vertical	Peak
3588.94	34.64	29.27	8.25	38.29	33.87	74.00	-40.13	Vertical	Peak
4920.96	36.86	31.42	9.62	36.62	41.28	74.00	-32.72	Vertical	Peak
6992.14	31.74	35.25	11.84	34.80	44.03	74.00	-29.97	Vertical	Peak
1759.64	34.78	25.32	5.88	37.06	28.92	74.00	-45.08	Horizontal	Peak
3690.85	36.67	29.30	8.37	38.25	36.09	74.00	-37.91	Horizontal	Peak
4920.96	39.44	31.42	9.62	36.62	43.86	74.00	-30.14	Horizontal	Peak
7338.62	31.69	36.30	12.01	34.90	45.10	74.00	-28.90	Horizontal	Peak

## Remark:



- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
- The peak level is lower than average limit (54 dBuV/m), this data is the too weak instrument of signal is unable to test.
- The emission levels of other frequencies (test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.
- Pre-scan all modes, found the 802.11b was the worst case and recorded it.

## 4. TEST SETUP PHOTOS

### Conducted Emissions

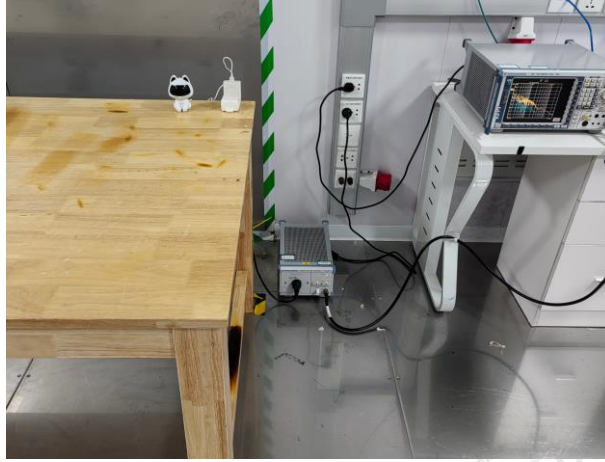

### Radiated Emissions

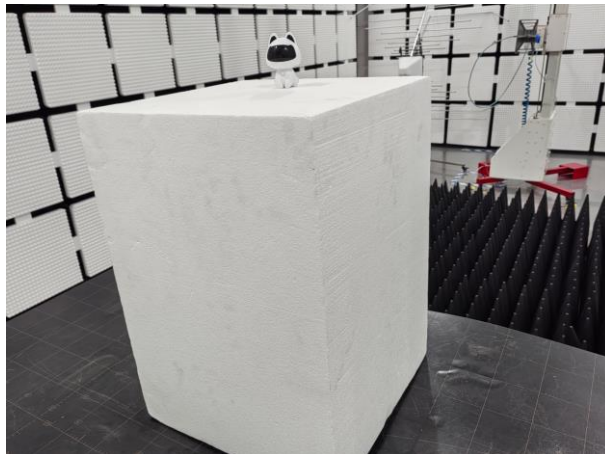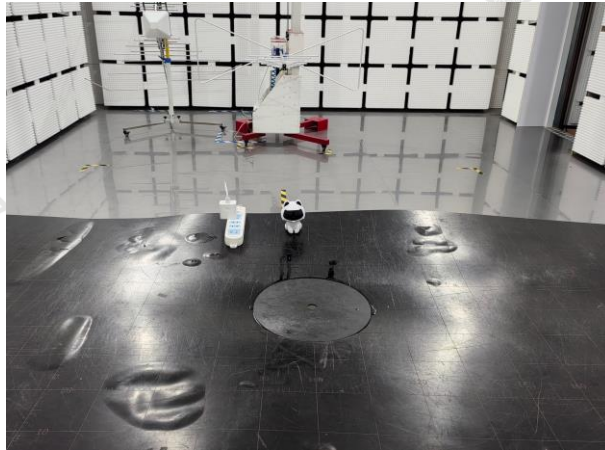




## 5. EXTERANAL AND INTERNAL PHOTOS

External Photos






Internal Photos

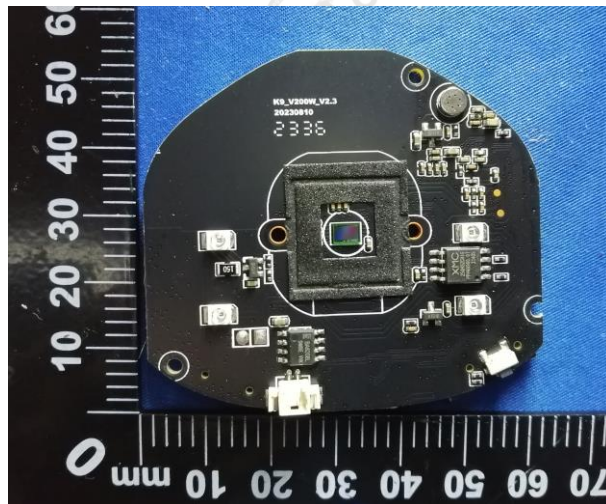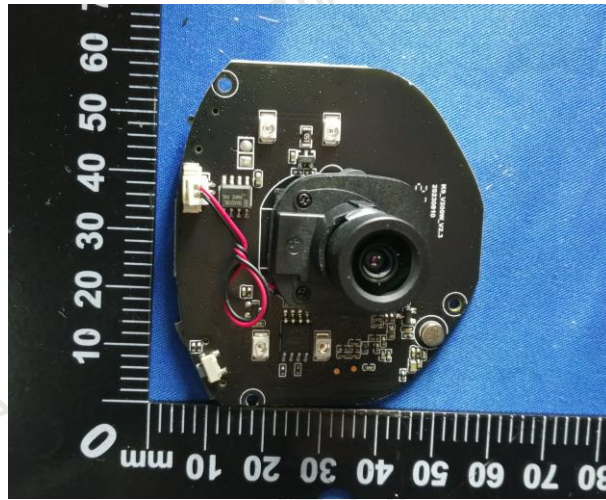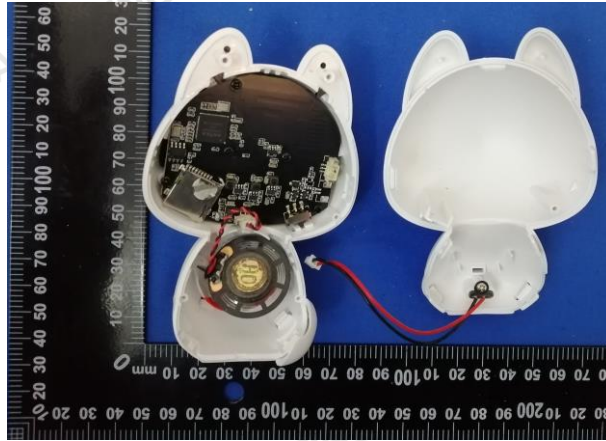



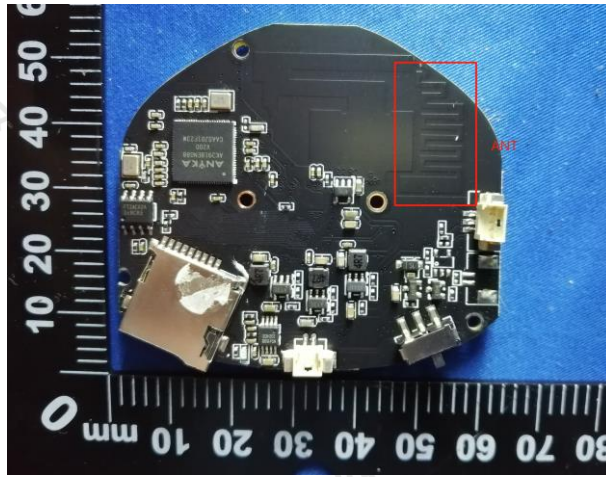

-----End of Report-----