

TEST REPORT

Reference No...... : WTX24X01240031W001
FCC ID..... : 2BEUO-Q8S
Applicant..... : Guangzhou Hongding electronic Technology Co., LTD
503, Building C, Daxin Industrial Park, No. 3, East Development
Address..... : Road, Xisan Village, Luopu Street, Panyu District, Guangzhou City,
Guangdong Province,China
Product Name..... : Security camera
Test Model..... : Q8S
Standards..... : FCC Part 15.247
Date of Receipt sample..... : January 23, 2024
Date of Test..... : January 23~28, 2024
Date of Issue..... : January 28, 2024
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tested by:



Tom Wang/ Project Engineer

Approved & Authorized By:



Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION 4

 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 4

 1.2 TEST STANDARDS 5

 1.3 TEST METHODOLOGY 5

 1.4 TEST FACILITY 5

 1.5 EUT SETUP AND TEST MODE 6

 1.6 MEASUREMENT UNCERTAINTY 7

 1.7 TEST EQUIPMENT LIST AND DETAILS 8

2. SUMMARY OF TEST RESULTS 10

3. ANTENNA REQUIREMENT 11

 3.1 STANDARD APPLICABLE 11

 3.2 EVALUATION INFORMATION 11

4. POWER SPECTRAL DENSITY 12

 4.1 STANDARD APPLICABLE 12

 4.2 TEST SETUP BLOCK DIAGRAM 12

 4.3 TEST PROCEDURE 12

 4.4 SUMMARY OF TEST RESULTS/PLOTS 12

5. DTS BANDWIDTH 13

 5.1 STANDARD APPLICABLE 13

 5.2 TEST SETUP BLOCK DIAGRAM 13

 5.3 TEST PROCEDURE 13

 5.4 SUMMARY OF TEST RESULTS/PLOTS 13

6. RF OUTPUT POWER 14

 6.1 STANDARD APPLICABLE 14

 6.2 TEST SETUP BLOCK DIAGRAM 14

 6.3 TEST PROCEDURE 14

 6.4 SUMMARY OF TEST RESULTS/PLOTS 14

7. FIELD STRENGTH OF SPURIOUS EMISSIONS 15

 7.1 STANDARD APPLICABLE 15

 7.2 TEST PROCEDURE 15

 7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION 17

 7.4 SUMMARY OF TEST RESULTS/PLOTS 17

8. OUT OF BAND EMISSIONS 21

 8.1 STANDARD APPLICABLE 21

 8.2 TEST PROCEDURE 21

 8.3 SUMMARY OF TEST RESULTS/PLOTS 22

9. CONDUCTED EMISSIONS 26

 9.1 TEST PROCEDURE 26

 9.2 BASIC TEST SETUP BLOCK DIAGRAM 26

 9.3 TEST RECEIVER SETUP 26

 9.4 SUMMARY OF TEST RESULTS/PLOTS 26

APPENDIX SUMMARY 29

APPENDIX A 30

APPENDIX B 36

APPENDIX C 41

APPENDIX D 42

APPENDIX E 46

APPENDIX PHOTOGRAPHS 59

Report version

Version No.	Date of issue	Description
Rev.00	January 28, 2024	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Guangzhou Hongding electronic Technology Co., LTD
 Address of applicant: 503, Building C, Daxin Industrial Park, No. 3, East Development Road, Xisan Village, Luopu Street, Panyu District, Guangzhou City, Guangdong Province, China

Manufacturer: Guangzhou Hongding electronic Technology Co., LTD
 Address of manufacturer: 503, Building C, Daxin Industrial Park, No. 3, East Development Road, Xisan Village, Luopu Street, Panyu District, Guangzhou City, Guangdong Province, China

General Description of EUT	
Product Name:	Security camera
Trade Name:	/
Model No.:	Q8S
Adding Model(s):	A2 、 A5、 P2/P3、 A6 、 K9、 D1、 D2 、 X22、 A9、 A10、 M8、 V6pro、 Q16H、 Q18H、 Q10H、 HQ01、 Q7、 Q16A、 M7D、 P2、 Q1、 Q18J、 Q73、 Q8、 SQ001、 SC01、 Q6、 LY04、 LY06
Rated Voltage:	DC 5V
Power Adapter Model:	/
Serial number:	S-01
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	18.50dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	3.98dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

Test software(Fix the Tx frequency)	Power level(Testing)
Name	level
Putty	Index

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-03-27	2024-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-03-27	2024-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2023-03-27	2024-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2023-03-27	2024-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2023-03-27	2024-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2023-03-27	2024-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2023-03-27	2024-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2023-03-27	2024-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2023-03-27	2024-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2023-03-27	2024-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2023-04-12	2024-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2023-04-12	2024-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2023-03-19	2025-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-19	2025-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2023-03-19	2025-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2023-03-27	2024-03-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2023-03-27	2024-03-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2023-03-27	2024-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2023-03-27	2024-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2023-03-19	2025-03-18
SEMT-1096	Power Sensor	Agilent	U2021XA	MY54250019	2023-03-27	2024-03-26
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

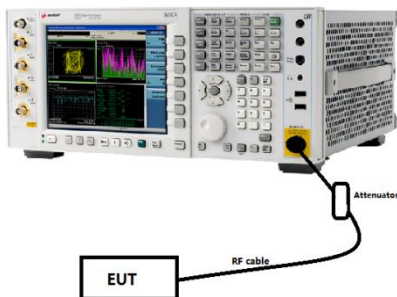
This product has an integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram



4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

4.4 Summary of Test Results/Plots

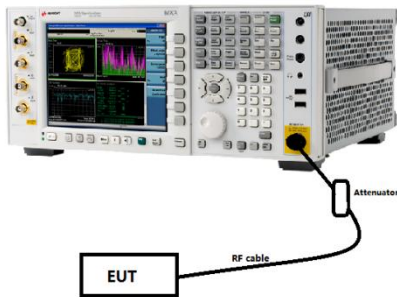
Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram



5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots

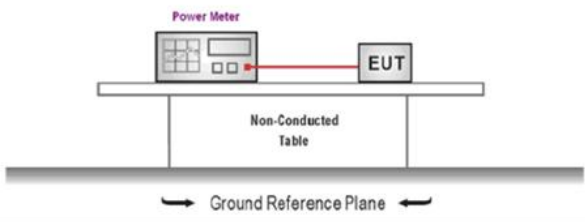
Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram



6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) The maximum peak conducted output power may be measured using a broadband peak RF power meter.
- b) The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
- c) Record the measurement data.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

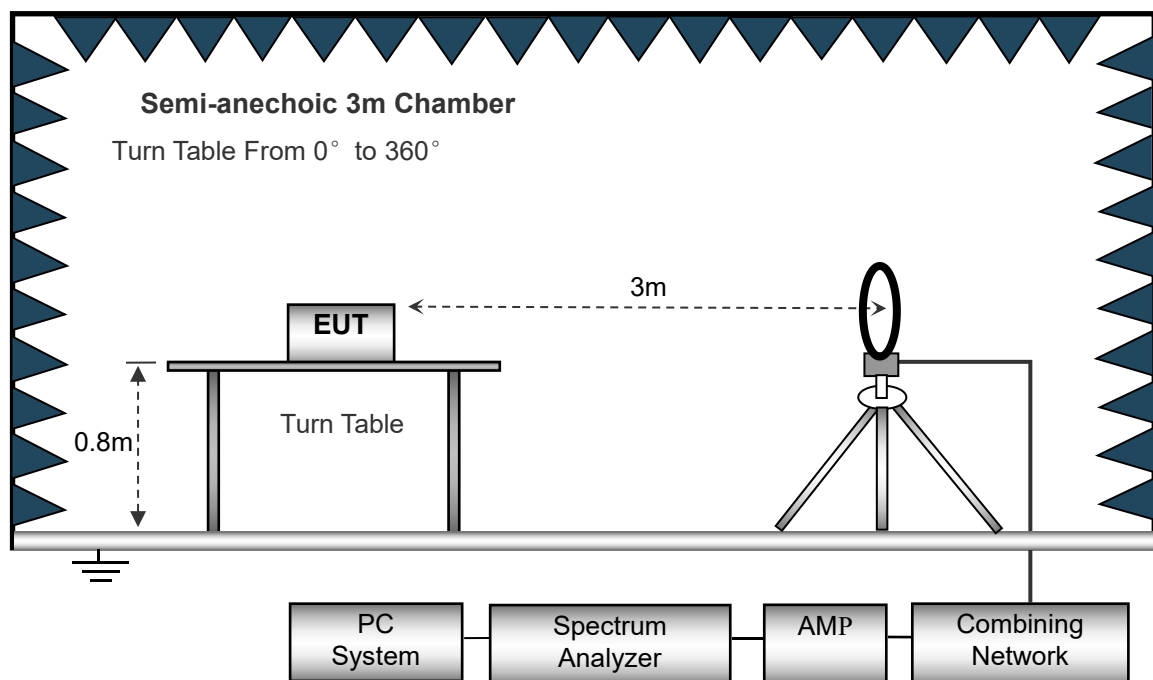
7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

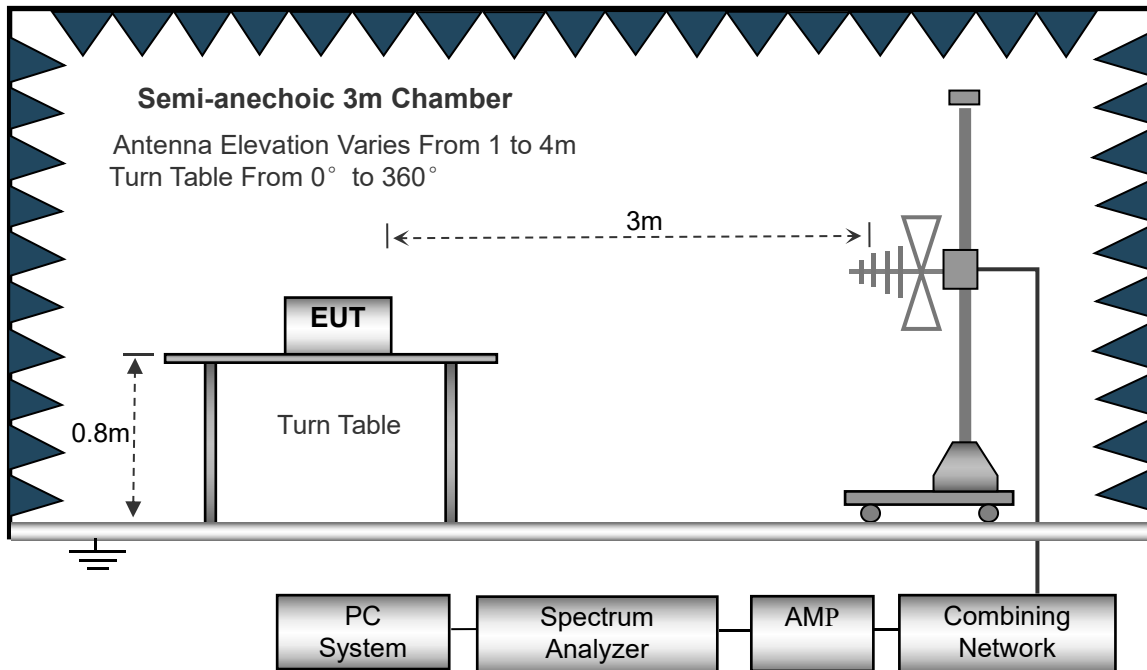
The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

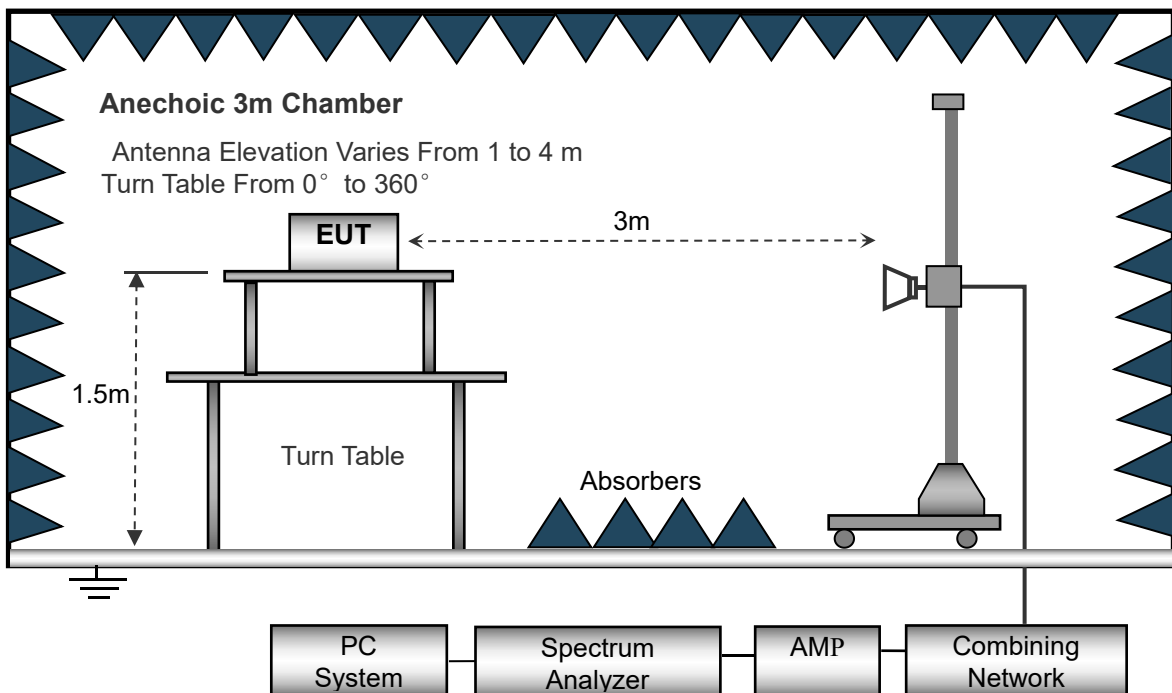
The test setup for emission measurement below 30MHz.



The test setup for emission measurement from 30MHz to 1GHz.



The test setup for emission measurement above 1GHz.



Reference No.: WTX24X01240031W001

Frequency :9kHz-30MHz	Frequency :30MHz-1GHz	Frequency :Above 1GHz
RBW=10KHz,	RBW=120KHz,	RBW=1MHz,
VBW =30KHz	VBW=300KHz	VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto	Sweep time= Auto	Sweep time= Auto
Trace = max hold	Trace = max hold	Trace = max hold
Detector function = peak	Detector function = peak, QP	Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\begin{aligned}\text{Result} &= \text{Indicated Reading} + \text{Correct} \\ \text{Correct} &= \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}\end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

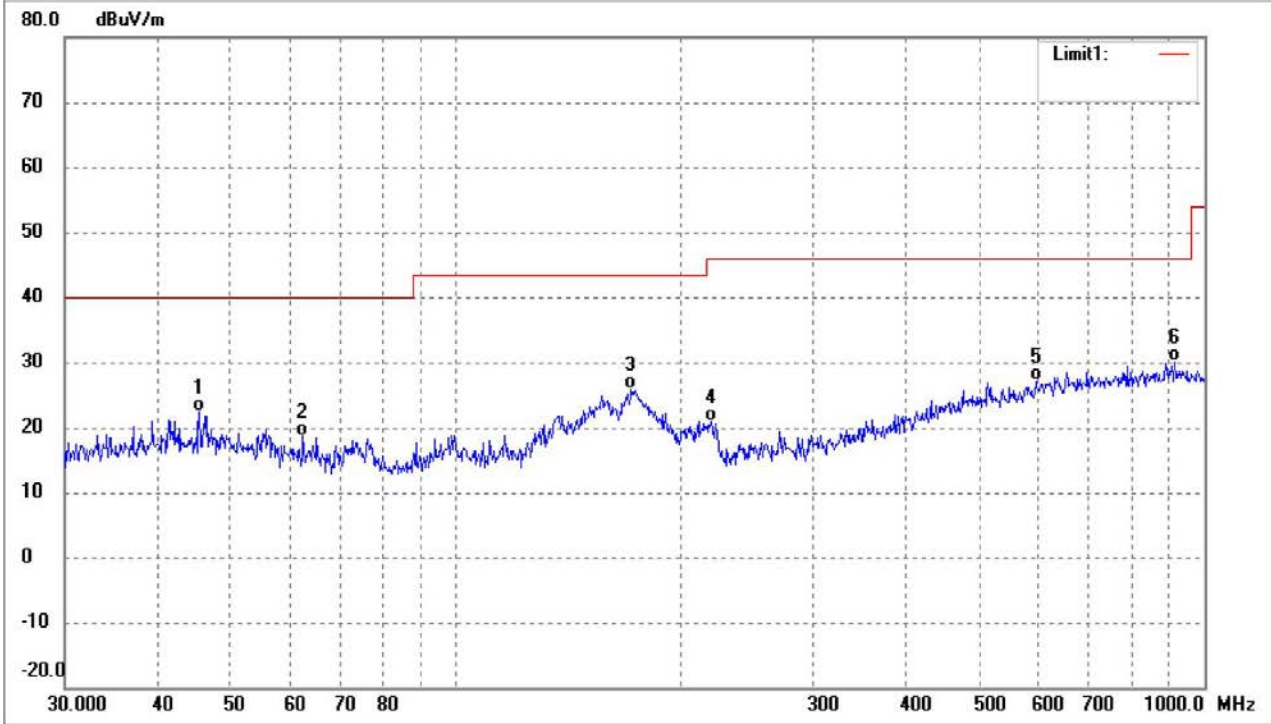
$$\text{Margin} = \text{Result} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: 1.This EUT was tested in 3 orthogonal positions and the worst case position data was reported. All test modes (different data rate and different modulation) are performed, but only the worst case(802.11b_low channel 11Mbps) is recorded in this report.

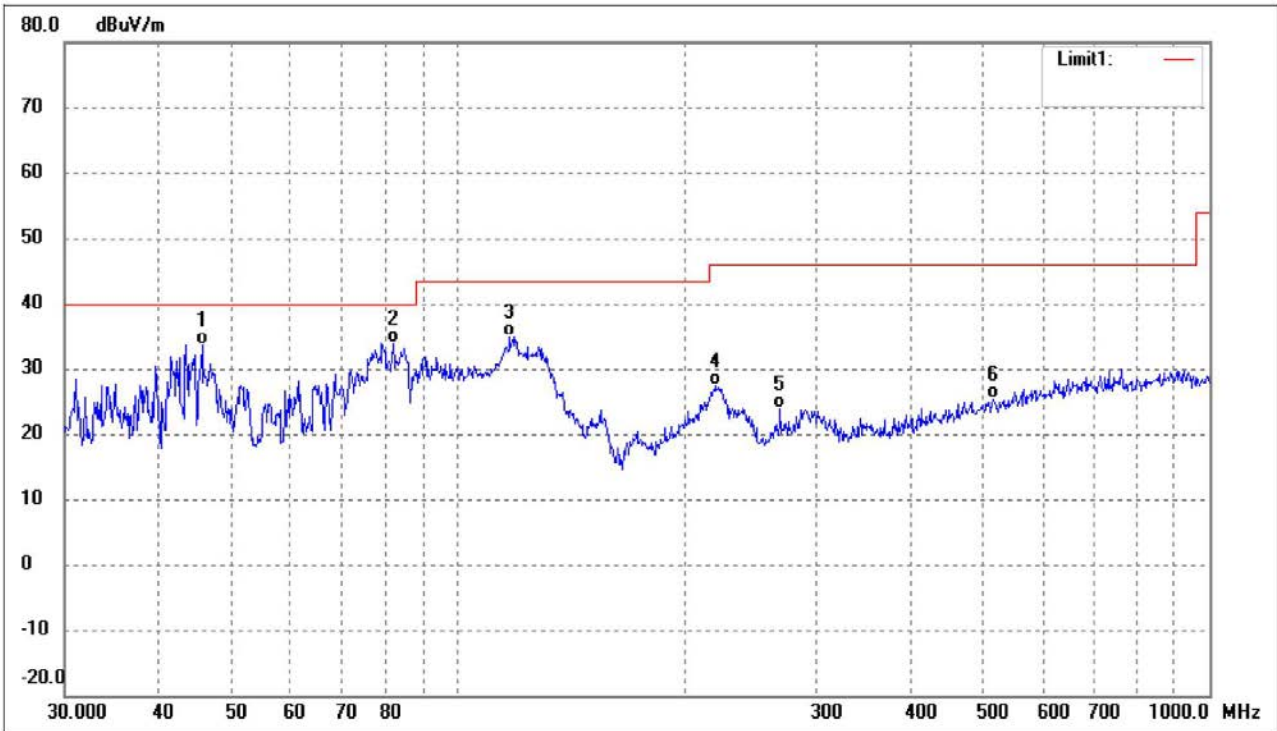
➤ Spurious Emissions Below 1GHz

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.3755	29.36	-6.97	22.39	40.00	-17.61	-	-	QP
2	62.4314	27.58	-8.85	18.73	40.00	-21.27	-	-	QP
3	171.3926	37.51	-11.66	25.85	43.50	-17.65	-	-	QP
4	219.0753	30.12	-9.18	20.94	46.00	-25.06	-	-	QP
5	595.1329	26.82	0.29	27.11	46.00	-18.89	-	-	QP
6	912.8620	27.47	2.70	30.17	46.00	-15.83	-	-	QP

802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	45.6948	40.68	-6.98	33.70	40.00	-6.30	-	-	QP
2	82.0706	44.67	-10.70	33.97	40.00	-6.03	-	-	QP
3	117.3603	44.37	-9.40	34.97	43.50	-8.53	-	-	QP
4	220.6171	36.49	-9.14	27.35	46.00	-18.65	-	-	QP
5	268.4853	31.65	-7.81	23.84	46.00	-22.16	-	-	QP
6	515.4374	26.32	-1.04	25.28	46.00	-20.72	-	-	QP

- Spurious Emissions Above 1GHz
- Test Mode: 802.11b_11Mbps (worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	60.55	-4.50	56.05	74	-17.95	H	PK
4824.000	50.69	-4.50	46.19	54	-7.81	H	AV
7236.000	53.60	1.14	54.74	74	-19.26	H	PK
7236.000	46.24	1.14	47.38	54	-6.62	H	AV
4824.000	61.17	-4.50	56.67	74	-17.33	V	PK
4824.000	50.43	-4.50	45.93	54	-8.07	V	AV
7236.000	50.14	1.14	51.28	74	-22.72	V	PK
7236.000	41.24	1.14	42.38	54	-11.62	V	AV
Middle Channel-2437MHz							
4874.000	61.20	-4.47	56.73	74	-17.27	H	PK
4874.000	49.13	-4.47	44.66	54	-9.34	H	AV
7311.000	53.67	1.47	55.14	74	-18.86	H	PK
7311.000	46.21	1.47	47.68	54	-6.32	H	AV
4874.000	60.57	-4.47	56.10	74	-17.90	V	PK
4874.000	49.52	-4.47	45.05	54	-8.95	V	AV
7311.000	48.88	1.47	50.35	74	-23.65	V	PK
7311.000	41.71	1.47	43.18	54	-10.82	V	AV
High Channel-2462MHz							
4924.000	56.65	-4.44	52.21	74	-21.79	H	PK
4924.000	51.08	-4.44	46.64	54	-7.36	H	AV
7386.000	52.70	1.79	54.49	74	-19.51	H	PK
7386.000	43.62	1.79	45.41	54	-8.59	H	AV
4924.000	60.23	-4.44	55.79	74	-18.21	V	PK
4924.000	49.30	-4.44	44.86	54	-9.14	V	AV
7386.000	52.82	1.79	54.61	74	-19.39	V	PK
7386.000	41.63	1.79	43.42	54	-10.58	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

- Conducted test

Please refer to Appendix E

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement

KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW \geq $[3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

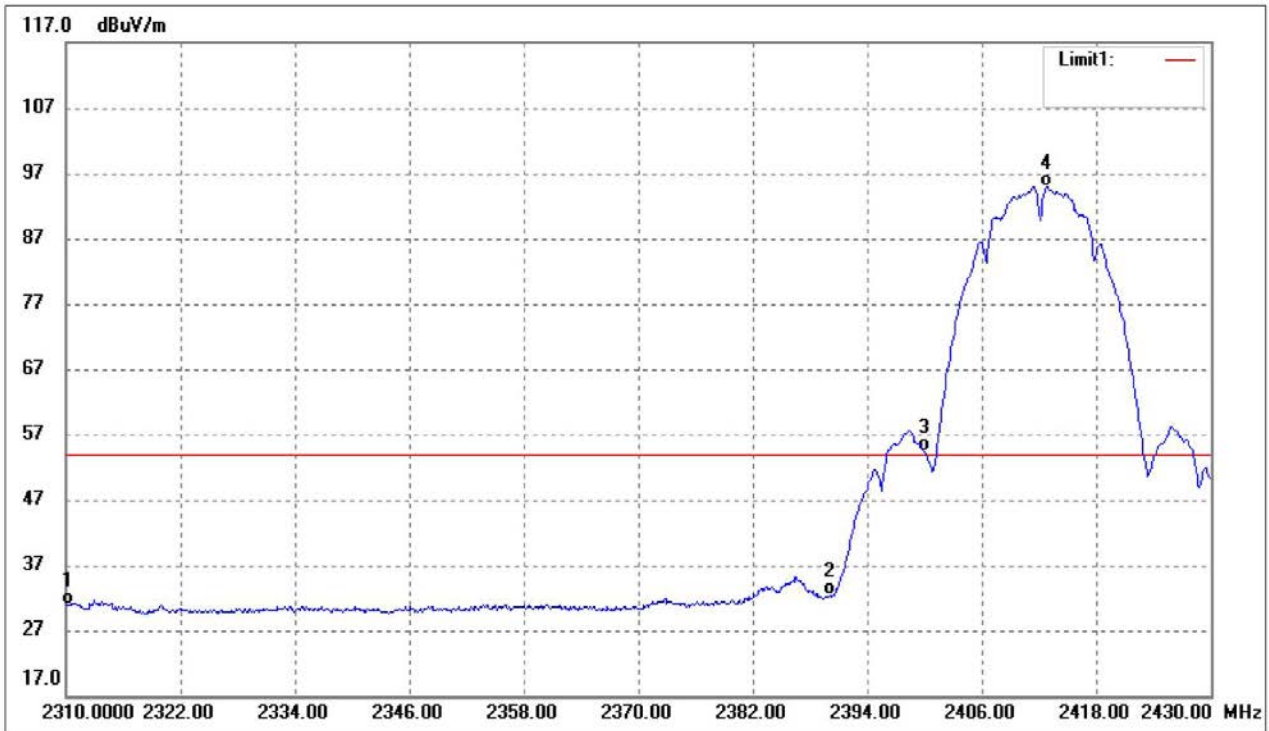
Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

Note: All test modes (different data rate and different modulation) are performed, but only the worst case(802.11g_54Mbps Vertical) is recorded in this report.

➤ Radiated test

802.11b_11Mbps			
Test Channel	Low	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.81	-10.82	30.99	54.00	-23.01	Average Detector
	2310.000	53.23	-10.82	42.41	74.00	-31.59	Peak Detector
2	2390.000	43.02	-10.70	32.32	54.00	-21.68	Average Detector
	2390.000	55.18	-10.70	44.48	74.00	-29.52	Peak Detector
3	2400.000	65.18	-10.69	54.49	/		Average Detector
4	2412.840	105.59	-10.67	94.92			Average Detector

802.11b_11Mbps			
Test Channel	High	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.300	103.99	-10.61	93.38	/	/	Average Detector
	2463.100	108.51	-10.60	97.91	/	/	Peak Detector
2	2483.500	41.88	-10.58	31.30	54.00	-22.70	Average Detector
	2483.500	53.46	-10.58	42.88	74.00	-31.12	Peak Detector
3	2500.000	40.42	-10.55	29.87	54.00	-24.13	Average Detector
	2500.000	53.34	-10.55	42.79	74.00	-31.21	Peak Detector

Reference No.: WTX24X01240031W001

➤ Conducted test

Please refer to Appendix D

9. Conducted Emissions

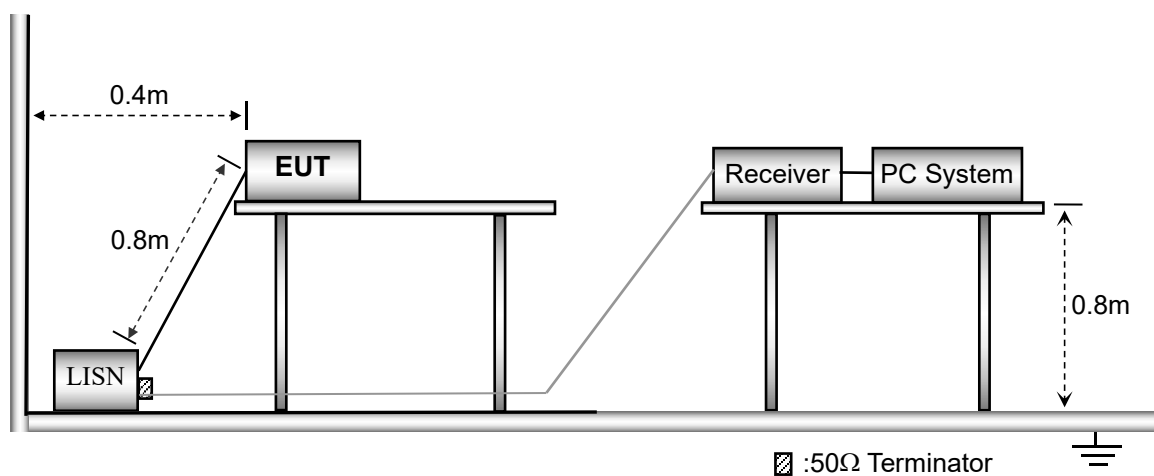
9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle.

The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram



9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency.....	150kHz
Stop Frequency.....	30MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth.....	9kHz
Quasi-Peak Adapter Mode.....	Normal

9.4 Summary of Test Results/Plots

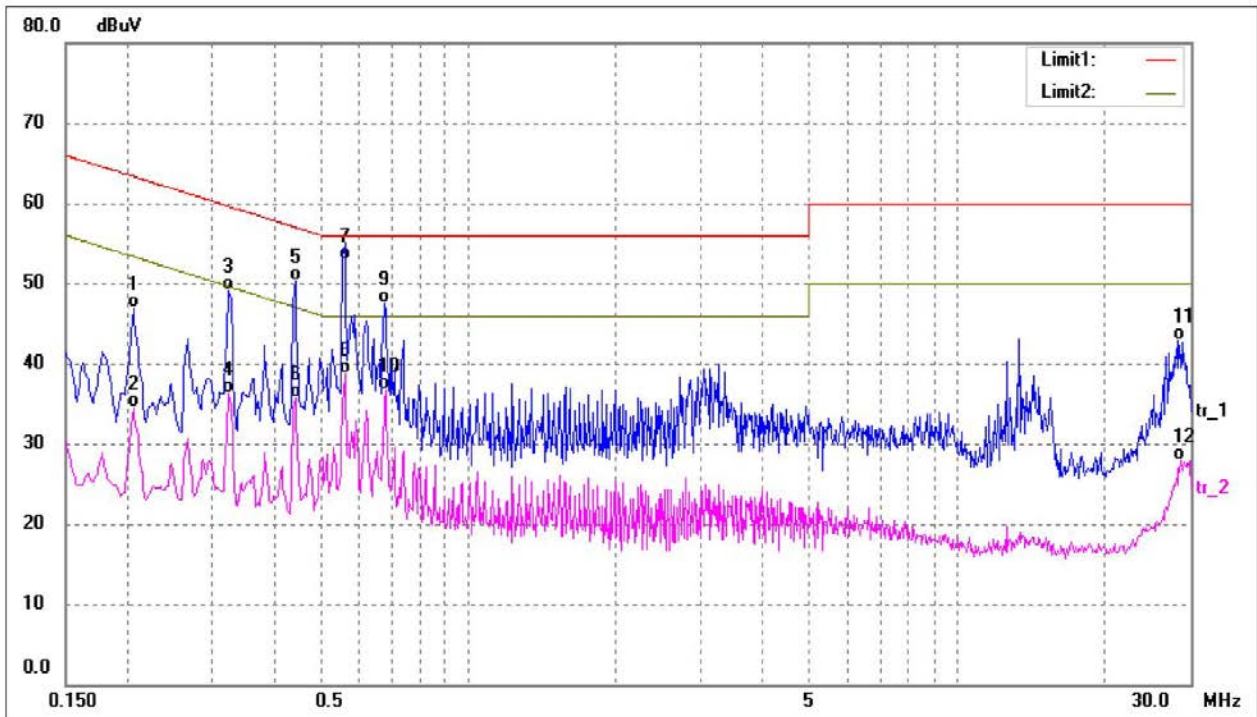
Remark:

Result = Indicated Reading + Correct

Correct=Cable lose + Pulse Limiter Factor + Artificial Mains Factor

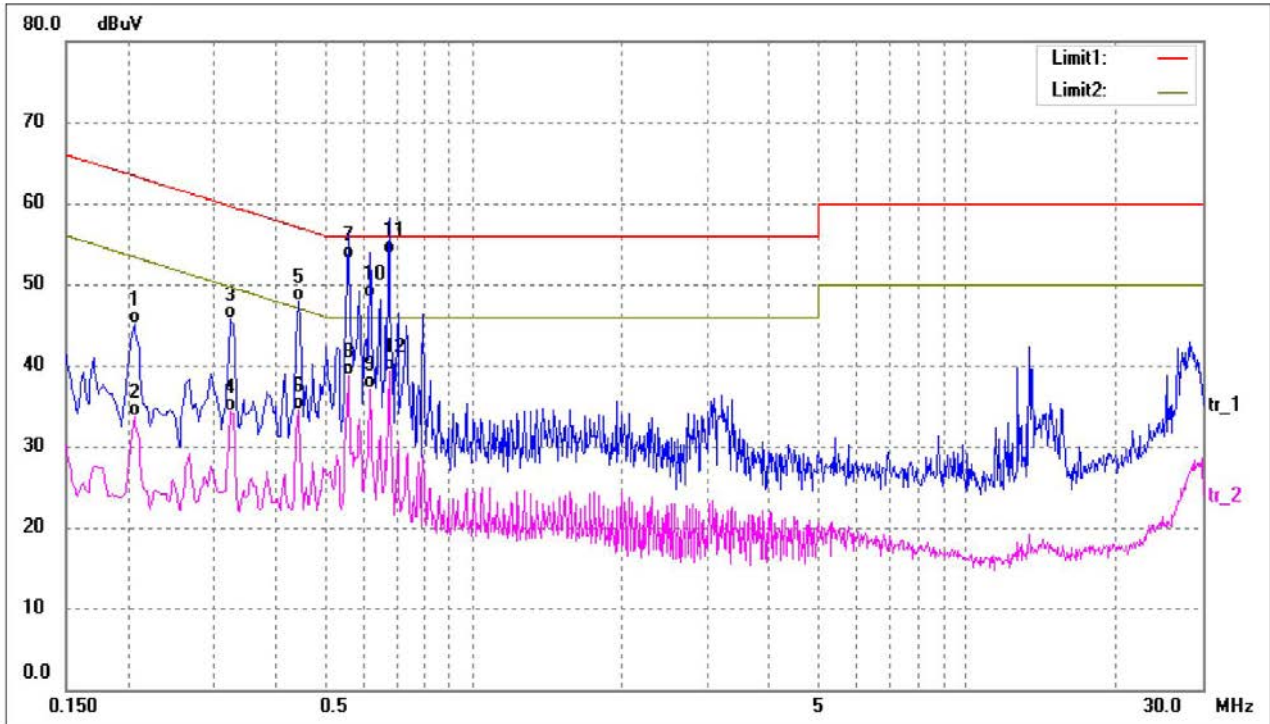
Margin=Result- Limit

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2059	36.58	10.37	46.95	63.37	-16.42	QP
2	0.2059	24.10	10.37	34.47	53.37	-18.90	AVG
3	0.3220	38.86	10.33	49.19	59.65	-10.46	QP
4	0.3220	25.91	10.33	36.24	49.65	-13.41	AVG
5	0.4420	39.99	10.28	50.27	57.02	-6.75	QP
6	0.4420	25.39	10.28	35.67	47.02	-11.35	AVG
7*	0.5580	42.61	10.29	52.90	56.00	-3.10	QP
8	0.5580	28.37	10.29	38.66	46.00	-7.34	AVG
9	0.6740	37.14	10.36	47.50	56.00	-8.50	QP
10	0.6780	26.32	10.37	36.69	46.00	-9.31	AVG
11	28.3099	32.67	10.23	42.90	60.00	-17.10	QP
12	28.6499	17.72	10.23	27.95	50.00	-22.05	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2058	34.79	10.37	45.16	63.37	-18.21	QP
2	0.2058	23.30	10.37	33.67	53.37	-19.70	AVG
3	0.3220	35.30	10.33	45.63	59.65	-14.02	QP
4	0.3220	24.01	10.33	34.34	49.65	-15.31	AVG
5	0.4420	37.70	10.28	47.98	57.02	-9.04	QP
6	0.4420	24.16	10.28	34.44	47.02	-12.58	AVG
7	0.5580	42.77	10.29	53.06	56.00	-2.94	QP
8	0.5580	28.39	10.29	38.68	46.00	-7.32	AVG
9	0.6179	26.68	10.33	37.01	46.00	-8.99	AVG
10	0.6180	38.04	10.33	48.37	56.00	-7.63	QP
11*	0.6780	43.40	10.37	53.77	56.00	-2.23	QP
12	0.6780	29.03	10.37	39.40	46.00	-6.60	AVG

APPENDIX SUMMARY

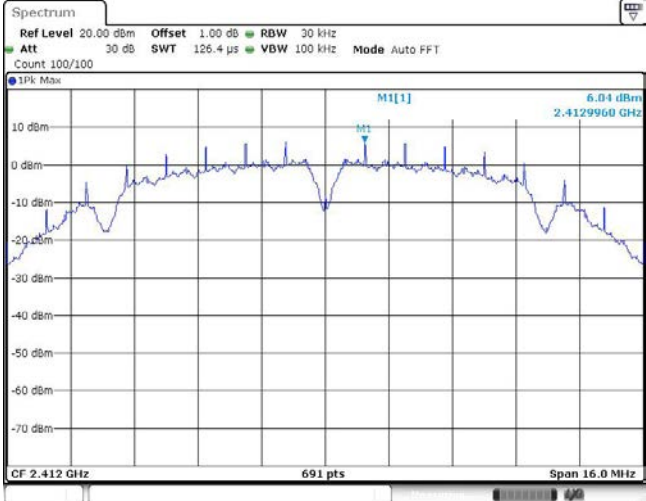
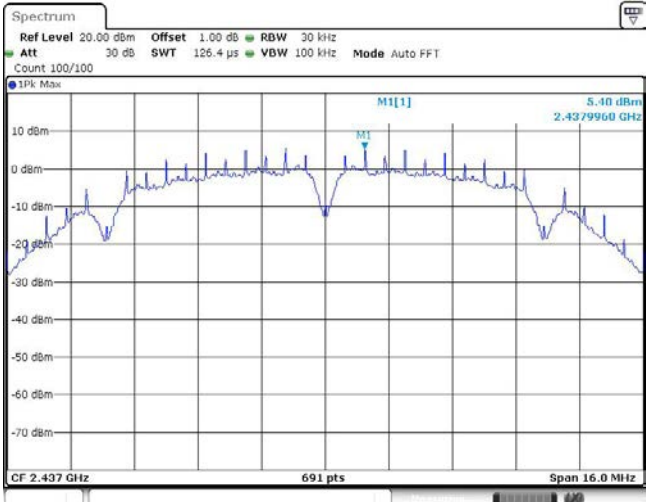
Project No.	WTX24X01240031W001	Test Engineer	Tom Wang
Start date	2024/01/23	Finish date	2024/01/28
Temperature	24.9°C	Humidity	48%
RF specifications	WIFI-2.4G		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant
E	Conducted Spurious Emissions	Compliant

APPENDIX A

Power Spectral Density			
Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b_11Mbps	2412	6.04	8
	2437	5.40	8
	2462	5.00	8
802.11g_54Mbps	2412	-3.42	8
	2437	-4.16	8
	2462	-5.22	8
802.11n-HT20_MCS7	2412	-4.09	8
	2437	-6.33	8
	2462	-5.21	8
802.11n-HT40_MCS7	2422	-8.83	8
	2437	-9.63	8
	2452	-9.64	8

Please refer to the following test plots:

Type:		802.11b
CH01		
CH06		




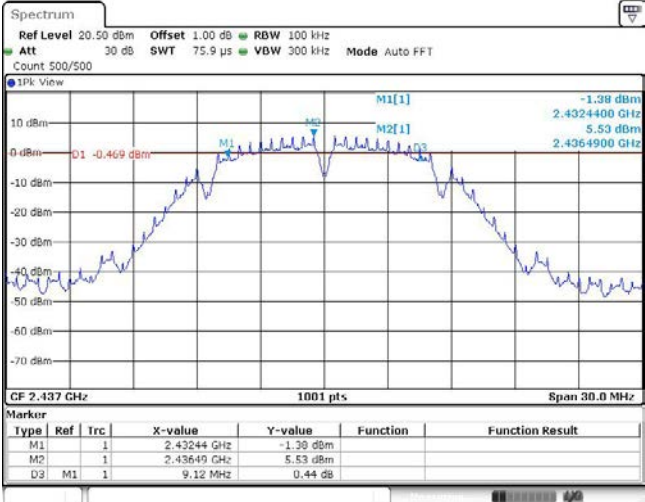
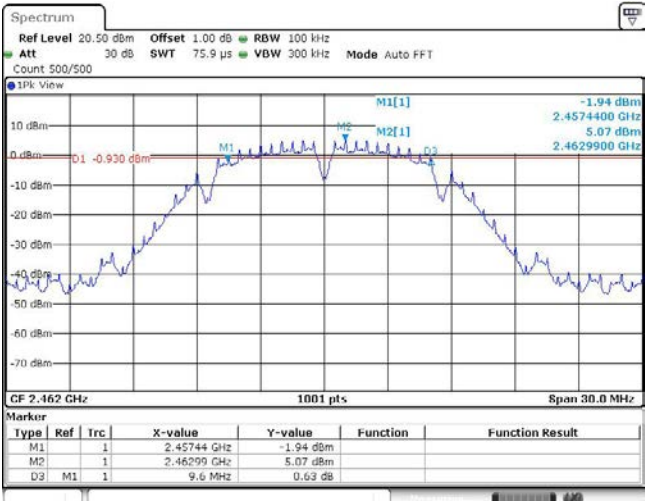
Type:		802.11g
CH01		
CH06		
CH11		

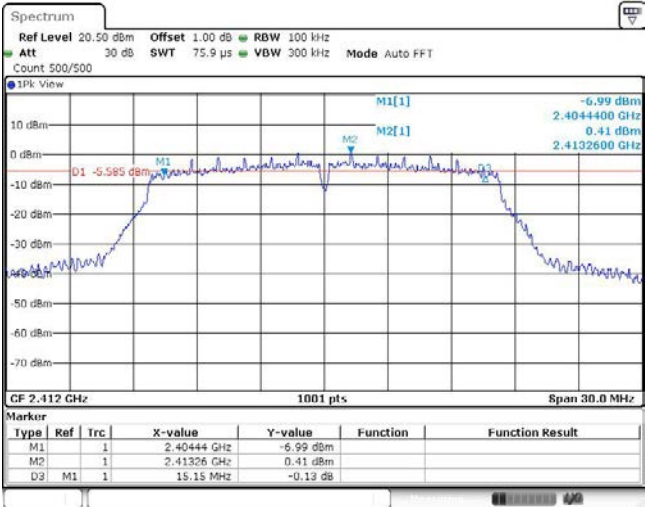
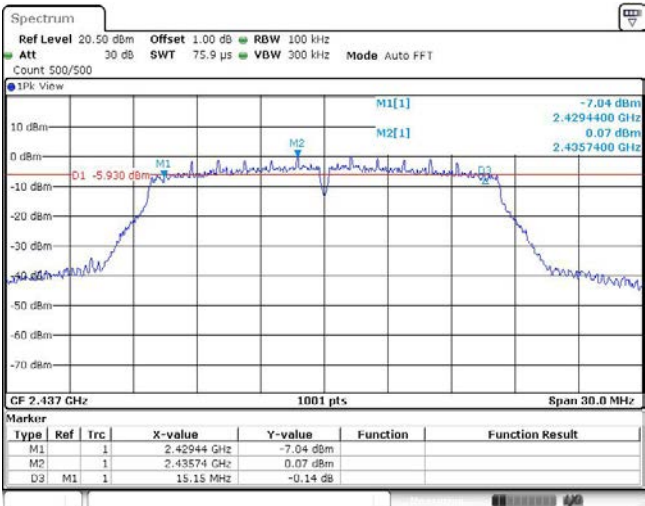
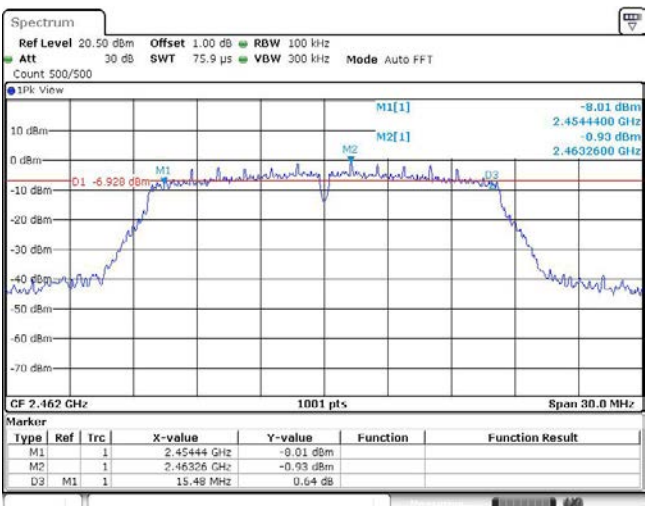
Type:	802.11n(HT20)
CH01	<p>Spectrum plot for CH01. The plot shows a signal at 2.4107340 GHz with a peak level of -4.09 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 30 kHz, Mode Auto FFT, Count 100/100, Span 25.0 MHz, and CF 2.412 GHz.</p>
CH06	<p>Spectrum plot for CH06. The plot shows a signal at 2.4357340 GHz with a peak level of -6.33 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 30 kHz, Mode Auto FFT, Count 100/100, Span 25.0 MHz, and CF 2.437 GHz.</p>
CH11	<p>Spectrum plot for CH11. The plot shows a signal at 2.4607340 GHz with a peak level of -5.21 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 30 kHz, Mode Auto FFT, Count 100/100, Span 25.0 MHz, and CF 2.462 GHz.</p>

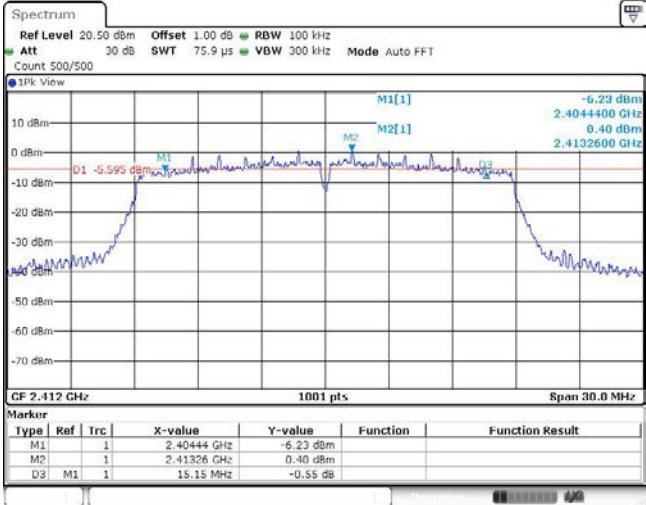
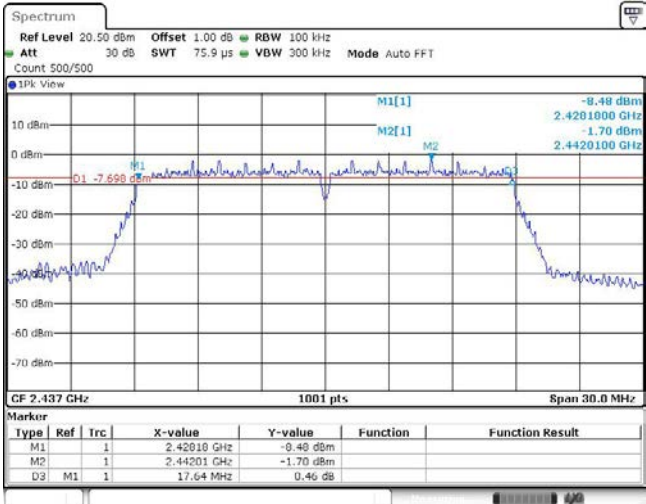
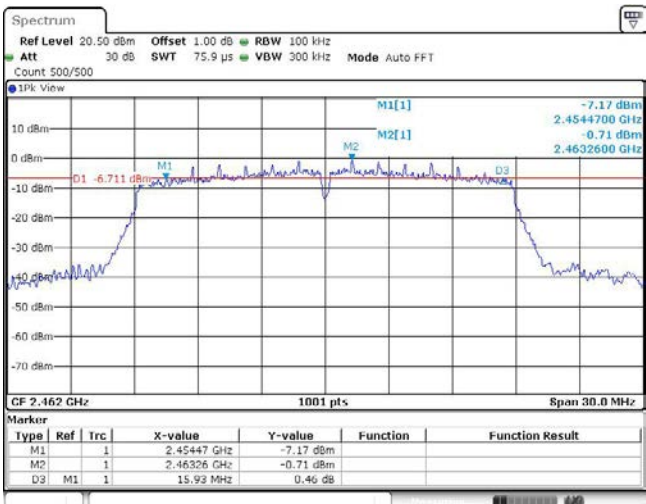
Type:	802.11n(HT40)
CH03	<p>Spectrum plot for CH03. The plot shows a signal centered at 2.4282880 GHz with a peak level of -8.83 dBm. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in GHz, with a center frequency (CF) of 2.422 GHz and a span of 55.0 MHz. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 30 kHz, Mode Auto FFT, Count 100/100, CF 2.422 GHz, Span 55.0 MHz, and 691 pts.</p>
CH06	<p>Spectrum plot for CH06. The plot shows a signal centered at 2.4345330 GHz with a peak level of -9.63 dBm. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in GHz, with a center frequency (CF) of 2.437 GHz and a span of 55.0 MHz. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 30 kHz, Mode Auto FFT, Count 100/100, CF 2.437 GHz, Span 55.0 MHz, and 691 pts.</p>
CH09	<p>Spectrum plot for CH09. The plot shows a signal centered at 2.4502880 GHz with a peak level of -9.64 dBm. The y-axis represents power in dBm, ranging from -70 to 10. The x-axis represents frequency in GHz, with a center frequency (CF) of 2.452 GHz and a span of 55.0 MHz. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 30 kHz, Mode Auto FFT, Count 100/100, CF 2.452 GHz, Span 55.0 MHz, and 691 pts.</p>

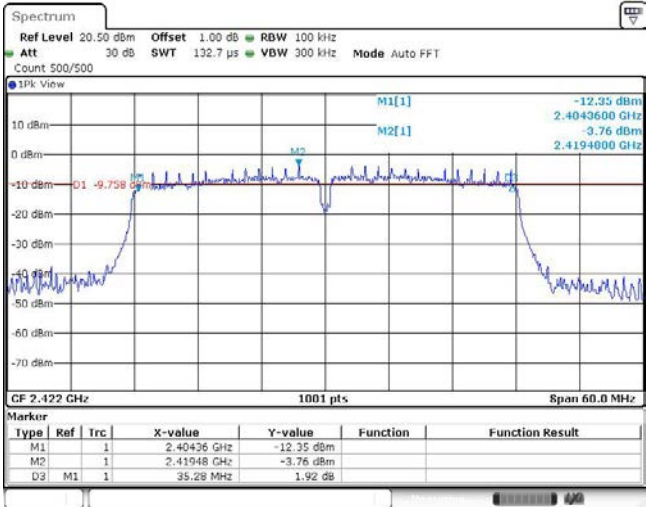
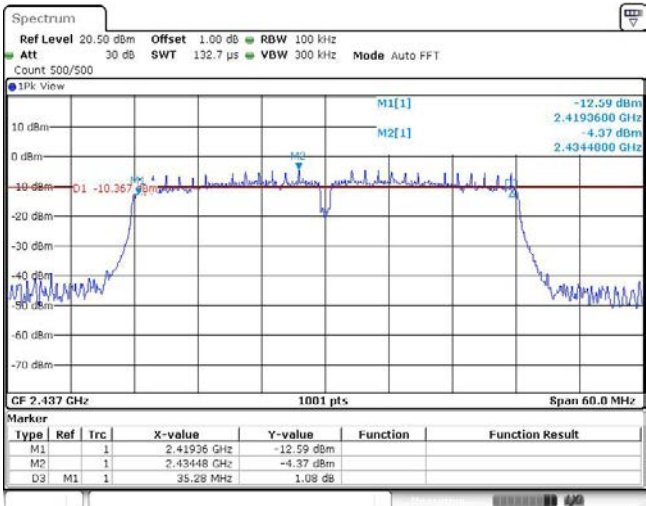
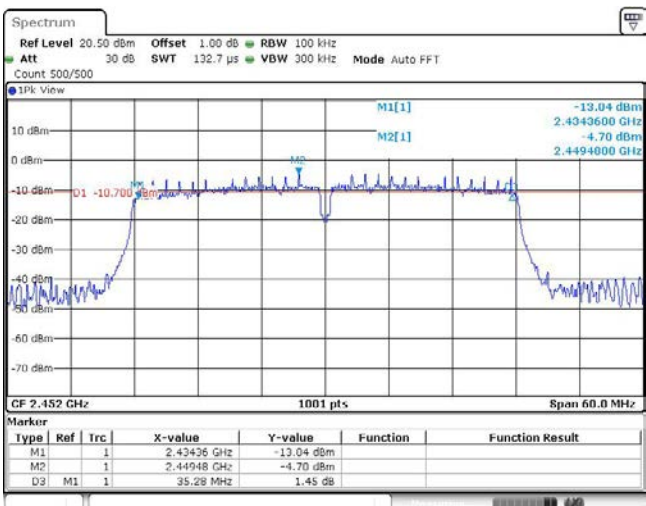
APPENDIX B

DTS Bandwidth			
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b_11Mbps	2412	10.08	≥500
	2437	9.12	≥500
	2462	9.60	≥500
802.11g_54Mbps	2412	15.15	≥500
	2437	15.15	≥500
	2462	15.48	≥500
802.11n-HT20_MCS7	2412	15.15	≥500
	2437	17.64	≥500
	2462	15.93	≥500
802.11n-HT40_MCS7	2422	35.28	≥500
	2437	35.28	≥500
	2452	35.28	≥500

Type:	802.11b																												
CH01	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40696 GHz</td> <td>-0.75 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.41101 GHz</td> <td>6.00 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>10.08 MHz</td> <td>0.55 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40696 GHz	-0.75 dBm			M2	1		2.41101 GHz	6.00 dBm			D3	M1	1	10.08 MHz	0.55 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.40696 GHz	-0.75 dBm																									
M2	1		2.41101 GHz	6.00 dBm																									
D3	M1	1	10.08 MHz	0.55 dB																									
CH06	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.43244 GHz</td> <td>-1.39 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.43649 GHz</td> <td>5.53 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>9.12 MHz</td> <td>0.44 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.43244 GHz	-1.39 dBm			M2	1		2.43649 GHz	5.53 dBm			D3	M1	1	9.12 MHz	0.44 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.43244 GHz	-1.39 dBm																									
M2	1		2.43649 GHz	5.53 dBm																									
D3	M1	1	9.12 MHz	0.44 dB																									
CH11	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.45744 GHz</td> <td>-1.94 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.46299 GHz</td> <td>5.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>9.6 MHz</td> <td>0.53 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.45744 GHz	-1.94 dBm			M2	1		2.46299 GHz	5.07 dBm			D3	M1	1	9.6 MHz	0.53 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.45744 GHz	-1.94 dBm																									
M2	1		2.46299 GHz	5.07 dBm																									
D3	M1	1	9.6 MHz	0.53 dB																									

Type:	802.11g																												
CH01	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1pk View</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40444 GHz</td> <td>-6.99 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.41326 GHz</td> <td>0.41 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td>15.15 MHz</td> <td>-0.13 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40444 GHz	-6.99 dBm			M2	1		2.41326 GHz	0.41 dBm			D1	M1	1	15.15 MHz	-0.13 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.40444 GHz	-6.99 dBm																									
M2	1		2.41326 GHz	0.41 dBm																									
D1	M1	1	15.15 MHz	-0.13 dB																									
CH06	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1pk View</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.42944 GHz</td> <td>-7.04 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.43574 GHz</td> <td>0.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td>15.15 MHz</td> <td>-0.14 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.42944 GHz	-7.04 dBm			M2	1		2.43574 GHz	0.07 dBm			D1	M1	1	15.15 MHz	-0.14 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.42944 GHz	-7.04 dBm																									
M2	1		2.43574 GHz	0.07 dBm																									
D1	M1	1	15.15 MHz	-0.14 dB																									
CH11	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1pk View</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.45444 GHz</td> <td>-8.01 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.46326 GHz</td> <td>-0.93 dBm</td> <td></td> <td></td> </tr> <tr> <td>D1</td> <td>M1</td> <td>1</td> <td>15.48 MHz</td> <td>0.64 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.45444 GHz	-8.01 dBm			M2	1		2.46326 GHz	-0.93 dBm			D1	M1	1	15.48 MHz	0.64 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.45444 GHz	-8.01 dBm																									
M2	1		2.46326 GHz	-0.93 dBm																									
D1	M1	1	15.48 MHz	0.64 dB																									

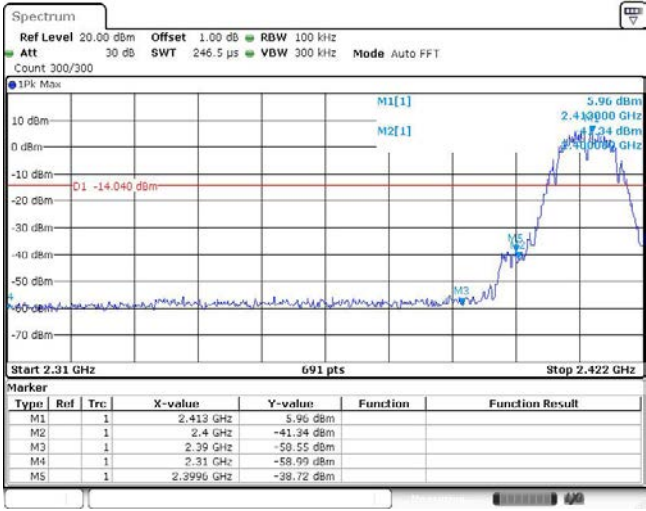

Type:	802.11n(HT20)																												
CH01	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -6.23 dBm 2.404440 GHz M2[1] 0.40 dBm 2.413260 GHz</p> <p>D1 -5.595 dBm</p> <p>CF 2.412 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40444 GHz</td> <td>-6.23 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.41326 GHz</td> <td>0.40 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>15.15 MHz</td> <td>-0.55 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40444 GHz	-6.23 dBm			M2	1		2.41326 GHz	0.40 dBm			D3	M1	1	15.15 MHz	-0.55 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.40444 GHz	-6.23 dBm																									
M2	1		2.41326 GHz	0.40 dBm																									
D3	M1	1	15.15 MHz	-0.55 dB																									
CH06	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -8.48 dBm 2.420100 GHz M2[1] -1.70 dBm 2.442010 GHz</p> <p>D1 -7.698 dBm</p> <p>CF 2.437 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.42010 GHz</td> <td>-8.48 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.44201 GHz</td> <td>-1.70 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>17.64 MHz</td> <td>0.46 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.42010 GHz	-8.48 dBm			M2	1		2.44201 GHz	-1.70 dBm			D3	M1	1	17.64 MHz	0.46 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.42010 GHz	-8.48 dBm																									
M2	1		2.44201 GHz	-1.70 dBm																									
D3	M1	1	17.64 MHz	0.46 dB																									
CH11	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -7.17 dBm 2.454470 GHz M2[1] -0.71 dBm 2.463260 GHz</p> <p>D1 -6.711 dBm</p> <p>CF 2.462 GHz 1001 pts Span 30.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.45447 GHz</td> <td>-7.17 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.46326 GHz</td> <td>-0.71 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>15.92 MHz</td> <td>0.46 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.45447 GHz	-7.17 dBm			M2	1		2.46326 GHz	-0.71 dBm			D3	M1	1	15.92 MHz	0.46 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.45447 GHz	-7.17 dBm																									
M2	1		2.46326 GHz	-0.71 dBm																									
D3	M1	1	15.92 MHz	0.46 dB																									

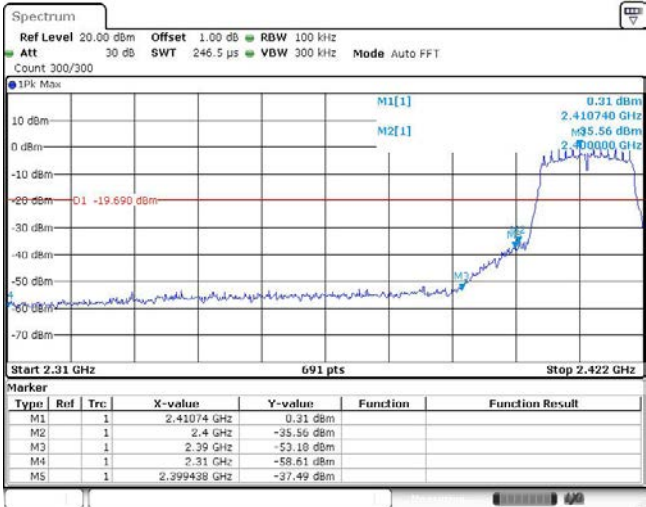
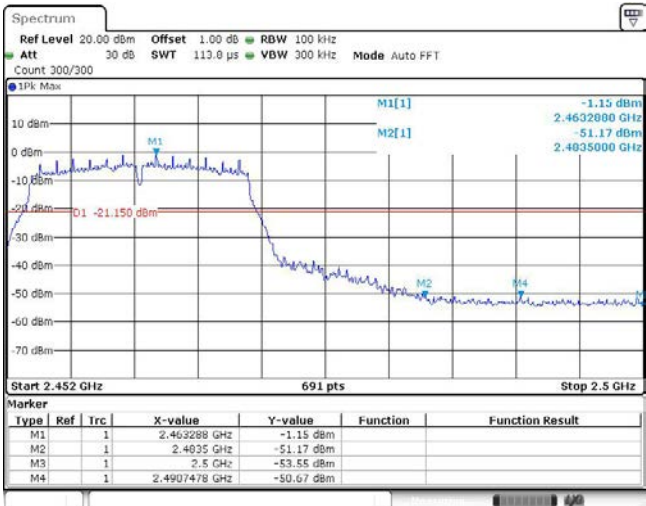
Type:	802.11n(HT40)																												
CH03	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>M1[1] -12.35 dBm 2.4043600 GHz M2[1] -3.76 dBm 2.4194000 GHz</p> <p>D1 -9.758 dBm</p> <p>CF 2.422 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40436 GHz</td> <td>-12.35 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.41948 GHz</td> <td>-3.76 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.28 MHz</td> <td>1.92 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40436 GHz	-12.35 dBm			M2	1		2.41948 GHz	-3.76 dBm			D3	M1	1	35.28 MHz	1.92 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.40436 GHz	-12.35 dBm																									
M2	1		2.41948 GHz	-3.76 dBm																									
D3	M1	1	35.28 MHz	1.92 dB																									
CH06	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>M1[1] -12.59 dBm 2.4193600 GHz M2[1] -4.37 dBm 2.4344000 GHz</p> <p>D1 -10.367 dBm</p> <p>CF 2.437 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41936 GHz</td> <td>-12.59 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.43448 GHz</td> <td>-4.37 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.28 MHz</td> <td>1.08 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41936 GHz	-12.59 dBm			M2	1		2.43448 GHz	-4.37 dBm			D3	M1	1	35.28 MHz	1.08 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.41936 GHz	-12.59 dBm																									
M2	1		2.43448 GHz	-4.37 dBm																									
D3	M1	1	35.28 MHz	1.08 dB																									
CH09	 <p>Spectrum</p> <p>Ref Level 20.50 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 132.7 μs VBW 300 kHz Mode Auto FFT Count 500/500</p> <p>1Pk View</p> <p>M1[1] -13.04 dBm 2.4343600 GHz M2[1] -4.70 dBm 2.4494000 GHz</p> <p>D1 -10.700 dBm</p> <p>CF 2.452 GHz 1001 pts Span 60.0 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.43436 GHz</td> <td>-13.04 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.44948 GHz</td> <td>-4.70 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.28 MHz</td> <td>1.45 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.43436 GHz	-13.04 dBm			M2	1		2.44948 GHz	-4.70 dBm			D3	M1	1	35.28 MHz	1.45 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1	1		2.43436 GHz	-13.04 dBm																									
M2	1		2.44948 GHz	-4.70 dBm																									
D3	M1	1	35.28 MHz	1.45 dB																									


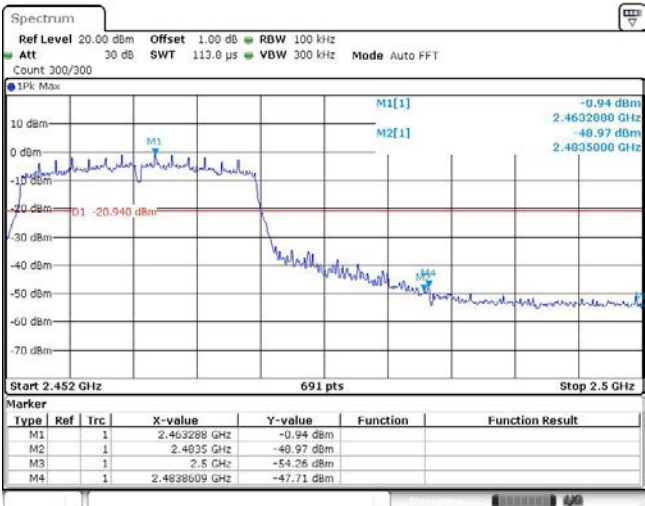
APPENDIX C

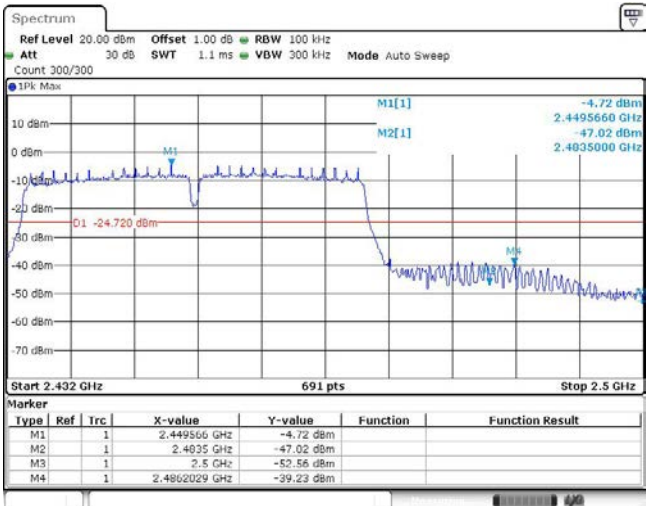
Output power			
Test Mode	Frequency MHz	Reading dBm	Limit dBm
802.11b_11Mbps	2412	18.50	30.00
	2437	18.16	30.00
	2462	18.12	30.00
802.11g_54Mbps	2412	16.94	30.00
	2437	16.46	30.00
	2462	16.54	30.00
802.11n HT20_MCS7	2412	16.45	30.00
	2437	16.04	30.00
	2462	16.74	30.00
802.11n HT40_MCS7	2422	16.27	30.00
	2437	15.81	30.00
	2452	15.77	30.00

APPENDIX D

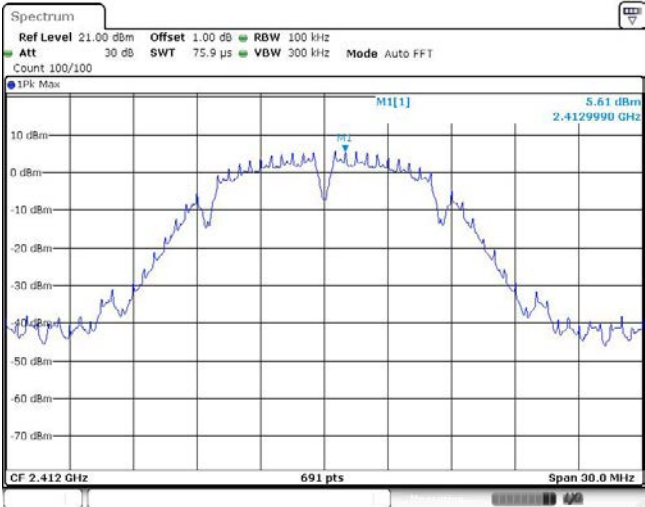
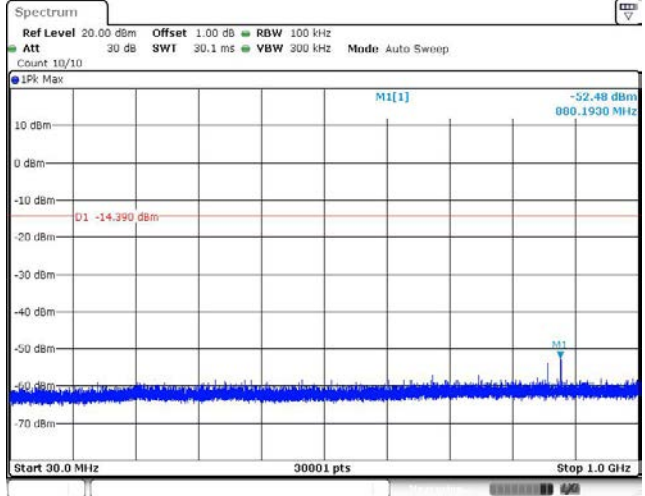
Test Item:	Bandedge	Type:	802.11b																																										
CH01	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.413 GHz</td> <td>5.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-41.34 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-58.99 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.3996 GHz</td> <td>-38.72 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.413 GHz	5.96 dBm			M2	1		2.4 GHz	-41.34 dBm			M3	1		2.39 GHz	-59.55 dBm			M4	1		2.31 GHz	-58.99 dBm			M5	1		2.3996 GHz	-38.72 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.413 GHz	5.96 dBm																																									
M2	1		2.4 GHz	-41.34 dBm																																									
M3	1		2.39 GHz	-59.55 dBm																																									
M4	1		2.31 GHz	-58.99 dBm																																									
M5	1		2.3996 GHz	-38.72 dBm																																									
CH11	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <p>Marker</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.46301 GHz</td> <td>4.47 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4635 GHz</td> <td>-54.00 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-56.16 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4950609 GHz</td> <td>-54.10 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.46301 GHz	4.47 dBm			M2	1		2.4635 GHz	-54.00 dBm			M3	1		2.5 GHz	-56.16 dBm			M4	1		2.4950609 GHz	-54.10 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.46301 GHz	4.47 dBm																																									
M2	1		2.4635 GHz	-54.00 dBm																																									
M3	1		2.5 GHz	-56.16 dBm																																									
M4	1		2.4950609 GHz	-54.10 dBm																																									

Test Item:	Bandedge	Type:	802.11g																																										
CH01	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] 0.31 dBm 2.410740 GHz M2[1] -35.56 dBm 2.400000 GHz M3[1] -53.18 dBm 2.39 GHz M4[1] -58.61 dBm 2.31 GHz M5[1] -37.49 dBm 2.399438 GHz</p> <p>D1 -19.690 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41074 GHz</td> <td>0.31 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-35.56 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-53.18 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-58.61 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399438 GHz</td> <td>-37.49 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41074 GHz	0.31 dBm			M2	1		2.4 GHz	-35.56 dBm			M3	1		2.39 GHz	-53.18 dBm			M4	1		2.31 GHz	-58.61 dBm			M5	1		2.399438 GHz	-37.49 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41074 GHz	0.31 dBm																																									
M2	1		2.4 GHz	-35.56 dBm																																									
M3	1		2.39 GHz	-53.18 dBm																																									
M4	1		2.31 GHz	-58.61 dBm																																									
M5	1		2.399438 GHz	-37.49 dBm																																									
CH11	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.0 μs VBW 300 kHz Mode Auto FFT Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -1.15 dBm 2.4632880 GHz M2[1] -51.17 dBm 2.4635000 GHz M3[1] -53.55 dBm 2.5 GHz M4[1] -50.67 dBm 2.4907478 GHz</p> <p>D1 -21.150 dBm</p> <p>Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.463288 GHz</td> <td>-1.15 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4635 GHz</td> <td>-51.17 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-53.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4907478 GHz</td> <td>-50.67 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.463288 GHz	-1.15 dBm			M2	1		2.4635 GHz	-51.17 dBm			M3	1		2.5 GHz	-53.55 dBm			M4	1		2.4907478 GHz	-50.67 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.463288 GHz	-1.15 dBm																																									
M2	1		2.4635 GHz	-51.17 dBm																																									
M3	1		2.5 GHz	-53.55 dBm																																									
M4	1		2.4907478 GHz	-50.67 dBm																																									

Test Item:	Bandedge	Type:	802.11n(HT20)																																																
CH01	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] 0.24 dBm 2.410740 GHz M2[1] -37.18 dBm 2.4 GHz M3[1] -49.13 dBm 2.39 GHz M4[1] -58.81 dBm 2.31 GHz M5[1] -35.83 dBm 2.399762 GHz D1 -19.760 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.41074 GHz</td> <td>0.24 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4 GHz</td> <td>-37.18 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.39 GHz</td> <td>-49.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.31 GHz</td> <td>-58.81 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td></td> <td>2.399762 GHz</td> <td>-35.83 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.41074 GHz	0.24 dBm			M2	1			2.4 GHz	-37.18 dBm			M3	1			2.39 GHz	-49.13 dBm			M4	1			2.31 GHz	-58.81 dBm			M5	1			2.399762 GHz	-35.83 dBm		
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.41074 GHz	0.24 dBm																																														
M2	1			2.4 GHz	-37.18 dBm																																														
M3	1			2.39 GHz	-49.13 dBm																																														
M4	1			2.31 GHz	-58.81 dBm																																														
M5	1			2.399762 GHz	-35.83 dBm																																														
CH11	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.0 μs VBW 300 kHz Mode Auto FFT Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -0.94 dBm 2.4632880 GHz M2[1] -48.97 dBm 2.4635000 GHz M3[1] -54.26 dBm 2.5 GHz M4[1] -47.71 dBm 2.4838609 GHz D1 -20.940 dBm</p> <p>Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td></td> <td>2.463288 GHz</td> <td>-0.94 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td></td> <td>2.4635 GHz</td> <td>-48.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td></td> <td>2.5 GHz</td> <td>-54.26 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td></td> <td>2.4838609 GHz</td> <td>-47.71 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1			2.463288 GHz	-0.94 dBm			M2	1			2.4635 GHz	-48.97 dBm			M3	1			2.5 GHz	-54.26 dBm			M4	1			2.4838609 GHz	-47.71 dBm										
Marker	Type	Ref	Trc	X-value	Y-value	Function	Function Result																																												
M1	1			2.463288 GHz	-0.94 dBm																																														
M2	1			2.4635 GHz	-48.97 dBm																																														
M3	1			2.5 GHz	-54.26 dBm																																														
M4	1			2.4838609 GHz	-47.71 dBm																																														

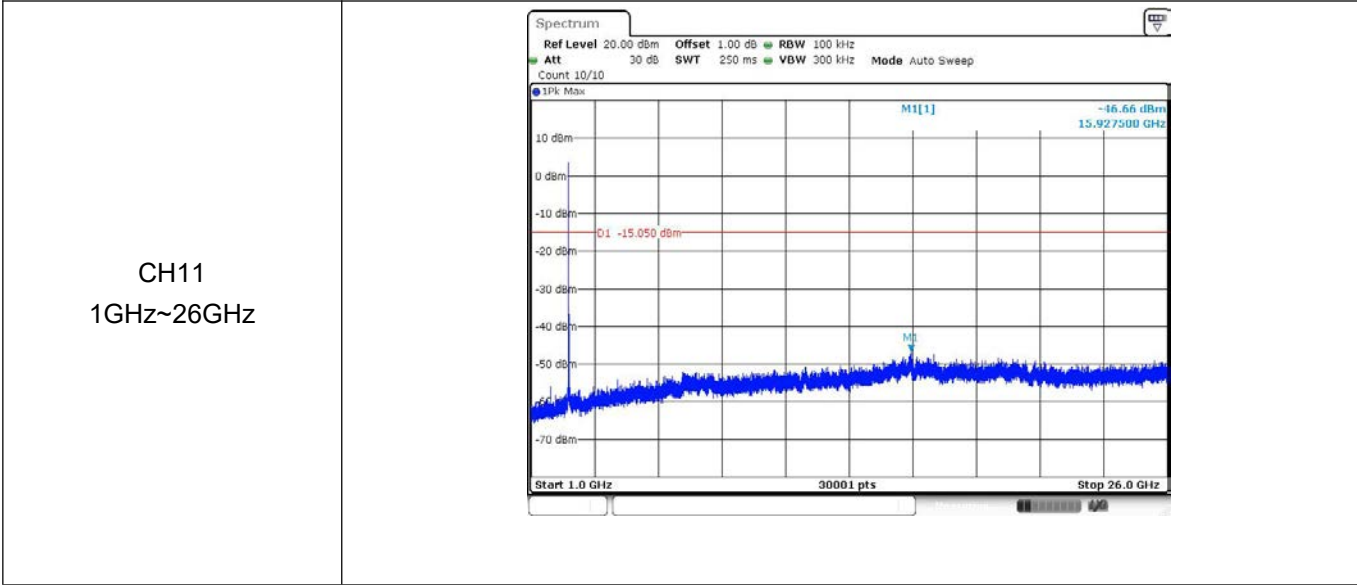
Test Item:	Bandedge	Type:	802.11n(HT40)																																										
CH03	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 303.4 µs VBW 300 kHz Mode Auto FFT Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -3.99 dBm 2.427000 GHz M2[1] -42.55 dBm 2.400000 GHz M3 M4 M5</p> <p>D1 -23.990 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.442 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.427 GHz</td> <td>-3.99 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-42.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-46.49 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.62 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.396278 GHz</td> <td>-37.70 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.427 GHz	-3.99 dBm			M2	1		2.4 GHz	-42.55 dBm			M3	1		2.39 GHz	-46.49 dBm			M4	1		2.31 GHz	-59.62 dBm			M5	1		2.396278 GHz	-37.70 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.427 GHz	-3.99 dBm																																									
M2	1		2.4 GHz	-42.55 dBm																																									
M3	1		2.39 GHz	-46.49 dBm																																									
M4	1		2.31 GHz	-59.62 dBm																																									
M5	1		2.396278 GHz	-37.70 dBm																																									
CH09	 <p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep Count 300/300</p> <p>1Pk Max</p> <p>10 dBm 0 dBm -10 dBm -20 dBm -30 dBm -40 dBm -50 dBm -60 dBm -70 dBm</p> <p>M1[1] -4.72 dBm 2.4495660 GHz M2[1] -47.02 dBm 2.4035000 GHz M3 M4</p> <p>D1 -24.720 dBm</p> <p>Start 2.432 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.4495660 GHz</td> <td>-4.72 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4035 GHz</td> <td>-47.02 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-52.56 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4862029 GHz</td> <td>-39.23 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.4495660 GHz	-4.72 dBm			M2	1		2.4035 GHz	-47.02 dBm			M3	1		2.5 GHz	-52.56 dBm			M4	1		2.4862029 GHz	-39.23 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.4495660 GHz	-4.72 dBm																																									
M2	1		2.4035 GHz	-47.02 dBm																																									
M3	1		2.5 GHz	-52.56 dBm																																									
M4	1		2.4862029 GHz	-39.23 dBm																																									

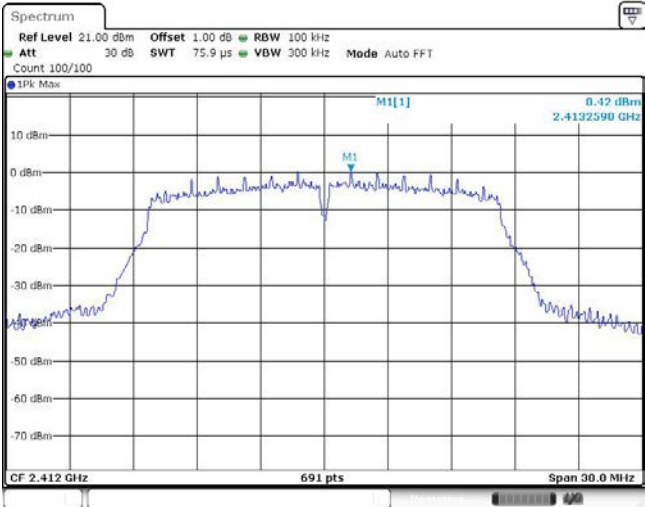
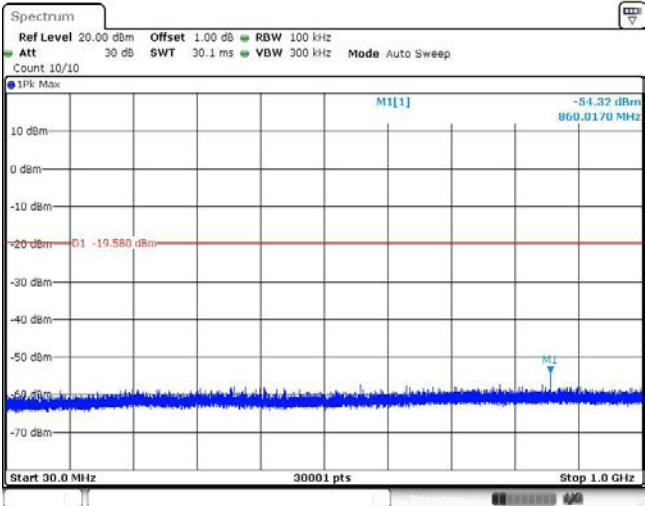
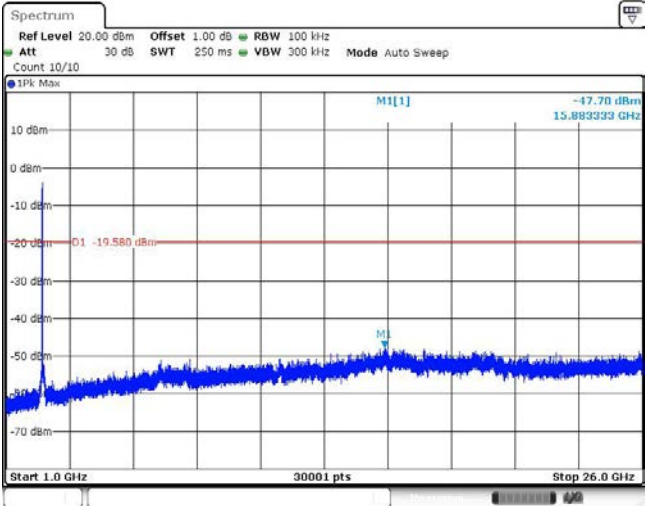
APPENDIX E

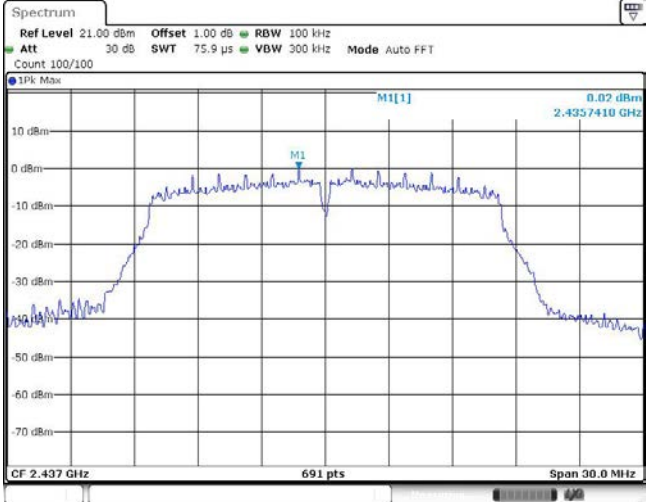
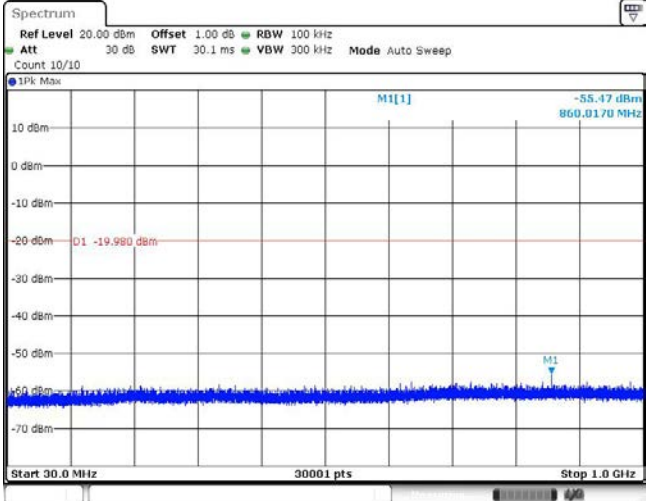
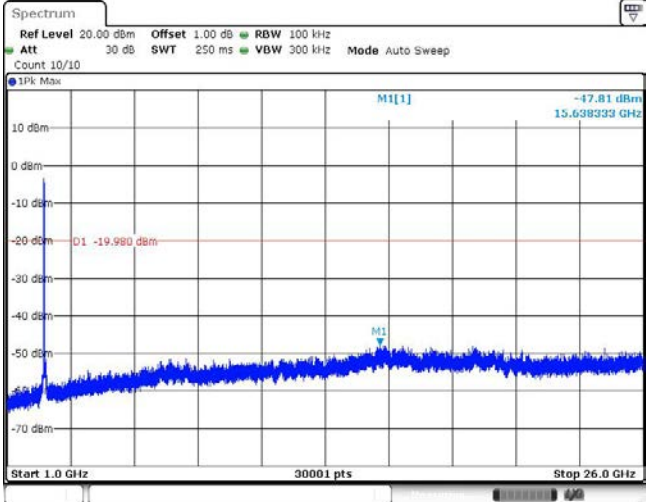
Test Item:	SE	Type:	802.11b
<p>CH01 Reference level</p>			
<p>CH01 30MHz~1000MHz</p>			

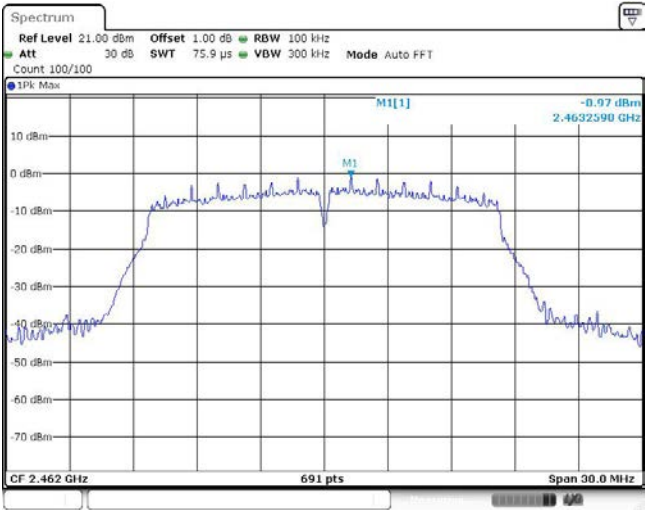
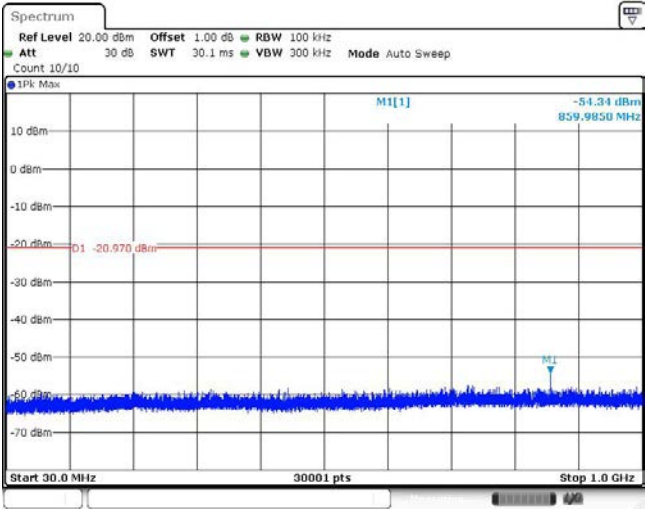
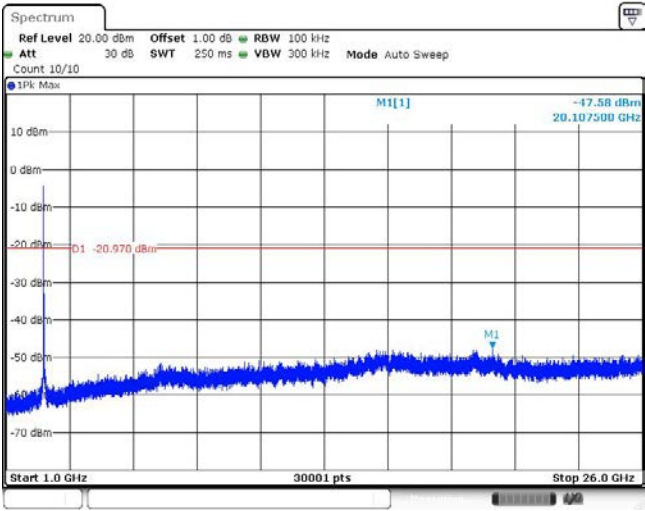
<p>CH01 1GHz~26GHz</p>	
<p>CH06 Reference level</p>	
<p>CH06 30MHz~1000MHz</p>	

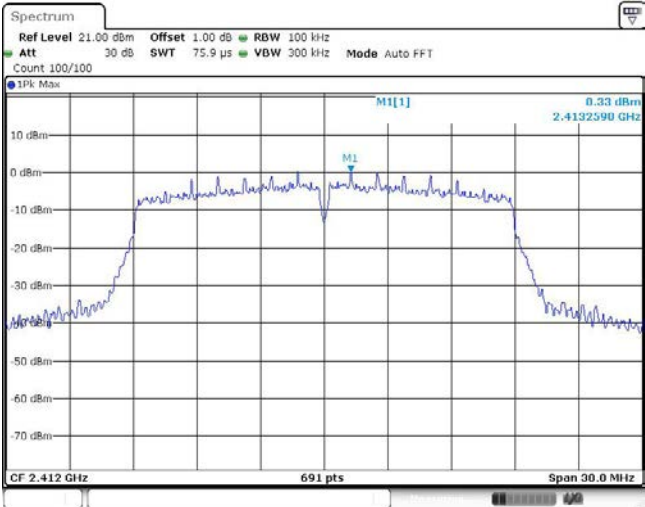
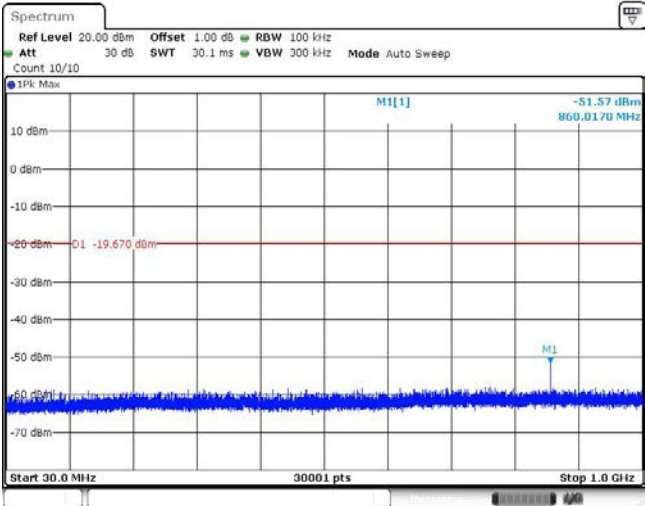
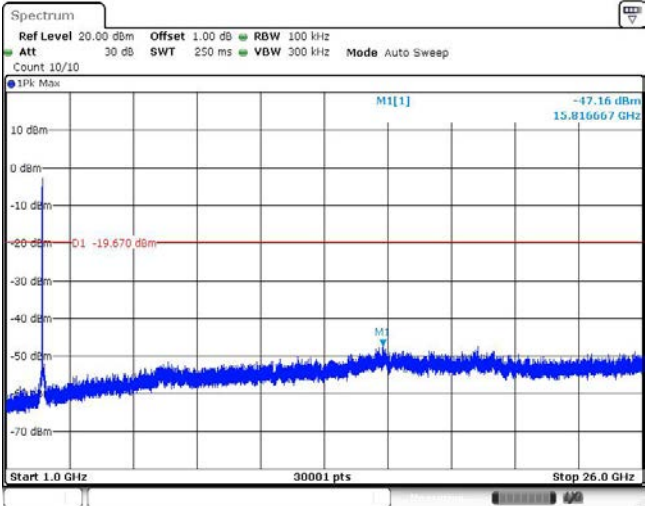
<p>CH06 1GHz~26GHz</p>	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max M1[1] -18.07 dBm 19.527500 GHz D1 -14.530 dBm Start 1.0 GHz 30001 pts Stop 26.0 GHz</p>
<p>CH11 Reference level</p>	<p>Spectrum Ref Level 21.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 75.9 μs VBW 300 kHz Mode Auto FFT Count 100/100 1Pk Max M1[1] 4.95 dBm 2.4615220 GHz CF 2.462 GHz 691 pts Span 30.0 MHz</p>
<p>CH11 30MHz~1000MHz</p>	<p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 1Pk Max M1[1] -51.85 dBm 860.0170 MHz D1 -15.050 dBm Start 30.0 MHz 30001 pts Stop 1.0 GHz</p>



Test Item:	SE	Type:	802.11g
<p>CH01 Reference level</p>			
<p>CH01 30MHz~1000MHz</p>			
<p>CH01 1GHz~26GHz</p>			

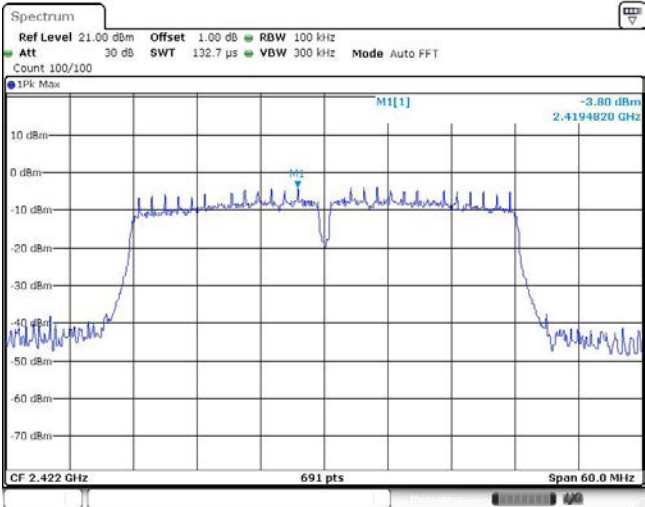
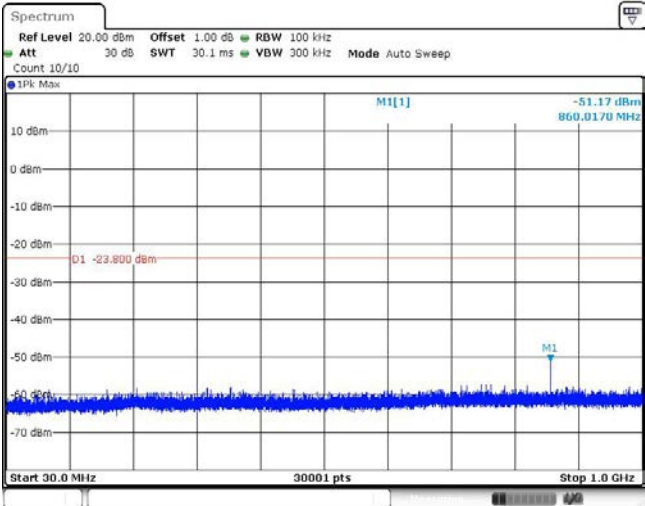
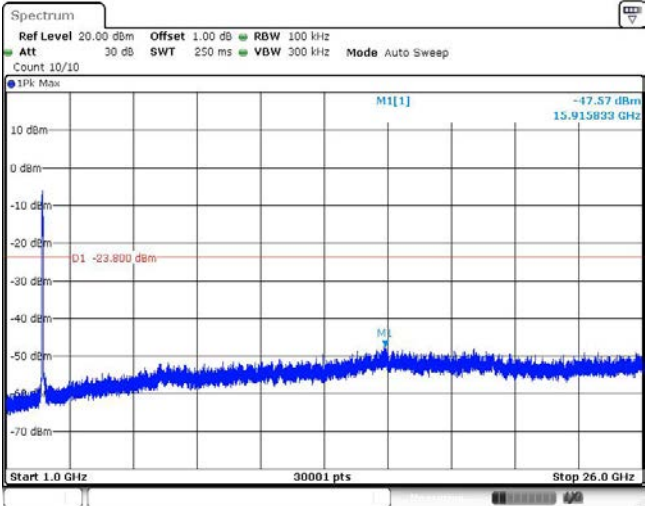
<p>CH06 Reference level</p>	
<p>CH06 30MHz~1000MHz</p>	
<p>CH06 1GHz~26GHz</p>	

<p>CH11 Reference level</p>	
<p>CH11 30MHz~1000MHz</p>	
<p>CH11 1GHz~26GHz</p>	

Test Item:	SE	Type:	802.11n(HT20)
<p>CH01 Reference level</p>			
<p>CH01 30MHz~1000MHz</p>			
<p>CH01 1GHz~26GHz</p>			

<p>CH06 Reference level</p>	
<p>CH06 30MHz~1000MHz</p>	
<p>CH06 1GHz~26GHz</p>	

<p>CH11 Reference level</p>	
<p>CH11 30MHz~1000MHz</p>	
<p>CH11 1GHz~26GHz</p>	

Test Item:	SE	Type:	802.11n(HT40)
<p>CH03 Reference level</p>			
<p>CH03 30MHz~1000MHz</p>			
<p>CH03 1GHz~26GHz</p>			

<p>CH06 Reference level</p>	
<p>CH06 30MHz~1000MHz</p>	
<p>CH06 1GHz~26GHz</p>	

<p>CH09 Reference level</p>	
<p>CH09 30MHz~1000MHz</p>	
<p>CH09 1GHz~26GHz</p>	

Reference No.: WTX24X01240031W001

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******